


Test Mode: TX G Mode 2412 MHz

Vertical

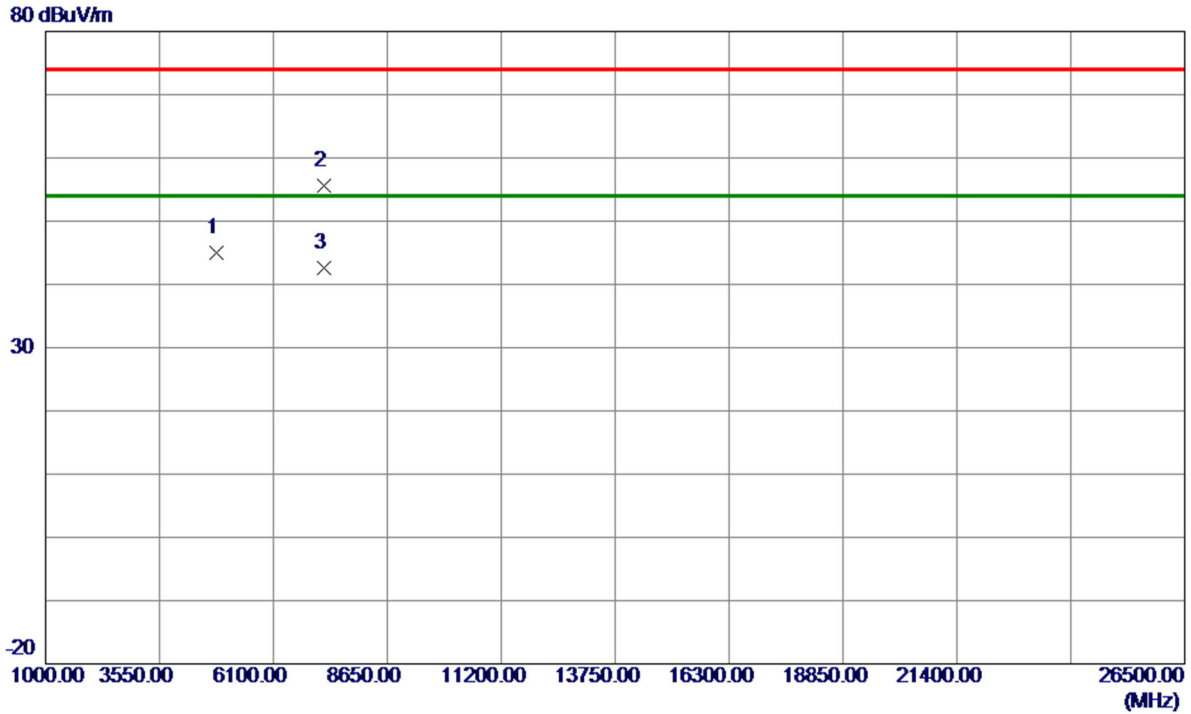


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4825.0000	55.82	-10.90	44.92	74.00	-29.08	Peak	
2	7228.3750	59.72	-4.18	55.54	74.00	-18.46	Peak	
3 *	7233.4800	46.80	-4.17	42.63	54.00	-11.37	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2412 MHz

Horizontal

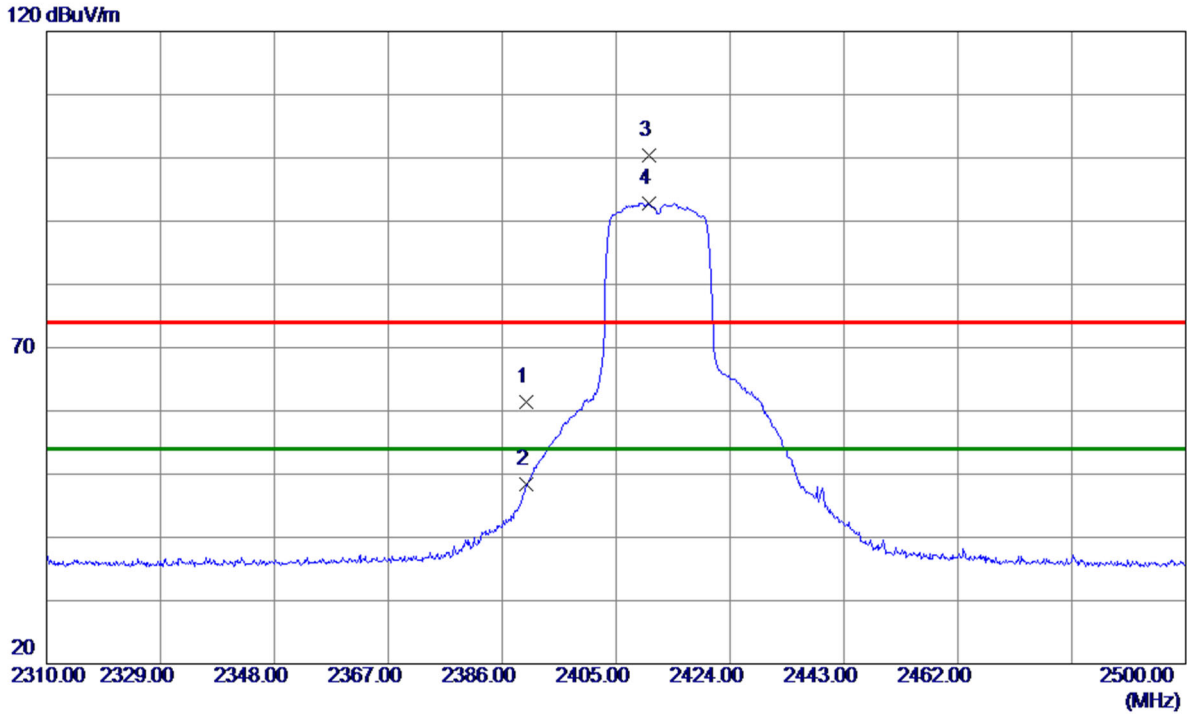


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	29.70	31.74	61.44	74.00	-12.56	Peak	
2	2390.0000	16.69	31.74	48.43	54.00	-5.57	AVG	
3	2410.4150	68.70	31.72	100.42	74.00	26.42	Peak	
4 *	2410.4150	61.16	31.72	92.88	54.00	38.88	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2412 MHz

Horizontal

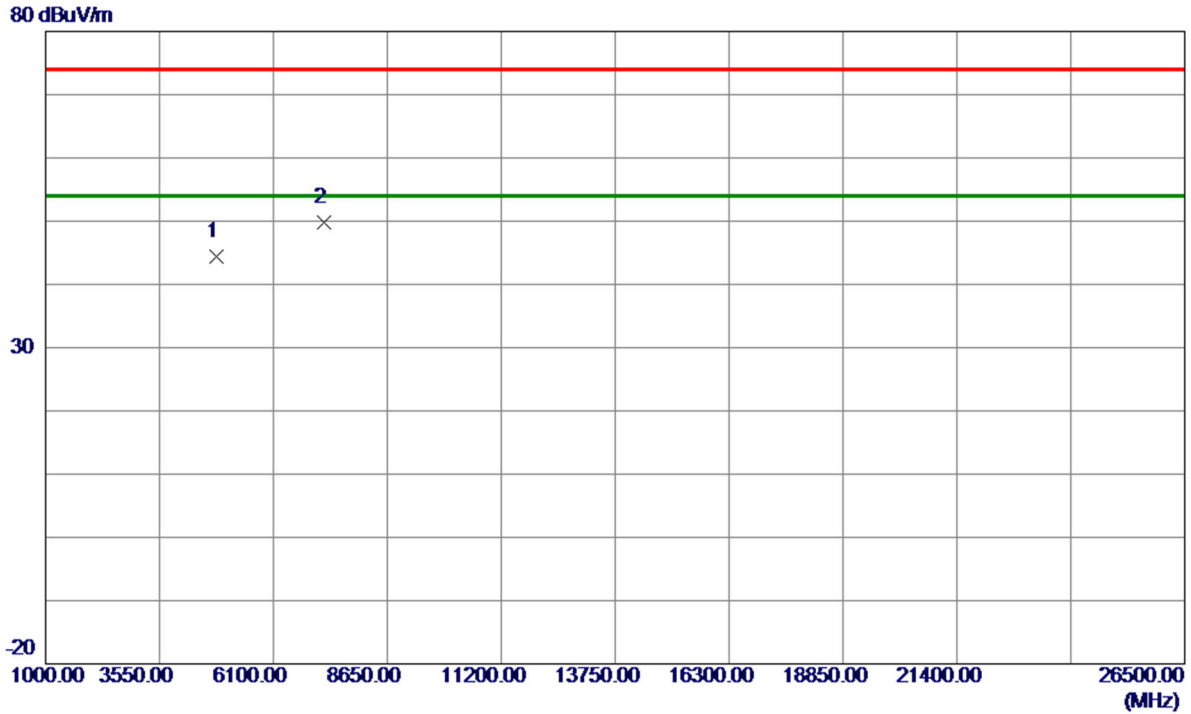

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4825.0000	55.31	-10.90	44.41	74.00	-29.59	Peak	
2 *	7233.4750	53.92	-4.17	49.75	74.00	-24.25	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2437 MHz

Vertical

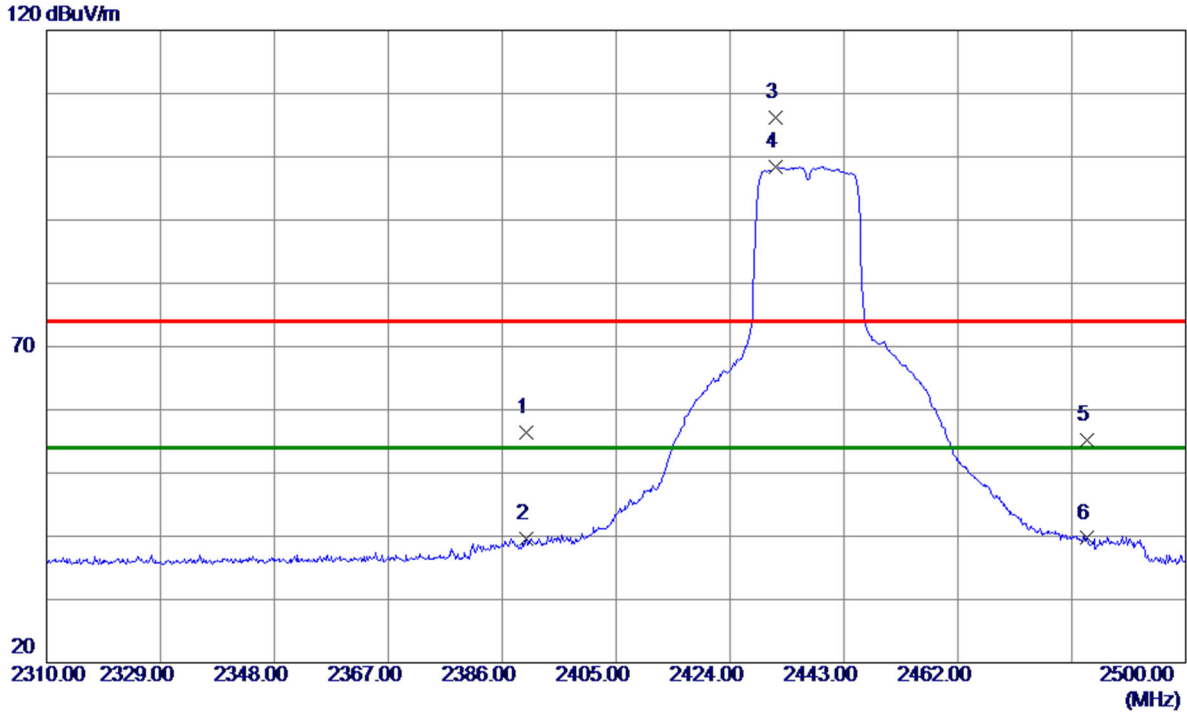


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	24.57	31.74	56.31	74.00	-17.69	Peak	
2	2390.0000	7.95	31.74	39.69	54.00	-14.31	AVG	
3	2431.6000	74.51	31.72	106.23	74.00	32.23	Peak	
4 *	2431.6000	66.75	31.72	98.47	54.00	44.47	AVG	
5	2483.5000	23.45	31.71	55.16	74.00	-18.84	Peak	
6	2483.5000	7.99	31.71	39.70	54.00	-14.30	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2437 MHz

Vertical

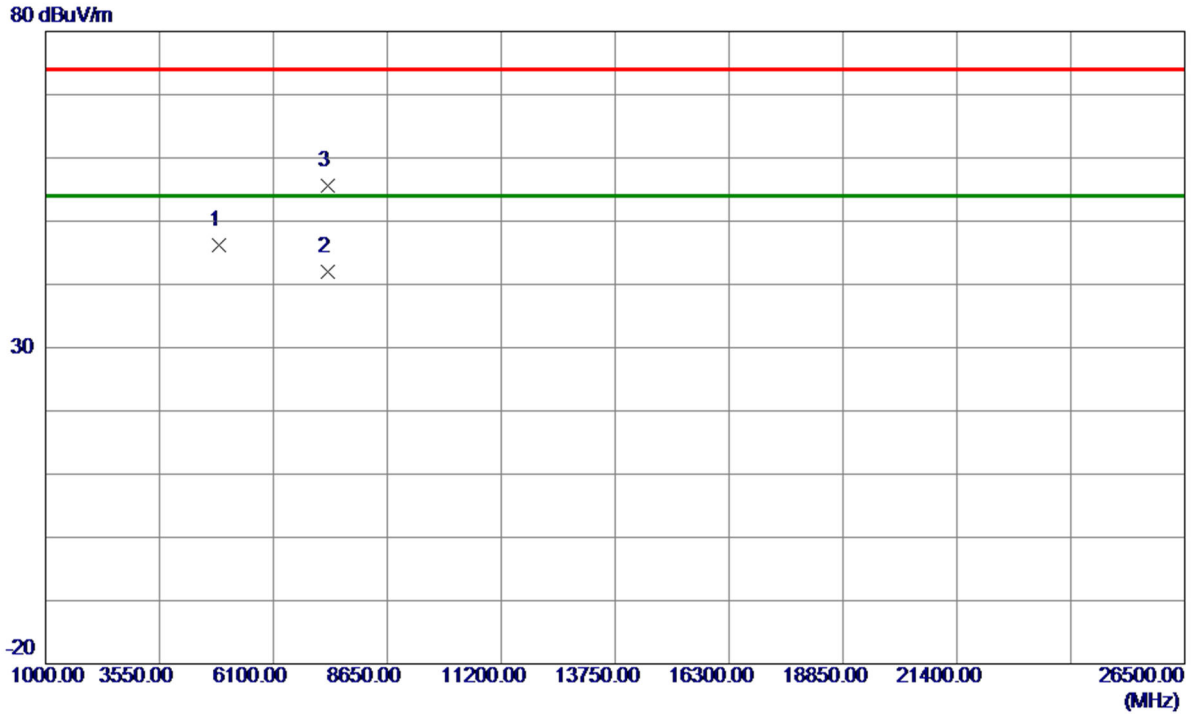


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4878.5500	56.89	-10.78	46.11	74.00	-27.89	Peak	
2 *	7308.0250	45.99	-4.08	41.91	54.00	-12.09	AVG	
3	7312.5250	59.73	-4.07	55.66	74.00	-18.34	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2437 MHz

Horizontal

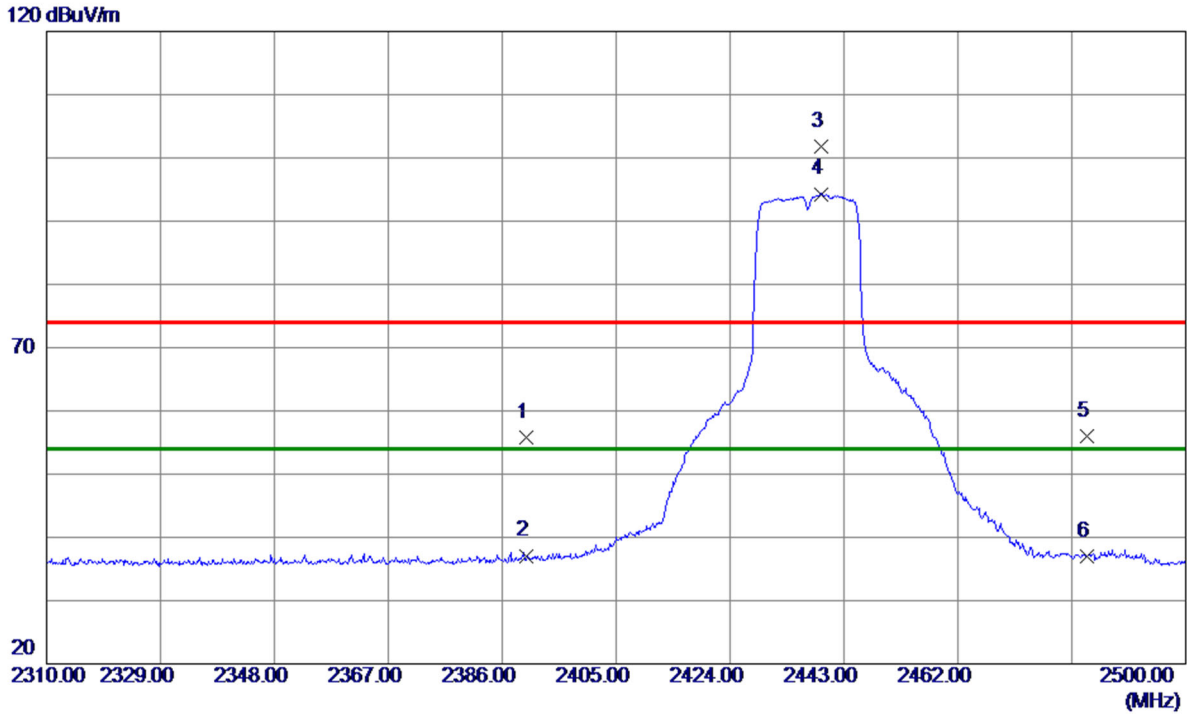


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	24.05	31.74	55.79	74.00	-18.21	Peak	
2	2390.0000	5.36	31.74	37.10	54.00	-16.90	AVG	
3	2439.2950	70.14	31.72	101.86	74.00	27.86	Peak	
4 *	2439.2950	62.58	31.72	94.30	54.00	40.30	AVG	
5	2483.5000	24.23	31.71	55.94	74.00	-18.06	Peak	
6	2483.5000	5.37	31.71	37.08	54.00	-16.92	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2437 MHz

Horizontal

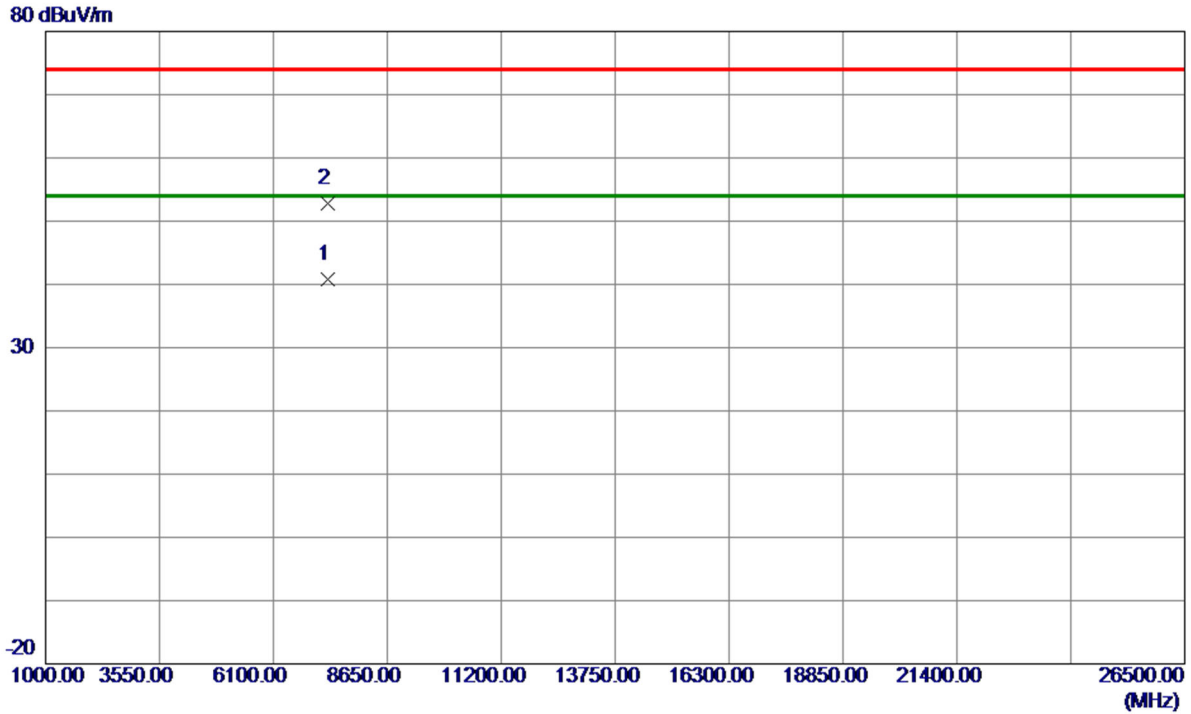

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7311.1930	44.95	-4.07	40.88	54.00	-13.12	AVG	
2	7312.5250	56.83	-4.07	52.76	74.00	-21.24	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2462 MHz

Vertical

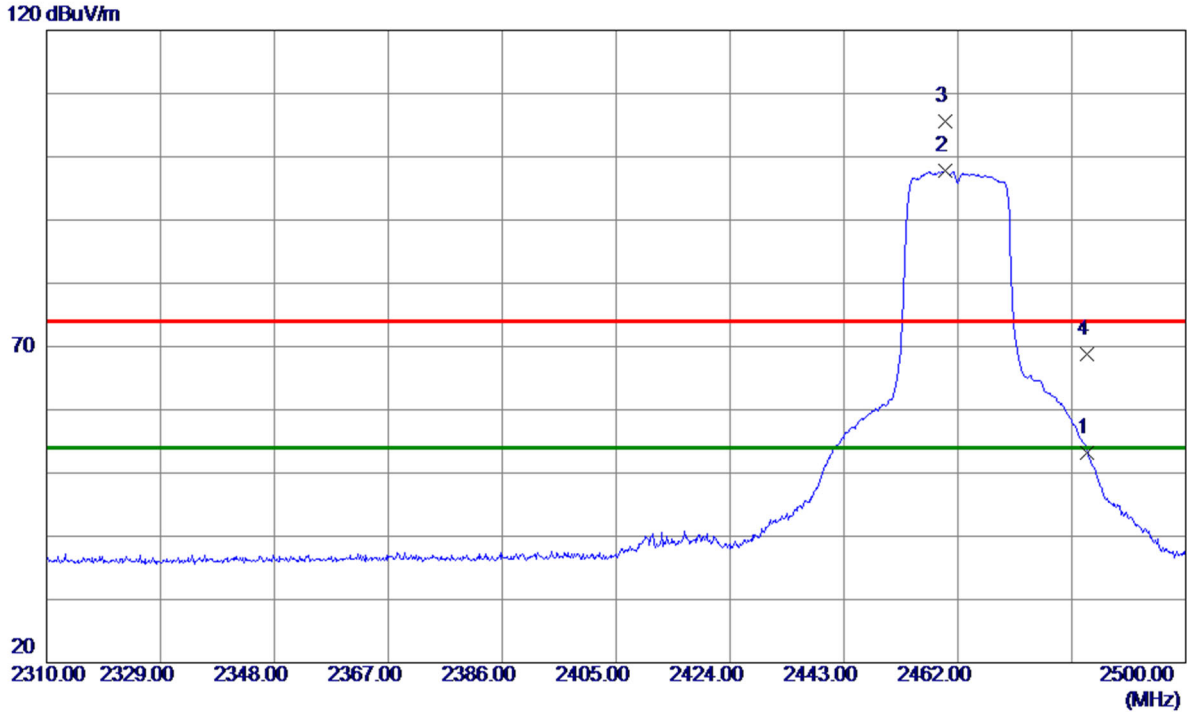


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2483.5000	21.44	31.71	53.15	54.00	-0.85	AVG	
2 *	2459.8150	66.01	31.71	97.72	54.00	43.72	AVG	
3	2459.8150	73.89	31.71	105.60	74.00	31.60	Peak	
4	2483.5000	37.18	31.71	68.89	74.00	-5.11	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2462 MHz

Vertical

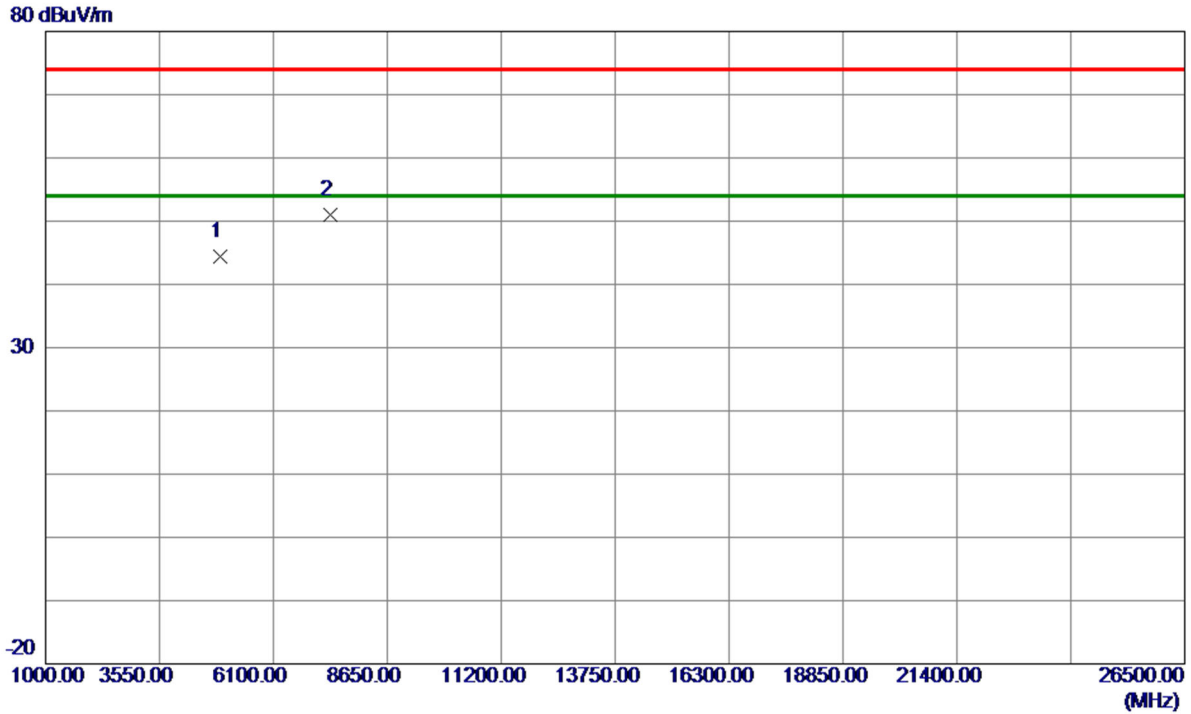


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4920.6250	54.99	-10.64	44.35	74.00	-29.65	Peak	
2 *	7387.7500	54.97	-3.98	50.99	74.00	-23.01	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2462 MHz

Horizontal

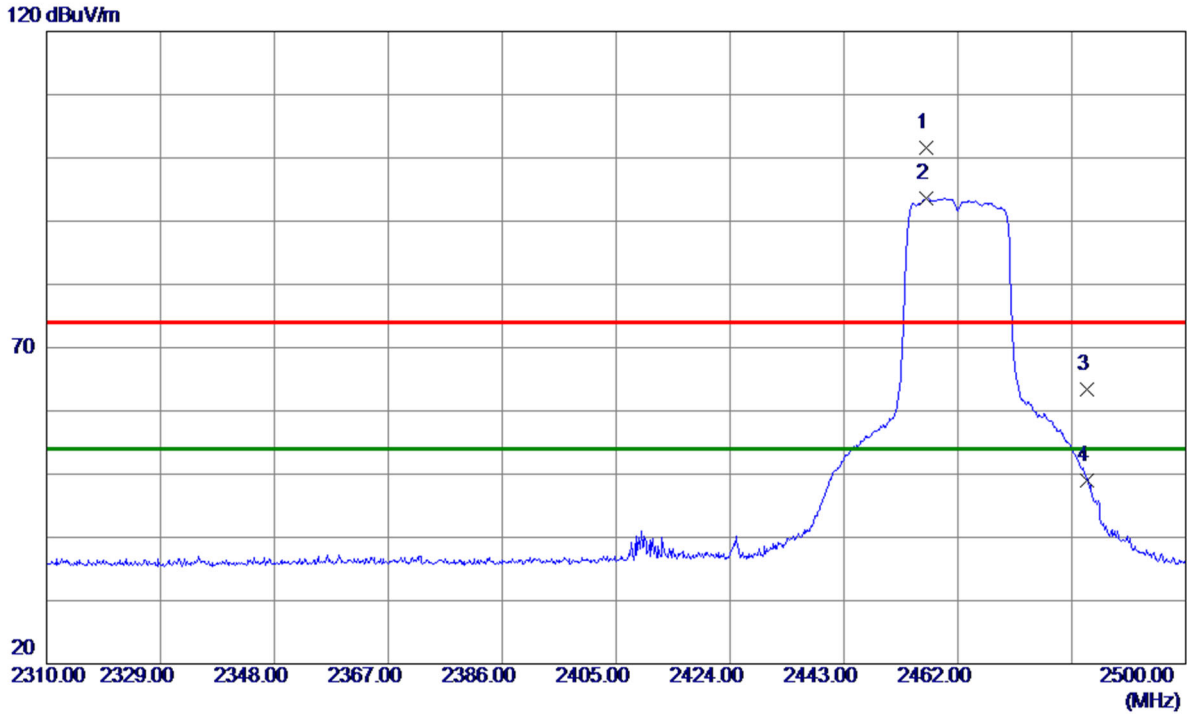


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2456.7750	69.93	31.71	101.64	74.00	27.64	Peak	
2 *	2456.7750	61.85	31.71	93.56	54.00	39.56	AVG	
3	2483.5000	31.60	31.71	63.31	74.00	-10.69	Peak	
4	2483.5000	17.20	31.71	48.91	54.00	-5.09	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2462 MHz

Horizontal

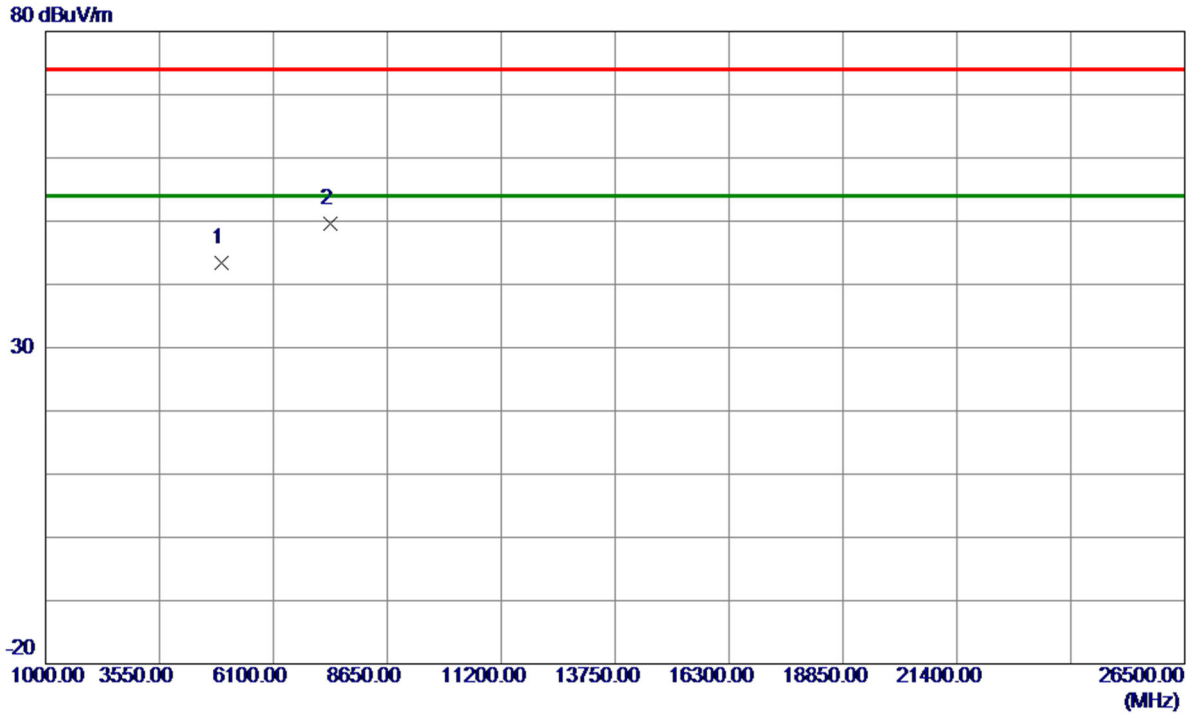


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4930.8250	54.06	-10.59	43.47	74.00	-30.53	Peak	
2 *	7385.2000	53.66	-3.98	49.68	74.00	-24.32	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2412 MHz

Vertical

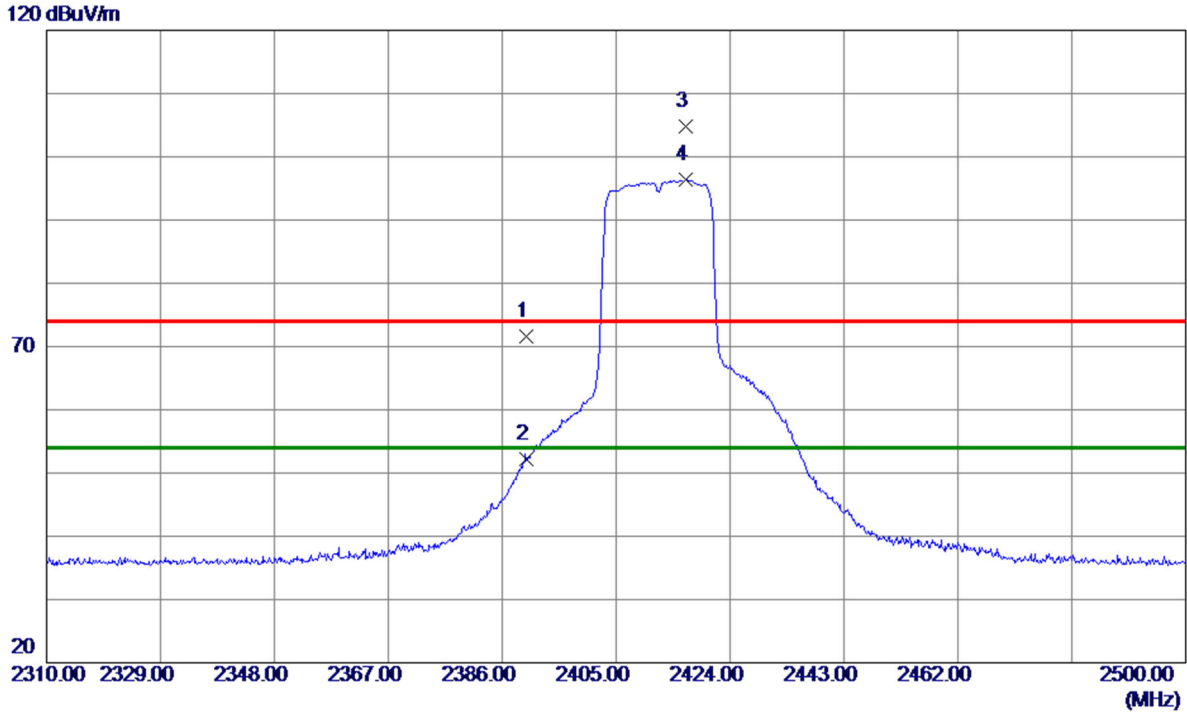


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	39.80	31.74	71.54	74.00	-2.46	Peak	
2	2390.0000	20.41	31.74	52.15	54.00	-1.85	AVG	
3	2416.5900	73.12	31.72	104.84	74.00	30.84	Peak	
4 *	2416.5900	64.68	31.72	96.40	54.00	42.40	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2412 MHz

Vertical

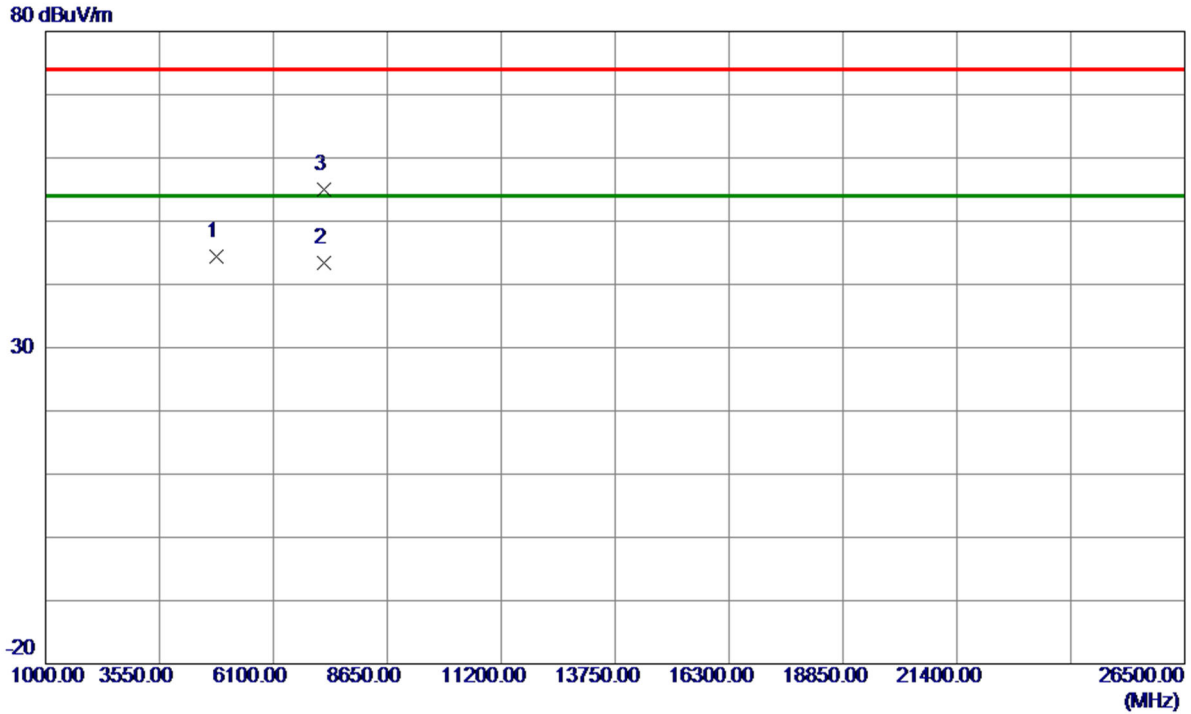


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4818.6250	55.26	-10.92	44.34	74.00	-29.66	Peak	
2 *	7234.1530	47.64	-4.17	43.47	54.00	-10.53	AVG	
3	7236.0250	59.10	-4.17	54.93	74.00	-19.07	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2412 MHz

Horizontal

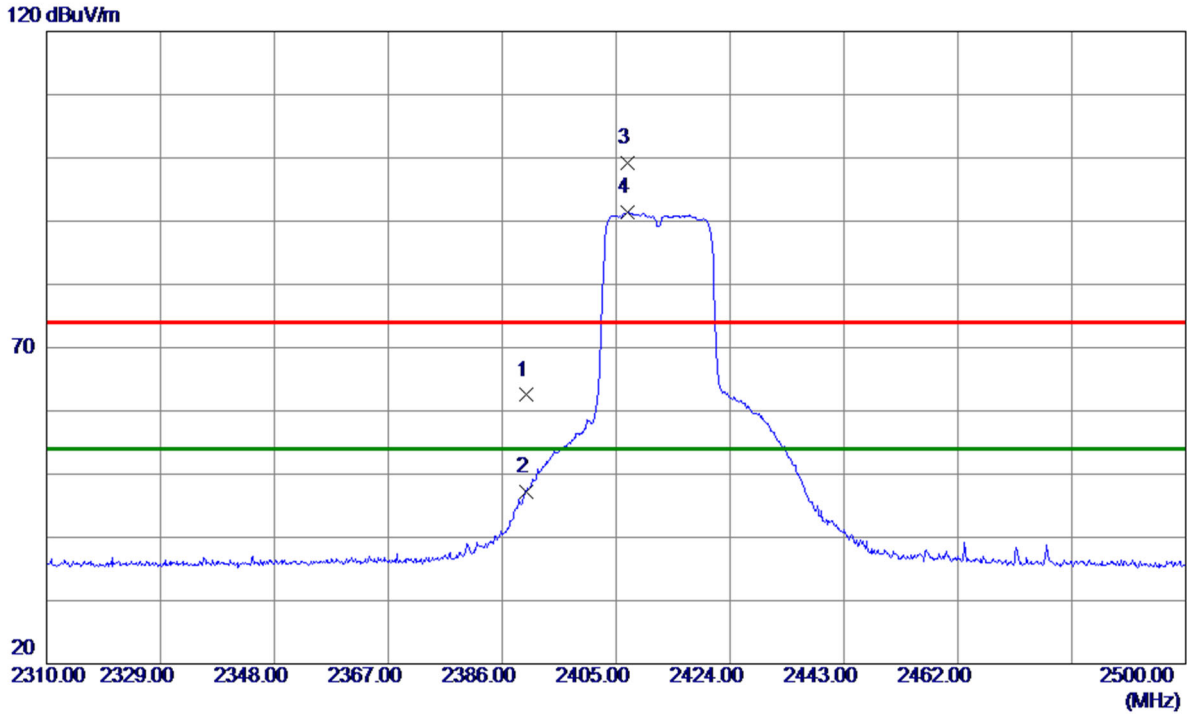


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	30.76	31.74	62.50	74.00	-11.50	Peak	
2	2390.0000	15.46	31.74	47.20	54.00	-6.80	AVG	
3	2406.9950	67.51	31.72	99.23	74.00	25.23	Peak	
4 *	2406.9950	59.64	31.72	91.36	54.00	37.36	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2412 MHz

Horizontal

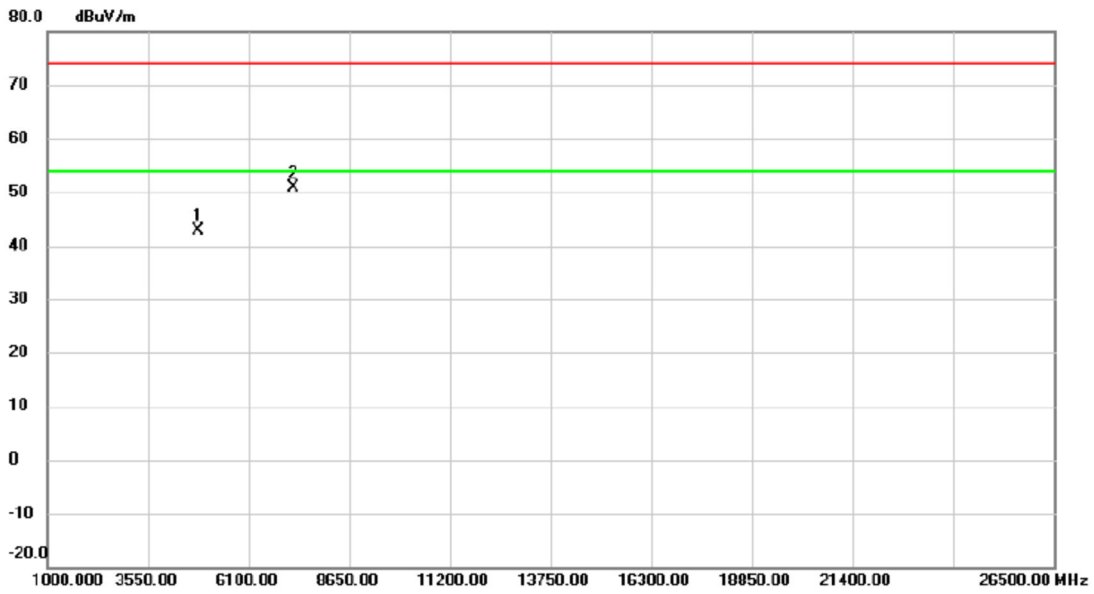


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4833.925	53.87	-10.89	42.98	74.00	-31.02	peak	
2	*	7228.375	55.17	-4.18	50.99	74.00	-23.01	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2437 MHz

Vertical

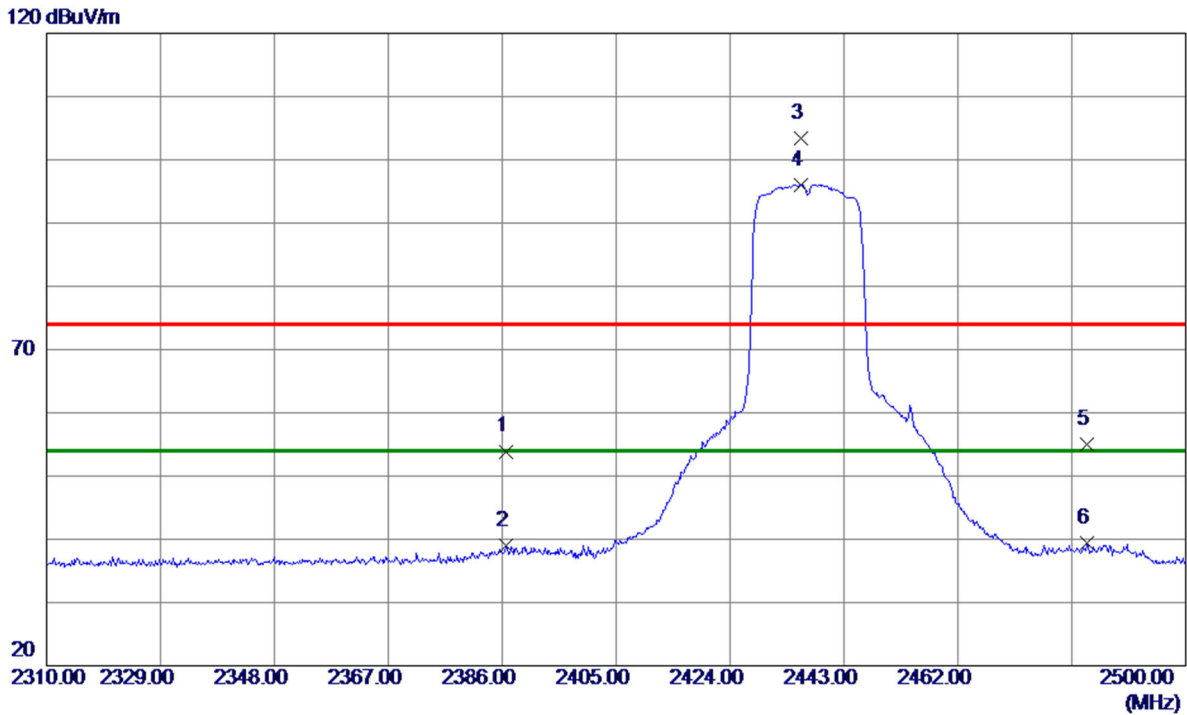


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2386.6650	22.15	31.75	53.90	74.00	-20.10	Peak	
2	2386.6650	7.28	31.75	39.03	54.00	-14.97	AVG	
3	2435.8750	71.73	31.72	103.45	74.00	29.45	Peak	
4 *	2435.8750	64.37	31.72	96.09	54.00	42.09	AVG	
5	2483.5650	23.21	31.71	54.92	74.00	-19.08	Peak	
6	2483.5650	7.63	31.71	39.34	54.00	-14.66	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2437 MHz

Vertical

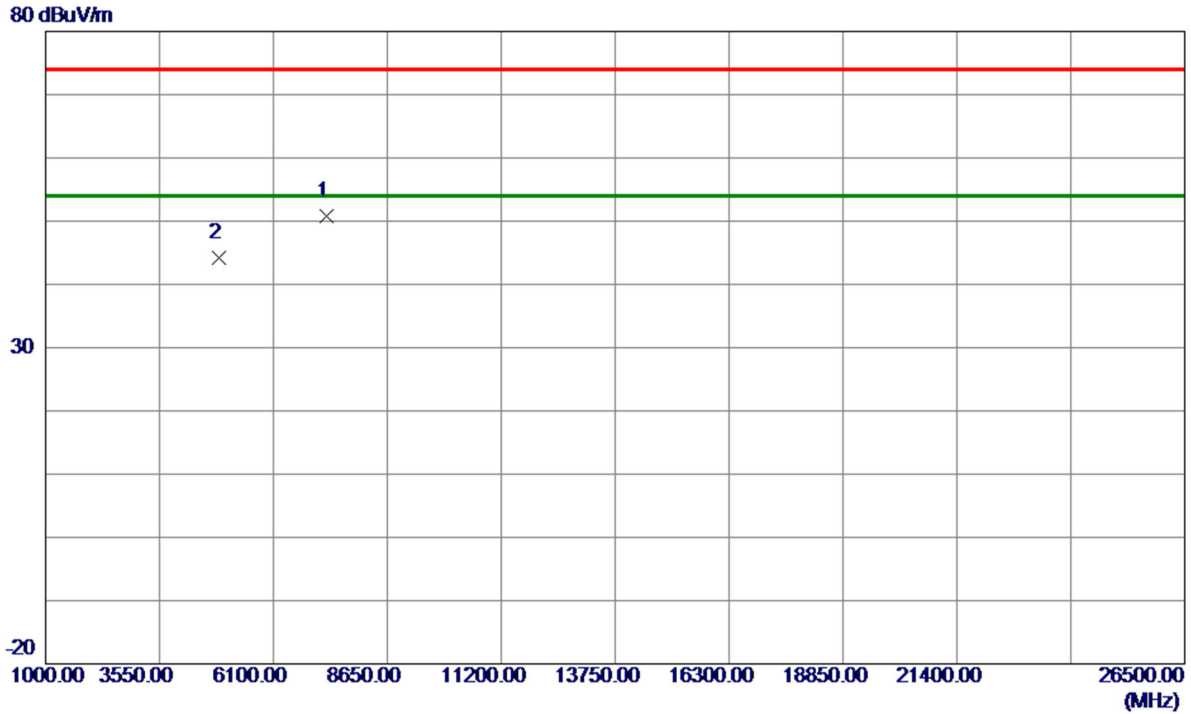


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7303.6000	54.88	-4.08	50.80	74.00	-23.20	Peak	
2	4872.1750	55.04	-10.80	44.24	74.00	-29.76	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2437 MHz

Horizontal

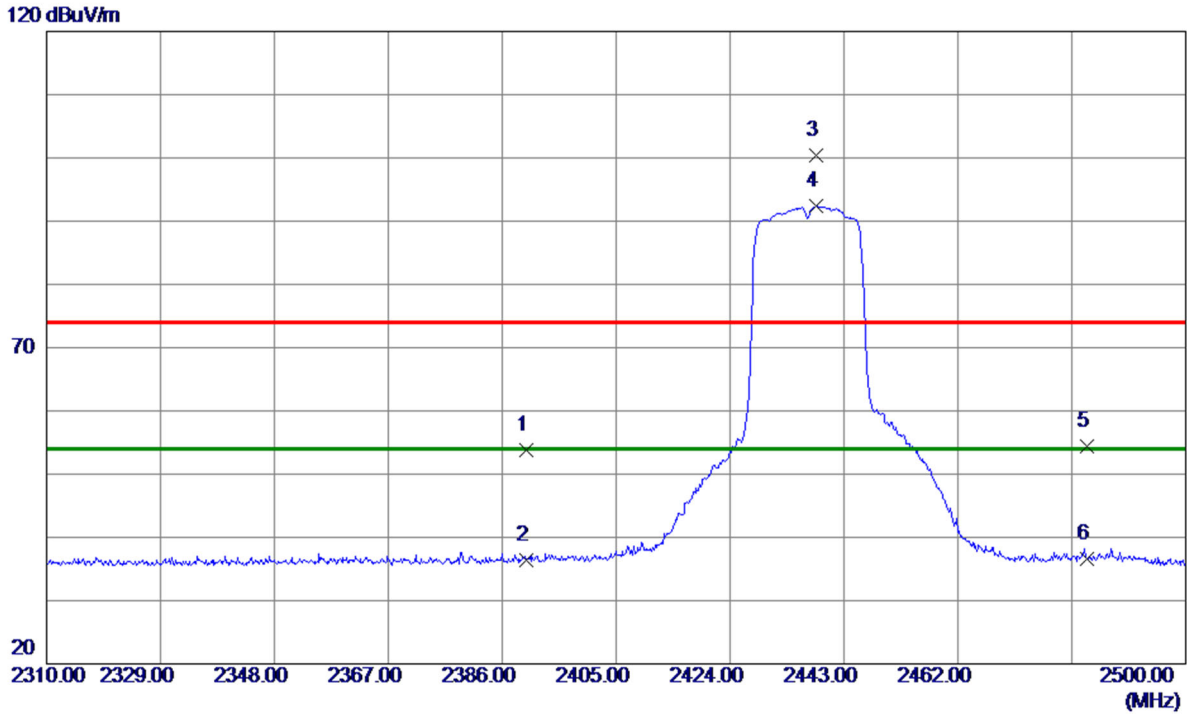


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	22.03	31.74	53.77	74.00	-20.23	Peak	
2	2390.0000	4.62	31.74	36.36	54.00	-17.64	AVG	
3	2438.3450	68.62	31.72	100.34	74.00	26.34	Peak	
4 *	2438.3450	60.63	31.72	92.35	54.00	38.35	AVG	
5	2483.5000	22.64	31.71	54.35	74.00	-19.65	Peak	
6	2483.5000	4.91	31.71	36.62	54.00	-17.38	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2437 MHz

Horizontal

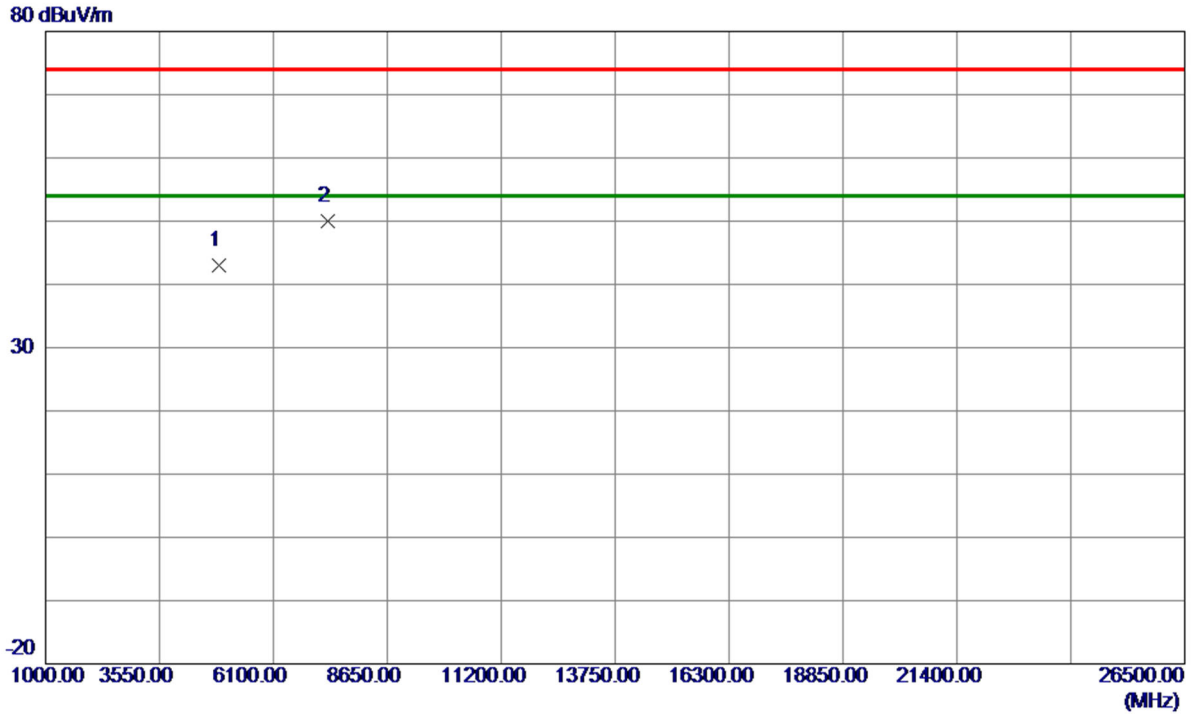

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4876.0000	53.77	-10.79	42.98	74.00	-31.02	Peak	
2 *	7313.8000	54.10	-4.07	50.03	74.00	-23.97	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.