

# RF Test Report

For

**Globe Electric Company Inc.**

<b>Test Standards:</b>	<u>Part 15C Subpart C §15.247</u> <u>RSS 247 Issue 2</u>
<b>Product Description:</b>	<u>Wi-Fi Smart Outdoor Power Adapter</u>
<b>Tested Model:</b>	<u>50333</u>
<b>Brand Name:</b>	<u>Globe</u>
<b>FCC ID:</b>	<u>2AQUQGE50333</u>
<b>IC:</b>	<u>8290A-GE50333</u>
<b>Classification</b>	<u>Digital Spread Spectrum (DSS)</u>
<b>Report No.:</b>	<u>EC2011039RF03</u>
<b>Tested Date:</b>	<u>2020-11-18 to 2020-12-21</u>
<b>Issued Date:</b>	<u>2020-12-21</u>
<b>Prepared By:</b>	<u>Jack Liu.</u> Jack Liu / Engineer
<b>Approved By:</b>	<u>Tiny Yang</u> Tiny Yang / RF Manager

**Hunan Ecloud Testing Technology Co., Ltd.**  
Building A1, Changsha E Center, No. 18 Xiangtai Avenue, Liuyang Economic and  
Technological Development Zone, Hunan, P.R.C  
Tel.: +86-731-89634887 Fax.: +86-731-89634887  
www.hn-ecloud.com

Note: The test results in this report apply exclusively to the tested model / sample. Without written approval of Hunan Ecloud Testing Technology Co., Ltd., the test report shall not be reproduced except in full.

## Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	2020.12.21	Valid	Original Report

## TABLE OF CONTENTS

<b>1</b>	<b>TEST LABORATORY .....</b>	<b>5</b>
1.1	Test facility .....	5
<b>2</b>	<b>GENERAL DESCRIPTION.....</b>	<b>6</b>
2.1	Applicant .....	6
2.2	Manufacturer .....	6
2.3	General Description Of EUT .....	6
2.4	Modification of EUT .....	7
2.5	Applicable Standards .....	7
<b>3</b>	<b>TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....</b>	<b>8</b>
3.1	Descriptions of Test Mode .....	8
3.2	Test Mode .....	8
3.3	Support Equipment .....	10
3.4	Test Setup .....	10
3.5	Measurement Results Explanation Example .....	13
<b>4</b>	<b>TEST RESULT .....</b>	<b>14</b>
4.1	20dB and 99% Bandwidth Measurement .....	14
4.2	Peak Output Power Measurement .....	15
4.3	Carrier Frequency Separation Measurement .....	16
4.4	Time of Occupancy Measurement.....	17
4.5	Number of Hopping Channels Measurement .....	18
4.6	Conducted Band Edges Measurement.....	19
4.7	Conducted Spurious Emission Measurement .....	20
4.8	Radiated Band Edges and Spurious Emission Measurement .....	21
4.9	AC Conducted Emission Measurement.....	46
4.10	Antenna Requirements .....	49
<b>5</b>	<b>LIST OF MEASURING EQUIPMENT.....</b>	<b>50</b>
<b>6</b>	<b>UNCERTAINTY OF EVALUATION.....</b>	<b>52</b>
	<b>Appendix A: 20dB Emission Bandwidth .....</b>	<b>53</b>
	<b>Appendix B: Occupied Channel Bandwidth .....</b>	<b>59</b>
	<b>Appendix C: Maximum conducted output power .....</b>	<b>65</b>
	<b>Appendix D: Carrier frequency separation .....</b>	<b>71</b>
	<b>Appendix E: Time of occupancy .....</b>	<b>74</b>
	<b>Appendix F: Number of hopping channels .....</b>	<b>82</b>
	<b>Appendix G: Band edge measurements .....</b>	<b>85</b>
	<b>Appendix H: Conducted Spurious Emission.....</b>	<b>92</b>
	<b>Appendix I. Setup Photographs .....</b>	<b>107</b>

## Summary of Test Result

FCC Rule	IC Rule	Description	Limit	Result	Remark
15.247(a)(1)	RSS-247 5.1(a)	20dB Bandwidth	NA	Pass	-
-	RSS-Gen 6.7	99% Bandwidth	-	Pass	-
15.247(a)(1)	RSS-247 5.1(b)	Hopping Channel Separation	$\geq 2/3$ of 20dB BW	Pass	-
15.247(a)(1)	RSS-247 5.1(d)	Number of Channels	$\geq 15$ Chs	Pass	-
15.247(a)(1)	RSS-247 5.1(d)	Average Time of Occupancy	$\leq 0.4$ sec in 31.6sec period	Pass	-
15.247(b)(1)	RSS-247 5.4(b)	Peak Output Power	$\leq 125$ mW	Pass	-
15.247(d)	RSS-247 5.5	Conducted Band Edges	$\leq 20$ dBc	Pass	-
15.247(d)	RSS-247 5.5	Conducted Spurious Emission	$\leq 20$ dBc	Pass	-
15.247(d)	RSS-247 5.5	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 7.18 dB at 9920 MHz
15.207	RSS-Gen 8.8	AC Conducted Emission	15.207(a)	Pass	Under limit 2.70 dB at 0.433 MHz
15.203 & 15.247(b)	RSS-Gen 6.8	Antenna Requirement	15.203 & 15.247(b) RSS-GEN 6.8	Pass	-

## **1 Test Laboratory**

### **1.1 Test facility**

#### **CNAS ( accreditation number:L11138 )**

Hunan Ecloud Testing Technology Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

#### **FCC (Designation number:CN1244 , Test Firm Registration**

#### **Number:793308 )**

Hunan Ecloud Testing Technology Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

#### **ISED(CAB identifier: CN0012, ISED# :24347)**

Hunan Ecloud Testing Technology Co., Ltd. has been listed on the Wireless Device Testing Laboratories list of innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements.

#### **A2LA (Certificate Number:4895.01)**

Hunan Ecloud Testing Technology Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

## 2 General Description

### 2.1 Applicant

**Globe Electric Company Inc.**  
 150 Oneida, Montreal, Quebec, Canada, H9R 1A8

### 2.2 Manufacturer

**Globe Electric Company Inc.**  
 150 Oneida, Montreal, Quebec, Canada, H9R 1A8

### 2.3 General Description Of EUT

<b>Product</b>	Wi-Fi Smart Outdoor Power Adapter
<b>Model No.</b>	50333
<b>Brand Name</b>	Globe
<b>Additional NO.</b>	N/A
<b>Difference Description</b>	N/A
<b>FCC ID</b>	2AQUQGE50333
<b>IC</b>	8290A-GE50333
<b>Power Supply*</b>	125Vac
<b>Modulation Technology</b>	FHSS
<b>Modulation Type</b>	GFSK, 8DPSK, $\pi/4$ DQPSK
<b>Operating Frequency</b>	2402MHz~2480MHz
<b>Number Of Channel</b>	79
<b>Max. Output Power</b>	Bluetooth BR(1Mbps) : 8.54 dBm (0.0071W) Bluetooth BR(2Mbps) : 10.31 dBm (0.0107W) Bluetooth BR(3Mbps) : 11.27 dBm (0.0134W)
<b>Max. e.i.r.p.</b>	10.27 dBm (0.0106W)
<b>Antenna Type</b>	PCB Antenna type with -1dBi gain
<b>HW Version</b>	V0.1
<b>SW Version</b>	smart_plug 1.0-alpha
<b>I/O Ports</b>	Refer to user's manual
<b>Cable Supplied</b>	N/A

**NOTE:**

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.

3. \*: Pre-test AC120V and AC125V, only the worst AC125V test data is recorded in the report

## 2.4 Modification of EUT

No modifications are made to the EUT during all test items.

## 2.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ ANSI C63.10-2013
- ♦ IC RSS-247 Issue 2
- ♦ IC RSS-Gen Issue 5
- ♦ KDB 558074 D01 15.247 Meas Guidance v05r02

### Remark:

1. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B&ICES-003, recorded in a separate test report.

### 3 Test Configuration of Equipment Under Test

#### 3.1 Descriptions of Test Mode

The transmitter has a maximum peak conducted output power as follows:

Mode	Channel	Frequency	Bluetooth RF Output Power
GFSK	Ch00	2402MHz	7.81
	Ch39	2441MHz	8.19
	Ch78	2480MHz	8.54
4 $\pi$ -DQPSK	Ch00	2402MHz	9.74
	Ch39	2441MHz	10.31
	Ch78	2480MHz	10.7
8DPSK	Ch00	2402MHz	10.4
	Ch39	2441MHz	10.86
	Ch78	2480MHz	11.27

**Remark:**

1. All the test data for each data rate were verified, but only the worst case was reported.
2. The data rate was set in 3Mbps for all the test items due to the highest RF output power.

#### 3.2 Test Mode

##### 3.2.1 Antenna Port Conducted Measurement

Summary table of Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth BR 1Mbps GFSK	Bluetooth EDR 2Mbps $\pi/4$ -DQPSK	Bluetooth EDR 3Mbps 8-DPSK
<b>Conducted Test Cases</b>	Mode 1: CH00_2402 MHz	Mode 4: CH00_2402 MHz	Mode 7: CH00_2402 MHz
	Mode 2: CH39_2441 MHz	Mode 5: CH39_2441 MHz	Mode 8: CH39_2441 MHz
	Mode 3: CH78_2480 MHz	Mode 6: CH78_2480 MHz	Mode 9: CH78_2480 MHz



### 3.2.2 Radiated Emission Test (Below 1GHz)

<b>Radiated Test Cases</b>	<b>Bluetooth EDR 3Mbps 8-DPSK</b>
	Mode 1: CH00_2402MHz

- Note : 1. Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type. Y orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Y orientation.
2. Following channel(s) was (were) selected for the final test as listed above

### 3.2.3 Radiated Emission Test (Above 1GHz)

<b>Radiated Test Cases</b>	<b>Bluetooth EDR 3Mbps 8-DPSK</b>
	Mode 1: CH00_2402 MHz
	Mode 2: CH39_2441 MHz
	Mode 3: CH78_2480 MHz

- Note : 1. The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that Y orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Y orientation.
2. Following channel(s) was (were) selected for the final test as listed above
3. For frequency above 18GHz, the measured value is much lower than the limit, therefore, it is not reflected in the report.

### 3.2.4 Power Line Conducted Emission Test:

<b>AC Conducted Emission</b>	Mode 1 : BT Linking + Switching On + Lighting
--------------------------------------	---


### 3.3 Support Equipment

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	NETGEAR	R7800	PY315100319	N/A	shielded, 1.8 m
2.	Notebook	Lenovo	E470C	FCC sDoC	N/A	shielded cable DC O/P 1.8 m unshielded AC I/P cable 1.2 m
3.	WiFi Smart Bulb	Globe	34202*	2AQUQGB34202	N/A	N/A


### 3.4 Test Setup

The EUT is continuously communicating to the Bluetooth tester during the tests.


EUT was set in the Hidden menu mode to enable BT communications.

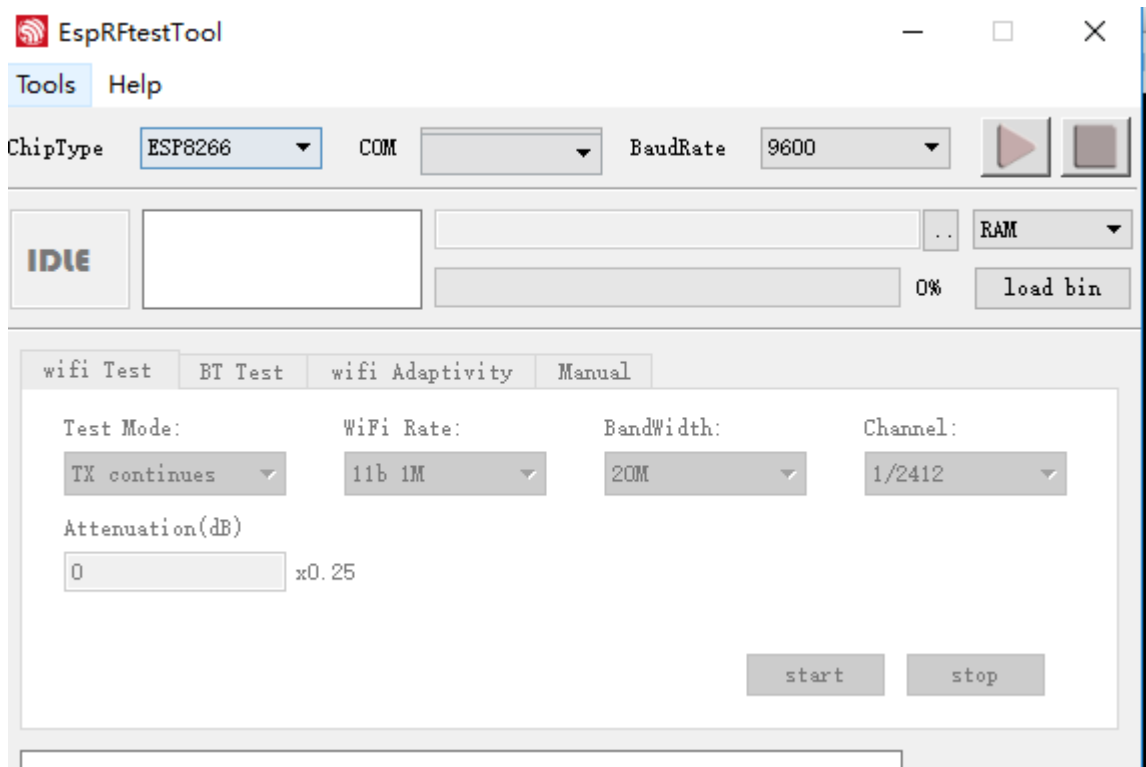


#### Setup diagram for Conducted Test

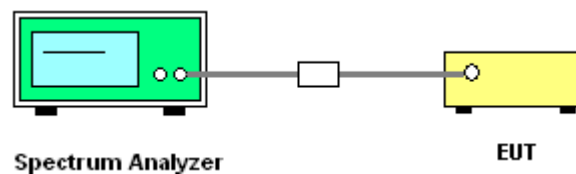


Setup diagram for Raidation(9KHz~30MHz) Test

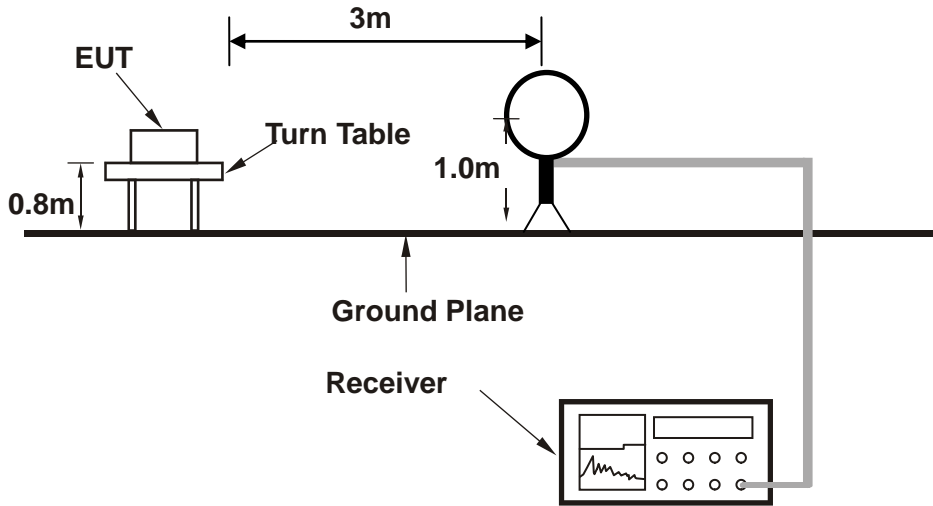


Setup diagram for Raidation(Below 1G) Test

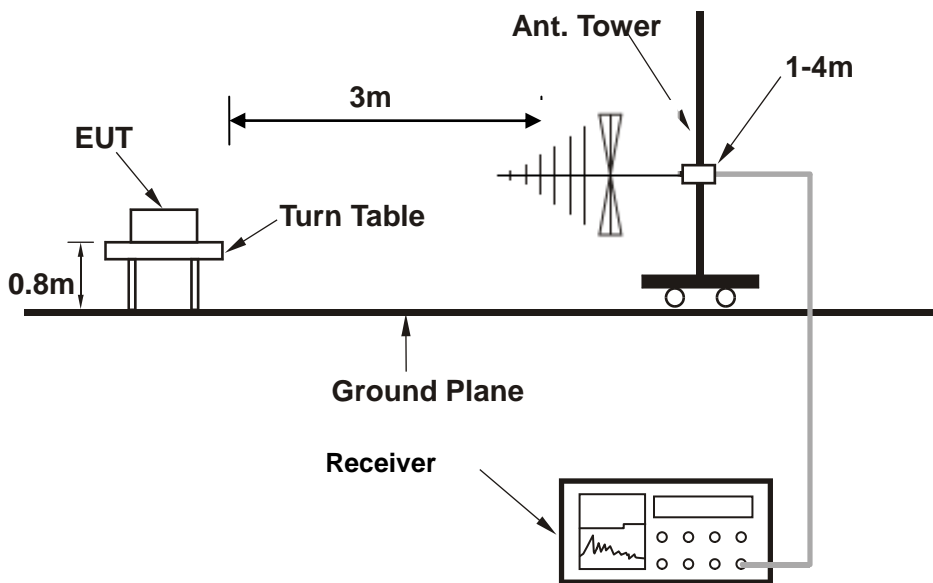

**Setup diagram for Raidation(Above1G) Test**

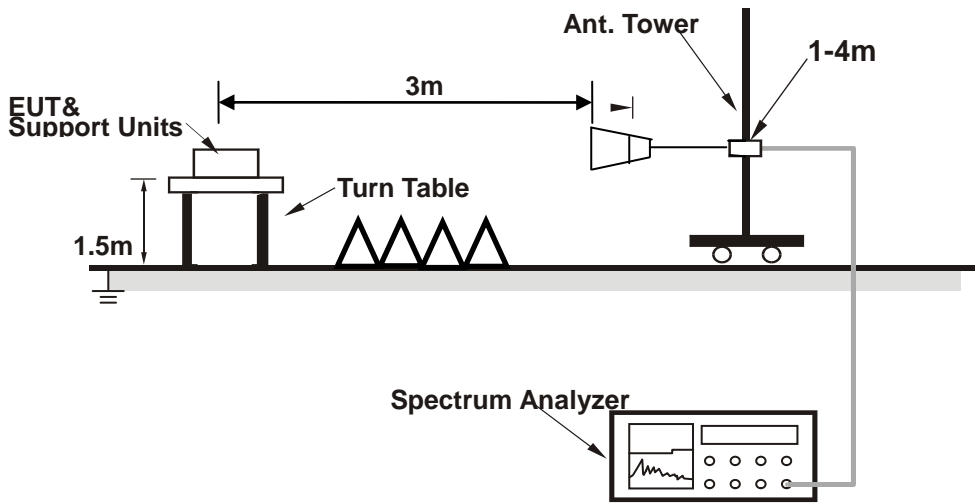

**Setup diagram for AC Conducted Emission Test**

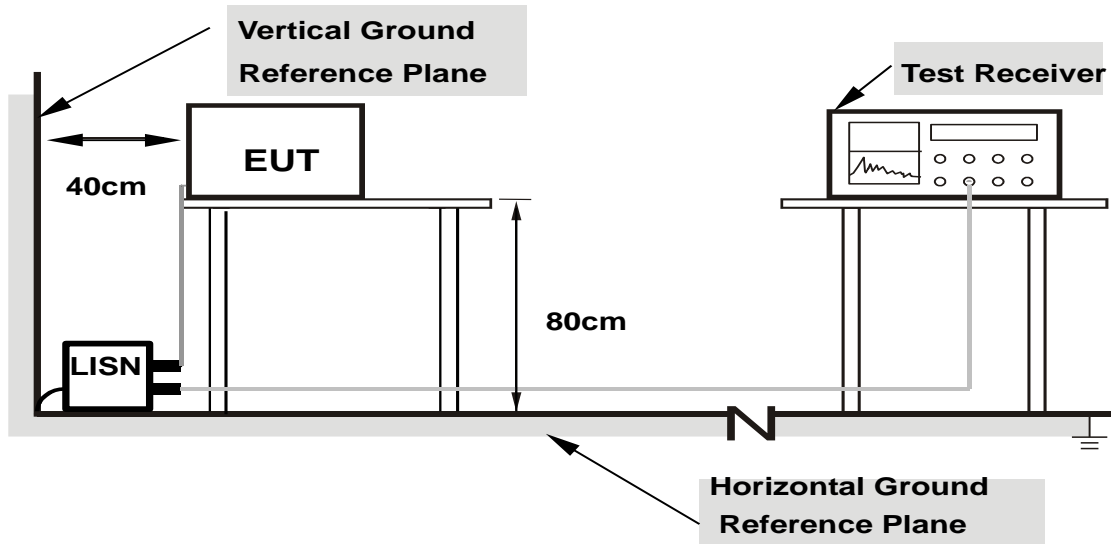

- Note: 1.Support units were connected to second LISN.**  
**2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes**

### 3.5 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

**Example:**

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 5 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 5 + 10 = 15 \text{ (dB)} \end{aligned}$$

**For all radiated test items:**

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

Over Limit (dB  $\mu$  V/m) = Level(dB  $\mu$  V/m) - Limit Level (dB  $\mu$  V/m)

## 4 Test Result

### 4.1 20dB and 99% Bandwidth Measurement

#### 4.1.1 Limit of 20dB and 99% Bandwidth

None; for reporting purposes only.

#### 4.1.2 Test Procedures

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument.
3. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.
  - Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel;
  - RBW  $\geq$  1% of the 20 dB bandwidth; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak;
  - Trace = max hold.
4. Use the following spectrum analyzer settings for 99 % Bandwidth measurement.
  - Span = approximately 1.5 to 5 times the 99% bandwidth, centered on a hopping channel;
  - RBW  $\geq$  1% of the 99% bandwidth; VBW  $\geq$  RBW; Sweep = auto; Detector function = sample;
  - Trace = max hold.

#### 4.1.3 Test Result of 20dB Bandwidth

Refer to Appendix A of this test report.

#### 4.1.4 Test Result of 99% Bandwidth

Refer to Appendix B of this test report.

## 4.2 Peak Output Power Measurement

### 4.2.1 Limit of Peak Output Power

Section 15.247 (b)

The maximum peak conducted output power of the intentional radiator shall not exceed the following:

(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts.

RSS-247 5.4(b)

For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channels. The e.i.r.p. shall not exceed 4 W

### 4.2.2 Test Procedures

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument.
3. The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

### 4.2.3 Test Result of Peak Output Power

Refer to Appendix C of this test report.

## 4.3 Carrier Frequency Separation Measurement

### 4.3.1 Limit of Hopping Channel Separation

FCC §15.247 (a) (1)

RSS-247 5.1(b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### 4.3.2 Test Procedures

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument.
3. The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

### 4.3.3 Test Result of Hopping Channel Separation

Refer to Appendix D of this test report.



## 4.4 Time of Occupancy Measurement

### 4.4.1 Limit of Average Time of Occupancy

FCC §15.247 (a) (1) (iii)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

RSS-247 5.1(d)

FHSs operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed. Transmissions on particular hopping frequencies may be avoided or suppressed provided that at least 15 hopping channels are used.

### 4.4.2 Test Procedures

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument.
3. The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.
4. The average time of occupancy is calculated from the transmit time per hop multiplied by the number of hops in the period specified in the requirements.

The test period:  $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$

Test channel: 2441MHz as below:

DH1 time slot = Burst Width (ms) \* (1600 / (2\*79)) \* 31.6

DH3 time slot = Burst Width (ms) \* (1600 / (4\*79)) \* 31.6

DH5 time slot = Burst Width (ms) \* (1600 / (6\*79)) \* 31.6

### 4.4.3 Test Result of Dwell Time

Refer to Appendix E of this test report.

## 4.5 Number of Hopping Channels Measurement

### 4.5.1 Limits of Number of Hopping Channels

FCC § 15.247(a)(1)(iii)

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

RSS-247 5.1(d)

FHSs operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed. Transmissions on particular hopping frequencies may be avoided or suppressed provided that at least 15 hopping channels are used.

### 4.5.2 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument.
3. The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to 100KHz. The analyzer is set to Max Hold.

### 4.5.3 Test Result of Number of Hopping Channels

Refer to Appendix F of this test report.

## 4.6 Conducted Band Edges Measurement

### 4.6.1 Limit of Band Edges

FCC §15.247(d)

IC RSS-247 5.5

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

### 4.6.2 Test Procedures

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument.
3. Set RBW = 100kHz, VBW = 300kHz. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 1~3.

### 4.6.3 Test Result of Conducted Band Edges

Refer to Appendix G of this test report.

## 4.7 Conducted Spurious Emission Measurement

### 4.7.1 Limit of Spurious Emission Measurement

FCC §15.247(d)

IC RSS-247 5.5

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

### 4.7.2 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

### 4.7.3 Test Result of Conducted Spurious Emission

Refer to Appendix H of this test report.

## 4.8 Radiated Band Edges and Spurious Emission Measurement

### 4.8.1 Limit of Radiated Band Edges and Spurious Emission

FCC §15.247 (d)

IC RSS-247 5.5


In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The frequency range from 9KHz to 10th harmonic (25GHz) are checked, and no any emissions were found from 18GHz to 25GHz, So the radiated emissions from 18GHz to 25GHz were not record.

#### 4.8.2 Test Procedures

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz, RBW=1MHz for  $f > 1$ GHz ; VBW=3RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
  - (3) For average measurement:  
VBW = 10 Hz, when duty cycle is no less than 98 percent.  
VBW  $\geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
5. Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP.
6. Convert the resultant EIRP to an equivalent electric field strength using the following relationship:
$$E = \text{EIRP} - 20 \log d + 104.8$$
Where:
  - E is the electric field strength in dB $\mu$ V/m
  - EIRP is the equivalent isotropically radiated power in dBm
  - d is the specified measurement distance in m
  - E[dB $\mu$ V/m] = EIRP[dBm] + 95.2, for d = 3 m.
7. Compare the resultant electric field strength level with the applicable regulatory limit.

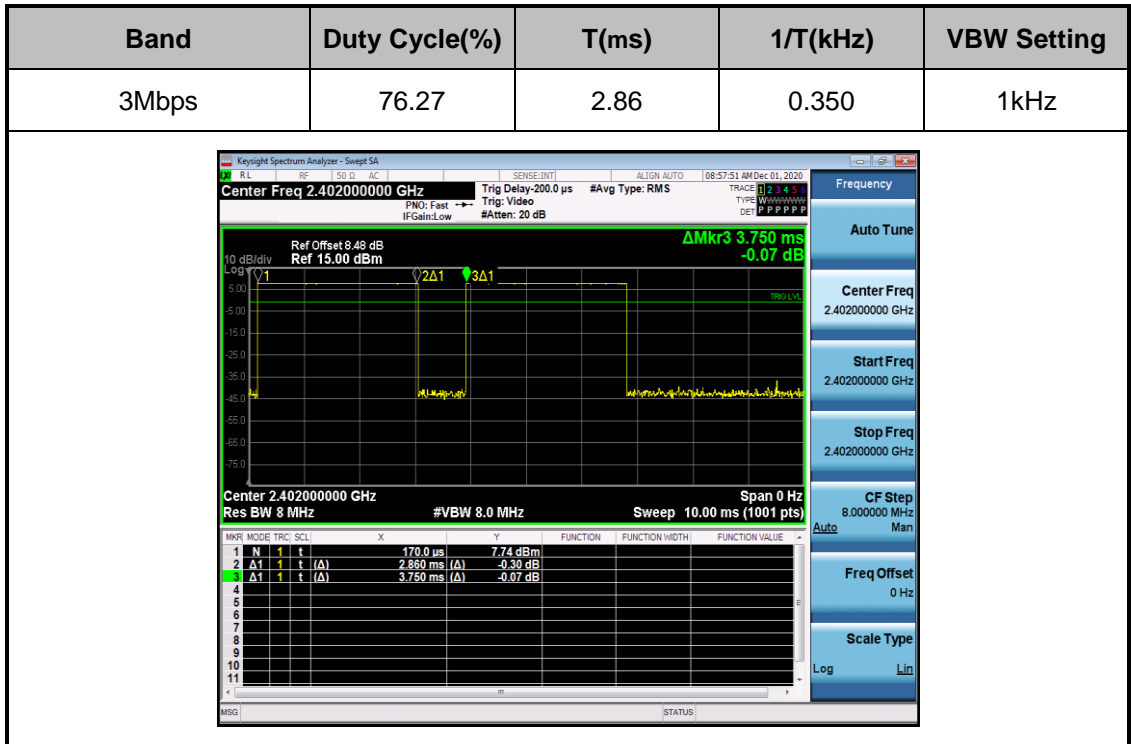


#### 4.8.3 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

#### 4.8.4 Test Result of Radiated Spurious at Band Edges

<b>Test Mode :</b>	Bluetooth (3Mbps) CH00 (2402MHz)	<b>Temperature :</b>	23~25°C
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	2.3GHz~2.405GHz	<b>Polarization :</b>	Horizontal

Test Site : 3m Chamber	Temp/Humi : 25°C/64%
Tested by : Jack	Pol/Phase : HORIZONTAL
Test Mode : BT CH00(2402MHz)	Power rating: 125Vac/60Hz

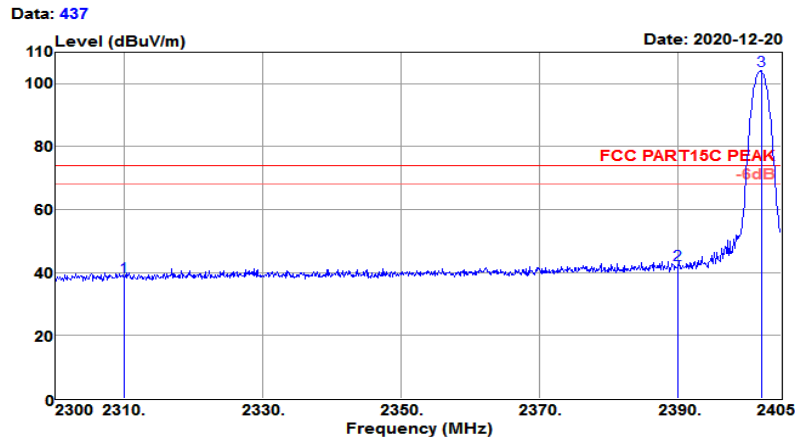


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	42.87	27.38	4.11	35.61	38.75	74.00	-35.25	Peak
2390.000	46.59	27.56	4.18	35.79	42.54	74.00	-31.46	Peak
2402.165	108.16	27.58	4.19	35.82	104.11	74.00	30.11	Peak



<b>Test Mode :</b>	Bluetooth (3Mbps) CH00 (2402MHz)	<b>Temperature :</b>	23~25℃
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	2.3GHz~2.405GHz	<b>Polarization :</b>	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: BT CH00(2402MHz)	Power rating:	: 125Vac/60Hz

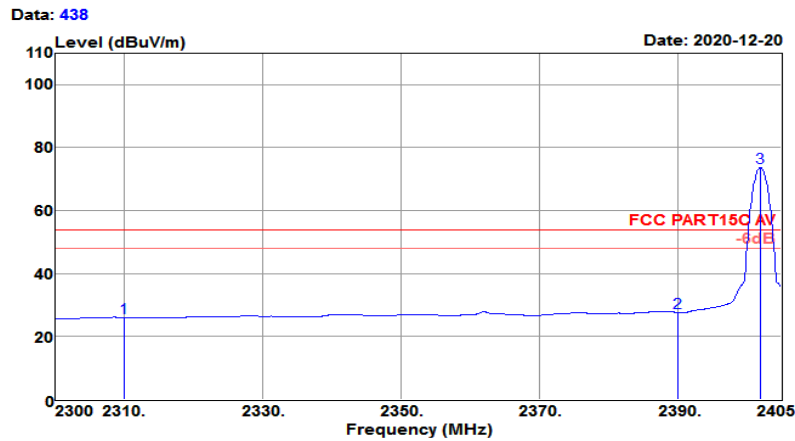

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	30.18	27.38	4.11	35.61	26.06	54.00	-27.94	Average
2390.000	31.78	27.56	4.18	35.79	27.73	54.00	-26.27	Average
2401.955	77.77	27.58	4.19	35.82	73.72	54.00	19.72	Average

<b>Test Mode :</b>	Bluetooth (3Mbps) CH00 (2402MHz)	<b>Temperature :</b>	23~25℃
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	2.3GHz~2.405GHz	<b>Polarization :</b>	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: BT CH00(2402MHz)	Power rating:	: 125Vac/60Hz

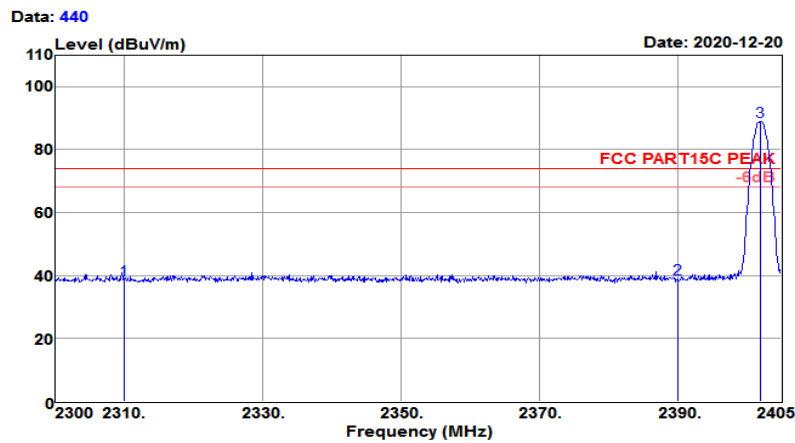

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	42.88	27.38	4.11	35.61	38.76	74.00	-35.24	Peak
2390.000	42.97	27.56	4.18	35.79	38.92	74.00	-35.08	Peak
2402.060	93.13	27.58	4.19	35.82	89.08	74.00	15.08	Peak

<b>Test Mode :</b>	Bluetooth (3Mbps) CH00 (2402MHz)	<b>Temperature :</b>	23~25℃
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	2.3GHz~2.405GHz	<b>Polarization :</b>	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: BT CH00(2402MHz)	Power rating:	125Vac/60Hz

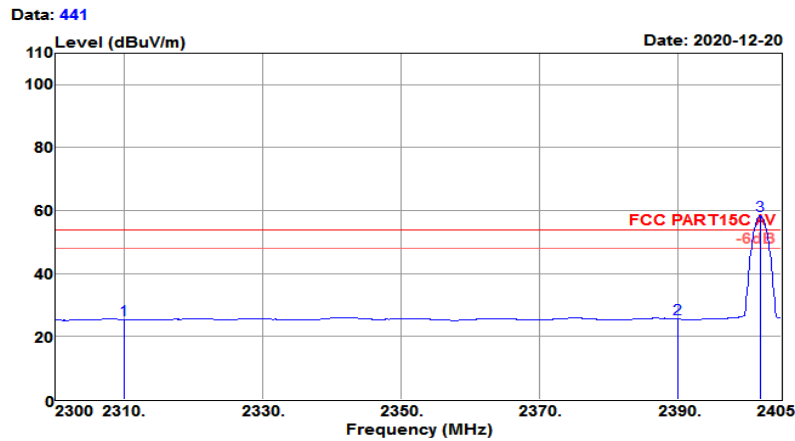

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	29.53	27.38	4.11	35.61	25.41	54.00	-28.59	Average
2390.000	29.59	27.56	4.18	35.79	25.54	54.00	-28.46	Average
2401.955	62.40	27.58	4.19	35.82	58.35	54.00	4.35	Average

<b>Test Mode :</b>	Bluetooth (3Mbps) CH78 (2480MHz)	<b>Temperature :</b>	23~25℃
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	2.477GHz~2.51GHz	<b>Polarization :</b>	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: BT CH78(2480MHz)	Power rating:	: 125Vac/60Hz

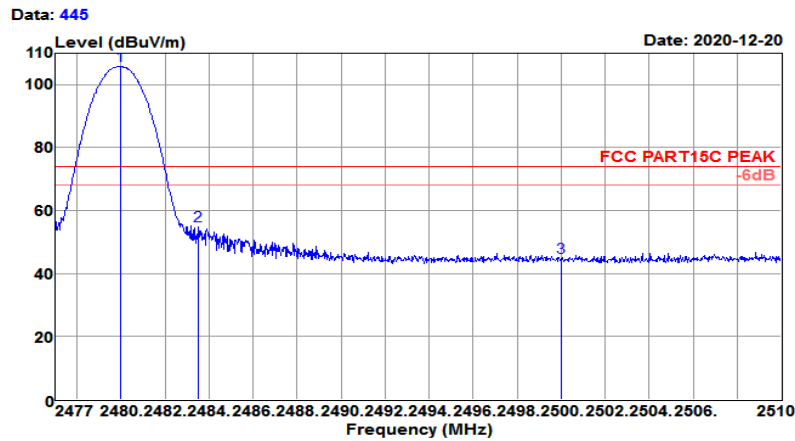

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2480.003	109.92	27.76	4.26	35.99	105.95	74.00	31.95	Peak
2483.500	59.10	27.76	4.26	36.00	55.12	74.00	-18.88	Peak
2500.000	49.22	27.80	4.28	36.04	45.26	74.00	-28.74	Peak

<b>Test Mode :</b>	Bluetooth (3Mbps) CH78 (2480MHz)	<b>Temperature :</b>	23~25℃
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	2.477GHz~2.51GHz	<b>Polarization :</b>	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: BT CH78(2480MHz)	Power rating:	: 125Vac/60Hz

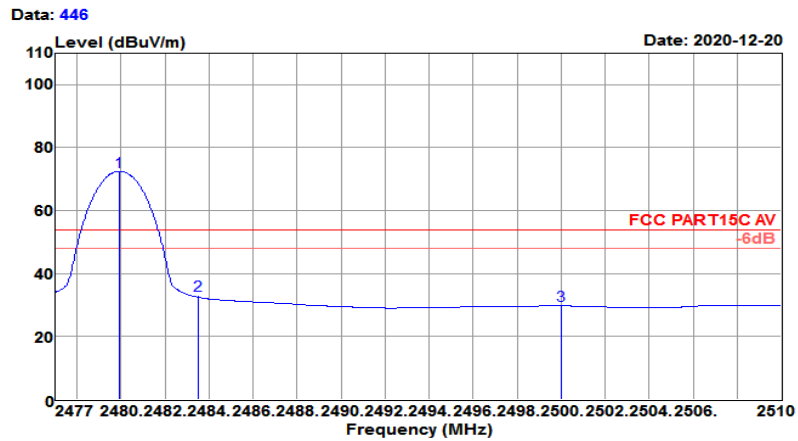

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2479.937	76.49	27.76	4.26	35.99	72.52	54.00	18.52	Average
2483.500	36.97	27.76	4.26	36.00	32.99	54.00	-21.01	Average
2500.000	33.74	27.80	4.28	36.04	29.78	54.00	-24.22	Average

<b>Test Mode :</b>	Bluetooth (3Mbps) CH78 (2480MHz)	<b>Temperature :</b>	23~25°C
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	2.477GHz~2.51GHz	<b>Polarization :</b>	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 25°C / 64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: BT CH78(2480MHz)	Power rating:	: 125Vac/60Hz

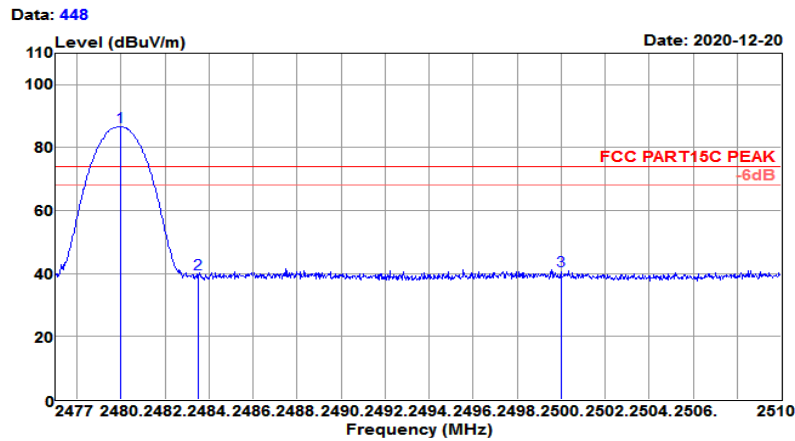

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2480.003	90.73	27.76	4.26	35.99	86.76	74.00	12.76	Peak
2483.500	43.80	27.76	4.26	36.00	39.82	74.00	-34.18	Peak
2500.000	44.84	27.80	4.28	36.04	40.88	74.00	-33.12	Peak

<b>Test Mode :</b>	Bluetooth (3Mbps) CH78 (2480MHz)	<b>Temperature :</b>	23~25℃
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	2.477GHz~2.51GHz	<b>Polarization :</b>	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: BT CH78(2480MHz)	Power rating:	: 125Vac/60Hz

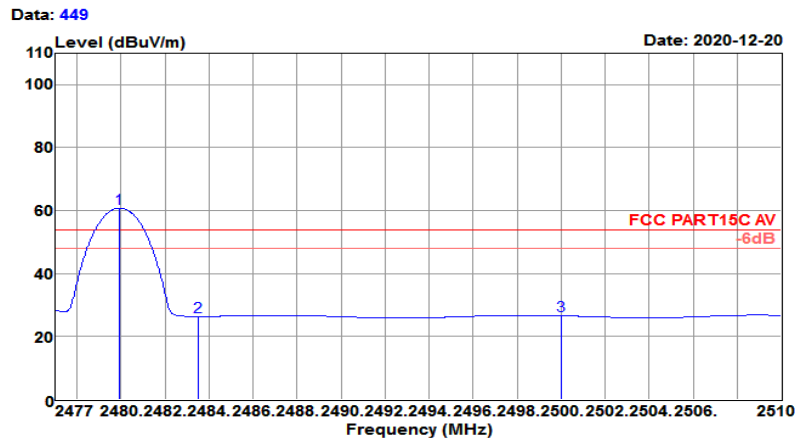


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2479.904	64.79	27.76	4.26	35.99	60.82	54.00	6.82	Average
2483.500	30.37	27.76	4.26	36.00	26.39	54.00	-27.61	Average
2500.000	30.61	27.80	4.28	36.04	26.65	54.00	-27.35	Average

#### 4.8.1 Test Result of Radiated Spurious Emission (1GHz ~ 10<sup>th</sup> Harmonic)

<b>Test Mode :</b>	Bluetooth (3Mbps) CH00 (2402MHz)	<b>Temperature :</b>	23~25°C
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	1GHz~3GHz	<b>Polarization :</b>	Horizontal

Test Site : 3m Chamber	Temp/Humi : 25°C / 64%
Tested by : Jack	Pol/Phase : HORIZONTAL
Test Mode : BT CH00(2402MHz)	Power rating: 125Vac/60Hz

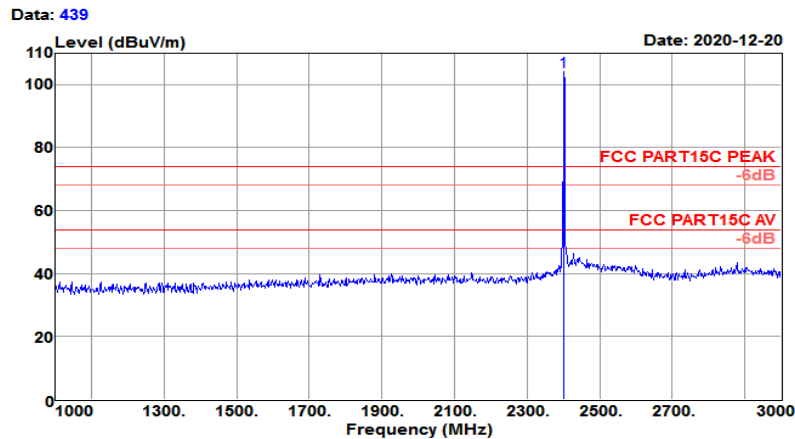


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2402.000	108.18	27.58	4.19	35.82	104.13	74.00	30.13	Peak



<b>Test Mode :</b>	Bluetooth (3Mbps)CH00 (2402MHz)	<b>Temperature :</b>	23~25℃
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	3GHz~18GHz	<b>Polarization :</b>	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: BT CH00(2402MHz)	Power rating:	: 125Vac/60Hz

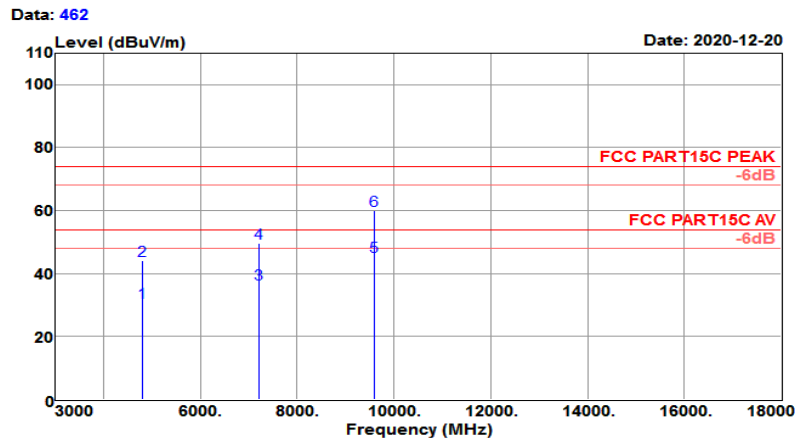


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4804.000	29.81	30.93	6.09	36.03	30.80	54.00	-23.20	Average
4804.000	43.13	30.93	6.09	36.03	44.12	74.00	-29.88	Peak
7206.000	26.47	35.39	9.22	34.25	36.83	54.00	-17.17	Average
7206.000	39.14	35.39	9.22	34.25	49.50	74.00	-24.50	Peak
9608.000	26.85	38.39	12.26	32.19	45.31	54.00	-8.69	Average
9608.000	41.65	38.39	12.26	32.19	60.11	74.00	-13.89	Peak

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

<b>Test Mode :</b>	Bluetooth (3Mbps) CH00 (2402MHz)	<b>Temperature :</b>	23~25℃
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	1GHz~3GHz	<b>Polarization :</b>	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: BT CH00(2402MHz)	Power rating:	: 125Vac/60Hz

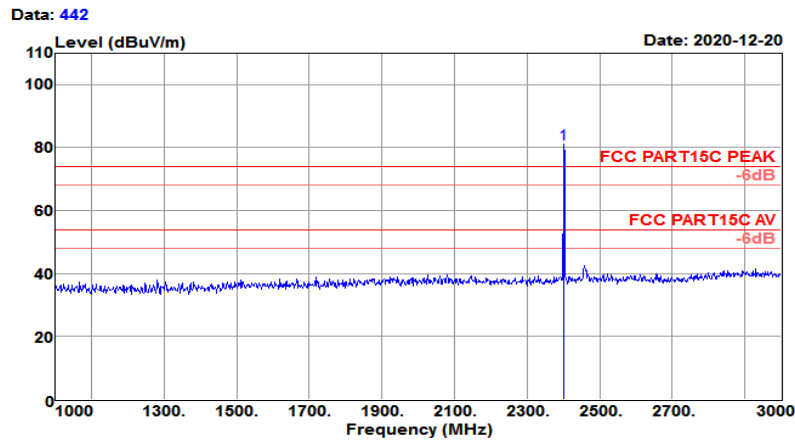

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2402.000	85.29	27.58	4.19	35.82	81.24	74.00	7.24	Peak

<b>Test Mode :</b>	Bluetooth (3Mbps) CH00 (2402MHz)	<b>Temperature :</b>	23~25℃
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	3GHz~18GHz	<b>Polarization :</b>	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 25℃ / 64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: BT CH00(2402MHz)	Power rating:	: 125Vac/60Hz

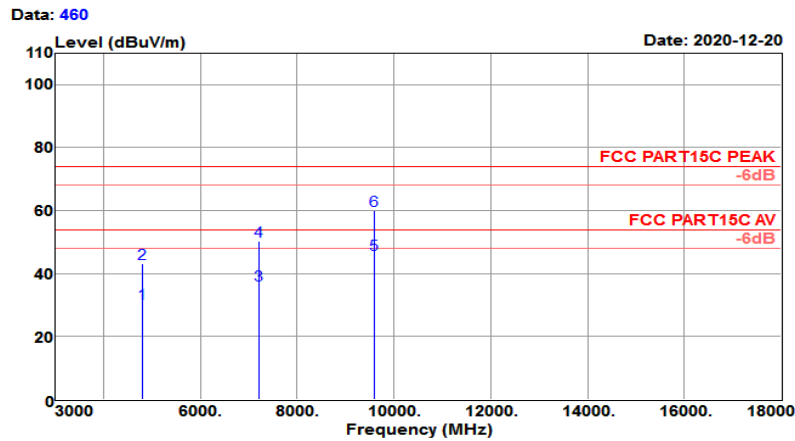


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4804.000	29.67	30.93	6.09	36.03	30.66	54.00	-23.34	Average
4804.000	42.18	30.93	6.09	36.03	43.17	74.00	-30.83	Peak
7206.000	26.02	35.39	9.22	34.25	36.38	54.00	-17.62	Average
7206.000	40.03	35.39	9.22	34.25	50.39	74.00	-23.61	Peak
9608.000	27.76	38.39	12.26	32.19	46.22	54.00	-7.78	Average
9608.000	41.63	38.39	12.26	32.19	60.09	74.00	-13.91	Peak

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

<b>Test Mode :</b>	Bluetooth (3Mbps) CH39 (2441MHz)	<b>Temperature :</b>	23~25℃
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	1GHz~3GHz	<b>Polarization :</b>	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 25℃ / 64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: BT CH39(2441MHz)	Power rating:	: 125Vac/60Hz

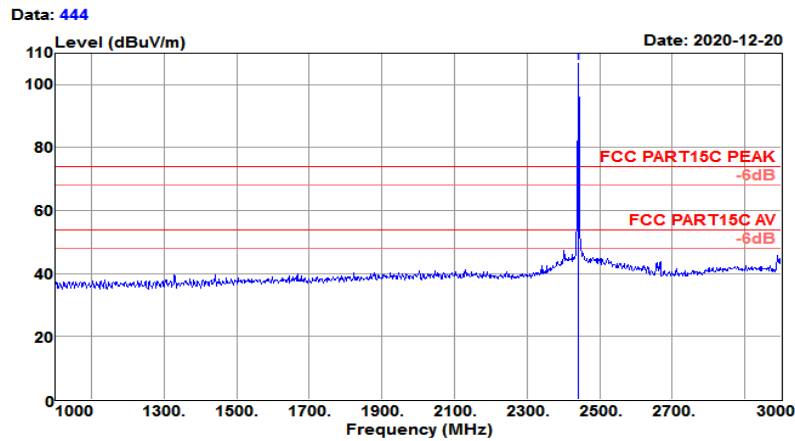

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2441.000	110.81	27.67	4.22	35.91	106.79	74.00	32.79	Peak

<b>Test Mode :</b>	Bluetooth (3Mbps) CH39 (2441MHz)	<b>Temperature :</b>	23~25°C
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	3GHz~18GHz	<b>Polarization :</b>	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 25°C / 64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: BT CH39(2441MHz)	Power rating:	: 125Vac/60Hz

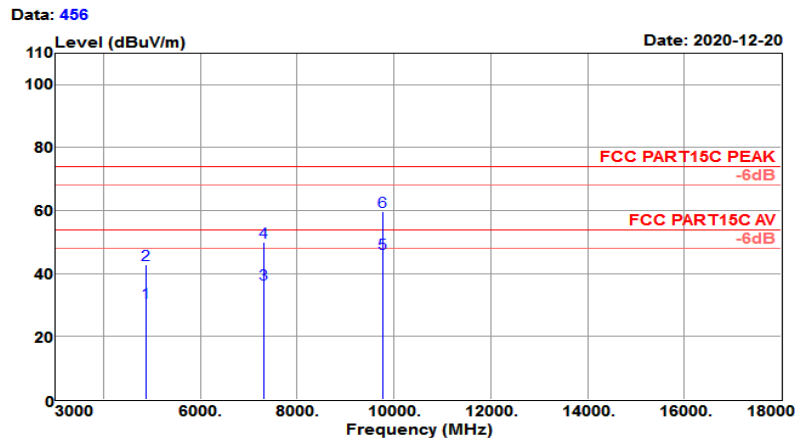


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4882.000	29.67	31.03	6.08	35.98	30.80	54.00	-23.20	Average
4882.000	41.63	31.03	6.08	35.98	42.76	74.00	-31.24	Peak
7323.000	26.07	35.68	9.20	34.29	36.66	54.00	-17.34	Average
7323.000	39.26	35.68	9.20	34.29	49.85	74.00	-24.15	Peak
9764.000	27.28	38.51	12.50	32.03	46.26	54.00	-7.74	Average
9764.000	40.77	38.51	12.50	32.03	59.75	74.00	-14.25	Peak

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

<b>Test Mode :</b>	Bluetooth (3Mbps) CH39 (2441MHz)	<b>Temperature :</b>	23~25℃
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	1GHz~3GHz	<b>Polarization :</b>	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 25℃ / 64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: BT CH39(2441MHz)	Power rating:	: 125Vac/60Hz

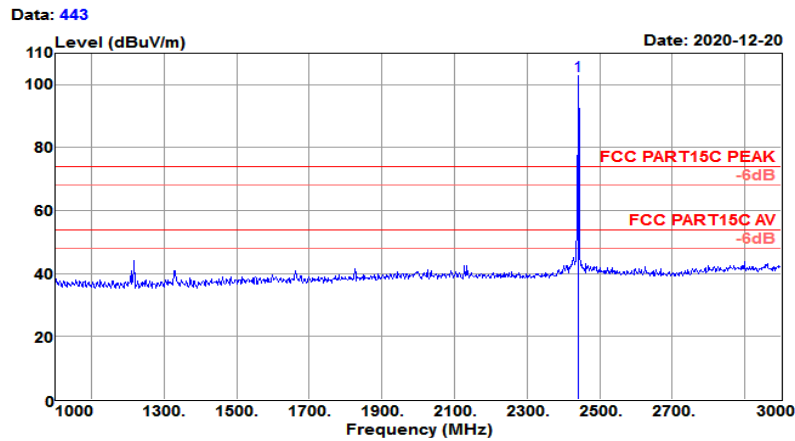

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2441.000	107.05	27.67	4.22	35.91	103.03	74.00	29.03	Peak

<b>Test Mode :</b>	Bluetooth (3Mbps) CH39 (2441MHz)	<b>Temperature :</b>	23~25℃
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	3GHz~18GHz	<b>Polarization :</b>	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 25℃ / 64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: BT CH39(2441MHz)	Power rating:	: 125Vac/60Hz

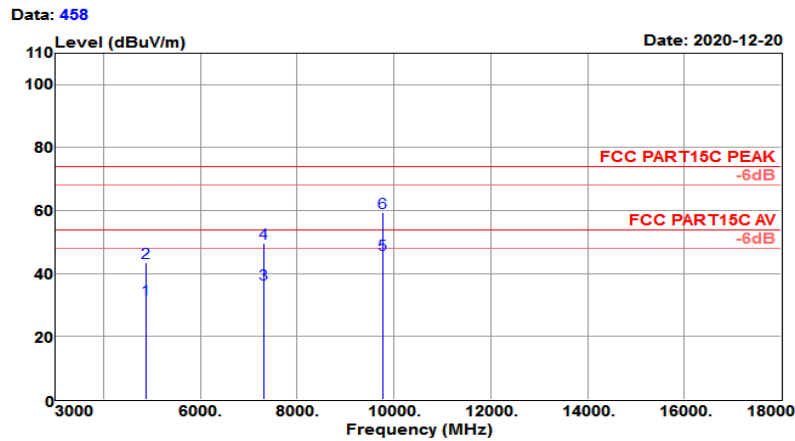


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4882.000	30.63	31.03	6.08	35.98	31.76	54.00	-22.24	Average
4882.000	42.20	31.03	6.08	35.98	43.33	74.00	-30.67	Peak
7323.000	26.03	35.68	9.20	34.29	36.62	54.00	-17.38	Average
7323.000	38.97	35.68	9.20	34.29	49.56	74.00	-24.44	Peak
9764.000	27.24	38.51	12.50	32.03	46.22	54.00	-7.78	Average
9764.000	40.31	38.51	12.50	32.03	59.29	74.00	-14.71	Peak

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

<b>Test Mode :</b>	Bluetooth (3Mbps) CH78 (2480MHz)	<b>Temperature :</b>	23~25℃
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	1GHz~3GHz	<b>Polarization :</b>	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 25℃ / 64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: BT CH78(2480MHz)	Power rating:	: 125Vac/60Hz

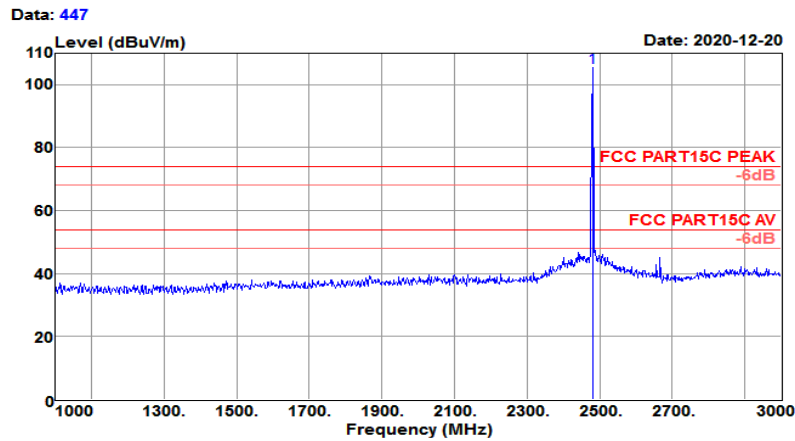


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2480.000	109.56	27.76	4.26	35.99	105.59	74.00	31.59	Peak



<b>Test Mode :</b>	Bluetooth (3Mbps) CH78 (2480MHz)	<b>Temperature :</b>	23~25℃
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	3GHz~18GHz	<b>Polarization :</b>	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 25℃ / 64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: BT CH78(2480MHz)	Power rating:	: 125Vac/60Hz

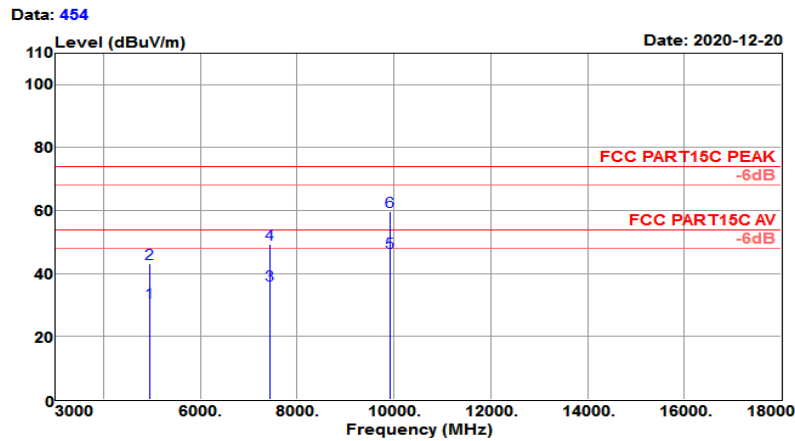


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4960.000	29.57	31.14	6.07	35.93	30.85	54.00	-23.15	Average
4960.000	41.82	31.14	6.07	35.93	43.10	74.00	-30.90	Peak
7440.000	25.83	35.96	9.04	34.32	36.51	54.00	-17.49	Average
7440.000	38.75	35.96	9.04	34.32	49.43	74.00	-24.57	Peak
9920.000	26.57	38.64	13.24	31.87	46.58	54.00	-7.42	Average
9920.000	39.86	38.64	13.24	31.87	59.87	74.00	-14.13	Peak

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

<b>Test Mode :</b>	Bluetooth (3Mbps) CH78 (2480MHz)	<b>Temperature :</b>	23~25℃
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	1GHz~3GHz	<b>Polarization :</b>	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: BT CH78(2480MHz)	Power rating:	: 125Vac/60Hz

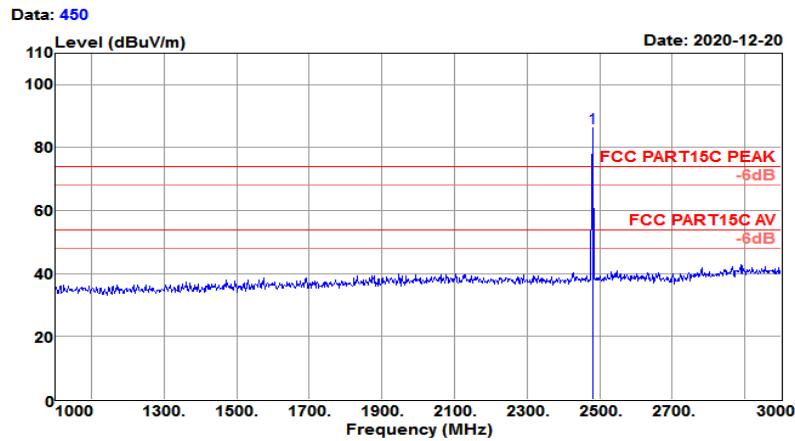

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2480.000	90.29	27.76	4.26	35.99	86.32	74.00	12.32	Peak

<b>Test Mode :</b>	Bluetooth (3Mbps) CH78 (2480MHz)	<b>Temperature :</b>	23~25℃
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	3GHz~18GHz	<b>Polarization :</b>	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 25℃ / 64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: BT CH78(2480MHz)	Power rating:	: 125Vac/60Hz

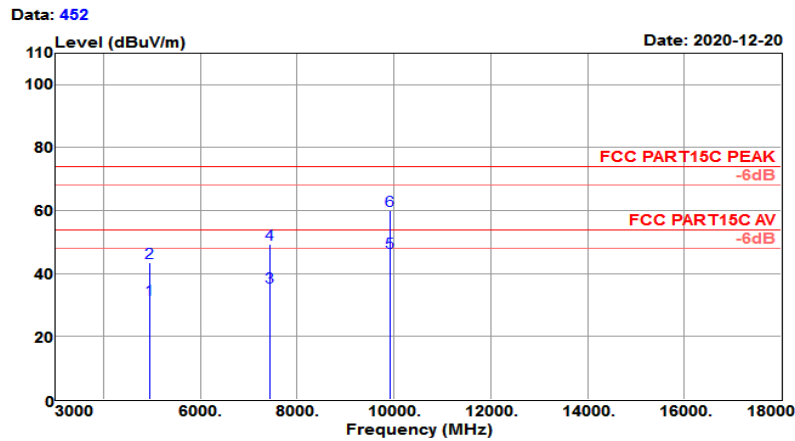


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4960.000	30.41	31.14	6.07	35.93	31.69	54.00	-22.31	Average
4960.000	42.17	31.14	6.07	35.93	43.45	74.00	-30.55	Peak
7440.000	25.17	35.96	9.04	34.32	35.85	54.00	-18.15	Average
7440.000	38.50	35.96	9.04	34.32	49.18	74.00	-24.82	Peak
9920.000	26.81	38.64	13.24	31.87	46.82	54.00	-7.18	Average
9920.000	39.95	38.64	13.24	31.87	59.96	74.00	-14.04	Peak

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

#### 4.8.2 Test Result of Radiated Spurious Emission (30MHz ~ 1GHz)

Test Mode :	Bluetooth (3Mbps) CH00 (2402MHz)	Temperature :	23~25°C
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	30MHz~1GHz	Polarization :	Horizontal


Data: 494

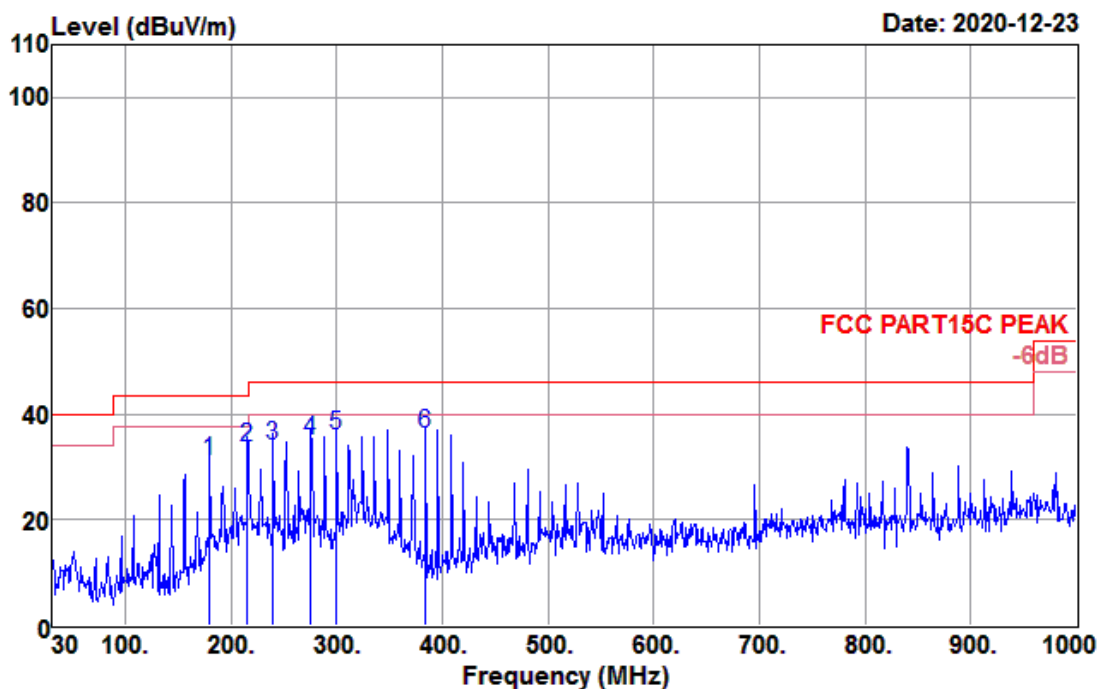

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
179.380	49.18	11.99	2.61	32.47	31.31	43.50	-12.19	QP
215.270	51.99	11.36	2.85	32.47	33.73	43.50	-9.77	QP
239.520	51.08	12.58	3.02	32.48	34.20	46.00	-11.80	QP
275.410	50.60	13.66	3.24	32.49	35.01	46.00	-10.99	QP
299.660	51.01	14.19	3.40	32.49	36.11	46.00	-9.89	QP
384.050	49.39	15.48	3.88	32.54	36.21	46.00	-9.79	QP

<b>Test Mode :</b>	Bluetooth (3Mbps) CH00 (2402MHz)	<b>Temperature :</b>	23~25°C
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	63~65%
<b>Frequency Range</b>	30MHz~1GHz	<b>Polarization :</b>	Vertical

Data: 493

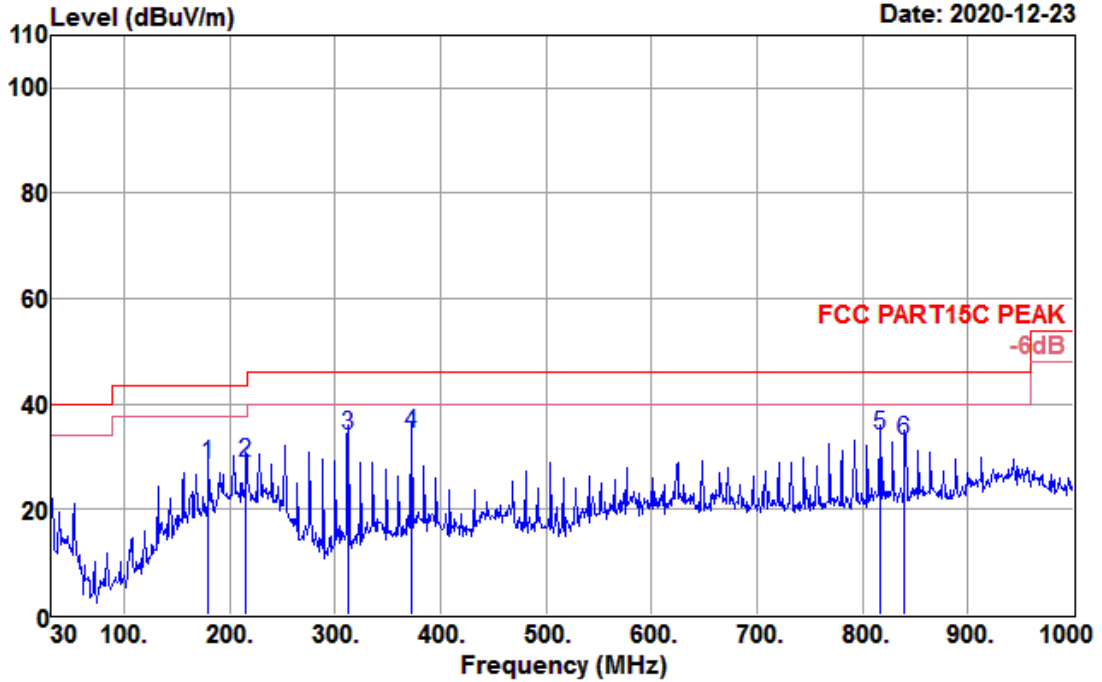

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
179.380	46.49	11.99	2.61	32.47	28.62	43.50	-14.88	QP
215.270	47.11	11.36	2.85	32.47	28.85	43.50	-14.65	QP
312.270	48.81	14.35	3.47	32.50	34.13	46.00	-11.87	QP
371.440	48.05	15.23	3.81	32.53	34.56	46.00	-11.44	QP
816.670	37.94	22.53	5.75	32.29	33.93	46.00	-12.07	QP
839.950	36.86	22.72	5.86	32.26	33.18	46.00	-12.82	QP

## 4.9 AC Conducted Emission Measurement

### 4.9.1 Limit of AC Conducted Emission

FCC §15.207

IC RSS-GEN 8.8

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50


\*Decreases with the logarithm of the frequency.

### 4.9.2 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


### 4.9.3 Test Result of AC Conducted Emission

<b>Test Mode :</b>	Mode 1	<b>Temperature :</b>	21~23°C
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	41~43%
<b>Test Voltage :</b>	120Vac / 60Hz	<b>Phase :</b>	Line
<b>Function Type :</b>	BT Linking + Switching On + Lighting		

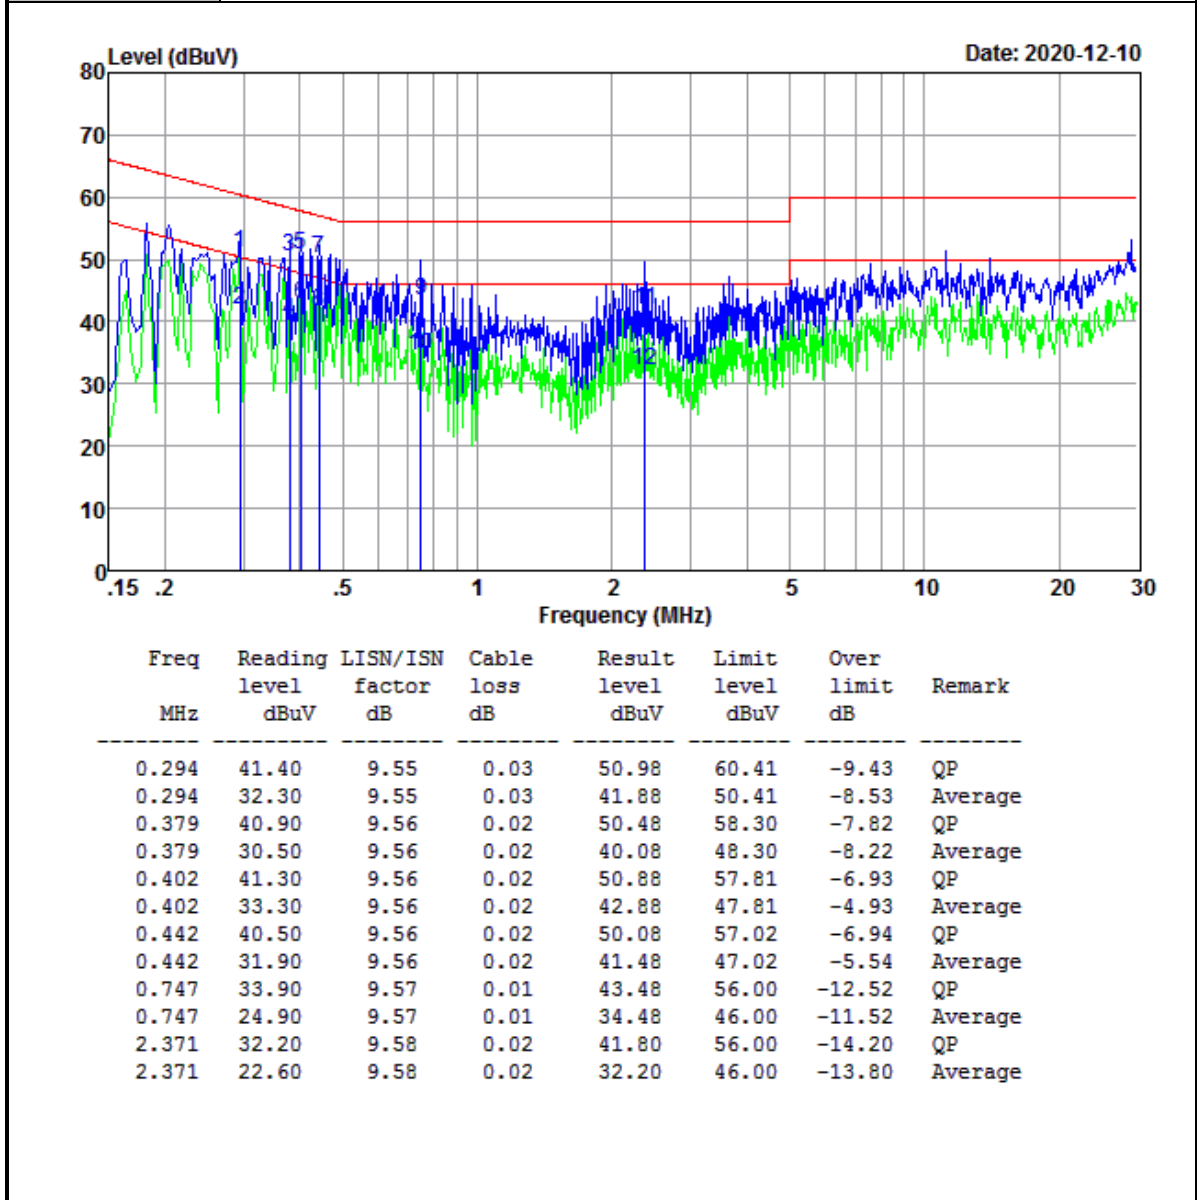

Result Level= Reading Level + LISN Factor + Cable Loss

<b>Test Mode :</b>	Mode 1	<b>Temperature :</b>	21~23°C
<b>Test Engineer :</b>	Jack Liu	<b>Relative Humidity :</b>	41~43%
<b>Test Voltage :</b>	120Vac / 60Hz	<b>Phase :</b>	Neutral
<b>Function Type :</b>	BT Linking + Switching On + Lighting		

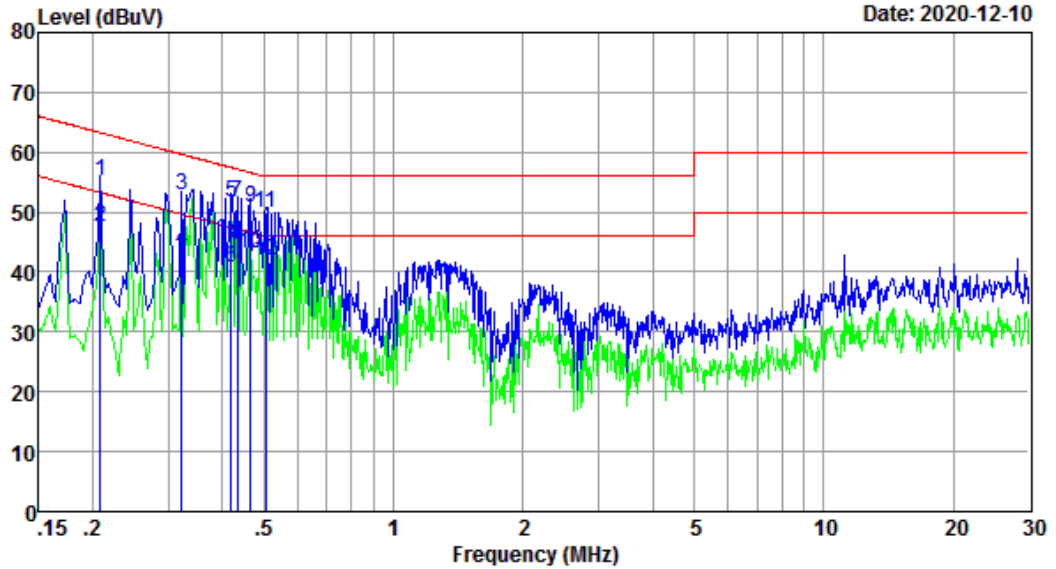

Freq MHz	Reading level dBuV	LISN/ISN factor dB	Cable loss dB	Result level dBuV	Limit level dBuV	Over limit dB	Remark
0.208	45.50	9.56	0.03	55.09	63.27	-8.18	QP
0.208	38.00	9.56	0.03	47.59	53.27	-5.68	Average
0.322	43.10	9.58	0.02	52.70	59.66	-6.96	QP
0.322	34.10	9.58	0.02	43.70	49.66	-5.96	Average
0.419	42.00	9.58	0.02	51.60	57.46	-5.86	QP
0.419	31.20	9.58	0.02	40.80	47.46	-6.66	Average
0.433	42.10	9.58	0.02	51.70	57.20	-5.50	QP
0.433	34.90	9.58	0.02	44.50	47.20	-2.70	Average
0.466	41.30	9.59	0.02	50.91	56.58	-5.67	QP
0.466	33.60	9.59	0.02	43.21	46.58	-3.37	Average
0.505	40.20	9.59	0.02	49.81	56.00	-6.19	QP
0.505	32.30	9.59	0.02	41.91	46.00	-4.09	Average

Result Level= Reading Level + LISN Factor + Cable Loss



## 4.10 Antenna Requirements

### 4.10.1 Standard Applicable

According to antenna requirement of §15.203.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be re-placed by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded..

And according to §15.247(4)(1), system operating in the 2400-2483.5MHz bands that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

### 4.10.2 Antenna Connected Construction

An External antenna design is used.

### 4.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

## 5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Due Date	Remark
Spectrum Analyzer	Keysight	N9010A	MY56070788	2020-01-15	2021-01-14	Conducted
Power Sensor	Keysight	U2021XA	MY56510025	2020-01-16	2021-01-15	Conducted
Power Sensor	Keysight	U2021XA	MY57030005	2020-01-16	2021-01-15	Conducted
Power Sensor	Keysight	U2021XA	MY56510018	2020-01-16	2021-01-15	Conducted
Power Sensor	Keysight	U2021XA	MY56480002	2020-01-16	2021-01-15	Conducted
Thermal Chamber	Howkin	UHL-34	19111801	2020-05-09	2021-05-08	Conducted
Base Station	R&S	CMW 270	101231	2020-01-16	2021-01-15	Conducted
Signal Generator (Interferer)	Keysight	N5182B	MY56200384	2020-02-21	2021-02-20	Conducted
Signal Generator (Blocker)	Keysight	N5171B	MY56200661	2020-01-15	2021-01-14	Conducted

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV 40	101433	2020-01-16	2021-01-15	Radiation
Amplifier	Sonoma	310	363917	2020-01-15	2021-01-14	Radiation
Amplifier	Schwarzbeck	BBV 9718	327	2020-01-15	2021-01-14	Radiation
Amplifier	Narda	TTA1840-35-HG	2034380	2020-05-22	2021-05-21	Radiation
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-051	2020-02-14	2023-02-13	Radiation
Broadband Antenna	Schwarzbeck	VULB 9168	9168-757	2018-08-31	2021-08-30	Radiation
Horn Antenna	Schwarzbeck	BBHA 9120 D	1677	2020-02-14	2023-02-13	Radiation
Horn Antenna	COM-POWER	AH-1840	101117	2018-06-20	2021-06-19	Radiation
Test Software	Audix	E3	6.111221a	N/A	N/A	Radiation
Filter	Micro-Tronics	BRM 50702	G266	N/A	N/A	Radiation

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Due Date	Remark
LISN	R&S	ENV216	102125	2020-01-08	2021-01-07	Conducted
LISN	R&S	ENV432	101327	2020-01-08	2021-01-07	Conducted
EMI Test Receiver	R&S	ESR3	102143	2020-01-16	2021-01-15	Conducted
EMI Test Software	Audix	E3	N/A	N/A	N/A	Conducted

N/A: No Calibration Required

## 6 Uncertainty of Evaluation

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.42dB
Radiated emission	30MHz ~ 1GMHz	2.50dB
	1GHz ~ 18GHz	3.51dB
	18GHz ~ 40GHz	3.96dB

MEASUREMENT	UNCERTAINTY
Occupied Channel Bandwidth	±196.4Hz
RF output power, conducted	±2.31dB
Power density, conducted	±2.31dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .


## Appendix A: 20dB Emission Bandwidth

### Test Result


TestMode	Antenna	Channel	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.933	2401.505	2402.438	---	PASS
		2441	0.936	2440.502	2441.438	---	PASS
		2480	0.930	2479.502	2480.432	---	PASS
2DH5	Ant1	2402	1.326	2401.295	2402.621	---	PASS
		2441	1.326	2440.292	2441.618	---	PASS
		2480	1.317	2479.298	2480.615	---	PASS
3DH5	Ant1	2402	1.326	2401.298	2402.624	---	PASS
		2441	1.299	2440.319	2441.618	---	PASS
		2480	1.317	2479.301	2480.618	---	PASS

## Test Graphs




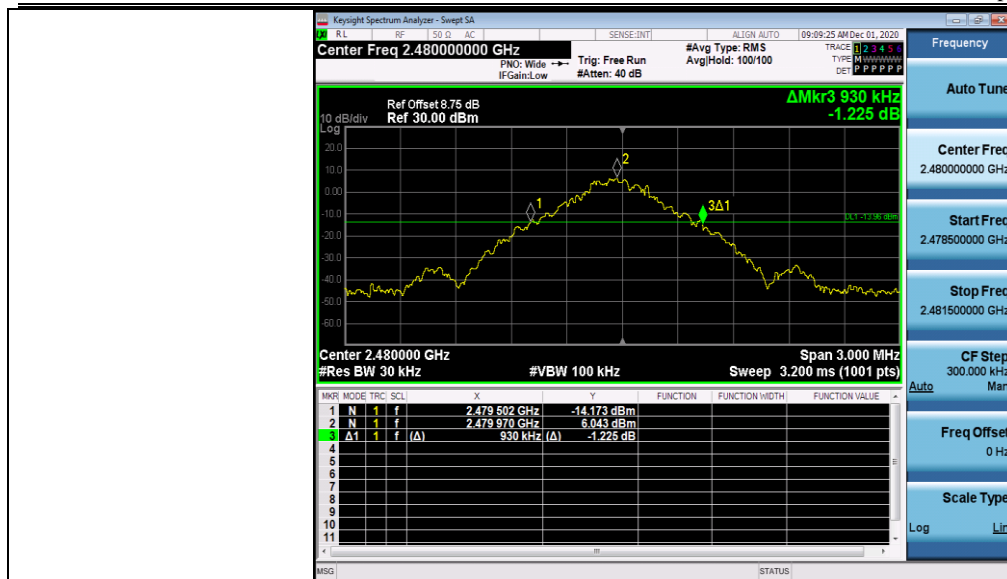


2DH5\_Ant1\_2402

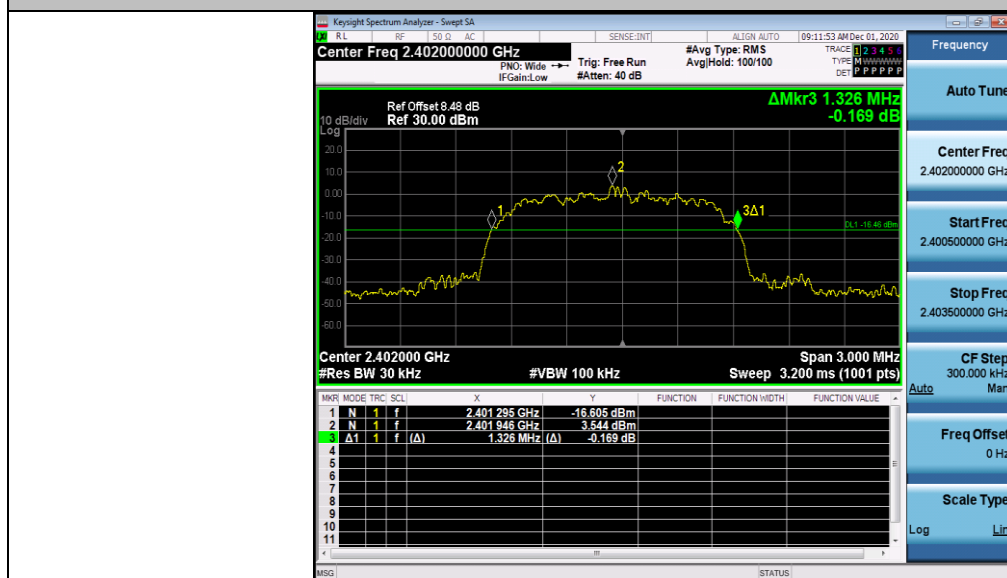

2DH5\_Ant1\_2441

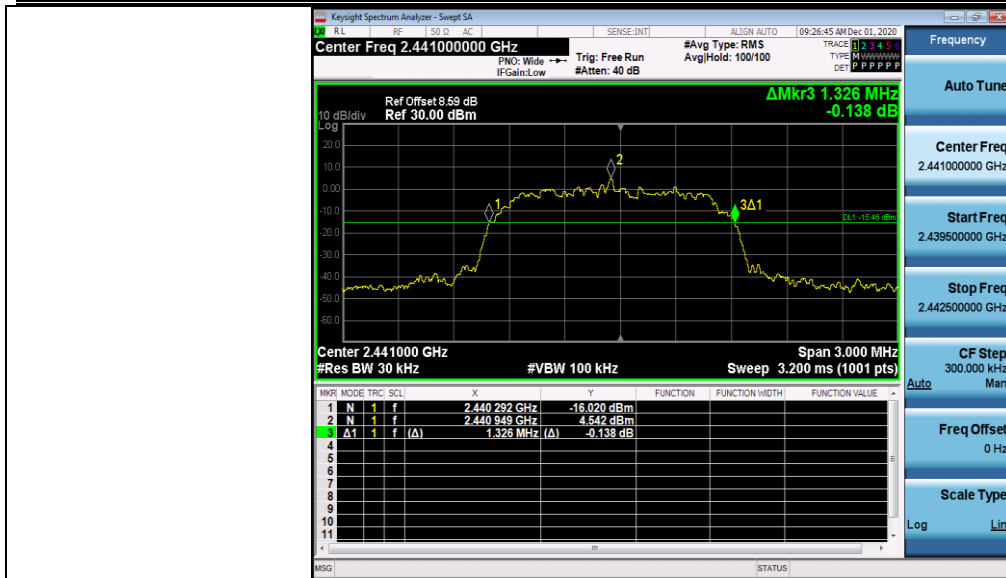

2DH5\_Ant1\_2480

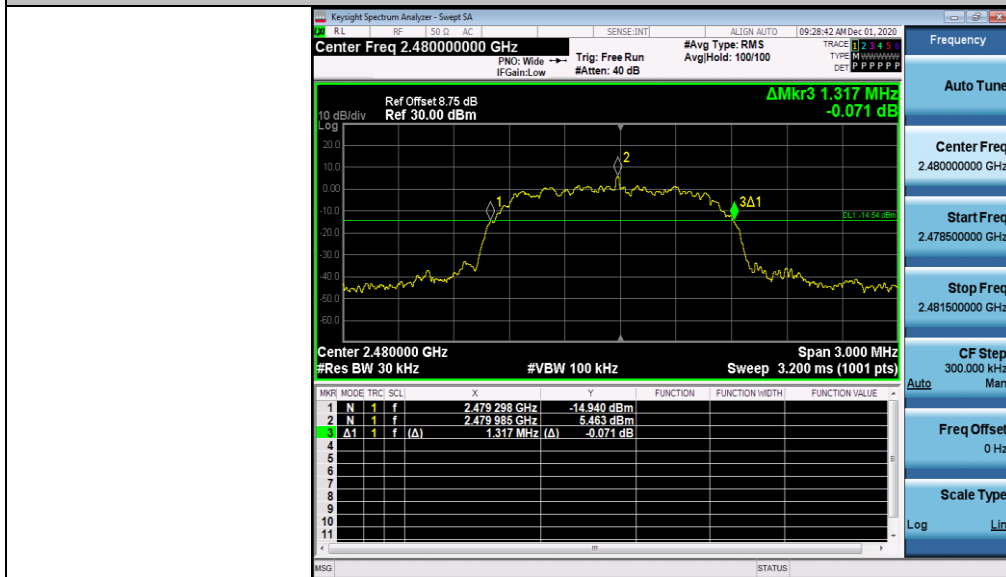


3DH5\_Ant1\_2402





3DH5\_Ant1\_2441

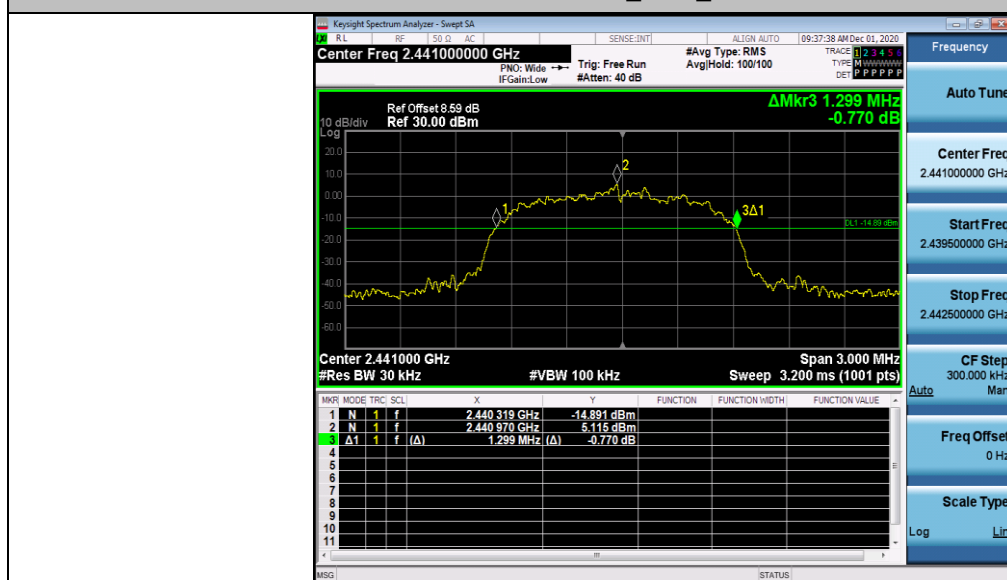

3DH5\_Ant1\_2480




## Appendix B: Occupied Channel Bandwidth

### Test Result


TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.80772	2401.555	2402.363	---	PASS
		2441	0.80907	2440.558	2441.367	---	PASS
		2480	0.83169	2479.543	2480.375	---	PASS
2DH5	Ant1	2402	1.1830	2401.368	2402.551	---	PASS
		2441	1.1848	2440.366	2441.551	---	PASS
		2480	1.1853	2479.366	2480.552	---	PASS
3DH5	Ant1	2402	1.1891	2401.359	2402.548	---	PASS
		2441	1.1871	2440.362	2441.549	---	PASS
		2480	1.1853	2479.361	2480.547	---	PASS

## Test Graphs




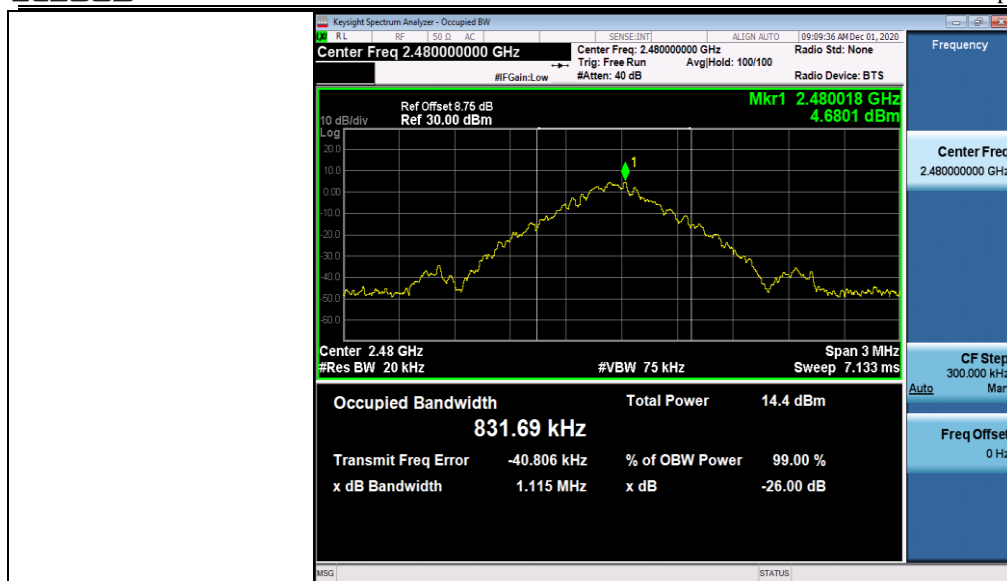


2DH5\_Ant1\_2402

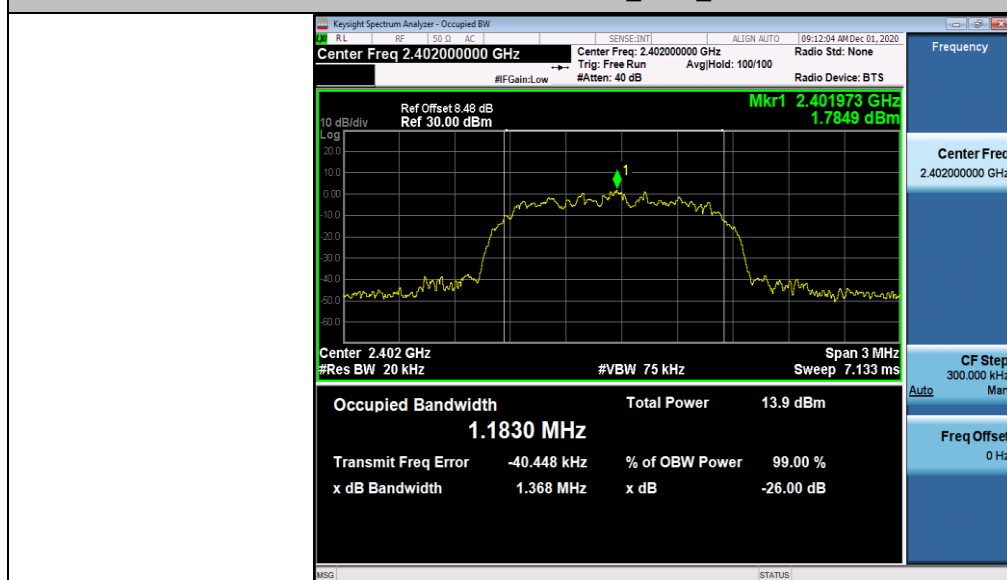


2DH5\_Ant1\_2441

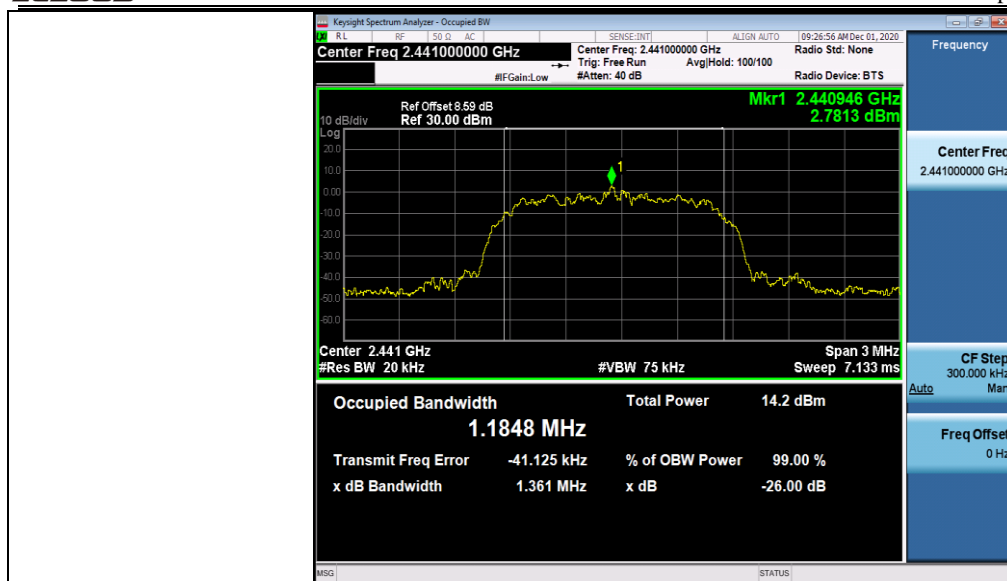


2DH5\_Ant1\_2480

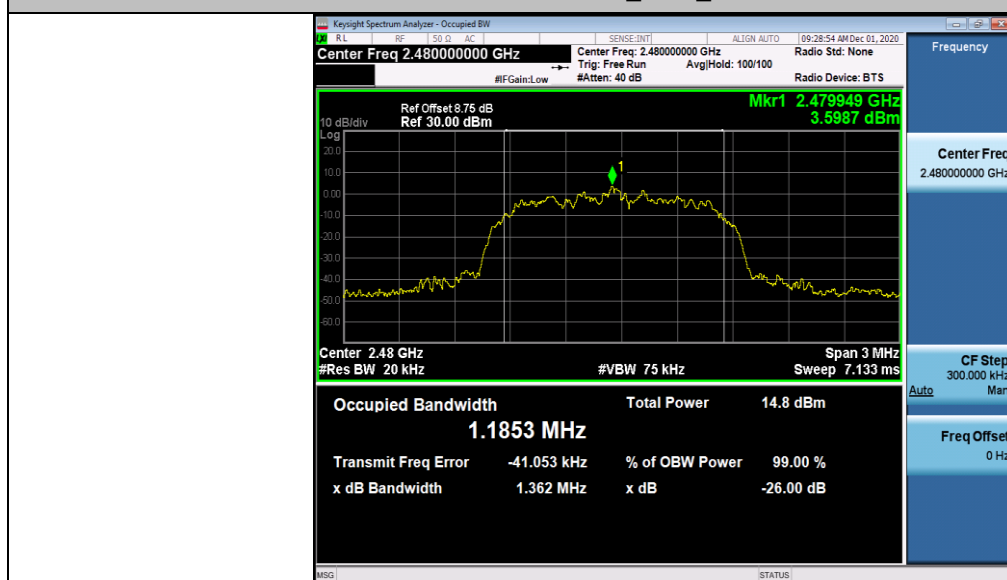


3DH5\_Ant1\_2402

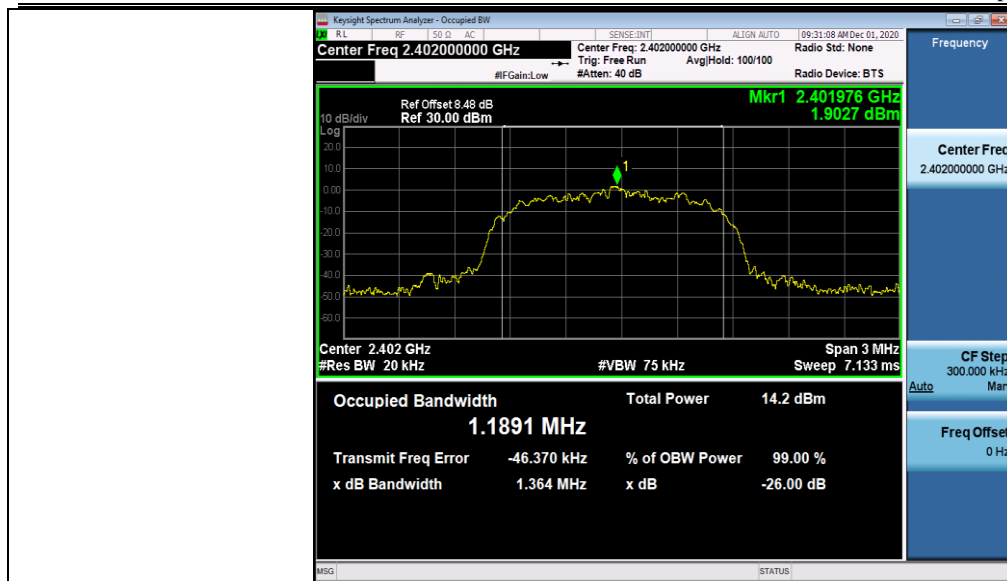

3DH5\_Ant1\_2441

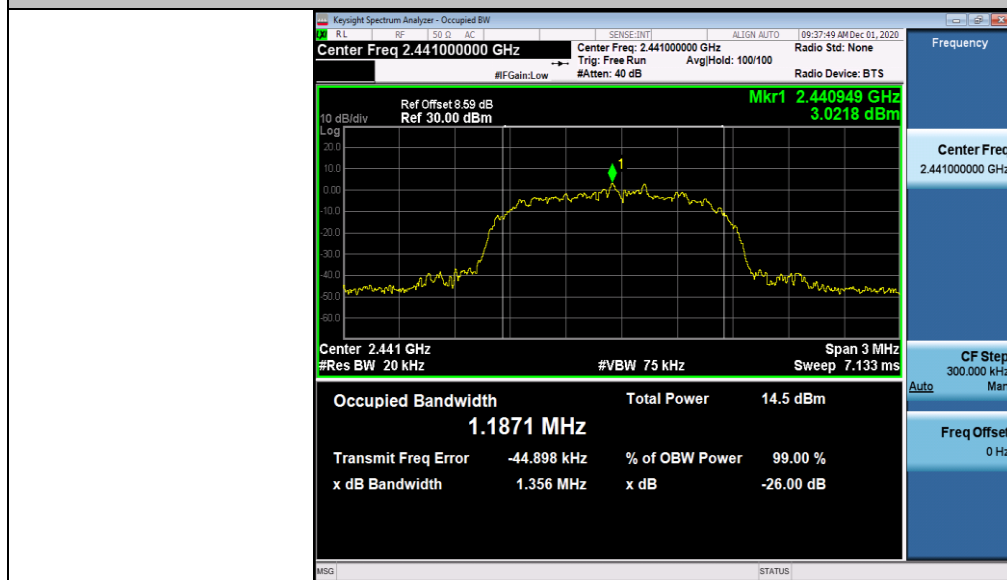

3DH5\_Ant1\_2480

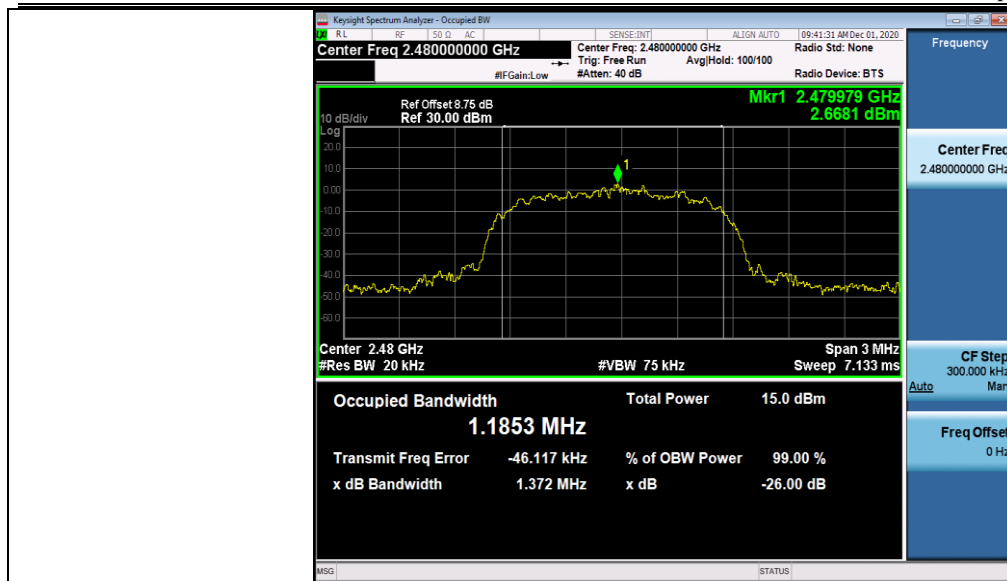





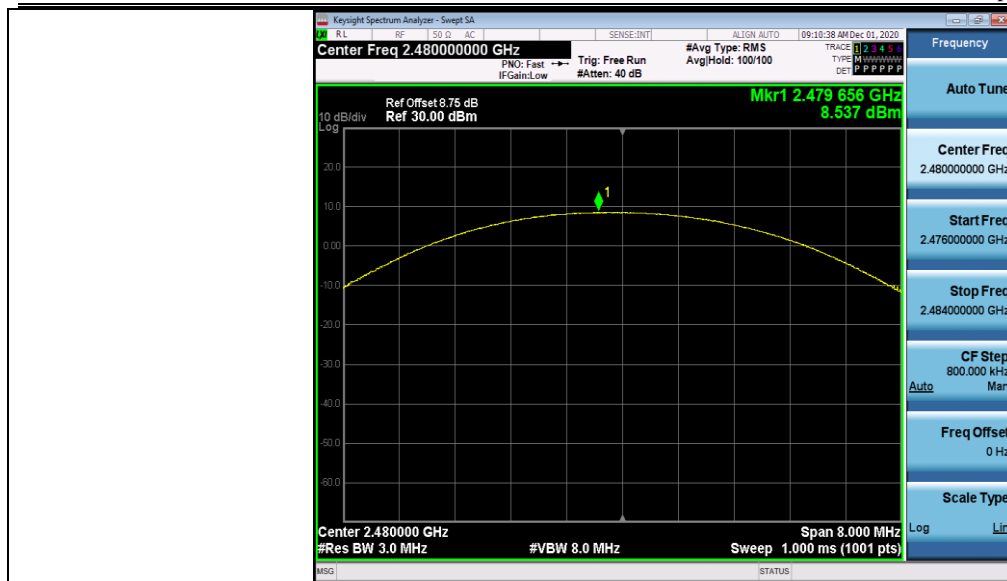
## Appendix C: Maximum conducted output power

### Test Result


TestMode	Antenna	Channel	Result[dBm]	EIRP [dBm]	Limit[dBm]	Verdict
DH5	Ant1	2402	7.81	6.81	<=20.97	PASS
		2441	8.19	7.19	<=20.97	PASS
		2480	8.54	7.54	<=20.97	PASS
2DH5	Ant1	2402	9.74	8.74	<=20.97	PASS
		2441	10.31	9.31	<=20.97	PASS
		2480	10.7	9.7	<=20.97	PASS
3DH5	Ant1	2402	10.4	9.4	<=20.97	PASS
		2441	10.86	9.86	<=20.97	PASS
		2480	11.27	10.27	<=20.97	PASS

Test Graphs

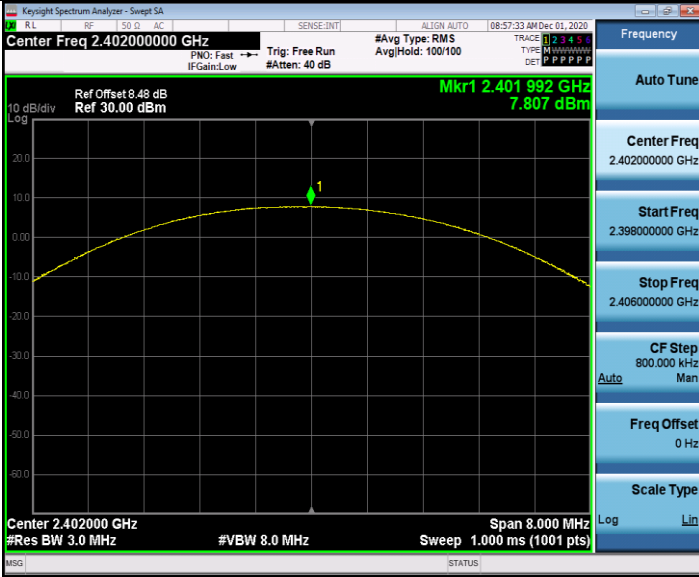
DH5_Ant1_2402	
	<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.40200000 GHz</p> <p>Start Freq 2.39800000 GHz</p> <p>Stop Freq 2.40600000 GHz</p> <p>CF Step 800.000 kHz Auto Man</p> <p>Freq Offset 0 Hz</p> <p>Scale Type Log Lin</p>
DH5_Ant1_2441	
	<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.44100000 GHz</p> <p>Start Freq 2.43700000 GHz</p> <p>Stop Freq 2.44500000 GHz</p> <p>CF Step 800.000 kHz Auto Man</p> <p>Freq Offset 0 Hz</p> <p>Scale Type Log Lin</p>
DH5_Ant1_2480	




2DH5\_Ant1\_2402

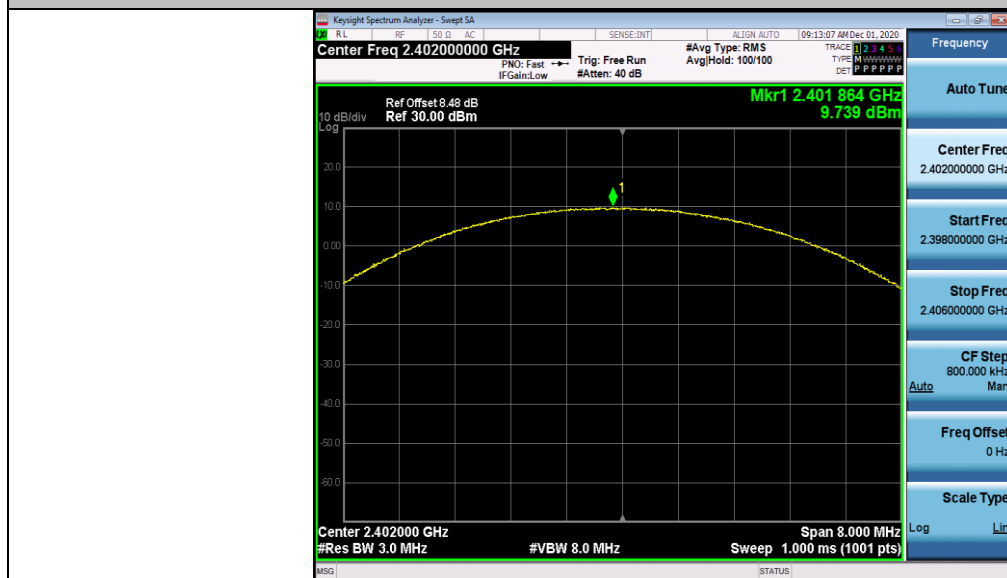


2DH5\_Ant1\_2441

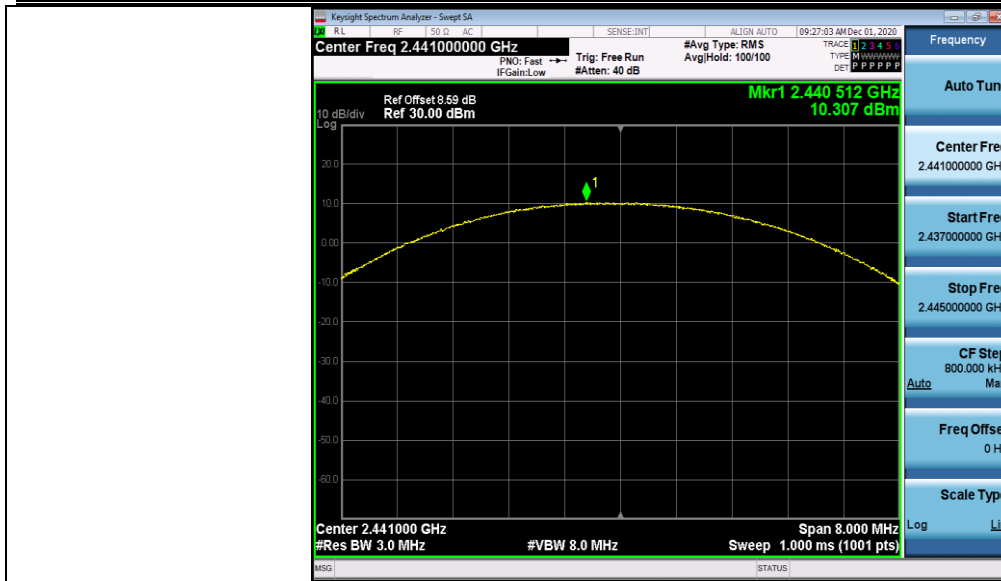


2DH5\_Ant1\_2480

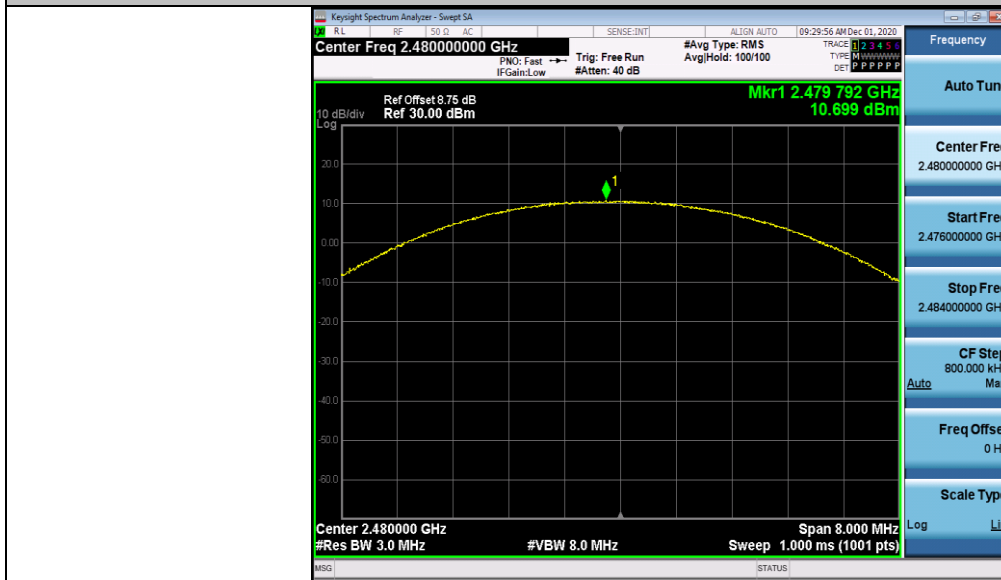

3DH5\_Ant1\_2402

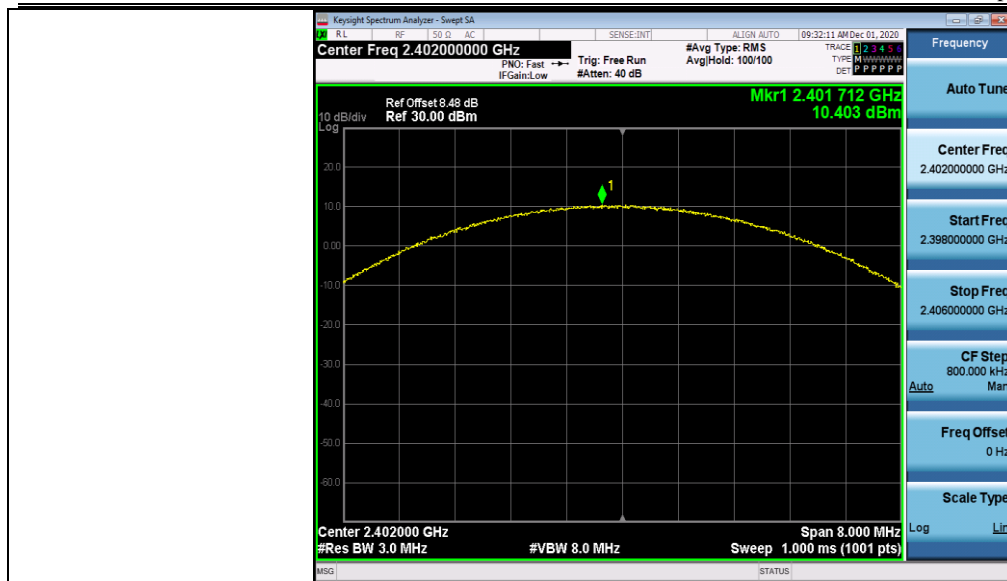

3DH5\_Ant1\_2441

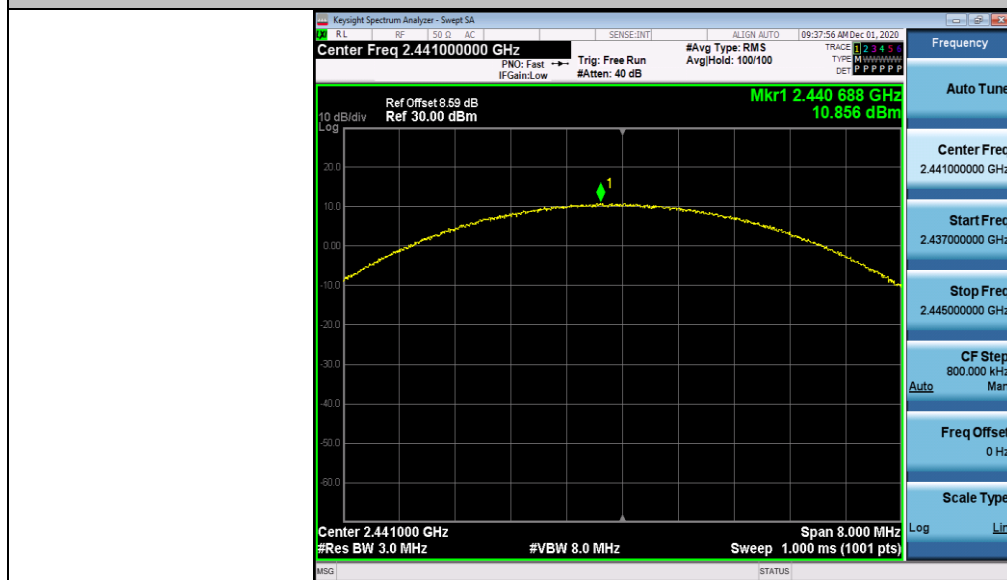

3DH5\_Ant1\_2480




## Appendix D: Carrier frequency separation


### Test Result

TestMode	Antenna	Channel	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	0.996	$\geq 0.624$	PASS
2DH5	Ant1	Hop	1.124	$\geq 0.884$	PASS
3DH5	Ant1	Hop	1.126	$\geq 0.884$	PASS

Test Graphs

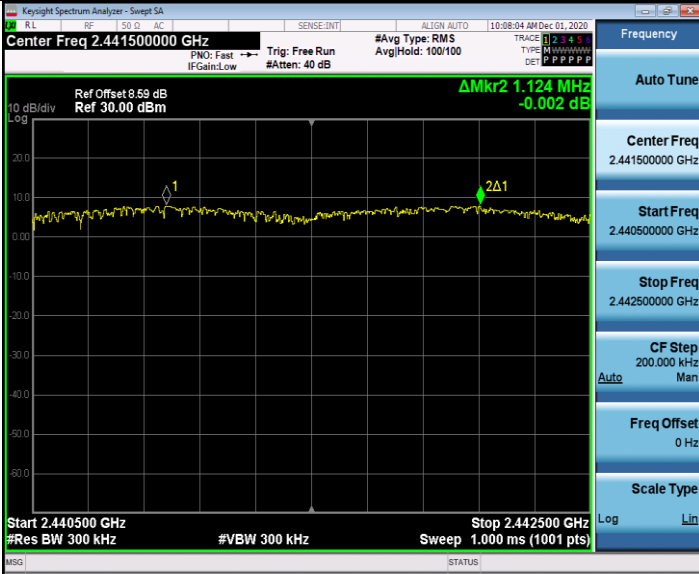DH5_Ant1_Hop	
	
2DH5_Ant1_Hop	
	
3DH5_Ant1_Hop	



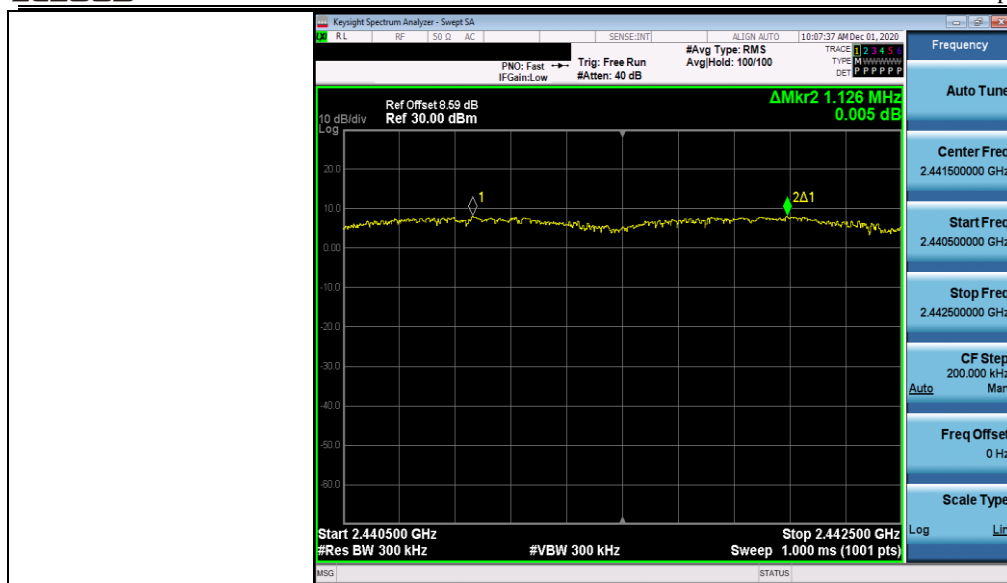




## Appendix E: Time of occupancy

### Test Result


TestMode	Antenna	Channel	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop_2441	0.38	80	0.03	<=0.4	PASS
DH3	Ant1	Hop_2441	1.63	110	0.179	<=0.4	PASS
DH5	Ant1	Hop_2441	2.88	50	0.144	<=0.4	PASS
2DH1	Ant1	Hop_2441	0.39	90	0.035	<=0.4	PASS
2DH3	Ant1	Hop_2441	1.64	70	0.115	<=0.4	PASS
2DH5	Ant1	Hop_2441	2.89	60	0.173	<=0.4	PASS
3DH1	Ant1	Hop_2441	0.39	130	0.05	<=0.4	PASS
3DH3	Ant1	Hop_2441	1.64	100	0.164	<=0.4	PASS
3DH5	Ant1	Hop_2441	2.89	90	0.26	<=0.4	PASS


Test Graphs

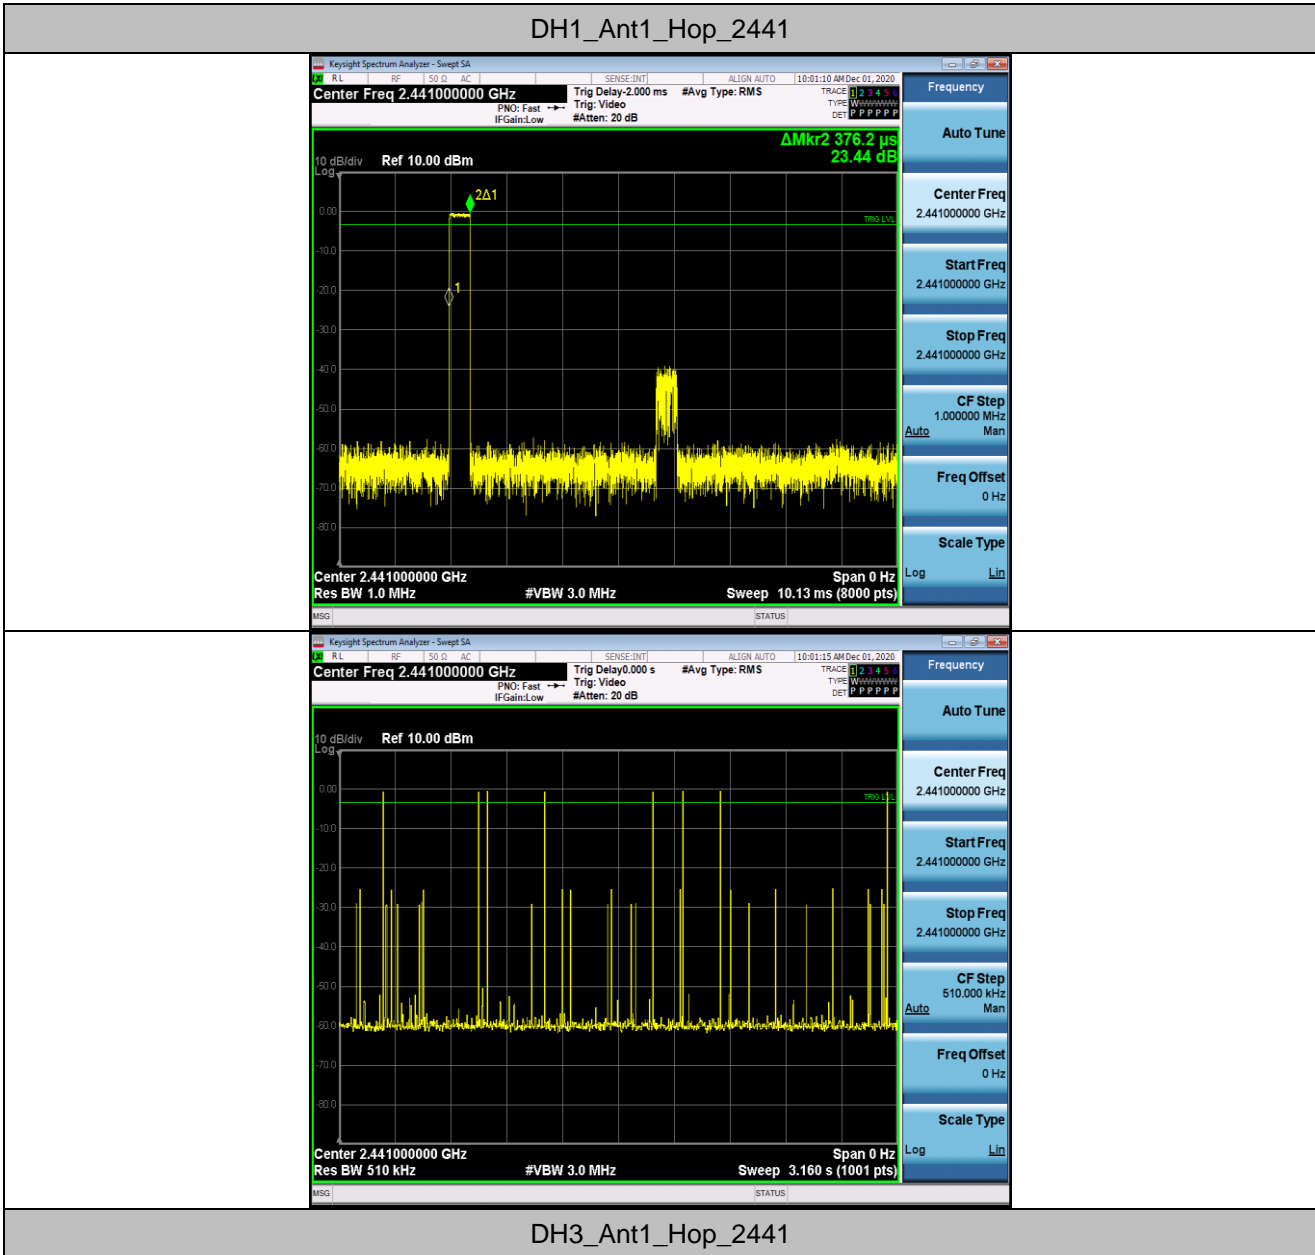

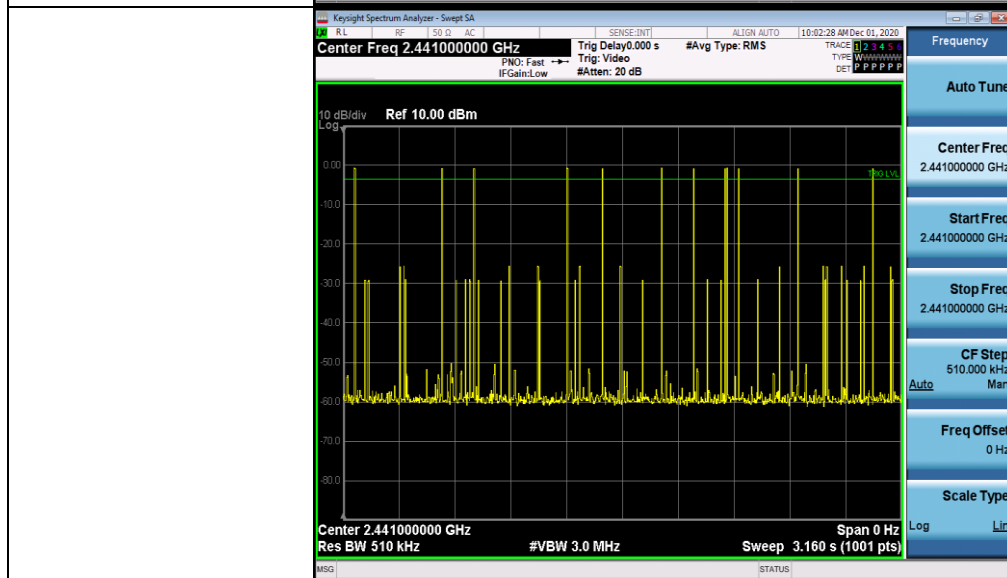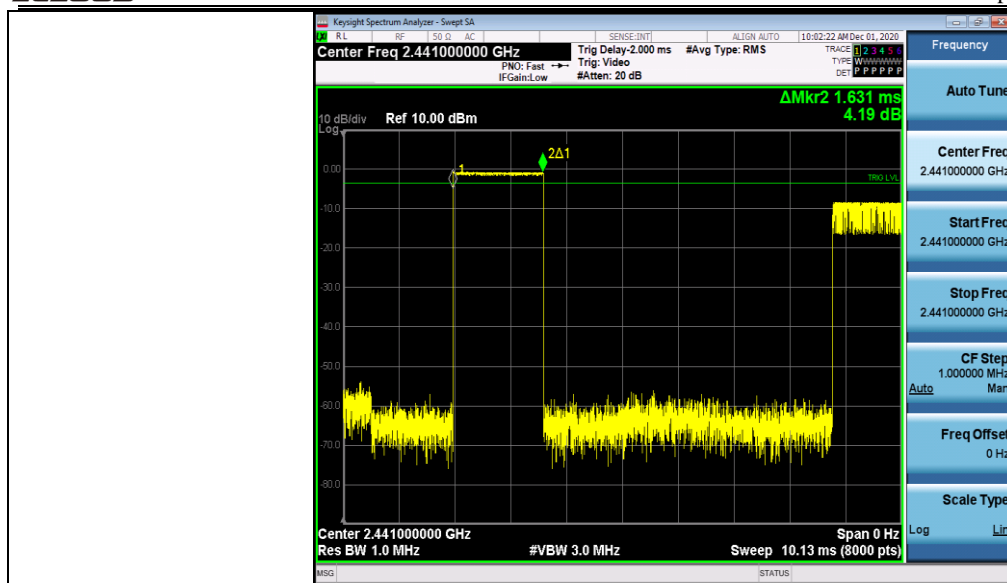

DH5\_Ant1\_Hop\_2441

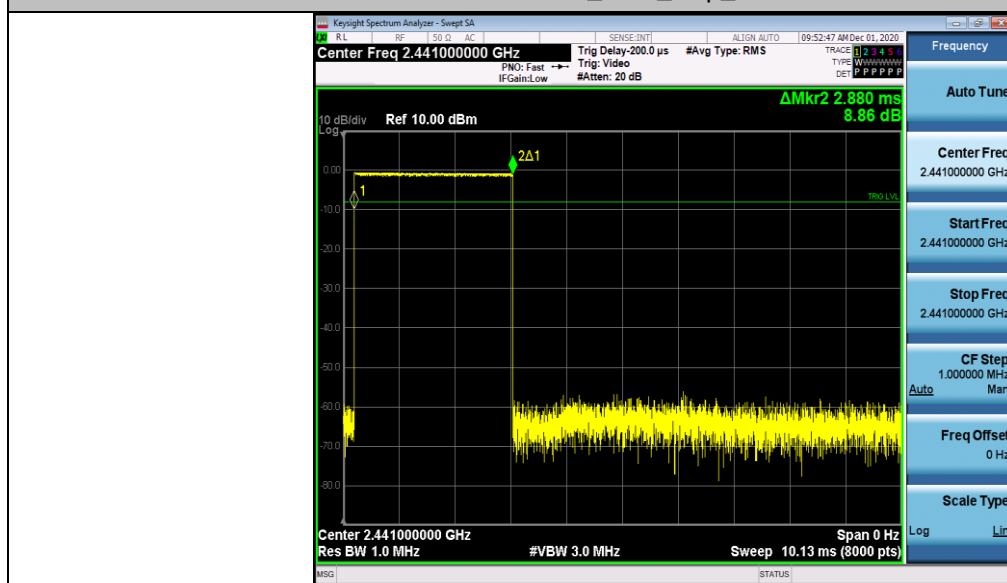

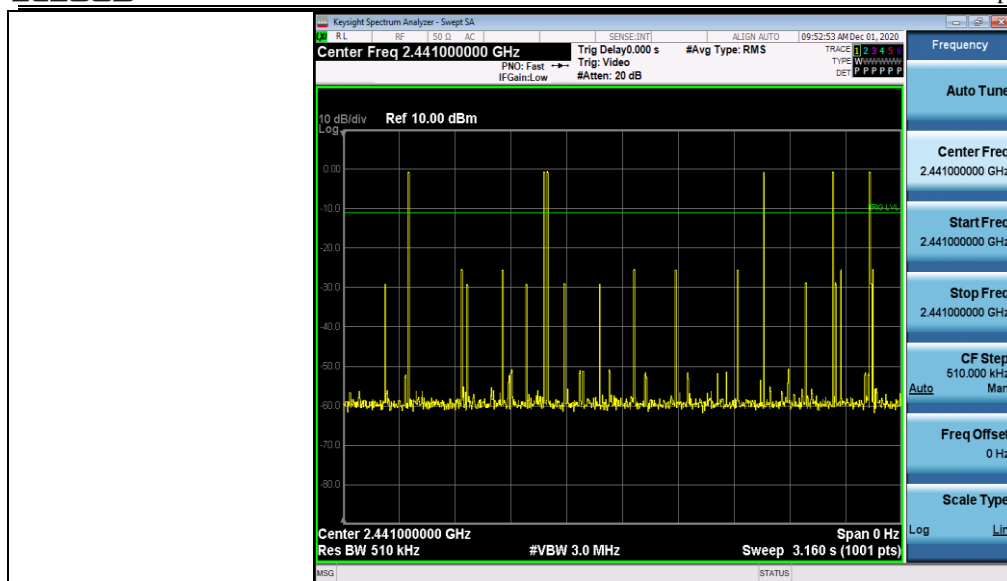

2DH1\_Ant1\_Hop\_2441

