

# TEST REPORT

**Product Name** : SMART POWER STRIP  
**Brand Mark** : Globe  
**Model No.** : 50573  
**FCC ID** : 2AQUQGE50573L  
**Report Number** : BLA-EMC-202401-A4701  
**Date of Sample Receipt** : 2024/1/28  
**Date of Test** : 2024/1/29 to 2024/3/1  
**Date of Issue** : 2024/3/4  
**Test Standard** : 47 CFR Part 15, Subpart C 15.247  
**Test Result** : Pass

Prepared for:

**Globe Electric Company Inc.**  
**150 Oneida, Montreal, Quebec, Canada, H9R 1A8**

Prepared by:

**BlueAsia of Technical Services(Shenzhen) Co.,Ltd.**  
**Building C, No. 107, Shihuan Road, Shiyuan Sub-District, Baoan District,**  
**Shenzhen, Guangdong Province, China**  
**TEL: +86-755-23059481**

Compiled by:

*charlie*

Review by:

*Sueels*

Approved by:

*Blue Zheng*

Date:

2024/3/4



**REPORT REVISE RECORD**

Version No.	Date	Description
00	2024/3/4	Original

BlueAsia

## TABLE OF CONTENTS

<b>1 TEST SUMMARY</b> .....	<b>5</b>
<b>2 GENERAL INFORMATION</b> .....	<b>6</b>
<b>3 GENERAL DESCRIPTION OF E.U.T.</b> .....	<b>6</b>
<b>4 OPERATION FREQUENCY EACH OF CHANNEL</b> .....	<b>7</b>
<b>5 TEST ENVIRONMENT</b> .....	<b>8</b>
<b>6 TEST MODE</b> .....	<b>8</b>
<b>7 MEASUREMENT UNCERTAINTY</b> .....	<b>9</b>
<b>8 DESCRIPTION OF SUPPORT UNIT</b> .....	<b>10</b>
<b>9 LABORATORY LOCATION</b> .....	<b>10</b>
<b>10 TEST INSTRUMENTS LIST</b> .....	<b>11</b>
<b>11 CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ)</b> .....	<b>15</b>
11.1 LIMITS .....	15
11.2 BLOCK DIAGRAM OF TEST SETUP .....	15
11.3 PROCEDURE .....	15
11.4 TEST DATA .....	17
<b>12 CONDUCTED BAND EDGES MEASUREMENT</b> .....	<b>19</b>
12.1 LIMITS .....	19
12.2 BLOCK DIAGRAM OF TEST SETUP .....	20
12.3 TEST DATA .....	20
<b>13 RADIATED SPURIOUS EMISSIONS</b> .....	<b>21</b>
13.1 LIMITS .....	21
13.2 BLOCK DIAGRAM OF TEST SETUP .....	22
13.3 PROCEDURE .....	22
13.4 TEST DATA .....	24
<b>14 ANTENNA REQUIREMENT</b> .....	<b>32</b>
14.1 CONCLUSION .....	32
<b>15 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS</b> .....	<b>33</b>
15.1 LIMITS .....	33
15.2 BLOCK DIAGRAM OF TEST SETUP .....	34

15.3 PROCEDURE .....	34
15.4 TEST DATA .....	36
<b>16 CONDUCTED SPURIOUS EMISSIONS .....</b>	<b>40</b>
16.1 LIMITS .....	40
16.2 BLOCK DIAGRAM OF TEST SETUP .....	41
16.3 TEST DATA .....	41
<b>17 POWER SPECTRUM DENSITY .....</b>	<b>42</b>
17.1 LIMITS .....	42
17.2 BLOCK DIAGRAM OF TEST SETUP .....	42
17.3 TEST DATA .....	42
<b>18 CONDUCTED PEAK OUTPUT POWER .....</b>	<b>43</b>
18.1 LIMITS .....	43
18.2 BLOCK DIAGRAM OF TEST SETUP .....	43
18.3 TEST DATA .....	44
<b>19 MINIMUM 6DB BANDWIDTH .....</b>	<b>45</b>
19.1 LIMITS .....	45
19.2 BLOCK DIAGRAM OF TEST SETUP .....	45
19.3 TEST DATA .....	45
<b>20 APPENDIX .....</b>	<b>46</b>
20.1 MAXIMUM CONDUCTED OUTPUT POWER .....	46
20.2 -6dB BANDWIDTH .....	48
20.3 OCCUPIED CHANNEL BANDWIDTH .....	50
20.4 MAXIMUM POWER SPECTRAL DENSITY LEVEL .....	52
20.5 BAND EDGE .....	54
20.6 CONDUCTED RF SPURIOUS EMISSION .....	57
<b>APPENDIX A: PHOTOGRAPHS OF TEST SETUP .....</b>	<b>61</b>
<b>APPENDIX B: PHOTOGRAPHS OF EUT .....</b>	<b>63</b>

## 1 TEST SUMMARY

Test item	Test Requirement	Test Method	Class/Severity	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass
Power Spectrum Density	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.5	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Minimum 6dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass

Remark:

N/A: Not Applicable

## 2 GENERAL INFORMATION

<b>Applicant</b>	Globe Electric Company Inc.
<b>Address</b>	150 Oneida, Montreal, Quebec, Canada, H9R 1A8
<b>Manufacturer</b>	Globe Electric Company Inc.
<b>Address</b>	150 Oneida, Montreal, Quebec, Canada, H9R 1A8
<b>Factory</b>	Globe Electric Company Inc.
<b>Address</b>	150 Oneida, Montreal, Quebec, Canada, H9R 1A8
<b>Product Name</b>	SMART POWER STRIP
<b>Test Model No.</b>	50573

## 3 GENERAL DESCRIPTION OF E.U.T.

<b>Hardware Version</b>	V4.0
<b>Software Version</b>	Re02
<b>Engineer sample no:</b>	BLA-EMC-202401-A47
<b>Operation Frequency:</b>	2402MHz-2480MHz
<b>Modulation Type:</b>	GFSK
<b>Channel Spacing:</b>	2MHz
<b>Number of Channels:</b>	40
<b>Antenna Type:</b>	PCB Antenna
<b>Antenna Gain:</b>	-15.36dBi(Provided by the customer)

#### 4 OPERATION FREQUENCY EACH OF CHANNEL

BLE:

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	11	2422MHz	21	2442MHz	31	2462MHz
2	2404MHz	12	2424MHz	22	2444MHz	32	2464MHz
⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮
9	2418MHz	19	2438MHz	29	2458MHz	39	2478MHz
10	2420MHz	20	2440MHz	30	2460MHz	40	2480MHz

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2440MHz
The Highest channel	2480MHz

## 5 TEST ENVIRONMENT

Environment	Temperature	Voltage
Normal	25°C	DC3.7V

## 6 TEST MODE

TEST MODE	TEST MODE DESCRIPTION
TX	Keep the EUT in transmitting mode

Remark: Only the data of the worst mode would be recorded in this report.



## 7 MEASUREMENT UNCERTAINTY

Parameter	Expanded Uncertainty (Confidence of 95%)
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±1.5 dB
Power Spectral Density, conducted	±3.0 dB
Unwanted Emissions, conducted	±3.0 dB
Temperature	±3 °C
Supply voltages	±3 %
Time	±5 %
Radiated Emission(9kHz-30MHz)	±4.34dB
AC Power Line Conducted Emission(150kHz-30MHz)	±3.45dB
Unwanted Radiated Emission (30MHz ~ 1000MHz)	±4.35 dB
Unwanted Radiated Emission (1GHz ~ 18GHz)	±4.44 dB

## 8 DESCRIPTION OF SUPPORT UNIT

Device Type	Manufacturer	Model Name	Serial No.	Remark
PC	lenovo	E460C	N/A	From lab (No.BLA-ZC-BS-2022005)

## 9 LABORATORY LOCATION

All tests were performed at:

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

Building C, No. 107, Shihuan Road, Shiyuan Sub-District, Baoan District, Shenzhen, Guangdong Province, China

Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673

No tests were sub-contracted.

## 10 TEST INSTRUMENTS LIST

Test Equipment Of Radiated Spurious Emissions					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber 1	SKET	966	N/A	2023/11/16	2026/11/15
Chamber 2	SKET	966	N/A	2021/07/20	2024/7/19
Spectrum	R&S	FSP40	100817	2023/08/30	2024/08/29
Receiver	R&S	ESR7	101199	2023/08/30	2024/08/29
Receiver	R&S	ESPI7	101477	2023/07/07	2024/07/06
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	2022/10/12	2025/10/11
Horn Antenna	Schwarzbeck	BBHA9120D	01892 P:00331	2022/09/13	2025/09/12
Horn Antenna	Schwarzbeck	BBHA 9170	1106	2022/04/24	2024/04/23
Amplifier	SKET	LNPA_30M01G-30	SK2021060801	2023/07/07	2024/07/06
Amplifier	SKET	PA-000318G-45	N/A	2023/08/30	2024/08/29
Amplifier	SKET	LNPA_18G40G-50	SK2022071301	2023/07/14	2024/07/13
Filter group	SKET	2.4G/5G Filter group r	N/A	2023/07/07	2024/07/06
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	2022/09/14	2025/09/13
1kHz calibration audio source	SKET	MCS-ABT-C35	N/A	2023/09/04	2024/09/03
Free Field Microphone	SKET	MGS MP 663	0414	2023/09/04	2024/09/03
Audio shielding box	SKET	SB-ABT-C35	N/A	2023/03/30	2024/03/29
Controller	SKET	N/A	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A

Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A
Signal Generator DTV	ECREDIX	DSG-1000	N/A	N/A	N/A

BlueAsia

<b>Test Equipment Of Conducted Emissions at AC Power Line (150kHz-30MHz)</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model</b>	<b>S/N</b>	<b>Cal.Date</b>	<b>Cal.Due</b>
Shield room	SKET	833	N/A	2023/11/16	2025/11/15
Receiver	R&S	ESPI3	101082	2023/08/30	2024/08/29
LISN	R&S	ENV216	3560.6550.15	2023/08/30	2024/08/29
LISN	AT	AT166-2	AKK1806000003	2023/08/30	2024/08/29
ISN	TESEQ	ISNT8-cat6	53580	2023/08/30	2024/08/29
Single-channel vehicle artificial power network	Schwarzbeck	NNBM 8124	01045	2023/07/07	2024/07/06
Single-channel vehicle artificial power network	Schwarzbeck	NNBM 8124	01075	2023/07/07	2024/07/06
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A

<b>Test Equipment Of RF Conducted Test</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model</b>	<b>S/N</b>	<b>Cal.Date</b>	<b>Cal.Due</b>
Spectrum	R&S	FSP40	100817	2023/08/30	2024/08/29
Spectrum	Agilent	N9020A	MY49100060	2023/08/30	2024/08/29
Spectrum	Agilent	N9020A	MY54420161	2023/08/30	2024/08/29
Signal Generator	Agilent	N5182A	MY47420955	2023/08/30	2024/08/29
Signal Generator	Agilent	N5181A	MY46240904	2023/07/07	2024/07/06
Signal Generator	R&S	CMW500	132429	2023/08/30	2024/08/29
BluetoothTester	Anritsu	MT8852B	06262047872	2023/08/30	2024/08/29
Power probe	DARE	RPR3006W	14I00889SN042	2023/09/01	2024/08/31
Power detection box	CDKMV	MW100-PSB	MW201020JYT	2023/07/07	2024/07/06
DC Powersupply	zhaoxin	KXN-305D	20K305D1221363	2023/08/30	2024/08/29
DC Powersupply	zhaoxin	RXN-1505D	19R1505D050168	2023/08/30	2024/08/29

2.4GHz/5GHz RF Test software	MTS	MTS 8310	Version 2.0.0.0	N/A	N/A
Audio Analyzer	Audio Precision	ATS-1	ATS141094	2023/07/07	2024/07/06

BlueAsia

## 11 CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ)


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

### 11.1 LIMITS

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

### 11.2 BLOCK DIAGRAM OF TEST SETUP

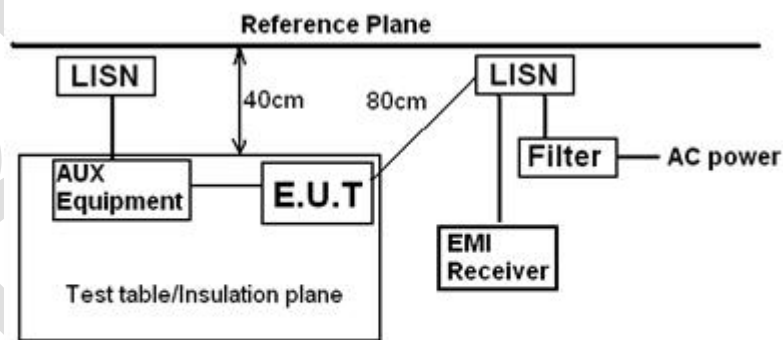

Remark:  
 E.U.T: Equipment Under Test  
 LISN: Line Impedance Stabilization Network  
 Test table height=0.8m

### 11.3 PROCEDURE

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50H + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.


- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
  - 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
  - 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.
- Remark: LISN=Read Level+ Cable Loss+ LISN Factor

BlueAsia



### 11.4 TEST DATA

[TestMode: TX]; [Line: Line];[Power:AC120V/60Hz]

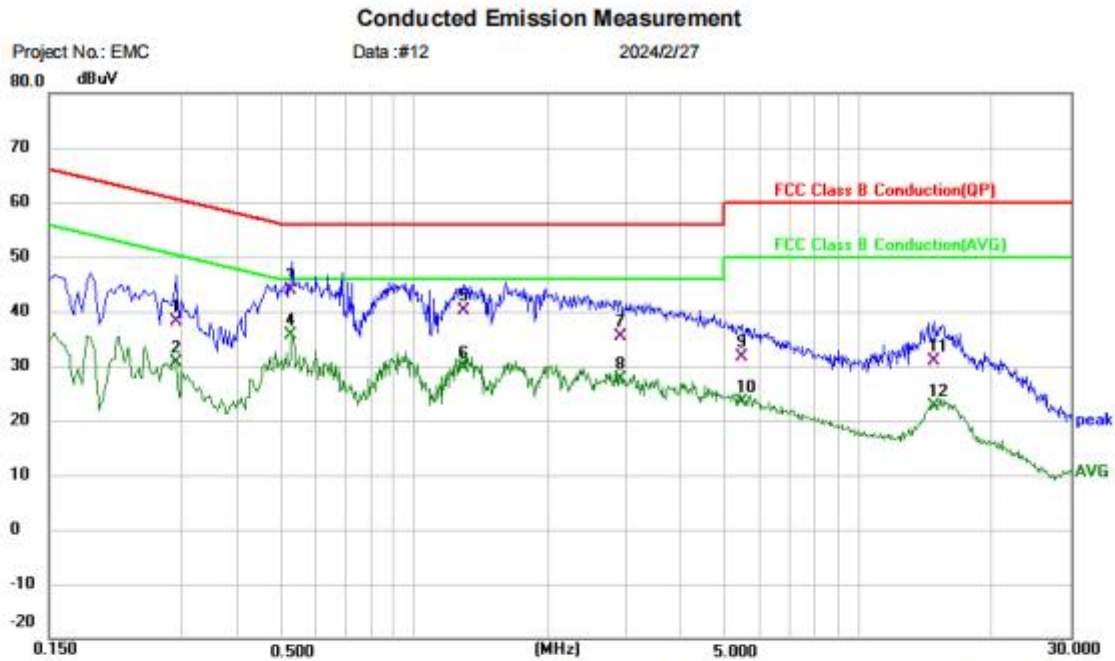


Site	Phase: <b>L1</b>	Temperature: (C)
Limit: FCC Class B Conduction(QP)	Power:	Humidity: %RH
EUT:	Distance: RBW: 9 KHz	Sweep Time: 10 ms
M/N:	VBW: 30 KHz	
Mode: BLE TX Mode		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Antenna Height cm	Table Degree degree	Comment
1		0.2900	27.96	10.13	38.09	60.52	-22.43	QP		
2		0.2900	20.61	10.13	30.74	50.52	-19.78	AVG		
3		0.5299	34.10	9.70	43.80	56.00	-12.20	QP		
4	*	0.5299	26.04	9.70	35.74	46.00	-10.26	AVG		
5		1.2900	30.21	9.91	40.12	56.00	-15.88	QP		
6		1.2900	19.64	9.91	29.55	46.00	-16.45	AVG		
7		2.9020	25.08	10.29	35.37	56.00	-20.63	QP		
8		2.9020	17.32	10.29	27.61	46.00	-18.39	AVG		
9		5.4620	21.32	10.30	31.62	60.00	-28.38	QP		
10		5.4620	13.17	10.30	23.47	50.00	-26.53	AVG		
11		14.7980	20.68	10.15	30.83	60.00	-29.17	QP		
12		14.7980	12.49	10.15	22.64	50.00	-27.36	AVG		

**Test Result: Pass**

[TestMode: TX]; [Line: Neutral];[Power:AC120V/60Hz]

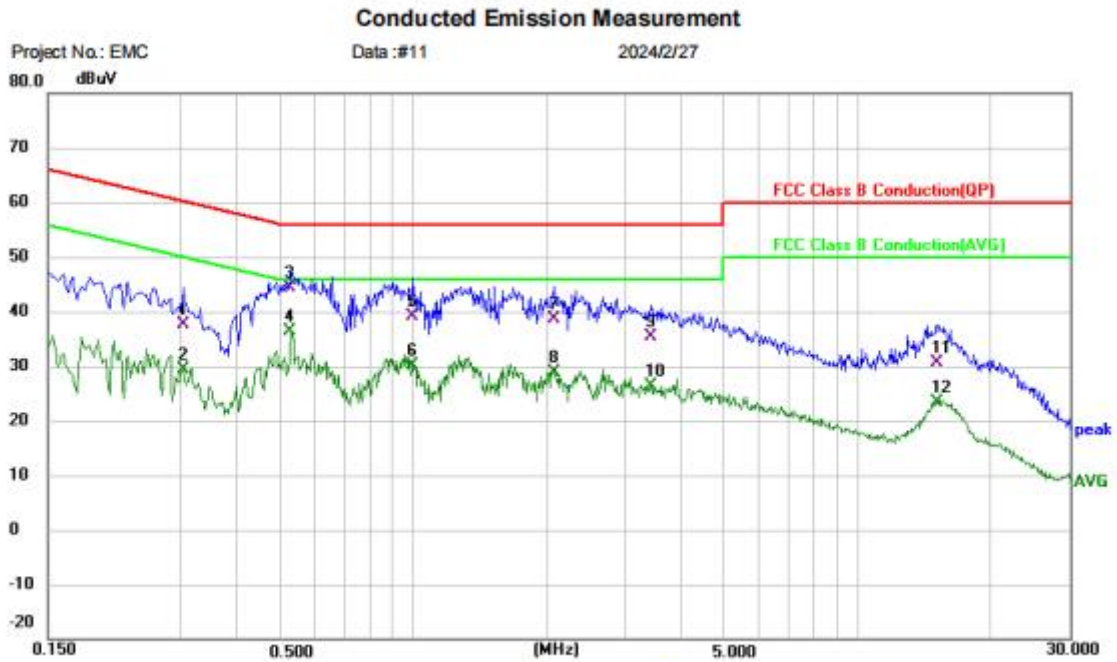

Site	Phase: <b>N</b>	Temperature: (C)
Limit: FCC Class B Conduction(QP)	Power:	Humidity: %RH
EUT:	Distance:	RBW: 9 KHz
M/N:		VBW: 30 KHz
Mode: BLE TX Mode		Sweep Time: 10 ms
Note:		

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1	0.3020	27.81	9.94	37.75	60.19	-22.44	QP			
2	0.3020	19.43	9.94	29.37	50.19	-20.82	AVG			
3	0.5299	34.63	9.68	44.31	56.00	-11.69	QP			
4 *	0.5299	26.75	9.68	36.43	46.00	-9.57	AVG			
5	0.9980	29.31	9.91	39.22	56.00	-16.78	QP			
6	0.9980	20.32	9.91	30.23	46.00	-15.77	AVG			
7	2.0660	28.69	10.06	38.75	56.00	-17.25	QP			
8	2.0660	18.78	10.06	28.84	46.00	-17.16	AVG			
9	3.4300	25.22	10.22	35.44	56.00	-20.56	QP			
10	3.4300	16.19	10.22	26.41	46.00	-19.59	AVG			
11	15.1140	20.48	10.12	30.60	60.00	-29.40	QP			
12	15.1140	13.16	10.12	23.28	50.00	-26.72	AVG			

**Test Result: Pass**


## 12 CONDUCTED BAND EDGES MEASUREMENT

<b>Test Standard</b>	47 CFR Part 15, Subpart C 15.247
<b>Test Method</b>	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2
<b>Test Mode (Pre-Scan)</b>	TX
<b>Test Mode (Final Test)</b>	TX
<b>Tester</b>	Charlie
<b>Temperature</b>	25°C
<b>Humidity</b>	60%

### 12.1 LIMITS

<b>Limit:</b>	<p>In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).</p>
---------------	---

### 12.2 BLOCK DIAGRAM OF TEST SETUP

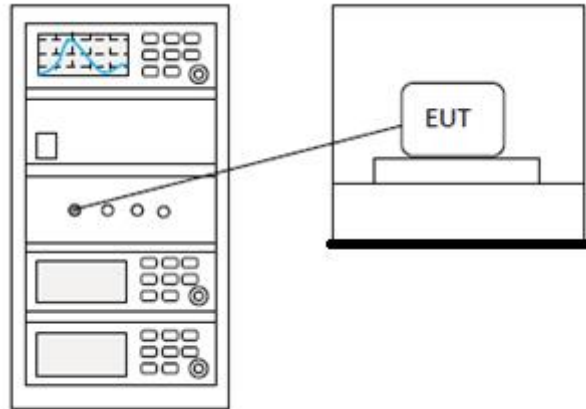

### 12.3 TEST DATA

**Pass: Please Refer To Appendix: Appendix1 For Details**