

MEASUREMENT REPORT

FCC PART 15.247 / ISED RSS-247 Bluetooth-LE

FCC ID: 2AQV6RABBIT
IC: 24210-RABBIT
Applicant: Suzhou Pairlink Network Technology Ltd.
Application Type: Certification
Product: Rabbit Bluetooth 5 BLE module
Model No.: Rabbit-B, Rabbit-C
Brand Name: Pairlink
FCC Classification: Digital Transmission System (DTS)
FCC Rule Part(s): Part15 Subpart C (Section 15.247)
ISED Rule(s): RSS-247 Issue 2, RSS-GEN Issue 5
Test Procedure(s): ANSI C63.10-2013
Test Date: July 19 ~ 26, 2021

Reviewed By:

Sunny Sun

Sunny Sun

Approved By:

Robin Wu

Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2107RSU041-U1	Rev. 01	Initial Report	08-31-2021	Valid

CONTENTS

Description	Page
1. GENERAL INFORMATION.....	5
1.1. Applicant	5
1.2. Manufacturer	5
1.3. Testing Facility	5
1.4. Product Information.....	6
1.5. Radio Specification under Test.....	6
1.6. Working Frequencies for this report	7
1.7. Test Mode	7
1.8. Configuration of Test System	8
1.9. Test System Details.....	8
1.10. Test Software	8
1.11. Test Environment Condition	8
1.12. Duty Cycle.....	9
1.13. EMI Suppression Device(s)/Modifications.....	9
1.14. Labeling Requirements	10
2. ANTENNA REQUIREMENTS	11
3. TEST EQUIPMENT CALIBRATION DATE.....	12
4. MEASUREMENT UNCERTAINTY.....	16
5. TEST RESULT	17
5.1. Summary.....	17
5.2. Occupied Bandwidth Measurement	18
5.2.1. Test Limit.....	18
5.2.2. Test Procedure used	18
5.2.3. Test Setting	18
5.2.4. Test Setup	19
5.2.5. Test Result	20
5.3. Output Power Measurement	23
5.3.1. Test Limit.....	23
5.3.2. Test Procedure Used.....	23
5.3.3. Test Setting	23
5.3.4. Test Setup	24
5.3.5. Test Result	25
5.4. Power Spectral Density Measurement.....	26
5.4.1. Test Limit.....	26
5.4.2. Test Procedure Used.....	26

5.4.3.	Test Setting	26
5.4.4.	Test Setup	26
5.4.5.	Test Result	27
5.5.	Conducted Band Edge and Out-of-Band Emissions	29
5.5.1.	Test Limit	29
5.5.2.	Test Procedure Used.....	29
5.5.3.	Test Setting	29
5.5.4.	Test Setup	30
5.5.5.	Test Result	31
5.6.	Radiated Spurious Emission Measurement.....	34
5.6.1.	Test Limit	34
5.6.2.	Test Procedure Used.....	34
5.6.3.	Test Setting	34
5.6.4.	Test Setup	36
5.6.5.	Test Result	37
5.7.	Radiated Restricted Band Edge Measurement.....	53
5.7.1.	Test Limit	53
5.7.2.	Test Procedure Used.....	56
5.7.3.	Test Setting	56
5.7.4.	Test Setup	57
5.7.5.	Test Result	58
5.8.	AC Conducted Emissions Measurement	90
5.8.1.	Test Limit	90
5.8.2.	Test Setup	90
5.8.3.	Test Result	91
6.	CONCLUSION	93
	Appendix A - Test Setup Photograph.....	94
	Appendix B - EUT Photograph	95

1.4. Product Information

Product Name	Rabbit Bluetooth 5 BLE module
Model No.	Rabbit-B, Rabbit-C
Brand Name	Pairlink
Test Device Serial No.	For Rabbit-B: Radiated: ECC57F614BC4; Conducted: ECC57F619125 For Rabbit-C: Radiated: ECC57F6181F1
Hardware Version	V2
Software Version	V1
Bluetooth Specification	v5.0 single mode, BLE only
Operating Temperature	-40 ~ 85°C
Power Type	DC 1.8V ~ 3.6V
Remarks:	<ol style="list-style-type: none"> The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer. The only difference between Rabbit-B and Rabbit-C is different antenna type and antenna gain.

1.5. Radio Specification under Test

Frequency Range	2402~2480MHz
Channel Number	40
Type of Modulation	GFSK
Data Rate	1Mbps & 2Mbps
Antenna Type	For Rabbit-B: PCB Antenna For Rabbit-C: Dipole Antenna
Antenna Gain	For Rabbit-B: -0.41 dBi For Rabbit-C: 0.30 dBi

1.6. Working Frequencies for this report


Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	01	2404 MHz	02	2406 MHz
03	2408 MHz	04	2410 MHz	05	2412 MHz
06	2414 MHz	07	2416 MHz	08	2418 MHz
09	2420 MHz	10	2422 MHz	11	2424 MHz
12	2426 MHz	13	2428 MHz	14	2430 MHz
15	2432 MHz	16	2434 MHz	17	2436 MHz
18	2438 MHz	19	2440 MHz	20	2442 MHz
21	2444 MHz	22	2446 MHz	23	2448 MHz
24	2450 MHz	25	2452 MHz	26	2454 MHz
27	2456 MHz	28	2458 MHz	29	2460 MHz
30	2462 MHz	31	2464 MHz	32	2466 MHz
33	2468 MHz	34	2470 MHz	35	2472 MHz
36	2474 MHz	37	2476 MHz	38	2478 MHz
39	2480 MHz	--	--	--	--

1.7. Test Mode

Test Mode	Mode 1: Transmit by BLE-1Mbps
	Mode 2: Transmit by BLE-2Mbps

1.8. Configuration of Test System

The measurement procedures and appropriate EUT setup described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) was used in the measurement.

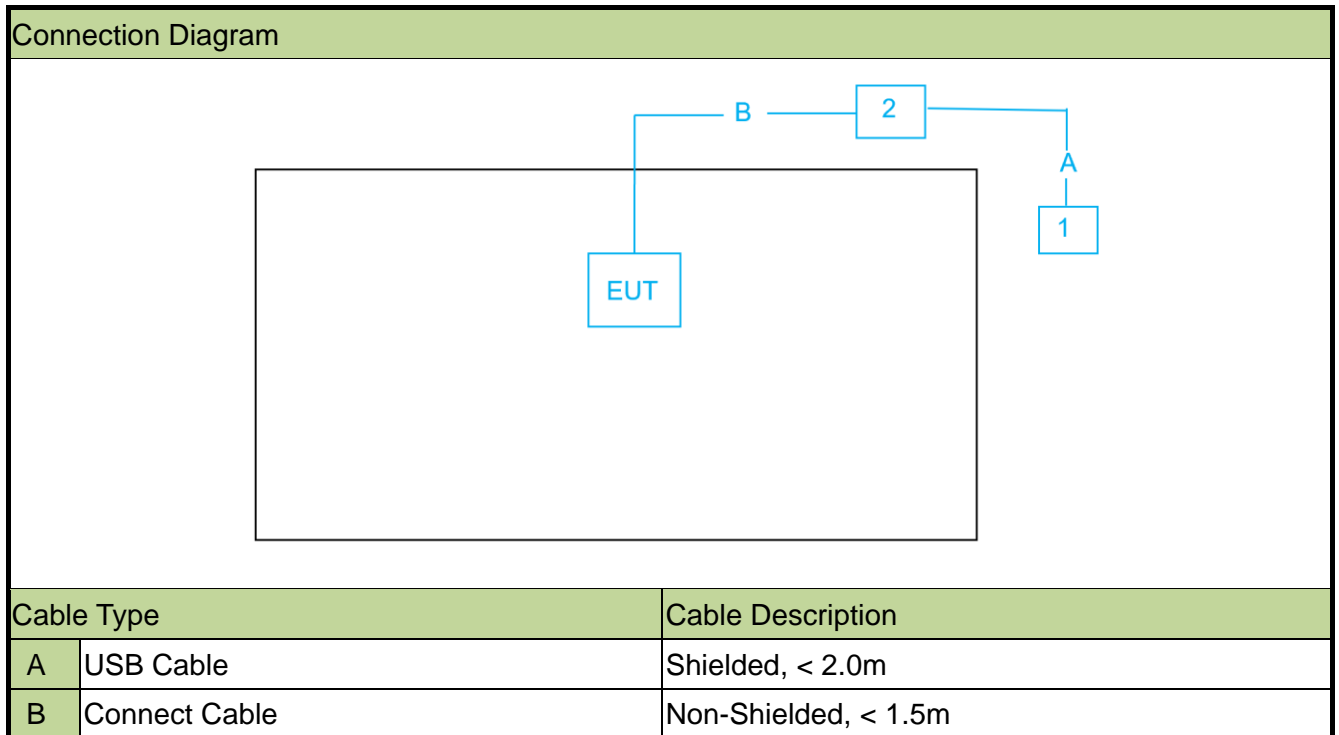

1.9. Test System Details

The types for all equipment and descriptions of all cables used in the test system (including inserted cards) are:

Product	Manufacturer	Model No.
1 Notebook	Lenovo	E495
2 Serial Interface Board	Suzhou Pairlink Network Technology Ltd	FT232RL

1.10. Test Software

The test utility software used during testing was “RTL8762x_RFTTestTool” and version was v1.0.1.7.


1.11. Test Environment Condition

Ambient Temperature	15°C ~ 35°C
Relative Humidity	20%RH ~ 75%RH

1.12. Duty Cycle

Bluetooth-LE (DTS) operation is possible in channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Test Mode	Duty Cycle
Mode 1	100%
Mode 2	100%

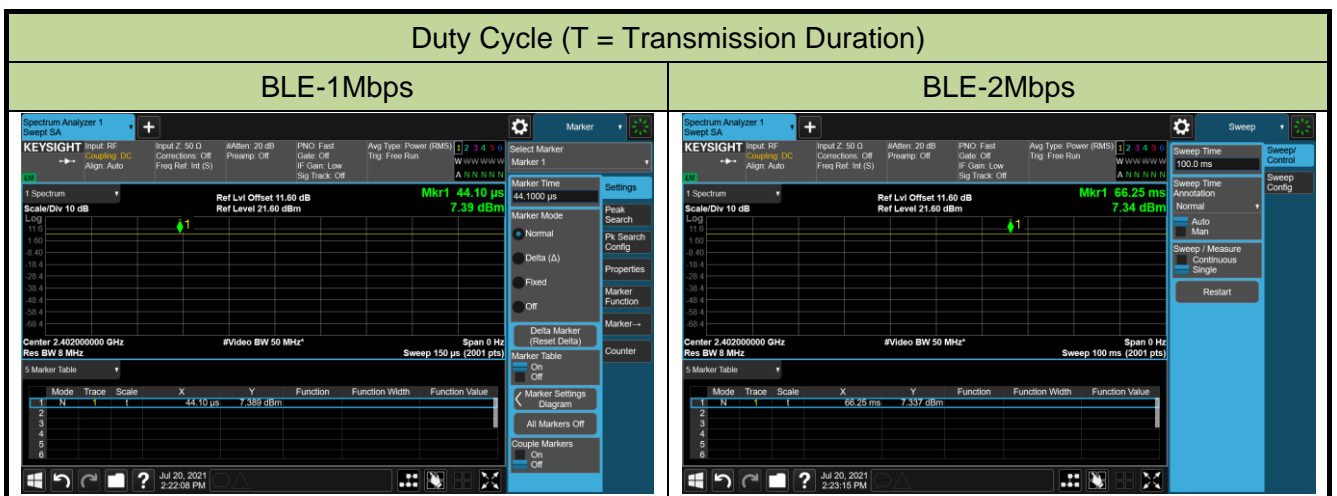

1.13. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

1.14. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase.

However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

RSS-Gen Issue 5 Section 4

In addition to complying with the applicable RSSs and RSP-100, each unit of a product model (i.e. of a radio apparatus) shall meet the labelling requirements set out in this section prior to being marketed in Canada or imported into Canada.

For information regarding the labelling option, see Section 4.1, 4.2, 4.3 4.4. The label for the certified product represents the manufacturer's or importer's compliance with Innovation, Science and Economic Development Canada's (ISED) regulatory requirements.

Please see attachment for IC label and label location.

2. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- There are no provisions for connection to an external antenna.

Conclusion:

The unit complies with the requirement of §15.203.

3. TEST EQUIPMENT CALIBRATION DATE

Conducted Emission (WZ-SR2)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTSUE06185	1 year	2022/01/12
Two-Line V-Network	R&S	ENV216	MRTSUE06002	1 year	2021/09/09
Thermal Hygrometer	testo	608-H1	MRTSUE06404	1 year	2022/06/28
Shielding Room	MIX-BEP	Chamber-SR2	MRTSUE06215	N/A	N/A

Conducted Emission (SIP-SR2)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTSUE06613	1 year	2022/06/24
Two-Line V-Network	R&S	ENV216	MRTSUE06003	1 year	2021/09/09
Thermal Hygrometer	testo	608-H1	MRTSUE06621	1 year	2021/12/03

Radiated Emission (WZ-AC1)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2022/01/04
PXA Signal Analyzer	Keysight	N9030B	MRTSUE06395	1 year	2021/08/30
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2021/11/08
Bilog Period Antenna	Schwarzbeck	VULB 9168	MRTSUE06172	1 year	2021/08/08
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06023	1 year	2021/09/27
Horn Antenna	Schwarzbeck	BBHA9170	MRTSUE06597	1 year	2021/12/14
Microwave System Amplifier	Agilent	83017A	MRTSUE06076	1 year	2021/11/14
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2022/06/09
Thermal Hygrometer	testo	608-H1	MRTSUE06403	1 year	2022/06/28
Anechoic Chamber	TDK	Chamber-AC1	MRTSUE06212	1 year	2022/04/29

Radiated Emission (WZ-AC2)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
MXE EMI Receiver	Keysight	N9038A	MRTSUE06125	1 year	2022/06/24
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2021/11/08
Bilog Period Antenna	Schwarzbeck	VULB 9162	MRTSUE06022	1 year	2022/05/24
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06171	1 year	2021/10/25
Horn Antenna	Schwarzbeck	BBHA9170	MRTSUE06597	1 year	2021/12/14
Broadband Coaxial Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06176	1 year	2021/11/14
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2022/06/09
Thermal Hygrometer	Minggao	ETH529	MRTSUE06170	1 year	2021/12/08
Anechoic Chamber	RIKEN	Chamber-AC2	MRTSUE06213	1 year	2022/04/29

Radiated Emission (SIP-AC1)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTSUE06612	1 year	2022/06/24
EXA Signal Analyzer	Keysight	N9010B	MRTSUE06559	1 year	2022/06/24
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2021/11/08
Bilog Period Antenna	Schwarzbeck	VULB9168	MRTSUE06645	1 year	2021/08/30
Double Ridged Horn Antenna	R&S	HF907	MRTSUE06610	1 year	2021/08/30
Preamplifier	EMCI	EMC051845SE	MRTSUE06600	1 year	2021/11/12
Thermal Hygrometer	testo	608-H1	MRTSUE06620	1 year	2021/12/03
Anechoic Chamber	RIKEN	SIP-AC1	MRTSUE06554	1 year	2021/12/24

Radiated Emission (SIP-AC2)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTSUE06613	1 year	2022/06/24
MXA Signal Analyzer	Keysight	N9020B	MRTSUE06604	1 year	2021/09/26
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2021/11/08
Bilog Period Antenna	Schwarzbeck	VULB9168	MRTSUE06646	1 year	2021/08/30
Horn Antenna	Schwarzbeck	BBHA9120D	MRTSUE06648	1 year	2021/11/26
Horn Antenna	Schwarzbeck	BBHA9170	MRTSUE06599	1 year	2021/11/26
Preamplifier	EMCI	EMC051845SE	MRTSUE06644	1 year	2021/11/12
Preamplifier	EMCI	EMC184045SE	MRTSUE06602	1 year	2021/10/13
Thermal Hygrometer	testo	608-H1	MRTSUE06624	1 year	2021/12/03
Anechoic Chamber	RIKEN	SIP-AC2	MRTSUE06781	1 year	2021/12/24

Radiated Emission (SIP-AC3)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTSUE06612	1 year	2022/06/24
EXA Signal Analyzer	Keysight	N9010B	MRTSUE06559	1 year	2022/06/24
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2021/11/08
Bilog Period Antenna	Schwarzbeck	VULB9168	MRTSUE06647	1 year	2021/08/08
Double Ridged Horn Antenna	R&S	HF907	MRTSUE06611	1 year	2021/09/13
Horn Antenna	Schwarzbeck	BBHA9170	MRTSUE06598	1 year	2021/11/26
Preamplifier	EMCI	EMC012645SE	MRTSUE06642	1 year	2022/01/14
Preamplifier	EMCI	EMC184045SE	MRTSUE06641	1 year	2022/01/14
Thermal Hygrometer	testo	608-H1	MRTSUE06622	1 year	2021/12/03
Anechoic Chamber	RIKEN	SIP-AC3	MRTSUE06782	1 year	2021/12/24

Conducted Test Equipment (WZ-TR3)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	Agilent	N9020A	MRTSUE06106	1 year	2022/04/13
EXA Signal Analyzer	Keysight	N9010B	MRTSUE06607	1 year	2022/01/07
Signal Analyzer	R&S	FSV40	MRTSUE06218	1 year	2022/04/13
Power Meter	Agilent	U2021XA	MRTSUE06030	1 year	2021/10/22
USB wideband power sensor	Keysight	U2021XA	MRTSUE06446	1 year	2021/08/30
USB wideband power sensor	Keysight	U2021XA	MRTSUE06447	1 year	2021/08/08
Bluetooth Test Set	Anritsu	MT8852B-042	MRTSUE06389	1 year	2022/06/08
Audio Analyzer	Agilent	U8903B	MRTSUE06143	1 year	2022/05/19
Modulation Analyzer	HP	HP8901A	MRTSUE06098	1 year	2021/09/26
Wideband Radio Communication Tester	R&S	CMW 500	MRTSUE06243	1 year	2021/10/20
Attenuator	MVE	3dB	MRTSUE06529	1 year	2021/12/12
Attenuator	MVE	6dB	MRTSUE06534	1 year	2021/12/12
Attenuator	MVE	10dB	MRTSUE06540	1 year	2021/12/12
Attenuator	MVE	20dB	MRTSUE06547	1 year	2021/12/12
DC Power Supply	GWINSTEK	DPS-3303C	MRTSUE06064	N/A	N/A
Temperature & Humidity Chamber	BAOYT	BYH-150CL	MRTSUE06051	1 year	2021/10/22
Thermal Hygrometer	testo	608-H1	MRTSUE06401	1 year	2022/06/28

Conducted Test Equipment (SIP-SR5)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Signal Analyzer	R&S	FSV40	MRTSUE06218	1 year	2022/04/13
PXA Signal Analyzer	Keysight	N9030B	MRTSUE06395	1 year	2021/08/30
USB wideband power sensor	Agilent	U2021XA	MRTSUE06595	1 year	2021/09/26
USB wideband power sensor	Agilent	U2021XA	MRTSUE06596	1 year	2021/09/26
Wideband Radio Communication Tester	R&S	CMW 500	MRTSUE06243	1 year	2021/10/20
Bluetooth Test Set	Anritsu	MT8852B-042	MRTSUE06389	1 year	2022/06/08
Attenuator	MVE	3dB	MRTSUE06530	1 year	2021/12/12
Attenuator	MVE	6dB	MRTSUE06535	1 year	2021/12/12
Attenuator	MVE	10dB	MRTSUE06541	1 year	2021/12/12
Attenuator	MVE	20dB	MRTSUE06548	1 year	2021/12/12
Temperature Chamber	BAOYT	BYG-408CS	MRTSUE06847	1 year	2022/02/23
Thermal Hygrometer	testo	622	MRTSUE06629	1 year	2021/11/25

Software	Version	Function
EMI Software	V3	EMI Test Software

4. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

Conducted Emission Measurement
Measurement Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 9kHz~150kHz: 3.74dB 150kHz~30MHz: 3.44dB
Radiated Disturbance
Measurement Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): Horizontal: 9KHz~300MHz: 5.04dB 300MHz~1GHz: 4.95dB 1GHz~6GHz: 6.40dB Vertical: 9KHz~300MHz: 5.24dB 300MHz~1GHz: 6.03dB 1GHz~40GHz: 6.40dB
Spurious Emissions, Conducted
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 0.78dB
Output Power
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 1.13dB
Power Spectrum Density
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 1.15dB
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 0.28%

5. TEST RESULT

5.1. Summary

FCC Section(s)	ISED Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(2)	RSS-247 [5.2]	6dB Bandwidth	$\geq 500\text{kHz}$	Conducted	Pass	Section 5.2
N/A	RSS-Gen [6.7]	99% Bandwidth	N/A		Pass	
15.247(b)(3)	RSS-247 [5.4(d)]	Output Power	$\leq 1\text{Watt (30dBm)}$ & $\text{EIRP} \leq 4\text{Watt (36dBm)}$		Pass	Section 5.3
15.247(e)	RSS-247 [5.2]	Power Spectral Density	$\leq 8\text{dBm/3kHz}$		Pass	Section 5.4
15.247(d)	RSS-247 [5.5]	Band Edge / Out-of-Band Emissions	20dBc		Pass	Section 5.5
15.205 15.209	RSS-247 [5.5]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	Radiated	Pass	Section 5.6 & 5.7
15.207	RSS-Gen [8.8]	AC Conducted Emissions 150kHz - 30MHz	$< \text{FCC 15.207 limits}$	Line Conducted	Pass	Section 5.8

Notes:

- 1) For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) Except the different antennas between Rabbit-B and Rabbit-C, the power setting and RF specifications are all the same, we performed all conducted test items for Rabbit-B. Radiated spurious emission are conducted for both models.

5.2. Occupied Bandwidth Measurement

5.2.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.

5.2.2. Test Procedure used

ANSI C63.10-2013 - Section 11.8 (6dB bandwidth)

ANSI C63.10-2013 - Section 6.9.3 (99% bandwidth)

5.2.3. Test Setting


For 6dB bandwidth

1. The Spectrum's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. Set RBW = 100 kHz
3. $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = Max hold
6. Sweep = Auto couple
7. Allow the trace was allowed to stabilize

For 99% bandwidth

1. Span = 1.5 times to 5 times the OBW
2. Set RBW = 1% to 5% the OBW
3. $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = Max hold
6. Sweep = Auto couple
7. Allow the trace was allowed to stabilize


5.2.4. Test Setup

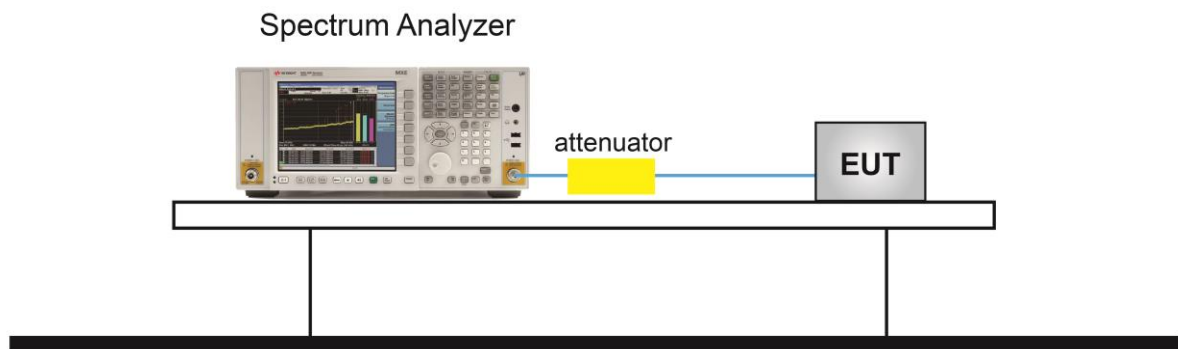


5.2.5. Test Result

Test Site	WZ-TR3	Test Engineer	Luis Yang
Test Date	2021/07/20 ~ 2021/07/24		


Test Mode	Channel No.	Frequency (MHz)	6dB Bandwidth (kHz)	Limit (kHz)	99% Bandwidth (kHz)	Result
Mode 1	00	2402	678.3	≥ 500	1039.0	Pass
	19	2440	686.7	≥ 500	1045.5	Pass
	39	2480	699.2	≥ 500	1048.1	Pass
Mode 2	00	2402	1335.0	≥ 500	2066.9	Pass
	19	2440	1367.0	≥ 500	2083.3	Pass
	39	2480	1371.0	≥ 500	2081.8	Pass

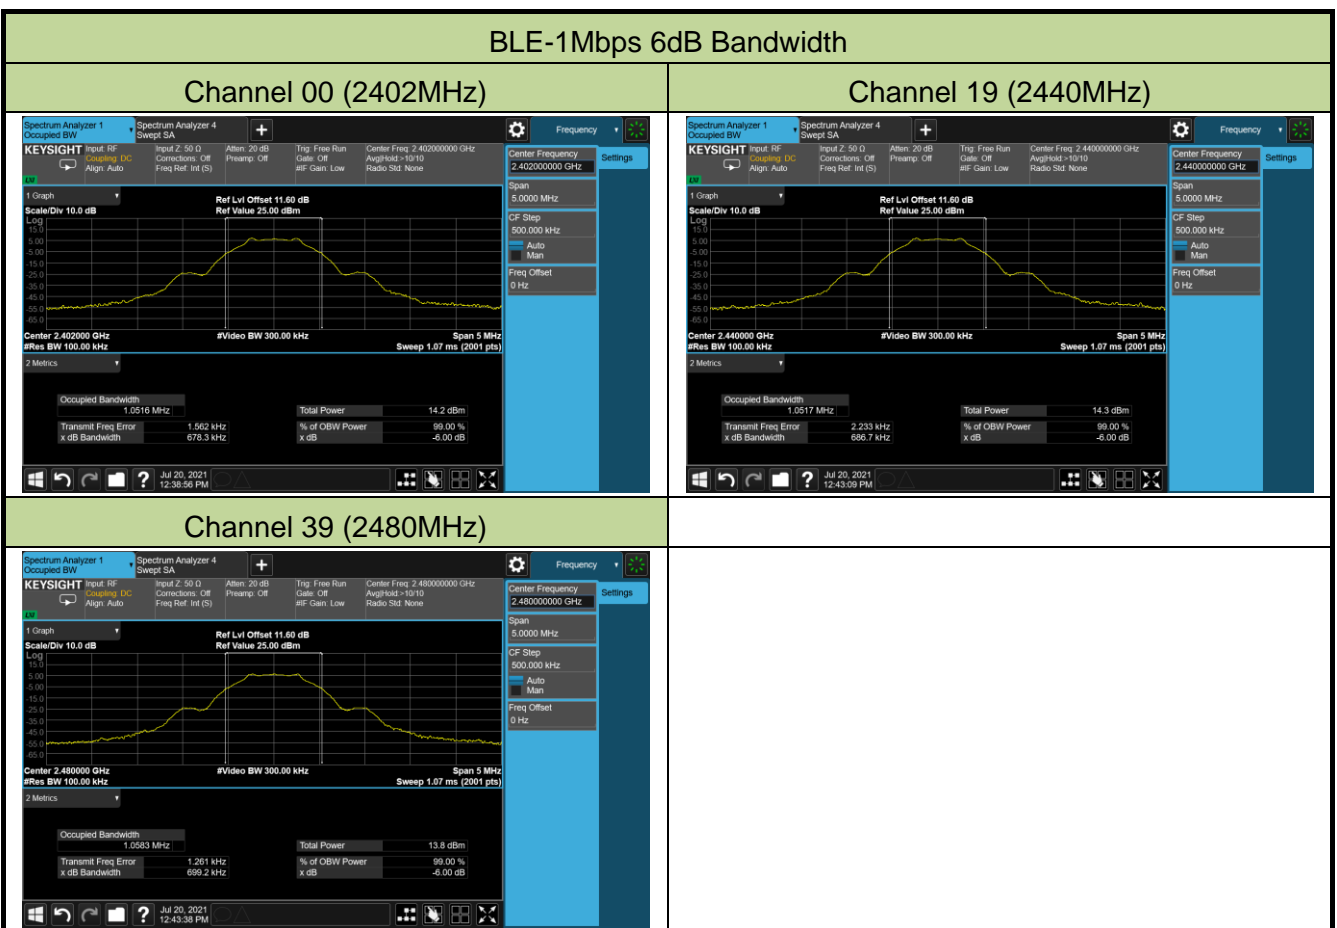

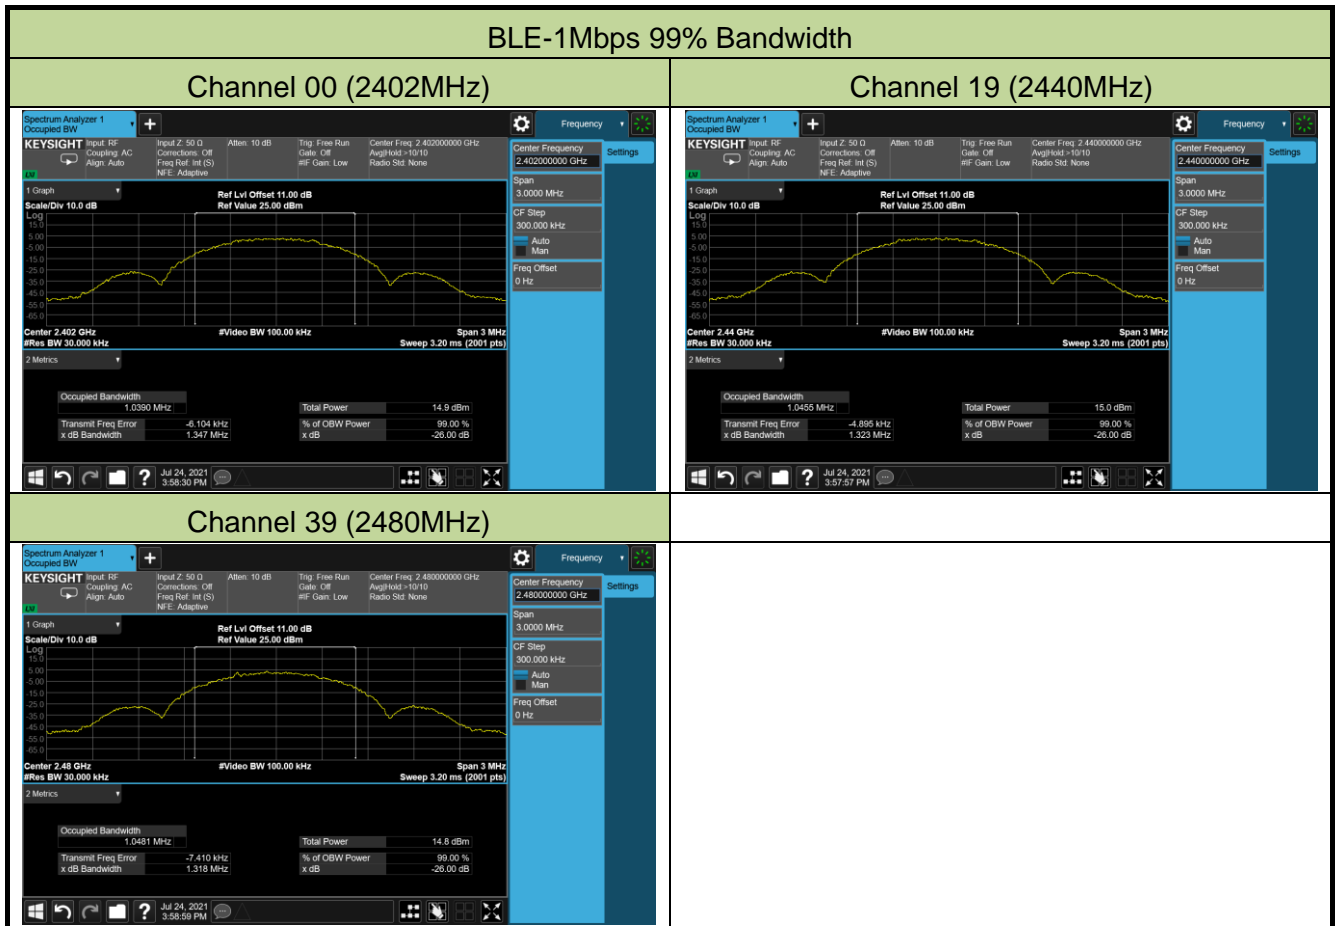


BLE-2Mbps 6dB Bandwidth

Channel 00 (2402MHz)

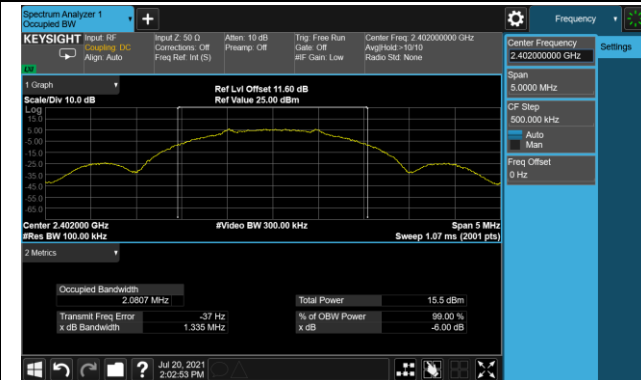

Channel 19 (2440MHz)

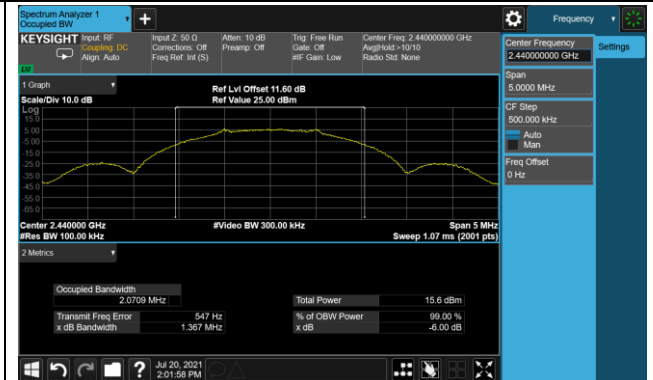


Channel 39 (2480MHz)



BLE-2Mbps 99% Bandwidth

Channel 00 (2402MHz)

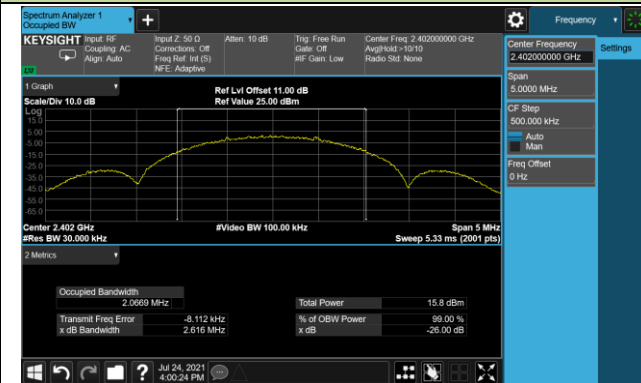

Channel 19 (2440MHz)



Channel 39 (2480MHz)



5.3. Output Power Measurement

5.3.1. Test Limit

The maximum out power shall be less 1 Watt (30dBm) and the E.I.R.P shall not exceed 4 Watt (36dBm).

The conducted output power limit specified in paragraph FCC Part 15.247(b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs FCC Part 15.247(b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.3.2. Test Procedure Used

ANSI C63.10-2013 - Section 11.9.1.3 PKPM1 Peak-reading power meter method

ANSI C63.10-2013 - Section 11.9.2.3.2 Method AVGPM-G

5.3.3. Test Setting


Method PKPM1 (Peak power measurement)

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a VBW = 50MHz so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.

Method AVGPM-G (Measurement using a gated RF average-reading power meter)

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since this measurement is made only during the ON time of the transmitter, no duty cycle correction is required.

5.3.4. Test Setup

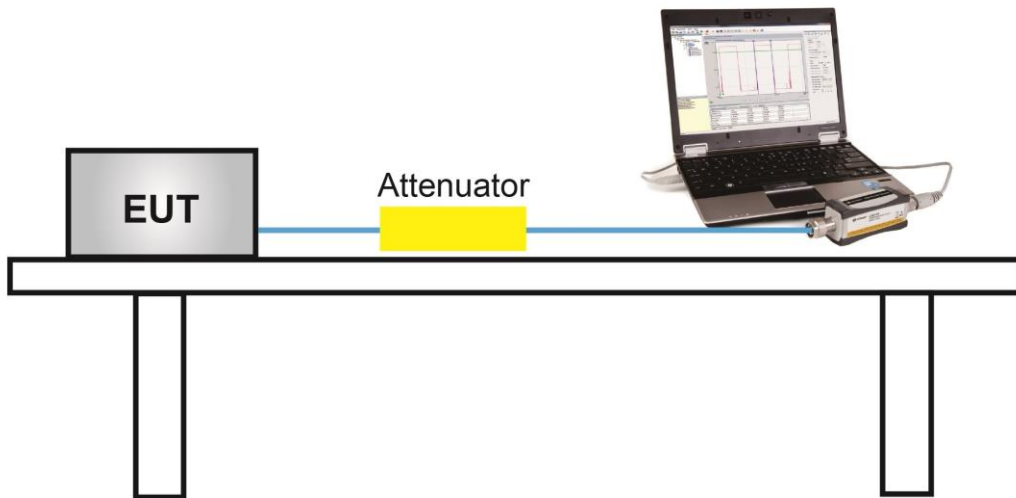

5.3.5. Test Result

Test Site	WZ-TR3	Test Engineer	Luis Yang
Test Date	2021/07/19 ~ 2021/07/20		

Test Mode	Channel No.	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Max EIRP (dBm)	EIRP Limit (dBm)	Result
Peak Output Power							
Mode 1	00	2402	7.28	≤ 30.00	7.58	≤ 36.00	Pass
	19	2440	7.25	≤ 30.00	7.55	≤ 36.00	Pass
	39	2480	7.19	≤ 30.00	7.49	≤ 36.00	Pass
Mode 2	00	2402	7.26	≤ 30.00	7.56	≤ 36.00	Pass
	19	2440	7.23	≤ 30.00	7.53	≤ 36.00	Pass
	39	2480	7.18	≤ 30.00	7.48	≤ 36.00	Pass
Average Output Power							
Mode 1	00	2402	7.23	≤ 30.00	7.53	≤ 36.00	Pass
	19	2440	7.19	≤ 30.00	7.49	≤ 36.00	Pass
	39	2480	7.12	≤ 30.00	7.42	≤ 36.00	Pass
Mode 2	00	2402	7.20	≤ 30.00	7.50	≤ 36.00	Pass
	19	2440	7.16	≤ 30.00	7.46	≤ 36.00	Pass
	39	2480	7.08	≤ 30.00	7.38	≤ 36.00	Pass

Note:

1. Max EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi), Antenna Gain = 0.30 dBi.
2. We calculated the EIRP by plus maximum antenna gain.

5.4. Power Spectral Density Measurement

5.4.1. Test Limit

The maximum permissible power spectral density is 8dBm in any 3 kHz band.

The same method of determining the conducted output power shall be used to determine the power spectral density.


5.4.2. Test Procedure Used

ANSI C63.10-2013 - Section 11.10.2.

5.4.3. Test Setting

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 3kHz
4. VBW = 10kHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize


5.4.4. Test Setup

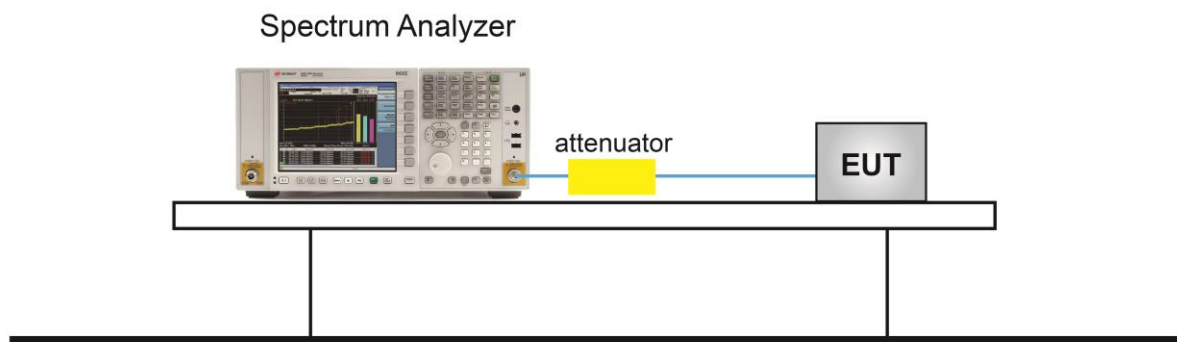


5.4.5. Test Result

Test Site	WZ-TR3	Test Engineer	Luis Yang
Test Date	2021/07/20		

Test Mode	Channel No.	Frequency (MHz)	PSD Result (dBm / 3kHz)	Limit (dBm / 3kHz)	Result
Mode 1	00	2402	-4.06	≤ 8.00	Pass
	19	2440	-3.57	≤ 8.00	Pass
	39	2480	-3.81	≤ 8.00	Pass
Mode 2	00	2402	-7.02	≤ 8.00	Pass
	19	2440	-6.96	≤ 8.00	Pass
	39	2480	-7.32	≤ 8.00	Pass

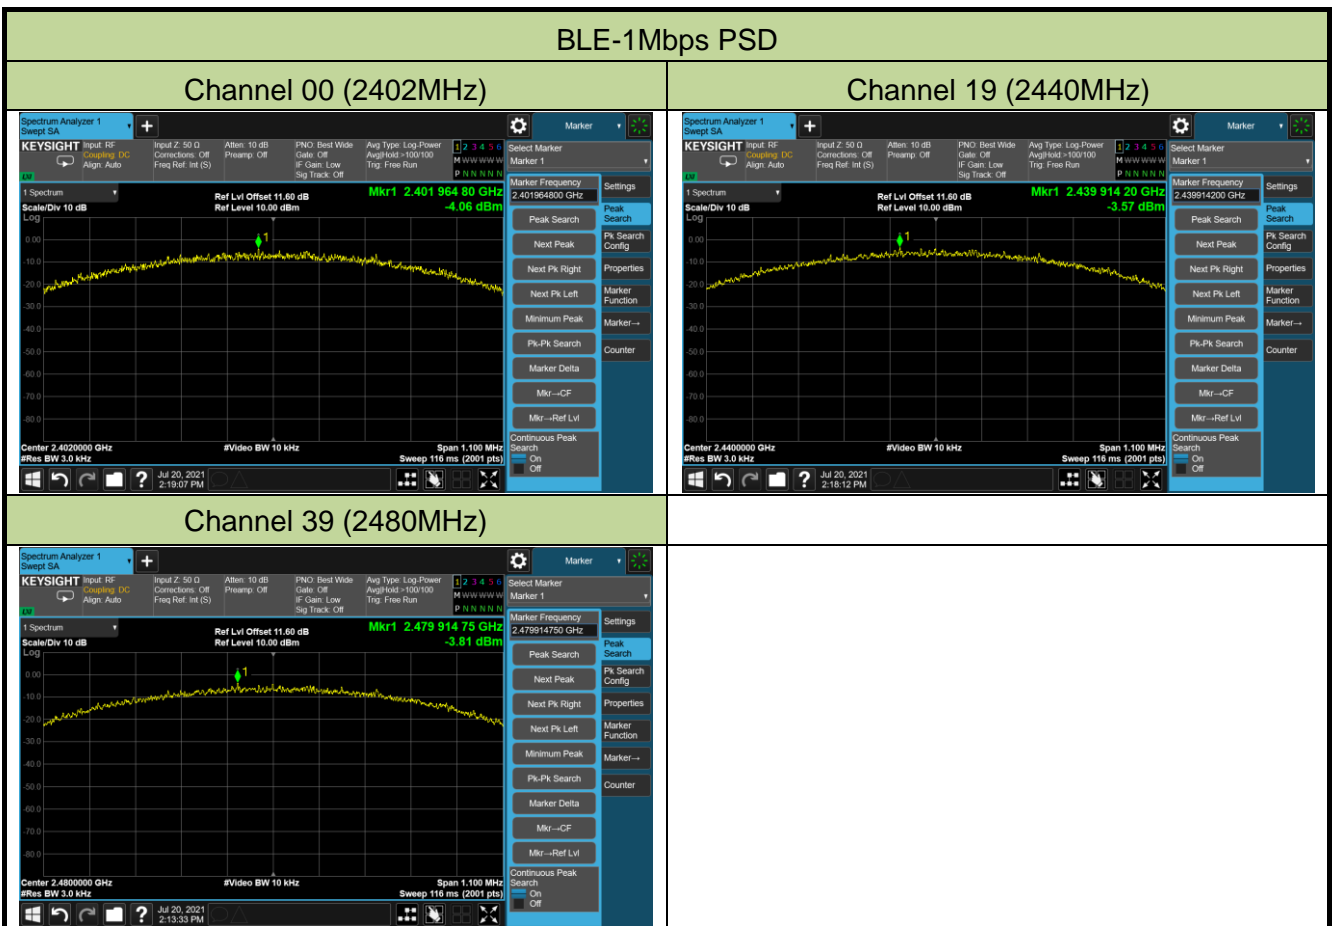

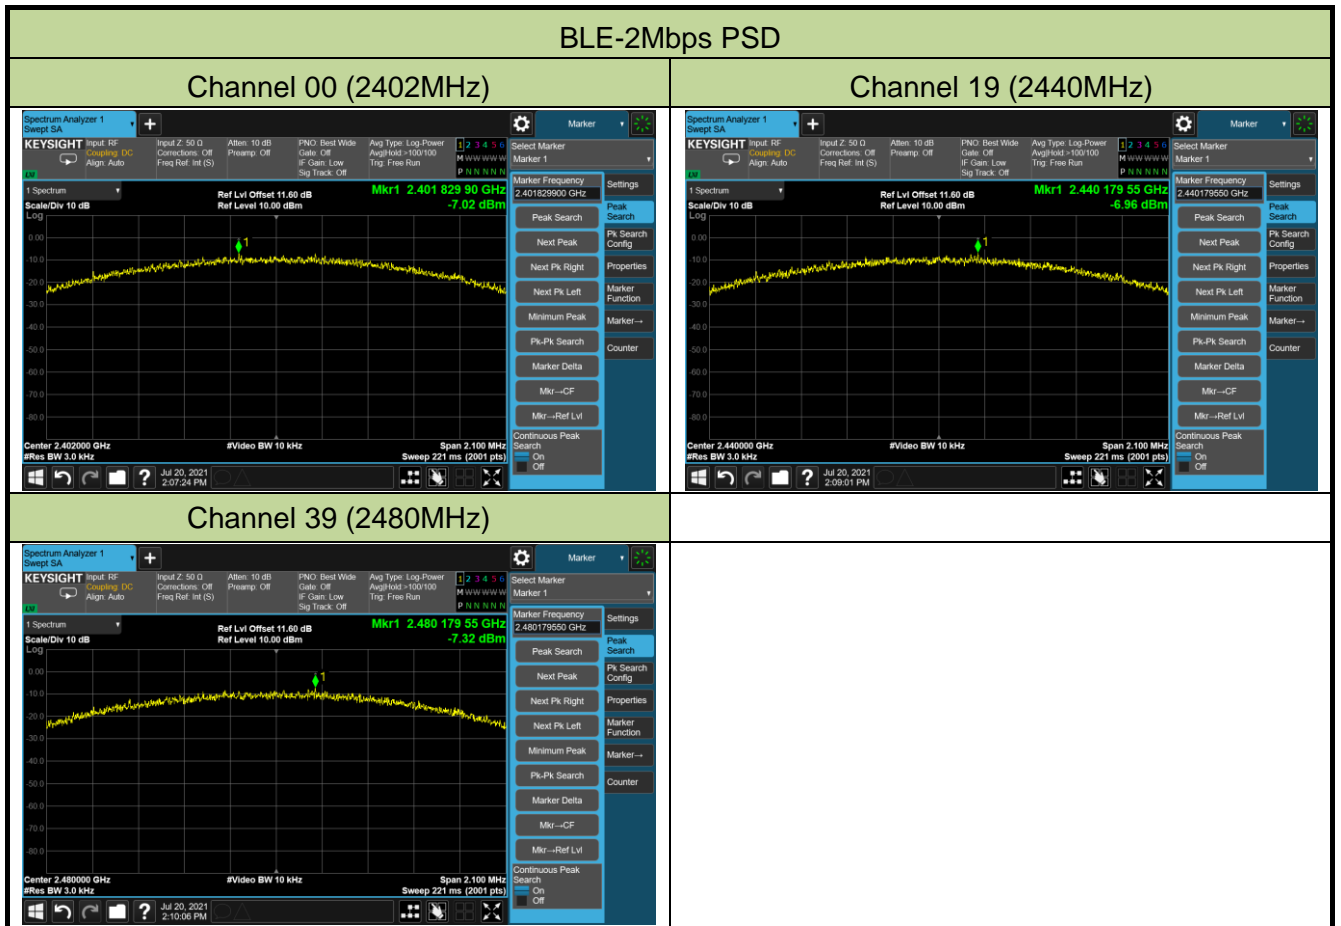

5.5. Conducted Band Edge and Out-of-Band Emissions

5.5.1. Test Limit

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth per the PSD procedure.

5.5.2. Test Procedure Used

ANSI C63.10-2013 - Section 11.11.2 & 11.11.3.

5.5.3. Test Setting


Reference level measurement

1. Set instrument center frequency to DTS channel center frequency
2. Set the span to ≥ 1.5 times the DTS bandwidth
3. Set the RBW = 100 kHz
4. Set the VBW $\geq 3 \times$ RBW
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Allow trace to fully stabilize

Emission level measurement

1. Set the center frequency and span to encompass frequency range to be measured
2. RBW = 100KHz
3. VBW = 300KHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

5.5.4. Test Setup

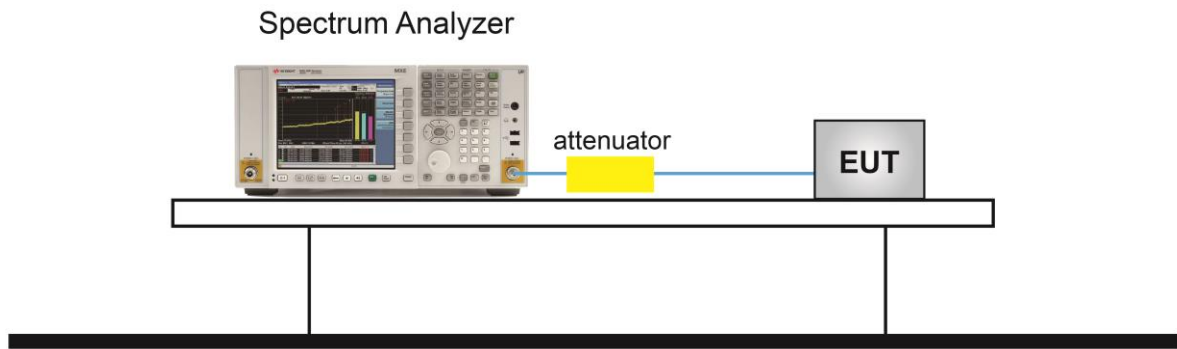

5.5.5. Test Result


Test Site	WZ-TR3	Test Engineer	Luis Yang
Test Date	2021/07/20		

Test Mode	Channel No.	Frequency (MHz)	Limit (dBc)	Result
Mode 1	00	2402	20	Pass
	19	2440	20	Pass
	39	2480	20	Pass
Mode 2	00	2402	20	Pass
	19	2440	20	Pass
	39	2480	20	Pass


BLE-1Mbps Out-of-Band Emissions

Channel 00 (2402MHz)

Low Band Edge

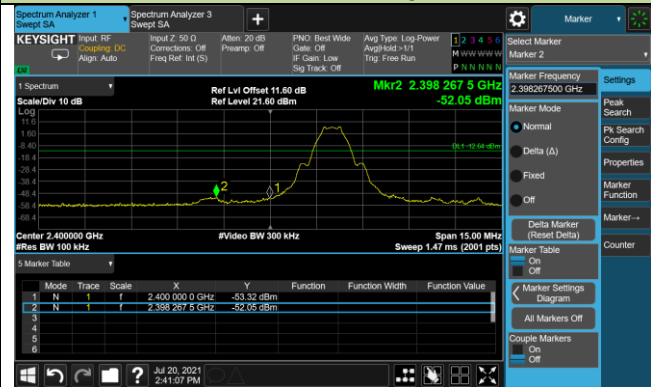


Spurious Emission 30MHz ~ 25GHz

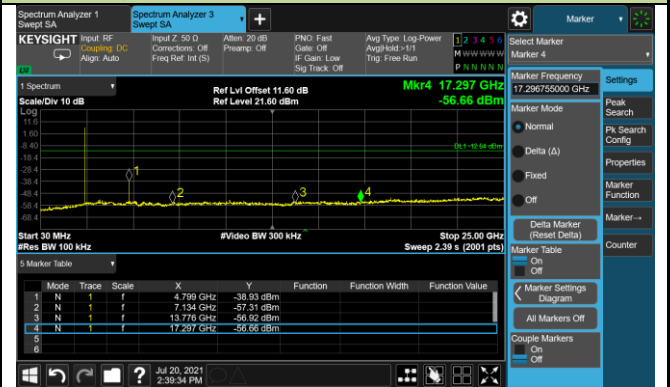


Channel 19 (2440MHz)

100kHz PSD Reference Level

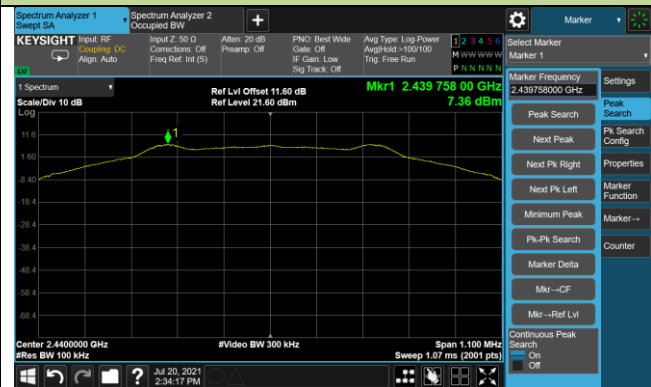


Spurious Emission 30MHz ~ 25GHz

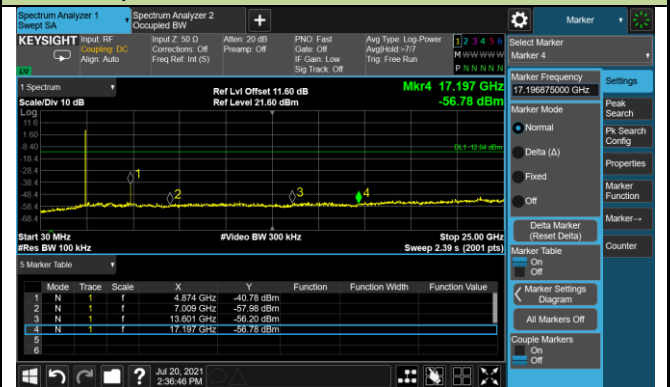


Channel 39 (2480MHz)

High Band Edge

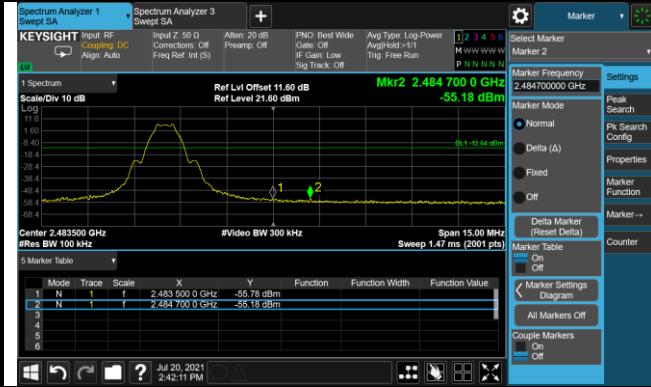


Spurious Emission 30MHz ~ 25GHz

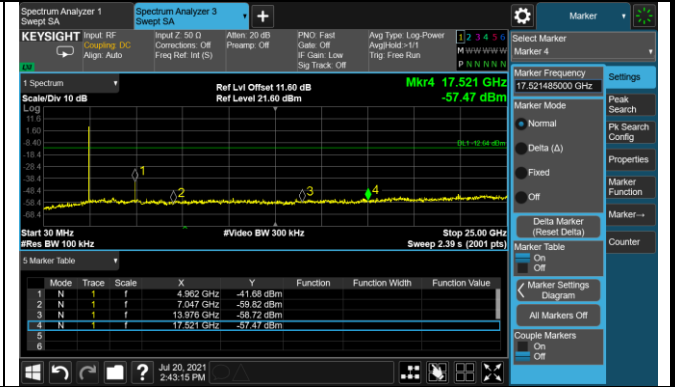


BLE-2Mbps Out-of-Band Emissions

Channel 00 (2402MHz)

Low Band Edge

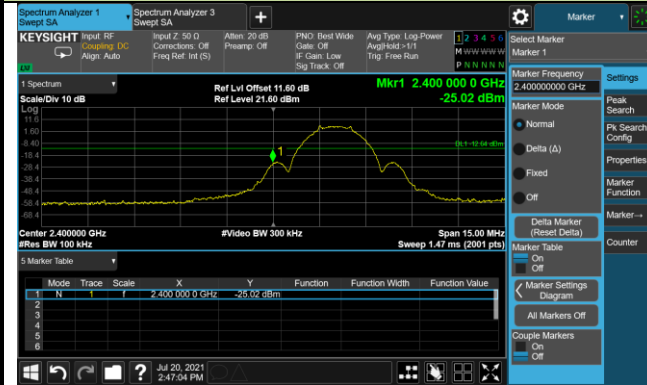


Spurious Emission 30MHz ~ 25GHz

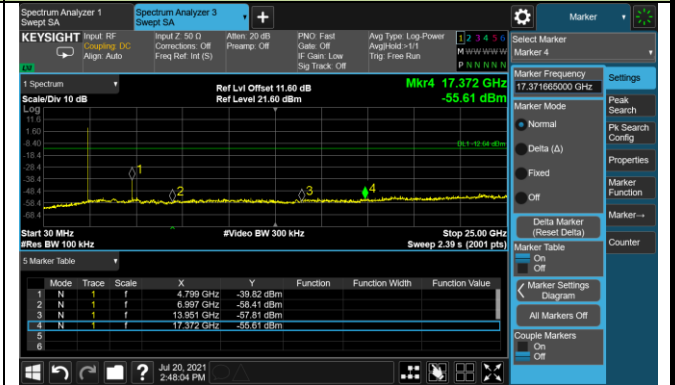

Channel 19 (2440MHz)

Spurious Emission 30MHz ~ 25GHz

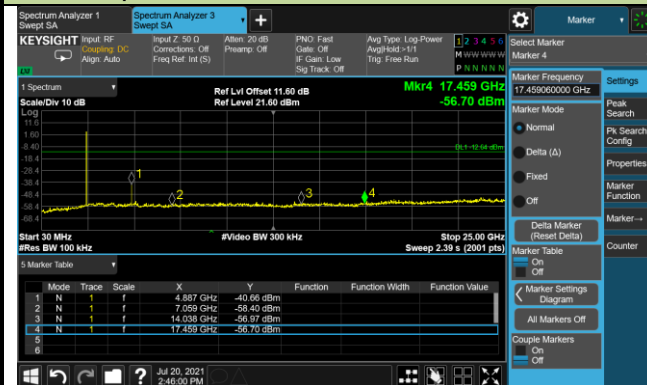


Channel 39 (2480MHz)

High Band Edge



Spurious Emission 30MHz ~ 25GHz

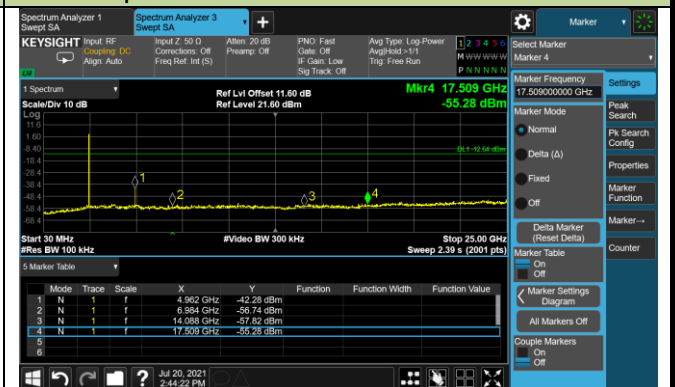

5.6. Radiated Spurious Emission Measurement

5.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209 & RSS-Gen Section 8.9		
Frequency [MHz]	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

5.6.2. Test Procedure Used

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

5.6.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

5.6.4. Test Setup

Below 1GHz Test Setup:

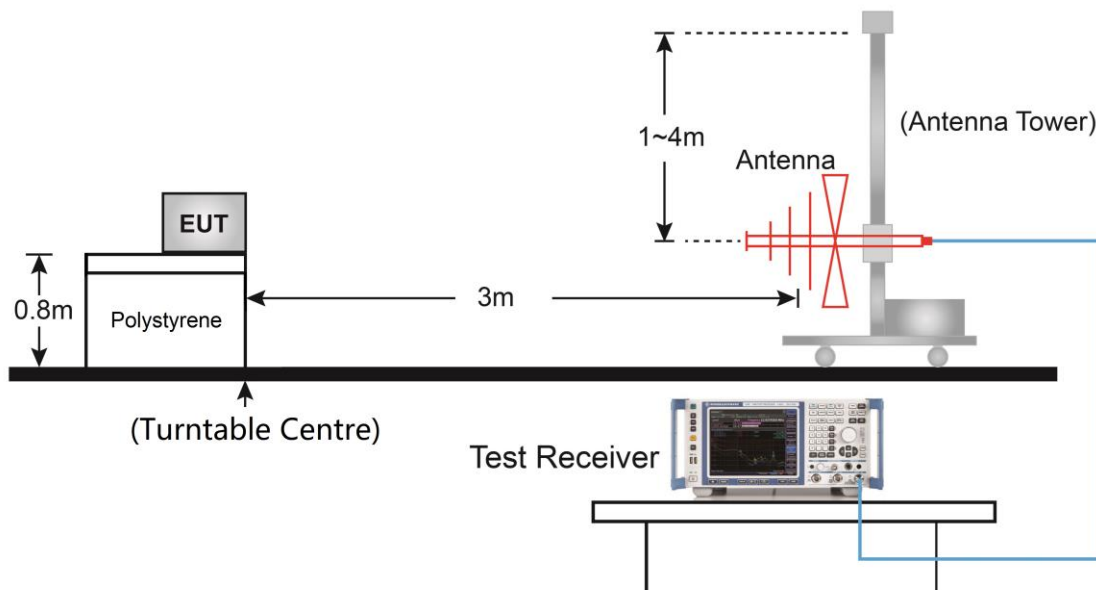

Above 1GHz Test Setup:

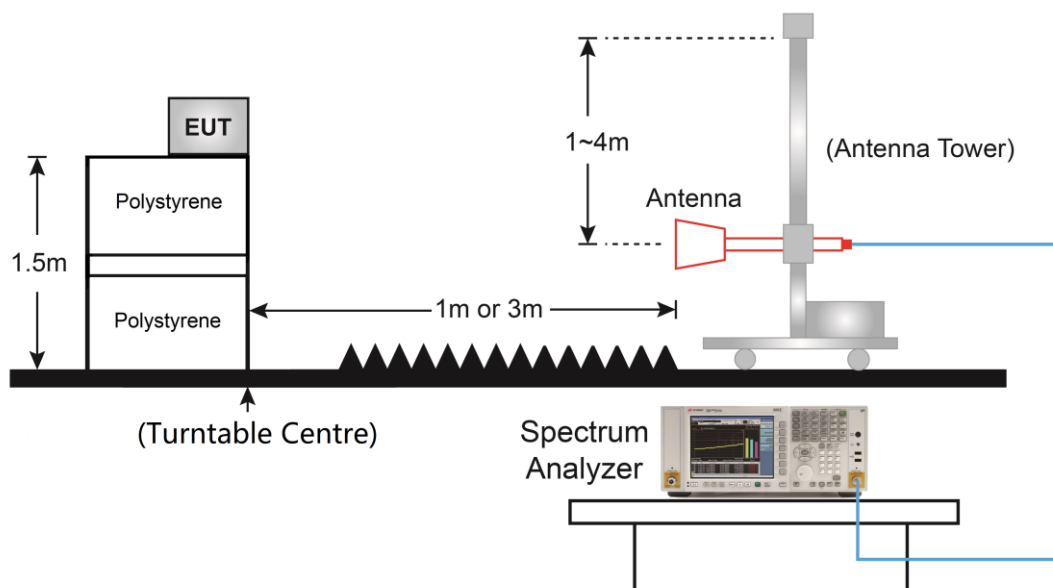

5.6.5. Test Result

Test Site	WZ-AC2	Test Engineer	Messiah Li
Test Date	2021/07/20	Test Channel	00
Test Model	Rabbit-B	Test Mode	Mode 1
Note	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	4808.0	38.1	4.5	42.6	74.0	-31.4	Peak	Horizontal
	8335.5	35.0	12.2	47.2	74.0	-26.8	Peak	Horizontal
	11268.0	33.2	18.8	52.0	74.0	-22.0	Peak	Horizontal
	4791.0	36.1	4.5	40.6	74.0	-33.4	Peak	Vertical
	8327.0	33.3	12.2	45.5	74.0	-28.5	Peak	Vertical
	10902.5	33.5	17.8	51.3	74.0	-22.7	Peak	Vertical

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Messiah Li
Test Date	2021/07/20	Test Channel	19
Test Model	Rabbit-B	Test Mode	Mode 1
Note	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	4884.5	38.2	4.4	42.6	74.0	-31.4	Peak	Horizontal
	7324.0	37.1	12.1	49.2	74.0	-24.8	Peak	Horizontal
	10860.0	33.6	17.9	51.5	74.0	-22.5	Peak	Horizontal
	4884.5	38.1	4.4	42.5	74.0	-31.5	Peak	Vertical
	7434.5	32.6	12.4	45.0	74.0	-29.0	Peak	Vertical
	11208.5	32.6	18.8	51.4	74.0	-22.6	Peak	Vertical

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Messiah Li
Test Date	2021/07/20	Test Channel	39
Test Model	Rabbit-B	Test Mode	Mode 1
Note	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	4961.0	39.6	4.5	44.1	74.0	-29.9	Peak	Horizontal
	7434.5	33.7	12.4	46.1	74.0	-27.9	Peak	Horizontal
	11268.0	33.0	18.8	51.8	74.0	-22.2	Peak	Horizontal
	4961.0	37.4	4.5	41.9	74.0	-32.1	Peak	Vertical
	7545.0	33.9	12.1	46.0	74.0	-28.0	Peak	Vertical
	11217.0	32.8	18.7	51.5	74.0	-22.5	Peak	Vertical

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Messiah Li
Test Date	2021/07/20	Test Channel	00
Test Model	Rabbit-B	Test Mode	Mode 2
Note	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	4808.0	40.8	4.5	45.3	74.0	-28.7	Peak	Horizontal
	8284.5	34.1	11.8	45.9	74.0	-28.1	Peak	Horizontal
	10885.5	33.2	17.8	51.0	74.0	-23.0	Peak	Horizontal
	4859.0	35.6	4.5	40.1	74.0	-33.9	Peak	Vertical
	7596.0	34.0	12.1	46.1	74.0	-27.9	Peak	Vertical
	10860.0	33.3	17.9	51.2	74.0	-22.8	Peak	Vertical

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Messiah Li
Test Date	2021/07/20	Test Channel	19
Test Model	Rabbit-B	Test Mode	Mode 2
Note	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	4952.5	35.8	4.5	40.3	74.0	-33.7	Peak	Horizontal
	7400.5	32.4	12.3	44.7	74.0	-29.3	Peak	Horizontal
	11642.0	32.3	19.7	52.0	74.0	-22.0	Peak	Horizontal
	4884.5	37.0	4.4	41.4	74.0	-32.6	Peak	Vertical
	7570.5	34.5	12.3	46.8	74.0	-27.2	Peak	Vertical
	11004.5	33.5	17.8	51.3	74.0	-22.7	Peak	Vertical

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Messiah Li
Test Date	2021/07/20	Test Channel	39
Test Model	Rabbit-B	Test Mode	Mode 2
Note	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	4961.0	41.7	4.5	46.2	74.0	-27.8	Peak	Horizontal
	7451.5	33.9	12.1	46.0	74.0	-28.0	Peak	Horizontal
	11412.5	32.6	18.5	51.1	74.0	-22.9	Peak	Horizontal
	4961.0	36.3	4.5	40.8	74.0	-33.2	Peak	Vertical
	7587.5	33.9	12.2	46.1	74.0	-27.9	Peak	Vertical
	11633.5	32.5	19.5	52.0	74.0	-22.0	Peak	Vertical

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Messiah Li
Test Date	2021/07/26	Test Channel	00
Test Model	Rabbit-C	Test Mode	Mode 1
Note	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	3975.0	39.5	1.1	40.6	74.0	-33.4	Peak	Horizontal
	4808.0	43.9	3.5	47.4	74.0	-26.6	Peak	Horizontal
	7460.0	38.8	8.5	47.3	74.0	-26.7	Peak	Horizontal
	4102.5	40.2	1.5	41.7	74.0	-32.3	Peak	Vertical
	4799.5	51.1	3.5	54.6	74.0	-19.4	Peak	Vertical
	4799.5	48.3	3.5	51.8	54.0	-2.2	Average	Vertical
	7392.0	39.1	8.6	47.7	74.0	-26.3	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Messiah Li
Test Date	2021/07/26	Test Channel	19
Test Model	Rabbit-C	Test Mode	Mode 1
Note	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	4111.0	39.3	1.5	40.8	74.0	-33.2	Peak	Horizontal
	4876.0	43.2	3.5	46.7	74.0	-27.3	Peak	Horizontal
	7477.0	38.2	8.6	46.8	74.0	-27.2	Peak	Horizontal
	4017.5	39.3	1.1	40.4	74.0	-33.6	Peak	Vertical
	4876.0	49.9	3.5	53.4	74.0	-20.6	Peak	Vertical
	4876.0	46.7	3.5	50.2	54.0	-3.8	Average	Vertical
	8182.5	38.7	9.0	47.7	74.0	-26.3	Peak	Vertical

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Messiah Li
Test Date	2021/07/26	Test Channel	39
Test Model	Rabbit-C	Test Mode	Mode 1
Note	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	4085.5	40.3	1.4	41.7	74.0	-32.3	Peak	Horizontal
	4961.0	42.7	3.7	46.4	74.0	-27.6	Peak	Horizontal
	7502.5	37.4	8.7	46.1	74.0	-27.9	Peak	Horizontal
	4961.0	47.9	3.7	51.6	74.0	-22.4	Peak	Vertical
	7511.0	38.8	8.6	47.4	74.0	-26.6	Peak	Vertical
	11480.5	37.0	13.5	50.5	74.0	-23.5	Peak	Vertical

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Messiah Li
Test Date	2021/07/26	Test Channel	00
Test Model	Rabbit-C	Test Mode	Mode 2
Note	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	4119.5	39.0	1.5	40.5	74.0	-33.5	Peak	Horizontal
	4799.5	42.6	3.5	46.1	74.0	-27.9	Peak	Horizontal
	7460.0	38.8	8.5	47.3	74.0	-26.7	Peak	Horizontal
	3839.0	39.3	0.6	39.9	74.0	-34.1	Peak	Vertical
	4799.5	49.7	3.5	53.2	74.0	-20.8	Peak	Vertical
	4799.5	44.6	3.5	48.1	54.0	-5.9	Average	Vertical
	7511.0	37.9	8.6	46.5	74.0	-27.5	Peak	Vertical

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Messiah Li
Test Date	2021/07/26	Test Channel	19
Test Model	Rabbit-C	Test Mode	Mode 2
Note	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	3975.0	39.3	1.1	40.4	74.0	-33.6	Peak	Horizontal
	4876.0	42.7	3.5	46.2	74.0	-27.8	Peak	Horizontal
	7468.5	36.7	8.5	45.2	74.0	-28.8	Peak	Horizontal
	4111.0	39.0	1.5	40.5	74.0	-33.5	Peak	Vertical
	4876.0	49.0	3.5	52.5	74.0	-21.5	Peak	Vertical
	7494.0	38.3	8.7	47.0	74.0	-27.0	Peak	Vertical

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Messiah Li
Test Date	2021/07/26	Test Channel	39
Test Model	Rabbit-C	Test Mode	Mode 2
Note	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		


Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	3856.0	39.4	0.8	40.2	74.0	-33.8	Peak	Horizontal
	4961.0	42.3	3.7	46.0	74.0	-28.0	Peak	Horizontal
	7621.5	38.6	8.3	46.9	74.0	-27.1	Peak	Horizontal
	4009.0	39.3	1.1	40.4	74.0	-33.6	Peak	Vertical
	4961.0	47.4	3.7	51.1	74.0	-22.9	Peak	Vertical
	8310.0	35.5	8.9	44.4	74.0	-29.6	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Worst Case of Radiated Emission below 1GHz:

Site: WZ-AC2	Time: 2021/07/23 - 01:35
Limit: FCC_Part15.209_RSE(3m)	Engineer: Messiah Li
Probe: WZ-AC2_VULB9162_0.03-7GHz	Polarity: Horizontal
EUT: Rabbit Bluetooth 5 BLE module	Power: DC 3.3V
Test Mode: Transmit by BLE 1M at Channel 2402MHz (Rabbit-B)	

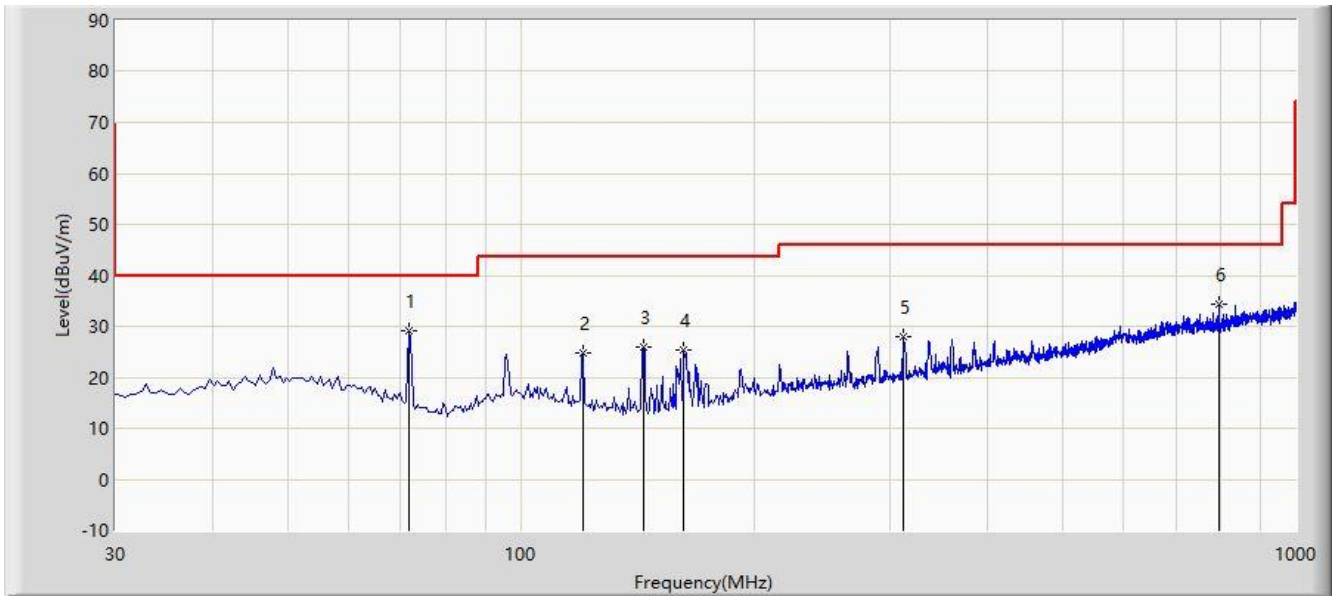


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		*	71.710	29.120	13.271	-10.880	40.000	15.849	PK
2			120.210	24.698	8.094	-18.802	43.500	16.604	PK
3			143.975	25.820	10.773	-17.680	43.500	15.047	PK
4			162.405	25.275	9.413	-18.225	43.500	15.862	PK
5			311.785	28.113	7.065	-17.887	46.000	21.048	PK
6			794.845	34.380	4.464	-11.620	46.000	29.916	PK

Note 1: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The amplitude of radiated emissions (frequency range from 9kHz ~ 30MHz, 18GHz to 26GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Site: WZ-AC2	Time: 2021/07/23 - 01:38
Limit: FCC_Part15.209_RSE(3m)	Engineer: Messiah Li
Probe: WZ-AC2_VULB9162_0.03-7GHz	Polarity: Vertical
EUT: Rabbit Bluetooth 5 BLE module	Power: DC 3.3V
Test Mode: Transmit by BLE 1M at Channel 2402MHz (Rabbit-B)	

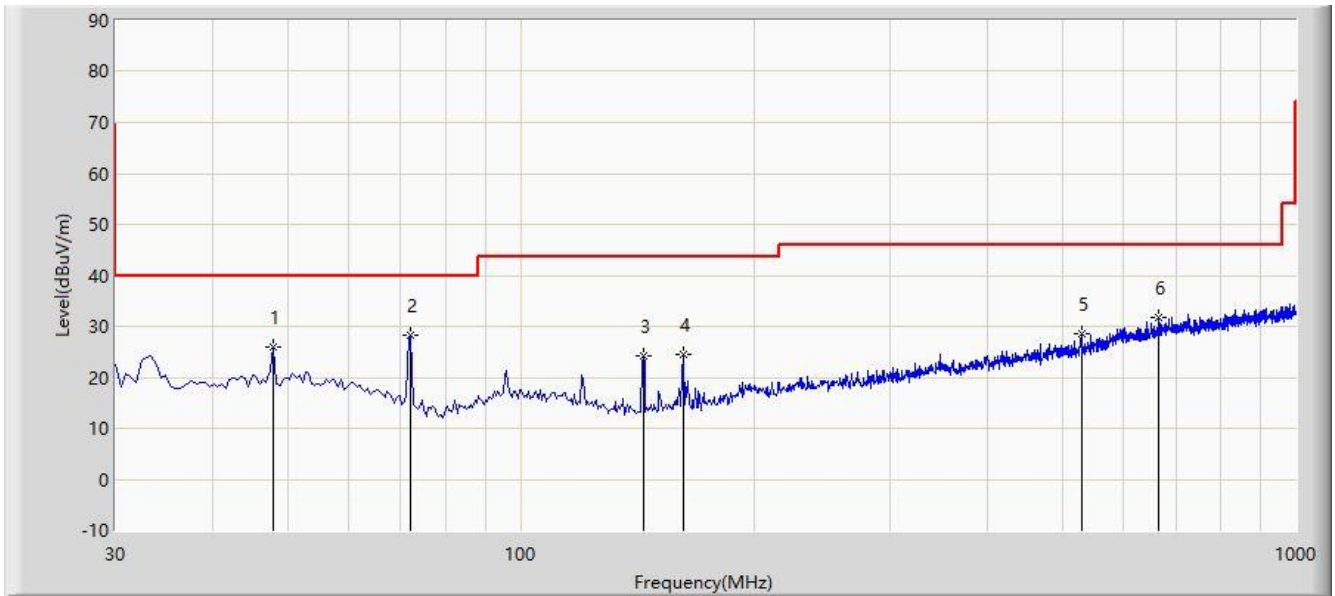


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			47.945	25.988	5.473	-14.012	40.000	20.515	PK
2		*	72.195	28.152	12.450	-11.848	40.000	15.702	PK
3			143.975	24.165	9.118	-19.335	43.500	15.047	PK
4			161.920	24.372	8.542	-19.128	43.500	15.830	PK
5			528.580	28.541	3.149	-17.459	46.000	25.392	PK
6			665.350	31.780	3.618	-14.220	46.000	28.161	PK

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The amplitude of radiated emissions (frequency range from 9kHz ~ 30MHz, 18GHz to 26GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Site: WZ-AC1	Time: 2021/07/26 - 17:11
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tommy Tang
Probe: WZ-AC1_VULB 9168 _30-1000MHz	Polarity: Horizontal
EUT: Rabbit Bluetooth 5 BLE module	Power: DC 3.3V
Test Mode: Transmit by BLE 1M at Channel 2402MHz (Rabbit-C)	

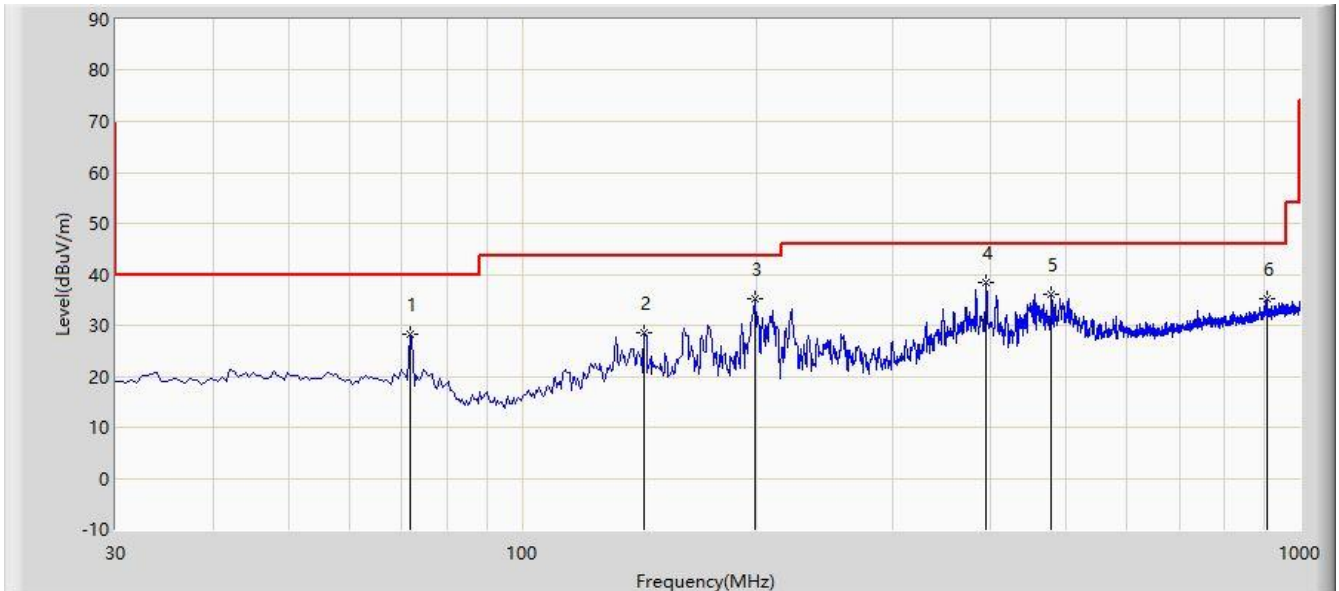

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			71.710	28.326	12.828	-11.674	40.000	15.498	PK
2			143.490	28.513	10.829	-14.987	43.500	17.684	PK
3			199.265	35.118	20.239	-8.382	43.500	14.878	PK
4		*	395.690	38.320	17.689	-7.680	46.000	20.631	PK
5			479.110	35.944	13.133	-10.056	46.000	22.811	PK
6			907.850	35.273	5.792	-10.727	46.000	29.481	PK


Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The amplitude of radiated emissions (frequency range from 9kHz ~ 30MHz, 18GHz to 26GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Note 3: Average measurement was not performed if peak level lower than average limit.

Site: WZ-AC1	Time: 2021/07/26 - 17:12
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tommy Tang
Probe: WZ-AC1_VULB 9168 _30-1000MHz	Polarity: Vertical
EUT: Rabbit Bluetooth 5 BLE module	Power: DC 3.3V
Test Mode: Transmit by BLE 1M at Channel 2402MHz (Rabbit-C)	

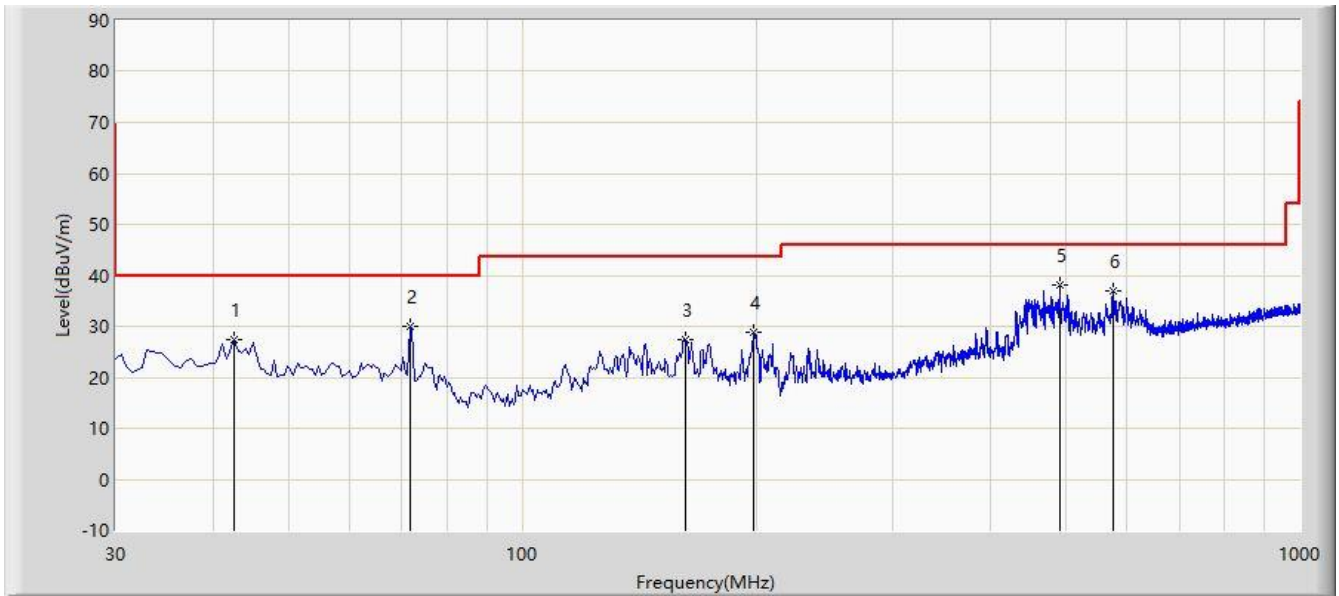

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			42.610	27.387	9.788	-12.613	40.000	17.599	PK
2			71.710	30.074	14.576	-9.926	40.000	15.498	PK
3			162.405	27.505	9.671	-15.995	43.500	17.834	PK
4			198.295	28.731	13.778	-14.769	43.500	14.953	PK
5		*	490.750	38.111	15.228	-7.889	46.000	22.883	PK
6			574.655	37.025	12.254	-8.975	46.000	24.770	PK

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The amplitude of radiated emissions (frequency range from 9kHz ~ 30MHz, 18GHz to 26GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

5.7. Radiated Restricted Band Edge Measurement

5.7.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency [MHz]	Field Strength [μ V/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

For RSS-Gen Section 8.10 Requirement

Radiated emissions which fall in the restricted bands, as defined in Section 8.10 of RSS-Gen, must also comply with the radiated emission limits specified in Section 8.9.

Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.525225	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	--
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 - 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138	--	

All out of band emissions appearing in a restricted band as specified in Section 8.10 of the RSS-Gen must not exceed the limits shown in Table per Section 8.9.

RSS-Gen Section 8.9			
Frequency [MHz]	Magnetic field strength (H-Field) [$\mu\text{A}/\text{m}$]	Field Strength [$\mu\text{V}/\text{m}$]	Measured Distance [Meters]
0.009 - 0.490	6.37/F(F in kHz)	--	300
0.490 - 1.705	63.7/F(F in kHz)	--	30
1.705 - 30	0.08	--	30
30 - 88	--	100	3
88 - 216	--	150	3
216 - 960	--	200	3
Above 960	--	500	3

5.7.2. Test Procedure Used

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

5.7.3. Test Setting


Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

5.7.4. Test Setup

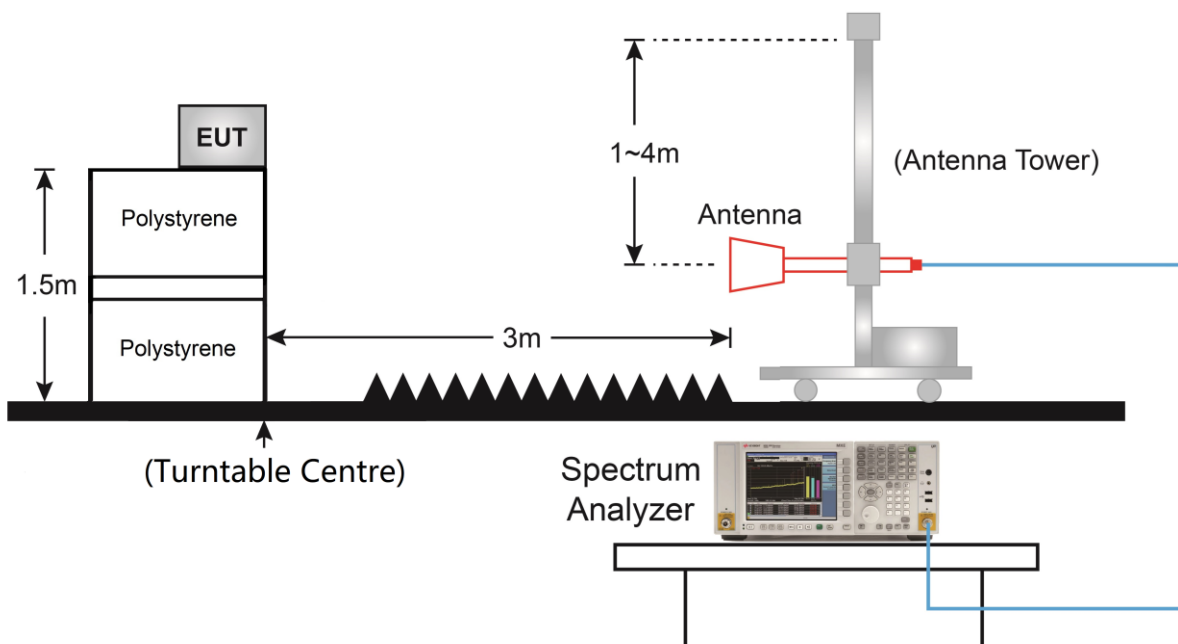

5.7.5. Test Result

Site: WZ-AC2	Time: 2021/07/25 - 20:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Rabbit Bluetooth 5 BLE module	Power: DC 3.3V
Test Mode: Transmit by BLE 1M at Channel 2402MHz (Rabbit-B)	

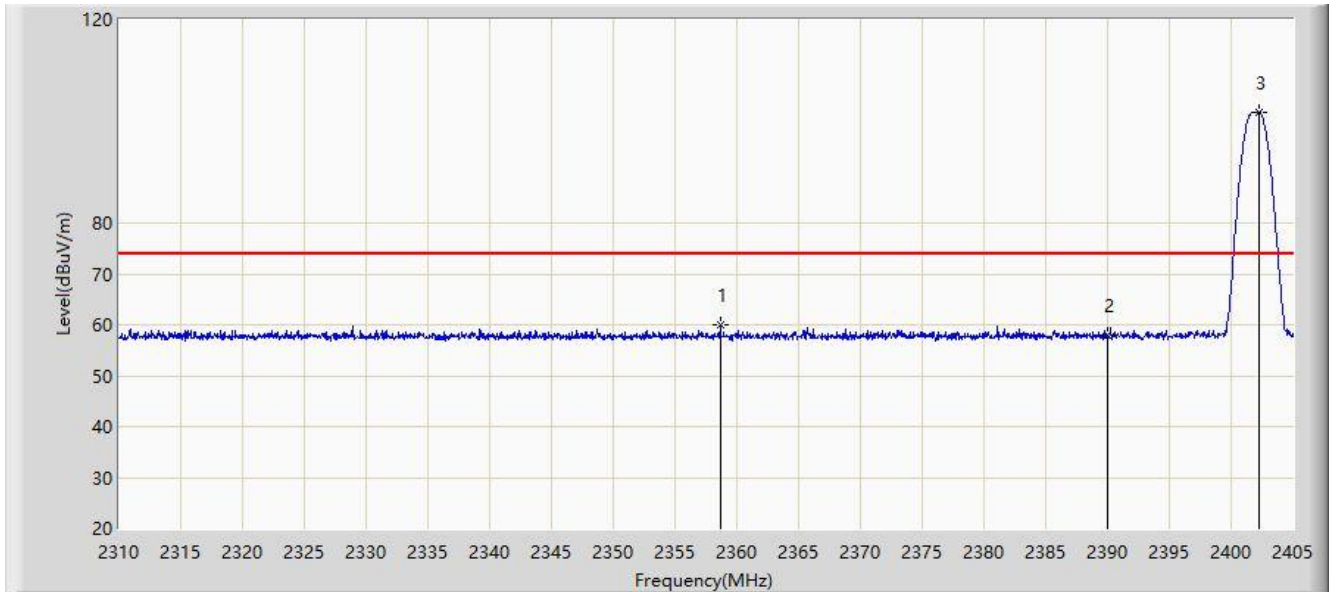


No.	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			2358.687	59.993	27.970	-14.007	74.000	32.022	PK
2			2390.000	57.852	25.849	-16.148	74.000	32.003	PK
3		*	2402.245	101.768	69.783	N/A	N/A	31.985	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/07/25 - 20:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Rabbit Bluetooth 5 BLE module	Power: DC 3.3V
Test Mode: Transmit by BLE 1M at Channel 2402MHz (Rabbit-B)	

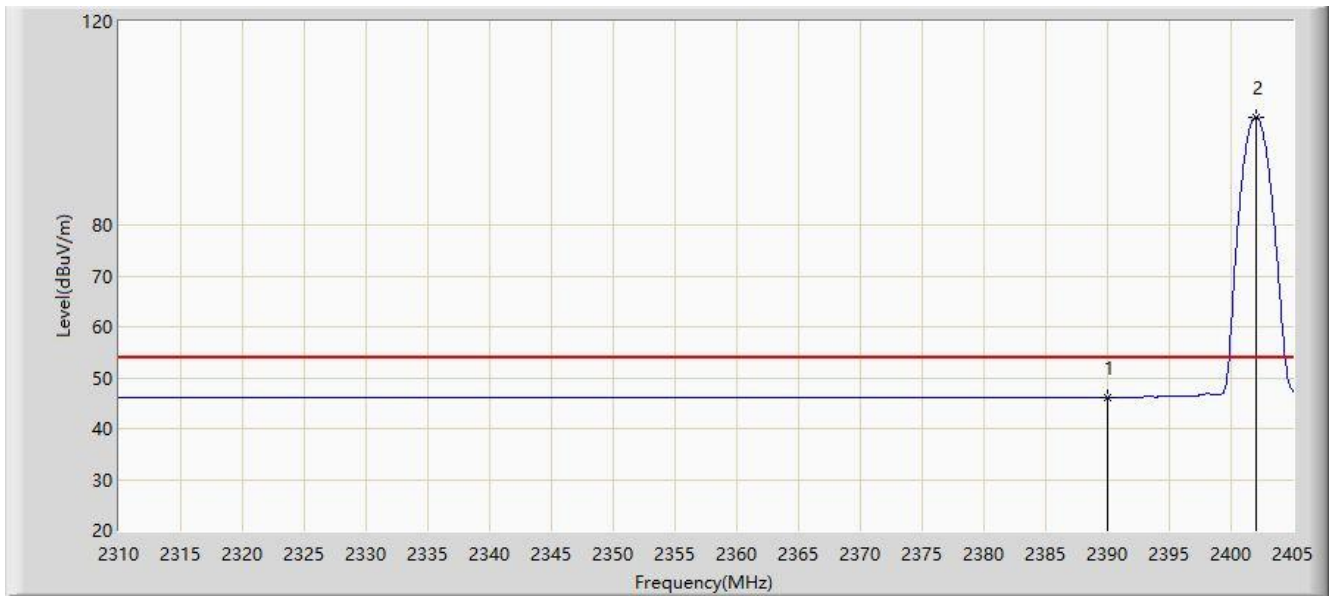


No.	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			2390.000	46.207	14.204	-7.793	54.000	32.003	AV
2		*	2402.008	101.207	69.221	N/A	N/A	31.986	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/07/25 - 20:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Rabbit Bluetooth 5 BLE module	Power: DC 3.3V
Test Mode: Transmit by BLE 1M at Channel 2402MHz (Rabbit-B)	

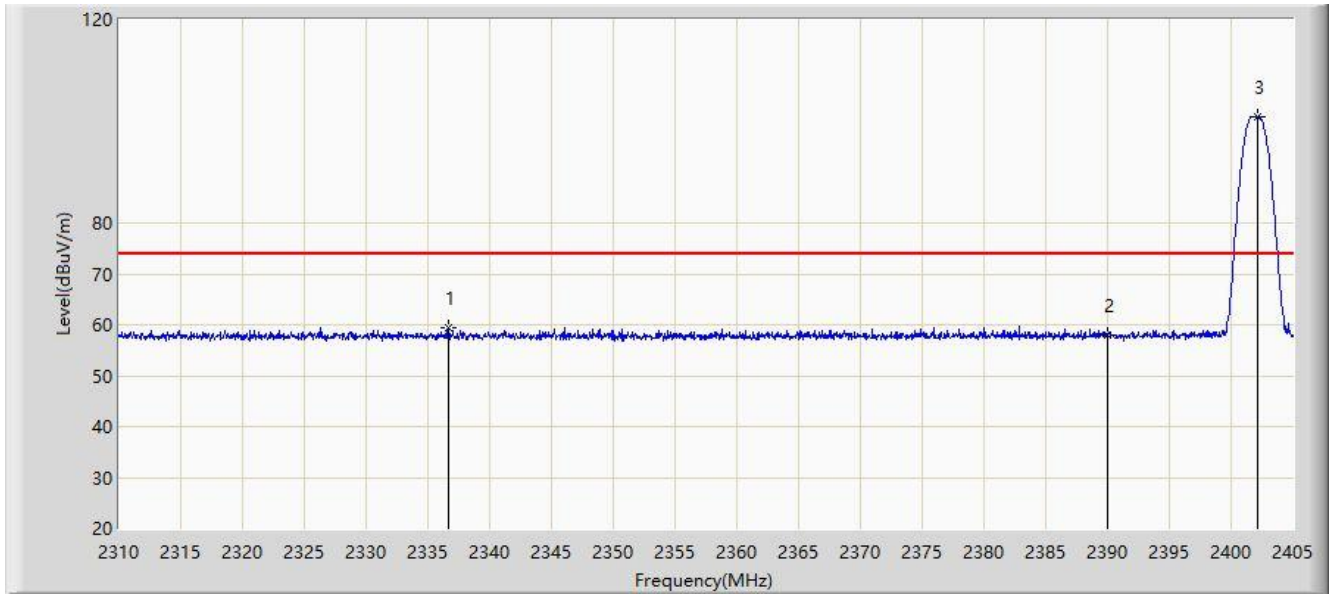


No.	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			2336.695	59.332	27.215	-14.668	74.000	32.117	PK
2			2390.000	57.860	25.857	-16.140	74.000	32.003	PK
3		*	2402.198	100.979	68.994	N/A	N/A	31.985	PK

Note 1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/07/25 - 20:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Rabbit Bluetooth 5 BLE module	Power: DC 3.3V
Test Mode: Transmit by BLE 1M at Channel 2402MHz (Rabbit-B)	

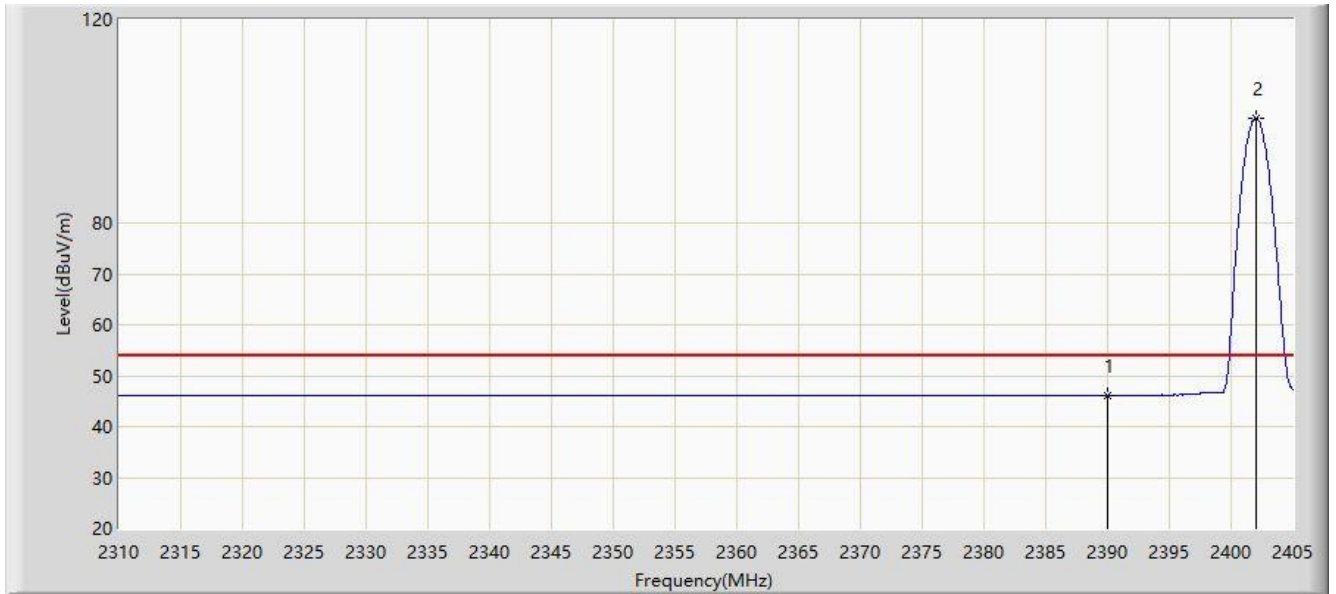


No.	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			2390.000	46.149	14.146	-7.851	54.000	32.003	AV
2		*	2402.008	100.518	68.532	N/A	N/A	31.986	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/07/25 - 20:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Rabbit Bluetooth 5 BLE module	Power: DC 3.3V
Test Mode: Transmit by BLE 1M at Channel 2480MHz (Rabbit-B)	

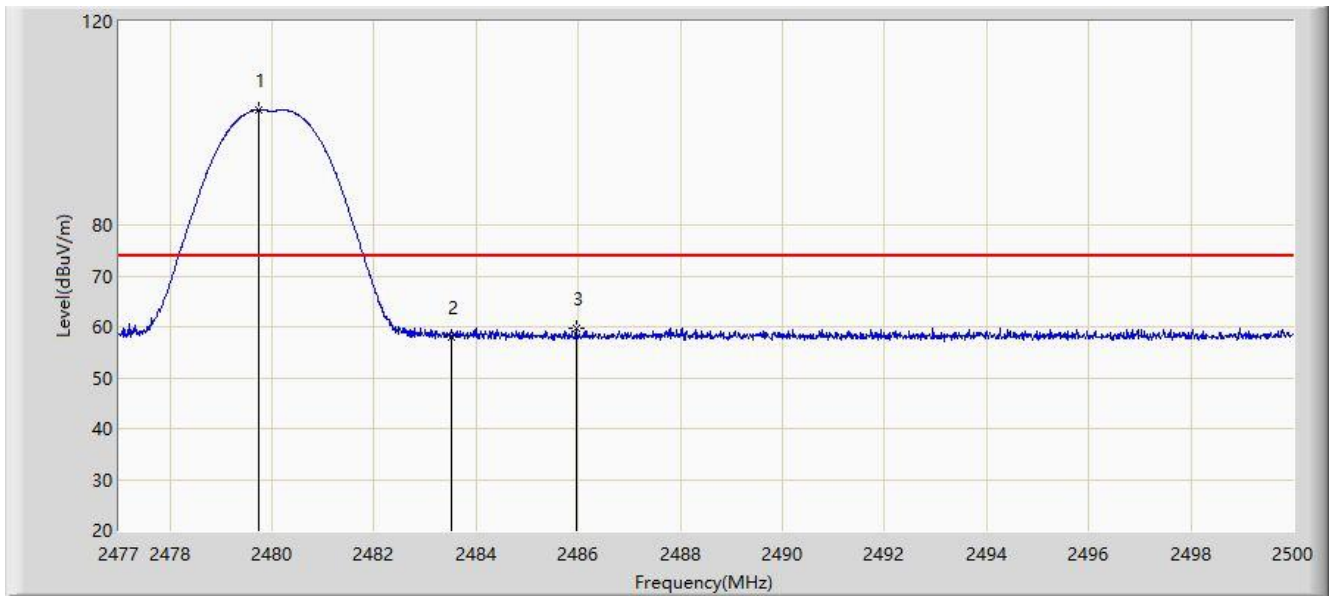


No.	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2479.737	102.554	70.634	N/A	N/A	31.919	PK
2			2483.500	57.874	25.962	-16.126	74.000	31.912	PK
3			2485.958	59.780	27.873	-14.220	74.000	31.907	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/07/25 - 20:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Rabbit Bluetooth 5 BLE module	Power: DC 3.3V
Test Mode: Transmit by BLE 1M at Channel 2480MHz (Rabbit-B)	

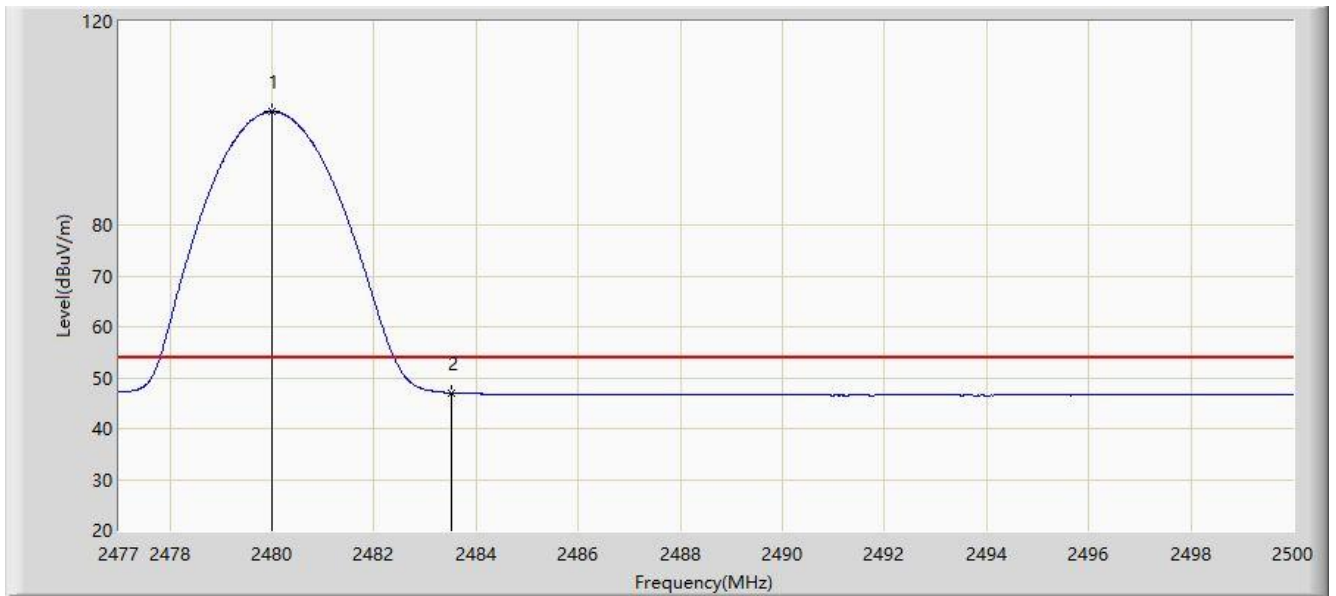


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2480.002	102.225	70.306	N/A	N/A	31.919	AV
2			2483.500	47.008	15.096	-6.992	54.000	31.912	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/07/25 - 20:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Rabbit Bluetooth 5 BLE module	Power: DC 3.3V
Test Mode: Transmit by BLE 1M at Channel 2480MHz (Rabbit-B)	

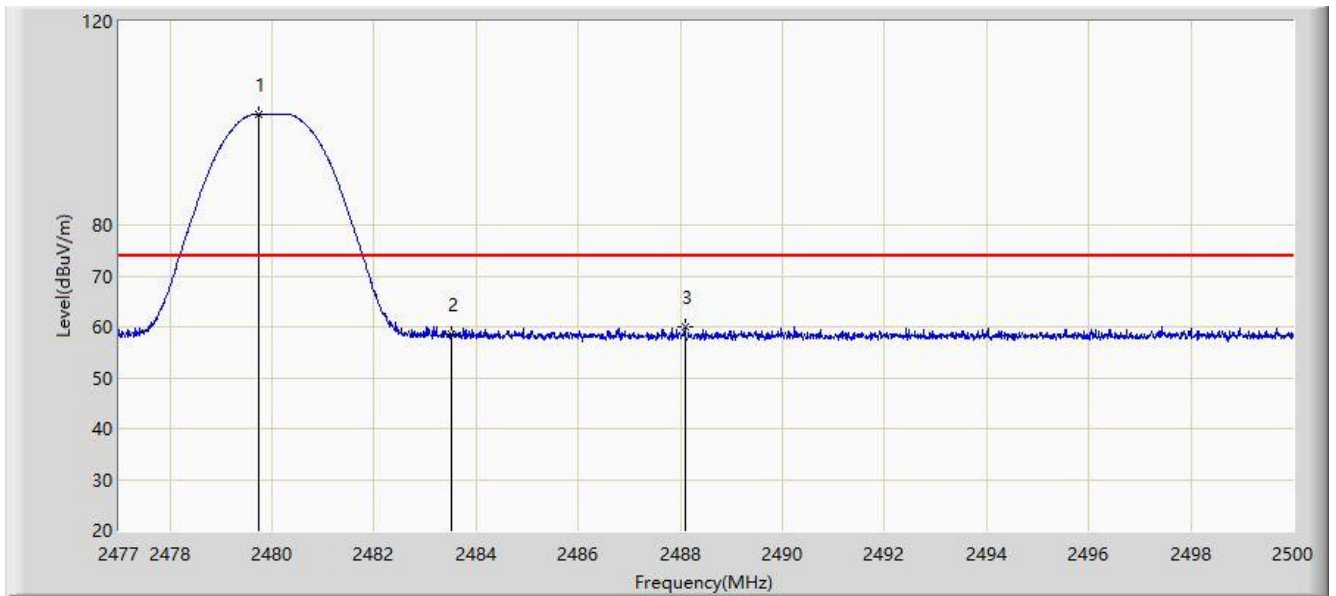


No.	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	2479.737	101.861	69.941	N/A	N/A	31.919	PK
2			2483.500	58.663	26.751	-15.337	74.000	31.912	PK
3			2488.086	60.009	28.107	-13.991	74.000	31.902	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/07/25 - 20:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Rabbit Bluetooth 5 BLE module	Power: DC 3.3V
Test Mode: Transmit by BLE 1M at Channel 2480MHz (Rabbit-B)	

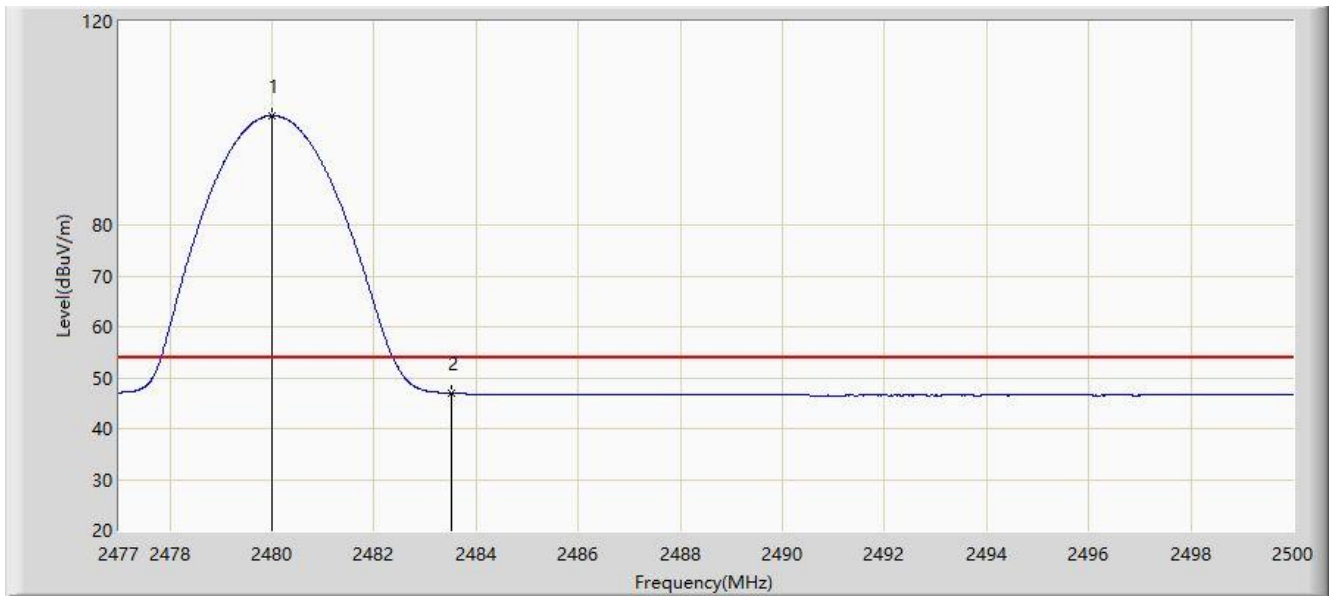


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	2480.002	101.474	69.555	N/A	N/A	31.919	AV
2			2483.500	46.928	15.016	-7.072	54.000	31.912	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/07/25 - 20:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Rabbit Bluetooth 5 BLE module	Power: DC 3.3V
Test Mode: Transmit by BLE 2M at Channel 2402MHz (Rabbit-B)	

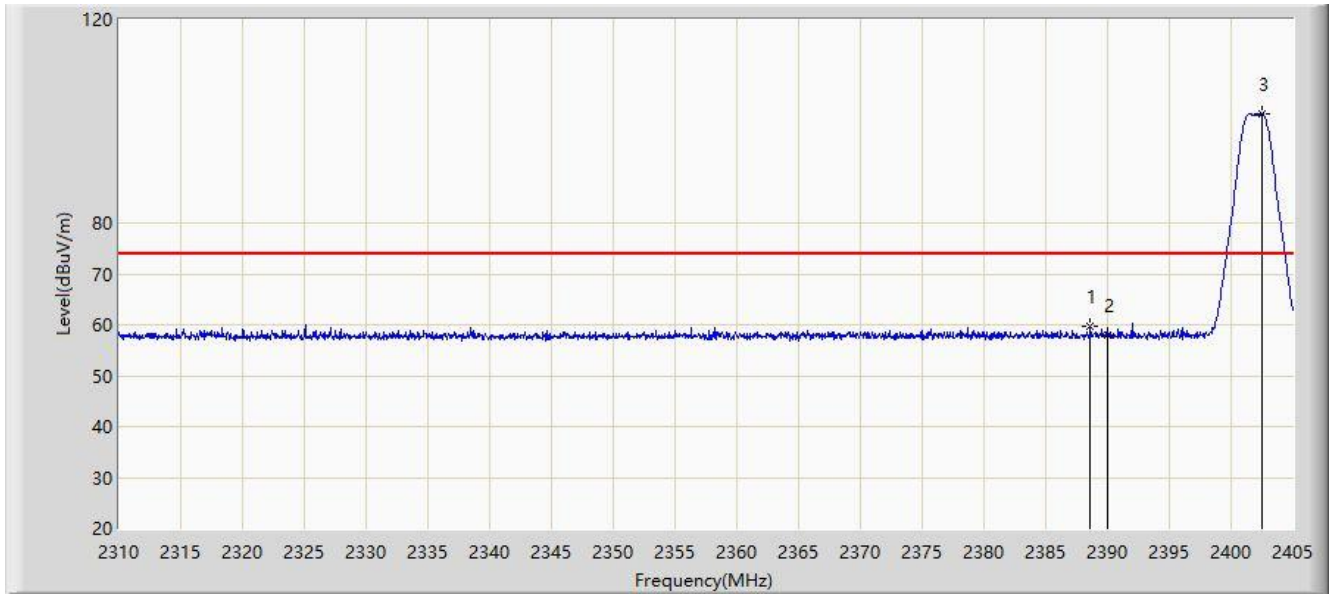


No.	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			2388.613	59.689	27.682	-14.311	74.000	32.007	PK
2			2390.000	58.052	26.049	-15.948	74.000	32.003	PK
3		*	2402.483	101.555	69.570	N/A	N/A	31.985	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/07/25 - 20:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Rabbit Bluetooth 5 BLE module	Power: DC 3.3V
Test Mode: Transmit by BLE 2M at Channel 2402MHz (Rabbit-B)	

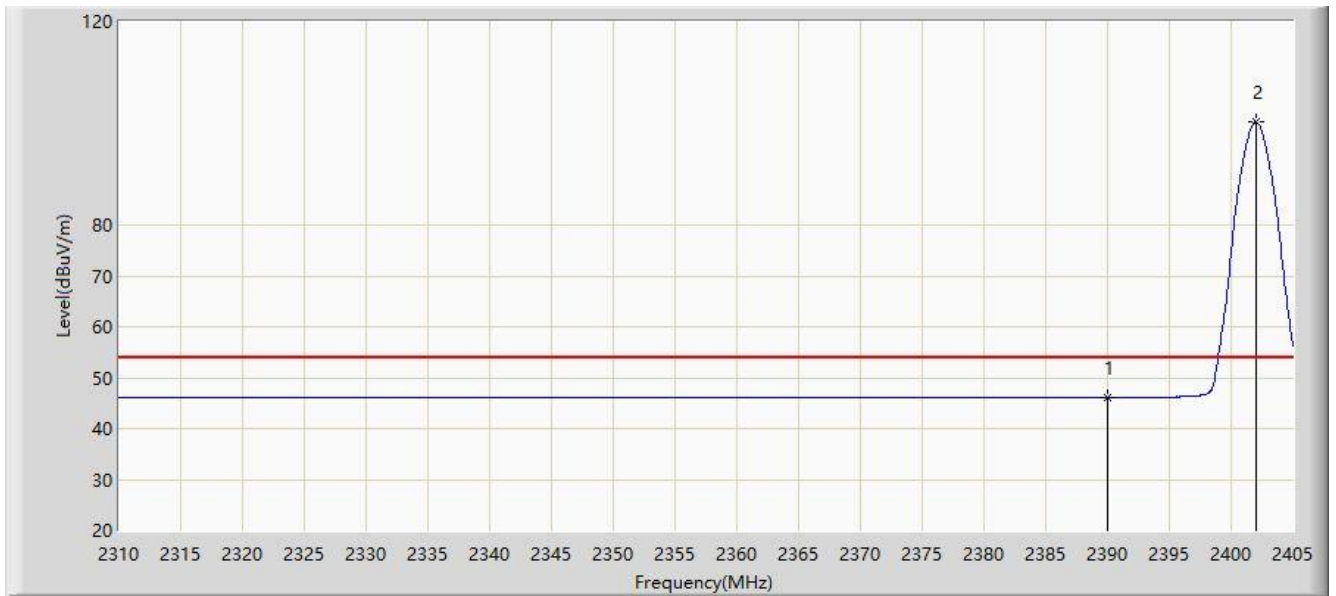


No.	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			2390.000	46.182	14.179	-7.818	54.000	32.003	AV
2		*	2402.008	100.177	68.191	N/A	N/A	31.986	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/07/25 - 20:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Rabbit Bluetooth 5 BLE module	Power: DC 3.3V
Test Mode: Transmit by BLE 2M at Channel 2402MHz (Rabbit-B)	

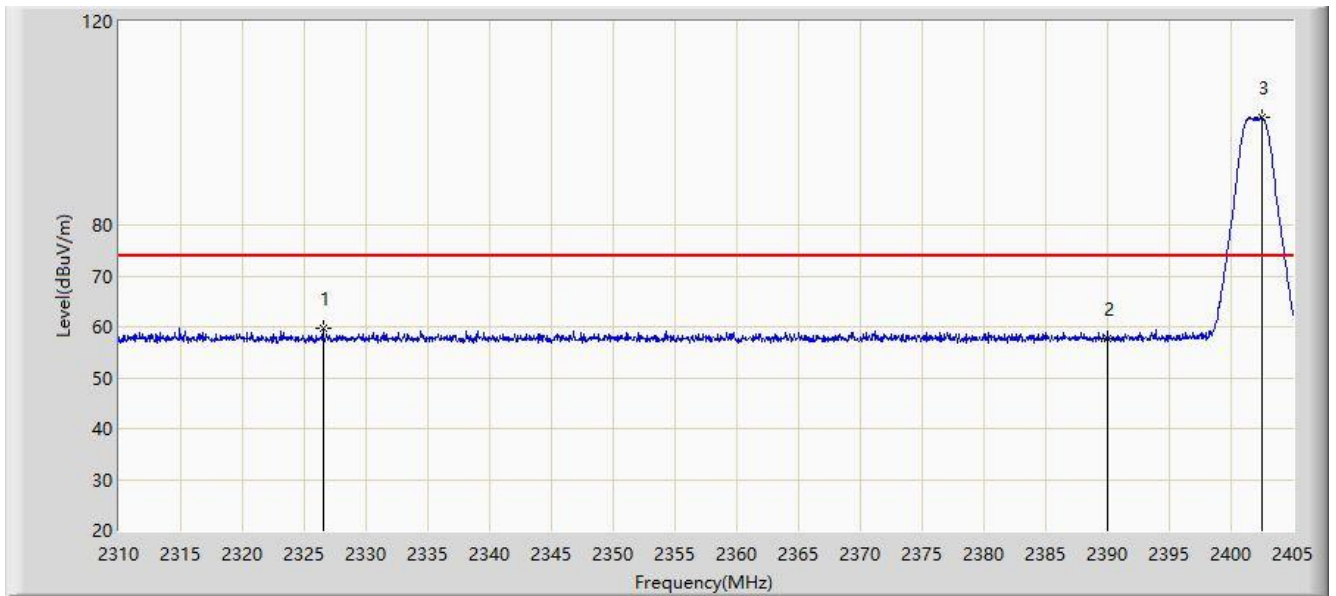


No.	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2326.530	59.671	27.471	-14.329	74.000	32.199	PK
2			2390.000	57.717	25.714	-16.283	74.000	32.003	PK
3		*	2402.483	101.079	69.094	N/A	N/A	31.985	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/07/25 - 20:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Rabbit Bluetooth 5 BLE module	Power: DC 3.3V
Test Mode: Transmit by BLE 2M at Channel 2402MHz (Rabbit-B)	

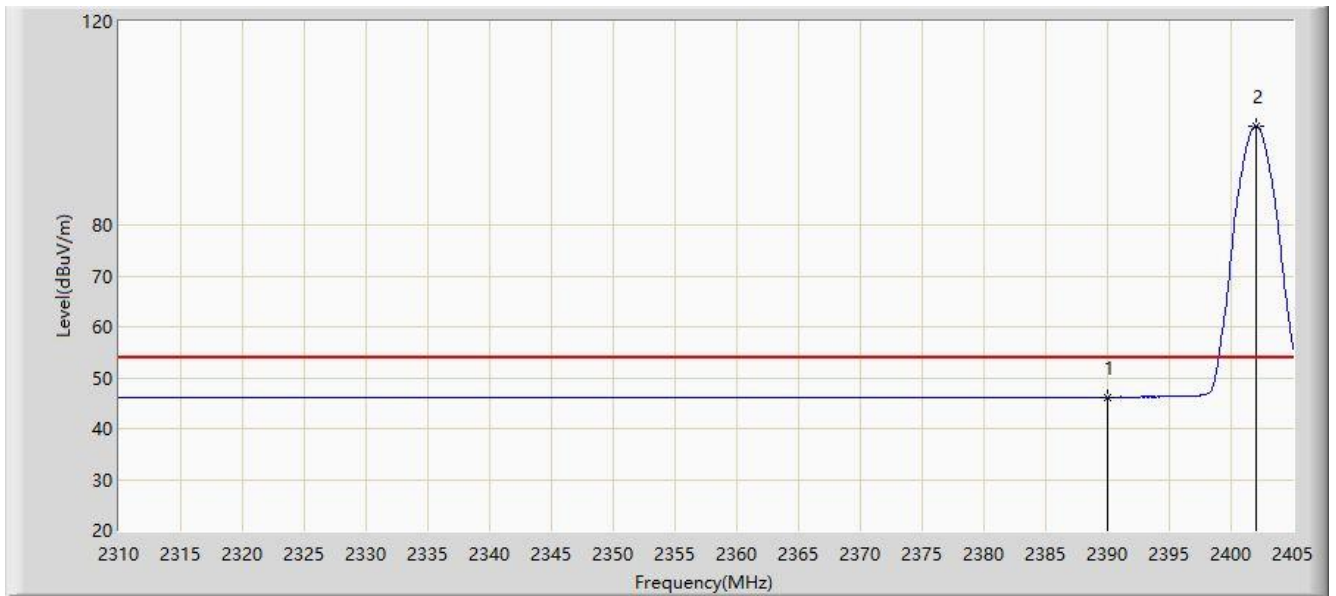


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2390.000	46.195	14.192	-7.805	54.000	32.003	AV
2		*	2402.008	99.505	67.519	N/A	N/A	31.986	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/07/25 - 20:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Rabbit Bluetooth 5 BLE module	Power: DC 3.3V
Test Mode: Transmit by BLE 2M at Channel 2480MHz (Rabbit-B)	

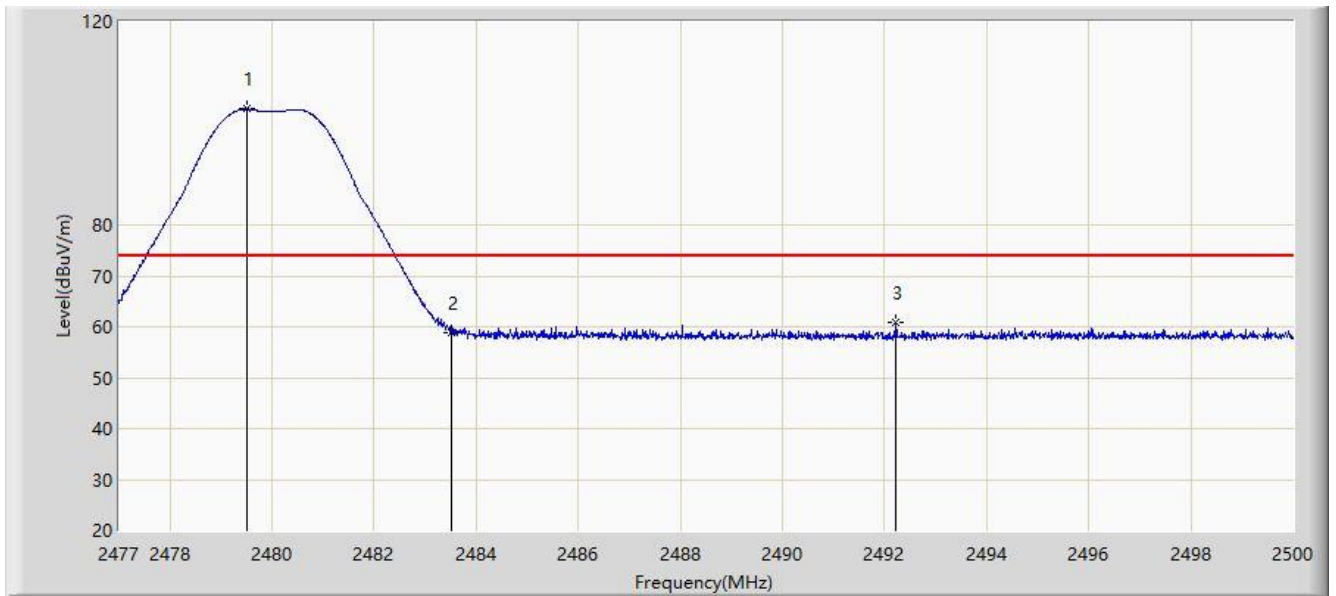


No.	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	2479.496	102.771	70.851	N/A	N/A	31.921	PK
2			2483.500	58.978	27.066	-15.022	74.000	31.912	PK
3			2492.226	60.734	28.839	-13.266	74.000	31.895	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/07/25 - 20:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Rabbit Bluetooth 5 BLE module	Power: DC 3.3V
Test Mode: Transmit by BLE 2M at Channel 2480MHz (Rabbit-B)	

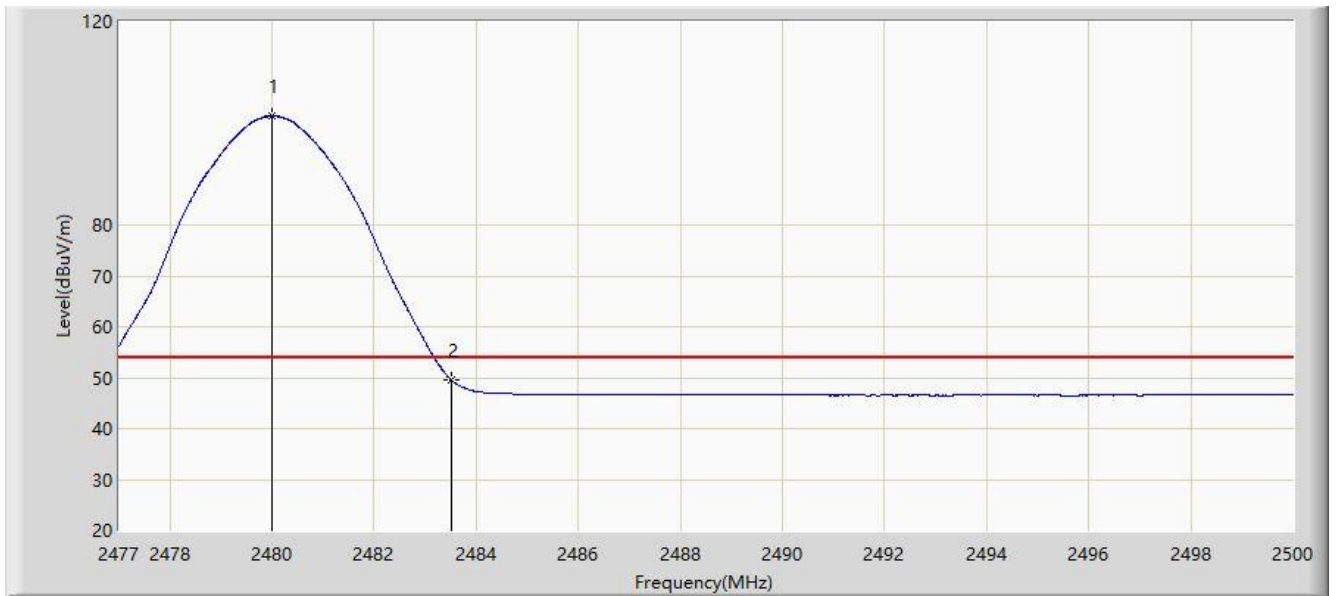


No.	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	2480.002	101.386	69.467	N/A	N/A	31.919	AV
2			2483.500	49.634	17.722	-4.366	54.000	31.912	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/07/25 - 21:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Rabbit Bluetooth 5 BLE module	Power: DC 3.3V
Test Mode: Transmit by BLE 2M at Channel 2480MHz (Rabbit-B)	

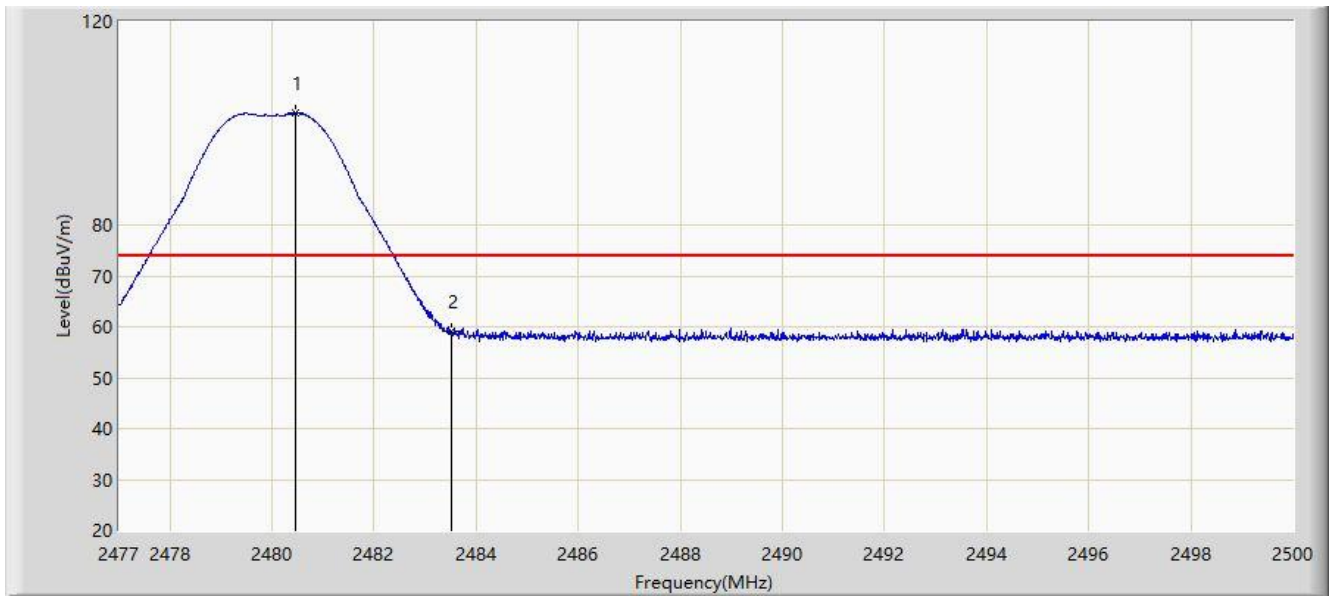


No.	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	2480.473	101.938	70.020	N/A	N/A	31.919	PK
2			2483.500	59.065	27.153	-14.935	74.000	31.912	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC2	Time: 2021/07/25 - 21:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Rabbit Bluetooth 5 BLE module	Power: DC 3.3V
Test Mode: Transmit by BLE 2M at Channel 2480MHz (Rabbit-B)	

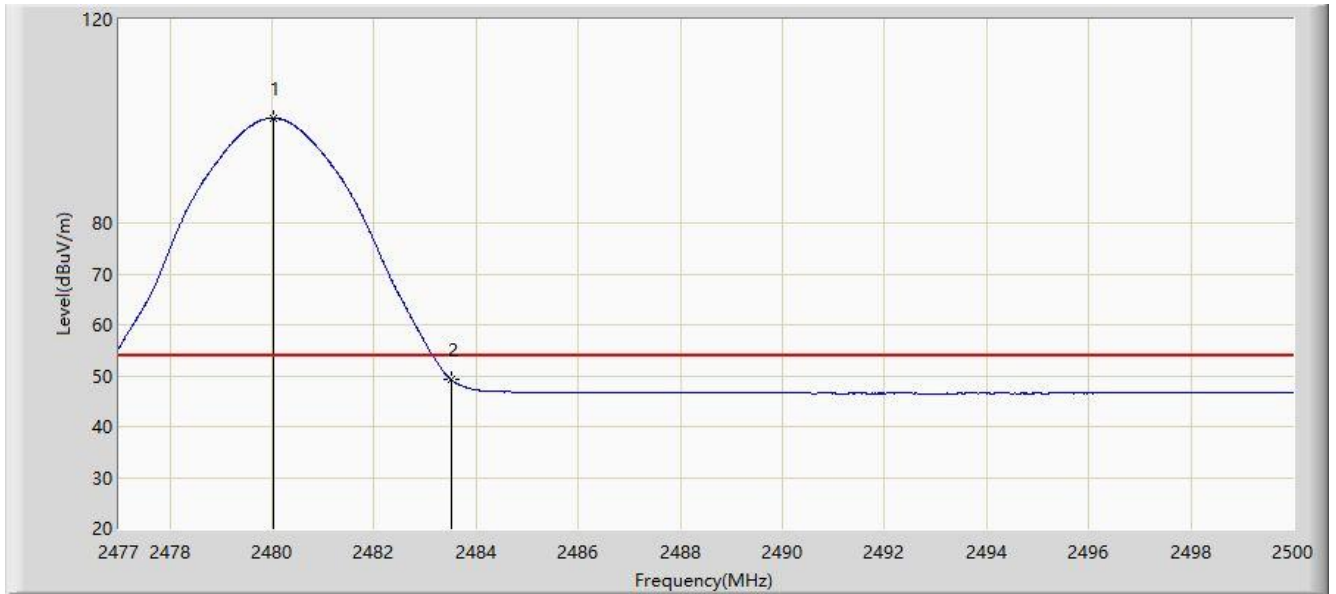


No.	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	2480.025	100.577	68.658	N/A	N/A	31.919	AV
2			2483.500	49.324	17.412	-4.676	54.000	31.912	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/07/26 - 16:22
Limit: FCC_Part15.209_RE(3m)	Engineer: Tommy Tang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Rabbit Bluetooth 5 BLE module	Power: DC 3.3V
Test Mode: Transmit by BLE 1M at Channel 2402MHz (Rabbit-C)	

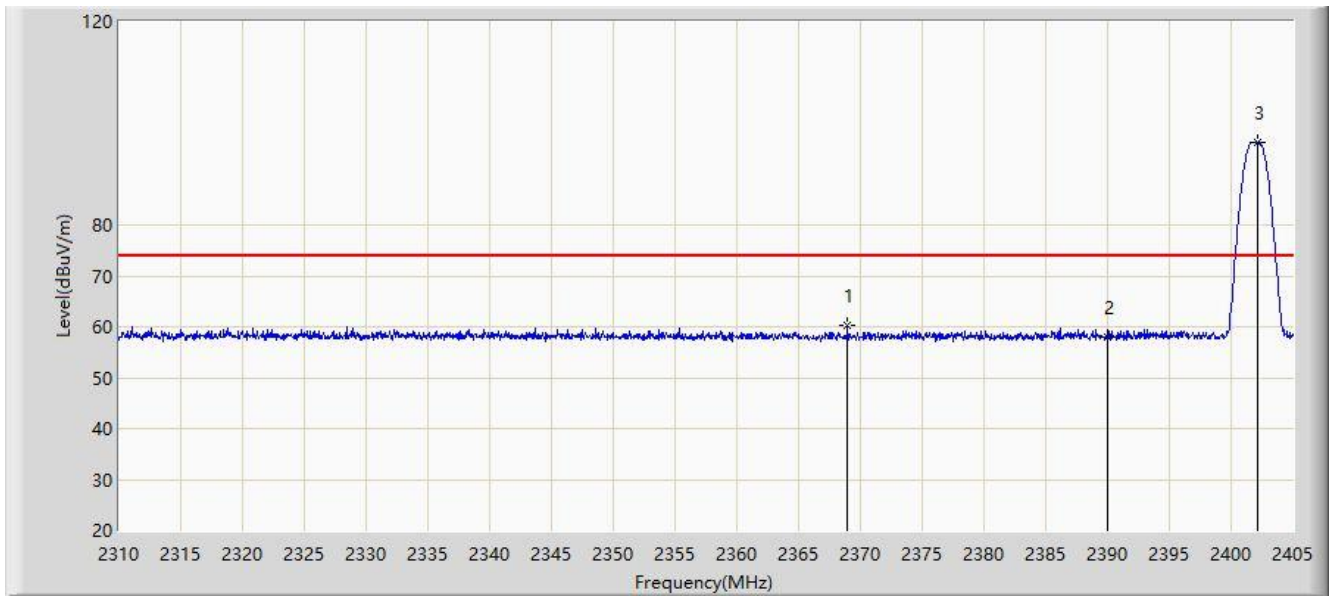


No.	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1			2368.948	60.382	29.328	-13.618	74.000	31.055	PK
2			2390.000	58.071	27.038	-15.929	74.000	31.034	PK
3		*	2402.103	96.245	65.237	N/A	N/A	31.008	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/07/26 - 16:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Tommy Tang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Rabbit Bluetooth 5 BLE module	Power: DC 3.3V
Test Mode: Transmit by BLE 1M at Channel 2402MHz (Rabbit-C)	

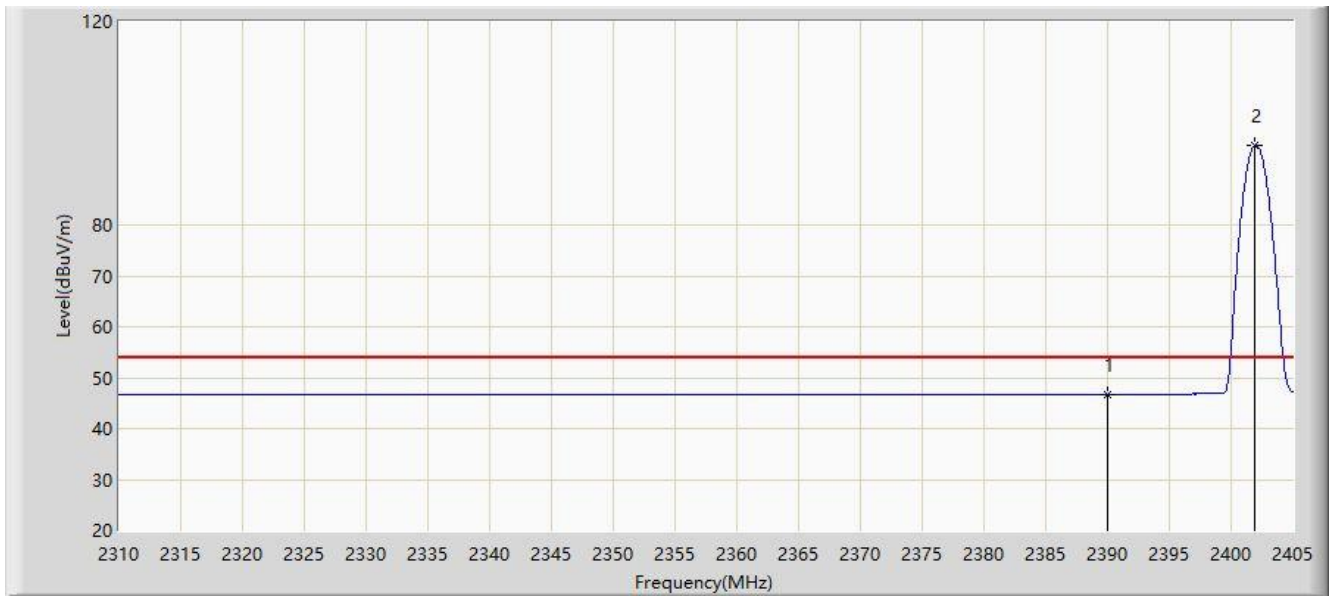


No.	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2390.000	46.694	15.661	-7.306	54.000	31.034	AV
2		*	2401.913	95.640	64.632	N/A	N/A	31.009	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/07/26 - 16:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Tommy Tang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Rabbit Bluetooth 5 BLE module	Power: DC 3.3V
Test Mode: Transmit by BLE 1M at Channel 2402MHz (Rabbit-C)	

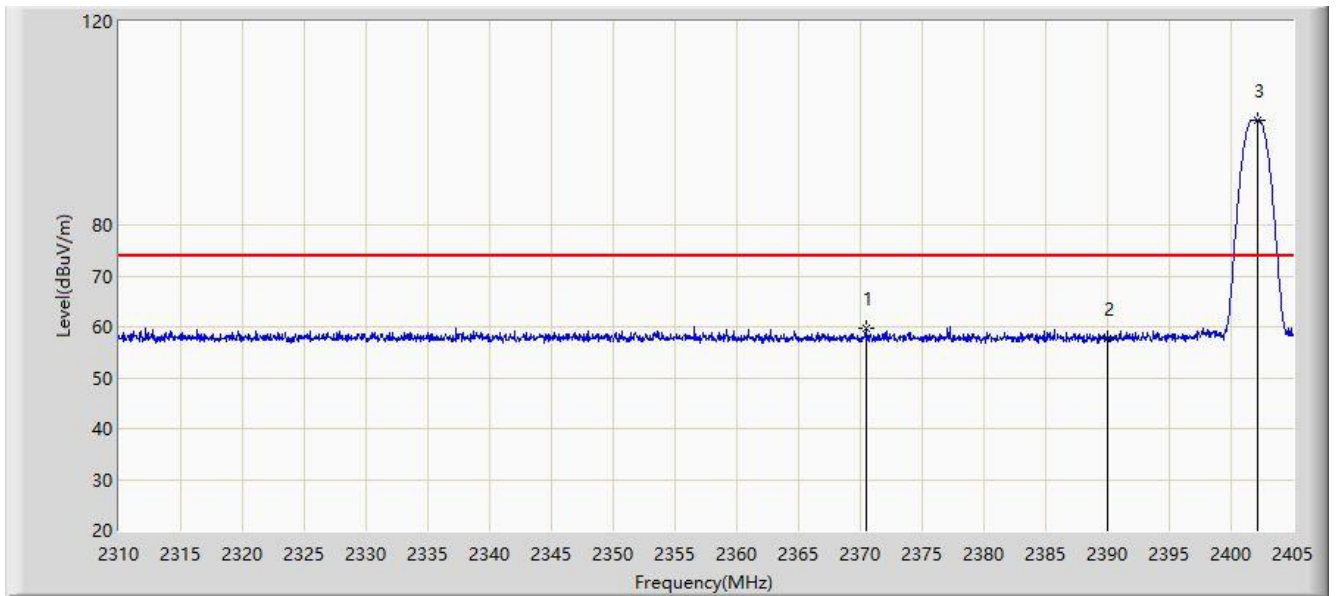


No.	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			2370.420	59.656	28.604	-14.344	74.000	31.052	PK
2			2390.000	57.760	26.727	-16.240	74.000	31.034	PK
3		*	2402.198	100.582	69.575	N/A	N/A	31.007	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/07/26 - 16:30
Limit: FCC_Part15.209_RE(3m)	Engineer: Tommy Tang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Rabbit Bluetooth 5 BLE module	Power: DC 3.3V
Test Mode: Transmit by BLE 1M at Channel 2402MHz (Rabbit-C)	

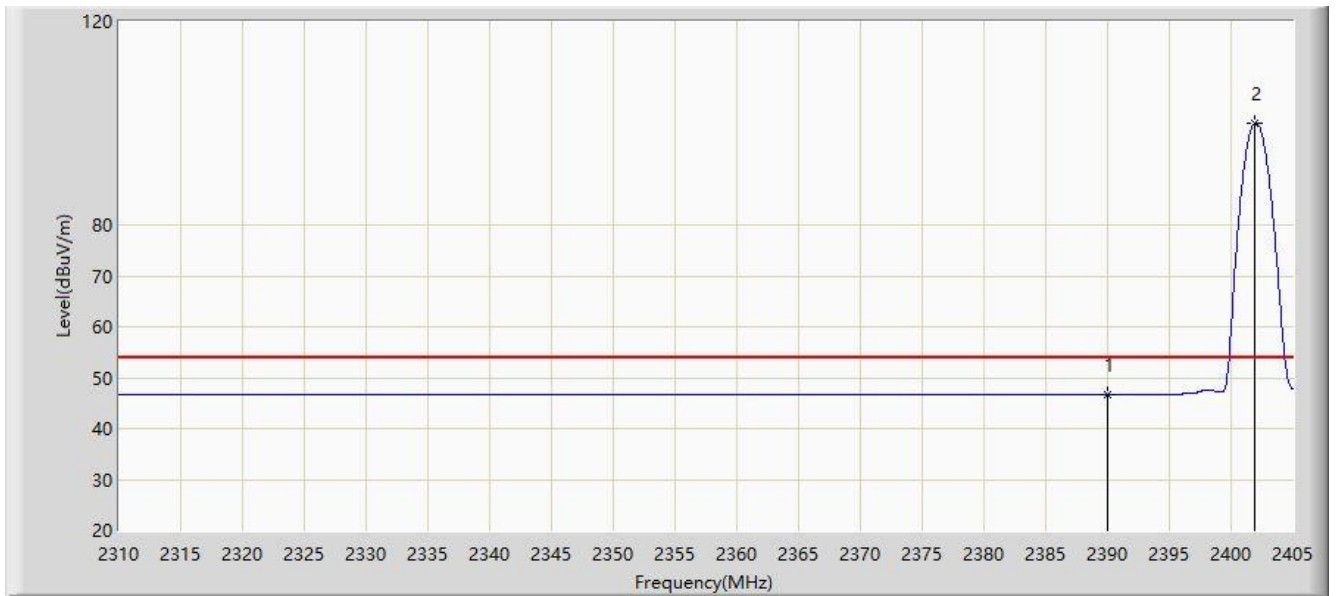


No.	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			2390.000	46.689	15.656	-7.311	54.000	31.034	AV
2		*	2401.913	99.975	68.967	N/A	N/A	31.009	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/07/26 - 16:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Tommy Tang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Rabbit Bluetooth 5 BLE module	Power: DC 3.3V
Test Mode: Transmit by BLE 1M at Channel 2480MHz (Rabbit-C)	

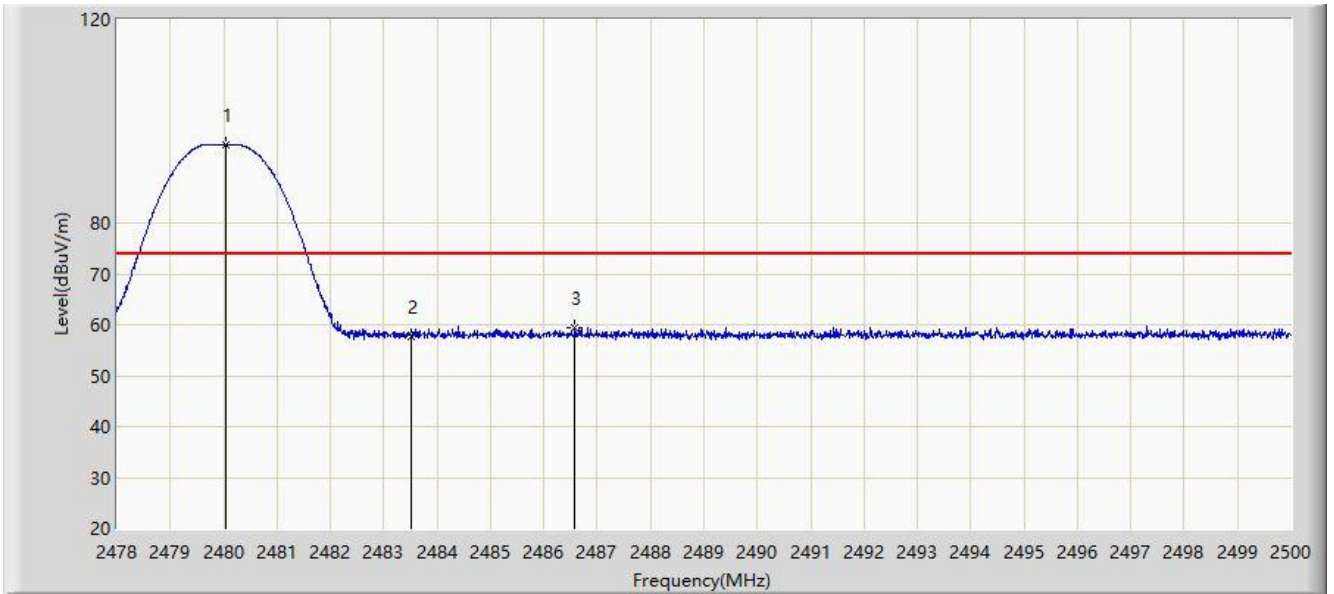


No.	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	2480.046	95.317	64.440	N/A	N/A	30.877	PK
2			2483.500	57.736	26.848	-16.264	74.000	30.888	PK
3			2486.580	59.371	28.473	-14.629	74.000	30.898	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/07/26 - 16:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Tommy Tang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Rabbit Bluetooth 5 BLE module	Power: DC 33.V
Test Mode: Transmit by BLE 1M at Channel 2480MHz (Rabbit-C)	

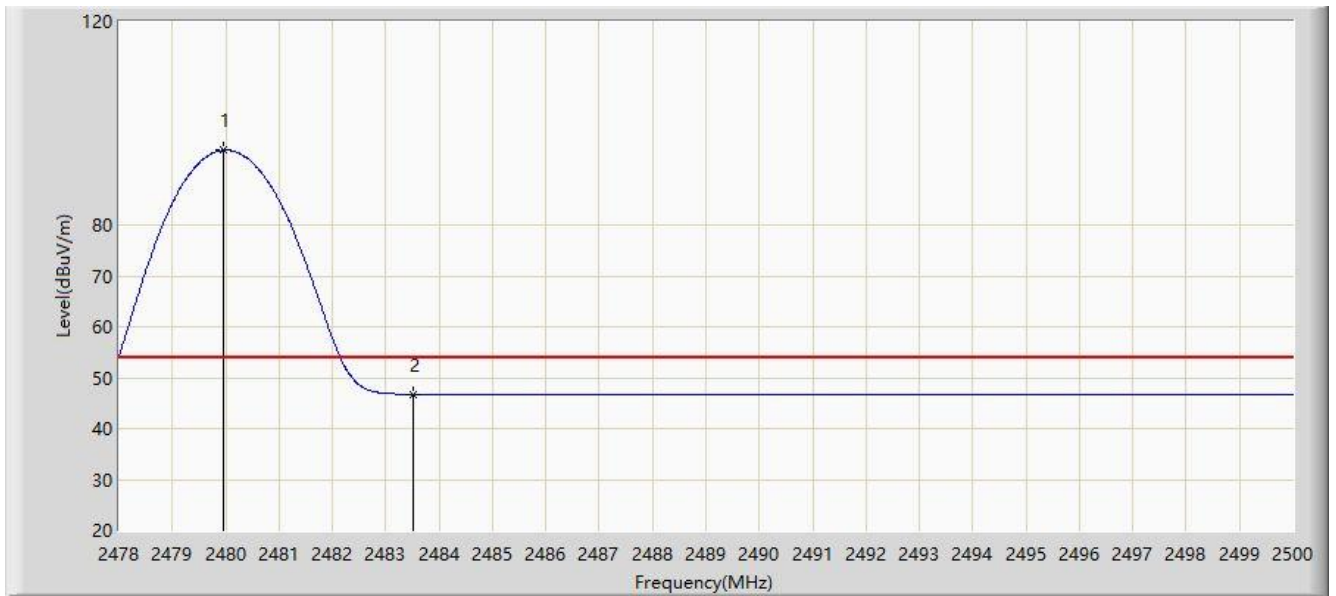


No.	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	2479.969	94.691	63.814	N/A	N/A	30.876	AV
2			2483.500	46.735	15.847	-7.265	54.000	30.888	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/07/26 - 16:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Tommy Tang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Rabbit Bluetooth 5 BLE module	Power: DC 3.3V
Test Mode: Transmit by BLE 1M at Channel 2480MHz (Rabbit-C)	

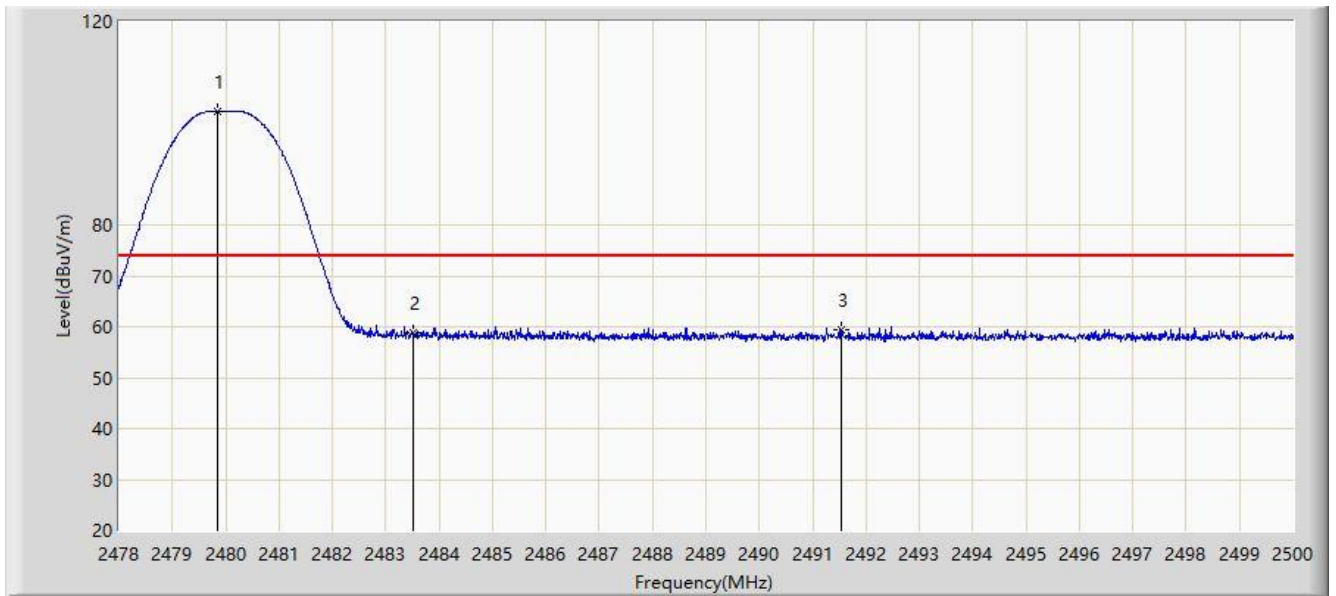


No.	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	2479.837	102.310	71.434	N/A	N/A	30.876	PK
2			2483.500	58.708	27.820	-15.292	74.000	30.888	PK
3			2491.530	59.403	28.489	-14.597	74.000	30.913	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/07/26 - 16:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Tommy Tang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Rabbit Bluetooth 5 BLE module	Power: DC 3.3V
Test Mode: Transmit by BLE 1M at Channel 2480MHz (Rabbit-C)	

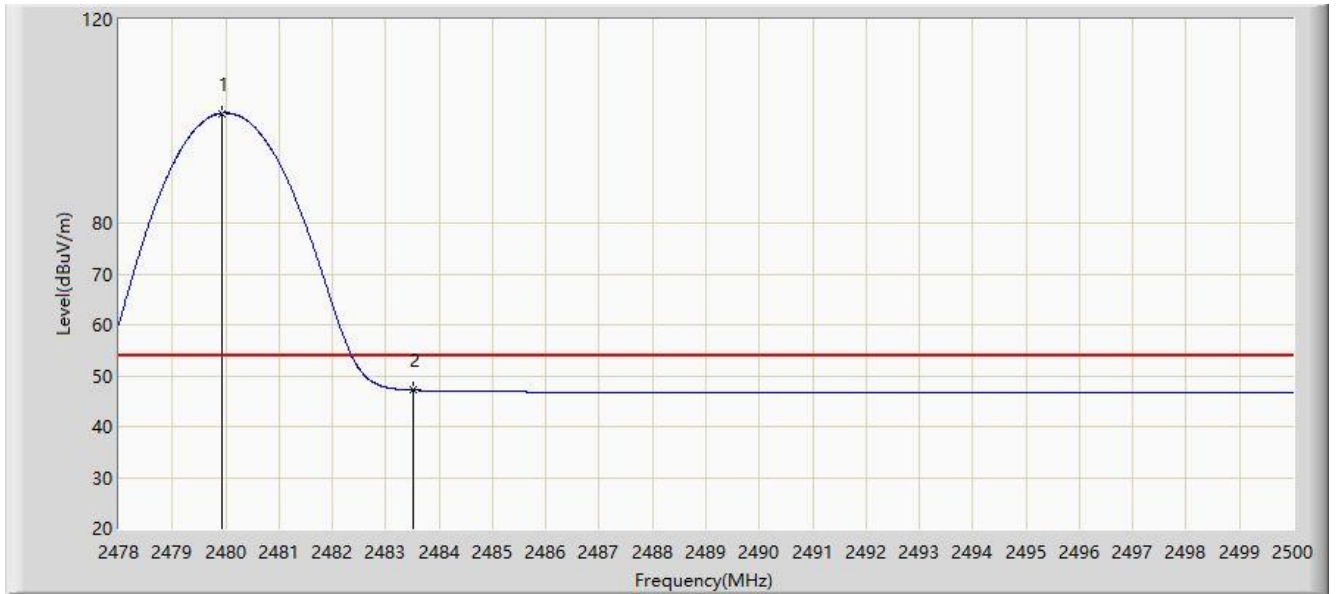


No.	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	2479.936	101.585	70.708	N/A	N/A	30.876	AV
2			2483.500	47.160	16.272	-6.840	54.000	30.888	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/07/26 - 16:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Tommy Tang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Rabbit Bluetooth 5 BLE module	Power: DC 3.3V
Test Mode: Transmit by BLE 2M at Channel 2402MHz (Rabbit-C)	

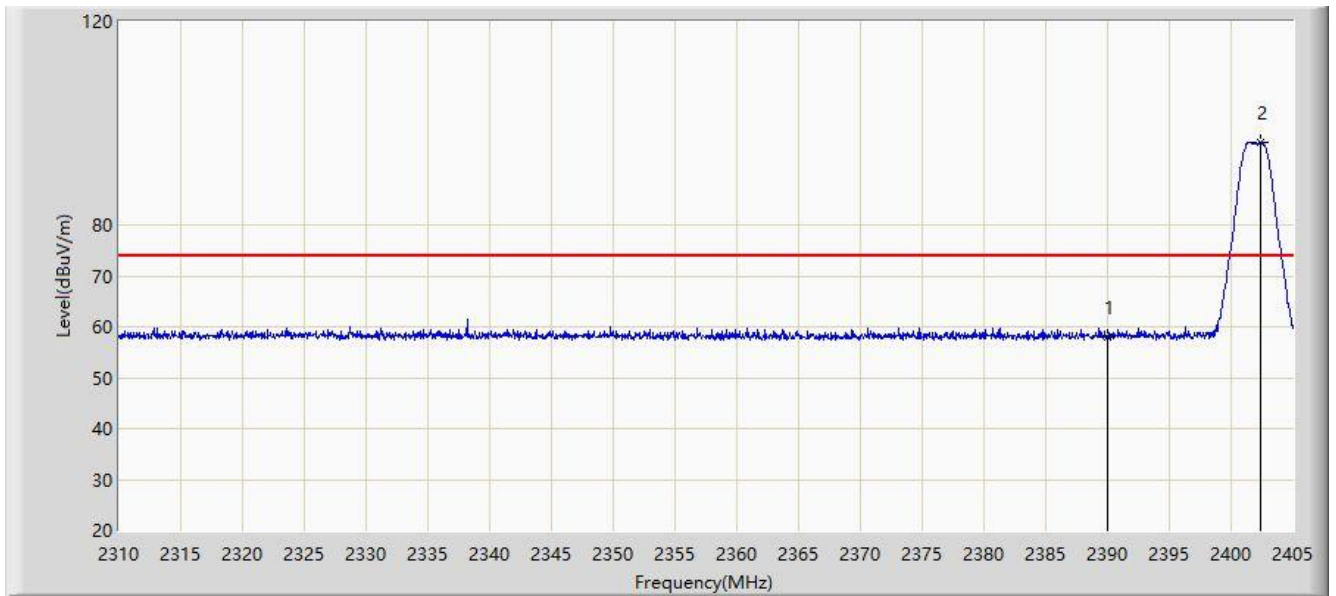


No.	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			2390.000	58.007	26.974	-15.993	74.000	31.034	PK
2		*	2402.387	96.266	65.260	N/A	N/A	31.007	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/07/26 - 16:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Tommy Tang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Rabbit Bluetooth 5 BLE module	Power: DC 3.3V
Test Mode: Transmit by BLE 2M at Channel 2402MHz (Rabbit-C)	

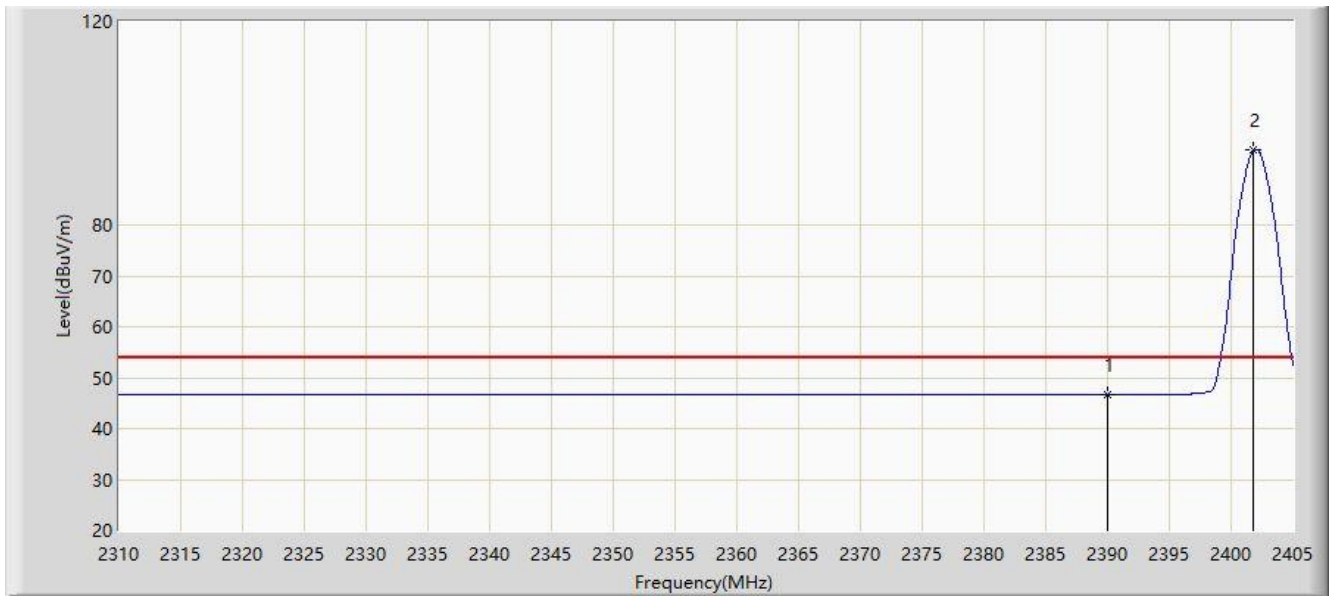


No.	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			2390.000	46.690	15.657	-7.310	54.000	31.034	AV
2		*	2401.817	94.704	63.695	N/A	N/A	31.009	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/07/26 - 16:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Tommy Tang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Rabbit Bluetooth 5 BLE module	Power: DC 3.3V
Test Mode: Transmit by BLE 2M at Channel 2402MHz (Rabbit-C)	

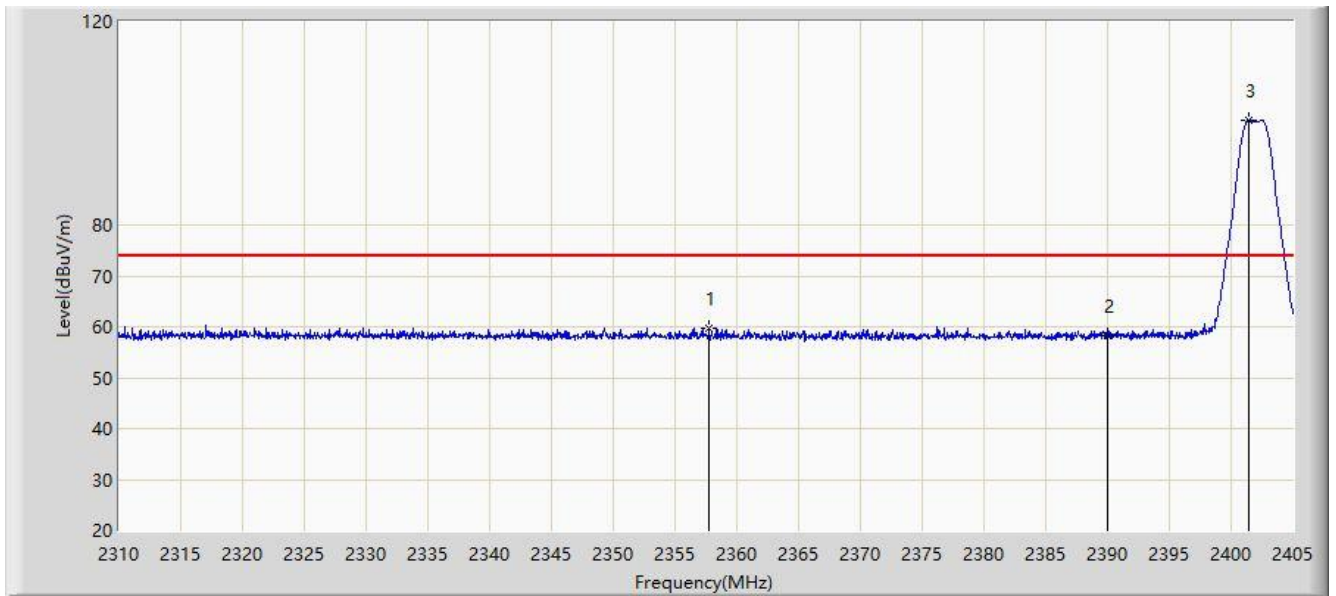


No.	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			2357.785	59.637	28.525	-14.363	74.000	31.112	PK
2			2390.000	58.371	27.338	-15.629	74.000	31.034	PK
3		*	2401.390	100.621	69.611	N/A	N/A	31.010	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/07/26 - 16:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Tommy Tang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Rabbit Bluetooth 5 BLE module	Power: DC 3.3V
Test Mode: Transmit by BLE 2M at Channel 2402MHz (Rabbit-C)	

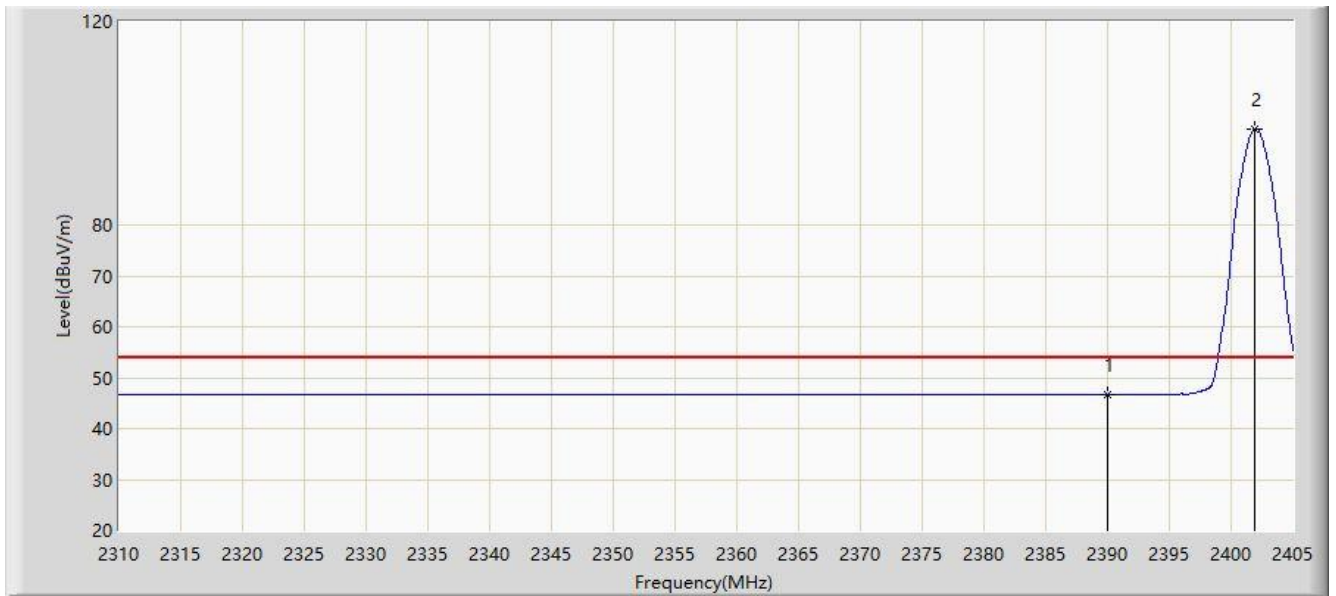


No.	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			2390.000	46.697	15.664	-7.303	54.000	31.034	AV
2		*	2401.865	98.831	67.822	N/A	N/A	31.009	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/07/26 - 15:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Tommy Tang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Rabbit Bluetooth 5 BLE module	Power: DC 3.3V
Test Mode: Transmit by BLE 2M at Channel 2480MHz (Rabbit-C)	

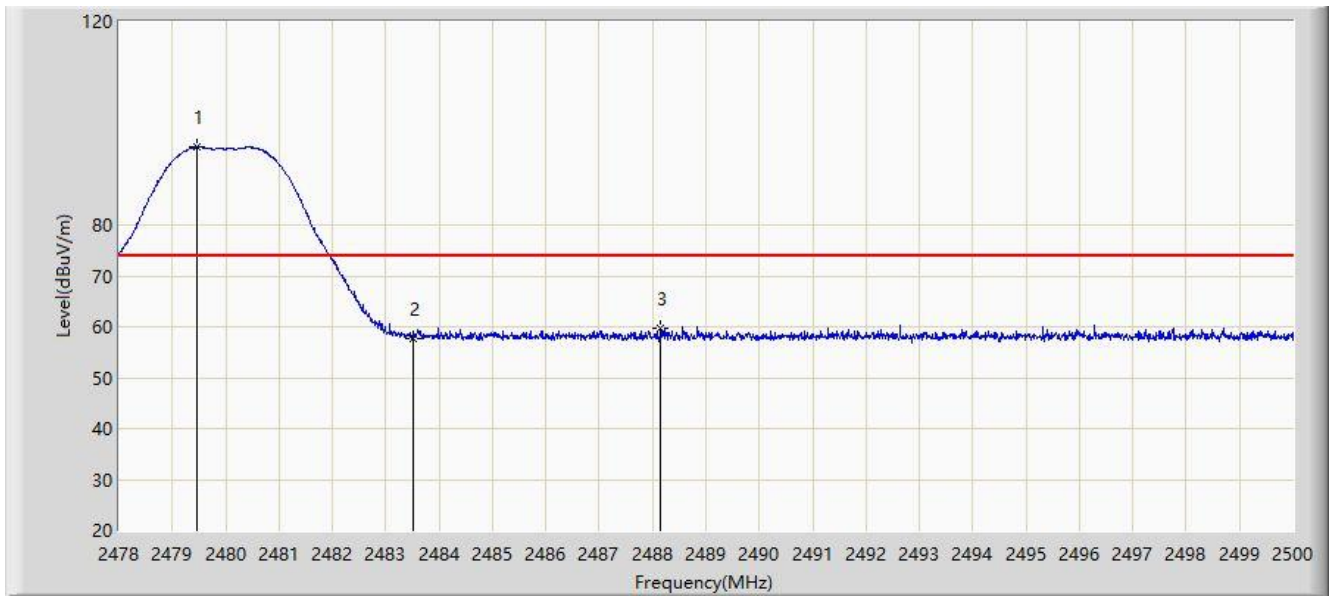


No.	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	2479.474	95.331	64.456	N/A	N/A	30.876	PK
2			2483.500	57.636	26.748	-16.364	74.000	30.888	PK
3			2488.153	59.707	28.804	-14.293	74.000	30.903	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/07/26 - 16:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Tommy Tang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Rabbit Bluetooth 5 BLE module	Power: DC 3.3V
Test Mode: Transmit by BLE 2M at Channel 2480MHz (Rabbit-C)	

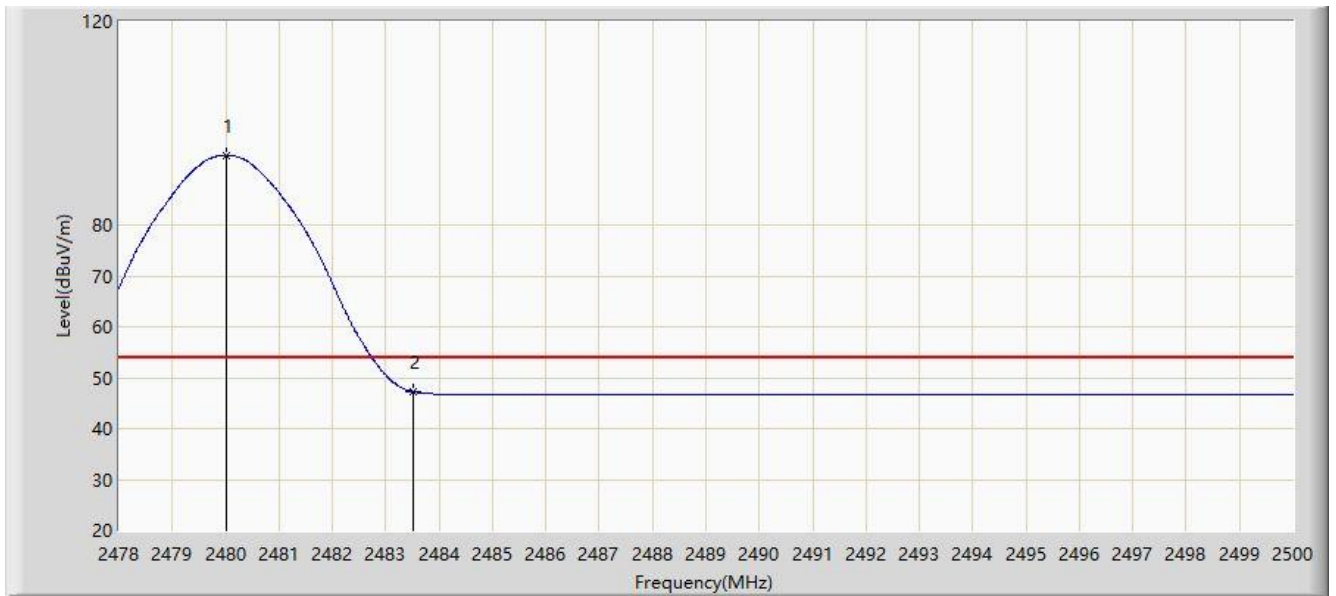


No.	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	2480.002	93.748	62.871	N/A	N/A	30.877	AV
2			2483.500	47.261	16.373	-6.739	54.000	30.888	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/07/26 - 16:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Tommy Tang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Rabbit Bluetooth 5 BLE module	Power: DC 3.3V
Test Mode: Transmit by BLE 2M at Channel 2480MHz (Rabbit-C)	

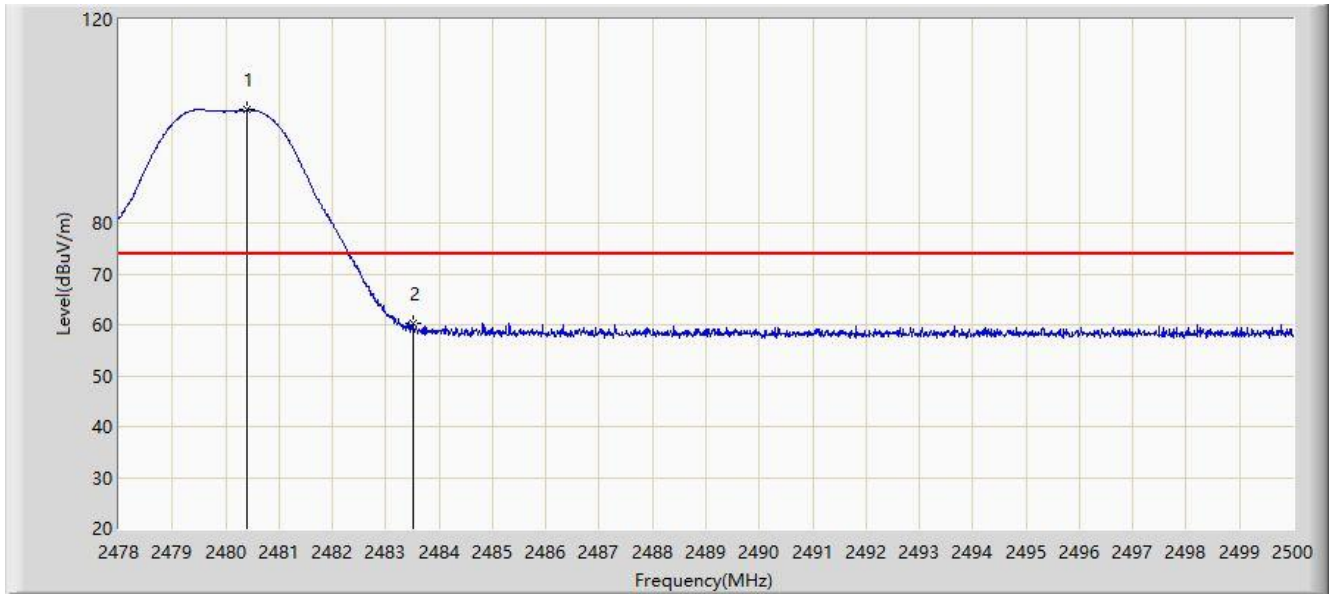


No.	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	2480.387	102.176	71.298	N/A	N/A	30.878	PK
2			2483.500	60.225	29.337	-13.775	74.000	30.888	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2021/07/26 - 16:07
Limit: FCC_Part15.209_RE(3m)	Engineer: Tommy Tang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Rabbit Bluetooth 5 BLE module	Power: DC 3.3V
Test Mode: Transmit by BLE 2M at Channel 2480MHz (Rabbit-C)	

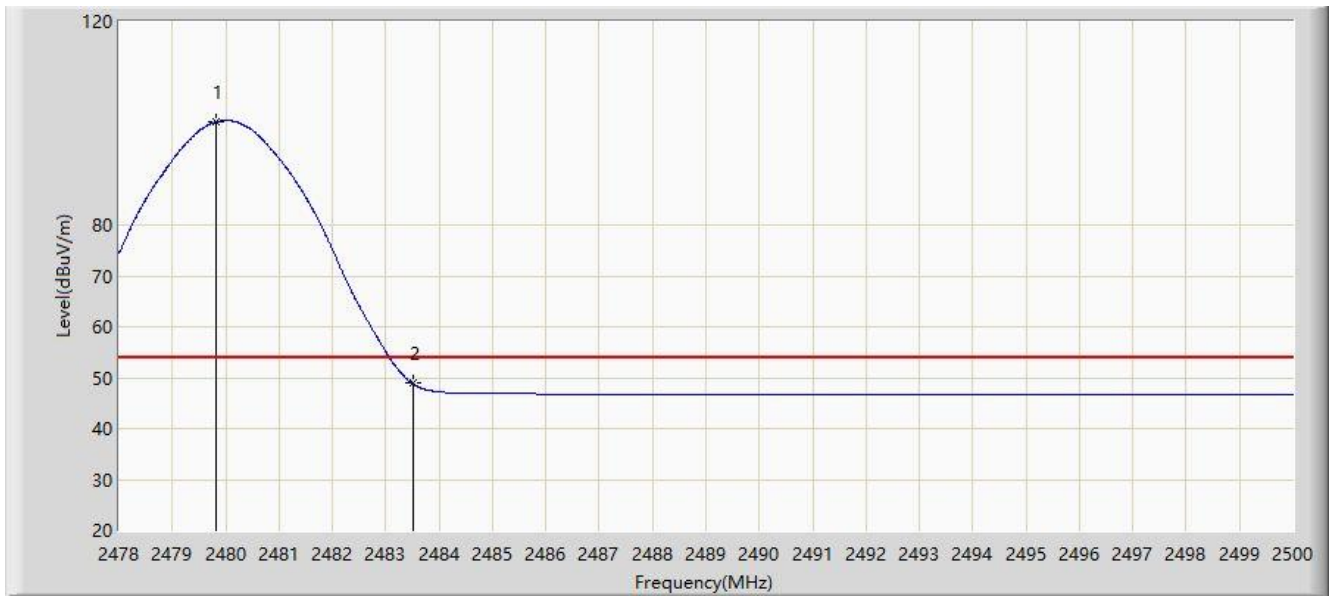

No.	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	2479.826	100.289	69.413	N/A	N/A	30.876	AV
2			2483.500	48.847	17.959	-5.153	54.000	30.888	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

5.8. AC Conducted Emissions Measurement


5.8.1. Test Limit

FCC Part 15.207 Limits / RSS-Gen Section 8.8		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

5.8.2. Test Setup

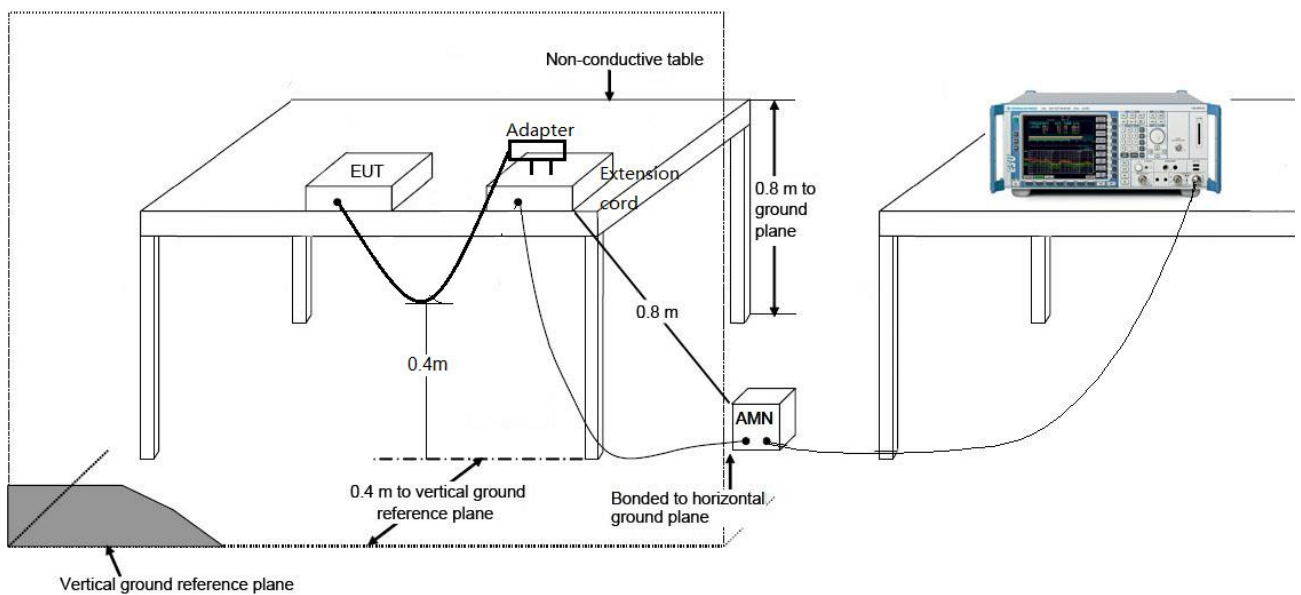

5.8.3. Test Result

Site: WZ-SR2	Time: 2021/07/24 - 13:50
Limit: FCC_Part15.207_CE_AC Power	Engineer: Bruce Wang
Probe: ENV216_101683_Filter Off	Polarity: Line
EUT: Rabbit Bluetooth 5 BLE module	Power: By PC
Test Mode: Transmit by BLE 1Mbps at Channel 2402MHz (Rabbit-B)	

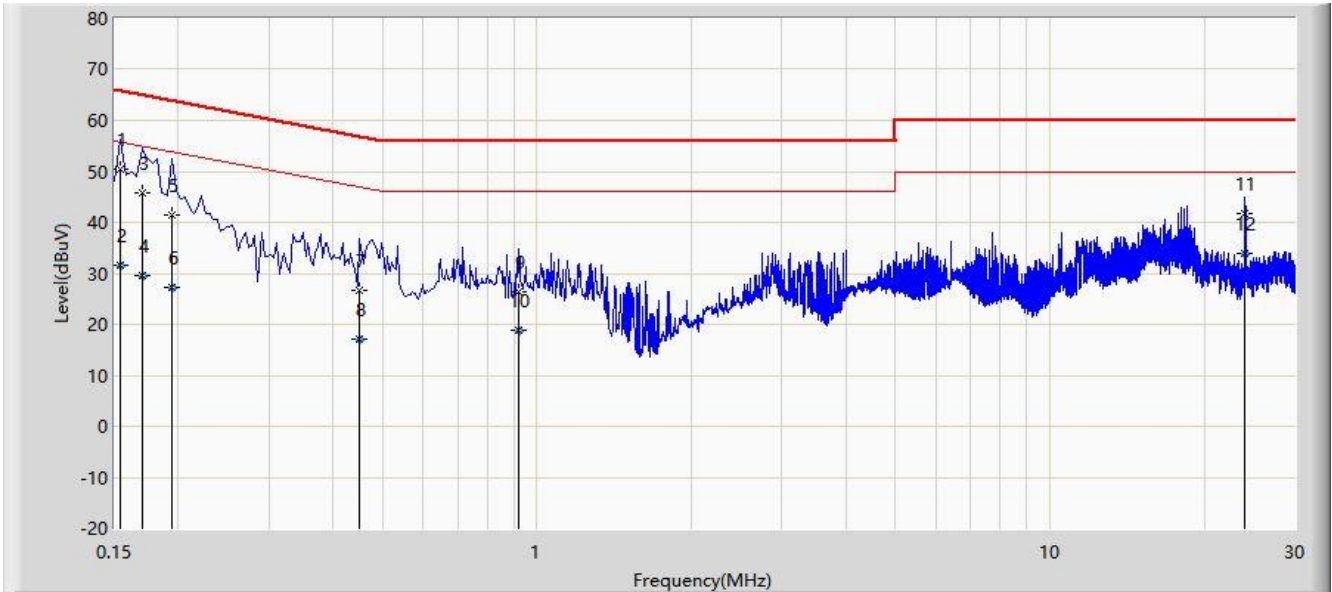


No.	Flag	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1		*	0.154	50.522	40.891	-15.259	65.781	9.631	QP
2			0.154	31.606	21.975	-24.175	55.781	9.631	AV
3			0.170	45.754	36.120	-19.206	64.960	9.634	QP
4			0.170	29.477	19.843	-25.483	54.960	9.634	AV
5			0.194	41.556	31.917	-22.308	63.864	9.639	QP
6			0.194	27.183	17.545	-26.680	53.864	9.639	AV
7			0.450	26.757	17.092	-30.118	56.875	9.665	QP
8			0.450	17.100	7.435	-29.775	46.875	9.665	AV
9			0.922	26.308	16.611	-29.692	56.000	9.697	QP
10			0.922	18.803	9.106	-27.197	46.000	9.697	AV
11			23.998	41.657	30.818	-18.343	60.000	10.840	QP
12			23.998	33.921	23.081	-16.079	50.000	10.840	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Site: WZ-SR2	Time: 2021/07/24 - 13:54
Limit: FCC_Part15.207_CE_AC Power	Engineer: Bruce Wang
Probe: ENV216_101683_Filter Off	Polarity: Neutral
EUT: Rabbit Bluetooth 5 BLE module	Power: By PC
Test Mode: Transmit by BLE 1Mbps at Channel 2402MHz (Rabbit-B)	

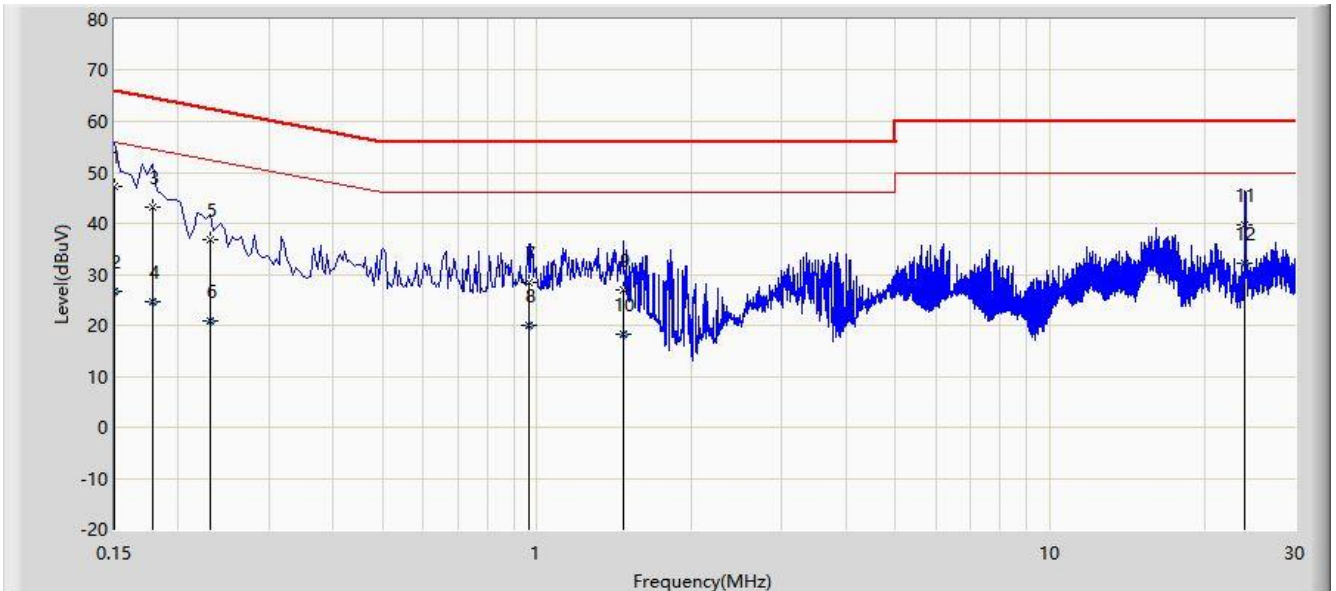

No.	Flag	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1			0.150	47.202	37.572	-18.798	66.000	9.630	QP
2			0.150	26.569	16.939	-29.431	56.000	9.630	AV
3			0.178	43.166	33.530	-21.412	64.578	9.636	QP
4			0.178	24.544	14.908	-30.034	54.578	9.636	AV
5			0.230	36.935	27.291	-25.515	62.450	9.644	QP
6			0.230	20.859	11.216	-31.590	52.450	9.644	AV
7			0.962	28.336	18.628	-27.664	56.000	9.708	QP
8			0.962	19.937	10.229	-26.063	46.000	9.708	AV
9			1.474	27.071	17.361	-28.929	56.000	9.710	QP
10			1.474	18.388	8.678	-27.612	46.000	9.710	AV
11			23.990	39.692	28.799	-20.308	60.000	10.894	QP
12		*	23.990	32.208	21.314	-17.792	50.000	10.894	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

6. CONCLUSION

The data collected relate only the item(s) tested and show that the device is compliance with Part 15C of the FCC rules and ISED rules.

————— The End —————

Appendix A - Test Setup Photograph

Refer to "2107RSU041-UT" file.

Appendix B - EUT Photograph

Refer to " 2107RSU041-UE" file.