

APPLICATION CERTIFICATION FCC Part 15C  
On Behalf of  
Libre Home Inc

In-wall Dimmer  
Model No.: SDWDS, SDWRS

FCC ID: 2AQXA-SDWDS

Prepared for : Libre Home Inc  
Address : 13 Crestview Ter. Montvale, New Jersey, United States 07645

Prepared by : Shenzhen Accurate Technology Co., Ltd.  
Address : 1/F., Building A, Changyuan New Material Port, Science & Industry  
Park, Nanshan District, Shenzhen, Guangdong, P.R. China

Tel: (0755) 26503290  
Fax: (0755) 26503396

Report No. : ATE20181589  
Date of Test : August 28-August 29, 2018  
Date of Report : Sep. 1, 2018

## TABLE OF CONTENTS

Description	Page
Test Report Certification	
<b>1. GENERAL INFORMATION .....</b>	<b>5</b>
1.1. Description of Device (EUT).....	5
1.2. Carrier Frequency of Channels.....	5
1.3. Special Accessory and Auxiliary Equipment .....	6
1.4. Description of Test Facility .....	6
1.5. Measurement Uncertainty.....	6
<b>2. MEASURING DEVICE AND TEST EQUIPMENT .....</b>	<b>7</b>
<b>3. OPERATION OF EUT DURING TESTING .....</b>	<b>8</b>
3.1. Operating Mode.....	8
3.2. Configuration and peripherals .....	8
<b>4. TEST PROCEDURES AND RESULTS .....</b>	<b>9</b>
<b>5. 6DB BANDWIDTH TEST.....</b>	<b>10</b>
5.1. Block Diagram of Test Setup.....	10
5.2. The Requirement For Section 15.247(a)(2).....	10
5.3. EUT Configuration on Measurement .....	10
5.4. Operating Condition of EUT .....	10
5.5. Test Procedure .....	10
5.6. Test Result .....	11
<b>6. MAXIMUM PEAK OUTPUT POWER TEST .....</b>	<b>13</b>
6.1. Block Diagram of Test Setup.....	13
6.2. The Requirement For Section 15.247(b)(3).....	13
6.3. EUT Configuration on Measurement .....	13
6.4. Operating Condition of EUT .....	13
6.5. Test Procedure .....	13
6.6. Test Result .....	14
<b>7. POWER SPECTRAL DENSITY TEST.....</b>	<b>16</b>
7.1. Block Diagram of Test Setup.....	16
7.2. The Requirement For Section 15.247(e).....	16
7.3. EUT Configuration on Measurement .....	16
7.4. Operating Condition of EUT .....	16
7.5. Test Procedure .....	17
7.6. Test Result .....	17
<b>8. BAND EDGE COMPLIANCE TEST .....</b>	<b>20</b>
8.1. Block Diagram of Test Setup.....	20
8.2. The Requirement For Section 15.247(d) .....	20
8.3. EUT Configuration on Measurement .....	20
8.4. Operating Condition of EUT .....	20
8.5. Test Procedure .....	21
8.6. Test Result .....	21
<b>9. RADIATED SPURIOUS EMISSION TEST .....</b>	<b>27</b>
9.1. Block Diagram of Test Setup.....	27
9.2. The Limit For Section 15.247(d) .....	28
9.3. Restricted bands of operation .....	29
9.4. Configuration of EUT on Measurement .....	29

9.5.	Operating Condition of EUT .....	30
9.6.	Test Procedure .....	30
9.7.	Data Sample.....	31
9.8.	The Field Strength of Radiation Emission Measurement Results .....	31
<b>10.</b>	<b>AC POWER LINE CONDUCTED EMISSION TEST .....</b>	<b>44</b>
10.1.	Block Diagram of Test Setup.....	44
10.2.	Test System Setup.....	44
10.3.	Power Line Conducted Emission Measurement Limits.....	45
10.4.	Configuration of EUT on Measurement .....	45
10.5.	Operating Condition of EUT .....	45
10.6.	Test Procedure .....	45
10.7.	Data Sample.....	46
10.8.	Power Line Conducted Emission Measurement Results .....	46
<b>11.</b>	<b>ANTENNA REQUIREMENT.....</b>	<b>49</b>
11.1.	The Requirement .....	49
11.2.	Antenna Construction .....	49

## Test Report Certification

Applicant : Libre Home Inc  
EUT Description : In-wall Dimmer  
Model No. : SDWDS, SDWRS  
Trade Name : Libre Home

Measurement Procedure Used:

**FCC Rules and Regulations Part 15 Subpart C Section 15.247  
ANSI C63.10: 2013**

The EUT was tested according to DTS test procedure of August 24, 2018 KDB558074 D01 DTS Meas Guidance v05 for compliance to FCC 47CFR 15.247 requirements

The device described above is tested by Shenzhen Accurate Technology Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.247 limits. The measurement results are contained in this test report and Shenzhen Accurate Technology Co., Ltd. is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Shenzhen Accurate Technology Co., Ltd.

Date of Test : August 28-August 29, 2018  
Date of Report : Sep. 1, 2018  
(Star Yang, Engineer)

Prepared by : \_\_\_\_\_  
(Star Yang, Engineer)

Approved & Authorized Signer : \_\_\_\_\_  
(Sean Liu, Manager)



# 1. GENERAL INFORMATION

## 1.1. Description of Device (EUT)

EUT : In-wall Dimmer

Model Number : SDWDS, SDWRS  
 (Note: We hereby state that these models are identical in interior structure, electrical circuits and components, only different in model number, Therefore, only model SDWDS is for tests.)

Radio Device : ZigBee

Modulation Type : OQPSK

Frequency Range : 2405-2480MHz

Number of Channels : 16

Channel Spacing : 5MHz

Antenna Gain : 2.8dBi

Antenna Type : Integral Antenna

Power Supply : AC 120V/60Hz

Max Loading Rate : 750W

Applicant : Libre Home Inc

Address : 13 Crestview Ter. Montvale, New Jersey, United States  
 07645

## 1.2. Carrier Frequency of Channels

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
11	2405	17	2435	23	2465
12	2410	18	2440	24	2470
13	2415	19	2445	25	2475
14	2420	20	2450	26	2480
15	2425	21	2455		
16	2430	22	2460		

### 1.3.Special Accessory and Auxiliary Equipment

N/A

### 1.4.Description of Test Facility

EMC Lab	:	Recognition of accreditation by Federal Communications Commission (FCC) The Designation Number is CN1189 The Registration Number is 708358
		Listed by Innovation, Science and Economic Development Canada (ISED) The Registration Number is 5077A-2
		Accredited by China National Accreditation Service for Conformity Assessment (CNAS) The Registration Number is CNAS L3193
		Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 4297.01
Name of Firm	:	Shenzhen Accurate Technology Co., Ltd.
Site Location	:	1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China

### 1.5.Measurement Uncertainty

Conducted Emission Expanded Uncertainty	=	2.23dB, k=2
Radiated emission expanded uncertainty (9kHz-30MHz)	=	3.08dB, k=2
Radiated emission expanded uncertainty (30MHz-1000MHz)	=	4.42dB, k=2
Radiated emission expanded uncertainty (Above 1GHz)	=	4.06dB, k=2

## 2. MEASURING DEVICE AND TEST EQUIPMENT

**Table 1: List of Test and Measurement Equipment**

Kind of equipment	Manufacturer	Type	S/N	Calibrated dates	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	Jan. 06, 2018	1 Year
EMI Test Receiver	Rohde&Schwarz	ESR	101817	Jan. 06, 2018	1 Year
Spectrum Analyzer	Agilent	FSV-40	101495	Jan. 06, 2018	1 Year
Pre-Amplifier	Rohde&Schwarz	CBLU1183540-01	3791	Jan. 06, 2018	1 Year
Loop Antenna	Schwarzbeck	FMZB1516	1516131	Jan. 06, 2018	1 Year
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Jan. 06, 2018	1 Year
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	Jan. 06, 2018	1 Year
Horn Antenna	Schwarzbeck	BBHA9170	9170-359	Jan. 06, 2018	1 Year
LISN	Rohde&Schwarz	ESH3-Z5	100305	Jan. 06, 2018	1 Year
LISN	Schwarzbeck	NSLK8126	8126431	Jan. 06, 2018	1 Year
Highpass Filter	Wainwright Instruments	WHKX3.6/18G-10S	N/A	Jan. 06, 2018	1 Year
Band Reject Filter	Wainwright Instruments	WRCG2400/2485-2375/2510-60/11SS	N/A	Jan. 06, 2018	1 Year

### 3. OPERATION OF EUT DURING TESTING

#### 3.1. Operating Mode

The mode is used: **Transmitting mode**


Low Channel: 2405MHz

Middle Channel: 2450MHz

High Channel: 2480MHz

Its duty cycle setting is greater than 98%.

#### 3.2. Configuration and peripherals

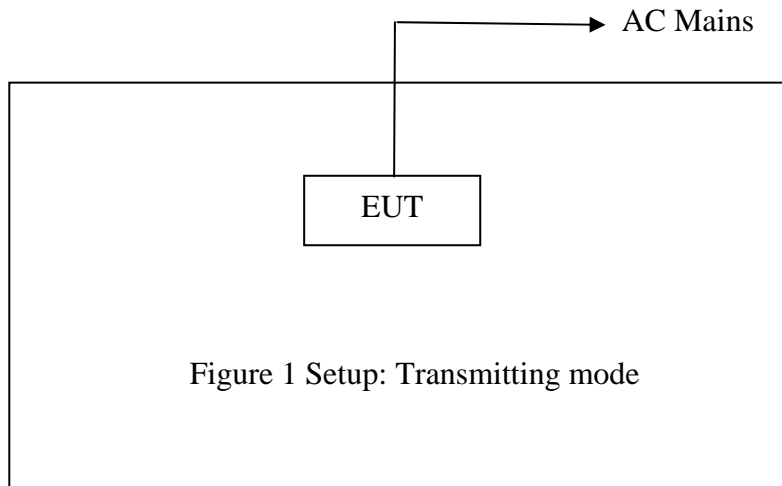




#### 4. TEST PROCEDURES AND RESULTS

<b>FCC Rules</b>	<b>Description of Test</b>	<b>Result</b>
Section 15.247(a)(2)	6dB Bandwidth Test	Compliant
Section 15.247(b)(3)	Maximum Peak Output Power Test	Compliant
Section 15.247(e)	Power Spectral Density Test	Compliant
Section 15.247(d)	Band Edge Compliance Test	Compliant
Section 15.247(d) Section 15.209	Radiated Spurious Emission Test	Compliant
Section 15.207	AC Power Line Conducted Emission Test	Compliant
Section 15.203	Antenna Requirement	Compliant

## 5. 6DB BANDWIDTH TEST

### 5.1. Block Diagram of Test Setup

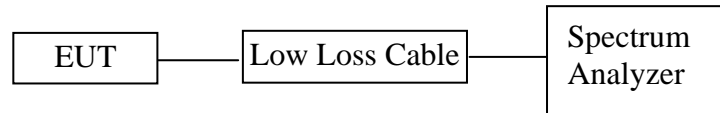

### 5.2. The Requirement For Section 15.247(a)(2)

Section 15.247(a)(2): Systems using digital modulation techniques may operate in the 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 5.3. EUT Configuration on Measurement

The equipment is installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 5.4. Operating Condition of EUT

5.4.1. Setup the EUT and simulator as shown as Section 5.1.

5.4.2. Turn on the power of all equipment.

5.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2405-2480MHz. We select 2405MHz, 2450MHz, and 2480MHz TX frequency to transmit.

### 5.5. Test Procedure

5.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

5.5.2. Set RBW of spectrum analyzer to 100 kHz and VBW to 300 kHz.

5.5.3. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.


### 5.6. Test Result

Test Lab: Shielding room

Test Engineer: Star


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit(MHz)	Result
11	2405	1.621	0.5	PASS
20	2450	1.628	0.5	PASS
26	2480	1.643	0.5	PASS

The spectrum analyzer plots are attached as below.

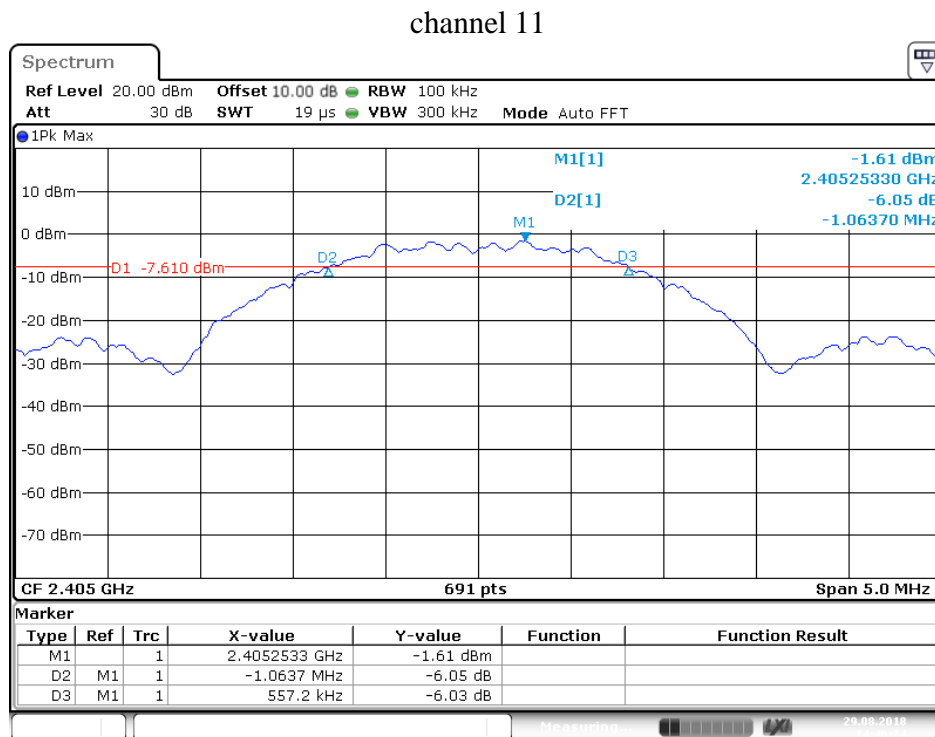


Date: 29.AUG.2018 14:46:25

### channel 20

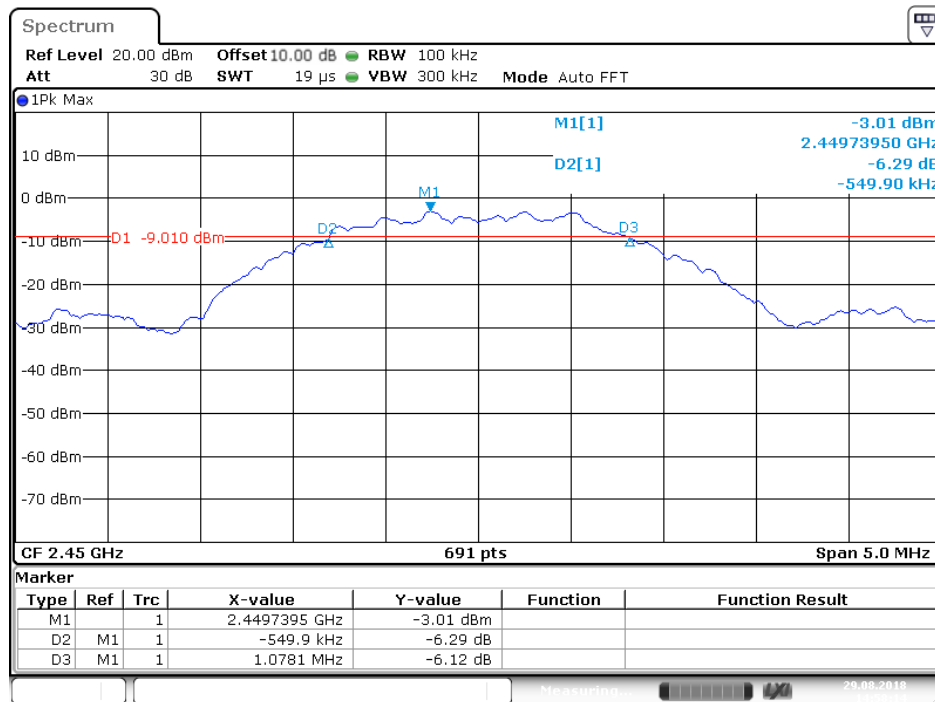

Date: 29.AUG.2018 14:58:14


### channel 26

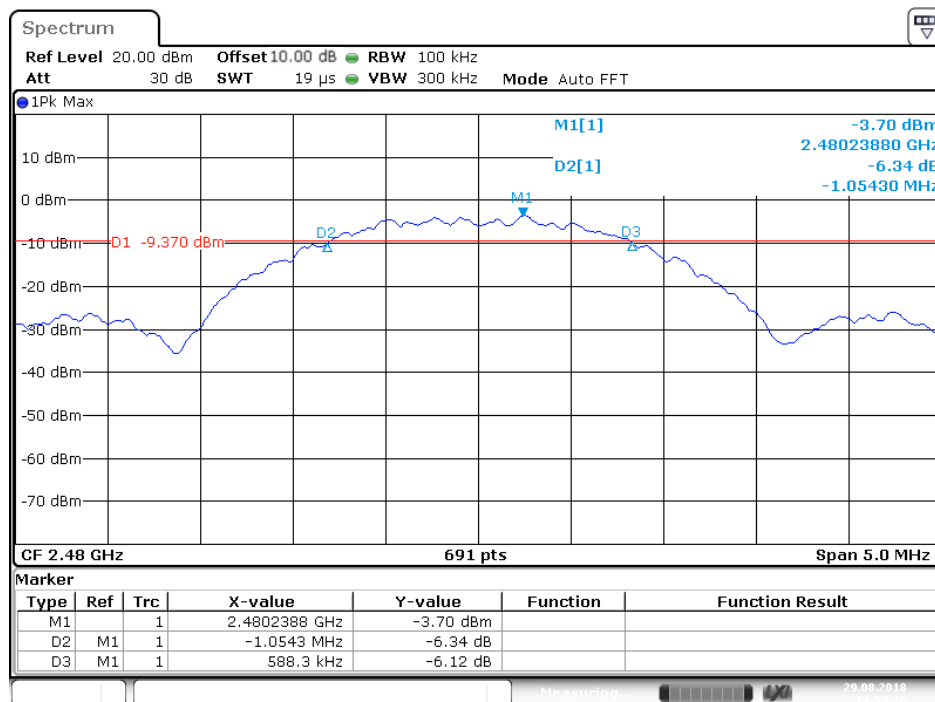

Date: 29.AUG.2018 14:53:27

## 6. MAXIMUM PEAK OUTPUT POWER TEST

### 6.1. Block Diagram of Test Setup

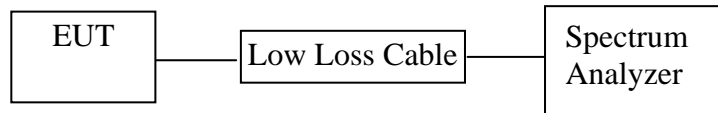

### 6.2. The Requirement For Section 15.247(b)(3)

Section 15.247(b)(3): For systems using digital modulation in the 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz bands: 1 Watt.

### 6.3. EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 6.4. Operating Condition of EUT

6.4.1. Setup the EUT and simulator as shown as Section 6.1.

6.4.2. Turn on the power of all equipment.

6.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2405-2480MHz. We select 2405MHz, 2450MHz, and 2480MHz TX frequency to transmit.

### 6.5. Test Procedure

6.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

6.5.2. Set RBW of spectrum analyzer to 1 MHz and VBW to 3MHz.

6.5.3. Measurement the maximum peak output power.

### 6.6. Test Result


Test Lab: Shielding room

Test Engineer: Star

Channel	Frequency (MHz)	Peak Power Output (dBm)	Peak Power Limit (dBm)	Result
11	2405	0.29	30	PASS
20	2450	-1.45	30	PASS
26	2480	-1.62	30	PASS


The spectrum analyzer plots are attached as below.

channel 11

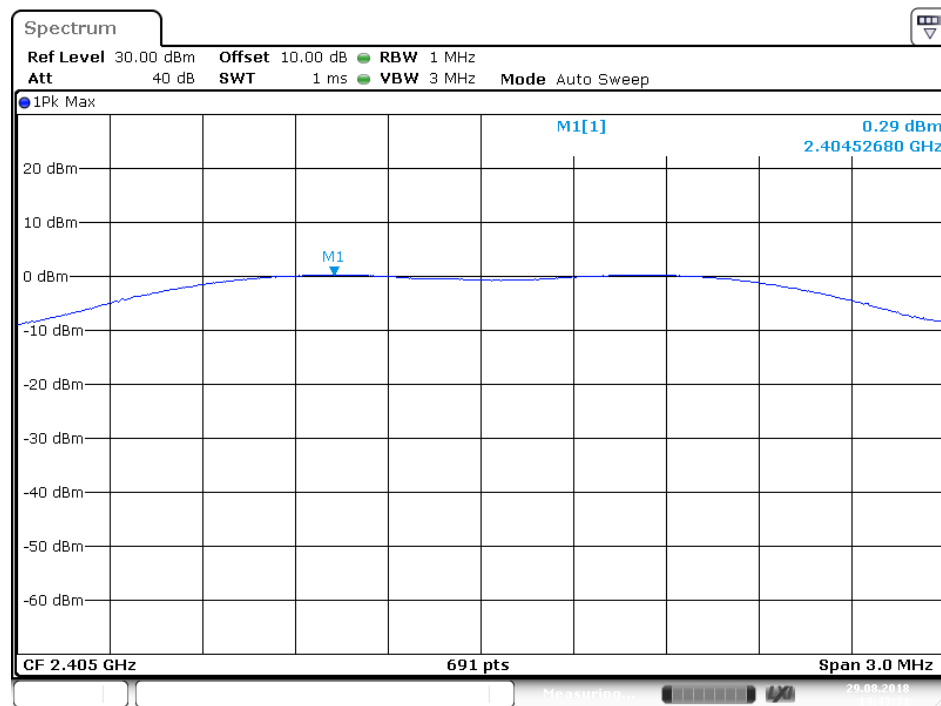


Date: 29.AUG.2018 14:43:32

### channel 20

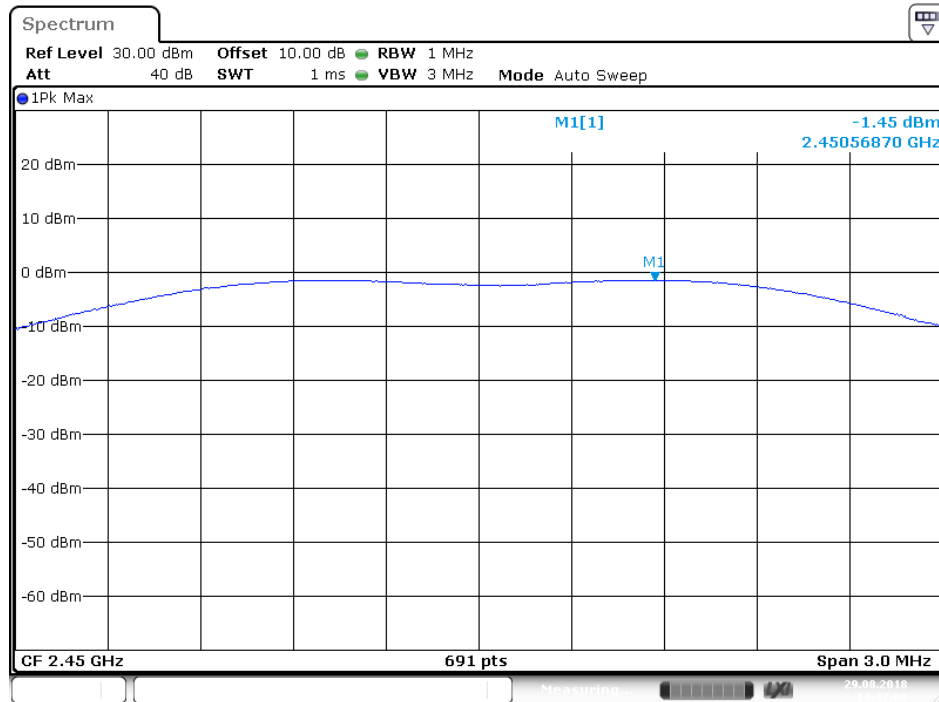

Date: 29.AUG.2018 14:42:00


### channel 26

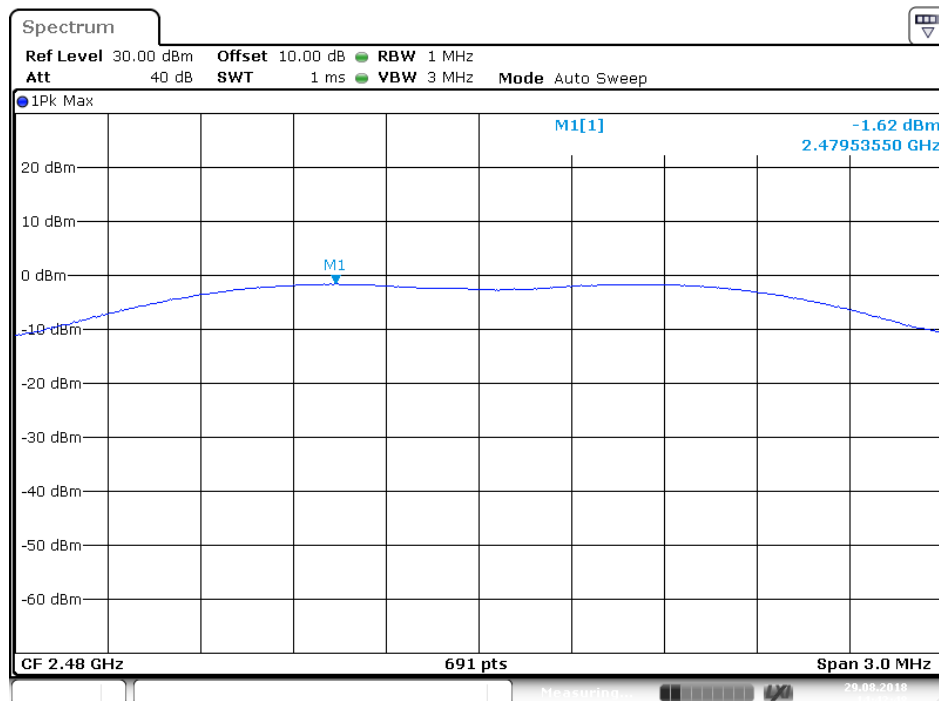

Date: 29.AUG.2018 14:42:48

## 7. POWER SPECTRAL DENSITY TEST

### 7.1. Block Diagram of Test Setup

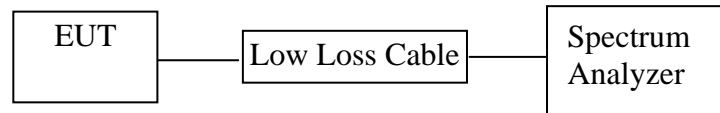

### 7.2. The Requirement For Section 15.247(e)

Section 15.247(e): For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 7.3. EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 7.4. Operating Condition of EUT

7.4.1. Setup the EUT and simulator as shown as Section 7.1.

7.4.2. Turn on the power of all equipment.

7.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2405-2480MHz. We select 2405MHz, 2450MHz, and 2480MHz TX frequency to transmit.



### 7.5. Test Procedure

7.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

7.5.2. Measurement Procedure PKPSD:

7.5.3. This procedure must be used if maximum peak conducted output power was used to demonstrate compliance to the fundamental output power limit, and is optional if the maximum (average) conducted output power was used to demonstrate compliance.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
4. Set the VBW  $\geq 3 \times \text{RBW}$ .
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3kHz) and repeat.

7.5.4. Measurement the maximum power spectral density.

### 7.6. Test Result


Test Lab: Shielding room

Test Engineer: Star

Channel	Frequency (MHz)	PSD (dBm/3KHz)	Limit (dBm/3KHz)	Result
11	2405	-10.12	8	PASS
20	2450	-11.74	8	PASS
26	2480	-12.34	8	PASS


The spectrum analyzer plots are attached as below.

## channel 11

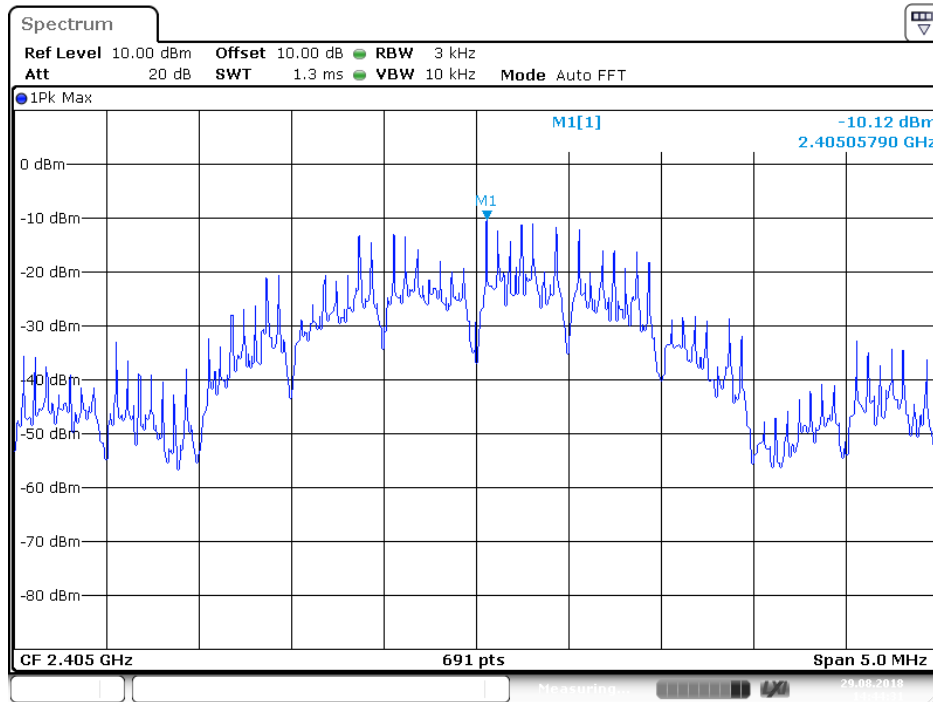


Date: 29.AUG.2018 14:44:31

## channel 20

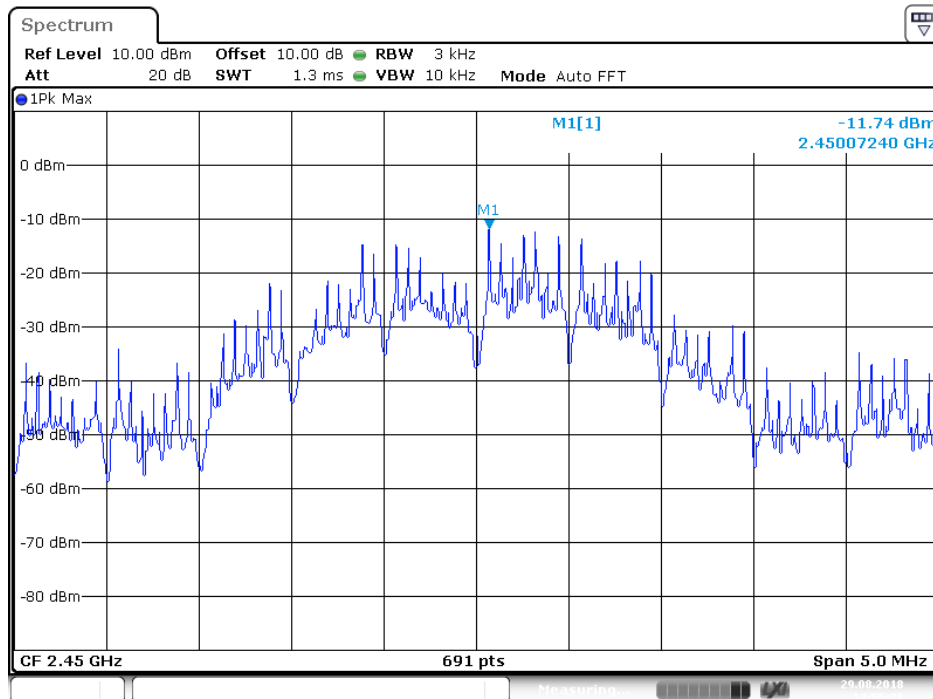

Date: 29.AUG.2018 14:56:22


channel 26

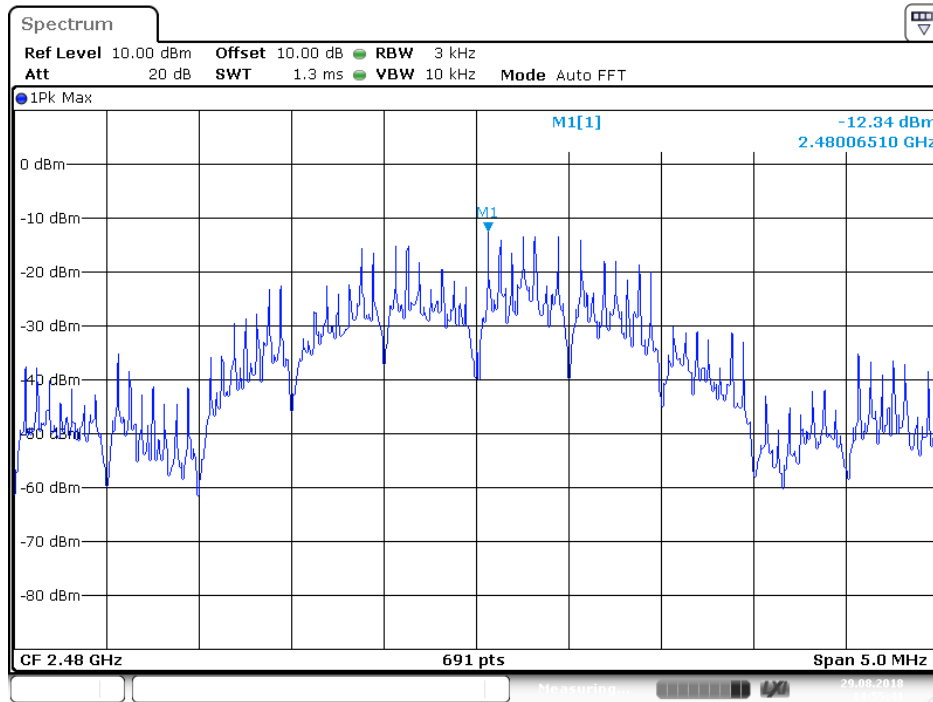

Date: 29.AUG.2018 14:55:41

## 8. BAND EDGE COMPLIANCE TEST

### 8.1. Block Diagram of Test Setup

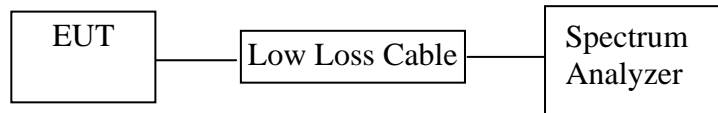

### 8.2. The Requirement For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

### 8.3. EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 8.4. Operating Condition of EUT

8.4.1. Setup the EUT and simulator as shown as Section 8.1.

8.4.2. Turn on the power of all equipment.

8.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2405-2480MHz. We select 2405MHz, 2480MHz TX frequency to transmit.

## 8.5. Test Procedure

### Conducted Band Edge:

8.5.1. The transmitter output was connected to the spectrum analyzer via a low loss cable.

8.5.2. Set RBW of spectrum analyzer to 100 kHz and VBW to 300 kHz.

### Radiate Band Edge:

8.5.3. The EUT is placed on a turntable, which is 1.5m above the ground plane and worked at highest radiated power.

8.5.4. The turntable was rotated for 360 degrees to determine the position of maximum emission level.

8.5.5. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.

8.5.6. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:

8.5.7. RBW=1MHz, VBW=1MHz

8.5.8. The band edges was measured and recorded.

## 8.6. Test Result

**Pass.**

Test Lab: Shielding room


Test Engineer: Star

### Conducted Band Edge Result

Channel	Frequency	Delta peak to band emission	Limit(dBc)
11	2.405GHz	51.70	> 20
26	2.480GHz	50.31	> 20


The spectrum analyzer plots are attached as below.

channel 11

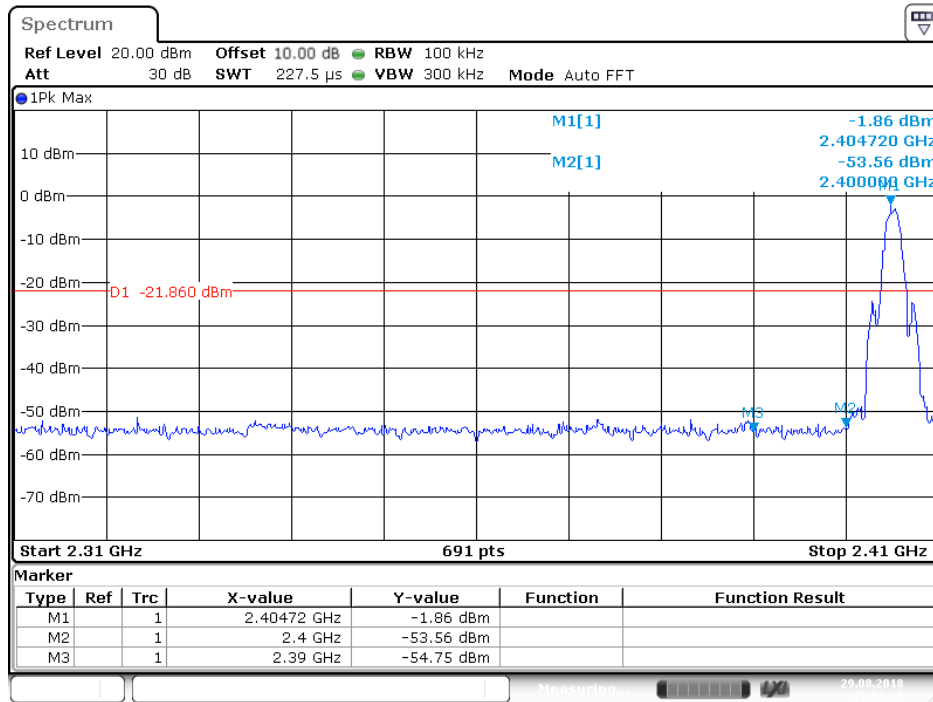

Date: 29.AUG.2018 15:01:29

channel 26

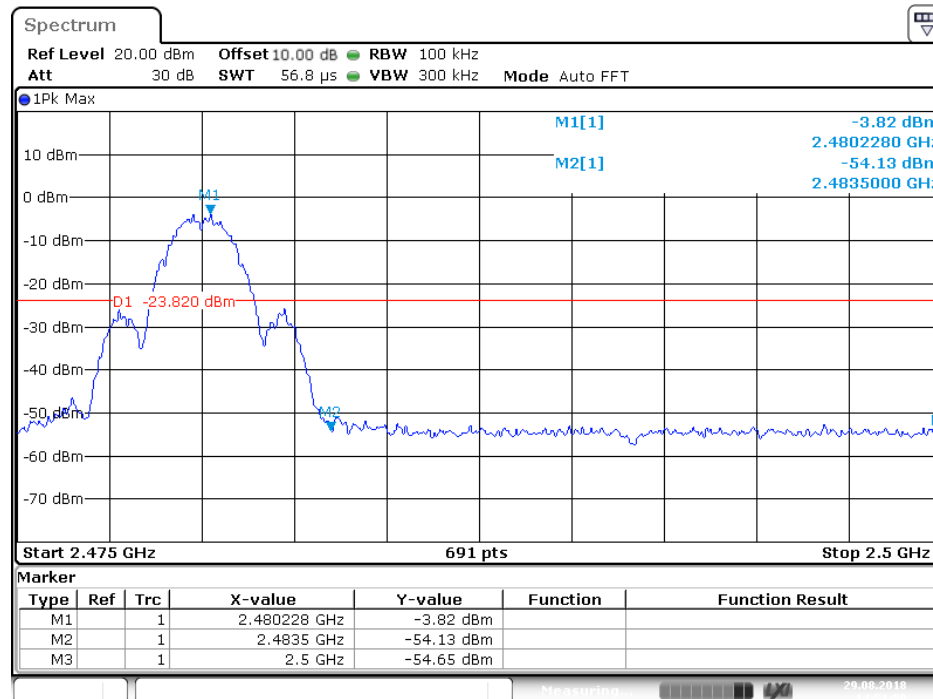

Date: 29.AUG.2018 14:51:50


**Radiated Band Edge Result**
**ACCURATE TECHNOLOGY CO., LTD.**


 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

 Job No.: STAR2016 #2741  
 Standard: FCC PART 15C 3M Radiated  
 Test item: Radiation Test  
 Temp.( C)/Hum.(%) 23 C / 48 %  
 EUT: In-wall Dimmer  
 Mode: TX 2405MHz  
 Model: SDWDS  
 Manufacturer: Libre Home Inc

 Polarization: Horizontal  
 Power Source: AC 120V/60Hz  
 Date: 18/08/28/  
 Time: 14/02/39  
 Engineer Signature: star  
 Distance: 3m

Note: Report No.: ATE20181589

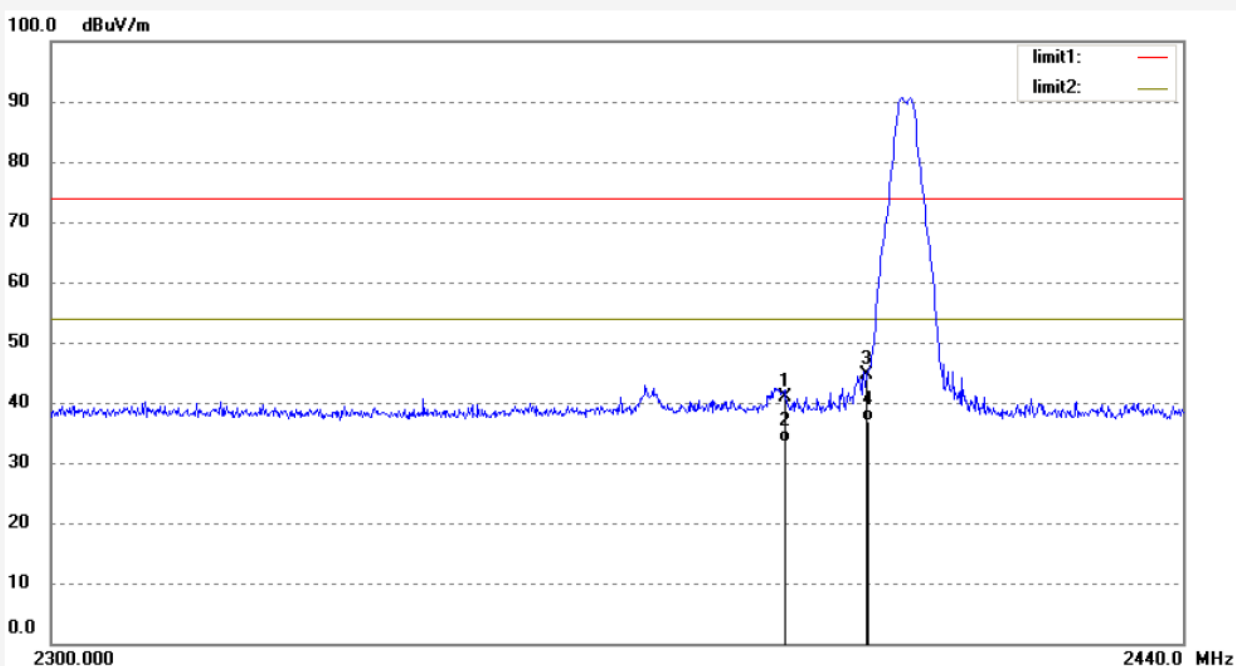


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	40.16	0.79	40.95	74.00	-33.05	peak	200	215	
2	2390.000	32.69	0.79	33.48	54.00	-20.52	AVG	200	332	
3	2400.000	43.69	0.88	44.57	74.00	-29.43	peak	200	62	
4	2400.000	36.01	0.88	36.89	54.00	-17.11	AVG	200	114	

Job No.: STAR2016 #2742  
 Standard: FCC PART 15C 3M Radiated  
 Test item: Radiation Test  
 Temp.( C)/Hum.(%) 23 C / 48 %  
 EUT: In-wall Dimmer  
 Mode: TX 2405MHz  
 Model: SDWDS  
 Manufacturer: Libre Home Inc

Polarization: Vertical  
 Power Source: AC 120V/60Hz  
 Date: 18/08/28/  
 Time: 14/03/58  
 Engineer Signature: star  
 Distance: 3m

Note: Report No.: ATE20181589

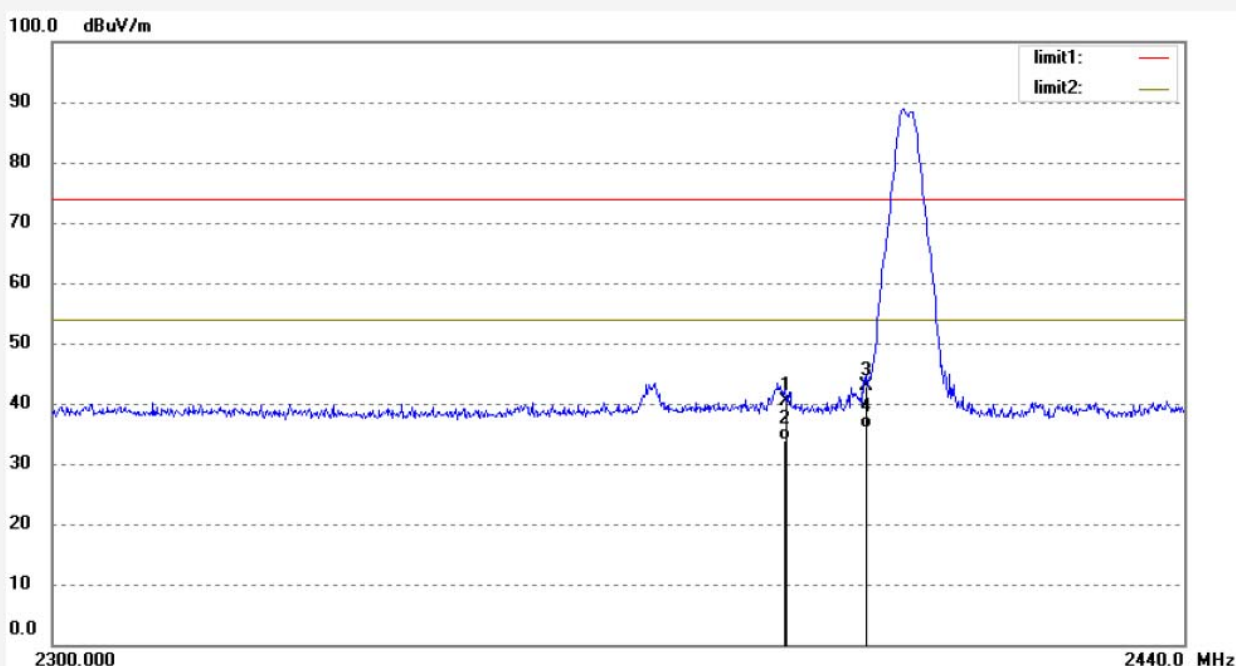


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	39.55	0.79	40.34	74.00	-33.66	peak	150	99	
2	2390.000	33.14	0.79	33.93	54.00	-20.07	AVG	150	112	
3	2400.000	41.94	0.88	42.82	74.00	-31.18	peak	150	107	
4	2400.000	34.90	0.88	35.78	54.00	-18.22	AVG	150	52	



Job No.: STAR2016 #2740  
Standard: FCC PART 15C 3M Radiated  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 23 C / 48 %  
EUT: In-wall Dimmer  
Mode: TX 2480MHz  
Model: SDWDS  
Manufacturer: Libre Home Inc

Polarization: Horizontal  
Power Source: AC 120V/60Hz  
Date: 18/08/28/  
Time: 13/58/25  
Engineer Signature: star  
Distance: 3m

Note: Report No.: ATE20181589

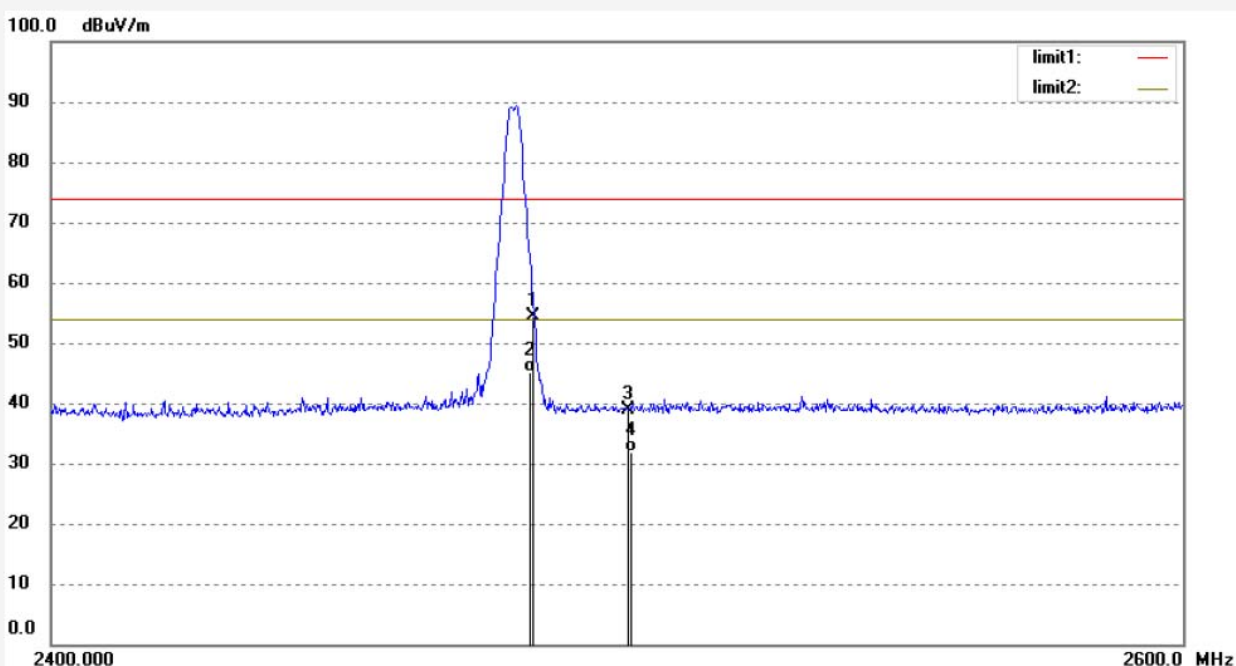

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	53.32	1.10	54.42	74.00	-19.58	peak	200	110	
2	2483.500	44.10	1.10	45.20	54.00	-8.80	AVG	200	112	
3	2500.000	37.72	1.10	38.82	74.00	-35.18	peak	200	194	
4	2500.000	30.78	1.10	31.88	54.00	-22.12	AVG	200	170	



**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR2016 #2739

Standard: FCC PART 15C 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: In-wall Dimmer

Mode: TX 2480MHz

Model: SDWDS

Manufacturer: Libre Home Inc

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 18/08/28/

Time: 13/57/06

Engineer Signature: star

Distance: 3m

Note: Report No.: ATE20181589

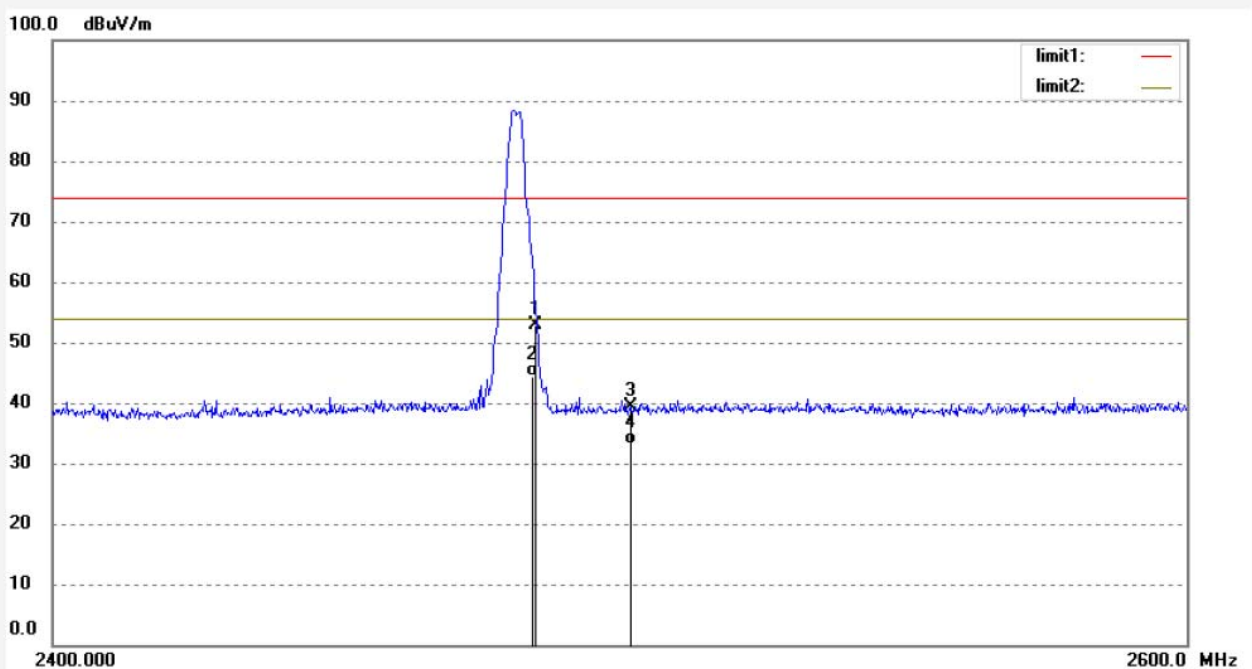

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	51.88	1.10	52.98	74.00	-21.02	peak	150	40	
2	2483.500	43.28	1.10	44.38	54.00	-9.62	AVG	150	247	
3	2500.000	38.18	1.10	39.28	74.00	-34.72	peak	150	209	
4	2500.000	31.92	1.10	33.02	54.00	-20.98	AVG	150	140	

Note:


1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

## 9. RADIATED SPURIOUS EMISSION TEST

### 9.1. Block Diagram of Test Setup


#### 9.1.1. Block diagram of connection between the EUT and peripherals

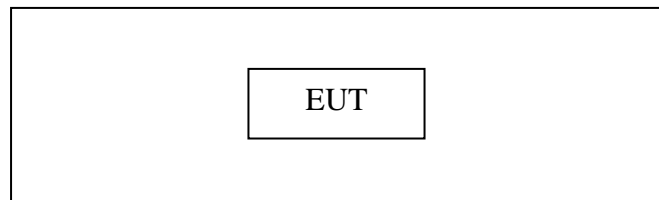


Setup: Transmitting mode

#### 9.1.2. Semi-Anechoic Chamber Test Setup Diagram


(A) Radiated Emission Test Set-Up, Frequency below 30MHz

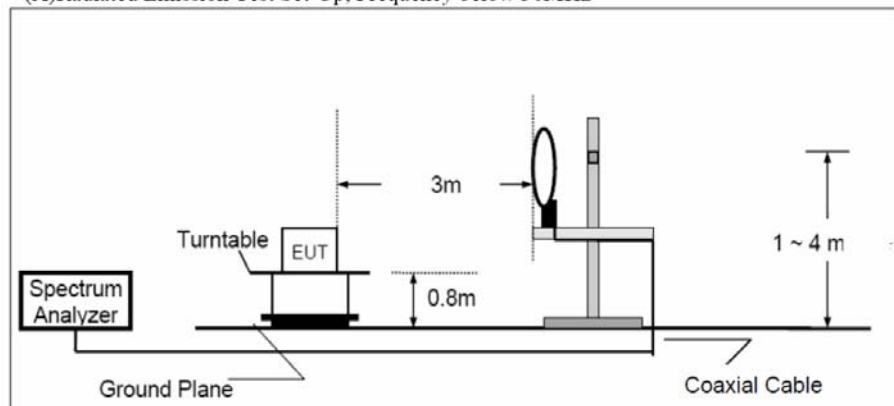

(B) Radiated Emission Test Set-Up, Frequency 30MHz-1GHz

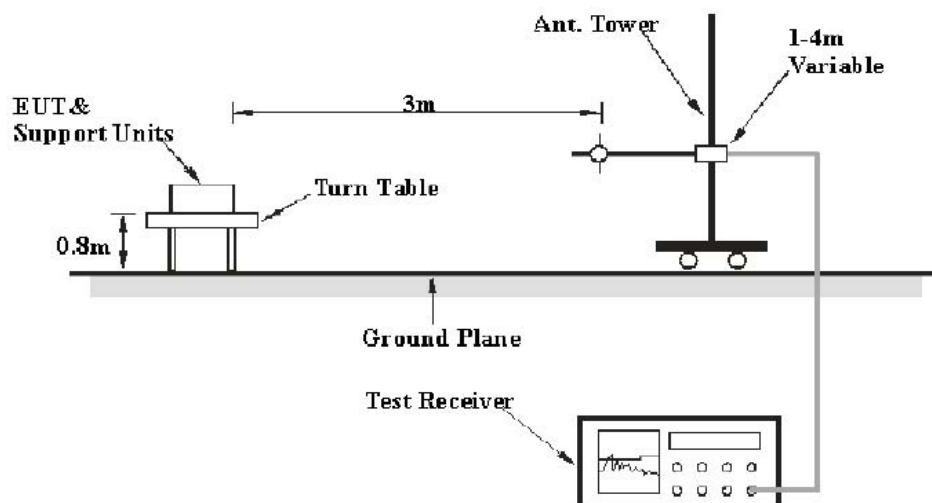

(C) Radiated Emission Test Set-Up, Frequency above 1GHz

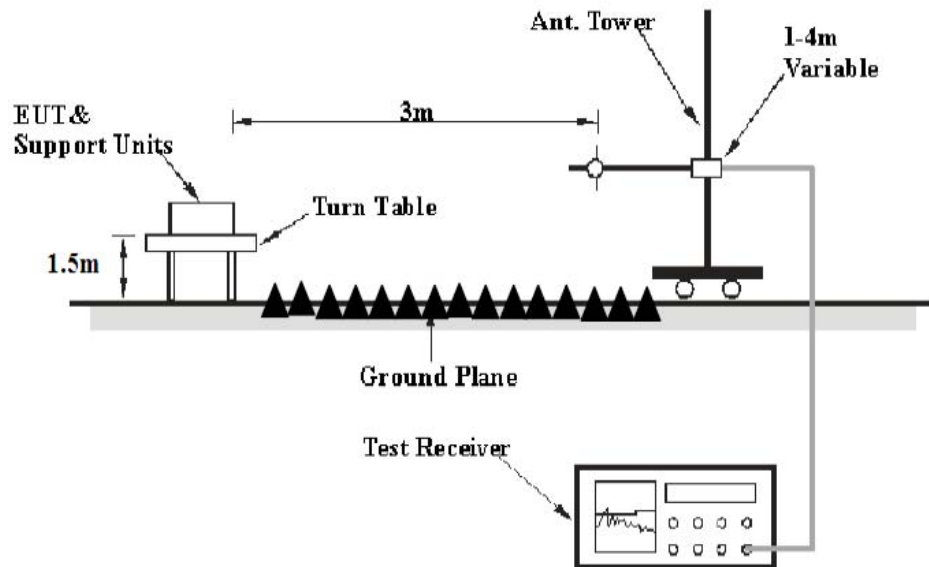

## 9.2. The Limit For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

### 9.3. Restricted bands of operation

#### 9.3.1.FCC Part 15.205 Restricted bands of operation

(a) Except as shown in paragraph (d) of this section, Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
<sup>1</sup> 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
13.36-13.41			

<sup>1</sup>Until February 1, 1999, this restricted band shall be 0.490-0.510

<sup>2</sup>Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emission appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000MHz, Compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

### 9.4.Configuration of EUT on Measurement

The equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

## 9.5. Operating Condition of EUT

9.5.1. Setup the EUT and simulator as shown as Section 9.1.

9.5.2. Turn on the power of all equipment.

9.5.3. Let the EUT work in TX modes measure it. The transmit frequency are 2405-2480MHz. We select 2405MHz, 2450MHz, and 2480MHz TX frequency to transmit.

## 9.6. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground (Below 1GHz). The EUT and its simulators are placed on a turntable, which is 1.5 meter high above ground (Above 1GHz). The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bi-log antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the EUT location must be manipulated according to ANSI C63.10:2013 on radiated emission measurement. This EUT was tested in 3 orthogonal positions and the worst case position data was reported.

The bandwidth of test receiver is set at 9 kHz in below 30MHz. and set at 120 kHz in 30-1000MHz, and 1MHz in above 1000MHz.

The final measurement in band 9-90 kHz, 110-490 kHz and above 1000MHz is performed with Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector. The field strength is calculated by adding the antenna factor, and cable loss, and subtracting the amplifier gain from the measured reading.

### 9.7.Data Sample

Frequency (MHz)	Reading (dB $\mu$ v)	Factor (dB/m)	Result (dB $\mu$ v/m)	Limit (dB $\mu$ v/m)	Margin (dB)	Remark
X.XX	43.85	-22.22	21.63	43.5	-21.87	QP

Frequency(MHz) = Emission frequency in MHz

Reading(dB $\mu$ v) = Uncorrected Analyzer/Receiver reading

Factor (dB/m) = Antenna factor + Cable Loss – Amplifier gain

Result(dB $\mu$ v/m) = Reading(dB $\mu$ v) + Factor(dB/m)

Limit (dB $\mu$ v/m) = Limit stated in standard

Margin (dB) = Result(dB $\mu$ v/m) - Limit (dB $\mu$ v/m)

QP = Quasi-peak Reading

Calculation Formula:

Margin(dB) = Result (dB $\mu$ V/m)–Limit(dB $\mu$ V/m)

Result(dB $\mu$ V/m)= Reading(dB $\mu$ V)+ Factor(dB/m)

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the limit.

### 9.8.The Field Strength of Radiation Emission Measurement Results

**Pass.**

Test Lab: 3m Anechoic chamber

Test Engineer: Star

The frequency range from 9kHz to 26.5GHz is checked.

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.

2. \*: Denotes restricted band of operation.

3. The radiation emissions from 9kHz-30MHz and 18-26.5GHz are not reported, because the test values lower than the limits of 20dB.

The spectrum analyzer plots are attached as below.

## Below 1GHz


**ACCURATE TECHNOLOGY CO., LTD.**

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR2016 #2743

Standard: FCC PART 15C 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: In-wall Dimmer

Mode: TX 2405MHz

Model: SDWDS

Manufacturer: Libre Home Inc

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 18/08/28/

Time: 14/24/41

Engineer Signature: star

Distance: 3m

Note: Report No.: ATE20181589

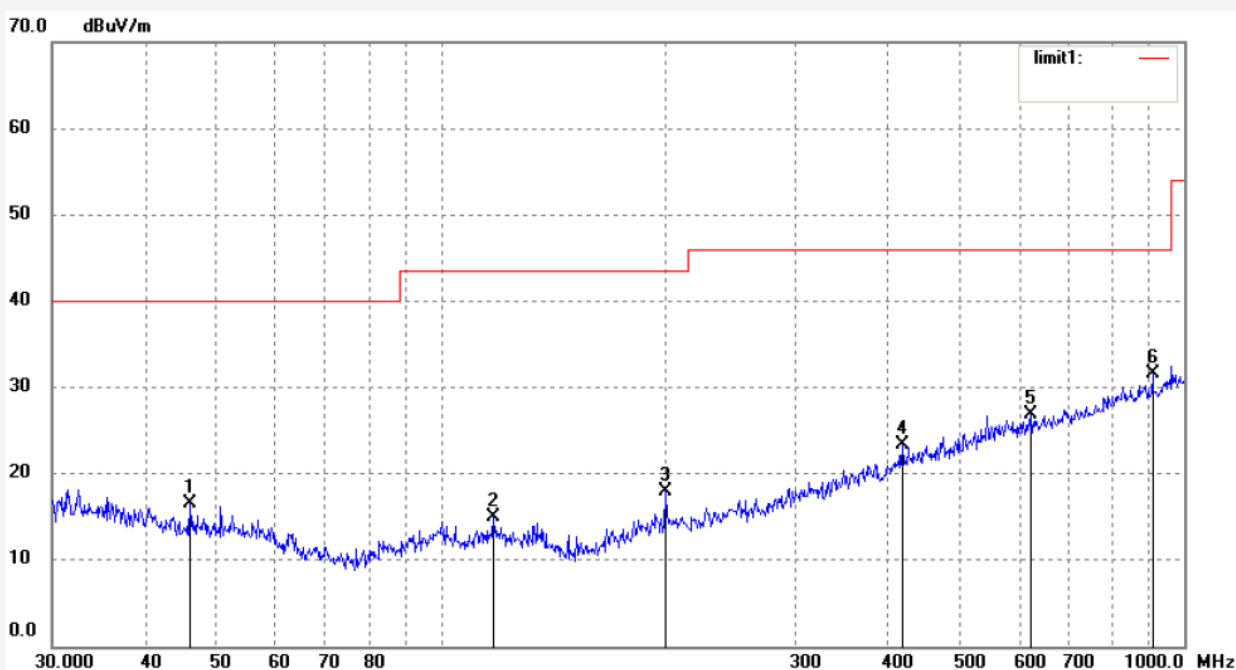

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	46.0162	29.20	-12.60	16.60	40.00	-23.40	peak	100	13	
2	117.7724	28.09	-13.05	15.04	43.50	-28.46	peak	100	211	
3	200.6880	30.11	-12.25	17.86	43.50	-25.64	peak	100	307	
4	417.6409	29.28	-5.87	23.41	46.00	-22.59	peak	100	144	
5	622.8899	28.83	-2.04	26.79	46.00	-19.21	peak	100	55	
6	906.4823	29.29	2.22	31.51	46.00	-14.49	peak	100	101	



Job No.: STAR2016 #2744

Polarization: Vertical

Standard: FCC PART 15C 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 18/08/28/

Temp.( C)/Hum.(%) 23 C / 48 %

Time: 14/25/28

EUT: In-wall Dimmer

Engineer Signature: star


Mode: TX 2405MHz

Distance: 3m

Model: SDWDS

Manufacturer: Libre Home Inc

Note: Report No.: ATE20181589

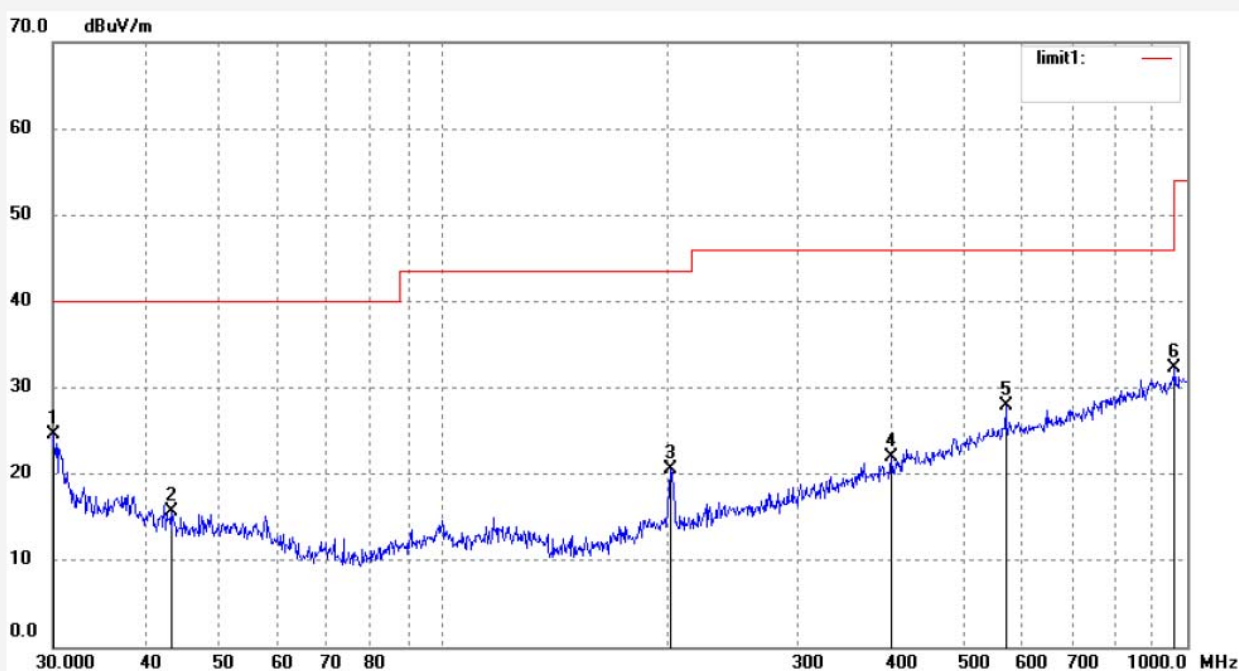

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	30.0000	33.54	-8.93	24.61	40.00	-15.39	peak	100	200	
2	43.3534	27.95	-12.27	15.68	40.00	-24.32	peak	100	179	
3	202.1005	32.78	-12.21	20.57	43.50	-22.93	peak	100	82	
4	400.4319	28.30	-6.42	21.88	46.00	-24.12	peak	100	174	
5	570.6100	30.61	-2.74	27.87	46.00	-18.13	peak	100	192	
6	962.1623	28.90	3.33	32.23	54.00	-21.77	peak	100	133	

Job No.: STAR2016 #2746

Standard: FCC PART 15C 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: In-wall Dimmer

Mode: TX 2450MHz

Model: SDWDS

Manufacturer: Libre Home Inc

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 18/08/28/

Time: 14/28/00

Engineer Signature: star

Distance: 3m

Note: Report No.: ATE20181589

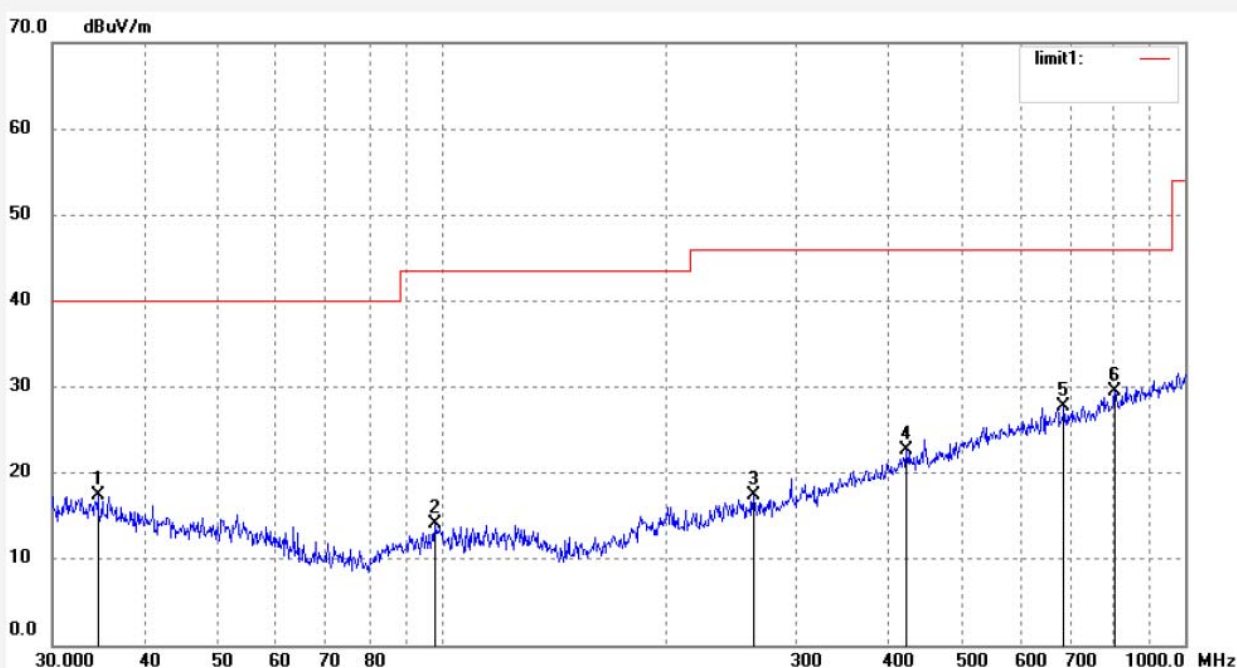

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	34.5173	27.83	-10.37	17.46	40.00	-22.54	peak	100	300	
2	98.1419	27.81	-13.68	14.13	43.50	-29.37	peak	100	75	
3	262.8955	27.65	-10.31	17.34	46.00	-28.66	peak	100	179	
4	422.0577	28.44	-5.76	22.68	46.00	-23.32	peak	100	163	
5	687.1507	28.95	-1.28	27.67	46.00	-18.33	peak	100	112	
6	804.6028	28.51	0.91	29.42	46.00	-16.58	peak	100	142	

Job No.: STAR2016 #2745

Standard: FCC PART 15C 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: In-wall Dimmer

Mode: TX 2450MHz

Model: SDWDS

Manufacturer: Libre Home Inc

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 18/08/28/

Time: 14/26/16

Engineer Signature: star

Distance: 3m

Note: Report No.: ATE20181589

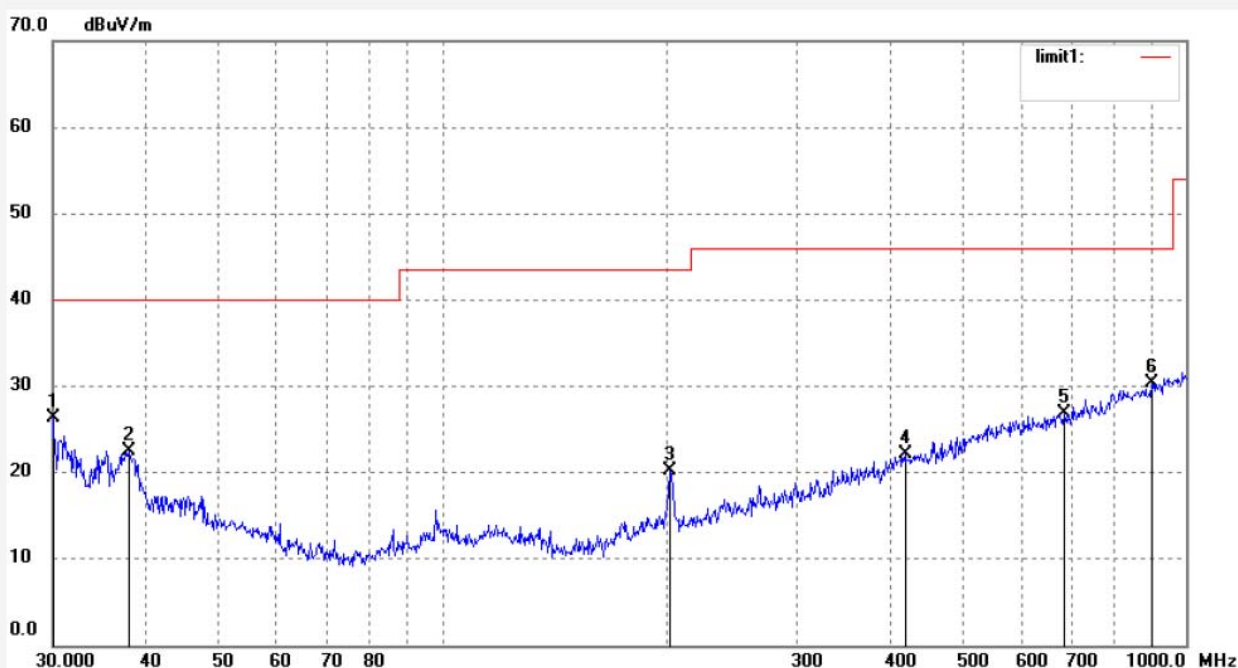

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	30.0000	35.24	-8.93	26.31	40.00	-13.69	peak	100	21	
2	37.9450	33.50	-11.07	22.43	40.00	-17.57	peak	100	192	
3	202.1005	32.38	-12.21	20.17	43.50	-23.33	peak	100	166	
4	419.1080	27.99	-5.79	22.20	46.00	-23.80	peak	100	217	
5	684.7454	28.15	-1.30	26.85	46.00	-19.15	peak	100	297	
6	900.1473	28.17	2.18	30.35	46.00	-15.65	peak	100	315	

Job No.: STAR2016 #2747

Standard: FCC PART 15C 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: In-wall Dimmer

Mode: TX 2480MHz

Model: SDWDS

Manufacturer: Libre Home Inc

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 18/08/28/

Time: 14/28/31

Engineer Signature: star

Distance: 3m

Note: Report No.: ATE20181589

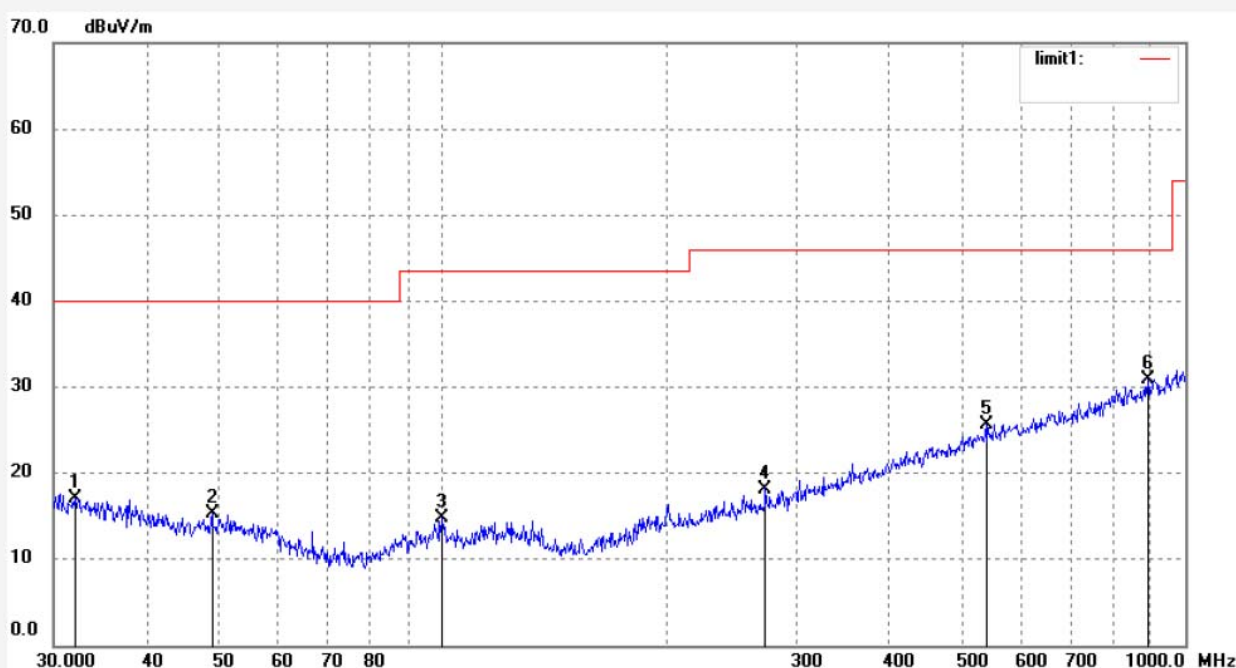


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	32.0667	27.25	-10.13	17.12	40.00	-22.88	peak	100	99	
2	49.0144	27.85	-12.59	15.26	40.00	-24.74	peak	100	128	
3	99.8777	27.88	-13.09	14.79	43.50	-28.71	peak	100	107	
4	272.2776	28.04	-9.84	18.20	46.00	-27.80	peak	100	174	
5	539.4774	28.94	-3.35	25.59	46.00	-20.41	peak	100	65	
6	890.7278	28.72	2.16	30.88	46.00	-15.12	peak	100	29	

Job No.: STAR2016 #2748  
 Standard: FCC PART 15C 3M Radiated  
 Test item: Radiation Test  
 Temp.( C)/Hum.(%) 23 C / 48 %  
 EUT: In-wall Dimmer  
 Mode: TX 2480MHz  
 Model: SDWDS  
 Manufacturer: Libre Home Inc

Polarization: Vertical  
 Power Source: AC 120V/60Hz  
 Date: 18/08/28/  
 Time: 14/29/22  
 Engineer Signature: star  
 Distance: 3m

Note: Report No.: ATE20181589

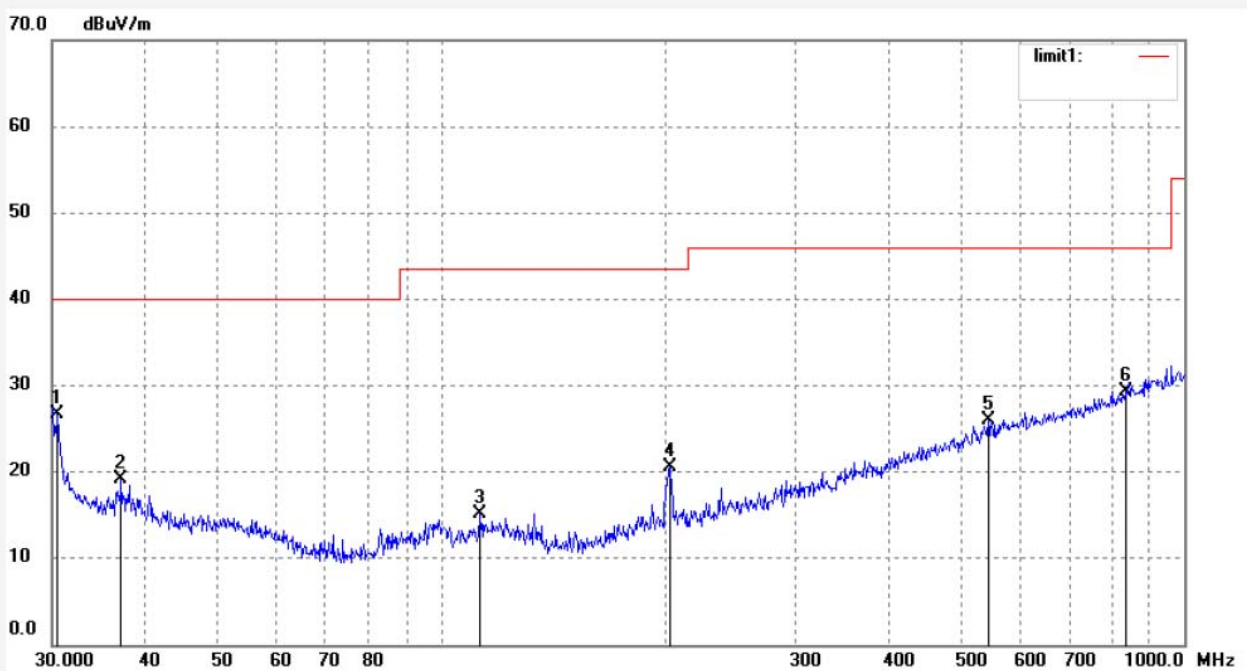

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	30.5306	35.73	-9.08	26.65	40.00	-13.35	peak	100	93	
2	37.1550	29.98	-10.89	19.09	40.00	-20.91	peak	100	172	
3	112.9196	28.56	-13.37	15.19	43.50	-28.31	peak	100	108	
4	203.5228	32.77	-12.16	20.61	43.50	-22.89	peak	100	147	
5	545.1826	29.18	-3.23	25.95	46.00	-20.05	peak	100	182	
6	833.3171	27.96	1.42	29.38	46.00	-16.62	peak	100	109	

Above 1GHz



**ACCURATE TECHNOLOGY CO., LTD.**


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: STAR2016 #2732  
Standard: FCC PART 15C 3M Radiated  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 23 C / 48 %  
EUT: In-wall Dimmer  
Mode: TX 2405MHz  
Model: SDWDS  
Manufacturer: Libre Home Inc

Polarization: Horizontal  
Power Source: AC 120V/60Hz  
Date: 18/08/28/  
Time: 13/41/30  
Engineer Signature: star  
Distance: 3m

Note: Report No.: ATE20181589

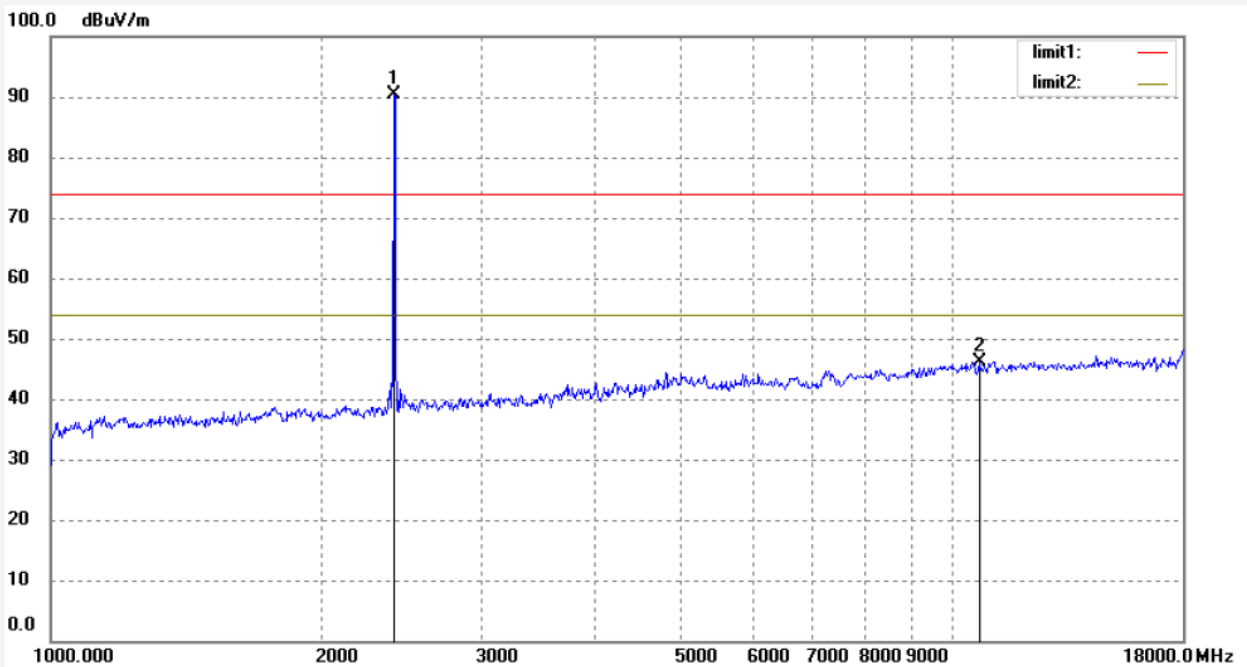

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2405.053	89.38	0.88	90.26			peak	200	147	
2	10698.514	29.73	16.51	46.24	74.00	-27.76	peak	200	201	



**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR2016 #2733	Polarization: Vertical
Standard: FCC PART 15C 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 18/08/28/
Temp.( C)/Hum.(%) 23 C / 48 %	Time: 13/42/42
EUT: In-wall Dimmer	Engineer Signature: star
Mode: TX 2405MHz	Distance: 3m
Model: SDWDS	
Manufacturer: Libre Home Inc	

Note: Report No.: ATE20181589

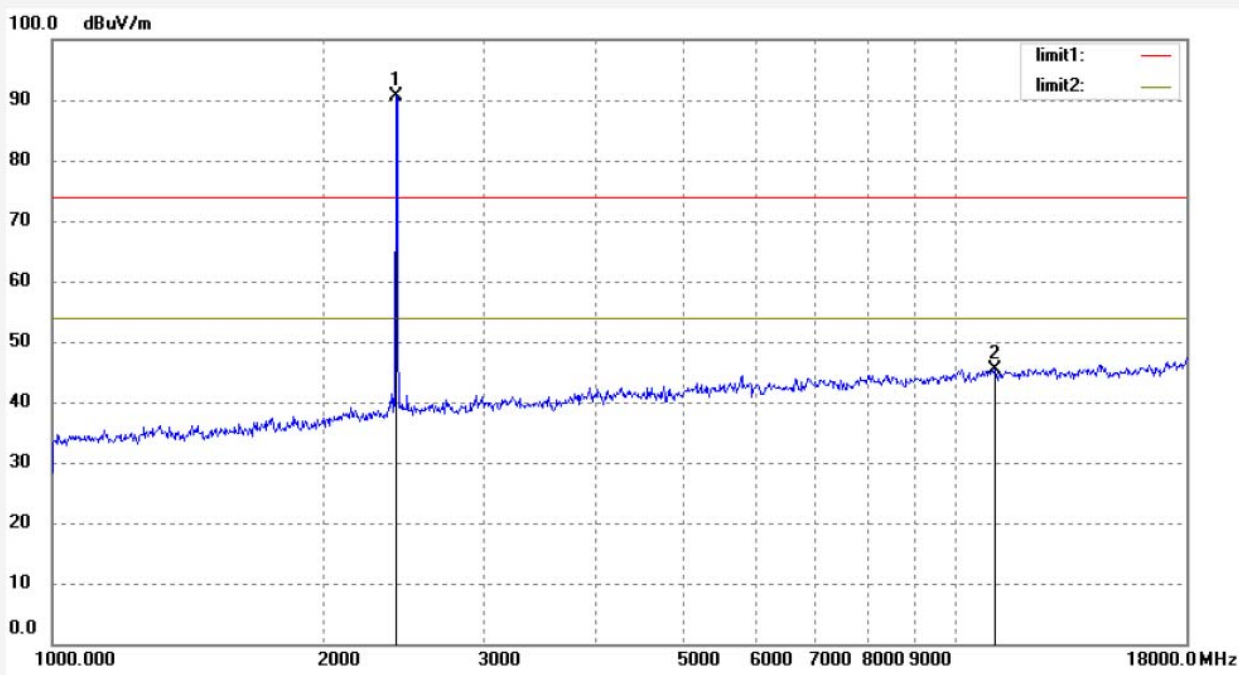

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2405.053	89.74	0.88	90.62			peak	150	130	
2	11044.129	28.12	17.29	45.41	74.00	-28.59	peak	150	311	

Job No.: STAR2016 #2735

Standard: FCC PART 15C 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: In-wall Dimmer

Mode: TX 2450MHz

Model: SDWDS

Manufacturer: Libre Home Inc

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 18/08/28/

Time: 13/47/58

Engineer Signature: star

Distance: 3m

Note: Report No.: ATE20181589

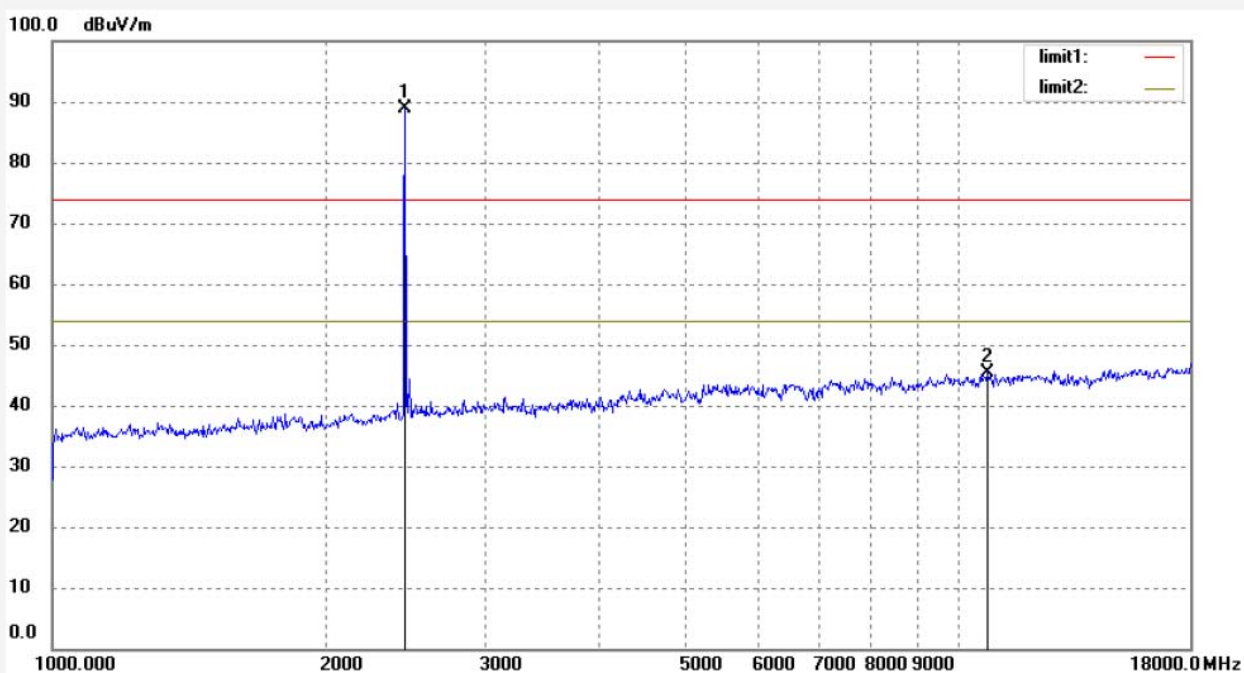


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2450.022	87.84	1.09	88.93			peak	200	233	
2	10760.538	28.66	16.68	45.34	74.00	-28.66	peak	200	290	



Job No.: STAR2016 #2734  
 Standard: FCC PART 15C 3M Radiated  
 Test item: Radiation Test  
 Temp.( C)/Hum.(%) 23 C / 48 %  
 EUT: In-wall Dimmer  
 Mode: TX 2450MHz  
 Model: SDWDS  
 Manufacturer: Libre Home Inc

Polarization: Vertical  
 Power Source: AC 120V/60Hz  
 Date: 18/08/28/  
 Time: 13/46/34  
 Engineer Signature: star  
 Distance: 3m

Note: Report No.: ATE20181589

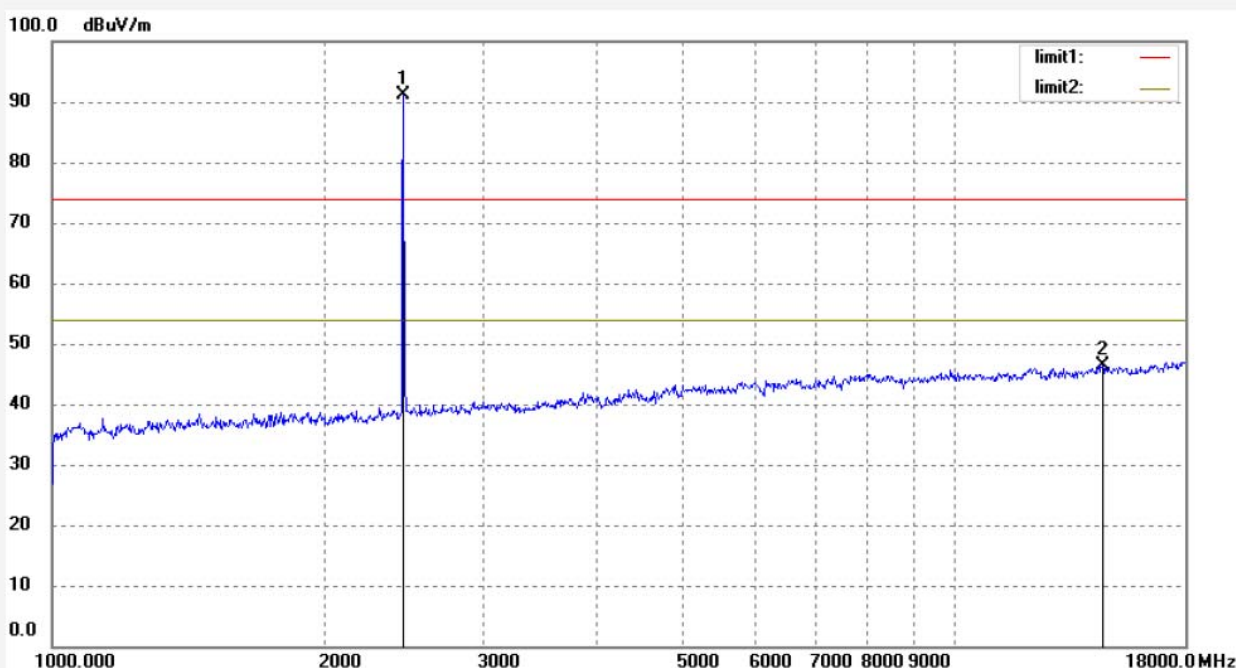

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2450.022	89.94	1.09	91.03			peak	150	91	
2	14575.975	-13.86	60.29	46.43	74.00	-27.57	peak	150	199	



**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR2016 #2737

Standard: FCC PART 15C 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: In-wall Dimmer

Mode: TX 2480MHz

Model: SDWDS

Manufacturer: Libre Home Inc

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 18/08/28/

Time: 13/51/54

Engineer Signature: star

Distance: 3m

Note: Report No.: ATE20181589

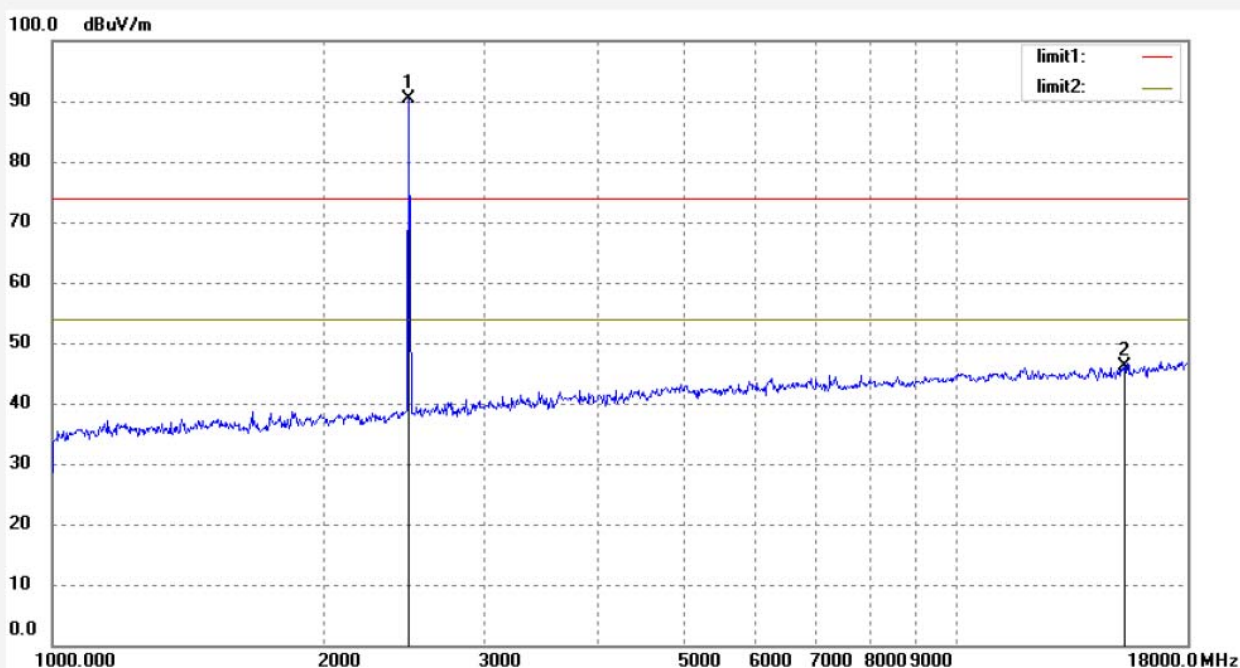

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.310	89.18	1.10	90.28			peak	200	141	
2	15354.388	-12.50	58.53	46.03	74.00	-27.97	peak	200	100	




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: STAR2016 #2738	Polarization: Vertical
Standard: FCC PART 15C 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 18/08/28/
Temp.( C)/Hum.(%) 23 C / 48 %	Time: 13/53/35
EUT: In-wall Dimmer	Engineer Signature: star
Mode: TX 2480MHz	Distance: 3m
Model: SDWDS	
Manufacturer: Libre Home Inc	


Note: Report No.: ATE20181589

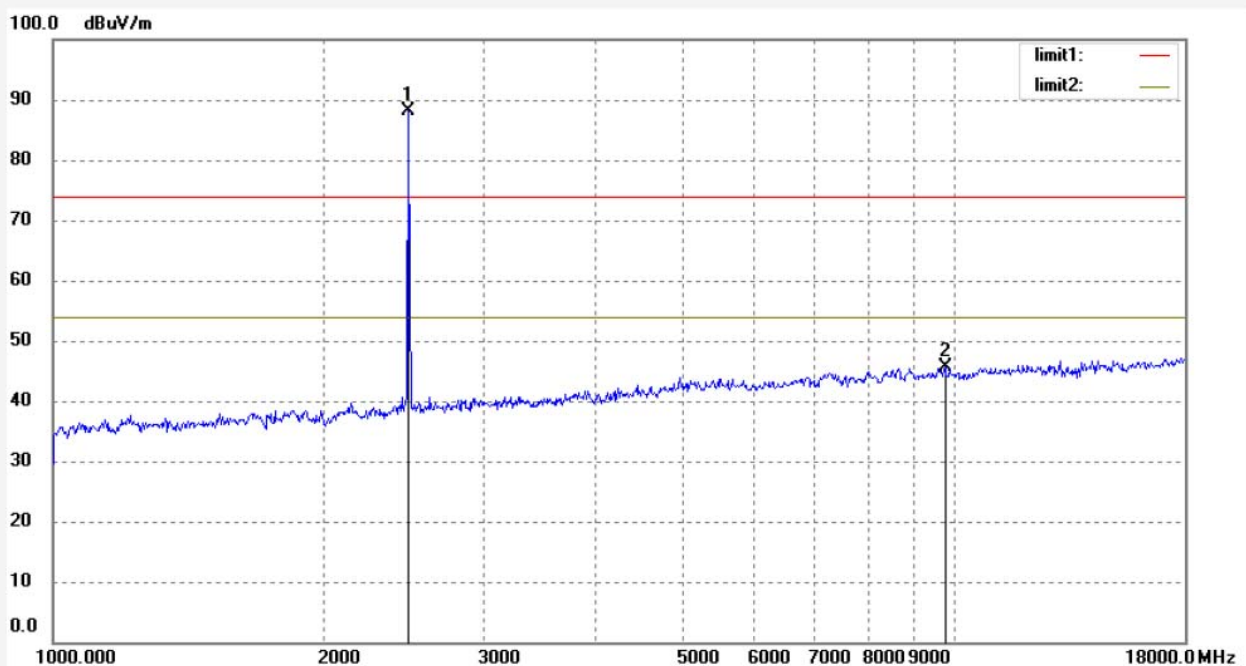


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.310	87.13	1.10	88.23			peak	150	30	
2	9753.371	27.83	17.79	45.62	74.00	-28.38	peak	150	175	

## 10.AC POWER LINE CONDUCTED EMISSION TEST

### 10.1.Block Diagram of Test Setup

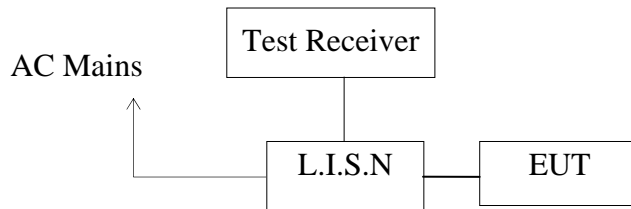

### 10.2.Test System Setup

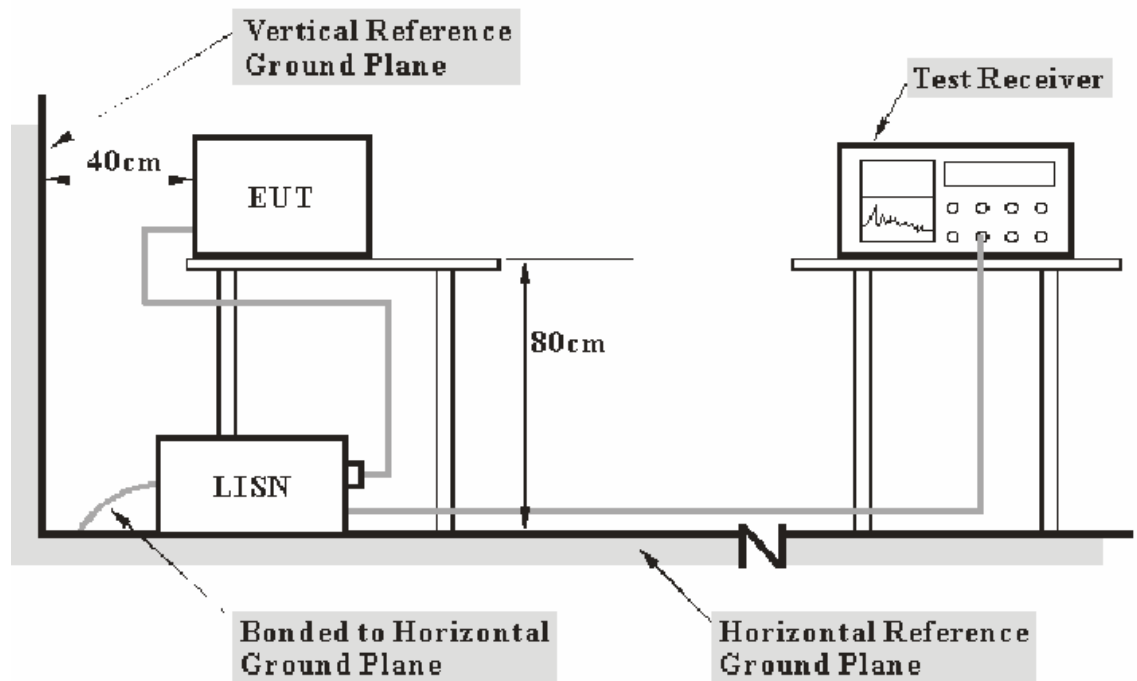

- Note: 1. Support units were connected to second LISN.  
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

### 10.3. Power Line Conducted Emission Measurement Limits

Frequency (MHz)	Limit dB(μV)	
	Quasi-peak Level	Average Level
0.15 - 0.50	66.0 – 56.0 *	56.0 – 46.0 *
0.50 - 5.00	56.0	46.0
5.00 - 30.00	60.0	50.0

NOTE1: The lower limit shall apply at the transition frequencies.  
 NOTE2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

### 10.4. Configuration of EUT on Measurement

The equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner, which tends to maximize its emission characteristics in a normal application.

### 10.5. Operating Condition of EUT

10.5.1. Setup the EUT and simulator as shown as Section 10.1.

10.5.2. Turn on the power of all equipment.

10.5.3. Let the EUT work in test mode and measure it.

### 10.6. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2013 on Conducted Emission Measurement.

The bandwidth of test receiver (R & S ESCS30) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

### 10.7.Data Sample

Frequency (MHz)	Transducer value (dB)	QuasiPeak Level (dBμV)	Average Level (dBμV)	QuasiPeak Limit (dBμV)	Average Limit (dBμV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
X.XX	10.5	51.1	34.2	56.0	46.0	4.9	11.8	Pass

Frequency(MHz) = Emission frequency in MHz

Transducer value(dB) = Insertion loss of LISN + Cable Loss

Level(dBμV) = Quasi-peak Reading/Average Reading + Transducer value

Limit (dBμV) = Limit stated in standard

Calculation Formula:

Margin = Limit (dBμV) - Level (dBμV)

### 10.8.Power Line Conducted Emission Measurement Results

**PASS.**

The frequency range from 150kHz to 30MHz is checked.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

Emissions attenuated more than 20 dB below the permissible value are not reported.

All data was recorded in the Quasi-peak and average detection mode.

The spectral diagrams are attached as below.


ACCURATE TECHNOLOGY CO.,LTD

CONDUCTED EMISSION STANDARD FCC PART 15 C

EUT: In-wall Dimmer M/N:SDWDS  
 Manufacturer: Libre Home Inc  
 Operating Condition: Wireless communication  
 Test Site: 1#Shielding Room  
 Operator: Star  
 Test Specification: N 120V/60Hz  
 Comment: Report No.: ATE20181589  
 Start of Test: 8/28/2018 / 3:16:27PM

SCAN TABLE: "V 9K-30MHz fin"

Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	NSLK8126 2008
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	NSLK8126 2008

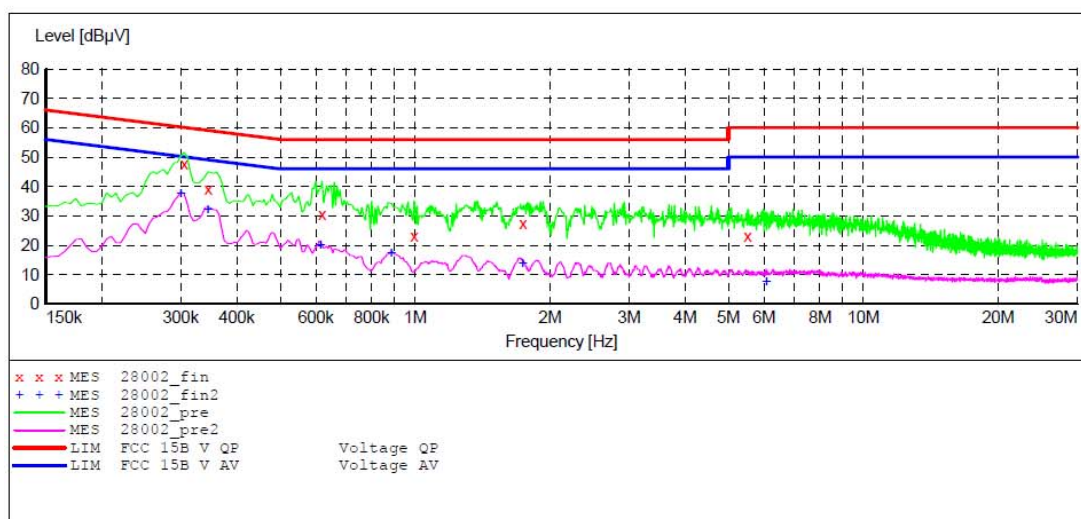

MEASUREMENT RESULT: "28002\_fin"

8/28/2018 3:20PM

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.305000	47.60	10.6	60	12.5	QP	N	GND
0.345000	39.20	10.6	59	19.9	QP	N	GND
0.620000	30.40	10.8	56	25.6	QP	N	GND
0.995000	23.10	10.8	56	32.9	QP	N	GND
1.740000	27.20	11.0	56	28.8	QP	N	GND
5.520000	23.00	11.2	60	37.0	QP	N	GND

MEASUREMENT RESULT: "28002\_fin2"

8/28/2018 3:20PM

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.300000	37.70	10.6	50	12.5	AV	N	GND
0.345000	32.20	10.6	49	16.9	AV	N	GND
0.615000	20.00	10.7	46	26.0	AV	N	GND
0.885000	17.30	10.8	46	28.7	AV	N	GND
1.735000	13.90	10.9	46	32.1	AV	N	GND
6.070000	7.40	11.2	50	42.6	AV	N	GND

**ACCURATE TECHNOLOGY CO.,LTD**


**CONDUCTED EMISSION STANDARD FCC PART 15 C**

EUT: In-wall Dimmer M/N:SDWDS  
 Manufacturer: Libre Home Inc  
 Operating Condition: Wireless communication  
 Test Site: 1#Shielding Room  
 Operator: Star  
 Test Specification: L 120V/60Hz  
 Comment: Report No.: ATE20181589  
 Start of Test: 8/28/2018 / 3:21:12PM

**SCAN TABLE: "V 9K-30MHz fin"**

Short Description: \_SUB\_STD VTERM2 1.70

Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	NSLK8126 2008
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	NSLK8126 2008

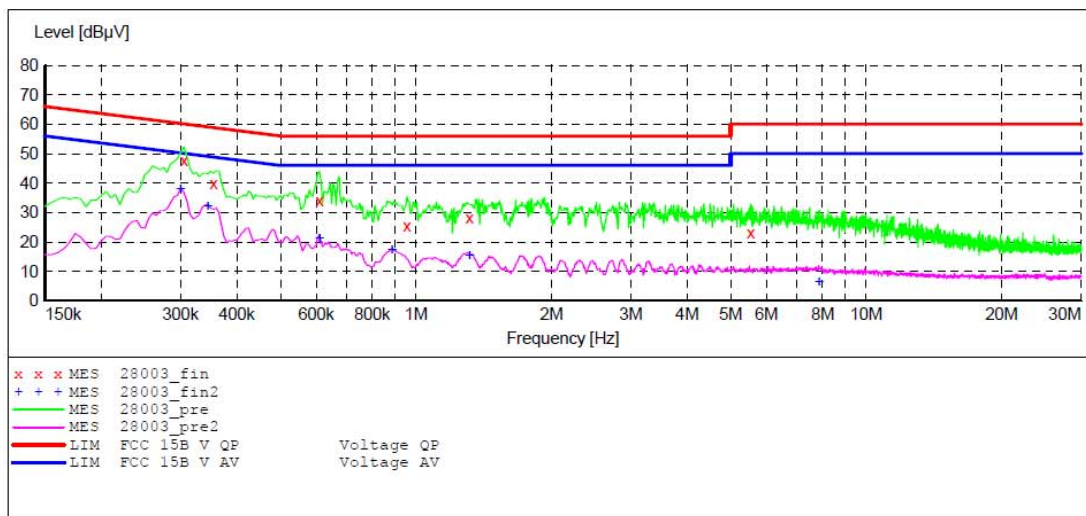

**MEASUREMENT RESULT: "28003\_fin"**

8/28/2018 3:24PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.305000	47.50	10.6	60	12.6	QP	L1	GND
0.355000	39.90	10.6	59	18.9	QP	L1	GND
0.610000	33.80	10.7	56	22.2	QP	L1	GND
0.955000	25.60	10.8	56	30.4	QP	L1	GND
1.315000	28.20	10.9	56	27.8	QP	L1	GND
5.540000	22.90	11.2	60	37.1	QP	L1	GND

**MEASUREMENT RESULT: "28003\_fin2"**

8/28/2018 3:24PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.300000	37.80	10.6	50	12.4	AV	L1	GND
0.345000	32.00	10.6	49	17.1	AV	L1	GND
0.610000	21.00	10.7	46	25.0	AV	L1	GND
0.885000	17.30	10.8	46	28.7	AV	L1	GND
1.315000	15.40	10.9	46	30.6	AV	L1	GND
7.850000	6.40	11.2	50	43.6	AV	L1	GND




## 11. ANTENNA REQUIREMENT

### 11.1. The Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 11.2. Antenna Construction

Device is equipped with permanent attached antenna, which isn't displaced by other antenna. The Antenna gain of EUT is 2.8dBi. Therefore, the equipment complies with the antenna requirement of Section 15.203.

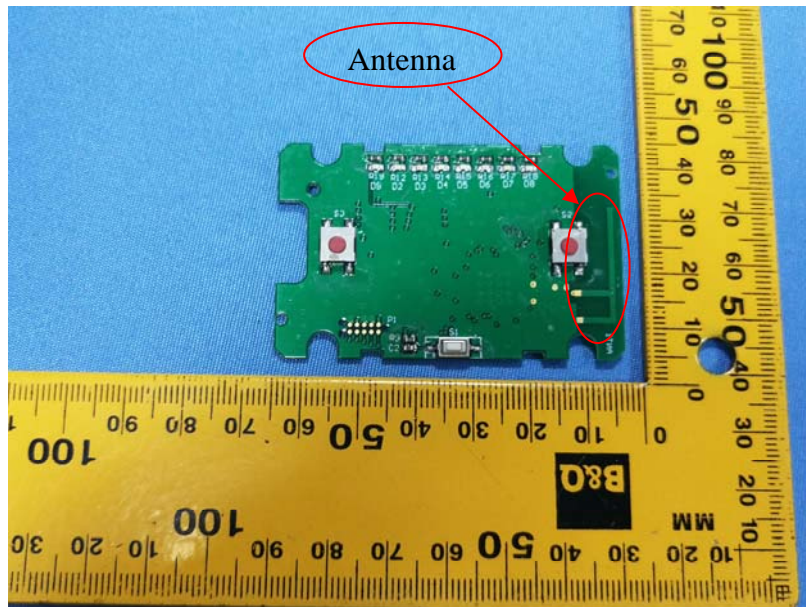

\*\*\*\*\* End of Test Report \*\*\*\*\*