

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT

	OF				
Applicant:	FUJITSU CONNECTED TECHNOLOGIES Ltd. 1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki 211-8588, Japan				
Product Name:	Smart Phone				
Brand Name:	FUJITSU				
Model No.:	F-01L				
Model Difference:	N/A				
FCC ID:	2AQYEFMP167				
Report Number:	ER/2018/70061				
FCC Rule Part:	§15.247, Cat: DSS				
Issue Date:	Sep. 20th, 2018				
Date of Test:	Aug. 28th, 2018 ~ Sep.14th, 2018				
Date of EUT Re- ceived:	Aug. 28th, 2018				

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Electronics & Communication Laboratory The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits.

The test results of this report relate only to the tested sample identified in this report.

Tested By:

Marcus Iseng

Marcus Tseng / Engineer

Approved By:

Blue Yang / Supervisor





Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Revision History

Report Numb	ber	Revision	Description	Effected Page	Issue Date	Revised By
ER/2018/700	61	Rev.00	Initial creation of docu- ment	All	Sep. 20th, 2018	Stefanie Yu / Clerk

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Client's instructions, if any. The Company's sole responsibility is to its Client and this document be client and this document be and subject to a transaction documents. This document be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approach be proceeded to be used. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

Table of Contents

1	GENERAL INFORMATION	4
2	SYSTEM TEST CONFIGURATION	6
3	UMMARY OF TEST RESULTS	8
4	DESCRIPTION OF TEST MODES	9
5	MEASUREMENT UNCERTAINTY1	1
6	CONDUCTED EMISSION TEST12	2
7	PEAK OUTPUT POWER MEASUREMENT10	6
8	20dB BANDWIDTH MEASUREMENT18	8
9	CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT22	2
10	RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT2	7
11	FREQUENCY SEPARATION	6
12	NUMBER OF HOPPING FREQUENCY	8
13	TIME OF OCCUPANCY (DWELL TIME)6	0
14	ANTENNA REQUIREMENT	0



GENERAL INFORMATION 1

1.1 Product description

General:

Product Name:	Smart Pho	Smart Phone			
Brand Name:	FUJITSU	FUJITSU			
Model No.:	F-01L	F-01L			
Model Difference:	N/A	N/A			
Hardware Version:	V2.1.0	V2.1.0			
Software Version:	V01R028A	V01R028Ae			
	3.8Vdc from Rechargeable Li-ion Battery or 5Vdc /9Vdc / 12Vdc from AC/DC Adapter				
Power Supply:	Battery:	Model No.: CA54310-0075-A1, Supplier: FUJITSU CONNECTED TECHNOLOGIES LIMITED			
	Adapter:	Model No.: AC Adapter 06 Supplier: NTT docomo			

Bluetooth BR+EDR:

Bluetooth Version:	V4.2 Dual mode
Channel number:	79 channels
Modulation type:	GFSK + π/4DQPSK + 8DPSK
Transmit Power:	10.83 dBm
Frequency Range:	2.402GHz – 2.480GHz
Dwell Time:	≦ 0.4s
Antenna Designation:	λ/4 Monopole Antenna, Peak Gain: -3.9 dBi

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless to herwise stated the textus single(s) textual and textual to be the state and state textual to be days only. 防非方式 就明 : 此報告結果僅針測試之樣品負責、同時此樣品僅保留的人気。本報告未經公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_edocument.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is under the produced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

Report No.: ER/2018/70061 Page 5 of 70



1.2 Test Methodology of Applied Standards

FCC Part 15, Subpart C §15.247

KDB 558074 D01 v05 DSS Meas. Guidance

ANSI C63.10:2013

Note: All test items have been performed and record as per the above standards.

1.3 Test Facility

SGS Taiwan Ltd. Electronics & Communication Laboratory No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803 (TAF code 0513)

FCC Registration Number and Designation are: 509634 / TW0001

1.4 Special Accessories

There is no special accessory used while test was conducted.

1.5 Equipment Modifications

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



SYSTEM TEST CONFIGURATION 2

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plan. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz,. The CISPR Quasi-Peak and Average detector mode is employed according to §15.207. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plan. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated

emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: ER/2018/70061 Page 7 of 70

2.5 Configuration of Tested System

Fig. 2-1 Conducted (Antenna Port) Emission Configuration



Fig 2-2 Radiated Emission



Fig 2-3 Conduction (AC Power Line) Radiated Emission




Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1	Bluetooth Test Software	N/A	N/A	N/A	N/A	N/A
2	Notebook	Lenovo	L430	R9-WGNK5	Shielded	Unshielded

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



UMMARY OF TEST RESULTS 3

FCC Rules	Description Of Test	Result
§15.207(a)	AC Power Line Conducted Emission	Compliant
§15.247(b)(1)	Peak Output Power	Compliant
§15.247(a)(1)	20dB & 99% Bandwidth	Compliant
§15.247(d)	Conducted Band Edge and Spurious Emission	Compliant
§15.247(d)	Radiated Band Edge and Spurious Emission	Compliant
§15.247(a)(1)	Frequency Separation	Compliant
§15.247(a)(1)(iii)	Number of hopping frequency	Compliant
§15.247(a)(1)(iii)	Time of Occupancy	Compliant
§15.203 §15.247(b)	Antenna Requirement	Compliant

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Client's instructions, if any. The Company's sole responsibility is to its Client and this document be client and this document be and subject to a transaction documents. This document be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approach be proceeded to be used. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



DESCRIPTION OF TEST MODES 4

4.1 Operated in 2400 ~ 2483.5MHz Band

79 channels are provided for Bluetooth

channel	FREQUENCY	channel	FREQUENCY	channel	FREQUENCY	channel	FREQUENCY
1	2402 MHz	21	2422 MHz	41	2442 MHz	71	2462 MHz
2	2403 MHz	22	2423 MHz	42	2443 MHz	72	2463 MHz
3	2404 MHz	23	2424 MHz	43	2444 MHz	73	2464 MHz
4	2405 MHz	24	2425 MHz	44	2445 MHz	74	2465 MHz
5	2406 MHz	25	2426 MHz	45	2446 MHz	75	2466 MHz
6	2407 MHz	26	2427 MHz	46	2447 MHz	76	2467 MHz
7	2408 MHz	27	2428 MHz	47	2448 MHz	77	2468 MHz
8	2409 MHz	28	2429 MHz	48	2449 MHz	78	2469 MHz
9	2410 MHz	29	2430 MHz	49	2450 MHz	79	2470 MHz
10	2411 MHz	30	2431 MHz	50	2451 MHz	70	2471 MHz
11	2412 MHz	31	2432 MHz	51	2452 MHz	71	2472 MHz
12	2413 MHz	32	2433 MHz	52	2453 MHz	72	2473 MHz
13	2414 MHz	33	2434 MHz	53	2454 MHz	73	2474 MHz
14	2415 MHz	34	2435 MHz	54	2455 MHz	74	2475 MHz
15	2416 MHz	35	2436 MHz	55	2456 MHz	75	2476 MHz
16	2417 MHz	36	2437 MHz	56	2457 MHz	76	2477 MHz
17	2418 MHz	37	2438 MHz	57	2458 MHz	77	2478 MHz
18	2419 MHz	38	2439 MHz	58	2459 MHz	78	2479 MHz
19	2420 MHz	39	2440 MHz	59	2460 MHz	79	2480 MHz
20	2421 MHz	40	2441 MHz	60	2461 MHz		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



4.2 The Worst Test Modes and Channel Details

- The EUT has been tested under operating condition. 1
- Test program used to control the EUT for staying in continuous transmitting and receiving 2 mode is programmed.
- Investigation has been done on all the possible configurations for searching the worst 3 case.

RADIATED EMISSION TEST:

	RADIATED EMISSION TEST (BELOW 1 GHz)					
MODE	AVAILABLE FREQUENCY (MHz)	TESTED FREQUENCY (MHz)	MODULATION	PACKET TYPE		
Bluetooth	2402 to 2480	2402, 2441, 2480	GFSK	DH5		
	RADIATED EMISSION TEST (ABOVE 1 GHz)					
Bluetooth	2402 to 2480	2402, 2441, 2480	GFSK	DH5		

Note:

The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for Bluetooth BR+EDR Transmitter for channel Low, Mid and High, the worst case H position was reported.


ANTENNA PORT CONDUCTED MEASUREMENT:

	CONDUCTED TEST					
		Peak Output Power,	20dB Band Width			
MODE	AVAILABLE FREQUENCY (MHz)	TESTED FREQUENCY (MHz)	MODULATION	PACKET TYPE		
Bluetooth	2402 to 2480	2402, 2441, 2480	GFSK, π/4-DQPSK, 8-DPSK	DH5		
	Band Edge					
Bluetooth	2402 to 2480	2402, 2441, 2480	GFSK, 8-DPSK	DH5		
		Frequency S	Separation			
Bluetooth	2402 to 2480	2402, 2441, 2480	GFSK	DH5		
	Number of hopping frequency					
Bluetooth	2402 to 2480	2402, 2441, 2480	GFSK	DH5		
	Time of Occupancy (Dwell time)					
Bluetooth	2402 to 2480	2402, 2441, 2480	GFSK, π/4-DQPSK, 8-DPSK	DH1/DH3/DH5		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless to herwise stated the textus single(s) textual and textual to be the state and state textual to be days only. 防非方式 就明 : 此報告結果僅針測試之樣品負責、同時此樣品僅保留的人気。本報告未經公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_edocument.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is under the produced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.





MEASUREMENT UNCERTAINTY 5

Test Items	Uncertainty
AC Power Line Conducted Emission	+/- 2.586 dB
Peak Output Power	+/- 0.84 dB
20dB Bandwidth	+/- 51.33 Hz
100 KHz Bandwidth Of Frequency Band Edges	+/- 0.84 dB
Frequency Separation	+/- 51.33 Hz
Number of hopping frequency	+/- 51.33 Hz
Time of Occupancy	+/- 51.33 Hz
Temperature	+/- 0.65 °C
Humidity	+/- 4.6 %
DC / AC Power Source	DC= +/- 0.13%, AC= +/- 0.2%

Radiated Spurious Emission:

	9kHz – 30MHz: +/- 2.87 dB
	30MHz - 180MHz: +/- 3.37dB
Measurement uncertainty	180MHz -417MHz: +/- 3.19dB
(Polarization : Vertical)	0.417GHz-1GHz: +/- 3.19dB
	1GHz - 18GHz: +/- 4.04dB
	18GHz - 40GHz: +/- 4.04dB

	9kHz – 30MHz: +/- 2.87 dB
	30MHz - 167MHz: +/- 4.22dB
Measurement uncertainty	167MHz -500MHz: +/- 3.44dB
(Polarization : Horizontal)	0.5GHz-1GHz: +/- 3.39dB
	1GHz - 18GHz: +/- 4.08dB
	18GHz - 40GHz: +/- 4.08dB

This uncertainty represents an expanded uncertainty expressed at approximately the

95% confidence level using a coverage factor of k=2.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless to herwise stated the textus single(s) textual and textual to be the state and state textual to be days only. 防非方式 就明 : 此報告結果僅針測試之樣品負責、同時此樣品僅保留的人気。本報告未經公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_edocument.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is under the produced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



CONDUCTED EMISSION TEST 6

6.1 Standard Applicable

Frequency within 150 kHz to 30MHz shall not exceed the limit table as below.

Frequency range	Limits dB(uV)					
MHz	Quasi-peak	Average				
0.15 to 0.50	66 to 56	56 to 46				
0.50 to 5	56	46				
5 to 30	60	50				

Note

1. The lower limit shall apply at the transition frequencies

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

6.2 Measurement Equipment Used

	Conducted Emission Test Site						
EQUIPMENT	EQUIPMENT MFR MODEL SERIAL LAST CAL DUE.						
TYPE		NUMBER	NUMBER	CAL.			
EMI Test Receiver	R&S	ESCI7	100335	Feb. 2nd, 2018	Feb. 1st, 2019		
LISN	SCHWARZBECK	NSLK 8127	8127-649	May 18th, 2018	May 17th, 2019		


6.3 EUT Setup

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI 63.10:2013.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



6.4 Test SET-UP (Block Diagram of Configuration)

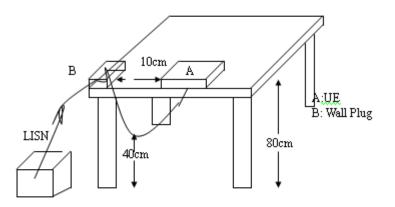

6.5 Measurement Procedure

- 1. The EUT was placed on a table which is 0.8m above ground plan.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.

6.6 Measurement Result

Note: Refer to next page for measurement data and plots.

Note2: The * reveals the worst-case results that closet to the limit

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




AC POWER LINE CONDUCTED EMISSION TEST DATA

Site Conduction Room Limit: FCC Class B Conduction(QP) Mode: Operation Note:

Phase: 11 AC 120V/60Hz Power:


Temperature: 25 (Humidity: 85 %

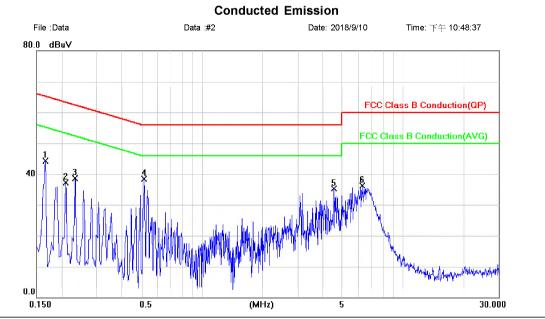


No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	0.1660	44.17	0.04	44.21	65.16	-20.95	peak	
2	0.2100	37.19	0.04	37.23	63.21	-25.98	peak	
3	0.2340	38.62	0.04	38.66	62.31	-23.65	peak	
4 *	0.5140	38.38	0.04	38.42	56.00	-17.58	peak	
5	4.5300	35.08	0.18	35.26	56.00	-20.74	peak	
6	6.2540	36.04	0.23	36.27	60.00	-23.73	peak	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





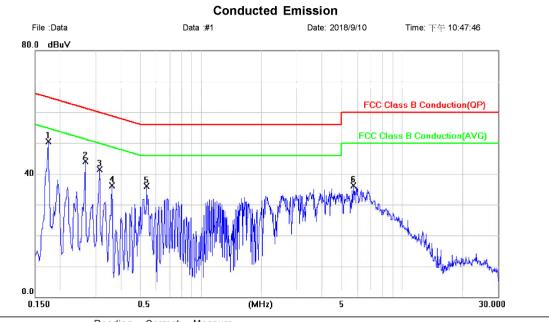

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1 *	0.1740	50.47	0.04	50.51	64.77	-14.26	peak	
2	0,2660	44.16	0.04	44.20	61.24	-17.04	peak	
3	0.3140	41.54	0.04	41.58	59.86	-18.28	peak	
4	0.3620	36.31	0.04	36.35	58.68	-22.33	peak	
5	0.5380	36.13	0.04	36.17	56.00	-19.83	peak	
6	5.7220	36.09	0.22	36.31	60.00	-23,69	peak	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



PEAK OUTPUT POWER MEASUREMENT 7


7.1 Standard Applicable

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, The Limit: 1Watt. For all other frequency hopping systems in the 2400 -2483.5MHz band: The Limit: 0.125 Watts. The power limit for 1Mbps is 1watt, and 2Mbps, 3Mbps and AFH mode are 0.125 watts.

7.2 Measurement Equipment Used

	SGS Conducted Room							
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due			
Power Meter	Anritsu	ML2496A	1804001	Feb. 01st, 2018	Jan. 31th, 2019			
Power Sensor	Anritsu	MA2411B	1726104	Feb. 01st, 2018	Jan. 31th, 2019			
Power Sensor	Anritsu	MA2411B	1726107	Feb. 01st, 2018	Jan. 31th, 2019			
DC Power Supply	Anritsu	E3640A	MY52410006	Nov. 28tg, 2017	Nov. 27th, 2018			
Attenuator	Mini-Circuit	BW-S10W2+	2	Jan. 02nd, 2018	Jan. 01st, 2019			
DC Block	Mini-Circuits	BLK-18-S+	1	Jan. 02nd, 2018	Jan. 01st, 2019			
Coaxial Cables	N/A	WK CE Cable	N/A	Jan. 02nd, 2018	Jan. 01st, 2019			
Notebook	Lenovo	L430	R9-WGNK5	N/A	N/A			

7.3 Test Set-up:



7.4 Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter or spectrum. (Max Hold, Detector = Peak, RBW >= 20dB bandwidth)
- 4. Record the max. reading.
- 5. Repeat above procedures until all default test channel is completed.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




7.5 Measurement Result

$ \begin{array}{c c c c c c c c c c c c c c c c c c c $	1M BF	R mode (P	eak):			1M BR mode (Average):				
$ \begin{array}{ c c c c c c c c c c c c c c c c c c c$	СН		Output Power	Power		СН		tune up tolerance	Power	
78 2480 10.47 11.143 1000 78 2480 9.47 8.851 1000 2M EDR mode (Peak): 2M EDR mode (Average): CH Freq. (MHz) Peak Output (dBm) Output Power (dBm) Limit (mW) Limit (mW) Freq. (MHz) Max. Avg.Output include tune up tolerance Output Power (mW) Limit (mW) 0 2402 9.57 9.057 125 0 2402 6.42 4.385 125 39 2441 9.98 9.954 125 39 2441 6.83 4.819 125 3M EDR mode (Peak): Output (MHz) Output Power (dBm) Limit Power (mW) Limit (mW) CH Freq. (MHz) Max. Avg.Output include tune up (MHz) Output Power (mW) Limit (mW) 0 2402 9.82 9.594 125 39 2441 0.84 4.395 125 39 2441 10.24 10.568 125 39 2441 6.84 4.831 125	0	2402	9.49	8.892	1000	0	2402		7.047	1000
2M EDR mode (Peak): 2M EDR mode (Average): CH Freq. (MHz) Peak Output (MHz) Output Power (dBm) Limit (mW) Limit (mW) Freq. (MHz) Max. Avg.Output (MHz) Output Power (mW) Limit (mW) 0 2402 9.57 9.057 125 0 2402 6.42 4.385 125 39 2441 9.98 9.954 125 39 2441 6.83 4.819 125 78 2480 10.56 11.376 125 78 2480 7.32 5.395 125 3M EDR mode (Peak): Max. Avg.Output (MHz) Output Power (dBm) Limit Power (mW) Limit (mW) 0 2402 9.82 9.594 125 39 2441 0.84 4.395 125 39 2441 10.24 10.568 125 39 2441 6.84 4.331 125	39	2441	9.91	9.795	1000	39	2441	8.90	7.762	1000
CH Freq. (MHz) Output Power (dBm) Output Power (mW) Limit (mW) CH Freq. (MHz) Max. Avg.Output include tune up tolerance Output Power (mW) Limit (mW) 0 2402 9.57 9.057 125 0 2402 6.42 4.385 125 39 2441 9.98 9.954 125 39 2441 6.83 4.819 125 78 2480 10.56 11.376 125 39 2441 6.83 4.819 125 3MEDR mode (Peak): MER mode (Average): MER mode (Peak): 0 2402 9.82 9.594 125 39 2441 0.0utput (MHz) Output (MHz) Output (MHz) CH Freq. (MHz) Max. Avg.Output include Output Power (mW) Limit (mW) 0 2402 9.82 9.594 125 39 2441 6.84 4.395 125 39 2441 10.24 10.568 125 39 2441 6.84	78	2480	10.47	11.143	1000	78	2480	9.47	8.851	1000
$ \begin{array}{c c c c c c c c c c c c c c c c c c c $	2M E	OR mode (Peak):			2M E[OR mode (A	Average):		
0 2402 9.57 9.057 125 0 2402 6.42 4.385 125 39 2441 9.98 9.954 125 39 2441 6.83 4.819 125 78 2480 10.56 11.376 125 78 2480 7.32 5.395 125 3M EDR mode (Peak): Mex Output (MHz) Peak Output (MHz) Output (MW) Limit (mW) CH Freq. (MHz) Max. Output Power (MW) Limit (mW) Avg.Output (MHz) Output Include (MHz) Output (MW) Dutput Include (MHz) Output Include (MHz) Output Include (MHz) Output Include (MW) Limit (MW) 0 2402 9.82 9.594 125 0 2402 6.43 4.395 125 39 2441 10.24 10.568 125 39 2441 6.84 4.831 125	СН		Output Power	Power		СН		Avg.Output include tune up	Power	
39 2441 9.98 9.954 125 39 2441 6.83 4.819 125 78 2480 10.56 11.376 125 78 2480 7.32 5.395 125 3M EDR mode (Peak): M EDR mode (Peak): M EDR mode (Peak): M EDR mode (Peak): M EDR mode (Average): M EX. Peak Output Limit Freq. Max. Output Limit Power Output Limit CH Freq. MHz) Output Limit Limit 0 2402 9.82 9.594 125 0 2402 6.43 4.831 125 39 2441 10.568 125 39 2441 6.84 4.831 125 <td>0</td> <td>2402</td> <td>9.57</td> <td>9.057</td> <td>125</td> <td>0</td> <td>2402</td> <td></td> <td>4.385</td> <td>125</td>	0	2402	9.57	9.057	125	0	2402		4.385	125
78 2480 10.56 11.376 125 78 2480 7.32 5.395 125 3M EDR mode (Peak): 3M EDR mode (Peak): CH Freq. (MHz) Peak Output (MHz) Output Power (dBm) Limit (mW) Limit (mW) Freq. (MHz) Max. Avg.Output include tolerance Output Power (mW) Limit (mW) 0 2402 9.82 9.594 125 0 2402 6.43 4.395 125 39 2441 10.24 10.568 125 39 2441 6.84 4.831 125	39	2441	9.98			39	2441	6.83		125
CH Peak (MHz) Output Power (dBm) Output Power (mW) Limit (mW) Limit (mW) CH Freq. (MHz) Max. Avg.Output include tolerance Output Power (mW) Limit (mW) 0 2402 9.82 9.594 125 0 2402 6.43 4.395 125 39 2441 10.24 10.568 125 39 2441 6.84 4.831 125	78	2480	10.56	11.376	125	78		7.32	5.395	125
CHFreq. (MHz)Peak Output (MHz)Output Power (dBm)Output Power (mW)Limit (mW)CHFreq. (MHz)Avg.Output include (MHz)Output Power (mHz)Limit include (MHz)Limit include (MHz)Limit include (MHz)Limit include (MHz)Limit include (MHz)Limit include (MHz)Limit include (MHz)Limit include (MHz)Limit include (MHz)Limit include (MHz)Limit include (MHz)Limit include (MHz)Limit include (MHz)Limit include (MHz)Limit include (MHz)Limit include (MHz)Limit include (MHz)Limit include (MHz)Output include (MHz)Limit include (MHz) </td <td>3M ED</td> <td>DR mode (</td> <td>Peak):</td> <td></td> <td></td> <td>3M E[</td> <td>OR mode (A</td> <td>Average):</td> <td></td> <td>-</td>	3M ED	DR mode (Peak):			3M E[OR mode (A	Average):		-
024029.829.594125024026.434.39512539244110.2410.5681253924416.844.831125	СН		Output Power	Power		СН	•	Avg.Output include tune up	Power	
<u>39 2441 10.24 10.568 125 39 2441 6.84 4.831 125</u>	0	2402	9.82	9.594	125	0	2402		4.395	125
	39	2441								
	78	2480	10.83	12.106	125	78	2480	7.33	5.408	125

NOTE: cable loss as 1.1dB that offsets in the sp

*Note: Max. Output include tune up tolerance Power measured by using average detector.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





20DB BANDWIDTH MEASUREMENT 8


8.1 Standard Applicable

For frequency hopping systems operating in the 2400 MHz-2483.5 MHz no limit for 20dB bandwidth.

8.2 Measurement Equipment Used

	SGS Conducted Room							
Name of Equip- ment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due			
Spectrum Analyzer	R&S	FSV-30	101398	Oct. 19th, 2017	Oct. 18th, 2018			
DC Power Supply	Anritsu	E3640A	MY52410006	Nov. 28th, 2017	Nov. 27th, 2018			
Attenuator	Mini-Circuit	BW-S10W2+	2	Jan. 02nd, 2018	Jan. 01st, 2019			
DC Block	Mini-Circuits	BLK-18-S+	1	Jan. 02nd, 2018	Jan. 01st, 2019			
Coaxial Cables	N/A	WK CE Cable	N/A	Jan. 02nd, 2018	Jan. 01st, 2019			
Notebook	Lenovo	L430	R9-WGNK5	N/A	N/A			

8.3 Test Set-up



8.4 Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C63.10:2013.
- Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set the spectrum analyzer as RBW=10 kHz (1 % of 20 dB Bandwidth.), VBW = 30 kHz, Span= 3MHz, Sweep=auto, Detector = Peak, and Max hold for 20dB Bandwidth test.
- 5. Mark the peak frequency and -20dB (upper and lower) frequency
- 6. Repeat above procedures until all test default channel is completed

NOTE:

For the plot of bandwidth measurement, the marker of the 20dB BW is arrow-mark

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對测試之樣品負責,同時比樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




8.5 Measurement Result


_	GFSK			_	π/4-DQPSK			 8-DPS	K	
ĺ		20 dB	2/3			20 dB	2/3		20 dB	2/3
	СН	BW	BW		СН	BW	BW	СН	BW	BW
		(MHz)	(MHz)			(MHz)	(MHz)		(MHz)	(MHz)
	Low	0.919	0.61		Low	1.253	0.84	Low	1.254	0.84
	Mid	0.884	0.59		Mid	1.255	0.84	Mid	1.253	0.84
	High	0.884	0.59		High	1.254	0.84	High	1.252	0.83




OBW 20dB GFSK 1M DH5 2402MHz



OBW 20dB_GFSK_1M_DH5_2441MHz




OBW 20dB_GFSK_1M_DH5_2480MHz




OBW 20dB π4DQPSK 2M DH5 2402MHz



OBW 20dB π4DQPSK 2M DH5 2441MHz



OBW 20dB π4DQPSK 2M DH5 2480MHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅係留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, is any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd.


No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司


f (886-2) 2298-0488




OBW 20dB 8DPSK 3M DH5 2402MHz

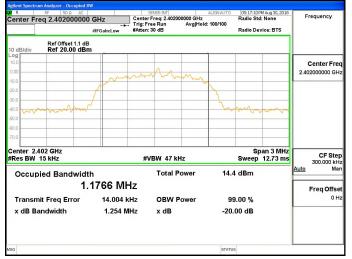

OBW 20dB_8DPSK_3M_DH5_2441MHz



OBW 20dB 8DPSK 3M DH5 2480MHz



台

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅係留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms_and_conditions.htm</u> and, for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, is any to the contained hereon reflects the Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司	f (886-2) 2298-0488	www.tw.sgs.com
		Member of SGS Group



CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT 9


9.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

9.2 Measurement Equipment Used

	SGS Conducted Room						
Name of Equip- ment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due		
Spectrum Analyzer	R&S	FSV-30	101398	Oct. 19th, 2017	Oct. 18th, 2018		
DC Power Supply	Anritsu	E3640A	MY52410006	Nov. 28th, 2017	Nov. 27th, 2018		
Attenuator	Mini-Circuit	BW-S10W2+	2	Jan. 02nd, 2018	Jan. 01st, 2019		
DC Block	Mini-Circuits	BLK-18-S+	1	Jan. 02nd, 2018	Jan. 01st, 2019		
Coaxial Cables	N/A	WK CE Cable	N/A	Jan. 02nd, 2018	Jan. 01st, 2019		
Notebook	Lenovo	L430	R9-WGNK5	N/A	N/A		

9.3 Test SET-UP



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



9.4 Measurement Procedure

Conducted Band Edge:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C63.10:2013.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set center frequency of spectrum analyzer = operating frequency.
- 5. Set the spectrum analyzer as RBW=100 kHz, VBW=300 kHz, Sweep = auto
- 6. Mark Peak, 2.3999GHz and 2.4836GHz and record the max. level.
- 7. Repeat above procedures until all frequency measured were complete.

Conducted Spurious Emission:

- 1. To connect Antenna Port of EUT to Spectrum.
- 2. The testing follows ANSI C63.10:2013.
- 3. Set RBW = 100 kHz & VBW = 300 kHz, Detector = Peak, Sweep = Auto
- 4. Allow trace to fully stabilize.
- 5. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
- 6. Repeat above procedures until all default test channel measured were complete.

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	


9.5 Measurement Result

See next page for test plots.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Band Edge_GFSK_1M_DH5_2402MHz

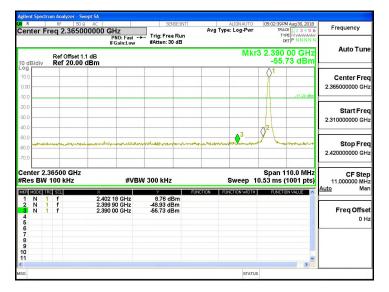


Band Edge_GFSK_1M_DH5_2480MHz

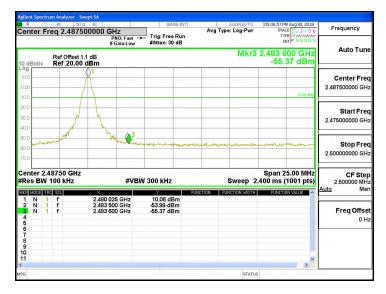

Band Edge_8DPSK_3M_DH5_2402MHz

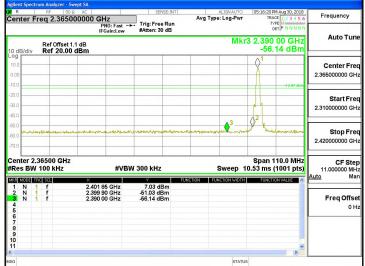

Band Edge_8DPSK_3M_DH5_2480MHz

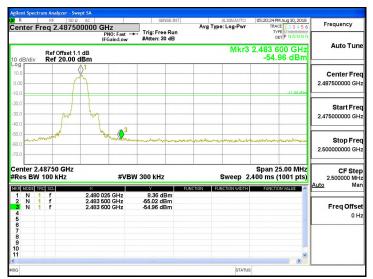

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對過試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.


t (886-2) 2299-3279 台灣檢驗科技股份有限公司

f (886-2) 2298-0488


www.tw.sqs.com




Hopping Band Edge_GFSK_1M_DH5_2402MHz

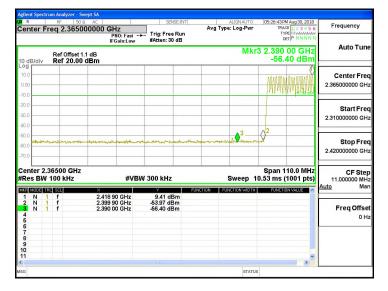


Hopping Band Edge_GFSK_1M_DH5_2480MHz

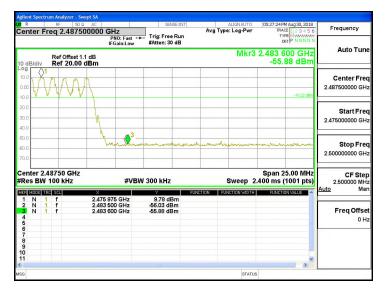

Hopping Band Edge_8DPSK_3M_DH5_2402MHz

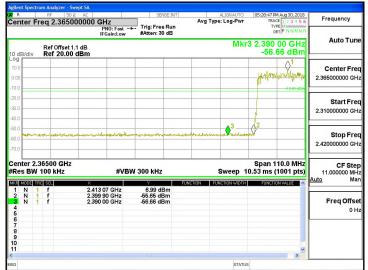

Hopping Band Edge_8DPSK_3M_DH5_2480MHz

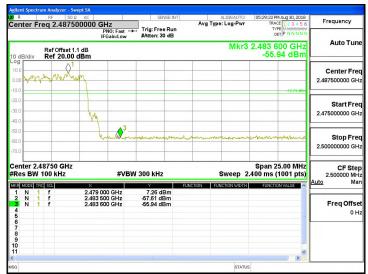

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.


t (886-2) 2299-3279 台灣檢驗科技股份有限公司

f (886-2) 2298-0488

www.tw.sqs.com




Conducted Spurious Emission Measurement Result Ch Low 30MHz – 26GHz (BR Mode)

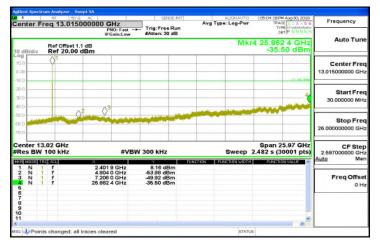

Ch Mid 30MHz – 26GHz (BR Mode)



Ch High 30MHz – 26GHz (BR Mode)

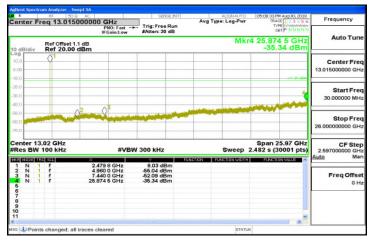


Ch Low 30MHz – 26GHz (EDR Mode)



Ch Mid 30MHz – 26GHz (EDR Mode)



Ch High 30MHz – 26GHz (EDR Mode)

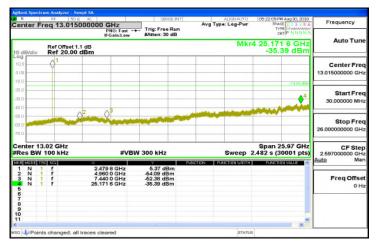

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅係留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms_and_conditions.htm</u> and, for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279 台灣檢驗科技股份有限公司

f (886-2) 2298-0488



10 RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT

10.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands must also comply with the §15.209 limit as below.

And according to §15.33(a) (1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

Frequency (MHz)	Field strength (microvolts/meter)	Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

- 1. The lower limit shall apply at the transition frequencies.
- 2. Emission level $(dB\mu V/m) = 20 \log Emission level (dB\mu V/m)$

除非另有說明,此報告結果僅對测試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



10.2 Measurement Equipment Used

SGS SAC-III								
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due			
Bi-log Antenna	SCHWAZBECK	VULB9168	378	Dec. 29th, 2017	Dec. 28th, 2018			
Horn Antenna	Schwarzbeck	BBHA9120D	1441	Aug. 16th, 2018	Aug. 15th, 2019			
Horn Antenna	Schwarzbeck	BBHA9170	184	Dec. 12th, 2017	Dec. 11th, 2018			
Loop Antenna	ETS.LINDGREN	6502	148045	Sep. 26th, 2017	Sep. 25th, 2018			
3m Site NSA	SGS	966 chamber	N/A	Jan. 02nd, 2018	Jan. 01st, 2019			
Spectrum Analyzer	Agilent	E4446A	MY51100003	May 15th, 2018	May 14th, 2019			
EMI Test Receiver	R&S	ESCI7	100335	Feb. 02nd, 2018	Feb. 01st, 2019			
Pre-Amplifier	HP	8449B	3008A00578	Jan. 02nd, 2018	Jan. 01st, 2019			
Pre-Amplifier	HP	8447D	2944A07676	Jan. 02nd, 2018	Jan. 01st, 2019			
Pre-Amplifier	EMC Instruments	EMC184045B	980135	Oct. 27th, 2017	Oct. 26th, 2018			
Attenuator	Mini-Circuit	BW-S10W2+	2	Jan. 02nd, 2018	Jan. 01st, 2019			
2GHz High Pass Filter	Micro-Tronics	HPM50110	36	Jan. 02nd, 2018	Jan. 01st, 2019			
Filter 5150-5350 MHz	Micro-Tronics	BRM50703	1	Jan. 02nd, 2018	Jan. 01st, 2019			
Low Loss Cable	Huber Suhner	966_RX	9	Jan. 02nd, 2018	Jan. 01st, 2019			
Notebook	Lenovo	L430	R9-X11BG	N/A	N/A			

NOTE: N.C.R refers to Not Calibrated Required.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Client's instructions, if any. The Company's sole responsibility is to its Client and this document be client and this document be and subject to a transaction documents. This document be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approach be proceeded to be used. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號




10.3 Test SET-UP


(A) Radiated Emission Test Set-UP Frequency Below 30MHz.

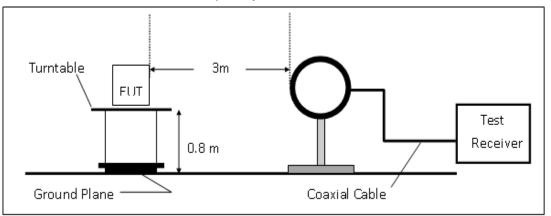

(B) Radiated Emission Test Set-Up, Frequency form 30MHz to 1000MHz

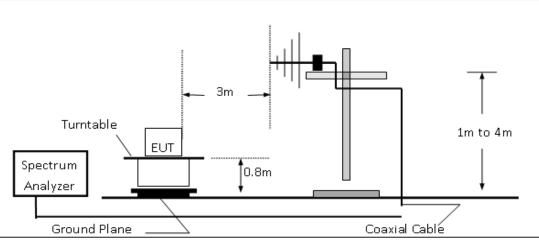

(C) Radiated Emission Test Set-UP Frequency Over 1 GHz

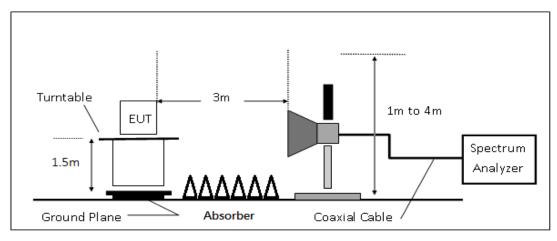

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



10.4 Measurement Procedure

Radiated Emission

- The testing follows the Measurement Procedure of ANSI C63.10:2013. 1.
- 2. The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 1.5m for frequency> 1GHz above ground plan.
- 3. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 5. Set the spectrum analyzer as RBW=120 kHz and VBW=300 kHz for Peak Detector (PK) and Quasi-peak (QP) at frequency below 1 GHz.
- 6. Set the spectrum analyzer as RBW=1 MHz, VBW=3 MHz for Peak Detector at frequency above 1 GHz.
- 7. Set the spectrum analyzer as RBW=1 MHz, VBW=10 Hz (Duty cycle > 98%) or VBW ≥ 1/T (Duty cycle < 98%) for Average Detector at frequency above 1 GHz.
- 8. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 9. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 10. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. On spectrum, change spectrum mode in linear display mode, and reduce VBW = 10Hz if average reading is measured.
- 11. Repeat above procedures until all default test channel measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



10.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	5	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

The limit of the emission level is expressed in dBuV/m, which converts 20*log(uV/m)

Actual FS(dB μ V/m) = SPA. Reading level(dB μ V) + Factor(dB)

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

10.6 Test Results of Radiated Spurious Emissions form 9 kHz to 30 MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit per 15.31(o) was not reported.

10.7 Measurement Result

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Chiefs Stateware stated are textus single stateware textus and textus Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Radiated Band Edge Measurement Result:

Operation Band Fundamental Frequency Operation Mode EUT Pol.

:BR(1M) :2402 MHz :Bandedge CH LOW :H Plane

Test Date :2018-08-28 Temp./Humi. :23 deg_C / 62 RH Engineer :Tin Measurement Antenna Pol. :VERTICAL

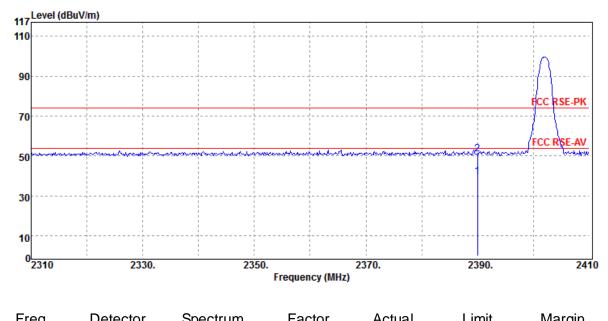

Delector	opectium	racior	Actual		ivia giri	
Mode	Reading Level		FS	@3m		
	U	d٦	. •	0.000	dD	
PK/QP/AV	αΒμν	aв	aBhr/w	abhr/w	aв	
Average	39.28	0.20	39.48	54.00	-14.52	
5	50.72	0.20	50.02	74.00	22.07	
reak	50.75	0.20	50.95	74.00	-23.07	
	Mode PK/QP/AV Average Peak	ModeReading LevelPK/QP/AVdBµVAverage39.28	ModeReading LevelPK/QP/AVdBµVdBAverage39.280.20	ModeReading LevelFSPK/QP/AVdBµVdBdBµV/mAverage39.280.2039.48	Mode Reading Level FS @3m PK/QP/AV dBμV dB dBμV/m dBμV/m Average 39.28 0.20 39.48 54.00	Mode Reading Level FS @3m PK/QP/AV dBµV dB dBµV/m dBµV/m dB Average 39.28 0.20 39.48 54.00 -14.52

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/70061 Page 33 of 70




Operation Band Fundamental Frequency Operation Mode EUT Pol.

:BR(1M) :2402 MHz :Bandedge CH LOW :H Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-08-28 :23 deg_C / 62 RH :Tin :HORIZONTAL

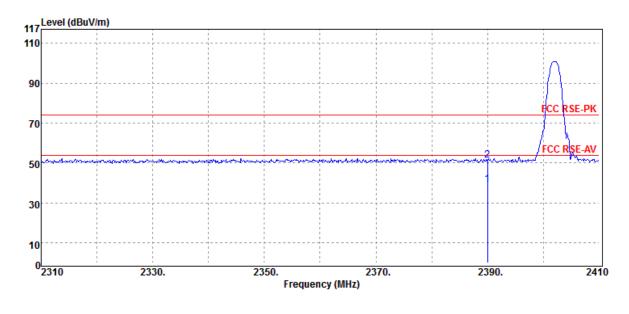

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB	
2390.00	Average	39.02	0.20	39.22	54.00	-14.78	-
2390.00	Peak	51.19	0.20	51.39	74.00	-22.61	
 2390.00	PK/QP/AV Average	dBµV 39.02	0.20	dBµV/m 39.22	dBµV/m 54.00	-14.78	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/70061 Page 34 of 70




Operation Band Fundamental Frequency Operation Mode EUT Pol.

:BR(1M) :2480 MHz :Bandedge CH HIGH :H Plane

Test Date Temp./Humi. Engineer :Tin Measurement Antenna Pol.

:2018-08-28 :23 deg_C / 62 RH :VERTICAL

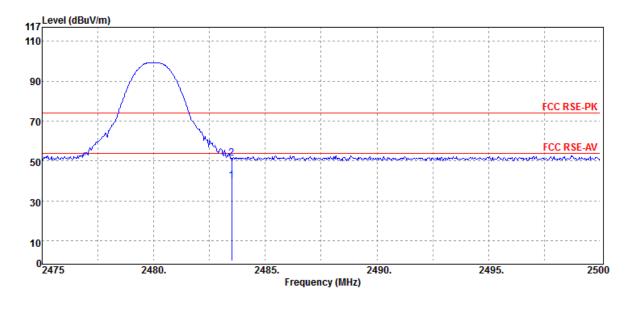

Detector	Spectrum	Factor	Actual	Limit	Margin
Mode	Reading Level		FS	@3m	
PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
Average	39.50	0.53	40.03	54.00	-13.97
Peak	51.07	0.53	51.60	74.00	-22.40
	Mode PK/QP/AV Average	ModeReading LevelPK/QP/AVdBµVAverage39.50	ModeReading LevelPK/QP/AVdBµVdBAverage39.500.53	ModeReading LevelFSPK/QP/AVdBµVdBdBµV/mAverage39.500.5340.03	Mode Reading Level FS @3m PK/QP/AV dBµV dB dBµV/m dBµV/m Average 39.50 0.53 40.03 54.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/70061 Page 35 of 70




Operation Band Fundamental Frequency Operation Mode EUT Pol.

:BR(1M) :2480 MHz :Bandedge CH HIGH :H Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-08-28 :23 deg_C / 62 RH :Tin :HORIZONTAL

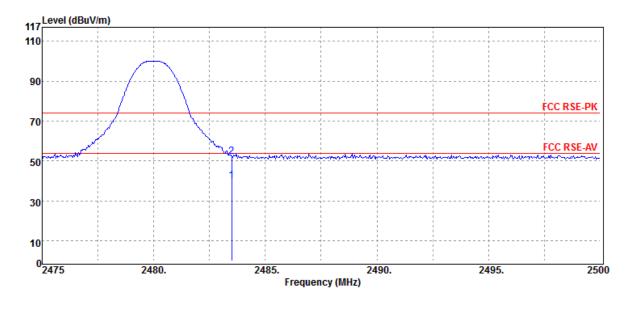

Limit	Margin
@3m	
dBµV/m	dB
54.00	-13.80
74.00	-21.80
	@3m dBµV/m 54.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Report No.: ER/2018/70061 Page 36 of 70



Operation Band Fundamental Frequency Operation Mode EUT Pol.

:EDR(3M) :2402 MHz :Bandedge CH LOW :H Plane

Test Date :2018-08-28 Temp./Humi. :23 deg_C / 62 RH Engineer :Tin Measurement Antenna Pol. :VERTICAL

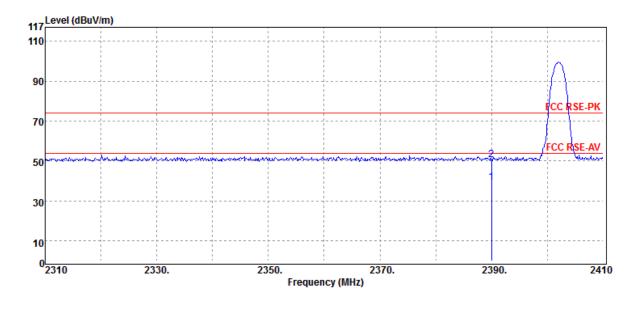

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	-
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Average	39.25	0.20	39.45	54.00	-14.55
2390.00	Peak	50.48	0.20	50.68	74.00	-23.32

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/70061 Page 37 of 70




Operation Band Fundamental Frequency Operation Mode EUT Pol.

:EDR(3M) :2402 MHz :Bandedge CH LOW :H Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-08-28 :23 deg_C / 62 RH :Tin :HORIZONTAL

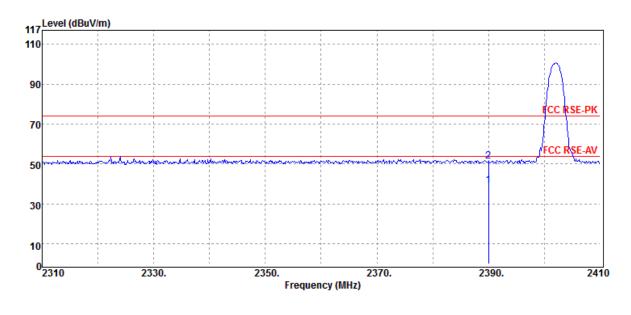

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Average	39.24	0.20	39.44	54.00	-14.56
2390.00	Peak	51.02	0.20	51.22	74.00	-22.78

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/70061 Page 38 of 70




Operation Band Fundamental Frequency Operation Mode EUT Pol.

:EDR(3M) :2480 MHz :Bandedge CH HIGH :H Plane

Test Date Temp./Humi. Engineer :Tin Measurement Antenna Pol.

:2018-08-28 :23 deg_C / 62 RH :VERTICAL

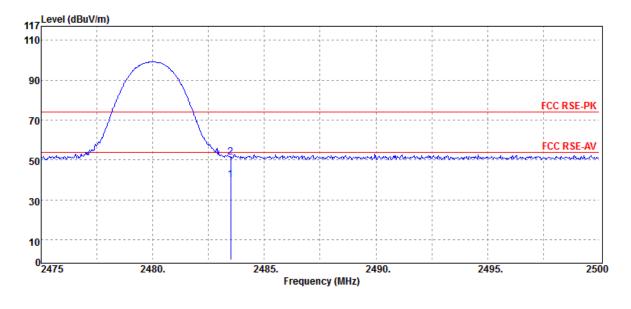

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	39.37	0.53	39.90	54.00	-14.10
2483.50	Peak	50.97	0.53	51.50	74.00	-22.50

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/70061 Page 39 of 70




Operation Band Fundamental Frequency Operation Mode EUT Pol.

:EDR(3M) :2480 MHz :Bandedge CH HIGH :H Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-08-28 :23 deg_C / 62 RH :Tin :HORIZONTAL

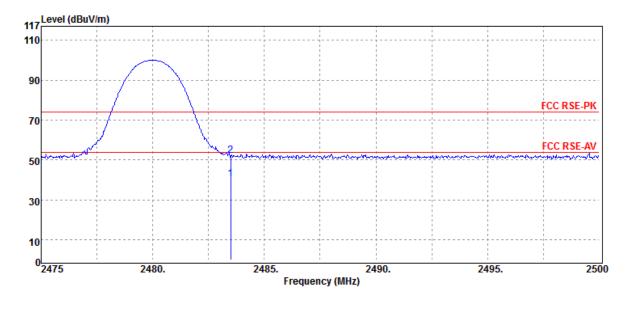

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	-
 MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	39.98	0.53	40.51	54.00	-13.49
2483.50	Peak	51.87	0.53	52.40	74.00	-21.60

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/70061 Page 40 of 70




Operation Band Fundamental Frequency Operation Mode EUT Pol.

:BR Hopping :2402 MHz :Bandedge CH LOW :H Plane

Test Date Temp./Humi. Engineer :Tin Measurement Antenna Pol.

:2018-08-28 :23 deg_C / 62 RH :VERTICAL

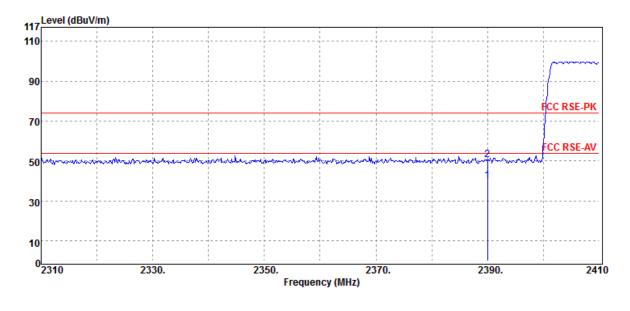

n
3
9

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/70061 Page 41 of 70




Operation Band Fundamental Frequency Operation Mode EUT Pol.

:BR Hopping :2402 MHz :Bandedge CH LOW :H Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-08-28 :23 deg_C / 62 RH :Tin :HORIZONTAL

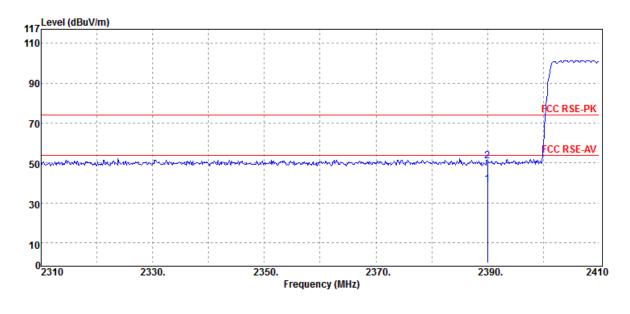

Fre	eq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
M	Ηz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
239	0.00	Average	39.16	0.20	39.36	54.00	-14.64
239	0.00	Peak	50.95	0.20	51.15	74.00	-22.85

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/70061 Page 42 of 70




Operation Band Fundamental Frequency Operation Mode EUT Pol.

:BR Hopping :2480 MHz :Bandedge CH HIGH :H Plane

Test Date Temp./Humi. Engineer :Tin Measurement Antenna Pol.

:2018-08-28 :23 deg_C / 62 RH :VERTICAL

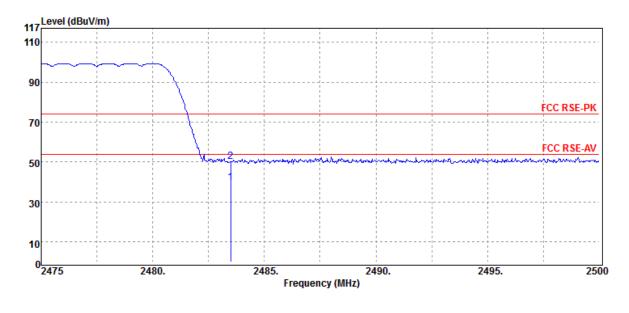

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
	MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
_	2483.50	Average	39.10	0.53	39.63	54.00	-14.37
	2483.50	Peak	49.57	0.53	50.10	74.00	-23.90
_	2483.50	Average	39.10	0.53	39.63	54.00	-14.37

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/70061 Page 43 of 70




Operation Band Fundamental Frequency Operation Mode EUT Pol.

:BR Hopping :2480 MHz :Bandedge CH HIGH :H Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-08-28 :23 deg_C / 62 RH :Tin :HORIZONTAL

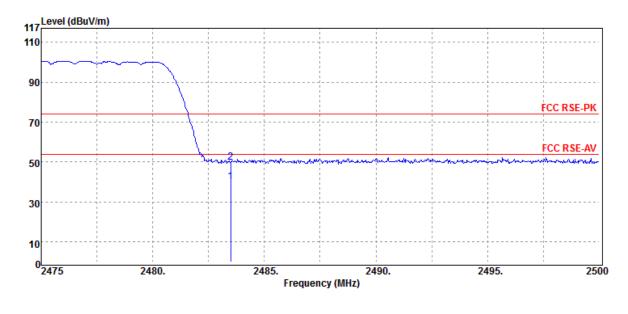

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	39.60	0.53	40.13	54.00	-13.87
2483.50	Peak	49.40	0.53	49.93	74.00	-24.07

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/70061 Page 44 of 70




Operation Band Fundamental Frequency Operation Mode EUT Pol.

:EDR Hopping :2402 MHz :Bandedge CH LOW :H Plane

Test Date Temp./Humi. Engineer :Tin Measurement Antenna Pol.

:2018-08-28 :23 deg_C / 62 RH :VERTICAL

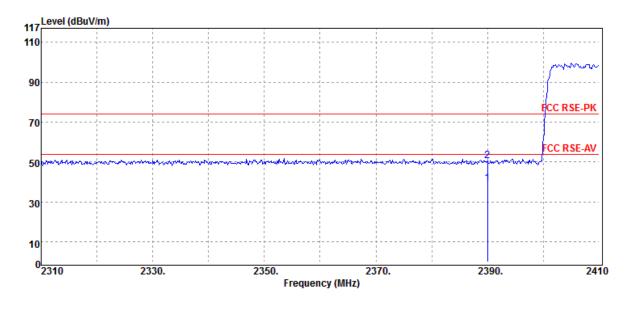

Factor	Actual	Limit	Margin
vel	FS	@3m	-
dB	dBµV/m	dBµV/m	dB
0.20	39.42	54.00	-14.58
0.20	50.63	74.00	-23.37
	vel dB 0.20	vel FS dB dBµV/m 0.20 39.42	vel FS @3m dB dBµV/m dBµV/m 0.20 39.42 54.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/70061 Page 45 of 70




Operation Band Fundamental Frequency Operation Mode EUT Pol.

:EDR Hopping :2402 MHz :Bandedge CH LOW :H Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-08-28 :23 deg_C / 62 RH :Tin :HORIZONTAL

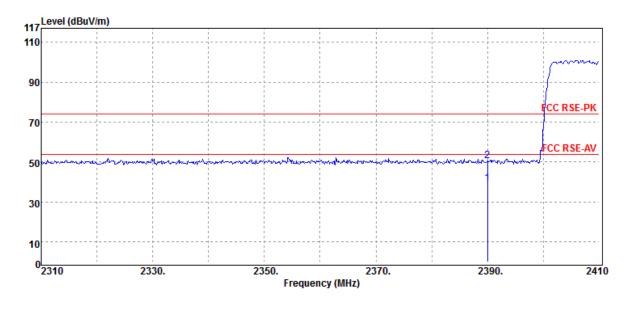

Margin
_
dB
-14.64
-23.55
-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/70061 Page 46 of 70




Operation Band Fundamental Frequency Operation Mode EUT Pol.

:EDR Hopping :2480 MHz :Bandedge CH HIGH :H Plane

Test Date Temp./Humi. Engineer :Tin Measurement Antenna Pol.

:2018-08-28 :23 deg_C / 62 RH :VERTICAL

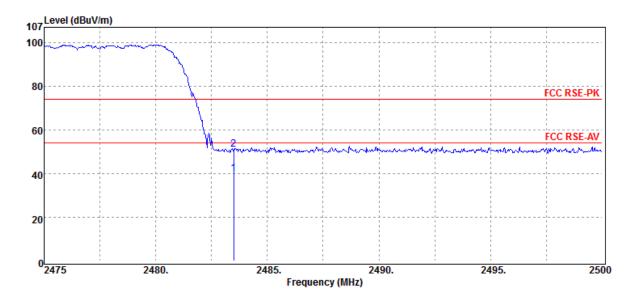

ector Spectrum	Factor	Actual	Limit	Margin
ode Reading Level		FS	@3m	-
QP/AV dBµV	dB	dBµV/m	dBµV/m	dB
rage 39.44	0.53	39.97	54.00	-14.03
eak 50.44	0.53	50.97	74.00	-23.03
	ode Reading Level <u>QP/AV dBµV</u> rage 39.44	ode Reading Level QP/AV dBµV dB rage 39.44 0.53	odeReading LevelFSQP/AVdBµVdBdBµV/mrage39.440.5339.97	ode Reading Level FS @3m QP/AV dBμV dB dBμV/m dBμV/m rage 39.44 0.53 39.97 54.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/70061 Page 47 of 70




Operation Band Fundamental Frequency Operation Mode EUT Pol.

:EDR Hopping :2480 MHz :Bandedge CH HIGH :H Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-08-28 :23 deg_C / 62 RH :Tin :HORIZONTAL

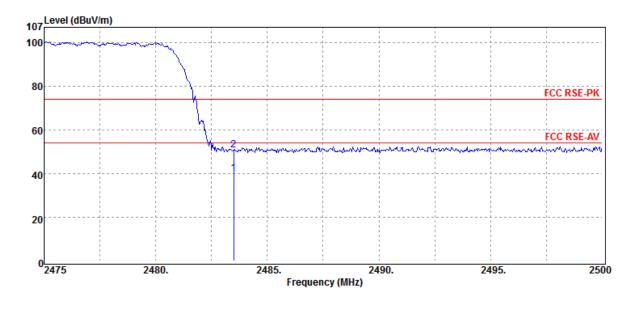

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	39.56	0.53	40.09	54.00	-13.91
2483.50	Peak	50.21	0.53	50.74	74.00	-23.26


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/70061 Page 48 of 70



Radiated Spurious Emission Measurement Result: Frequency form 30MHz to 1000MHz

Operation Band	:BR(1M)	Test Date	:2018-09-17
Fundamental Frequency	:2480 MHz	Temp./Humi.	:23 deg_C / 62 RH
Operation Mode	:Tx CH HIGH	Engineer	:Tin
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:VERTICAL

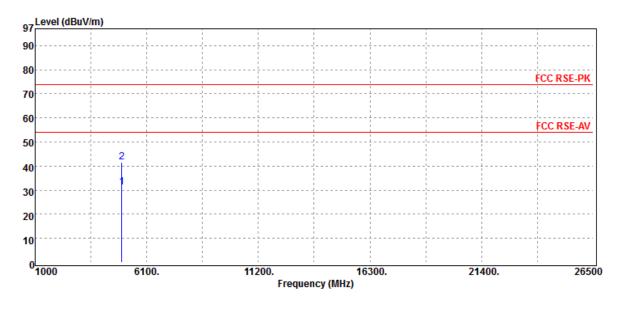

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
		Mode	Reading Level		FS	@3m		
_	MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB	
	4960.00	Average	25.11	6.05	31.16	54.00	-22.84	
	4960.00	Peak	35.41	6.05	41.46	74.00	-32.54	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Report No.: ER/2018/70061 Page 49 of 70



Operation Band	:BR(1M)
Fundamental Frequency	:2480 MHz
Operation Mode	:Tx CH HIGH
EUT Pol.	:E2 Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-09-17 :23 deg_C / 62 RH :Tin :HORIZONTAL

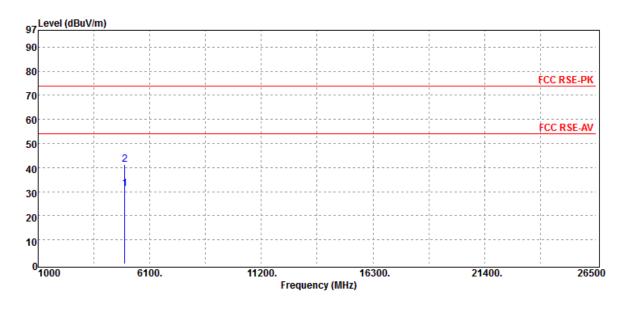

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4960.00	Average	25.31	6.05	31.36	54.00	-22.64
4960.00	Peak	35.30	6.05	41.35	74.00	-32.65


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Radiated Spurious Emission Measurement Result:

For Frequency above 1 GHz

Operation Band	:EDR(3M)	Test Date	:2018-08-28
Fundamental Frequency	:2402 MHz	Temp./Humi.	:23 deg_C / 62 RH
Operation Mode	:Tx CH LOW	Engineer	:Tin
EUT Pol.	:H Plane	Measurement Antenna Pol.	:VERTICAL

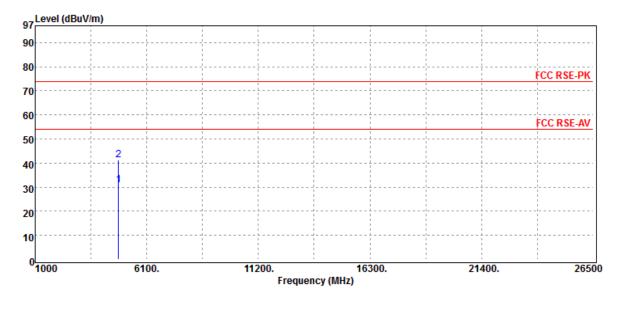

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4804.00	Average	25.11	5.65	30.76	54.00	-23.24
4804.00	Peak	35.70	5.65	41.35	74.00	-32.65

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Report No.: ER/2018/70061 Page 51 of 70



Operation Band	:EDR(3M)
Fundamental Frequency	:2402 MHz
Operation Mode	:Tx CH LOW
EUT Pol.	:H Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-08-28 :23 deg_C / 62 RH :Tin :HORIZONTAL

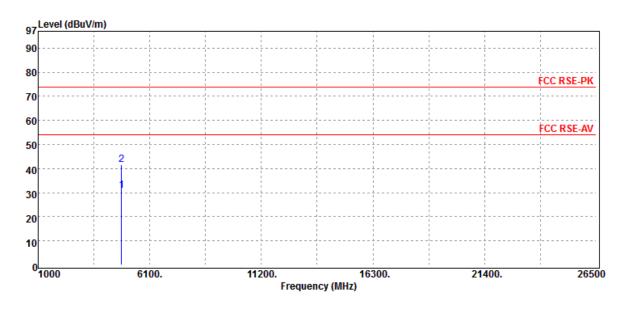


Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4804.00	Average	25.21	5.65	30.86	54.00	-23.14
4804.00	Peak	35.86	5.65	41.51	74.00	-32.49

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/70061 Page 52 of 70



Operation Band	:EDR(3M)	Test Date	:2018-08-28
Fundamental Frequency	:2441 MHz	Temp./Humi.	:23 deg_C / 62 RH
Operation Mode	:Tx CH MID	Engineer	:Tin
EUT Pol.	:H Plane	Measurement Antenna Pol.	:VERTICAL
20110.		measurement Antenna Pol.	

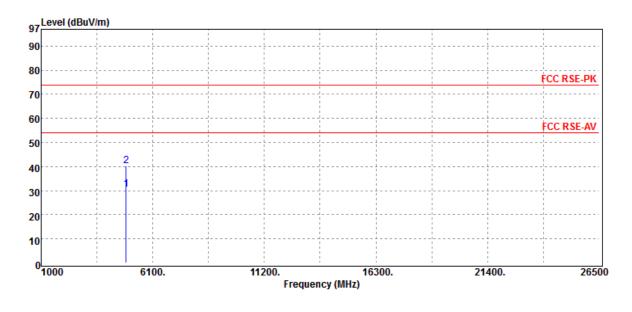

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	-
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4882.00	Average	24.59	5.90	30.49	54.00	-23.51
4882.00	Peak	34.30	5.90	40.20	74.00	-33.80


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Client's instructions, if any. The Company's sole responsibility is to its Client and this document be client and this document be and subject to a transaction documents. This document be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approach be proceeded to be used. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

Report No.: ER/2018/70061 Page 53 of 70



Operation Band	:EDR(3M)	Test Date	:2018-08-28
Fundamental Frequency	:2441 MHz	Temp./Humi.	:23 deg_C / 62 RH
Operation Mode	:Tx CH MID	Engineer	:Tin
EUT Pol.	:H Plane	Measurement Antenna Pol.	:HORIZONTAL

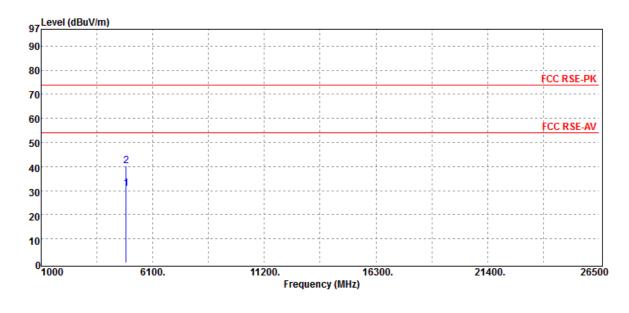

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
 MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
 4882.00	Average	25.13	5.90	31.03	54.00	-22.97
4882.00	Peak	34.38	5.90	40.28	74.00	-33.72

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Client's instructions, if any. The Company's sole responsibility is to its Client and this document be client and this document be and subject to a transaction documents. This document be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approach be proceeded to be used. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

Report No.: ER/2018/70061 Page 54 of 70



Operation Band :EDR(3M) Test Date **Fundamental Frequency** :2480 MHz Temp./Humi. **Operation Mode** :Tx CH HIGH Engineer EUT Pol. ·H Plane Measurement Antenna Pol.

:2018-08-28 :23 deg_C / 62 RH :Tin :VERTICAL

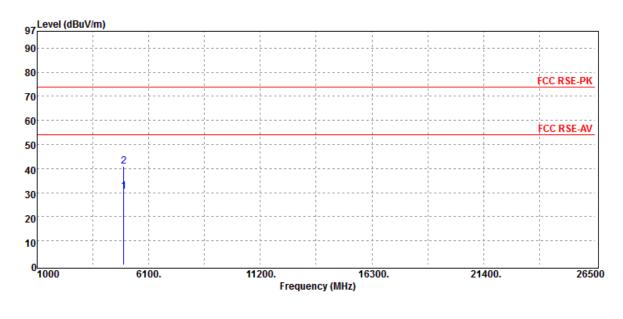

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	-
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4960.00	Average	24.49	6.05	30.54	54.00	-23.46
4960.00	Peak	34.85	6.05	40.90	74.00	-33.10

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Report No.: ER/2018/70061 Page 55 of 70



Operation Band	:EDR(3M)
Fundamental Frequency	:2480 MHz
Operation Mode	:Tx CH HIGH
EUT Pol.	:H Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-08-28 :23 deg_C / 62 RH :Tin :HORIZONTAL

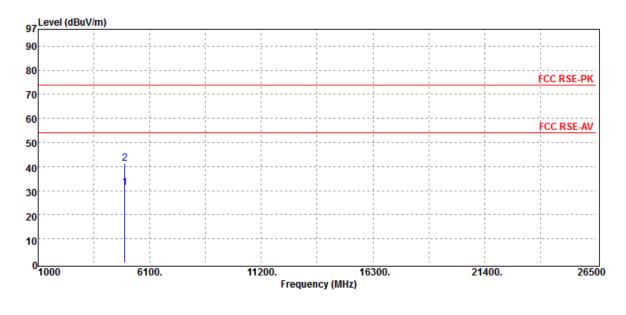

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4960.00	Average	25.09	6.05	31.14	54.00	-22.86
4960.00	Peak	35.16	6.05	41.21	74.00	-32.79

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



11 FREQUENCY SEPARATION


11.1 Standard Applicable

Frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25 kHz or the 2/3*20dB bandwidth of the hopping channel, whichever is greater.

11.2 Measurement Equipment Used

SGS Conducted Room						
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due	
Spectrum Analyzer	R&S	FSV-30	101398	Feb. 01st, 2018	Jan. 31th, 2019	
DC Power Supply	Anritsu	E3640A	MY52410006	Feb. 01st, 2018	Jan. 31th, 2019	
Attenuator	Mini-Circuit	BW-S10W2+	2	Nov. 28tg, 2017	Nov. 27th, 2018	
DC Block	Mini-Circuits	BLK-18-S+	1	Jan. 02nd, 2018	Jan. 01st, 2019	
Coaxial Cables	N/A	WK CE Cable	N/A	Jan. 02nd, 2018	Jan. 01st, 2019	
Notebook	Lenovo	L430	R9-WGNK5	Jan. 02nd, 2018	Jan. 01st, 2019	

11.3 Test Set-up



11.4 Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C63.10:2013.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set center frequency of spectrum analyzer = middle of hopping channel.
- 5. Set the spectrum analyzer as RBW, VBW=100 kHz, Adjust Span to 5MHz, Sweep = auto.
- 6. Max hold. Mark 3 Peaks of hopping channel and record the 3 peaks frequency.

除非另有說明,此報告結果僅對测試之樣品負責,同時比樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




11.5 Measurement Result

Channel separation (MHz)	Limit	Result
1	\geq 25 kHz or 2/3 times 20dB bandwidth	PASS

Frequency Separation Test Data

Frequency Separation_GFSK_1M_DH5_CH0CH1CH2

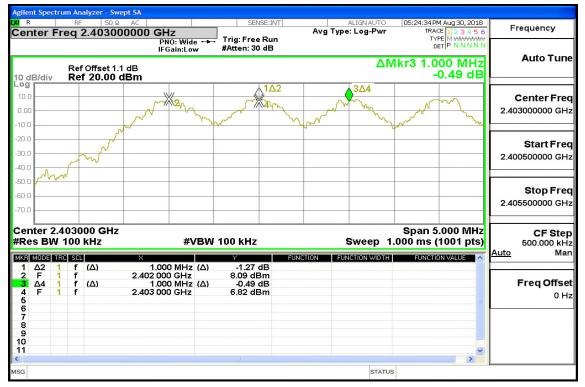

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



12 NUMBER OF HOPPING FREQUENCY


12.1 Standard Applicable

Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

12.2 Measurement Equipment Used

SGS Conducted Room						
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due	
Spectrum Analyzer	R&S	FSV-30	101398	Feb. 01st, 2018	Jan. 31th, 2019	
DC Power Supply	Anritsu	E3640A	MY52410006	Feb. 01st, 2018	Jan. 31th, 2019	
Attenuator	Mini-Circuit	BW-S10W2+	2	Nov. 28tg, 2017	Nov. 27th, 2018	
DC Block	Mini-Circuits	BLK-18-S+	1	Jan. 02nd, 2018	Jan. 01st, 2019	
Coaxial Cables	N/A	WK CE Cable	N/A	Jan. 02nd, 2018	Jan. 01st, 2019	
Notebook	Lenovo	L430	R9-WGNK5	Jan. 02nd, 2018	Jan. 01st, 2019	

12.3 Test Set-up



12.4 Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C63.10:2013.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set spectrum analyzer Start=2400MHz, Stop = 2483.5MHz, Sweep = auto.
- 5. Set the spectrum analyzer as RBW=430kHz, VBW=1.5MHz., Detector = Peak
- 6. Max hold, view and count how many channel in the band.

12.5 Measurement Result

Tabular Data of Total Channel Number

	Channel Number	Limit
2.4 GHz – 2.441 GHz	40	
2.441 GHz – 2.4835 GHz	39	>15
2.4 GHz ~2.4835 GHz	(40+39) = 79	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對测試之樣品負責,同時比樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Channel Number


05:25:05 PM Aug 30, 2018 TRACE 1 2 3 4 5 6 ALIGNAUTO Avg Type: Log-Pwr Frequency Center Freq 2.420500000 GHz Trig: Free Run PNO: Fast ++ IFGain:Low #Atten: 30 dB Auto Tune Mkr1 2.402 000 GHz Ref Offset 1.1 dB Ref 20.00 dBm 8.54 dBm 10 dB/div **Center Freq** 2.420500000 GHz 0.00 Start Freq 2.400000000 GHz 10.1 20. Stop Freq 2.441000000 GHz 30.1 **CF** Step 40.0 4.100000 MHz Man Auto 50. Freq Offset 0 Hz Center 2.42050 GHz Span 41.00 MHz #Res BW 430 kHz #VBW 1.5 MHz Sweep 1.000 ms (1001 pts) STATUS ISG

Hopping Frequency_GFSK_1M_DH5_2400-2441 MHz

Hopping Frequency_GFSK_1M_DH5_2441-2480 MHz

	er - Swept SA				
^{a R} RF Center Freq 2.4	50 Ω AC 62250000 GH	7	ALIGNAUTO 05:2	5:33PM Aug 30, 2018 TRACE 1 2 3 4 5 6	Frequency
Ref Off 0 dB/div Ref 20	Р	Gain:Low #Atten:	Mkr1 2.480		Auto Tun
10.0	www	www	AAAAAAA	VVV\	Center Fre 2.462250000 GH
10.0					Start Fr 2.441000000 GI
30.0					Stop Fr 2.483500000 G
0.0				hippw	CF St 4.250000 M Auto N
0.0					Freq Offe 0
itart 2.44100 GH		#VBW 1.5 MH:	 Stop Sweep 1.000	2.48350 GHz	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





TIME OF OCCUPANCY (DWELL TIME) 13


13.1 Standard Applicable

Frequency hopping systems operating in the 2400MHz-2483.5MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channel employed.

13.2 Measurement Equipment Used

SGS Conducted Room						
Name of Equip- ment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due	
Spectrum Analyzer	R&S	FSV-30	101398	Oct. 19th, 2017	Oct. 18th, 2018	
DC Power Supply	Anritsu	E3640A	MY52410006	Nov. 28th, 2017	Nov. 27th, 2018	
Attenuator	Mini-Circuit	BW-S10W2+	2	Jan. 02nd, 2018	Jan. 01st, 2019	
DC Block	Mini-Circuits	BLK-18-S+	1	Jan. 02nd, 2018	Jan. 01st, 2019	
Coaxial Cables	N/A	WK CE Cable	N/A	Jan. 02nd, 2018	Jan. 01st, 2019	
Notebook	Lenovo	L430	R9-WGNK5	N/A	N/A	

13.3 Test Set-up



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless to herwise stated the textus single(s) textual and textual to be the state and state textual to be days only. 防非方式 就明 : 此報告結果僅針測試之樣品負責、同時此樣品僅保留的人気。本報告未經公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_edocument.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is under the produced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



13.4 Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C6310:2015.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set center frequency of spectrum analyzer = operating frequency.
- 5. Set the spectrum analyzer as RBW, VBW=1MHz, 3MHz, Span = 0Hz, Detector = Peak, Adjust Sweep = 2~8ms.

6. Repeat above procedures until all frequency of the interest measured were complete.

Formula Deduced: time occupancy of one time slot X Hopping rate / total slot in one channel / total channel that hops X period of working channels.

Where, standard hopping rate is 1600 hops/s, slot in one channel for DH1, DH3, and DH5 is 2, 4, and 6, respectively.

DH1 consists of single time slot of the uplink, and one slot of the downlink Total Slot: 2 DH3 consists of three time slot of the uplink, and one slot of the downlink. Total Slot: 4 DH5 consists of five time slot of the uplink, and one slot of the downlink. Total Slot: 6

In AFH mode, hopping rate is 800 hop/s with 6 slots in 20 hopping channels with channel hopping rate (800 / 6 / 20) in Occupancy Time Limit (0.4 * 20) (S), Hop Over Occupancy Time comes to (800 / 6 / 20)*(0.4 *20) =53.33

Note: the result of the complete test default channel at 1Mbps is recorded on the test report, 2Mbps, and 3Mbps only records the measurement result at middle channel that reveals no much deviation.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



13.5 Tabular Result of the Measurement

GFSK (1Mbps)

Channel	PACKET TYPE	Measurement Result (ms)	Limit (ms)	1/T (kHz)	VBW setting (kHz)
	DH1	121.60	400ms	2.63	3.00
0	DH3	262.40	400ms	0.61	1.00
	DH5	308.80	400ms	0.35	1.00
	DH1	123.20	400ms	2.60	3.00
39	DH3	262.40	400ms	0.61	1.00
	DH5	307.20	400ms	0.35	1.00
	DH1	123.20	400ms	2.60	3.00
78	DH3	262.40	400ms	0.61	1.00
	DH5	308.80	400ms	0.00	1.00

$\pi/4$ DQPSK (2Mbps)

Channel	PACKET TYPE	Measurement Result (ms)	Limit (ms)	1/T (kHz)	VBW setting (kHz)
39	2DH1	124.80	400ms	2.56	3.00
	2DH3	262.40	400ms	0.61	1.00
	2DH5	307.20	400ms	0.35	1.00

8-DPSK (3Mbps)

Channel	PACKET TYPE	Measurement Result (ms)	Limit (ms)	1/T (kHz)	VBW setting (kHz)
	3DH1	123.20	400ms	2.60	3.00
39	3DH3	262.40	400ms	0.61	1.00
	3DH5	308.80	400ms	0.35	1.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



A period time = 0.4 (s) * 79 = 31.6 (s)

GFSK (1Mbps):

CH Low	DH1 time slot = DH3 time slot = DH5 time slot =	1.640 *	(1600/2/79) * (1600/4/79) * (1600/6/79) *	31.6 =	121.60 (ms) 262.40 (ms) 308.80 (ms)
CH Mid	DH1 time slot = DH3 time slot = DH5 time slot =	1.640 *	(1600/2/79) * (1600/4/79) * (1600/6/79) *	31.6 =	123.20 (ms) 262.40 (ms) 307.20 (ms)
CH High	DH1 time slot = DH3 time slot = DH5 time slot =	1.640 *	(1600/2/79) * (1600/4/79) * (1600/6/79) *	31.6 =	123.20 (ms) 262.40 (ms) 308.80 (ms)

π/4 -DQPSK (2Mbps):

CH Mid	2DH1 time slo =	0.390 *	(1600/2/79) *	31.6 =	124.80 (ms)
	2DH3 time slo =	1.640 *	(1600/4/79) *	31.6 =	262.40 (ms)
	2DH5 time slo =	2.880 *	(1600/6/79) *	31.6 =	307.20 (ms)

8-DPSK (3Mbps):

CH Mid	3DH1 time slo =	0.385 *	(1600/2/79) *	31.6 =	123.20 (ms)
	3DH3 time slo =	1.640 *	(1600/4/79) *	31.6 =	262.40 (ms)
	3DH5 time slo =	2.895 *	(1600/6/79) *	31.6 =	308.80 (ms)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



GFSK (1Mbps) for AFH Mode								
Hopping Channel	PACKET TYPE	Measurement	Limit					
Number	FAUREITTE	Result (ms)	(ms)					
20	DH5	154.40	400ms					
π/4 DQPSK (2Mbps) for AFH Mode								
Hopping Channel	PACKET TYPE	Measurement	Limit					
Number	FAGRETTIFE	Result (ms)	(ms)					
20	2DH5	153.60	400ms					
8-DPSK (3Mbps) for AFH Mode								
Hopping Channel	PACKET TYPE	Measurement	Limit					
Number	FACRELITE	Result (ms)	(ms)					
20	3DH5	154.40	400ms					

GFSK (1Mbps):

DH5 time s =	2.895	(ms)	*	(800/6/20 * 8 =	154.40	(ms)
π/4 -DQPSK (2Mbps						
2DH5 time =	2.880	(ms)	*	(800/6/20 * 8 =	153.60	(ms)
8-DPSK (3Mbps):						
3DH5 time =	2.895	(ms)	*	(800/6/20 * 8 =	154.40	(ms)


13.6 Measurement Result

Note: Refer to next page for plots.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Dwell Time GFSK 1M DH1 2402MHz

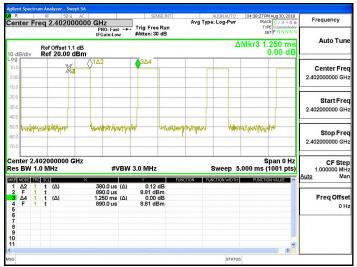

Dwell Time_GFSK_1M_DH1_2441MHz

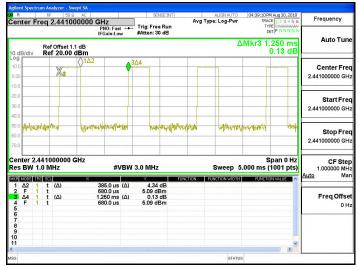

Dwell Time_GFSK_1M_DH1_2480MHz

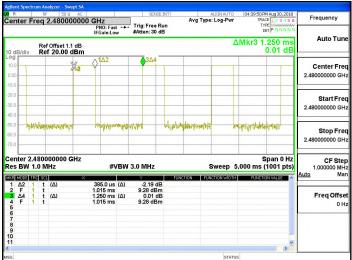

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅係留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號


台灣檢驗科技股份有限公司

f (886-2) 2298-0488


Dwell Time GFSK 1M DH3 2402MHz

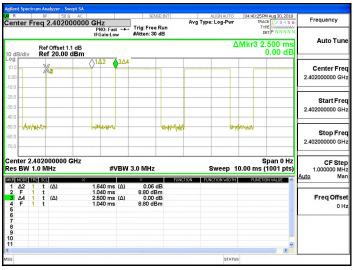

Dwell Time_GFSK_1M_DH3_2441MHz




Dwell Time_GFSK_1M_DH3_2480MHz

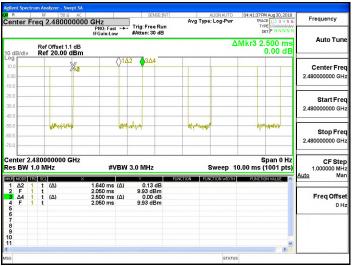





Dwell Time GFSK 1M DH5 2402MHz

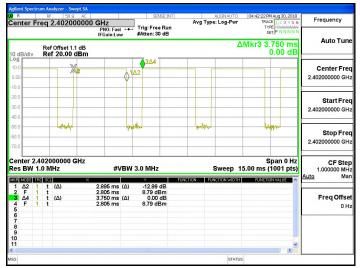

Dwell Time_GFSK_1M_DH5_2441MHz

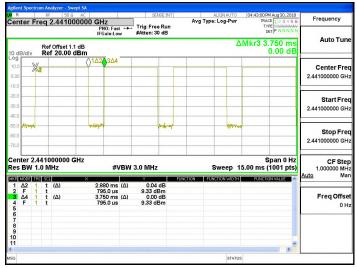

Dwell Time_GFSK_1M_DH5_2480MHz

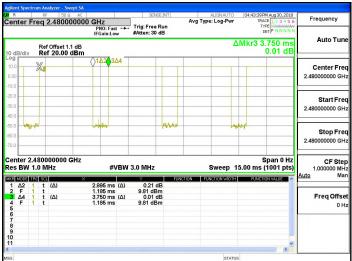

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅係留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號


台灣檢驗科技股份有限公司

f (886-2) 2298-0488


Dwell Time π4DQPSK 2M DH1 2402MHz

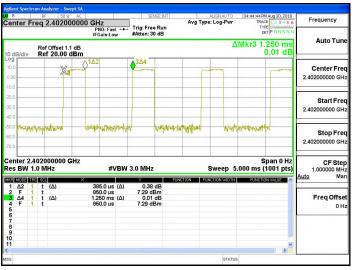

Dwell Time π4DQPSK 2M DH1 2441MHz

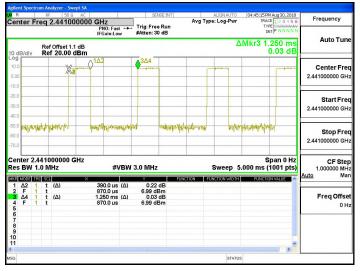


Dwell Time π4DQPSK 2M DH1 2480MHz

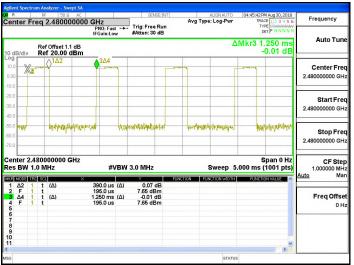





Dwell Time m4DQPSK 2M DH3 2402MHz

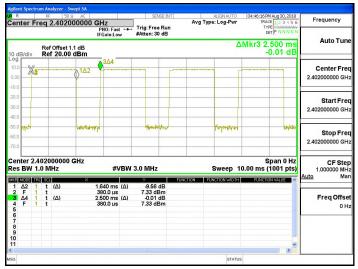

2M DH3 2441MHz Dwell Time π 4DQPSK

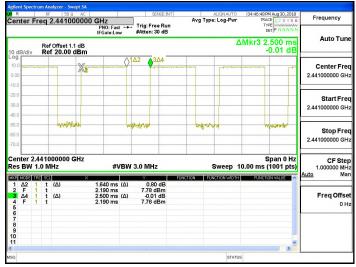

Dwell Time_π4DQPSK 2M DH3 2480MHz

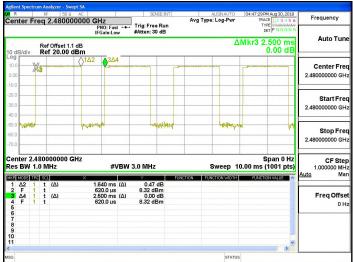

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅係留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號


台灣檢驗科技股份有限公司

f (886-2) 2298-0488


Dwell Time π4DQPSK 2M DH5 2402MHz

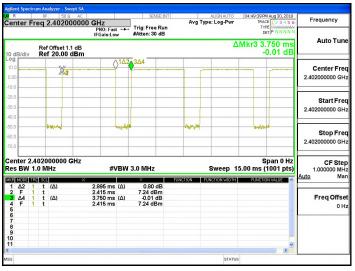

Dwell Time π4DQPSK 2M DH5 2441MHz

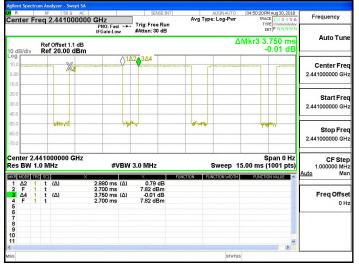


Dwell Time π4DQPSK 2M DH5 2480MHz

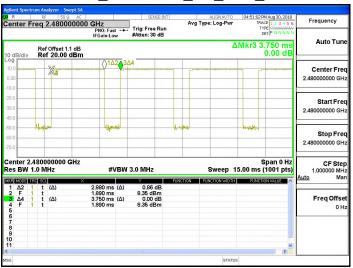





Dwell Time 8DPSK 3M DH1 2402MHz

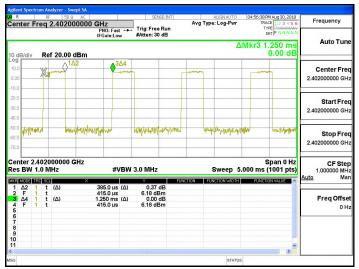

Dwell Time_8DPSK_3M_DH1 2441MHz

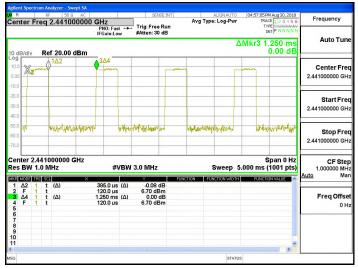

Dwell Time_8DPSK_3M_DH1_2480MHz

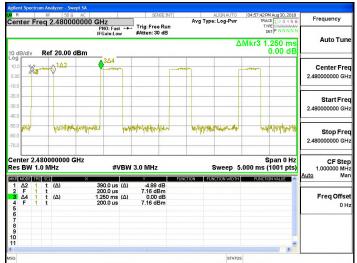

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅係留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號


台灣檢驗科技股份有限公司

f (886-2) 2298-0488




Member of SGS Group


Dwell Time 8DPSK 3M DH3 2402MHz

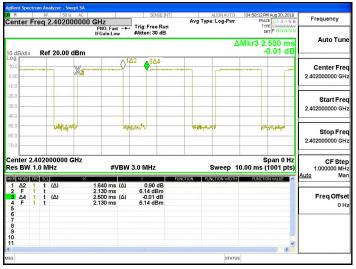

Dwell Time 8DPSK _3M_DH3_2441MHz

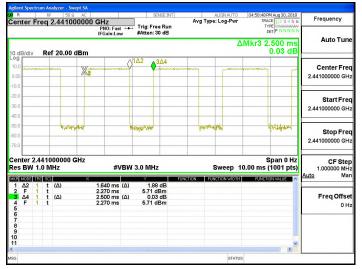

Dwell Time_8DPSK_3M_DH3_2480MHz

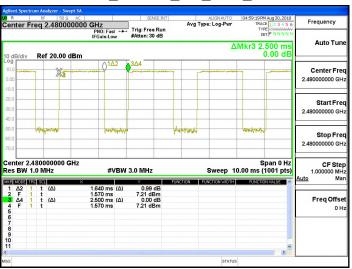





Dwell Time 8DPSK 3M DH5 2402MHz

-	57 PM Aug 30, 2018	04:59:57	ALIGNAUTO		SENSE:IN		50 Q AC	RF		
Frequency	TYPE VININAN DET P NNNN	T	e: Log-Pwr	Avg Ty	Trig: Free Run #Atten: 30 dB	GHz PNO: Fast ↔ IFGain:Low	02000000	eq 2.	Fre	nter
Auto Tun	3.750 ms 0.00 dB	Mkr3 3	Δ				0.00 dBm	Ref 2	v	B/div
Center Fre		***	7		~~~	3Δ4				1
2.402000000 GF								_		
Start Fre 2.402000000 GH								-		
Stop Fre	halkonish		yeway		papalo		Coperand	+		
CF Ste 1.000000 MH	Span 0 Hz s (1001 pts)		Sweep 1		3.0 MHz	#VBW	000 GHz	02000 0 MH		
<u>Auto</u> Ma	CTION VALUE	FUNCT	INCTION WIDTH	FUNCTION	0.59 dB	2.880 ms (∆)	×	t (4	1 TRU	море Δ2
Freq Offso 0 ⊦					6.20 dBm 0.00 dB 6.20 dBm	75.00 μs 3.750 ms (Δ) 75.00 μs		t t t	1 1	F ∆4 F
	~									

Dwell Time_8DPSK_3M_DH5_2441MHz



Dwell Time_8DPSK_3M_DH5_2480MHz

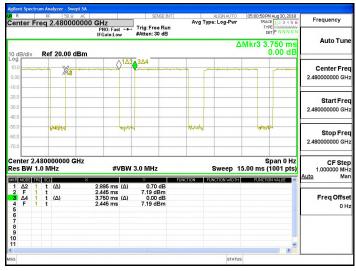

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Difference states are states ar prosecuted to the fullest extent of the law.

. SGS Taiwan Ltd. | No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司 Ⅰ t (886-2) 229	99-3279
------------------------------	---------



14 ANTENNA REQUIREMENT

14.1 Standard Applicable

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device. If the transmitting antenna is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi.

14.2 Antenna Connected Construction

The antenna is designed as permanently attached and no consideration of replacement. Please see EUT photo for details.

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless to herwise stated the textus single(s) textual and textual to be the state and state textual to be days only. 防非方式 就明 : 此報告結果僅針測試之樣品負責、同時此樣品僅保留的人気。本報告未經公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_edocument.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is under the produced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.