

# ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

# INTENTIONAL RADIATOR CERTIFICATION TO **FCC PART 15 SUBPART C REQUIREMENT**

OF

FUJITSU CONNECTED TECHNOLOGIES Ltd.

**Applicant:** 1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki 211-8588,

Japan

**Product Name: Smart Phone** 

**Brand Name: FUJITSU** 

Model No.: 801FJ

**Model Difference:** N/A

FCC ID: 2AQYEFMP170

**Report Number:** T190327W10-RP6

**FCC Rule Part:** §15.247, Cat: DSS

**Issue Date:** May 9th, 2019

Mar. 27th, 2019~Apr. 18th, 2019 Date of Test:

Date of EUT Received: Mar. 27th, 2019

Issued by: Compliance Certification Services Inc.Wugu Lab.

No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Tai-

wan. (R.O.C.) service@ccsrf.com


The test Result was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were given in ANSI C63.10: 2013 and compliance standards.

The test results of this report relate only to the tested sample (EUT) identified in this report The test Report of full or partial shall not copy. Without written approval of Compliance Certification Services Inc. (Wugu Laboratory).

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report retier only to the sample(s) tested and such sample(s) are retained for 90 days only.

Phis document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the company and the print of the Company and the parties of the Company and the parties of the company and extension of transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law





Tested By:

Jerry Lu / Sr. Engineer

Approved By:

Kevin Tsai / Deputy Manager





Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此概告结果僅對測減之樣品負責,同時此樣品僅保留90天。本概告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and to solve expensibility is to its Client and to solve expensibility is to its Client and to solve expensibility is to its Client's instructions, if any. The Company's solve expensibility is to its Client's instructions, if any. The Company's findings at the time of its intervention only and within the limits of the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



# **Revision History**

Report Number	Revision	Description	Effected Page	Issue Date	Revised By
T190327W10-RP6	Rev.00	Initial creation of document	All	May 9th, 2019	Violetta Tang

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



# **Contents**

1	GENERAL INFORMATION	5
2	SYSTEM TEST CONFIGURATION	7
3	SUMMARY OF TEST RESULTS	8
4	DESCRIPTION OF TEST MODES	9
5	MEASUREMENT UNCERTAINTY	12
6	CONDUCTED EMISSION TEST	13
7	PEAK OUTPUT POWER MEASUREMENT	17
8	20dB BANDWIDTH MEASUREMENT	19
9	CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT	23
10	RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT	29
11	FREQUENCY SEPARATION	58
12	NUMBER OF HOPPING FREQUENCY	60
13	TIME OF OCCUPANCY (DWELL TIME)	62
14	ANTENNA REQUIREMENT	71

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



# **GENERAL INFORMATION**

# 1.1 Product description

#### General:

niciai.				
Product Name:	Smart Phone			
Brand Name:	FUJITSU			
Model No.:	801FJ			
Model difference:	N/A			
Hardware Version:	V2.0.0			
Software Version:	V00R028A			
		n Rechargeable Li-ion Battery or 5Vdc /7Vdc / 9Vdc / AC/DC Adapter		
Power Supply:	Battery:	Model No.: CA08723-1021, Supplier: FUJITSU CONNECTED TECHNOLOGIES LIMITED		
	Adapter: Model No.: SB-AC20-TCPD Supplier: SoftBank SELECTION			

#### Bluetooth BR+EDR:

Frequency Range:	2.402GHz – 2.480GHz	
Bluetooth Version	BT V4.2 (dual mode)	
Channel number:	79 channels	
Modulation type:	GFSK + π/4DQPSK + 8DPSK	
Transmit Power:	9.43dBm	
Antenna Designation:	λ/4 Monopole Antenna, Peak Gain: -1.52 dBi	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



# 1.2 Test Methodology of Applied Standards

FCC Part 15, Subpart C §15.247

KDB 558074 D01 v05r01 DSS Meas. Guidance

ANSI C63.10:2013

Note: All test items have been performed and record as per the above standards.

# 1.3 Test Facility

Compliance Certification Services Inc. Wugu Lab. No.11, Wugong 6th Rd.,

Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.) (TAF code 1309)

FCC Designation number: TW1309

# 1.4 Special Accessories

There is no special accessory used while test was conducted.

# 1.5 Equipment Modifications

There was no modification incorporated into the EUT.



#### SYSTEM TEST CONFIGURATION

## 2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

#### 2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

#### 2.3 Test Procedure

#### 2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz. The CISPR Quasi-Peak and Average detector mode is employed according to §15.207. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

#### 2.3.2 Radiated Emissions

The EUT is a placed on as turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plan. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field ra-

emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

#### 2.4 Measurement Results Explanation Example

#### For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



# 2.5 Configuration of Tested System Fig. 2-1 Radiated Emission



Fig. 2-2 AC Power Line Conducted **Emission** 





Fig. 2-3 Conducted (Antenna Port) **Emission** 



**Table 2-1 Equipment Used in Tested System** 

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	<b>Power Cord</b>
1	Bluetooth Test Software	N/A	N/A	N/A	N/A	N/A
2.	DC Power Supply	Agilent	E3640A	KR93300208	N/A	Unshielded
3.	Notebook	Lenovo	T440P	PC-089AH5	Shielded	Unshielded

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Otherwise stated the results shown in this test report reter only to the sample(s) tested and such sample(s) are retained for 90 days only. 

Phys A Risk Right R transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



# **SUMMARY OF TEST RESULTS**

FCC Rules	Description Of Test	Result
§15.207(a)	AC Power Line Conducted Emission	Compliant
§15.247(b)(1)	Peak Output Power	Compliant
§15.247(a)(1)	20dB & 99% Bandwidth	Compliant
§15.205 §15.209 §15.247(d)	Conducted Band Edge and Spurious Emission	Compliant
§15.205 §15.209 §15.247(d)	Radiated Band Edge and Spurious Emission	Compliant
§15.247(a)(1)	Frequency Separation	Compliant
§15.247(a)(1)(iii)	Number of hopping frequency	Compliant
§15.247(a)(1)(iii)	Time of Occupancy	Compliant
§15.203 §15.247(b)	Antenna Requirement	Compliant

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



# **DESCRIPTION OF TEST MODES**

# 4.1 Operated in 2400 ~ 2483.5MHz Band

79 channels are provided for Bluetooth

79 Chamiles are provided for bluetooth							
ITEM	FREQUENCY	ITEM	FREQUENCY	ITEM	FREQUENCY	ITEM	FREQUENCY
1	2402 MHz	21	2422 MHz	41	2442 MHz	71	2462 MHz
2	2403 MHz	22	2423 MHz	42	2443 MHz	72	2463 MHz
3	2404 MHz	23	2424 MHz	43	2444 MHz	73	2464 MHz
4	2405 MHz	24	2425 MHz	44	2445 MHz	74	2465 MHz
5	2406 MHz	25	2426 MHz	45	2446 MHz	75	2466 MHz
6	2407 MHz	26	2427 MHz	46	2447 MHz	76	2467 MHz
7	2408 MHz	27	2428 MHz	47	2448 MHz	77	2468 MHz
8	2409 MHz	28	2429 MHz	48	2449 MHz	78	2469 MHz
9	2410 MHz	29	2430 MHz	49	2450 MHz	79	2470 MHz
10	2411 MHz	30	2431 MHz	50	2451 MHz	70	2471 MHz
11	2412 MHz	31	2432 MHz	51	2452 MHz	71	2472 MHz
12	2413 MHz	32	2433 MHz	52	2453 MHz	72	2473 MHz
13	2414 MHz	33	2434 MHz	53	2454 MHz	73	2474 MHz
14	2415 MHz	34	2435 MHz	54	2455 MHz	74	2475 MHz
15	2416 MHz	35	2436 MHz	55	2456 MHz	75	2476 MHz
16	2417 MHz	36	2437 MHz	56	2457 MHz	76	2477 MHz
17	2418 MHz	37	2438 MHz	57	2458 MHz	77	2478 MHz
18	2419 MHz	38	2439 MHz	58	2459 MHz	78	2479 MHz
19	2420 MHz	39	2440 MHz	59	2460 MHz	79	2480 MHz
20	2421 MHz	40	2441 MHz	60	2461 MHz		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



#### 4.2 The Worst Test Modes and Channel Details

- 1 The EUT has been tested under operating condition.
- 2 Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.
- 3 Investigation has been done on all the possible configurations for searching the worst case.

#### AC POWER LINE CONDUCTED EMISSION TEST:

Test Condition	AC Power line conducted emission for line and neutral
Worst Case	Operation in normal mode

#### **RADIATED EMISSION TEST:**

RADIATED EMISSION TEST (BELOW 1 GHz)						
MODE	AVAILABLE FREQUENCY (MHz)	TESTED FREQUENCY (MHz)	MODULATION	PACKET TYPE		
Bluetooth	2402 to 2480	2441	GFSK	DH5		
	RADIATED EMISSION TEST (ABOVE 1 GHz)					
Bluetooth	2402 to 2480	2402, 2441, 2480	GFSK	DH5		

**Note:** The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for Bluetooth BR+EDR Transmitter for channel Low, Mid and High, the worst case E2 position was reported.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



#### ANTENNA PORT CONDUCTED MEASUREMENT:

CONDUCTED TEST								
	Peak Output Power, 20dB Band Width							
MODE	AVAILABLE FREQUENCY (MHz)	TESTED FREQUENCY (MHz)	MODULATION	PACKET TYPE				
Bluetooth	2402 to 2480	2402, 2441, 2480	GFSK, π/4-DQPSK, 8-DPSK	DH1/DH3/DH5				
		Band B	Edge					
Bluetooth	2402 to 2480	2402, 2441, 2480	GFSK, 8-DPSK	DH1/DH5				
		Conducted	Emission					
Bluetooth	2402 to 2480	2402, 2441, 2480	GFSK, π/4-DQPSK, 8-DPSK	DH1/DH3/DH5				
		Frequency S	Separation					
Bluetooth	2402 to 2480	2402, 2441, 2480	GFSK	DH5				
	Number of hopping frequency							
Bluetooth	2402 to 2480	2402, 2441, 2480	GFSK	DH5				
	Time of Occupancy (Dwell time)							
Bluetooth	2402 to 2480	2402, 2441, 2480	GFSK, π/4-DQPSK, 8-DPSK	DH1/DH3/DH5				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



#### MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
AC Powerline Conducted Emission	+/- 1.2575 dB
Peak Output Power	+/- 1.924 dB
20dB Bandwidth	+/- 147.256 Hz
100 kHz Bandwidth of Frequency Band Edges	+/- 1.924 dB
Frequency Separation	+/- 147.256 Hz
Number of hopping frequency	+/- 147.256 Hz
Time of Occupancy	+/- 147.256 Hz
3M Semi Anechoic Chamber / 30M~200M	+/- 4.12 dB
3M Semi Anechoic Chamber / 200M~1000M	+/- 4.68 dB
3M Semi Anechoic Chamber / 1G~8G	+/- 5.18 dB
3M Semi Anechoic Chamber / 8G~18G	+/- 5.47 dB
3M Semi Anechoic Chamber / 18G~26G	+/- 3.81 dB
3M Semi Anechoic Chamber / 26G~40G	+/- 3.87 dB

#### Note:

- 1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2. ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report.
- 3. The conformity assessment statement in this report is based solely on the test results, measurement uncertainty is excluded.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report retier only to the sample(s) tested and such sample(s) are retained for 90 days only.

Phis document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the company and the print of the Company and the parties of the Company and the parties of the company and extension of transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



#### CONDUCTED EMISSION TEST

# 6.1 Standard Applicable

Frequency within 150 kHz to 30MHz shall not exceed the limit table as below.

Frequency range	Limits dB(uV)		
MHz	Quasi-peak	Average	
0.15 to 0.50	66 to 56	56 to 46	
0.50 to 5	56	46	
5 to 30	60	50	

#### Note

- 1. The lower limit shall apply at the transition frequencies
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

# 6.2 Measurement Equipment Used

	Conducted Emission Test Site							
EQUIPMENT	MFR	MODEL SERIAL		LAST	CAL DUE.			
TYPE		NUMBER	NUMBER	CAL.				
CABLE	EMCI	CFD300-NL	CERF	Jun. 29th, 2018	Jun. 28th, 2019			
EMI Test Receiver	R&S	ESCI	100064	Jul. 24th, 2018	Jul. 23th, 2019			
LISN	SCHWARZBECK	NSLK 8127	8127-541	Jan. 31th, 2019	Jan. 30th, 2020			
LISN	SCHAFFNER	NNB 41	03/10013	Feb. 13th, 2019	Feb. 12th, 2020			
Software		EZ-EMC(CCS-3A1-CE)						


#### 6.3 EUT Setup

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI 63.10:2013.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



# 6.4 Test SET-UP (Block Diagram of Configuration)

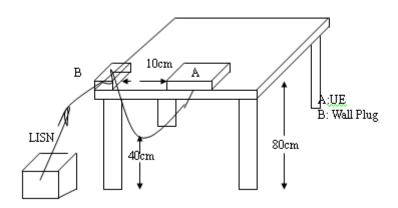

#### 6.5 Measurement Procedure

- 1. The EUT was placed on a table which is 0.8m above ground plan.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.

#### 6.6 Measurement Result

Note: Refer to next page for measurement data and plots.

Note2: The \* reveals the worst-case results that closet to the limit

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




# AC POWER LINE CONDUCTED EMISSION TEST DATA

**Description:** Operation Date: 2019/4/11

Temp.(°C)/Hum.(%): 22.5(°C)/61% Line: L1

AC 120V/60Hz **Test Voltage:** Test By: Peter

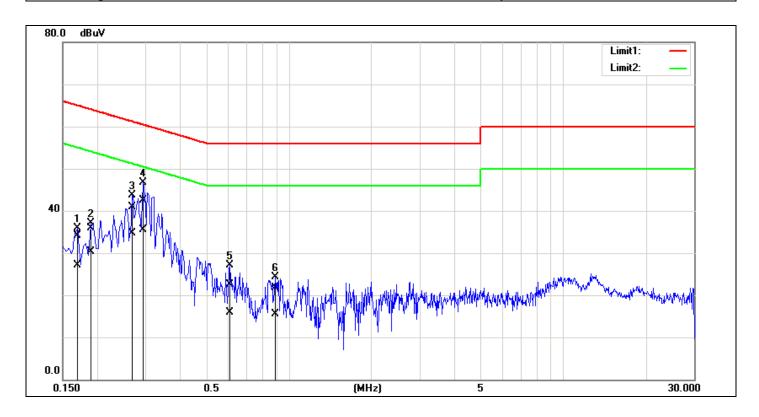

No.	Frequency	QuasiPeak	Average	Correction	QuasiPeak	Average	QuasiPeak	Average	QuasiPeak	Average	Remark
		reading	reading	factor	result	result	limit	limit	margin	margin	
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1	0.1700	33.97	26.87	0.16	34.13	27.03	64.96	54.96	-30.83	-27.93	Pass
2	0.1900	35.82	30.16	0.15	35.97	30.31	64.03	54.04	-28.06	-23.73	Pass
3	0.2700	40.75	34.49	0.15	40.90	34.64	61.12	51.12	-20.22	-16.48	Pass
4*	0.2940	42.45	35.34	0.15	42.60	35.49	60.41	50.41	-17.81	-14.92	Pass
5	0.6100	22.26	15.76	0.16	22.42	15.92	56.00	46.00	-33.58	-30.08	Pass
6	0.8900	21.57	15.41	0.18	21.75	15.59	56.00	46.00	-34.25	-30.41	Pass

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此概告结果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


Member of the SGS Group (SGS SA)



**Description:** Date: 2019/4/11 Operation

Temp.( $^{\circ}$ C)/Hum.( $^{\circ}$ ): 24(°C)/50% Line:

**Test Voltage:** AC 120V/60Hz Test By: Peter

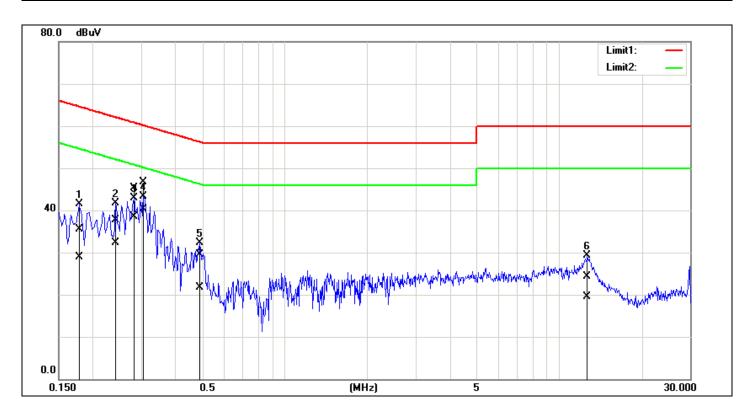

No.	Frequency	QuasiPeak	Average	Correction	QuasiPeak	Average	QuasiPeak	Average	QuasiPeak	Average	Remark
		reading	reading	factor	result	result	limit	limit	margin	margin	
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1	0.1780	35.38	28.81	0.05	35.43	28.86	64.58	54.58	-29.15	-25.72	Pass
2	0.2420	37.75	32.33	0.05	37.80	32.38	62.03	52.03	-24.23	-19.65	Pass
3	0.2820	45.20	38.53	0.05	45.25	38.58	60.76	50.76	-15.51	-12.18	Pass
4*	0.3060	46.58	40.34	0.06	46.64	40.40	60.08	50.08	-13.44	-9.68	Pass
5	0.4900	29.54	21.61	0.06	29.60	21.67	56.17	46.17	-26.57	-24.50	Pass
6	12.6620	24.17	19.33	0.17	24.34	19.50	60.00	50.00	-35.66	-30.50	Pass

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Otherwise stated the results shown in this test report reter only to the sample(s) tested and such sample(s) are retained for 90 days only. 

Phys A Risk Right R transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



#### PEAK OUTPUT POWER MEASUREMENT


## 7.1 Standard Applicable

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, The Limit: 1Watt. For all other frequency hopping systems in the 2400 -2483.5MHz band: The Limit: 0.125 Watts. The power limit for 1Mbps is 1watt, and 2Mbps, 3Mbps and AFH mode are 0.125 watts.

# 7.2 Measurement Equipment Used

Conducted Emission Test Site								
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.			
TYPE		NUMBER	NUMBER	CAL.				
Power Meter	Anritsu	ML2496A	1242004	Oct. 23th, 2018	Oct. 22th, 2019			
Power Sensor	Anritsu	MA2411B	1207365	Oct. 23th, 2018	Oct. 22th, 2019			
Power Sensor	Anritsu	MA2411B	1207368	Oct. 24th, 2018	Oct. 23th, 2019			
DC Power Supply	Agilent	E3640A	KR93300208	Aug. 15th, 2018	Aug. 14th, 2019			
Attenuator	Mini-Circuit	BW-S10W2+	1	Feb. 26th, 2019	Feb. 25th, 2020			

## 7.3 Test Set-up:



#### 7.4 Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C63.10 Measurement Guidelines.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter or spectrum. (Max Hold, Detector = Peak, RBW >=20dB bandwidth)
- 4. Record the max. reading.
- 5. Repeat above procedures until all default test channel is completed.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



#### 7.5 Measurement Result

1M BR mode (Peak): 1M BR mode (Average):

	•	<u> </u>			(				
СН	Freq. (MHz)	Peak Output Power (dBm)	Output Power (mW)	Limit (mW)	СН	Freq. (MHz)	Max. Output include tune up tolerance Power (dBm)	Output Power (mW)	Limit (mW)
Low	2402	9.22	8.356	1000	Low	2402	9.18	8.287	1000
Mid	2441	9.32	8.551	1000	Mid	2441	9.22	8.363	1000
High	2480	8.87	7.709	1000	High	2480	8.72	7.454	1000

2M EDR mode (Peak):

2M EDR mode (Average):

					= == ( 9-).						
СН	Freq. (MHz)	Peak Output Power (dBm)	Output Power (mW)	Limit (mW)	СН	Freq. (MHz)	Max. Avg.Output include tune up tolerance Power (dBm)	Output Power (mW)	Limit (mW)		
Low	2402	9.17	8.260	125	Low	2402	7.07	5.098	125		
Mid	2441	9.17	8.260	125	Mid	2441	7.11	5.145	125		
High	2480	8.70	7.413	125	High	2480	6.70	4.681	125		

3M EDR mode (Peak):

3M EDR mode (Average):

СН	Freq. (MHz)	Peak Output Power (dBm)	Output Power (mW)	Limit (mW)	СН	Freq. (MHz)	Max. Avg.Output include tune up tolerance Power (dBm)	Output Power (mW)	Limit (mW)
Low	2402	9.43	8.770	125	Low	2402	7.07	5.098	125
Mid	2441	9.41	8.730	125	Mid	2441	7.09	5.121	125
High	2480	8.91	7.780	125	High	2480	6.57	4.543	125
MOTI	- aahla la	oc oc 0 02d	D that offca	to in the o	*Note	· Max Ou	itnut inalisda tuna un	talaranaa	Dower

NOTE: cable loss as 0.83dB that offsets in the s<sub>i</sub>

\*Note: Max. Output include tune up tolerance Power measured by using average detector.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report retier only to the sample(s) tested and such sample(s) are retained for 90 days only.

Phis document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the company and the print of the Company and the parties of the Company and the parties of the company and extension of transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



# 20DB BANDWIDTH MEASUREMENT

# 8.1 Standard Applicable

For frequency hopping systems operating in the 2400MHz-2483.5 MHz no limit for 20dB bandwidth.

## 8.2 Measurement Equipment Used

Conducted Emission Test Site							
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.		
TYPE		NUMBER	NUMBER	CAL.			
DC Power Supply	Agilent	E3640A	KR93300208	Aug. 15th, 2018	Aug. 14th, 2019		
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY57120290	Feb. 13th, 2019	Feb. 12th, 2020		
DC Block	Mini-Circuits	BLK-18-S+	31129(1)	Feb. 26th, 2019	Feb. 25th, 2020		
Attenuator	Mini-Circuit	BW-S10W2+	1	Feb. 26th, 2019	Feb. 25th, 2020		

# 8.3 Test Set-up



### 8.4 Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C63.10:2013.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set the spectrum analyzer as RBW=10 kHz (1 % of 20 dB Bandwidth.), VBW = 30 kHz, Span= 3MHz, Sweep=auto, Detector = Peak, and Max hold for 20dB Bandwidth test.
- 5. Mark the peak frequency and –20dB (upper and lower) frequency
- 6. Repeat above procedures until all test default channel is completed

#### NOTE:

1. For the plot of bandwidth measurement, the marker of the 20dB BW is arrow-mark.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



#### 8.5 Measurement Result

	EC	v
(7	-5	n

GFSK				
	20 dB	2/3		
СН	BW	BW		
	(MHz)	(MHz)		
Low	0.923	0.62		
Mid	0.919	0.61		
High	0.921	0.61		

π	/4-	D	Q	P	S	K
---	-----	---	---	---	---	---

11/4-DQF3K						
	20 dB	2/3				
СН	BW	BW				
	(MHz)	(MHz)				
Low	1.254	0.84				
Mid	1.255	0.84				
High	1.253	0.84				

#### 8-DPSK

СН	20 dB BW	2/3 BW	
C	(MHz)	(MHz)	
Low	1.254	0.84	
Mid	1.254	0.84	
High	1.253	0.84	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




## OBW 20dB\_GFSK\_1M\_DH5\_2402MHz




#### OBW 20dB π4DQPSK 2M DH5 2402MHz




# OBW 20dB\_GFSK\_1M\_DH5\_2441MHz



#### OBW 20dB π4DQPSK 2M DH5 2441MHz



### OBW 20dB GFSK 1M DH5 2480MHz



# OBW 20dB\_π4DQPSK\_2M\_DH5\_2480MHz




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only




# OBW 20dB 8DPSK 3M DH5 2402MHz



#### OBW 20dB 8DPSK 3M DH5\_2441MHz



# OBW 20dB\_8DPSK\_3M\_DH5\_2480MHz

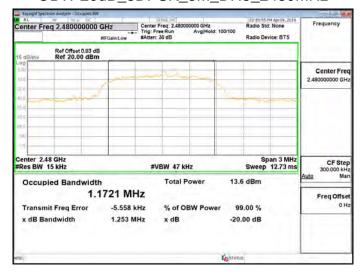

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



#### 9 CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT


## 9.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

# 9.2 Measurement Equipment Used

Conducted Emission Test Site							
EQUIPMENT MFR MODEL SERIAL LAST CAL							
TYPE		NUMBER	NUMBER	CAL.			
DC Power Supply	Agilent	E3640A	KR93300208	Aug. 15th, 2018	Aug. 14th, 2019		
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY57120290	Feb. 13th, 2019	Feb. 12th, 2020		
DC Block	Mini-Circuits	BLK-18-S+	31129(1)	Feb. 26th, 2019	Feb. 25th, 2020		
Attenuator	Mini-Circuit	BW-S10W2+	1	Feb. 26th, 2019	Feb. 25th, 2020		

# 9.3 Test SET-UP



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



#### 9.4 Measurement Procedure

# **Conducted Band Edge:**

- Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C63.10:2013.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set center frequency of spectrum analyzer = operating frequency.
- 5. Set the spectrum analyzer as RBW=100 kHz, VBW=300 kHz, Sweep = auto
- 6. Mark Peak, 2.3999GHz and 2.4836GHz and record the max. level.
- 7. Repeat above procedures until all frequency measured were complete.

# **Conducted Spurious Emission:**

- 1. To connect Antenna Port of EUT to Spectrum.
- The testing follows ANSI C63.10:2013.
- 3. Set RBW = 100 kHz & VBW = 300 kHz, Detector = Peak, Sweep = Auto
- 4. Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
- 6. Repeat above procedures until all default test channel measured were complete.

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where	S .	CL = Cable Attenuation Factor (Cable Loss)		
	RA = Reading Amplitude	AG = Amplifier Gain		
	AF = Antenna Factor			


#### 9.5 Measurement Result

See next page for test plots.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




# Band Edge\_GFSK\_1M\_DH5\_2402MHz

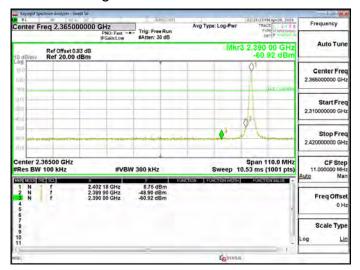


# Band Edge GFSK 1M DH5 2480MHz

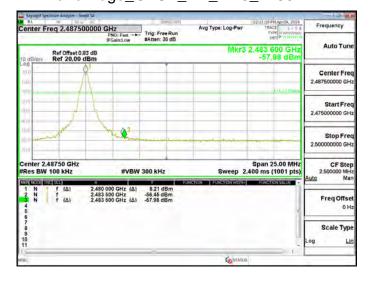

#### Band Edge 8DPSK 3M DH5 2402MHz




# Band Edge 8DPSK 3M DH5 2480MHz




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




# Hopping Band Edge GFSK 1M DH5 2402MHz

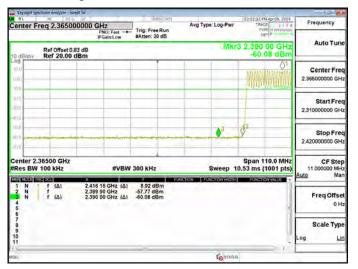


Hopping Band Edge\_GFSK\_1M\_DH5\_2480MHz

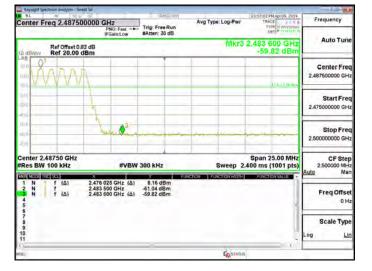

# Hopping Band Edge 8DPSK 3M DH5 2402MHz



Hopping Band Edge\_8DPSK\_3M\_DH5\_2480MHz




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




# Spurious Emission\_GFSK\_1M\_DH5\_2402MHz

# enter Freq 13.015000000 GHz Mkr4 25,667 6 GHz -52,40 dBm Center Fre Start Fre nter 13.02 GHz Span 25.97 GHz Sweep 2.482 s (30001 pts) CF Ste 2.5970 Scale Typ


# Spurious Emission\_π/4DQPSK\_2M\_2402MHz




#### 2441MHz Spurious Emission\_GFSK\_1M\_DH5\_




Spurious Emission\_π/4DQPSK\_ 2M 2441MHz



#### Spurious Emission\_GFSK\_1M\_ DH<sub>5</sub> 2480MHz




Spurious Emission\_π/4DQPSK 2M 2480MHz




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only




# Spurious Emission 8DPSK 3M DH5 2402MHz



# Spurious Emission\_8DPSK\_3M\_DH5



#### Spurious Emission\_8DPSK\_3M\_DH5 2480MHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



# 10 RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT

# 10.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands must also comply with the §15.209 limit as below.

And according to §15.33(a) (1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

Frequency (MHz)	Field strength (microvolts/meter)	Distance (meters)	
0.009-0.490	2400/F(kHz)	300	
0.490-1.705	24000/F(kHz)	30	
1.705-30	30	30	
30-88	100	3	
88-216	150	3	
216-960	200	3	
Above 960	500	3	

#### Note:

- 1. The lower limit shall apply at the transition frequencies.
- 2. Emission level  $(dB\mu V/m) = 20 \log Emission level (dB\mu V/m)$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



# 10.2 Measurement Equipment Used

	966A Chamber						
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.		
TYPE		NUMBER	NUMBER	CAL.			
Band Reject Filters	MICRO TRONICS	BRM 50702	120	Feb. 26th, 2019	Feb. 25th, 2020		
Bilog Antenna	Sunol Sciences	JB3	A030105	Jul. 13th, 2018	Jul. 12th, 2019		
Cable	HUBER SUHNER	SUCOFLEX 104PEA	25157	Feb. 26th, 2019	Feb. 25th, 2020		
Cable	HUBER SUHNER	SUCOFLEX 104PEA	20995	Feb. 26th, 2019	Feb. 25th, 2020		
Digital Thermo-Hygro Meter	WISEWIND	1206	D07	Jan. 30th, 2019	Jan. 29th, 2020		
double Ridged Guide Horn Antenna	ETC	MCTD 1209	DRH13M02003	Aug. 20th, 2018	Aug. 19th, 2019		
Loop Antenna	COM-POWER	AL-130	121051	Mar. 22th, 2019	Mar. 21th, 2020		
Pre-Amplifier	EMEC	EM330	060609	Feb. 26th, 2019	Feb. 25th, 2020		
Pre-Amplifier	HP	8449B	3008A00965	Feb. 26th, 2019	Feb. 25th, 2020		
PSA Series Spectrum  Analyzer	Agilent	E4446A	MY46180323	May 31th, 2018	May 30th, 2019		
Antenna Tower	ccs	CC-A-1F	N/A	N.C.R	N.C.R		
Controller	ccs	CC-C-1F	N/A	N.C.R	N.C.R		
Turn Table	ccs	CC-T-1F	N/A	N.C.R	N.C.R		
Software		e3	V6.11-20180413				

NOTE: N.C.R refers to Not Calibrated Required.


Otherwise stated the results shown in this test report reter only to the sample(s) tested and such sample(s) are retained for 90 days only. 

Phys A Risk Right R transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




#### 10.3 Test SET-UP


(A) Radiated Emission Test Set-UP Frequency Below 30MHz.

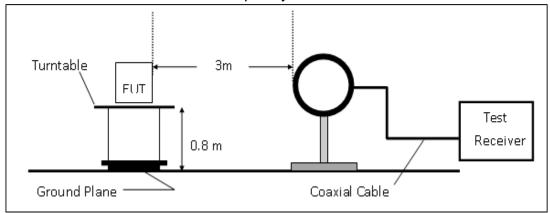

(B) Radiated Emission Test Set-Up, Frequency form 30MHz to 1000MHz

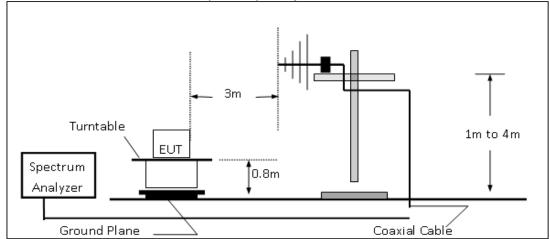

(C) Radiated Emission Test Set-UP Frequency Over 1 GHz

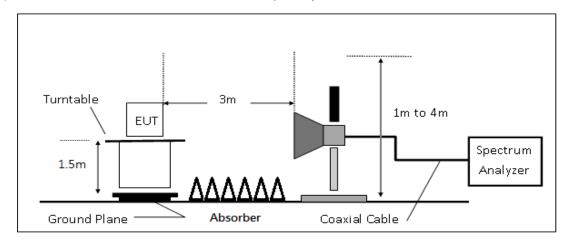

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此概告结果僅對測減之樣品負責,同時此樣品僅保留90天。本概告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and to solve expensibility is to its Client and to solve expensibility is to its Client and to solve expensibility is to its Client's instructions, if any. The Company's solve expensibility is to its Client's instructions, if any. The Company's findings at the time of its intervention only and within the limits of the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Member of the SGS Group (SGS SA)



#### 10.4 Measurement Procedure

#### **Radiated Emission**

- The testing follows the Measurement Procedure of ANSI C63.10:2013.
- The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 1.5m for frequency> 1GHz above ground plan.
- The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 5. Set the spectrum analyzer as RBW=120 kHz and VBW=300 kHz for Peak Detector (PK) and Quasi-peak (QP) at frequency below 1 GHz.
- 6. Set the spectrum analyzer as RBW=1 MHz, VBW=3 MHz for Peak Detector at frequency above 1 GHz.
- 7. Set the spectrum analyzer as RBW=1 MHz, VBW=10 Hz (Duty cycle > 98%) or VBW ≥ 1/T (Duty cycle < 98%) for Average Detector at frequency above 1 GHz.
- 8. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 9. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 10. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. On spectrum, change spectrum mode in linear display mode, and reduce VBW = 10Hz if average reading is measured.
- 11. Repeat above procedures until all default test channel measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



### 10.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

The limit of the emission level is expressed in dBuV/m, which converts 20\*log(uV/m)

Actual FS(dB $\mu$ V/m) = SPA. Reading level(dB $\mu$ V) + Factor(dB)

Factor(dB) = Antenna Factor(dBµV/m) + Cable Loss(dB) - Pre Amplifier Gain(dB)

# 10.6 Test Results of Radiated Spurious Emissions form 9 kHz to 30 MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit per 15.31(o) was not reported.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



# 10.7 Measurement Result Radiated Band Edge Measurement Result: (Hopping Mode)

**Operation Band** :BT BR Hopping Test Date :2019-04-12 Fundamental Frequency :2402 MHz Temp./Humi. :20/55 Operation Mode :BE CH Low Engineer :Jerry


EUT Pol. :E2 Plan :VERTICAL Measurement Antenna Pol.

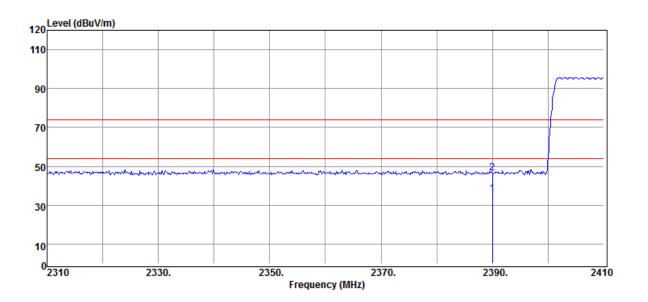

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
		Mode	Reading Level		FS	@3m		
_	MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB	
	2390.00	Average	39.22	-3.33	35.89	54.00	-18.11	
	2390.00	Peak	49.66	-3.33	46.33	74.00	-27.67	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此概告结果僅對測減之樣品負責,同時此樣品僅保留90天。本概告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and to solve expensibility is to its Client and to solve expensibility is to its Client and to solve expensibility is to its Client's instructions, if any. The Company's solve expensibility is to its Client's instructions, if any. The Company's findings at the time of its intervention only and within the limits of the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





**Operation Band** Fundamental Frequency **Operation Mode** 


EUT Pol.

:BT BR Hopping :2402 MHz :BE CH Low :E2 Plan

**Test Date** :2019-04-12 Temp./Humi. :20/55

Engineer :Jerry


:HORIZONTAL Measurement Antenna Pol.

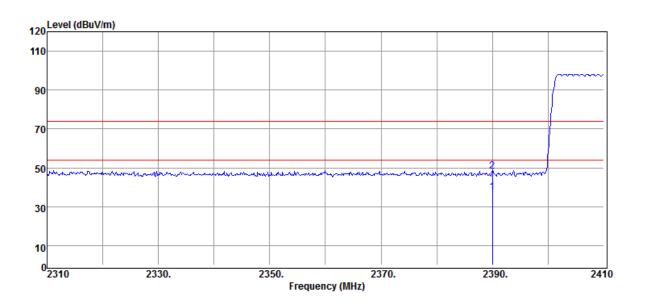

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
2390.00	Average	40.57	-3.33	37.24	54.00	-16.76
2390.00	Peak	51.67	-3.33	48.34	74.00	-25.66

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此概告结果僅對測減之樣品負責,同時此樣品僅保留90天。本概告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and to solve expensibility is to its Client and to solve expensibility is to its Client and to solve expensibility is to its Client's instructions, if any. The Company's solve expensibility is to its Client's instructions, if any. The Company's findings at the time of its intervention only and within the limits of the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.






EUT Pol.

:BT BR Hopping :2480 MHz :BE CH High :E2 Plan

**Test Date** :2019-04-12


Temp./Humi. :20/55 Engineer :Jerry

:VERTICAL Measurement Antenna Pol.

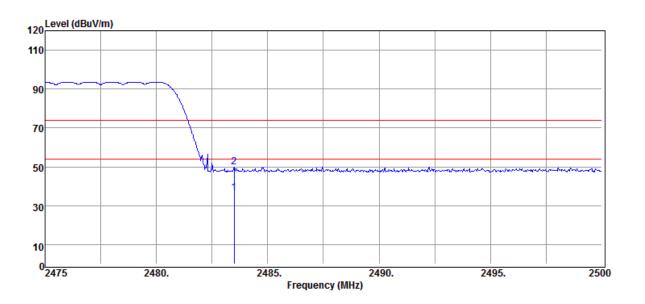

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
_	MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
	2483.50	Average	39.23	-2.72	36.51	54.00	-17.49
	2483.50	Peak	52.57	-2.72	49.85	74.00	-24.15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






EUT Pol.

:BT BR Hopping :2480 MHz :BE CH High :E2 Plan


**Test Date** :2019-04-12 Temp./Humi. :20/55 Engineer :Jerry

:HORIZONTAL Measurement Antenna Pol.

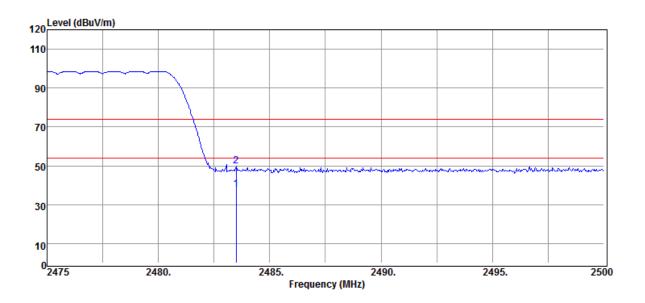

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
2483.50	Average	40.68	-2.72	37.96	54.00	-16.04
2483.50	Peak	52.40	-2.72	49.68	74.00	-24.32

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





**Operation Band** :BT EDR Hopping

Fundamental Frequency **Operation Mode** 


EUT Pol.

:2402 MHz :BE CH Low :E2 Plan

**Test Date** :2019-04-12


Temp./Humi. :20/55 Engineer :Jerry

:VERTICAL Measurement Antenna Pol.

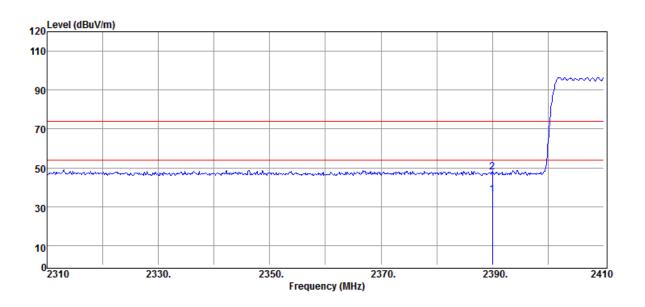

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
2390.00	Average	39.31	-3.33	35.98	54.00	-18.02
2390.00	Peak	51.21	-3.33	47.88	74.00	-26.12

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






EUT Pol.

:BT EDR Hopping :2402 MHz :BE CH Low :E2 Plan

**Test Date** :2019-04-12 Temp./Humi. :20/55


Engineer :Jerry

:HORIZONTAL Measurement Antenna Pol.

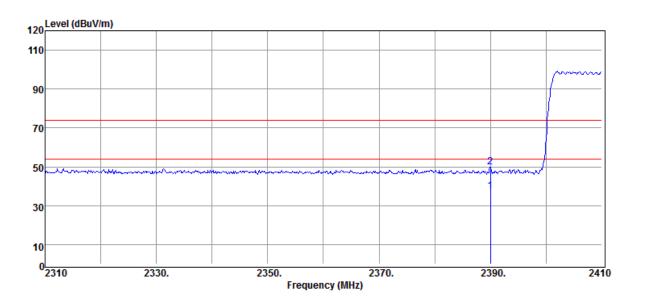

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
2390.00	Average	40.75	-3.33	37.42	54.00	-16.58
2390.00	Peak	53.06	-3.33	49.73	74.00	-24.27

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





EUT Pol.

:BT EDR Hopping


:2480 MHz :BE CH High

:E2 Plan

**Test Date** :2019-04-12


Temp./Humi. :20/55 Engineer :Jerry

:VERTICAL Measurement Antenna Pol.

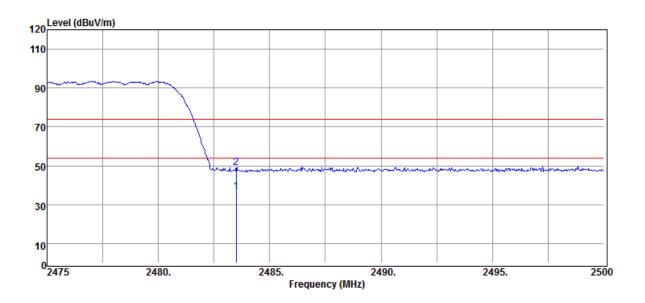

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
2483.50	Average	39.36	-2.72	36.64	54.00	-17.36
2483.50	Peak	51.62	-2.72	48.90	74.00	-25.10

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






EUT Pol.

:BT EDR Hopping :2480 MHz :BE CH High :E2 Plan

**Test Date** :2019-04-12 Temp./Humi. :20/55 Engineer

:HORIZONTAL Measurement Antenna Pol.

:Jerry

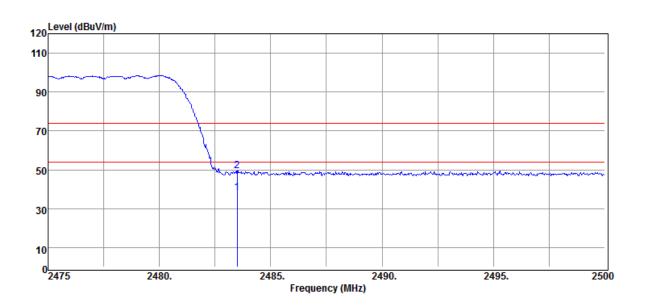

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
2483.50	Average	40.72	-2.72	38.00	54.00	-16.00
2483.50	Peak	52.18	-2.72	49.46	74.00	-24.54

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Radiated Band Edge Measurement Result: (Non-Hopping Mode)

**Operation Band Test Date** :BT BR :2019-04-12

Fundamental Frequency :2402 MHz Temp./Humi. :20/55 **Operation Mode** :BE CH Low Engineer :Jerry

EUT Pol. :E2 Plan :VERTICAL Measurement Antenna Pol.

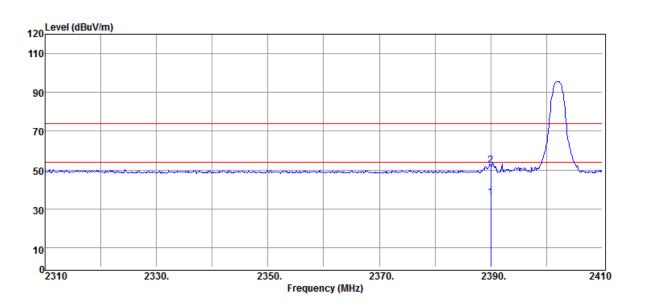


Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
2390.00	Average	39.02	-3.33	35.69	54.00	-18.31
2390.00	Peak	55.48	-3.33	52.15	74.00	-21.85

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Otherwise stated the results shown in this test report reter only to the sample(s) tested and such sample(s) are retained for 90 days only. 

Phys A Risk Right R transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.






**Operation Band** :BT BR Fundamental Frequency :2402 MHz **Operation Mode** :BE CH Low EUT Pol. :E2 Plan


**Test Date** :2019-04-12 Temp./Humi. :20/55 Engineer :Jerry

:HORIZONTAL Measurement Antenna Pol.

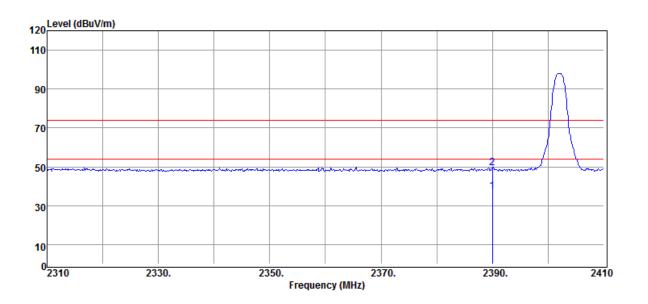

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
2390.00	Average	40.63	-3.33	37.30	54.00	-16.70
2390.00	Peak	52.76	-3.33	49.43	74.00	-24.57

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






**Operation Band** :BT BR Fundamental Frequency :2480 MHz **Operation Mode** :BE CH High EUT Pol.

:E2 Plan

**Test Date** :2019-04-12


Temp./Humi. :20/55 Engineer :Jerry

:VERTICAL Measurement Antenna Pol.

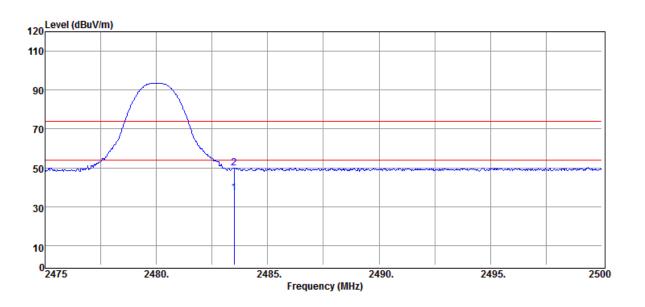

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
2483.50	Average	39.55	-2.72	36.83	54.00	-17.17
2483.50	Peak	52.48	-2.72	49.76	74.00	-24.24

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






**Operation Band** :BT BR Fundamental Frequency :2480 MHz **Operation Mode** :BE CH High


EUT Pol. :E2 Plan **Test Date** :2019-04-12 Temp./Humi. :20/55 Engineer :Jerry

:HORIZONTAL Measurement Antenna Pol.

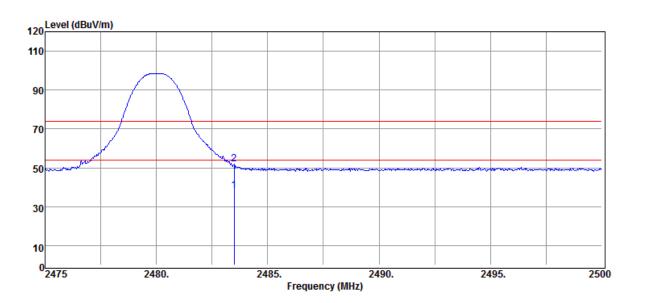

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
_	MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
	2483.50	Average	40.93	-2.72	38.21	54.00	-15.79
	2483.50	Peak	54.59	-2.72	51.87	74.00	-22.13

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



:Jerry




**Operation Band** :BT EDR Fundamental Frequency :2402 MHz **Operation Mode** :BE CH Low EUT Pol. :E2 Plan

**Test Date** :2019-04-12 Temp./Humi. :20/55


Engineer

:VERTICAL Measurement Antenna Pol.

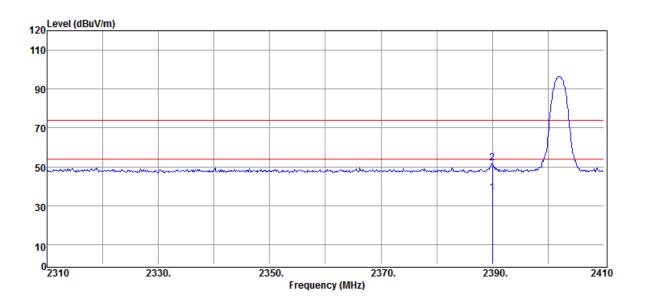

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
2390.00	Average	39.77	-3.33	36.44	54.00	-17.56
2390.00	Peak	55.03	-3.33	51.70	74.00	-22.30

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






**Operation Band** :BT EDR Fundamental Frequency :2402 MHz **Operation Mode** :BE CH Low EUT Pol. :E2 Plan


**Test Date** :2019-04-12 Temp./Humi. :20/55 Engineer :Jerry

:HORIZONTAL Measurement Antenna Pol.

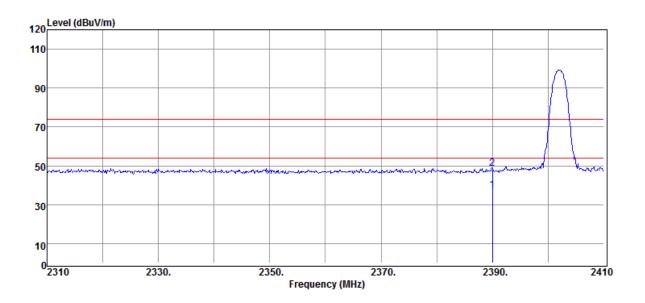

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
2390.00	Average	40.69	-3.33	37.36	54.00	-16.64
2390.00	Peak	51.87	-3.33	48.54	74.00	-25.46

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






EUT Pol.

:BT EDR :2480 MHz :BE CH High :E2 Plan

**Test Date** :2019-04-12


Temp./Humi. :20/55 Engineer :Jerry

:VERTICAL Measurement Antenna Pol.

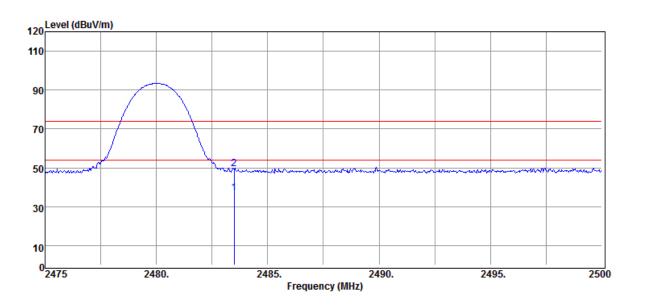

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
2483.50	Average	39.66	-2.72	36.94	54.00	-17.06
2483.50	Peak	52.26	-2.72	49.54	74.00	-24.46

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






**Operation Band** :BT EDR Fundamental Frequency :2480 MHz **Operation Mode** :BE CH High EUT Pol. :E2 Plan

**Test Date** :2019-04-12 Temp./Humi. :20/55 Engineer :Jerry

:HORIZONTAL Measurement Antenna Pol.

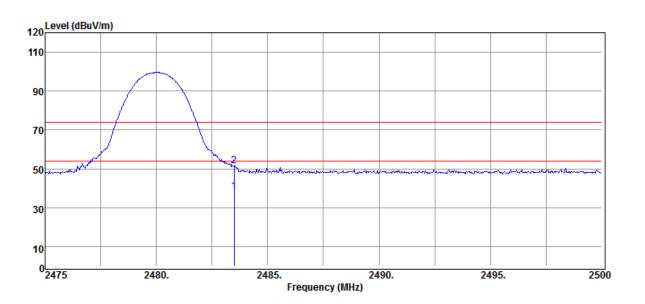

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
2483.50	Average	41.02	-2.72	38.30	54.00	-15.70
2483.50	Peak	54.20	-2.72	51.48	74.00	-22.52

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




# Radiated Spurious Emission Measurement Result: (Worst Case)

For Frequency from 30MHz to 1000MHz

**Operation Band** :BT EDR **Test Date** :2019-04-12 Fundamental Frequency :2441 MHz Temp./Humi. :20/55 Operation Mode :Tx CH Mid Engineer :Jerry

EUT Pol. :E2 Plan :VERTICAL Measurement Antenna Pol.

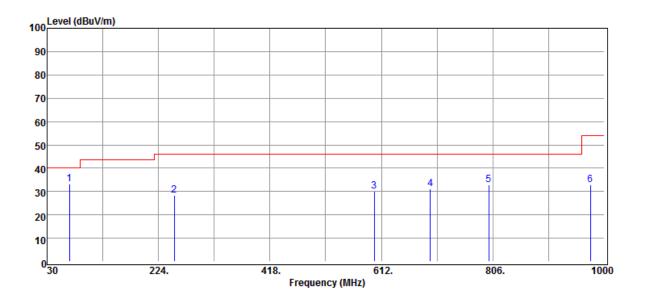


	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
		Mode	Reading Level		FS	@3m		
_	MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB	
	68.80	Peak	48.02	-14.93	33.09	40.00	-6.91	
	251.16	Peak	38.64	-10.38	28.26	46.00	-17.74	
	599.39	Peak	31.89	-1.67	30.22	46.00	-15.78	
	697.36	Peak	31.35	-0.13	31.22	46.00	-14.78	
	799.21	Peak	31.26	1.52	32.78	46.00	-13.22	
	975.75	Peak	27.46	5.55	33.01	54.00	-20.99	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report retier only to the sample(s) tested and such carried for 90 days only. 

Ref. 8月 有规则,此根告结果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the respectation. This document does not expect the Company Any unatherized electronic page of the Company and the page of the Company and their page of the Company and the page of the Company and transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.






**Operation Band** :BT EDR Fundamental Frequency :2441 MHz **Operation Mode** :Tx CH Mid EUT Pol. :E2 Plan

**Test Date** :2019-04-12 Temp./Humi. :20/55 Engineer :Jerry

:HORIZONTAL Measurement Antenna Pol.

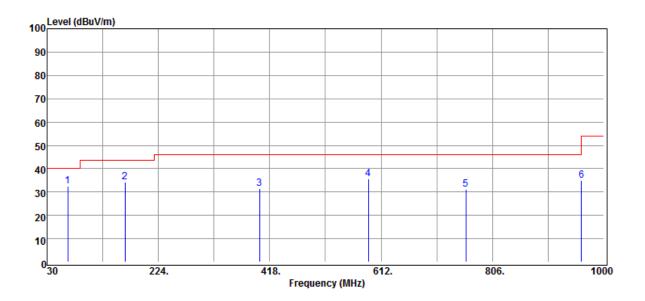

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
		Mode	Reading Level		FS	@3m		
_	MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB	
	65.89	Peak	48.03	-15.34	32.69	40.00	-7.31	
	165.80	Peak	44.64	-10.34	34.30	43.50	-9.20	
	400.54	Peak	37.03	-5.64	31.39	46.00	-14.61	
	589.69	Peak	37.39	-1.73	35.66	46.00	-10.34	
	759.44	Peak	29.16	2.09	31.25	46.00	-14.75	
	961.20	Peak	30.34	4.51	34.85	54.00	-19.15	


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



# Radiated Spurious Emission Measurement Result: (Worst Case) For Frequency above 1 GHz

**Operation Band** :BT EDR Test Date :2019-04-12 Temp./Humi. Fundamental Frequency :2402 MHz :20/55 **Operation Mode** Engineer :Tx CH Low :Jerry

EUT Pol. :E2 Plan :VERTICAL Measurement Antenna Pol.

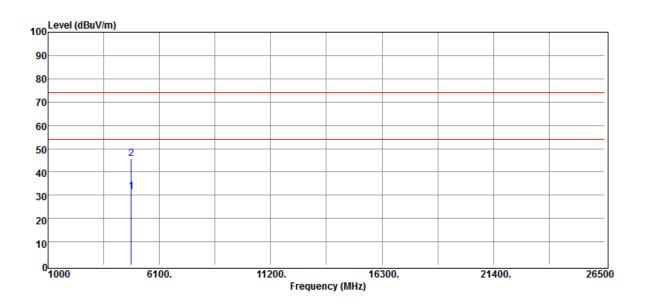


	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
_	MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
	4804.00	Average	28.32	3.01	31.33	54.00	-22.67
	4804.00	Peak	42.53	3.01	45.54	74.00	-28.46

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Otherwise stated the results shown in this test report reter only to the sample(s) tested and such sample(s) are retained for 90 days only. 

Phys A Risk Right R transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.






**Operation Band** :BT EDR Fundamental Frequency :2402 MHz **Operation Mode** :Tx CH Low EUT Pol. :E2 Plan


**Test Date** :2019-04-12 Temp./Humi. :20/55 Engineer :Jerry

:HORIZONTAL Measurement Antenna Pol.

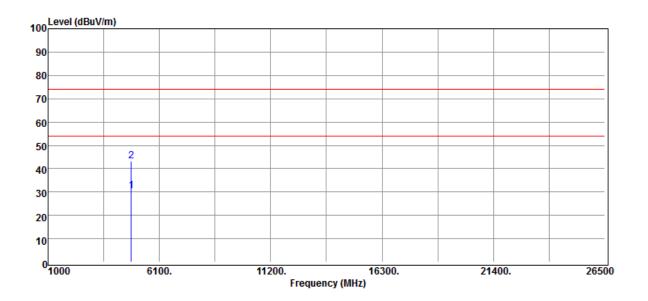

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
4804.00	Average	27.53	3.01	30.54	54.00	-23.46
4804.00	Peak	40.17	3.01	43.18	74.00	-30.82

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




:Jerry



**Operation Band** :BT EDR Fundamental Frequency :2441 MHz **Operation Mode** :Tx CH Mid EUT Pol. :E2 Plan


**Test Date** :2019-04-12 Temp./Humi. :20/55 Engineer

:VERTICAL Measurement Antenna Pol.

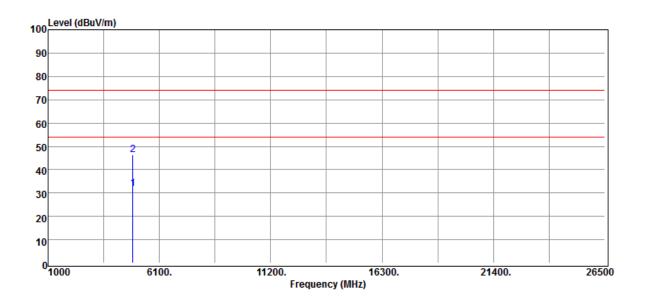

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
4882.00	Average	28.55	3.37	31.92	54.00	-22.08
4882.00	Peak	42.89	3.37	46.26	74.00	-27.74

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






**Operation Band** :BT EDR Fundamental Frequency :2441 MHz **Operation Mode** :Tx CH Mid EUT Pol. :E2 Plan


**Test Date** :2019-04-12 Temp./Humi. :20/55 Engineer :Jerry

:HORIZONTAL Measurement Antenna Pol.

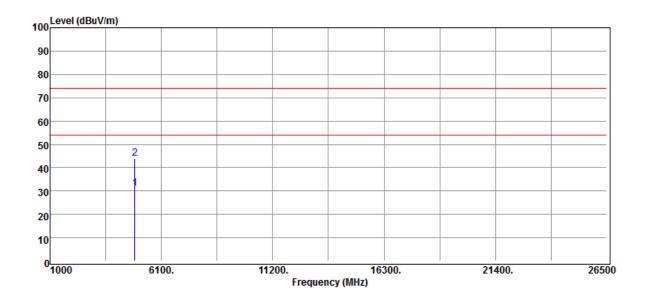

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
4882.00	Average	27.72	3.37	31.09	54.00	-22.91
4882.00	Peak	40.67	3.37	44.04	74.00	-29.96

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






**Operation Band** :BT EDR Fundamental Frequency :2480 MHz **Operation Mode** :Tx CH High EUT Pol. :E2 Plan

**Test Date** :2019-04-12


Temp./Humi. :20/55 Engineer :Jerry

:VERTICAL Measurement Antenna Pol.

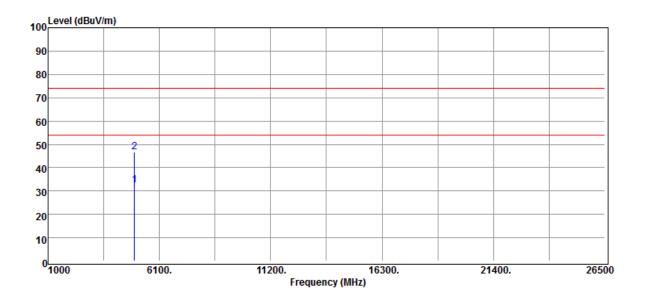

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
4960.00	Average	28.60	4.06	32.66	54.00	-21.34
4960.00	Peak	42.77	4.06	46.83	74.00	-27.17

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






**Operation Band** :BT EDR Fundamental Frequency :2480 MHz **Operation Mode** :Tx CH High EUT Pol. :E2 Plan

**Test Date** :2019-04-12 Temp./Humi. :20/55 Engineer :Jerry

:HORIZONTAL Measurement Antenna Pol.

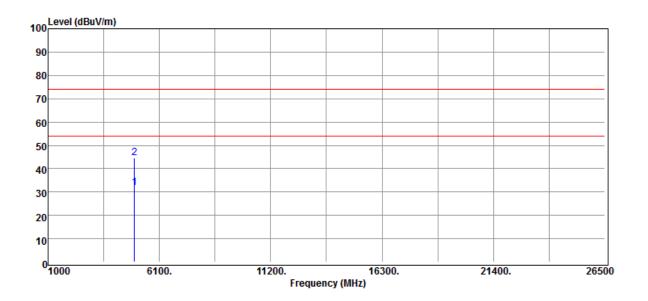

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
4960.00	Average	27.81	4.06	31.87	54.00	-22.13
4960.00	Peak	40.61	4.06	44.67	74.00	-29.33

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



# 11 FREQUENCY SEPARATION


# 11.1 Standard Applicable

Frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25 kHz or the 2/3\*20dB bandwidth of the hopping channel, whichever is greater.

# 11.2 Measurement Equipment Used

Conducted Emission Test Site							
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.		
TYPE		NUMBER	NUMBER	CAL.			
DC Power Supply	Agilent	E3640A	KR93300208	Aug. 15th, 2018	Aug. 14th, 2019		
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY57120290	Feb. 13th, 2019	Feb. 12th, 2020		
DC Block	Mini-Circuits	BLK-18-S+	31129(1)	Feb. 26th, 2019	Feb. 25th, 2020		
Attenuator	Mini-Circuit	BW-S10W2+	1	Feb. 26th, 2019	Feb. 25th, 2020		

# 11.3 Test Set-up



# 11.4 Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C63.10:2013.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set center frequency of spectrum analyzer = middle of hopping channel.
- 5. Set the spectrum analyzer as RBW, VBW=100 kHz, Adjust Span to 5MHz, Sweep = auto.
- 6. Max hold. Mark 3 Peaks of hopping channel and record the 3 peaks frequency.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



### 11.5 Measurement Result

Channel separation (MHz)	Limit	Result
1	>=25 kHz or 2/3 times 20dB bandwidth	PASS

**Frequency Separation Test Data** 

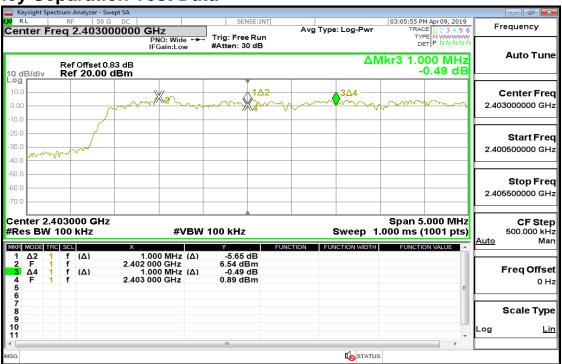

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report retier only to the sample(s) tested and such sample(s) are retained for 90 days only.

Phis document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Member of the SGS Group (SGS SA)



# 12 NUMBER OF HOPPING FREQUENCY


# 12.1 Standard Applicable

Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

12.2 Measurement Equipment Used

Conducted Emission Test Site							
EQUIPMENT MFR MODEL SERIAL LAST CAL DU							
TYPE		NUMBER	NUMBER	CAL.			
DC Power Supply	Agilent	E3640A	KR93300208	Aug. 15th, 2018	Aug. 14th, 2019		
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY57120290	Feb. 13th, 2019	Feb. 12th, 2020		
DC Block	Mini-Circuits	BLK-18-S+	31129(1)	Feb. 26th, 2019	Feb. 25th, 2020		
Attenuator	Mini-Circuit	BW-S10W2+	1	Feb. 26th, 2019	Feb. 25th, 2020		

# 12.3 Test Set-up



# 12.4 Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C63.10:2013.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set spectrum analyzer Start=2400MHz, Stop = 2483.5MHz, Sweep = auto.
- 5. Set the spectrum analyzer as RBW=430 kHz, VBW=1.5MHz., Detector = Peak
- 6. Max hold, view and count how many channel in the band.

### 12.5 Measurement Result

# **Tabular Data of Total Channel Number**


	Channel Number	Limit
2.4 GHz – 2.441GHz	40	
2.441 GHz – 2.4835GHz	39	>15
2.4GHz ~2.4835GHz	(40+39) = 79	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



# **Channel Number**

Hopping Frequency\_GFSK\_1M\_DH5\_2400-2441 MHz

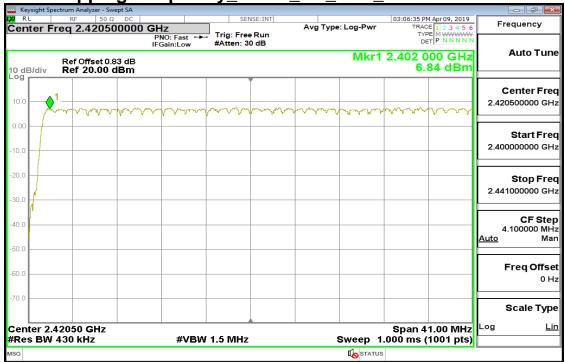

Hopping Frequency\_GFSK\_1M\_DH5\_2441-2480 MHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



# 13 TIME OF OCCUPANCY (DWELL TIME)


# 13.1 Standard Applicable

Frequency hopping systems operating in the 2400MHz-2483.5MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channel employed.

# 13.2 Measurement Equipment Used

Conducted Emission Test Site							
EQUIPMENT MFR MODEL SERIAL LAST (							
TYPE		NUMBER	NUMBER	CAL.			
DC Power Supply	Agilent	E3640A	KR93300208	Aug. 15th, 2018	Aug. 14th, 2019		
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY57120290	Feb. 13th, 2019	Feb. 12th, 2020		
DC Block	Mini-Circuits	BLK-18-S+	31129(1)	Feb. 26th, 2019	Feb. 25th, 2020		
Attenuator	Mini-Circuit	BW-S10W2+	1	Feb. 26th, 2019	Feb. 25th, 2020		

# 13.3 Test Set-up



### 13.4 Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C63.10:2013.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set center frequency of spectrum analyzer = operating frequency.
- 5. Set the spectrum analyzer as RBW, VBW=1MHz, 3MHz, Span = 0Hz, Detector = Peak, Adjust Sweep = 2~8ms.
- 6. Repeat above procedures until all frequency of the interest measured were complete.

Formula Deduced: time occupancy of one time slot X Hopping rate / total slot in one channel / total channel that hops X period of working channels.

Where, standard hopping rate is 1600 hops/s, slot in one channel for DH1, DH3, and DH5 is 2, 4, and 6, respectively.

DH1 consists of single time slot of the uplink, and one slot of the downlink Total Slot: 2 DH3 consists of three time slot of the uplink, and one slot of the downlink. Total Slot: 4 DH5 consists of five time slot of the uplink, and one slot of the downlink. Total Slot: 6

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



In AFH mode, hopping rate is 800 hop/s with 6 slots in 20 hopping channels with channel hopping rate (800 / 6 / 20) in Occupancy Time Limit (0.4 \* 20 ) (S), Hop Over Occupancy Time comes to (800 / 6 / 20)\*(0.4\*20) = 53.33

Note: the result of the complete test default channel at 1Mbps is recorded on the test report, 2Mbps, and 3Mbps only records the measurement result at middle channel that reveals no much deviation.

# 13.5 Tabular Result of the Measurement

GFSK (1Mbps)

Channel	PACKET TYPE	Measurement Result (ms)	Limit (ms)	1/T (kHz)	VBW setting (kHz)
	DH1	121.60	400ms	2.63	3.00
Low	DH3	260.80	400ms	0.61	1.00
	DH5	308.80	400ms	0.35	1.00
	DH1	123.20	400ms	2.60	3.00
Mid	DH3	262.40	400ms	0.61	1.00
	DH5	308.80	400ms	0.35	1.00
	DH1	123.20	400ms	2.60	3.00
High	DH3	262.40	400ms	0.61	1.00
	DH5	307.20	400ms	0.00	1.00

π/4 DQPSK (2Mbps)

Channel	PACKET TYPE	Measurement Result (ms)	Limit (ms)	1/T (kHz)	VBW setting (kHz)
	2DH1	124.80	400ms	2.56	3.00
Mid	2DH3	262.40	400ms	0.61	1.00
	2DH5	308.80	400ms	0.35	1.00

8-DPSK (3Mbps)

Channel	PACKET TYPE	Measurement Result (ms)	Limit (ms)	1/T (kHz)	VBW setting (kHz)
	3DH1	124.80	400ms	2.56	3.00
Mid	3DH3	262.40	400ms	0.61	1.00
	3DH5	308.80	400ms	0.35	1.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



A period time = 0.4 (s) \* 79 = 31.6 (s)

# GFSK (1Mbps):

CH Low	DH1 time slot = DH3 time slot = DH5 time slot =	0.380 * 1.630 * 2.895 *	(1600/2/79) * (1600/4/79) * (1600/6/79) *		121.60 (ms) 260.80 (ms) 308.80 (ms)
CH Mid	DH1 time slot = DH3 time slot = DH5 time slot =	0.385 * 1.640 * 2.895 *	(1600/2/79) * (1600/4/79) * (1600/6/79) *		123.20 (ms) 262.40 (ms) 308.80 (ms)
CH High	DH1 time slot = DH3 time slot = DH5 time slot =	0.385 * 1.640 * 2.880 *	(1600/2/79) * (1600/4/79) * (1600/6/79) *		123.20 (ms) 262.40 (ms) 307.20 (ms)
π/4 -DQPSI	K (2Mbps):				
CH Mid	2DH1 time slot= 2DH3 time slot= 2DH5 time slot=	0.390 * 1.640 * 2.895 *	(1600/2/79) * (1600/4/79) * (1600/6/79) *	31.6 = 31.6 = 31.6 =	124.80 (ms) 262.40 (ms) 308.80 (ms)

# 8-DPSK (3Mbps):

CH Mid	3DH1 time slot=	0.390 *	(1600/2/79) *	31.6 =	124.80 (ms)
	3DH3 time slot=	1.640 *	(1600/4/79) *	31.6 =	262.40 (ms)
	3DH5 time $slot=$	2 895 *	(1600/6/79) *	316 =	308.80 (ms)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



GFSK (1Mbps) for AFH Mode						
Hopping Channel	PACKET TYPE	Limit				
Number		(ms)	(ms)			
20	20 DH5 153.60		400ms			
	π/4 DQPSK (2Mb	ps) for AFH Mode				
Hopping Channel	PACKET TYPE	Limit				
Number	PACKETTIFE	(ms)	(ms)			
20	2DH5	154.40	400ms			
	8-DPSK (3Mbps) for AFH Mode					
Hopping Channel	PACKET TYPE	Measurement Result	Limit			
Number	PACKETTIPE	(ms)	(ms)			
20	3DH5	154.40	400ms			

# GFSK (1Mbps):

DH5 time sl =	2.880	(ms)	*	(800/6/20)*8 =	153.60	(ms)
$\pi/4$ -DQPSK (2Mbps						
2DH5 time :=	2.895	(ms)	*	(800/6/20)* 8 =	154.40	(ms)
8-DPSK (3Mbps):						
3DH5 time :=	2.895	(ms)	*	(800/6/20)* 8 =	154.40	(ms)

### 13.6 Measurement Result


Note: Refer to next page for plots.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Dwell Time\_GFSK\_1M\_DH1\_2402MHz

# Dwell Time\_GFSK\_1M\_DH3\_2402MHz

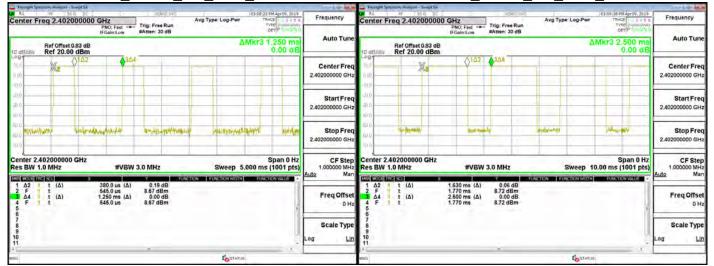


Dwell Time\_GFSK\_1M\_DH1 2441MHz

# Dwell Time\_GFSK\_1M\_DH3\_2441MHz

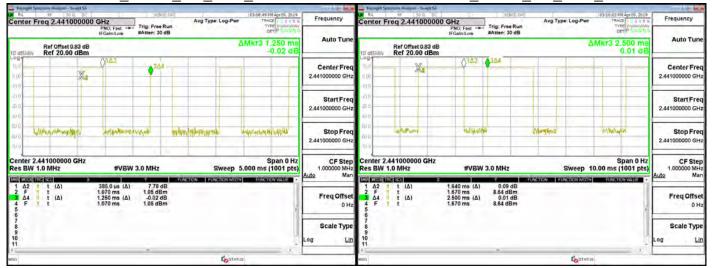

Dwell Time GFSK 1M DH1 2480MHz

#### Dwell Time GFSK 1M DH3 2480MHz

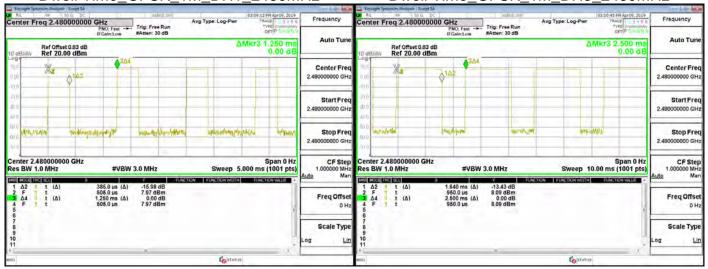

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only






# Dwell Time\_π4DQPSK\_2M\_DH1\_2402MHz




Dwell Time\_GFSK\_1M\_DH5\_2441MHz

#### Dwell Time\_π4DQPSK\_2M\_DH1 2441MHz

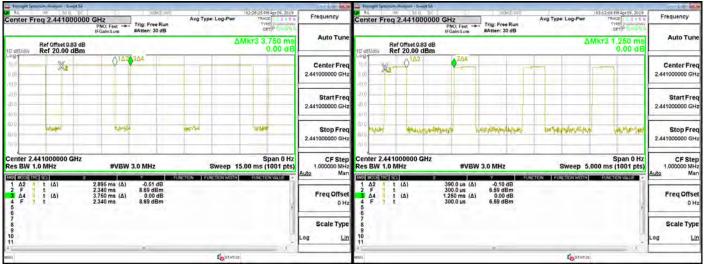

Dwell Time GFSK 1M DH5 2480MHz


#### Dwell Time π4DQPSK 2M DH1 2480MHz

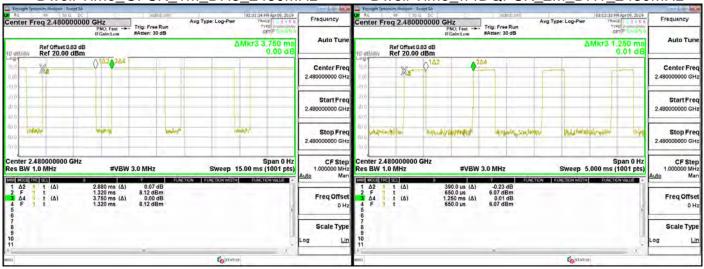


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only






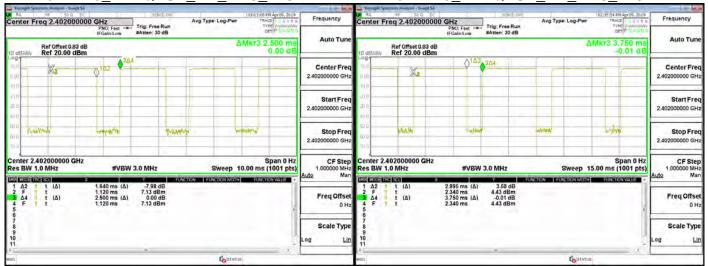

Dwell Time\_π4DQPSK\_2M\_DH3\_2441MHz Dwell Time\_π4DQPSK\_2M\_DH5\_2441MHz

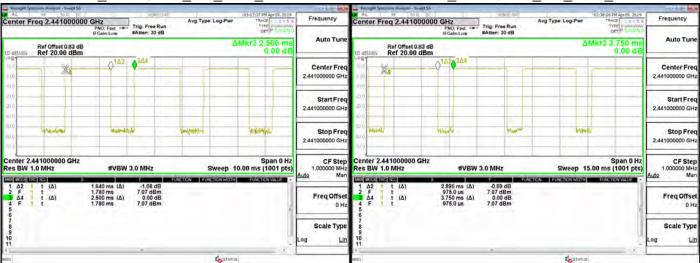


Dwell Time π4DQPSK 2M DH3 Dwell Time π4DQPSK 2M DH5 2480MHz 2480MHz

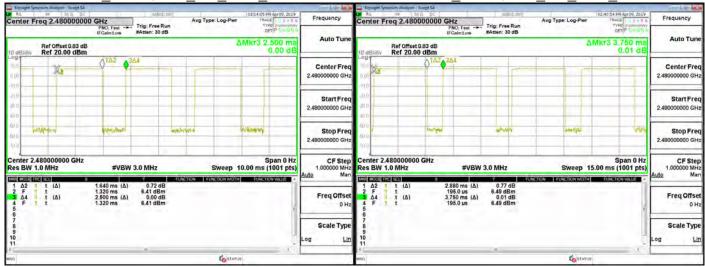


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only






# Dwell Time\_8DPSK\_3M\_DH3\_2402MHz

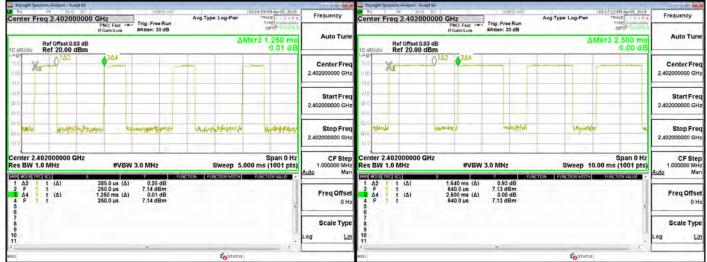

#### Dwell Time\_8DPSK\_ $_{\rm 3M}$ DH1 2441MHz

# Dwell Time\_8DPSK\_3M\_DH3\_2441MHz

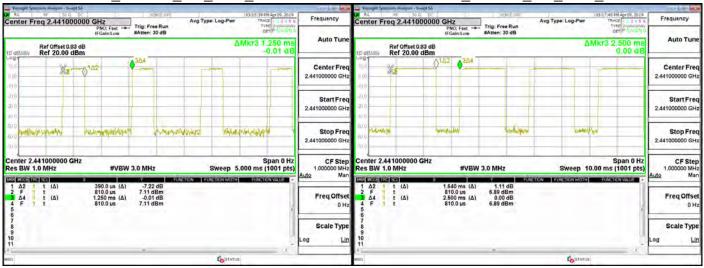

#### 3M DH1 Dwell Time 8DPSK 2480MHz


#### Dwell Time 8DPSK 3M DH3 2480MHz




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only




# Dwell Time\_8DPSK\_3M\_DH5\_2402MHz

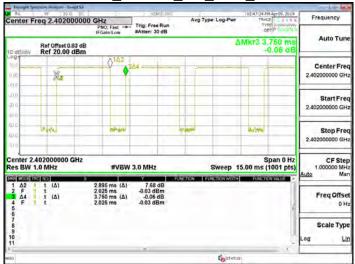

#### Dwell Time\_8DPSK\_ 3M DH5 2441MHz

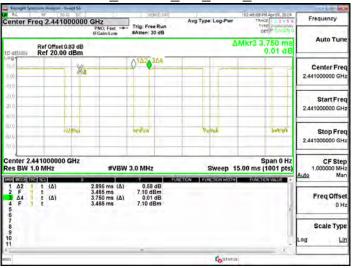

#### Dwell Time\_8DPSK\_ 3M DH<sub>5</sub> 2480MHz

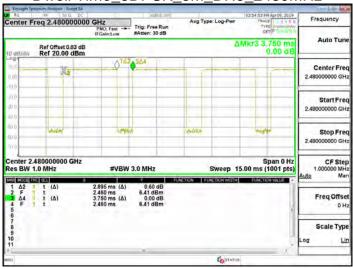

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report reter only to the sample(s) tested and such sample(s) are retained for 90 days only. 

Phis Agriculture of the company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the respective document. This document does not expect the Company are unsubsticated exercising all their rights and obligations under the respective of the Company are unsubsticated exercising all their rights and obligations. transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



# 14 ANTENNA REQUIREMENT

# 14.1 Standard Applicable

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device. If the transmitting antenna is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi.

### 14.2 Antenna Connected Construction

The antenna is designed with as permanently attached and no consideration of replacement. Please see EUT photo for details.

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.