

# FCC TEST REPORT

Client Name : Gopod Group Limited.  
Address : 6/F., 235 Wing Lok Trade Centre, Sheung Wan, Hong Kong, China  
Product Name : 3-in-1 wireless charging Pad  
Date : Jun. 28, 2020



**Shenzhen Anbotek Compliance Laboratory Limited**

# Contents

1. General Information.....	4
1.1. Client Information.....	4
1.2. Description of Device (EUT).....	4
1.3. Auxiliary Equipment Used During Test.....	5
1.4. Description of Test Modes.....	5
1.5. Description Of Test Setup.....	6
1.6. Test Equipment List.....	7
1.7. Measurement Uncertainty.....	8
1.8. Description of Test Facility.....	8
2. Summary of Test Results.....	9
3. Conducted Emission Test.....	10
3.1. Test Standard and Limit.....	10
3.2. Test Setup.....	10
3.3. Test Procedure.....	10
3.4. Test Data.....	10
4. Radiation Spurious Emission and Band Edge.....	15
4.1. Test Standard and Limit.....	15
4.2. Test Setup.....	15
4.3. Test Procedure.....	16
4.4. Test Data.....	17
5. Antenna Requirement.....	21
5.1. Test Standard and Requirement.....	21
5.2. Antenna Connected Construction.....	21
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	22
APPENDIX II -- EXTERNAL PHOTOGRAPH.....	24
APPENDIX III -- INTERNAL PHOTOGRAPH.....	28



# TEST REPORT

Applicant : Gopod Group Limited.  
Manufacturer : Gopod Group Limited.  
Product Name : 3-in-1 wireless charging Pad  
Model No. : GW17A, D362B, W17B, W17C, W17D  
Trade Mark : N.A.  
Rating(s) : Input: DC 5V, 3A; DC 9V, 3A  
Wireless Output1: 5/7.5/10W  
Wireless Output2: 5W  
Apple Watch Output: 2W

**Test Standard(s) : FCC Part15 Subpart C 2019, Paragraph 15.209**

**Test Method(s) : ANSI C63.10: 2013**

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.


Date of Receipt

Jun. 01, 2020

Date of Test


Jun. 01~12, 2020

Prepared By



(Engineer / Dolly Mo)

Reviewer



(Supervisor / Bibo Zhang)

Approved & Authorized Signer



(Manager / Tom Chen)

## 1. General Information

### 1.1. Client Information

Applicant	:	Gopod Group Limited.
Address	:	6/F., 235 Wing Lok Trade Centre, Sheung Wan, Hong Kong, China
Manufacturer	:	Gopod Group Limited.
Address	:	6/F., 235 Wing Lok Trade Centre, Sheung Wan, Hong Kong, China
Factory	:	Gopod Group Limited.
Address	:	6/F., 235 Wing Lok Trade Centre, Sheung Wan, Hong Kong, China

### 1.2. Description of Device (EUT)

Product Name	:	3-in-1 wireless charging Pad	
Model No.	:	GW17A, D362B, W17B, W17C, W17D (Note: All samples are the same except the appearance color, so we prepare "GW17A" for test only.)	
Trade Mark	:	N.A.	
Test Power Supply	:	AC 120V, 60Hz for adapter / AC 240V, 60Hz for adapter	
Test Sample No.	:	1-2-1(Normal Sample), 1-2-1(Engineering Sample)	
Product Description	:	Operation Frequency:	110.1-205KHz
	:	Modulation Type:	FSK
	:	Antenna Type:	Inductive loop coil Antenna
	:	Antenna Gain(Peak):	0 dBi
Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.			

### 1.3. Auxiliary Equipment Used During Test

Adapter	:	Manufacturer: Anker Innovations Limited
		M/N: A2013 Input: 100-240V~50-60Hz Output: 3.6-6.5V---3A/ 6.5-9V---2A/ 9-12V---1.5A
Apple Watch		Manufacturer: Apple
Airpods	:	Manufacturer: Apple

### 1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Full load, Power Bank module

For Conducted Emission	
Final Test Mode	Description
Mode 1	Full load, Power Bank module



For Radiated Emission	
Final Test Mode	Description
Mode 1	Full load, Power Bank module

Note: (1) Test channel is 0.1184MHz.

(2) All the situation(full load, half load and empty load) has been tested,only the worst situation (full load) was recorded in the report.

(3) Remark: All the conditions have been tested. It is found that Apple Watch Output(2W), Wireless Output1(10W) and Wireless Output2(5W) work simultaneously is the worst mode, and the data in the report only reflects the worst mode.

## 1.5. Description Of Test Setup

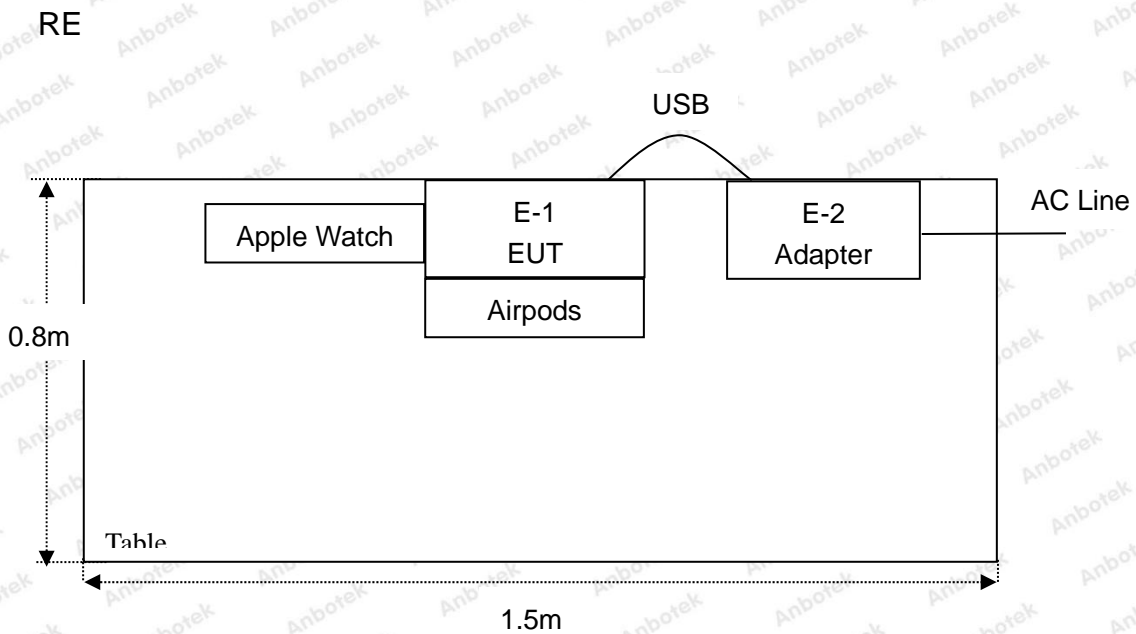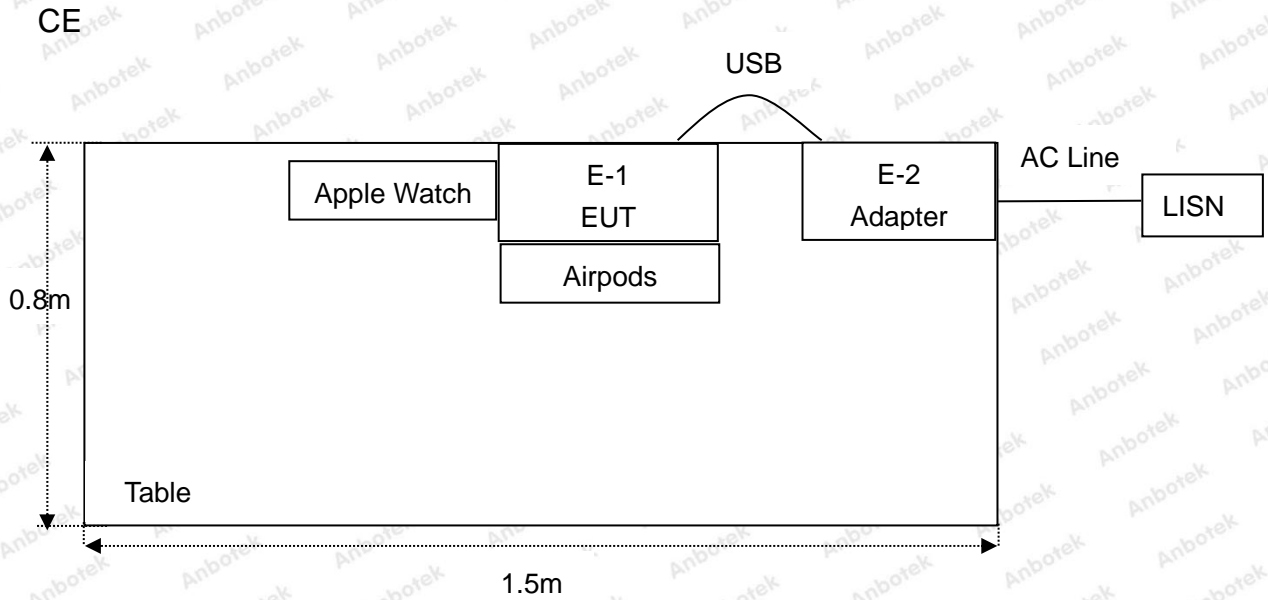

## 1.6. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Nov. 04, 2019	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESPI3	101604	Nov. 04, 2019	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Nov. 04, 2019	1 Year
4.	MAX Spectrum Analysis	Agilent	N9020A	MY51170037	Nov. 04, 2019	1 Year
5.	Preamplifier	SKET Electronic	BK1G18G30 D	KD17503	Nov. 04, 2019	1 Year
6.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Nov. 01, 2019	1 Year
7.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Nov. 01, 2019	1 Year
8.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Nov. 01, 2019	1 Year
9.	Horn Antenna	A-INFO	LB-180400- KF	J211060628	Nov. 01, 2019	1 Year
10.	Pre-amplifier	SONOMA	310N	186860	Nov. 04, 2019	1 Year
11.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
12.	RF Test Control System	YIHENG	YH3000	2017430	Nov. 04, 2019	1 Year
13.	Power Sensor	DAER	RPR3006W	15100041SN045	Nov. 04, 2019	1 Year
14.	Power Sensor	DAER	RPR3006W	15100041SN046	Nov. 04, 2019	1 Year
15.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Nov. 04, 2019	1 Year
16.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Nov. 04, 2019	1 Year
17.	Signal Generator	Agilent	E4421B	MY41000743	Nov. 04, 2019	1 Year
18.	DC Power Supply	LW	TPR-6420D	374470	Nov. 04, 2019	1 Year
19.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80 B	N/A	Nov. 04, 2019	1 Year

### 1.7. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 3.9 dB (Horizontal)
		Ur = 3.8 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4 dB

### 1.8. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, September 27, 2019.

#### ISED-Registration No.: 8058A

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A, March 07, 2019.

#### Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102



## 2. Summary of Test Results

Standard Section	Test Item	Result
FCC Part 15, Paragraph 15.207	Conducted Emission Test	PASS
FCC Part 15, Paragraph 15.209(a)(f)	Spurious Emission	PASS
Part 15.203	Antenna Requirement	PASS


## 3. Conducted Emission Test

### 3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
5MHz~30MHz	60	50	

**Remark:** (1) \*Decreasing linearly with logarithm of the frequency.  
 (2) The lower limit shall apply at the transition frequency.

### 3.2. Test Setup

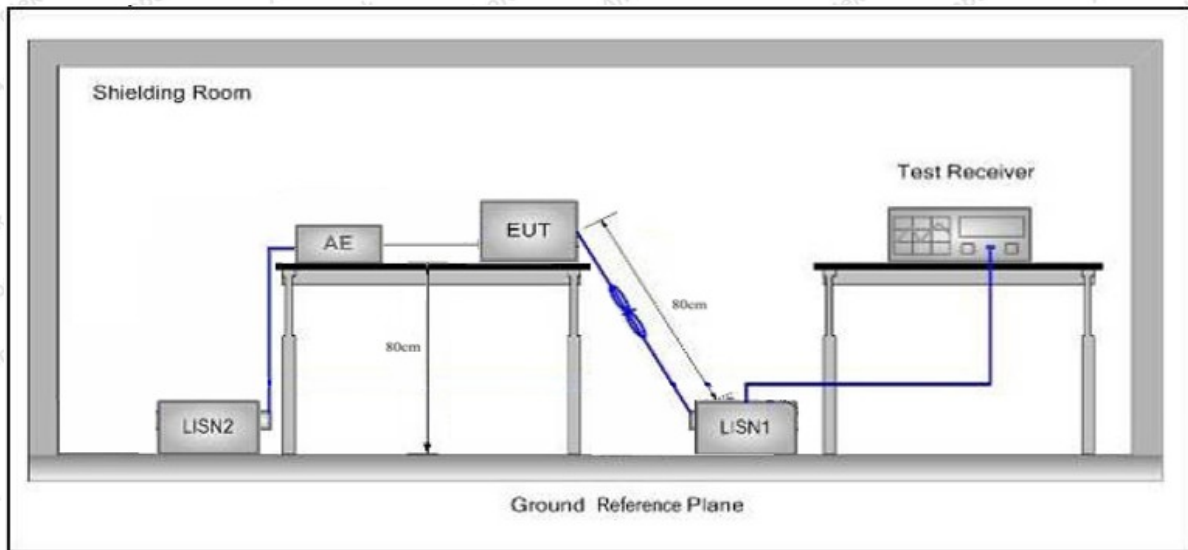

### 3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.


The frequency range from 150kHz to 30MHz is checked.

### 3.4. Test Data

Please to see the following pages

### Conducted Emission Test Data


Test Site: 1# Shielded Room  
 Operating Condition: Mode 1  
 Test Specification: AC 120V, 60Hz for adapter  
 Comment: Live Line  
 Tem.: 24.3°C Hum.: 62%

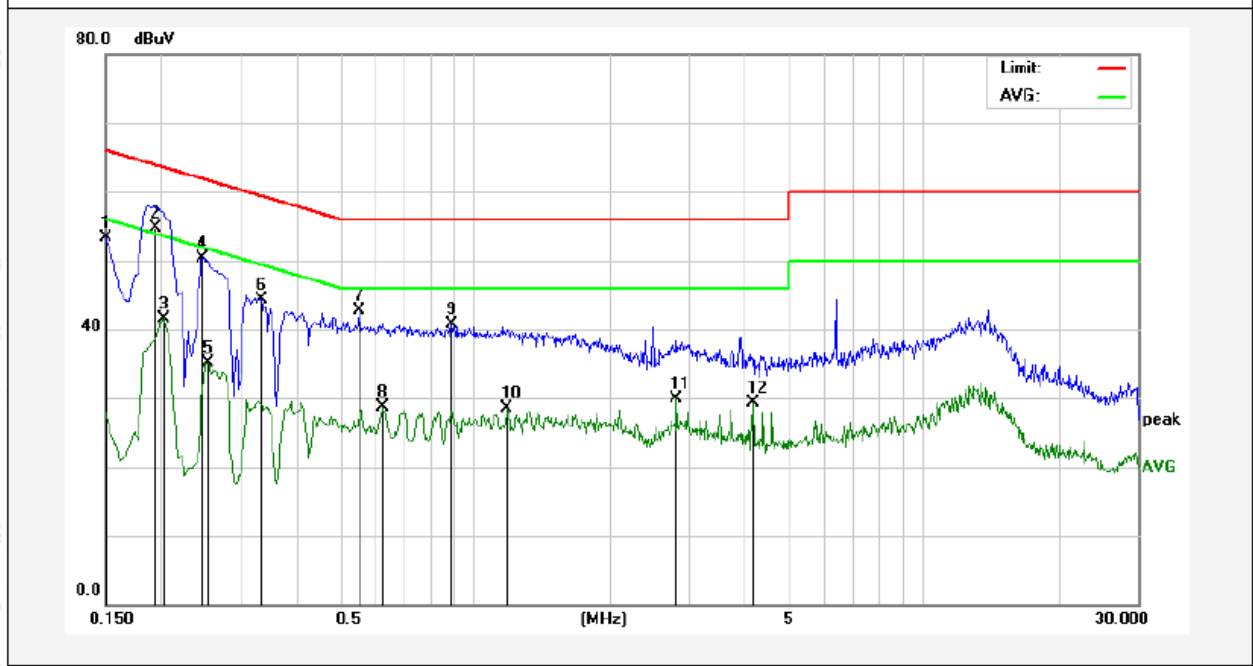

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1500	33.42	19.90	53.32	65.99	-12.67	QP	
2	0.1940	34.73	19.90	54.63	63.86	-9.23	QP	
3	0.2020	21.70	19.90	41.60	53.52	-11.92	AVG	
4	0.2460	30.41	19.89	50.30	61.89	-11.59	QP	
5	0.2540	15.30	19.89	35.19	51.62	-16.43	AVG	
6	0.3339	24.37	19.91	44.28	59.35	-15.07	QP	
7	0.5540	22.80	20.00	42.80	56.00	-13.20	QP	
8	0.6260	8.73	20.02	28.75	46.00	-17.25	AVG	
9	0.8860	20.56	20.09	40.65	56.00	-15.35	QP	
10	1.1820	8.33	20.12	28.45	46.00	-17.55	AVG	
11	2.8140	9.72	20.16	29.88	46.00	-16.12	AVG	
12	4.1579	9.04	20.18	29.22	46.00	-16.78	AVG	

### Conducted Emission Test Data


Test Site: 1# Shielded Room  
 Operating Condition: Mode 1  
 Test Specification: AC 120V, 60Hz for adapter  
 Comment: Neutral Line  
 Tem.: 24.3°C Hum.: 62%

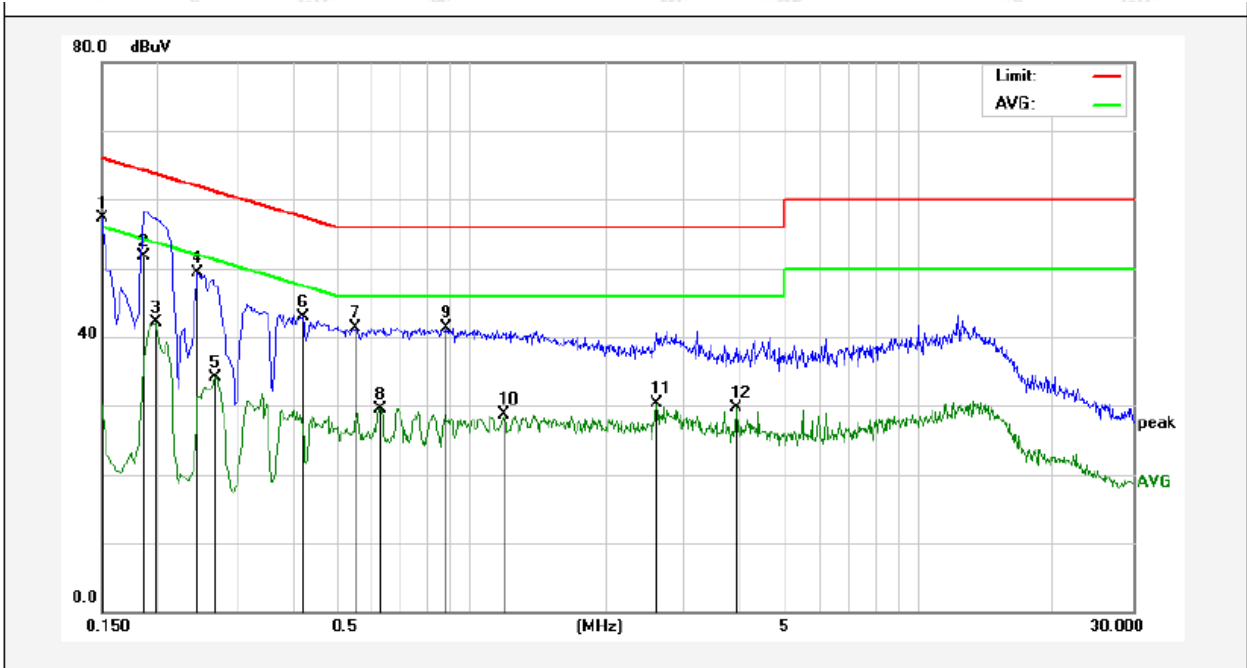

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1500	37.41	19.90	57.31	65.99	-8.68	QP	
2	0.1860	31.74	19.90	51.64	64.21	-12.57	QP	
3	0.1980	22.26	19.90	42.16	53.69	-11.53	AVG	
4	0.2460	29.47	19.89	49.36	61.89	-12.53	QP	
5	0.2700	14.16	19.89	34.05	51.12	-17.07	AVG	
6	0.4220	22.97	19.94	42.91	57.41	-14.50	QP	
7	0.5540	21.39	20.00	41.39	56.00	-14.61	QP	
8	0.6300	9.53	20.02	29.55	46.00	-16.45	AVG	
9	0.8820	21.24	20.09	41.33	56.00	-14.67	QP	
10	1.1860	8.61	20.12	28.73	46.00	-17.27	AVG	
11	2.5980	10.09	20.15	30.24	46.00	-15.76	AVG	
12	3.9140	9.52	20.18	29.70	46.00	-16.30	AVG	

### Conducted Emission Test Data


Test Site: 1# Shielded Room  
 Operating Condition: Mode 1  
 Test Specification: AC 240V, 60Hz for adapter  
 Comment: Live Line  
 Tem.: 24.3°C Hum.: 62%

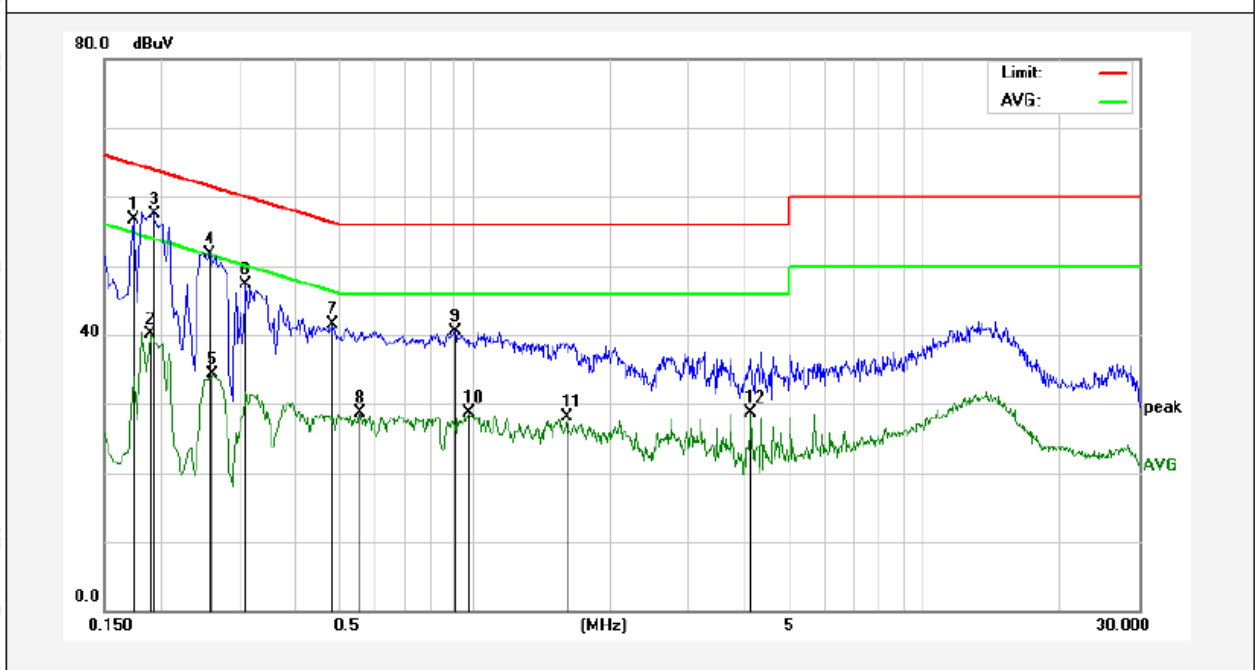

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1740	36.84	19.90	56.74	64.76	-8.02	QP	
2	0.1900	20.13	19.90	40.03	54.03	-14.00	AVG	
3	0.1940	37.57	19.90	57.47	63.86	-6.39	QP	
4	0.2580	31.81	19.89	51.70	61.49	-9.79	QP	
5	0.2620	14.37	19.89	34.26	51.36	-17.10	AVG	
6	0.3100	27.44	19.89	47.33	59.97	-12.64	QP	
7	0.4860	21.58	19.97	41.55	56.24	-14.69	QP	
8	0.5580	8.61	20.00	28.61	46.00	-17.39	AVG	
9	0.9060	20.43	20.09	40.52	56.00	-15.48	QP	
10	0.9740	8.62	20.11	28.73	46.00	-17.27	AVG	
11	1.6060	8.06	20.13	28.19	46.00	-17.81	AVG	
12	4.1140	8.58	20.18	28.76	46.00	-17.24	AVG	

### Conducted Emission Test Data

Test Site: 1# Shielded Room  
 Operating Condition: Mode 1  
 Test Specification: AC 240V, 60Hz for adapter  
 Comment: Neutral Line  
 Tem.: 24.3°C Hum.: 62%

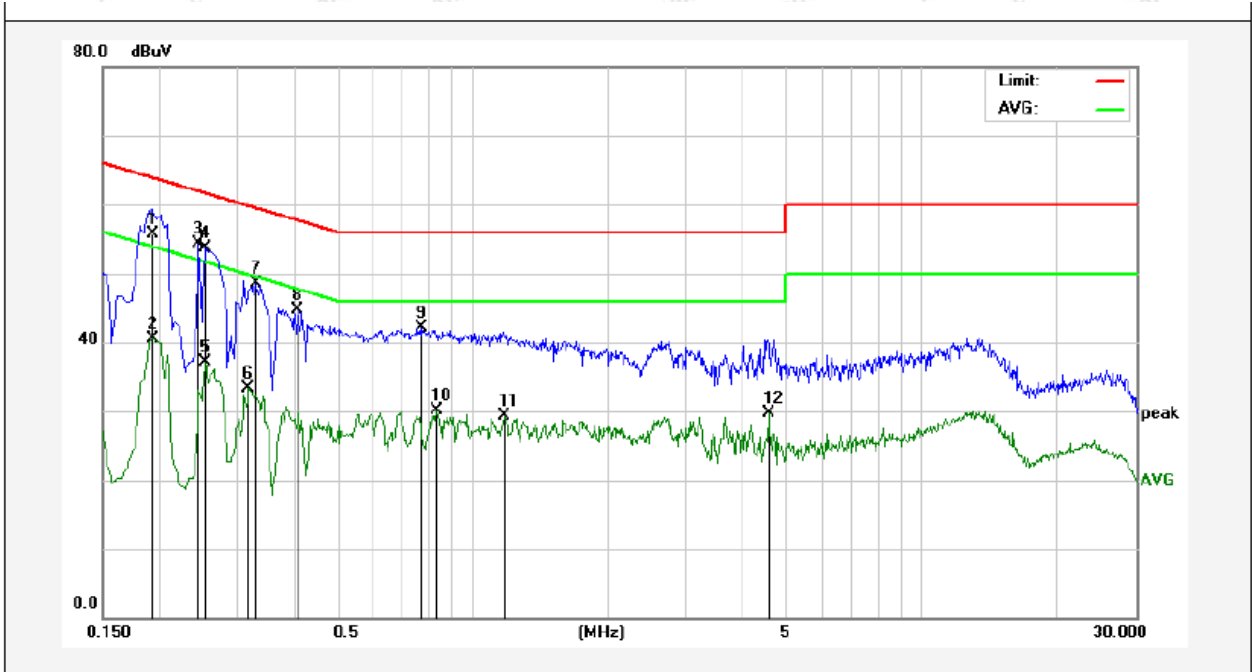

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1940	35.85	19.90	55.75	63.86	-8.11	QP	
2	0.1940	20.67	19.90	40.57	53.86	-13.29	AVG	
3	0.2460	34.51	19.89	54.40	61.89	-7.49	QP	
4	0.2540	33.79	19.89	53.68	61.62	-7.94	QP	
5	0.2540	17.19	19.89	37.08	51.62	-14.54	AVG	
6	0.3180	13.38	19.90	33.28	49.76	-16.48	AVG	
7	0.3300	28.68	19.90	48.58	59.45	-10.87	QP	
8	0.4100	24.79	19.94	44.73	57.65	-12.92	QP	
9	0.7700	22.07	20.06	42.13	56.00	-13.87	QP	
10	0.8340	10.10	20.08	30.18	46.00	-15.82	AVG	
11	1.1780	9.21	20.12	29.33	46.00	-16.67	AVG	
12	4.5700	9.50	20.20	29.70	46.00	-16.30	AVG	

## 4. Radiation Spurious Emission and Band Edge

### 4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	-	74.0	Peak

**Remark:**

- (1)The lower limit shall apply at the transition frequency.
- (2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

### 4.2. Test Setup

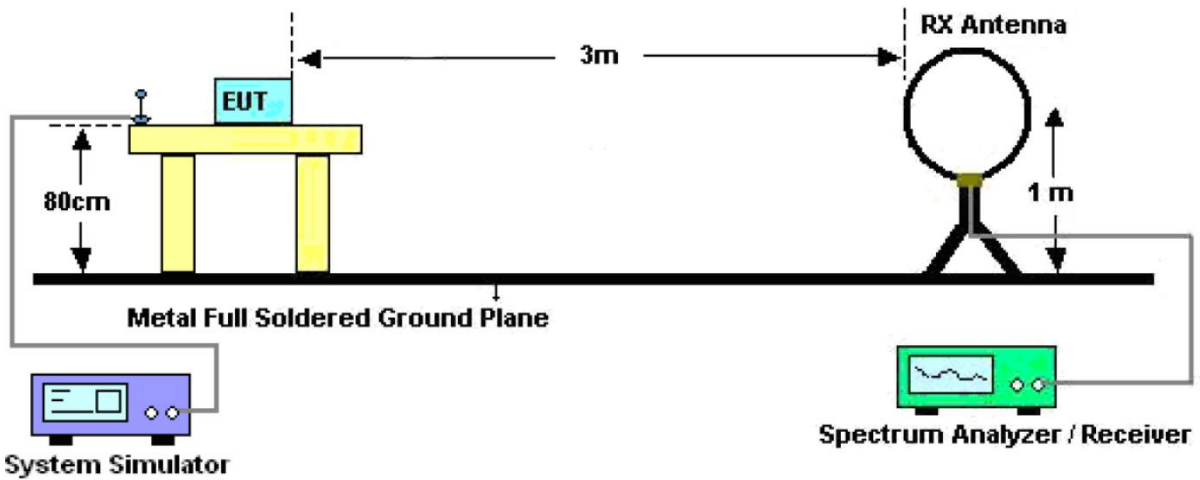


Figure 1. Below 30MHz

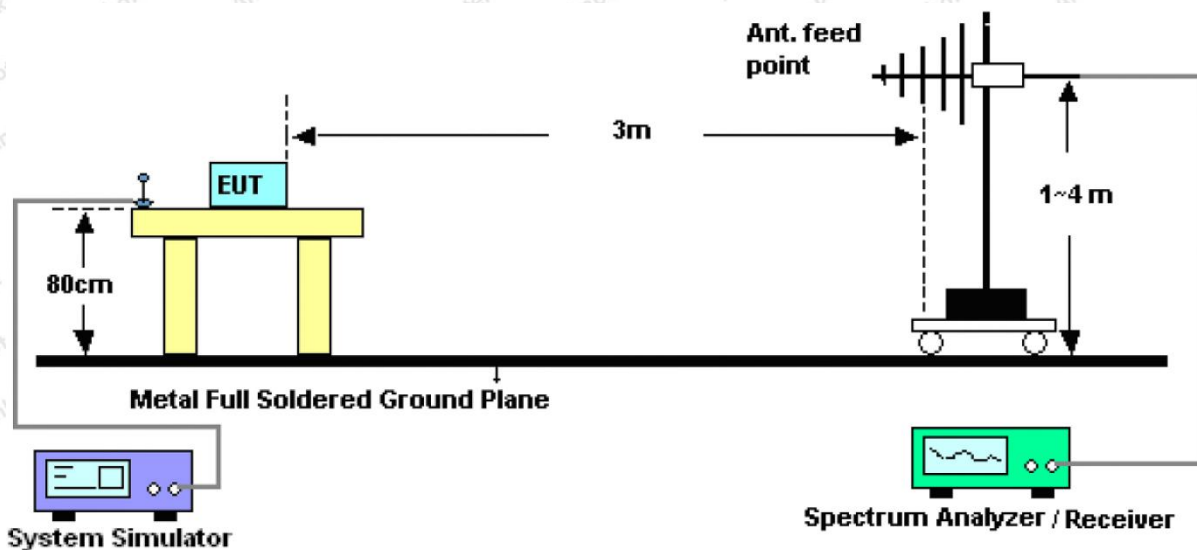


Figure 2. 30MHz to 1GHz

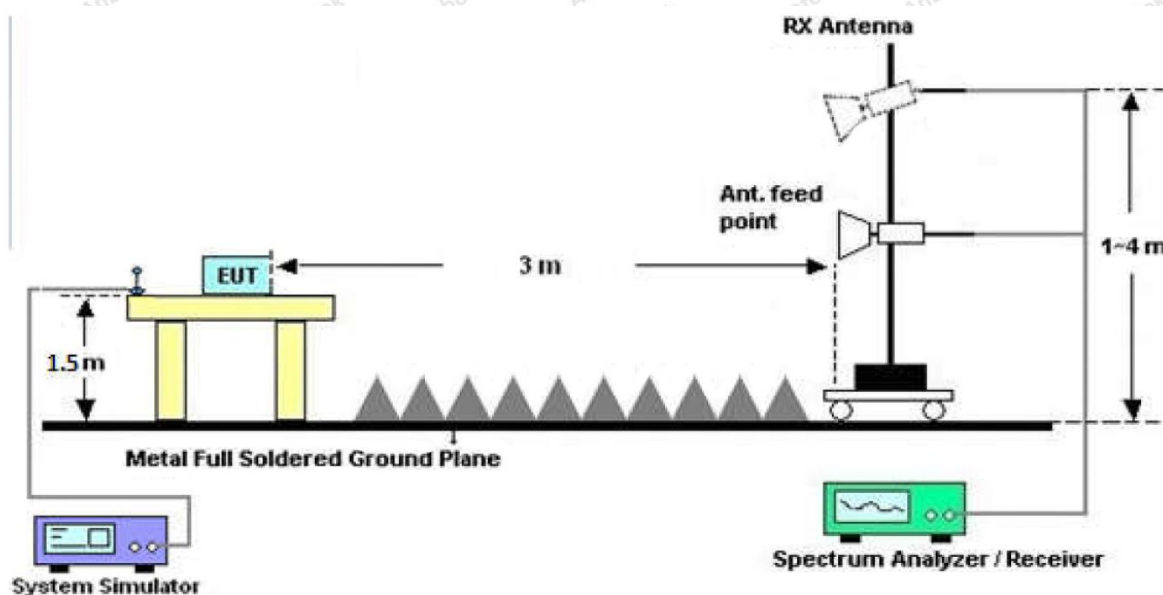


Figure 3. Above 1 GHz

### 4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9\*6\*6 Chamber. The device is evaluated in xyz orientation.



Report No.: 18220WC00064201

FCC ID: 2AQZH-GW17A

Page 17 of 31

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9kHz, VBW = 30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.


#### 4.4. Test Data

**PASS**

Note: The data is in TX mode, and this is the worst mode.

**Test Results (9K~30MHz)**

Test Mode: Mode 1  
 Power Source: AC 120V, 60Hz for adapter  
 Temp.(°C)/Hum.(%RH): 23.8°C/58%RH  
 Distance: 3m

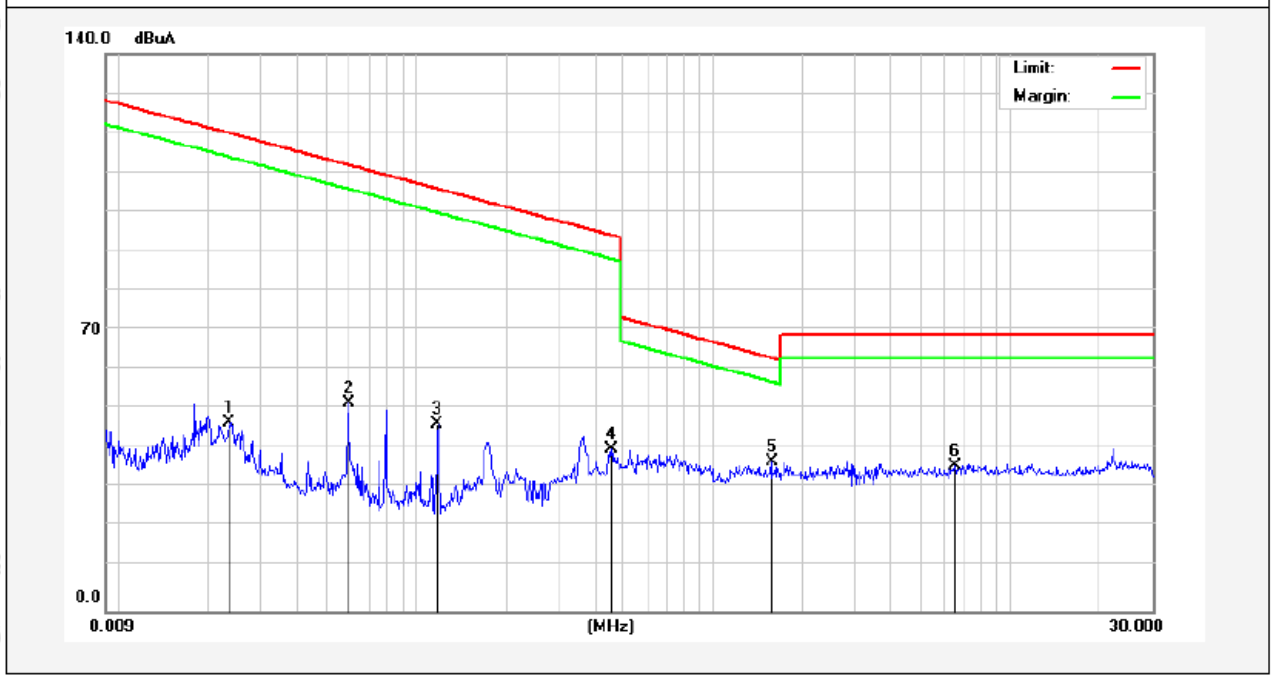


Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	degree (dgc)
0.0234	34.80	19.28	2.53	0	56.61	140.07	-83.46	Peak	312
0.0234	25.53	19.28	2.53	0	47.34	120.07	-72.73	AV	312
0.0592	39.50	19.30	2.54	0	61.34	132.05	-70.71	Peak	72
0.0592	30.61	19.30	2.54	0	52.45	112.05	-59.60	AV	72
0.1184	33.77	19.30	2.54	0	55.61	126.07	-70.46	Peak	124
0.1184	25.38	19.30	2.54	0	47.22	106.07	-58.85	AV	124
0.4540	27.71	19.53	2.59	0	49.83	114.46	-64.63	Peak	251
0.4540	18.57	19.53	2.59	0	40.69	94.46	-53.77	AV	251
1.5700	15.59	19.53	2.59	0	37.71	63.69	-25.98	QP	159
6.5259	14.42	19.53	2.59	0	36.54	69.54	-33.00	QP	271

**Remark:** According to FCC PART 15.209 (d), the emission limits for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, Radiated emission limits in these three bands are based on measurements employing an average detector.

### Test Results (30~1000MHz)


Test Mode: Mode 1  
 Power Source: AC 120V, 60Hz for adapter  
 Polarization: Vertical  
 Temp.(°C)/Hum.(%RH): 23.8°C/58%RH  
 Distance: 3m

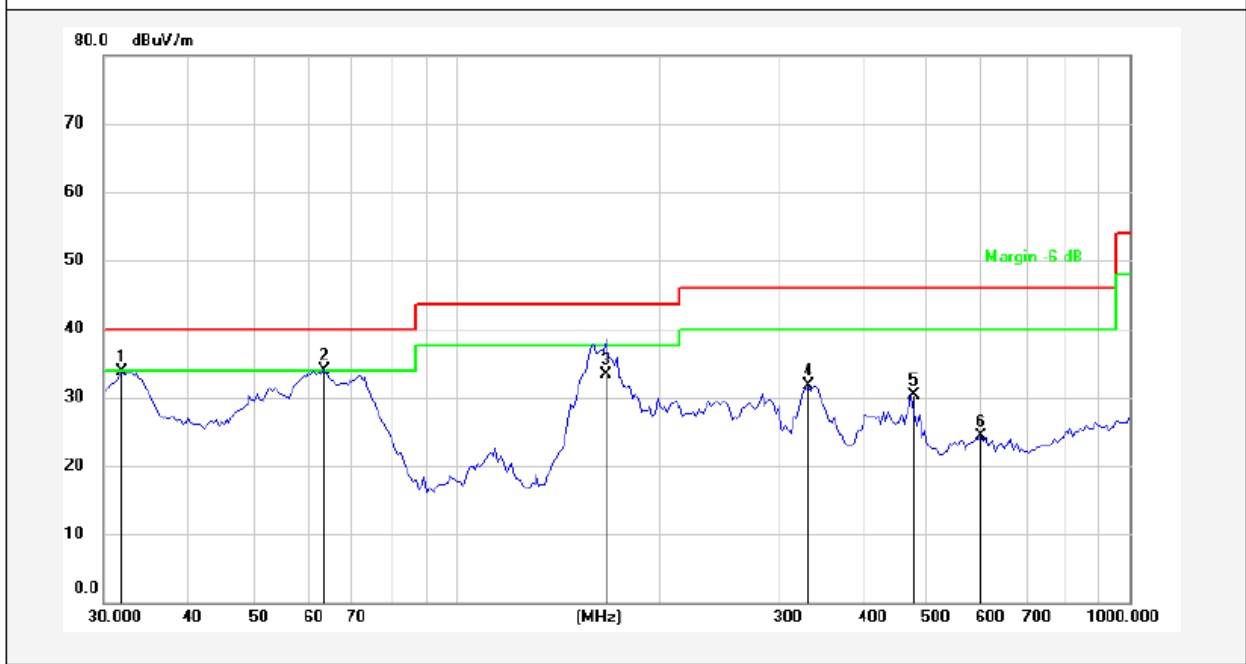

No.	Freq. (MHz)	Reading (dBuV)	Factor ( )	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	31.8986	50.57	-16.82	33.75	40.00	-6.25	QP	100	360	
2	63.7588	51.86	-17.88	33.98	40.00	-6.02	QP	100	0	
3	167.0868	52.91	-19.65	33.26	43.50	-10.24	QP	100	360	
4	334.2722	47.98	-16.21	31.77	46.00	-14.23	QP	100	0	
5	474.6662	45.20	-14.96	30.24	46.00	-15.76	QP	100	360	
6	601.4265	36.40	-12.11	24.29	46.00	-21.71	QP	100	0	

### Test Results (30~1000MHz)

Test Mode: Mode 1  
 Power Source: AC 120V, 60Hz for adapter  
 Polarization: Horizontal  
 Temp.(°C)/Hum.(%RH): 23.8°C/58%RH  
 Distance: 3m

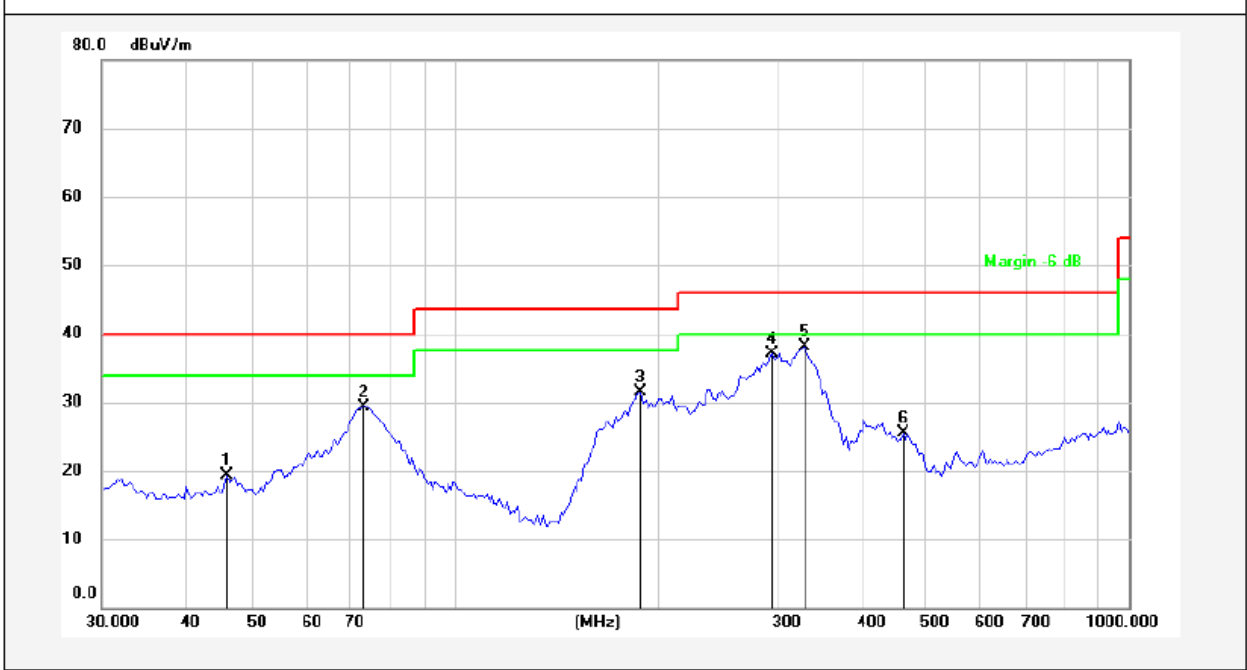

No.	Freq. (MHz)	Reading (dBuV)	Factor (°)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	46.0971	34.94	-15.68	19.26	40.00	-20.74	QP	100	360	
2	73.3593	50.31	-20.95	29.36	40.00	-10.64	QP	100	0	
3	189.0743	49.38	-17.95	31.43	43.50	-12.07	QP	100	360	
4	295.6648	54.32	-17.18	37.14	46.00	-8.86	QP	100	0	
5	331.3546	54.40	-16.33	38.07	46.00	-7.93	QP	100	360	
6	462.3455	40.77	-15.27	25.50	46.00	-20.50	QP	100	0	



## 5. Antenna Requirement

### 5.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203
Requirement	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can

### 5.2. Antenna Connected Construction

The antenna is a Inductive loop coil Antenna which permanently attached, and the best case gain of the antenna is 0 dBi. It complies with the standard requirement.

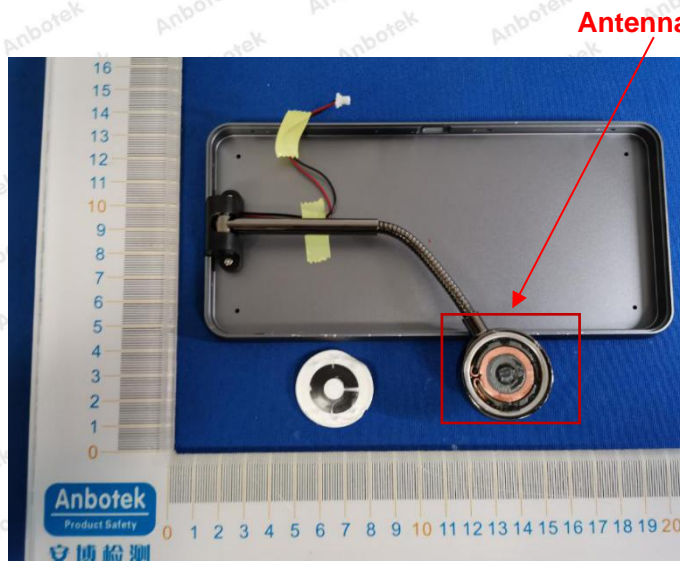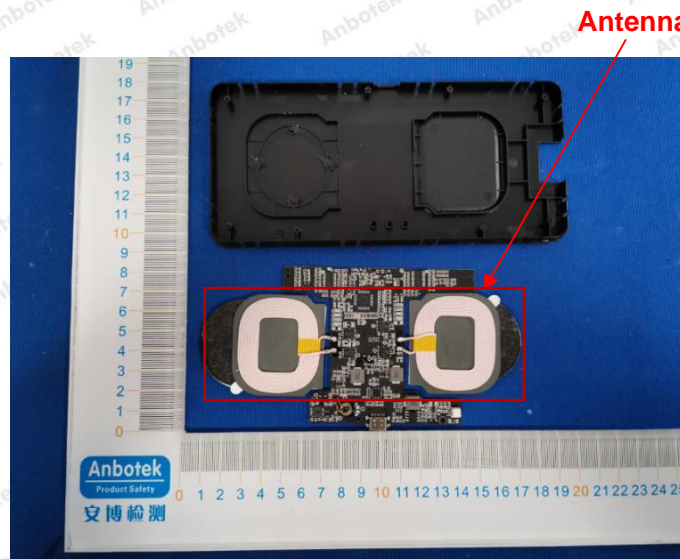


## APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Conducted Emission Measurement



Photo of Radiation Emission Test





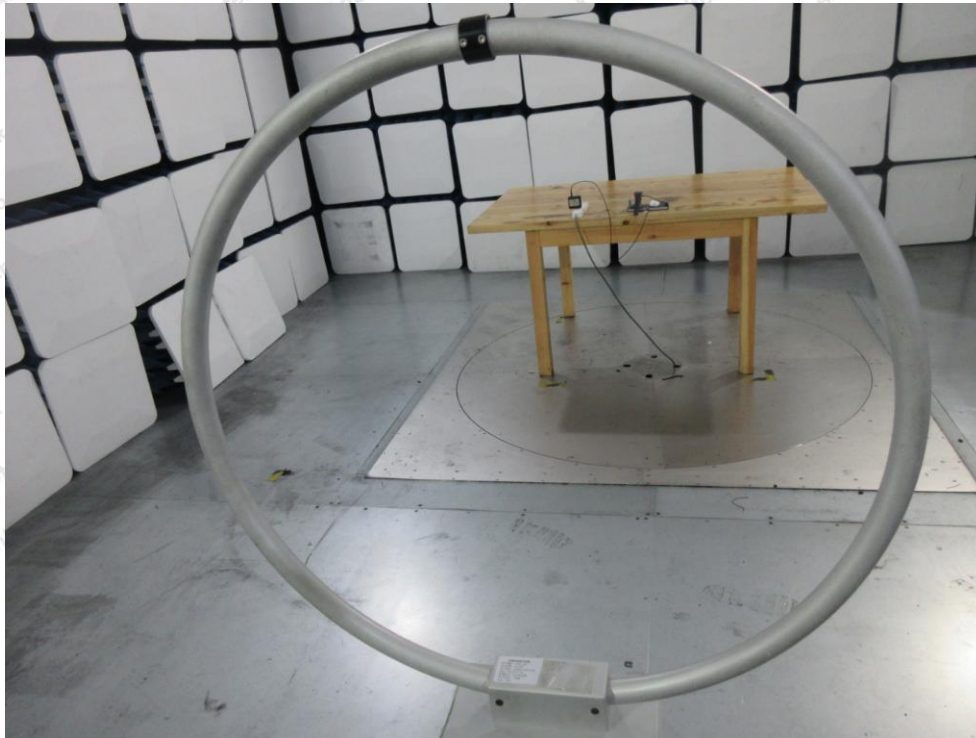



### APPENDIX II -- EXTERNAL PHOTOGRAPH







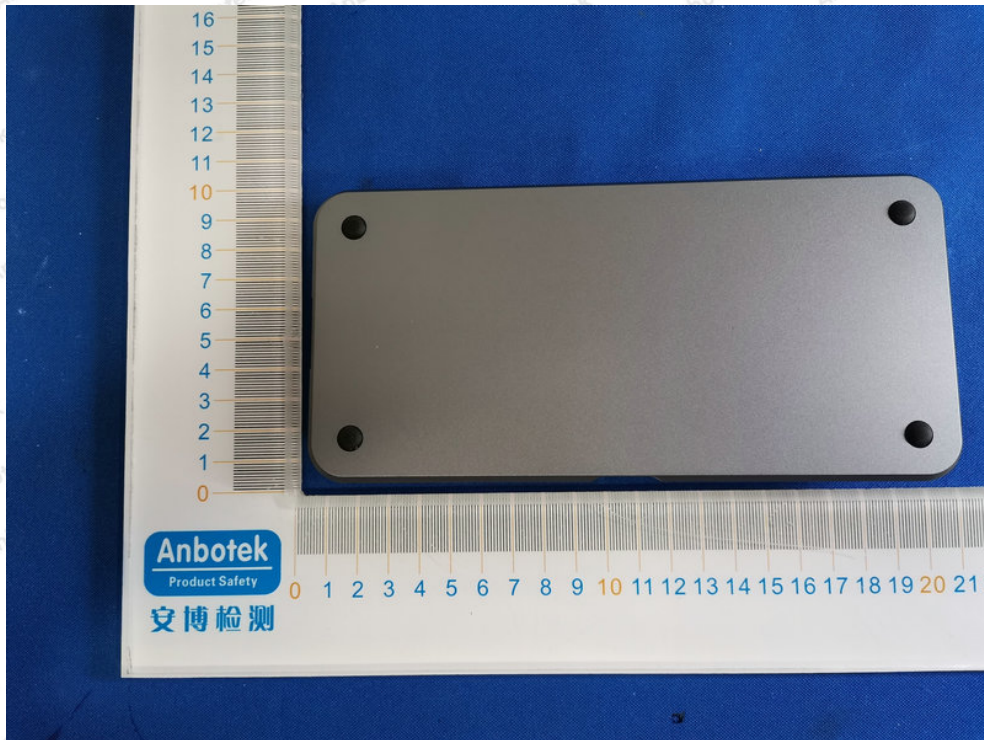


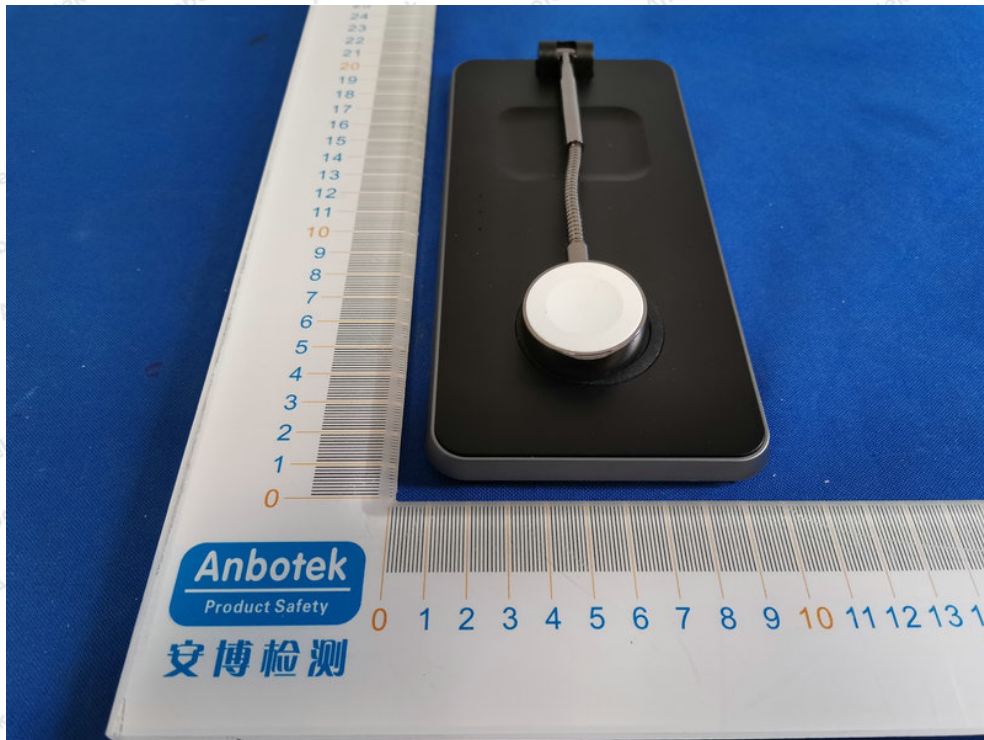
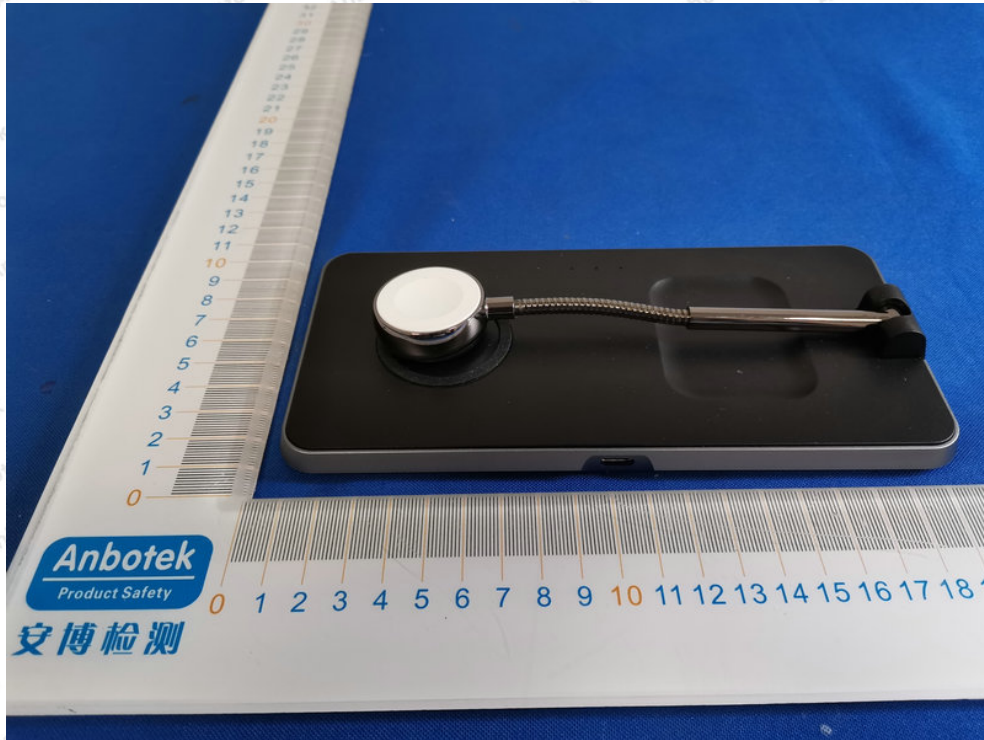


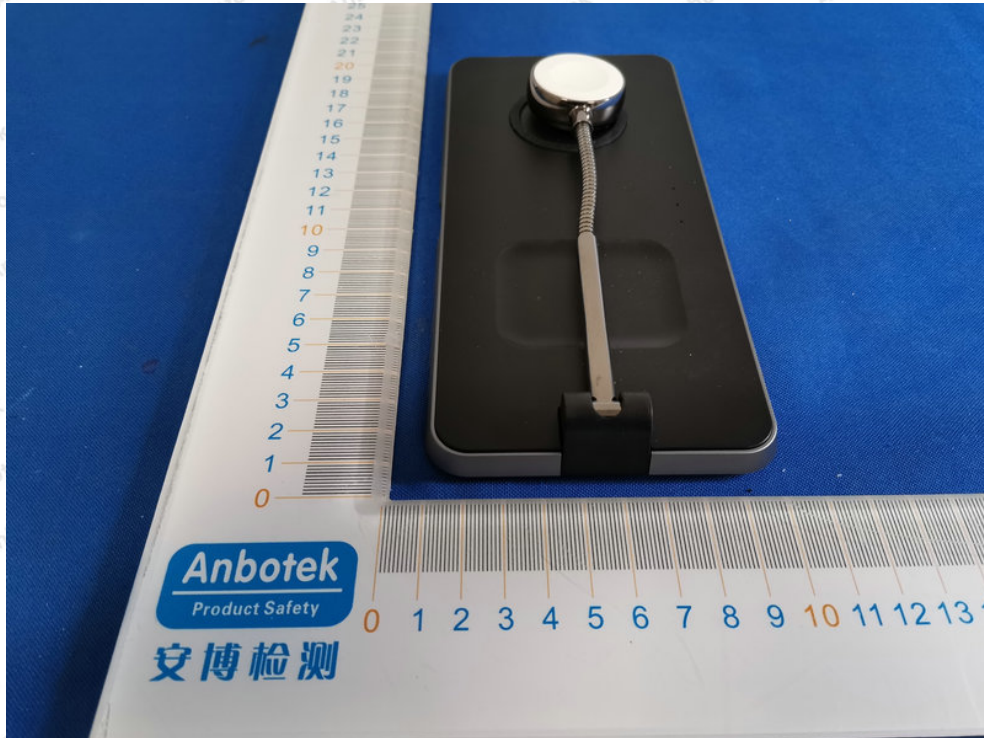


### APPENDIX III -- INTERNAL PHOTOGRAPH

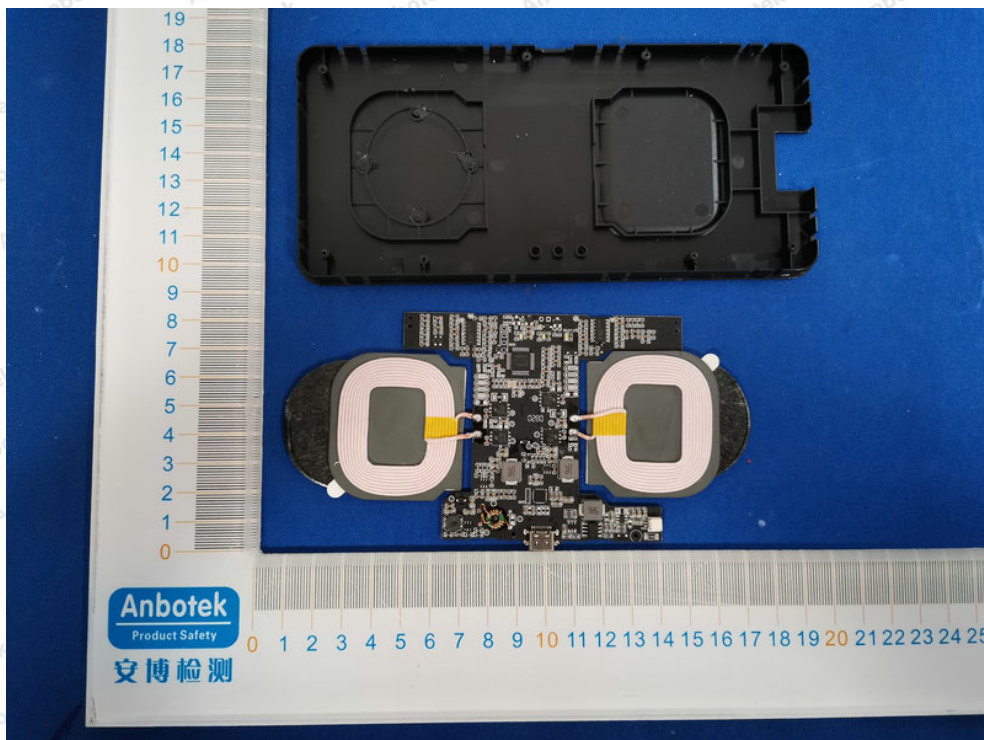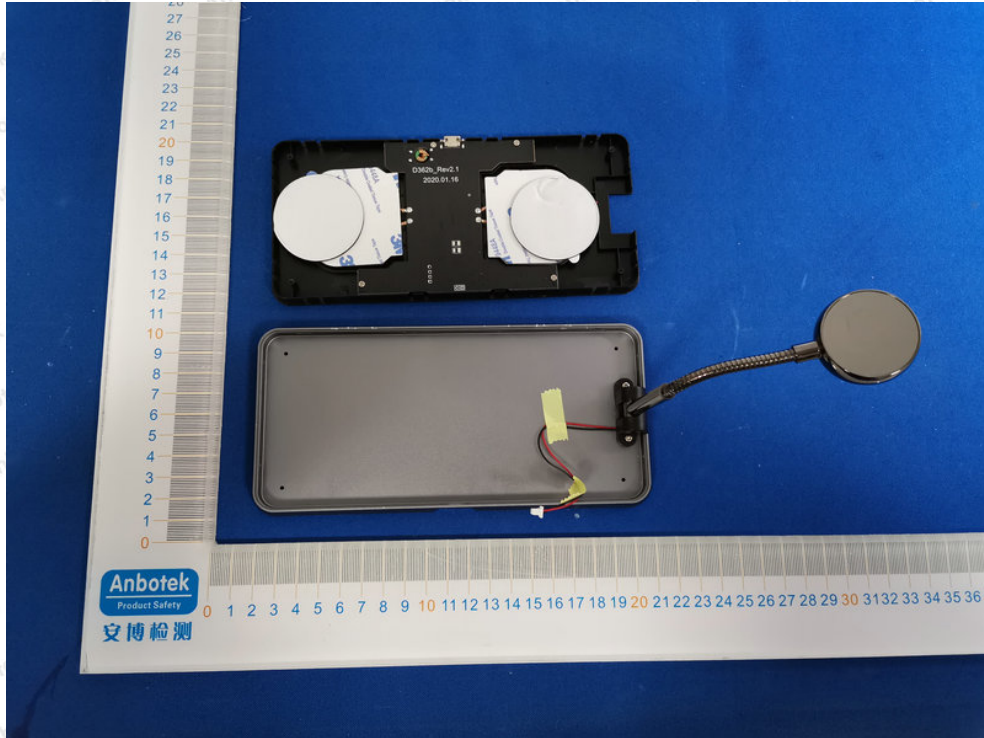

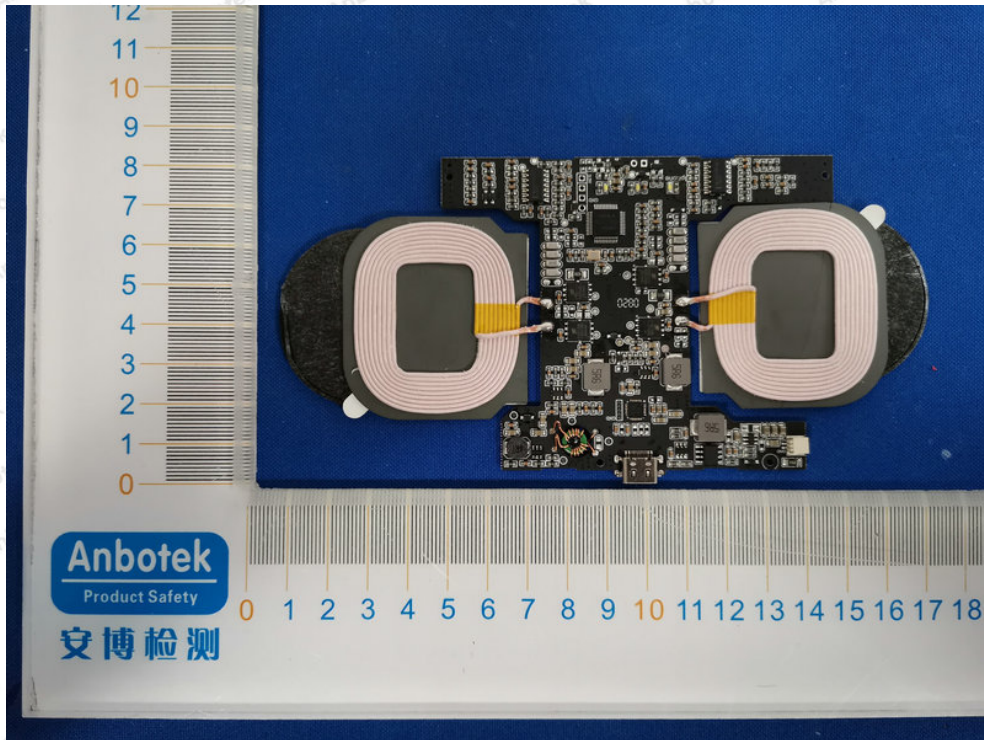

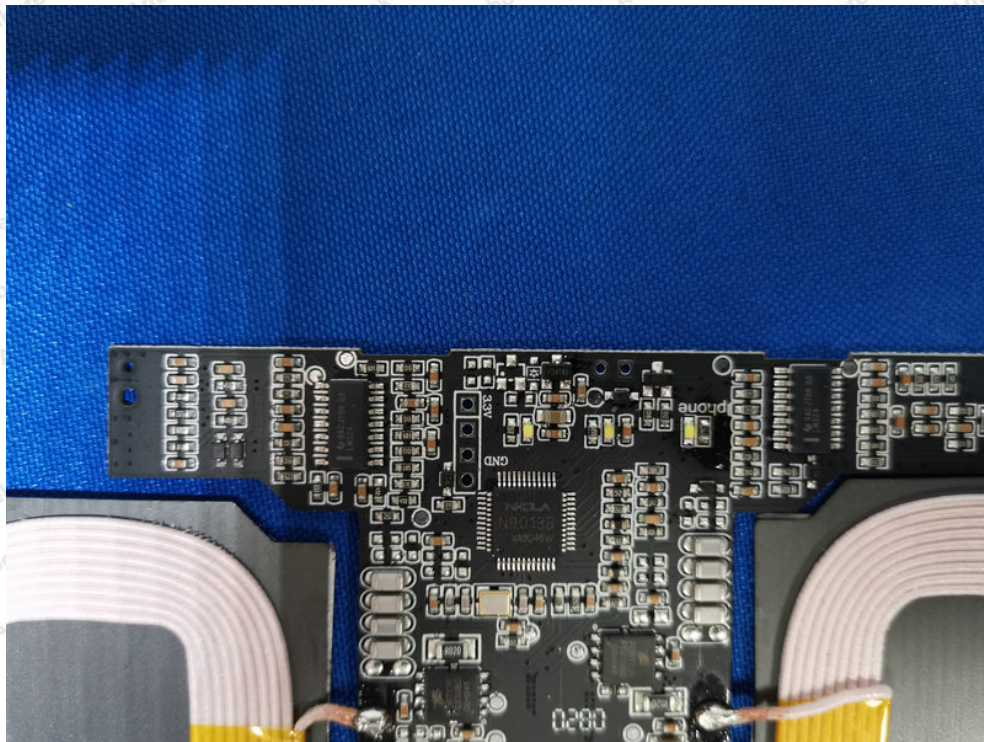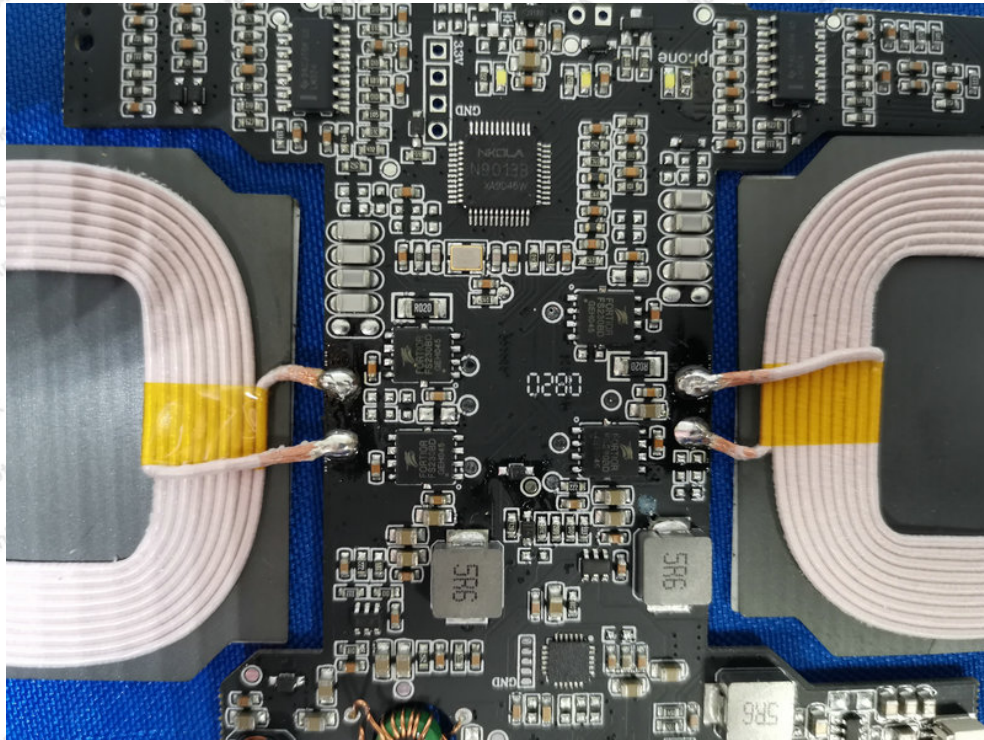

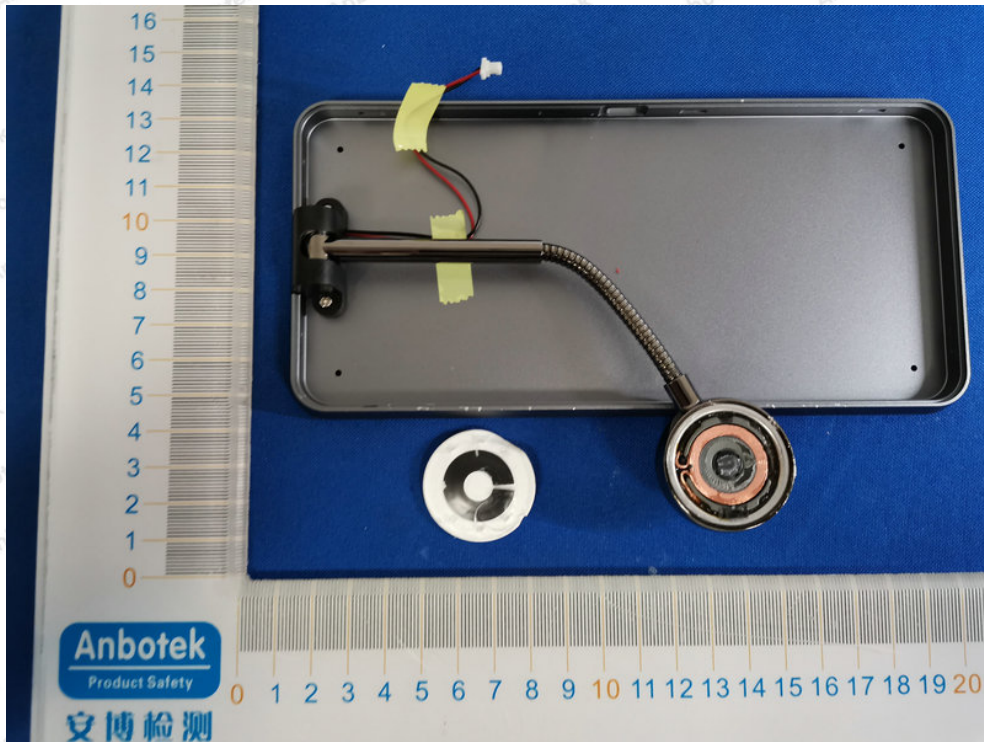

----- End of Report -----