



### FCC Part 15, Subpart C Test Report

FCC ID: 2AR2STAB6309

Applicant: MMD Hong Kong Holding Limited

Address: Units 1208-11, 12th Floor, C-Bons International Center, 108 Wai Yip Street, Kwun Tong, Kowloon, Hong Kong

Manufacturer: MMD Hong Kong Holding Limited

Address: Units 1208-11, 12th Floor, C-Bons International Center, 108 Wai Yip Street, Kwun Tong, Kowloon, Hong Kong

Product: Soundbar speaker

Brand: PHILIPS or 

Test Model(s): TAB6309/37

Series Model(s): See Section 2.1

Test Date: Apr. 14, 2024 ~ Apr. 22, 2024

Issued Date: May. 08, 2024

Issued By: Hwa-Hsing (Dongguan) Testing Co., Ltd.

Address: No.101, Building N1, Yuyuan 2 Road, Yuyuan Industrial Park, HuangJiang Town, Dongguan City, People's Republic of China

Test Firm Registration No.: 915896

Designation No.: CN1255

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)  
ANSI C63.10:2013

The above equipment has been tested by **Hwa-Hsing (Dongguan) Testing Co., Ltd.**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by :

*Nature Lee*

Nature Lee

Reviewed by :

*Dragon Long*

Dragon Long

Approved by :

*Scott He*

Scott He

"This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. Our report includes all the tests requested by you and the results thereof based upon the information that you provided to us. The report would be invalid without specific stamp of test institute and the signatures of tester and approver."

**Table of Contents**

<b>Release Control Record .....</b>	<b>4</b>
<b>1. Summary of Test Results .....</b>	<b>5</b>
1.1 Measurement Uncertainty .....	5
1.2 Modification Record .....	5
<b>2. General Information .....</b>	<b>6</b>
2.1 General Description of EUT .....	6
2.2 Description of Test Channels .....	7
2.3 Test Mode Applicability and Tested Channel Detail .....	7
2.4 Description of Support Units .....	9
2.5 Configuration of System under Test .....	9
2.6 Duty Cycle of Test Signal .....	9
<b>3. Test Types and Results .....</b>	<b>11</b>
3.1 Radiated Emission and Band-edge Measurement .....	11
3.1.1 Limits of radiated emission and band-edge measurement .....	11
3.1.2 Test Instruments .....	12
3.1.3 Test Procedures .....	13
3.1.4 Deviation from Test Standard .....	14
3.1.5 Test Setup .....	15
3.1.6 EUT Operating Conditions .....	16
3.1.7 Test Results .....	17
3.2 Conducted Emission Measurement .....	32
3.2.1 Limits of Conducted Emission Measurement .....	32
3.2.2 Test Instruments .....	32
3.2.3 Test Procedures .....	33
3.2.4 Test Setup .....	33
3.2.5 EUT Operating Condition .....	33
3.2.6 Deviation from Test Standard .....	33
3.2.7 Test Results .....	34
3.3 6dB Bandwidth Measurement .....	36
3.3.1 Limits of 6dB Bandwidth Measurement .....	36
3.3.2 Test Setup .....	36
3.3.3 Test Instruments .....	36
3.3.4 Test Procedure .....	37
3.3.5 Deviation from Test Standard .....	37
3.3.6 EUT Operating Conditions .....	37
3.3.7 Test Result .....	38
3.4 Occupied Bandwidth Measurement .....	40
3.4.1 Test Setup .....	40
3.4.2 Test Instruments .....	40
3.4.3 Test Procedure .....	40
3.4.4 Deviation from Test Standard .....	40
3.4.5 EUT Operating Conditions .....	40
3.4.6 Test Results .....	41
3.5 Conducted Output Power Measurement .....	43
3.5.1 Limits of Conducted Output Power Measurement .....	43
3.5.2 Test Setup .....	43
3.5.3 Test Instruments .....	43
3.5.4 Test Procedures .....	43
3.5.5 Deviation from Test Standard .....	45
3.5.6 EUT Operating Conditions .....	45
3.5.7 Test Results .....	46

Test Report No.: 24032702-RF-US-02

3.6	Power Spectral Density Measurement .....	49
3.6.1	Limits of Power Spectral Density Measurement.....	49
3.6.2	Test Setup .....	49
3.6.3	Test Instruments .....	49
3.6.4	Test Procedure .....	50
3.6.5	Deviation from Test Standard.....	50
3.6.6	EUT Operating Condition .....	50
3.6.7	Test Results.....	51
3.7	Conducted Out of Band Emission Measurement .....	53
3.7.1	Limits of Conducted Out of Band Emission Measurement.....	53
3.7.2	Test Setup .....	53
3.7.3	Test Instruments .....	53
3.7.4	Test Procedure .....	54
3.7.5	Deviation from Test Standard.....	54
3.7.6	EUT Operating Condition .....	54
3.7.7	Test results .....	55
<b>4.</b>	<b>Pictures of Test Arrangements .....</b>	<b>59</b>
<b>5.</b>	<b>Test Instruments.....</b>	<b>60</b>
	<b>Appendix – Information on The Testing Laboratories.....</b>	<b>61</b>

Test Report No.: 24032702-RF-US-02

**Release Control Record**

Issue No.	Description	Date Issued
24032702-RF-US-02	Original Release	May. 08, 2024

**1. Summary of Test Results**

47 CFR FCC Part 15, Subpart C (Section 15.247) KDB 558074 D01 15.247 Meas Guidance v05r02 ANSI C63.10:2013			
Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit.
15.205 & 209	Radiated Emissions	Pass	Meet the requirement of limit.
15.247(d)	Band Edge Measurement	Pass	Meet the requirement of limit.
15.247(d)	Antenna Port Emission	Pass	Meet the requirement of limit.
15.247(a)(2)	6dB Bandwidth	Pass	Meet the requirement of limit.
---	Occupied Bandwidth Measurement	Pass	Reference only
15.247(b)	Conducted power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	No antenna connector is used. The device is professionally installed

**Note:** The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

**1.1 Measurement Uncertainty**

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

The listed uncertainties are the worst cases uncertainty for the entire range of measurement. Please note that the uncertainty values are provided for informational purposes only and are not used in determining the PASS/FAIL results.

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Radiated Emissions up to 1 GHz	9KHz ~ 30MHz	2.16 dB
	30MHz ~ 1000MHz	3.47 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	4.84 dB
	18GHz ~ 40GHz	4.67 dB

**1.2 Modification Record**

There were no modifications required for compliance.

**2. General Information****2.1 General Description of EUT**

Product	Soundbar speaker
Test Model(s)	TAB6309/37
Sample No.	HS2404090003
Series Model(s)	TAB6309, TAB6309/10, TAB6309/yy (yy=00-99 or blank, for country code)
Status of EUT	Engineering Prototype
Power Supply Rating	DC 24V 1.5A
Modulation Type	GFSK for DTS
Transfer Rate	1 Mbps, 2Mbps
Operating Frequency	2402 ~ 2480MHz
Number of Channel	40
Maximum Output Power	4.12dBm (Peak)
Antenna Type and Antenna Gain	FPC Antenna; 3.27dBi Gain
Antenna Connector	N/A
Accessory Device	Remote Control×1
Cable Supplied	AUX Line:150cm Non-shielded, Detachable AC Line: 140cm Non-shielded, Detachable Adapter: 220cm Non-shielded, Detachable

**Note:**

1. Please refer to the EUT photo document (Reference No.: 24032702-01-01&02) for detailed product photo.
2. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.
3. For the test results, the EUT had been tested with all conditions, and only the worst case was shown in the test report.
4. Model differences: These models are only different from model name and trademark for trade purpose.

**2.2 Description of Test Channels**

40 channels are provided to this EUT:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
<b>0</b>	<b>2402</b>	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	<b>19</b>	<b>2440</b>	29	2460	<b>39</b>	<b>2480</b>

**2.3 Test Mode Applicability and Tested Channel Detail**

EUT Configure Mode	Applicable test items	X-Axis	Y-Axis	Z-Axis	Voltage Supply
Radiated	AC Power Conducted Emission	N/A	N/A	N/A	DC 24V
Radiated	Radiated Emissions	√	√	√	
Antenna Port Conducted Measurement	Band Edge Measurement	N/A	N/A	N/A	
	Antenna Port Emission	N/A	N/A	N/A	
	6dB Bandwidth	N/A	N/A	N/A	
	Occupied Bandwidth Measurement	N/A	N/A	N/A	
	Conducted power	N/A	N/A	N/A	
	Power Spectral Density	N/A	N/A	N/A	

- \*: The EUT had been pre-tested on the positioned of each 3 Axis. The worst case was found when positioned on **Z-plane**.
- "N/A" means no effect.

**Test Condition:**

Applicable test items	Environmental Conditions	Test Date	Tested by
Radiated Emissions	24.2deg. C, 56%RH	Apr. 20, 2024	Hua
Antenna Port Conducted Measurement	25.8deg. C, 52.5%RH	Apr. 16, 2024	Dragon

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.

**Radiated Emission Test (Above 1GHz):**

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
-	0 to 39	0, 19, 39	GFSK	2
-	0 to 39	0, 19, 39	GFSK	1

**Radiated Emission Test (Below 1GHz):**

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
-	0 to 39	0	GFSK	2
-	0 to 39	0	GFSK	1

**Power Line Conducted Emission Test:**

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
-	0 to 39	39	GFSK	2
-	0 to 39	39	GFSK	1

**Antenna Port Conducted Measurement:**

\*This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
-	0 to 39	0, 19, 39	GFSK	2
-	0 to 39	0, 19, 39	GFSK	1




## 2.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID
1	Notebook	HUAWEI	NbD-WFH9	EUPEM21725002655	N/A
2	Notebook	DELL	Inspiron 14R Aluminum Edition	6WPG9-63PV4-RBPF2-T6RHW-W9GBP	N/A


No.	Signal Cable Description of The Above Support Units
1.	USB extension cord: Unshielded, Detachable 1.2m;

## 2.5 Configuration of System under Test

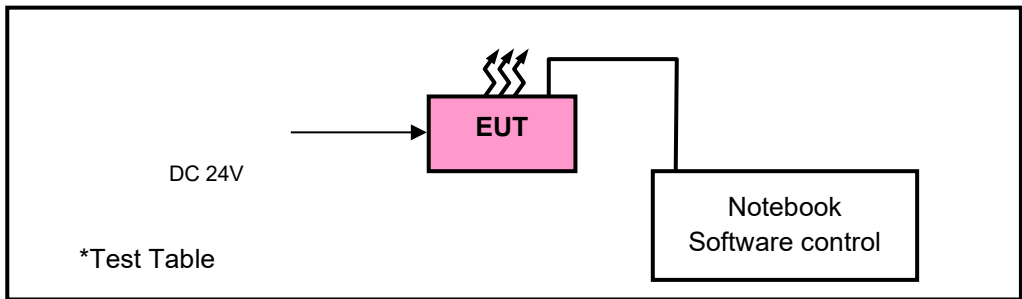


## 2.6 Duty Cycle of Test Signal

Test Mode	Channel	Duty Cycle [%]
GFSK-1MHz	2402	30.40
	2440	30.40
	2480	30.40

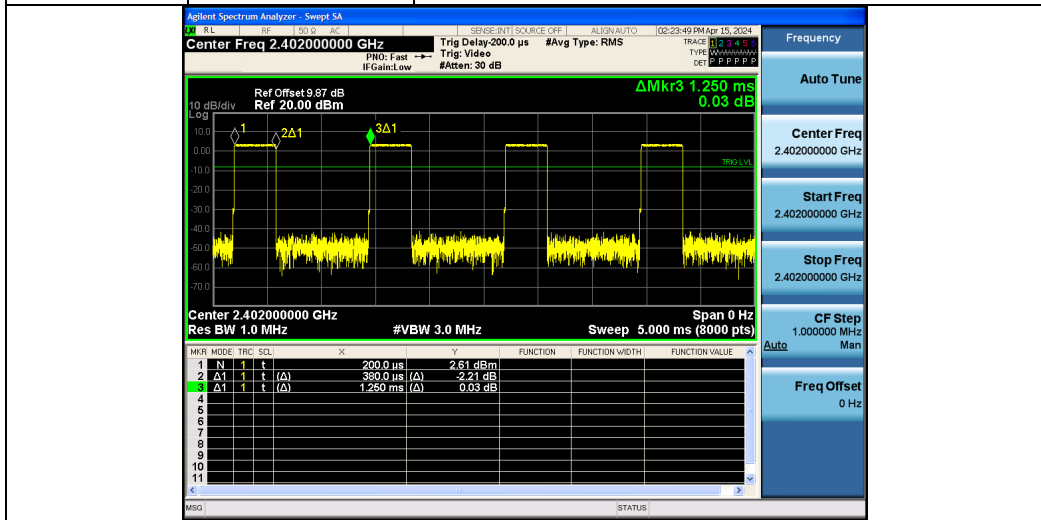

Test Mode	Channel	Duty Cycle [%]
GFSK-2MHz	2402	16.00
	2440	16.00
	2480	16.00

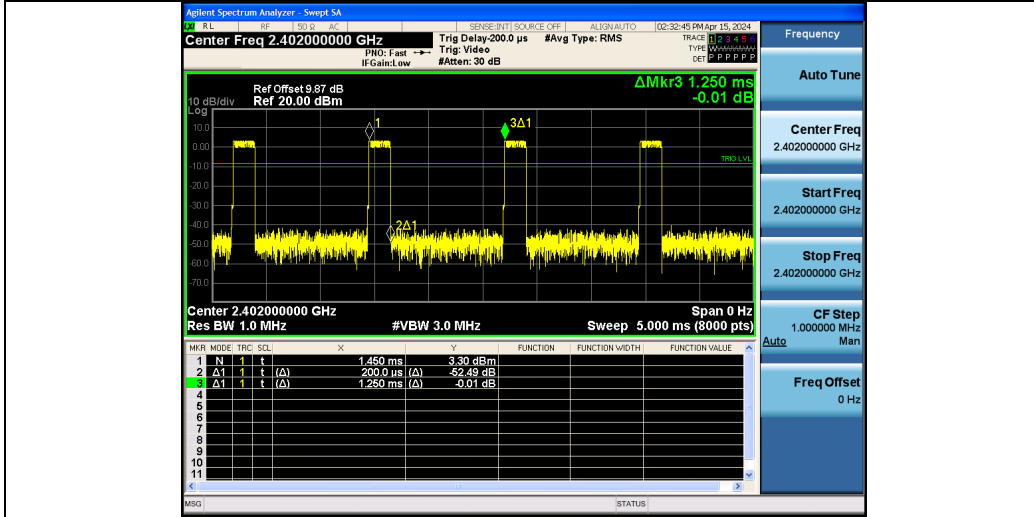

**3. Test Types and Results****3.1 Radiated Emission and Band-edge Measurement**

## 3.1.1 Limits of radiated emission and band-edge measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

\* DTS emissions in non-restricted frequency bands Subclause 11.11 of ANSI C63.10 is applicable.  
\* DTS emissions in restricted frequency bands Subclause 11.12 of ANSI C63.10 is applicable.

## Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

3.1.2 Test Instruments

Radiated emission below 30MHz:

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR7	100962	2024-12-17
3m Semi-anechoic Chamber	MAORUI	9m*6m*6m	NSEMC003	2026-03-12**
Test software	FARAD	FARAD	EZ EMCV1.1.4.2	N/A
Loop Antenna	EMCI	HLA 6121	56735	2024-05-04*
Antenna Tower	MF	MFA-440H	NA	NA
Turn Table	MF	MFT-201SS	NA	NA
Antenna Tower&Turn Table Controller	MF	MF-7802	NA	NA

Frequency Range below 1GHz:

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
3m Semi-anechoic Chamber	MAORUI	9m*6m*6m	NSEMC003	2026-03-12**
EMI Test Receiver	Rohde&Schwarz	ESPI 7	101978	2024-12-17
Broadband antenna	Schwarzbeck	VULB 9168	00937	2024-08-18
Signal Amplifier	Com-power	PAM-103	18020051	2024-08-06
Attenuator	Rohde&Schwarz	TS2GA-6dB	18101101	N/A
Test software	FARAD	FARAD	EZ EMCV1.1.4.2	N/A

Frequency Range above 1GHz:

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
3m Semi-anechoic Chamber	MAORUI	9m*6m*6m	NSEMC003	2026-03-12**
Horn Antenna	Schwarzbeck	BBHA 9120D	02202	2024-08-27*
Broadband Coaxial Pre-amplifier	Schwarzbeck	BBV 9718	25	2024-08-06
Spectrum	Keysight	N9020A	MY51240612	2024-08-06
Pre-Amplifier	EMCI	EMC 184045SE	9870709	2024-12-17
Antenna Tower	MF	MFA-440H	NA	NA
Turn Table	MF	MFT-201SS	NA	NA
Antenna Tower&Turn Table Controller	MF	MF-7802	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months or 24 months (\*) or 36 months (\*\*).
2. The test was performed in 966.

3.1.3 Test Procedures

**a. Peak emission levels are measured by setting the instrument as follow:**

1) RBW & VBW setting as a function of frequency:

Frequency	RBW	VBW
9kHz~150kHz	200Hz	600Hz
0.15MHz~30MHz	9kHz	30kHz
30MHz~1000MHz	120kHz	300kHz
>1000MHz	1MHz	3MHz

- 2) Detector = peak.
- 3) Sweep time = auto.
- 4) Trace mode = max hold.
- 5) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be lengthened for low-duty-cycle applications.)

Note: If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

**b. Average emission levels are measured by setting the instrument as follow:**

● **Trace averaging with continuous EUT transmission at full power**

If the EUT can be configured or modified to transmit continuously ( $D \geq 98\%$ ), then the average emission levels shall be measured using the following method (with EUT transmitting continuously):

- 1) RBW=1 MHz (unless otherwise specified).
- 2) VBW  $\geq 3 \cdot$  RBW.
- 3) Detector =RMS
- 4) Sweep time = auto.
- 5) Perform a trace average of at least 100 traces.

● **Trace averaging across ON and OFF times of the EUT transmissions followed by duty cycle correction**

If continuous transmission of the EUT ( $D \geq 98\%$ ) cannot be achieved and the duty cycle is constant (duty cycle variations are less than  $\pm 2\%$ ), then the following procedure shall be used:

- 1) The EUT shall be configured to operate at the maximum achievable duty cycle.
- 2) Measure the duty cycle D of the transmitter output signal as described in 11.6.
- 3) RBW=1 MHz (unless otherwise specified).
- 4) VBW  $\geq 3 \cdot$  RBW.
- 5) Detector =RMS
- 6) Sweep time = auto.
- 7) Perform a trace average of at least 100 traces.

A correction factor shall be added to the measurement results prior to comparing with the emission limit to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

\*If power averaging (rms) mode was used in step 5). then the applicable correction factor is  $[10 \log (1/ D)]$ , where D is the duty cycle.

\*\*If linear voltage averaging mode was used in step f). then the applicable correction factor is  $[20 \log (1/D)]$ , where D is the duty cycle.

\*\*\*If a specific emission is demonstrated to be continuous ( $D > 98\%$ ) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that.

**● Reduced VBW Averaging across ON and OFF times of the EUT transmissions with max hold**

If continuous transmission of the EUT ( $D > 98\%$ ) cannot be achieved and the duty cycle is not constant (duty cycle variations exceed  $\pm 2\%$ ), then the following procedure shall be used:

- 1) RBW = 1 MHz.
  - 2) VBW  $\geq 1/T$ .
  - 3) Detector = peak
  - 4) Sweep time = auto.
  - 5) Trace mode = max hold.
  - 6) Allow max hold to run for at least  $[50 \times (1/D)]$  traces.
- c. The EUT was placed on the top of a rotating table 0.8 meters (below 1GHz) / 1.5 meters (Above 1GHz) above the reference ground. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The EUT was set 3 meters away from the interference-receiving antenna (Below 1GHz) & (Above 1GHz), which was mounted on the top of a variable-height antenna tower.
- e. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- f. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- g. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- h. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

**Note:**


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz & 360kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth = 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth =  $1/T$  for Average (Duty cycle  $< 98\%$ ) detection at frequency above 1 GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is = 10Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.

**3.1.4 Deviation from Test Standard**


No deviation.

### 3.1.5 Test Setup


#### Radiated emission below 30MHz:

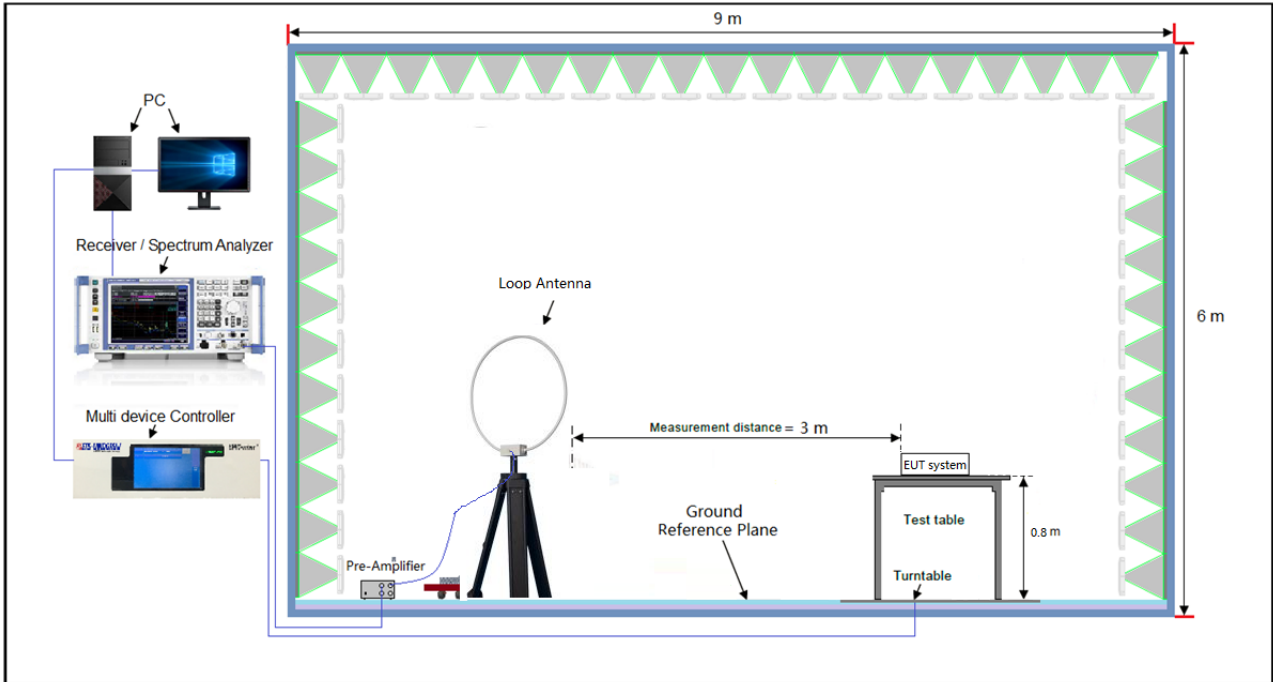

#### Frequency Range below 1GHz:

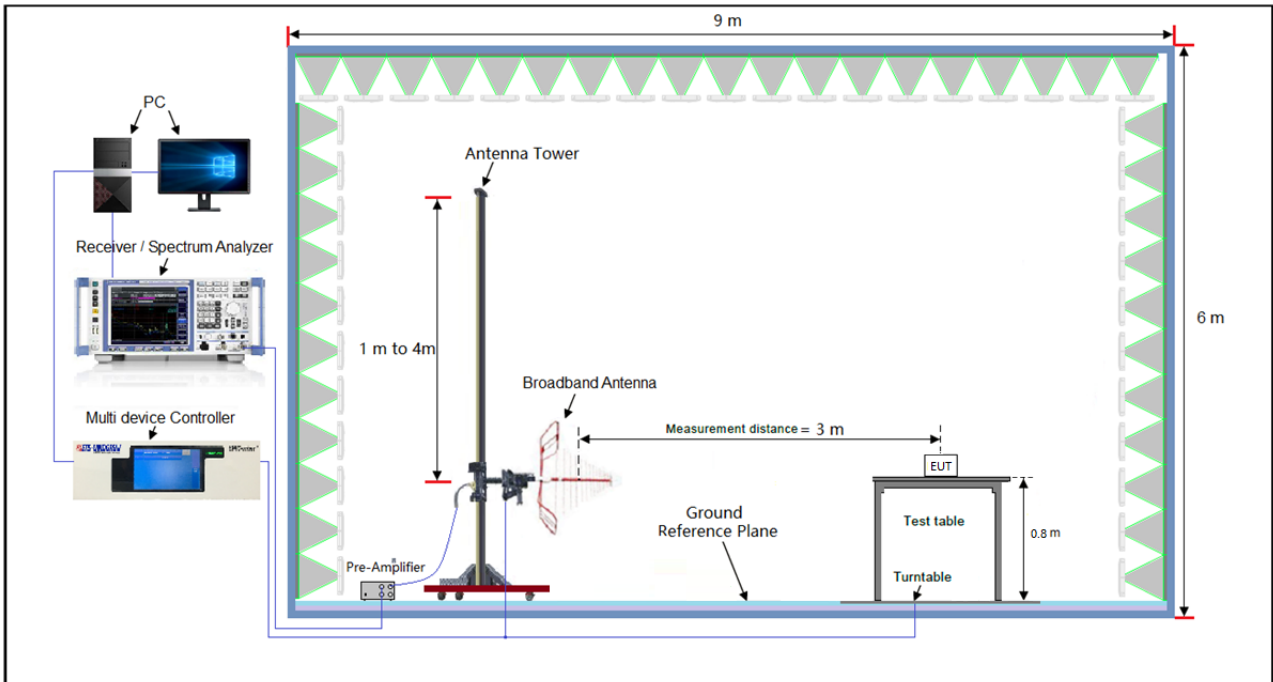

### Frequency Range above 1GHz:

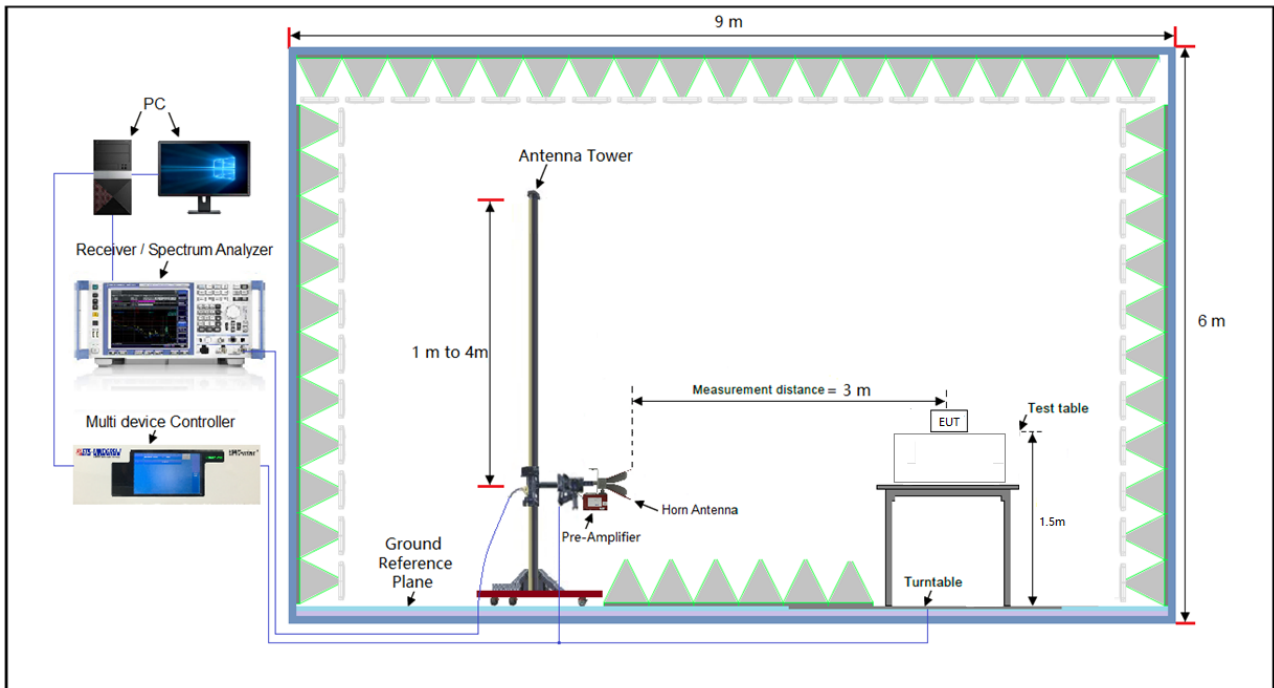

For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 3.1.6 EUT Operating Conditions

- Placed the EUT on the testing table.
- Set the EUT under transmission condition continuously at specific channel frequency.



### 3.1.7 Test Results


#### 9kHz ~ 30MHz Data:

The amplitude of spurious emissions attenuated more than 20dB below the permissible value is not required to be report.

#### 30MHz ~ 1GHz Worst-Case Data:

#### ATS2835P:

Test Channel	Channel 0	Frequency Range	30MHz ~ 1GHz
Detector Function	Peak (PK) Quasi-peak (QP)	Tested By	Hua

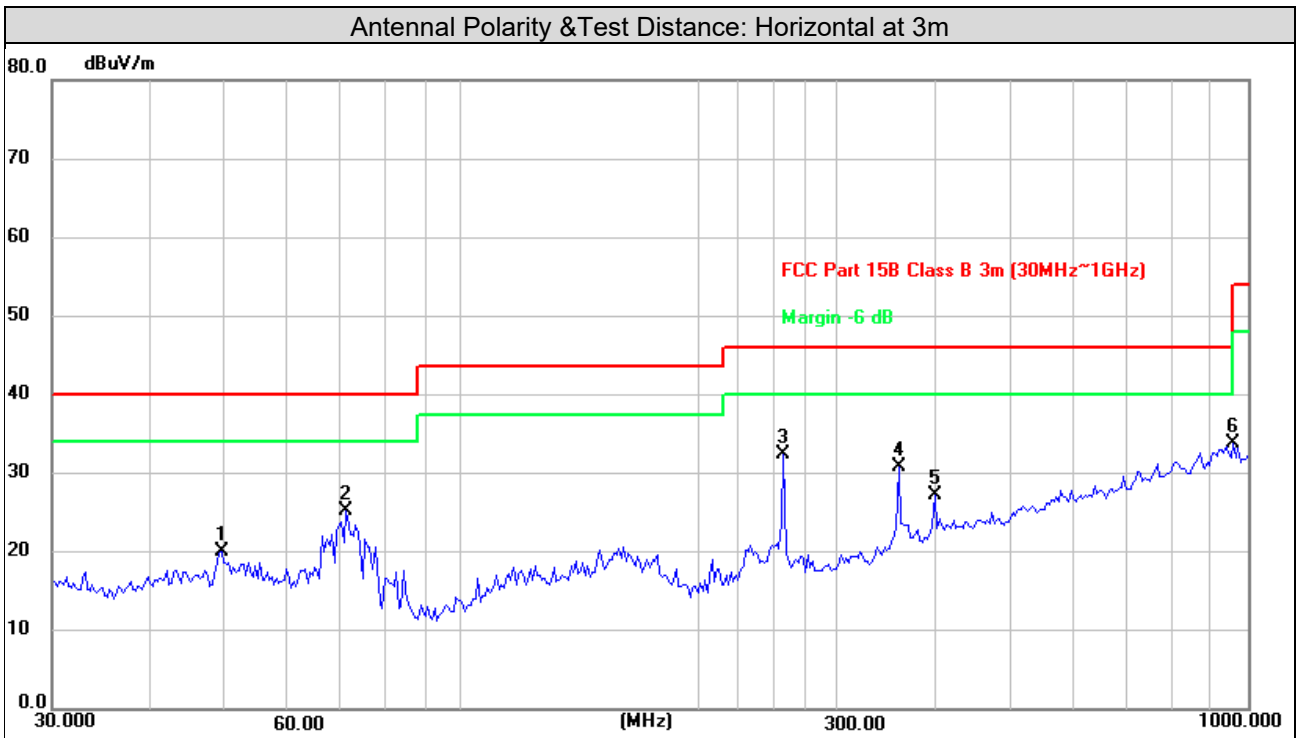


No.	Frequency (MHz)	Reading (dBUV)	Factor (dB)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1	49.3594	34.98	-14.97	20.01	40.00	-19.99	peak	148	123
2	71.0803	42.11	-16.80	25.31	40.00	-14.69	peak	381	59
3	256.5211	47.61	-15.28	32.33	46.00	-13.67	peak	168	193
4	359.1860	42.24	-11.33	30.91	46.00	-15.09	peak	133	161
5	399.0302	37.07	-9.81	27.26	46.00	-18.74	peak	249	25
6	958.7943	32.33	1.46	33.79	46.00	-12.21	peak	217	259

#### Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value

Test Channel	Channel 0	Frequency Range	30MHz ~ 1GHz
Detector Function	Peak (PK) Quasi-peak (QP)	Tested By	Hua

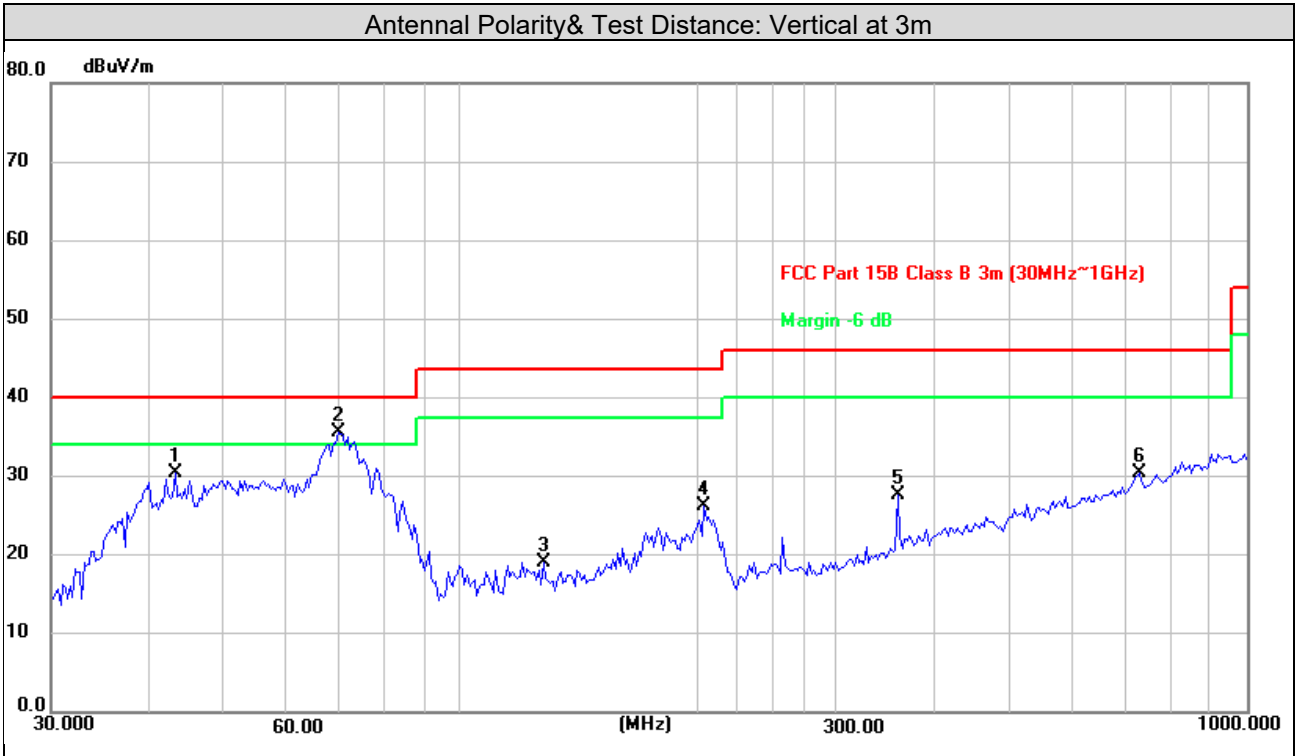

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1	43.2017	45.71	-15.26	30.45	40.00	-9.55	peak	162	360
2	69.6005	52.02	-16.44	35.58	40.00	-4.42	peak	339	332
3	127.2176	34.53	-15.39	19.14	43.50	-24.36	peak	257	213
4	203.5228	43.86	-17.54	26.32	43.50	-17.18	peak	164	360
5	359.1860	38.93	-11.33	27.60	46.00	-18.40	peak	271	234
6	729.3583	31.92	-1.44	30.48	46.00	-15.52	peak	351	360


Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value

**ATS2835P+JL7012C6:**

Test Channel	Channel 19	Frequency Range	30MHz ~ 1GHz
Detector Function	Peak (PK) Quasi-peak (QP)	Tested By	Hua

Antennal Polarity & Test Distance: Horizontal at 3m

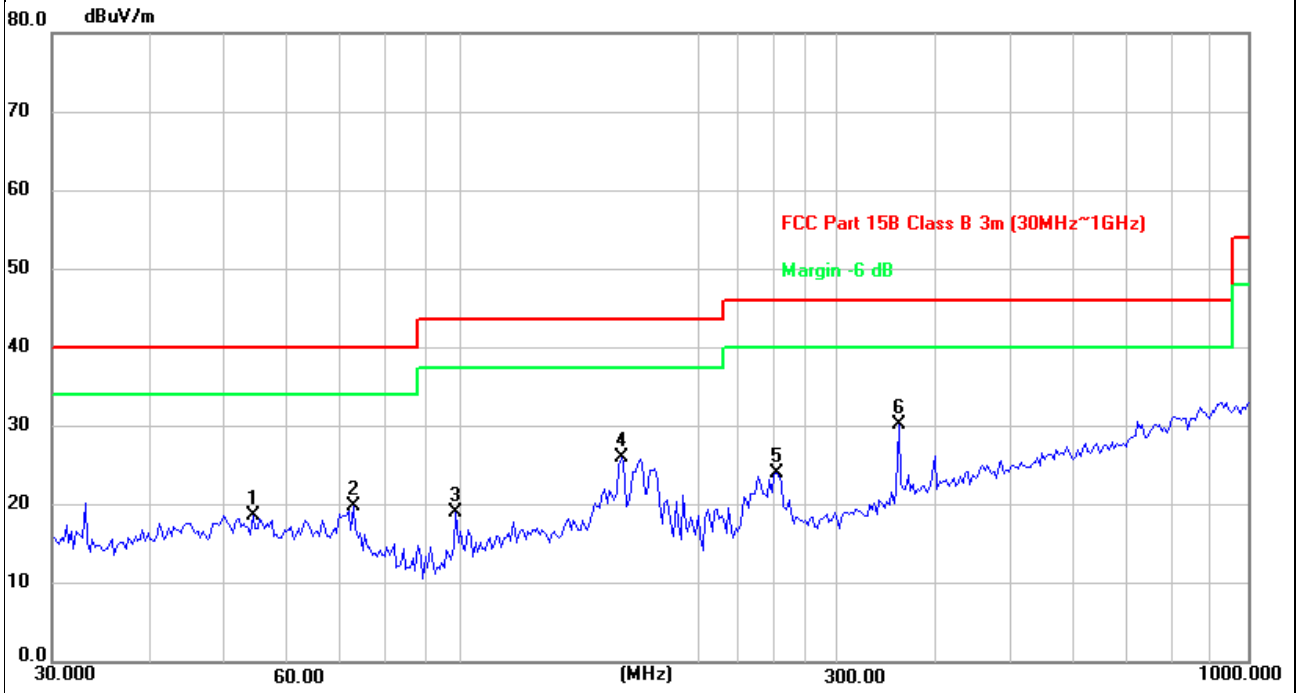


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1	54.0711	34.02	-15.27	18.75	40.00	-21.25	peak	108	285
2	72.5916	37.14	-17.22	19.92	40.00	-20.08	peak	341	131
3	98.1419	38.18	-19.14	19.04	43.50	-24.46	peak	224	154
4	159.2251	39.18	-13.13	26.05	43.50	-17.45	peak	346	227
5	251.1804	39.60	-15.61	23.99	46.00	-22.01	peak	325	286
6	359.1860	41.48	-11.33	30.15	46.00	-15.85	peak	361	20

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value

Test Channel	Channel 19	Frequency Range	30MHz ~ 1GHz
Detector Function	Peak (PK) Quasi-peak (QP)	Tested By	Hua

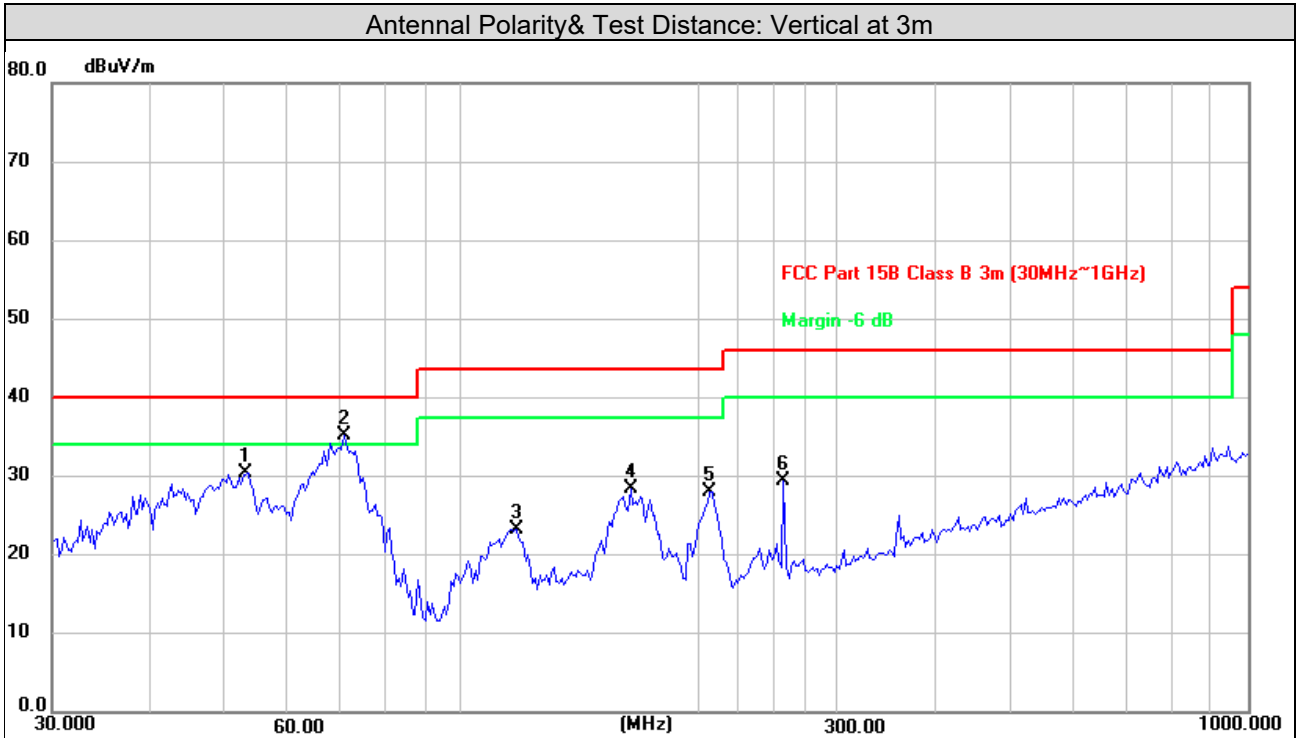

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1	53.3179	45.66	-15.20	30.46	40.00	-9.54	peak	381	63
2	70.5836	51.88	-16.67	35.21	40.00	-4.79	peak	221	345
3	116.9495	39.05	-15.73	23.32	43.50	-20.18	peak	175	224
4	163.7550	41.98	-13.54	28.44	43.50	-15.06	peak	139	83
5	206.3976	45.37	-17.42	27.95	43.50	-15.55	peak	290	162
6	256.5211	44.78	-15.28	29.50	46.00	-16.50	peak	134	72

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value


**Above 1GHz Data:**

**BLE-1Mbps**

**ATS2835P:**

Test channel	Channel 0	Frequency Range	1GHz ~ 25GHz
Detector Function	Peak (PK) Average (AVG)	Tested By	Hua

Antennal Polarity& Test distance: Horizontal at 3 M

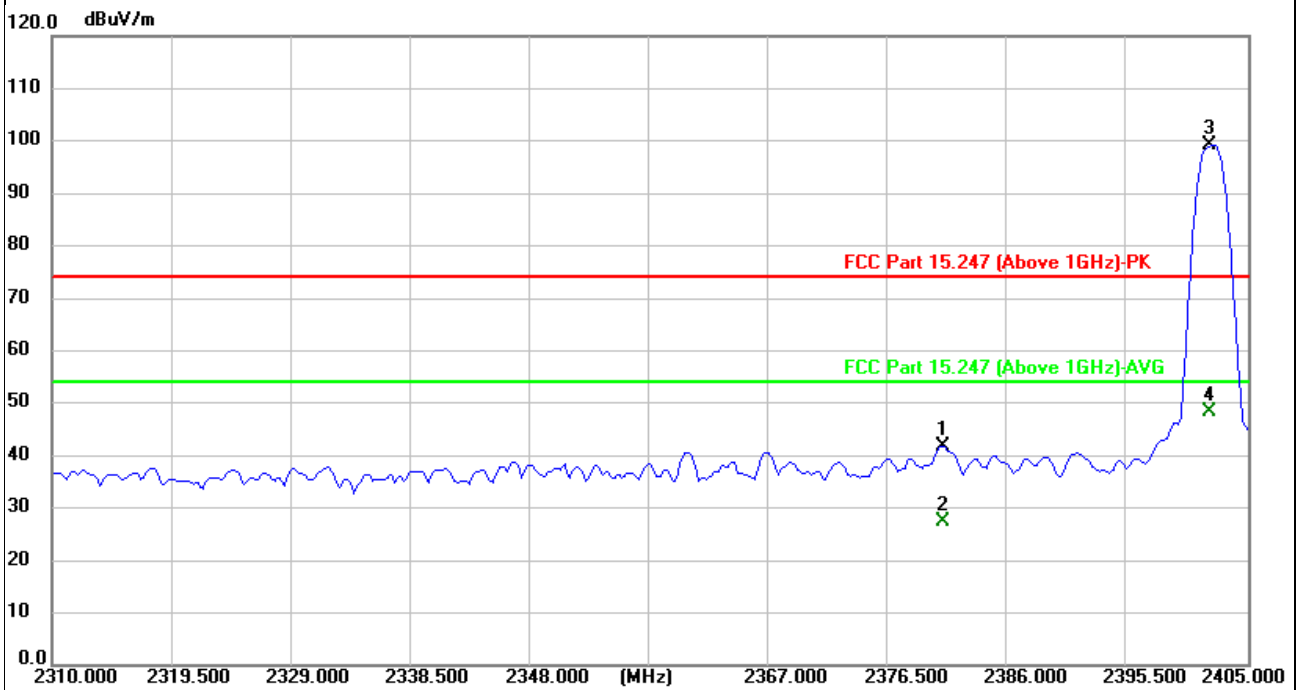


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1	2380.822	42.16	-0.43	41.73	74.00	-32.27	peak	100	331
2	2380.822	27.91	-0.43	27.48	54.00	-26.52	AVG	100	331
3 #	2402.144	99.56	-0.39	99.17			peak	100	331
4 #	2402.144	48.80	-0.39	48.41			AVG	100	331
5	4804.000	39.96	5.30	45.26	74.00	-28.74	peak	192	22
6	4804.000	29.62	5.30	34.92	54.00	-19.08	AVG	192	22
7	7206.000	43.33	12.40	55.73	74.00	-18.27	peak	241	114
8	7206.000	33.87	12.40	46.27	54.00	-7.73	AVG	241	114

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value
3. #2402MHz: Fundamental frequency.

Test channel	Channel 0	Frequency Range	1GHz ~ 25GHz
Detector Function	Peak (PK) Average (AVG)	Tested By	Hua

Antennal Polarity& Test Distance: Vertical at 3m

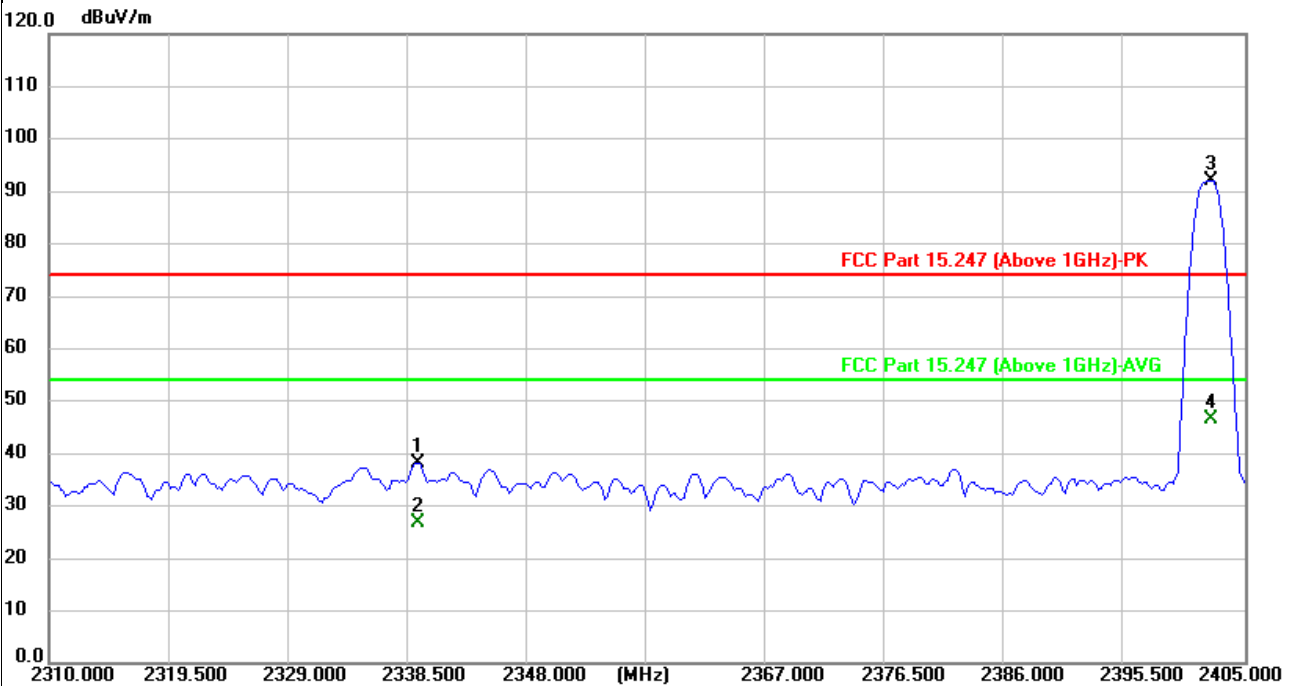

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1	2339.319	38.70	-0.53	38.17	74.00	-35.83	peak	383	81
2	2339.319	27.36	-0.53	26.83	54.00	-27.17	AVG	383	81
3 #	2402.335	92.55	-0.39	92.16			peak	383	81
4 #	2402.335	46.93	-0.39	46.54			AVG	383	81
5	4804.000	40.92	5.30	46.22	74.00	-27.78	peak	252	32
6	4804.000	29.78	5.30	35.08	54.00	-18.92	AVG	252	32
7	7206.000	43.21	12.40	55.61	74.00	-18.39	peak	332	11
8	7206.000	32.39	12.40	44.79	54.00	-9.21	AVG	332	11

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value
3. #2402MHz: Fundamental frequency.

Test channel	Channel 19	Frequency Range	1GHz ~ 25GHz
Detector Function	Peak (PK) Average (AVG)	Tested By	Hua

Antennal Polarity& Test Distance: Horizontal at 3m									
No.	Frequency (MHz)	Reading (dBUV)	Correct Factor (dB)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1#	2440.000	101.75	-0.31	101.44			peak	187	1
2#	2440.000	50.77	-0.31	50.46			AVG	187	1
3	4880.000	41.97	6.25	48.22	74.00	-25.78	peak	281	158
4	4880.000	29.72	6.25	35.97	54.00	-18.03	AVG	281	158
5	7320.000	40.59	12.65	53.24	74.00	-20.76	peak	105	41
6	7320.000	34.19	12.65	46.84	54.00	-7.16	AVG	105	41


Antennal Polarity& Test Distance: Vertical at 3 M									
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1#	2440.000	96.38	-0.31	96.07			peak	101	259
2#	2440.000	48.87	-0.31	48.56			AVG	101	259
3	4880.000	41.29	6.25	47.54	74.00	-26.46	peak	292	72
4	4880.000	30.02	6.25	36.27	54.00	-17.73	AVG	292	72
5	7320.000	43.69	12.65	56.34	74.00	-17.66	peak	374	317
6	7320.000	33.42	12.65	46.07	54.00	-7.93	AVG	374	317

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value
3. #2440MHz: Fundamental frequency.

Test channel	Channel 39	Frequency Range	1GHz ~ 25GHz
Detector Function	Peak (PK) Average (AVG)	Tested By	Hua

Antenna Polarity& Test Distance: Horizontal at 3 M

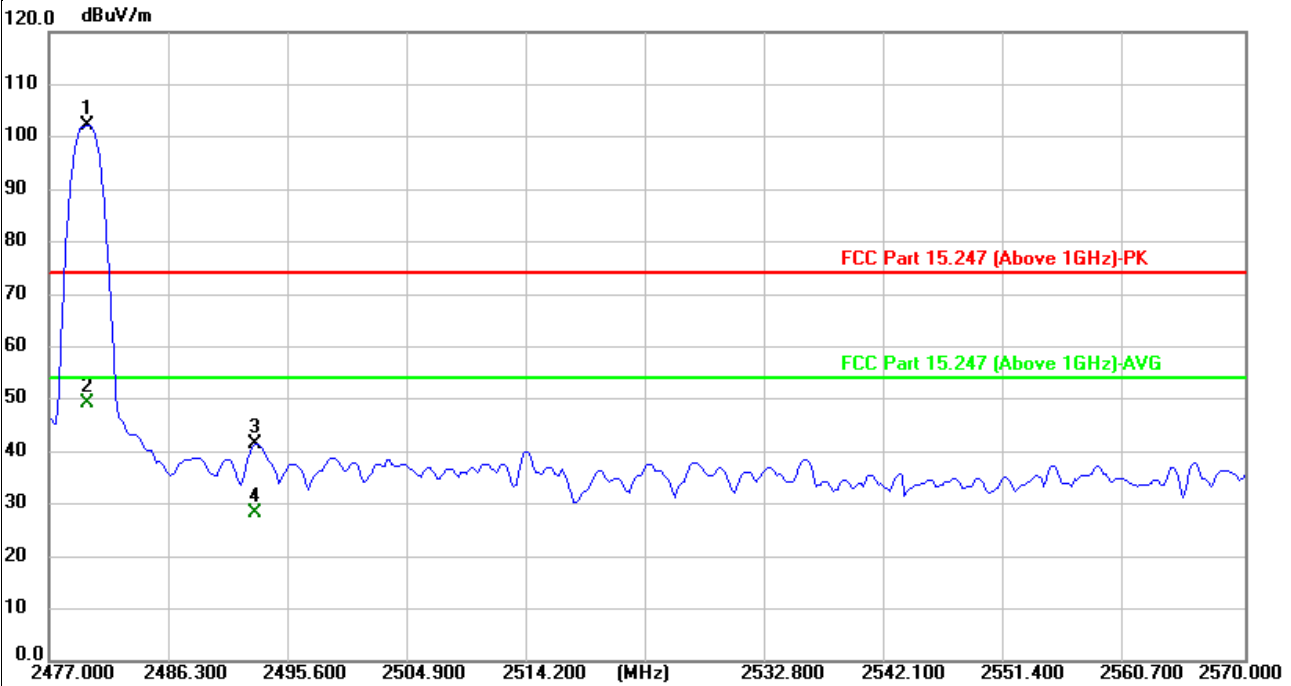


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1#	2480.168	102.30	-0.21	102.09			peak	167	0
2#	2480.168	49.39	-0.21	49.18			AVG	167	0
3	2493.214	41.65	-0.18	41.47	74.00	-32.53	peak	167	0
4	2493.214	28.47	-0.18	28.29	54.00	-25.71	AVG	167	0
5	4960.000	39.13	6.16	45.29	74.00	-28.71	peak	103	89
6	4960.000	28.60	6.16	34.76	54.00	-19.24	AVG	103	89
7	7440.000	43.03	12.91	55.94	74.00	-18.06	peak	208	41
8	7440.000	33.35	12.91	46.26	54.00	-7.74	AVG	208	41

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value
3. #2480MHz: Fundamental frequency.



Test channel	Channel 39	Frequency Range	1GHz ~ 25GHz
Detector Function	Peak (PK) Average (AVG)	Tested By	Hua

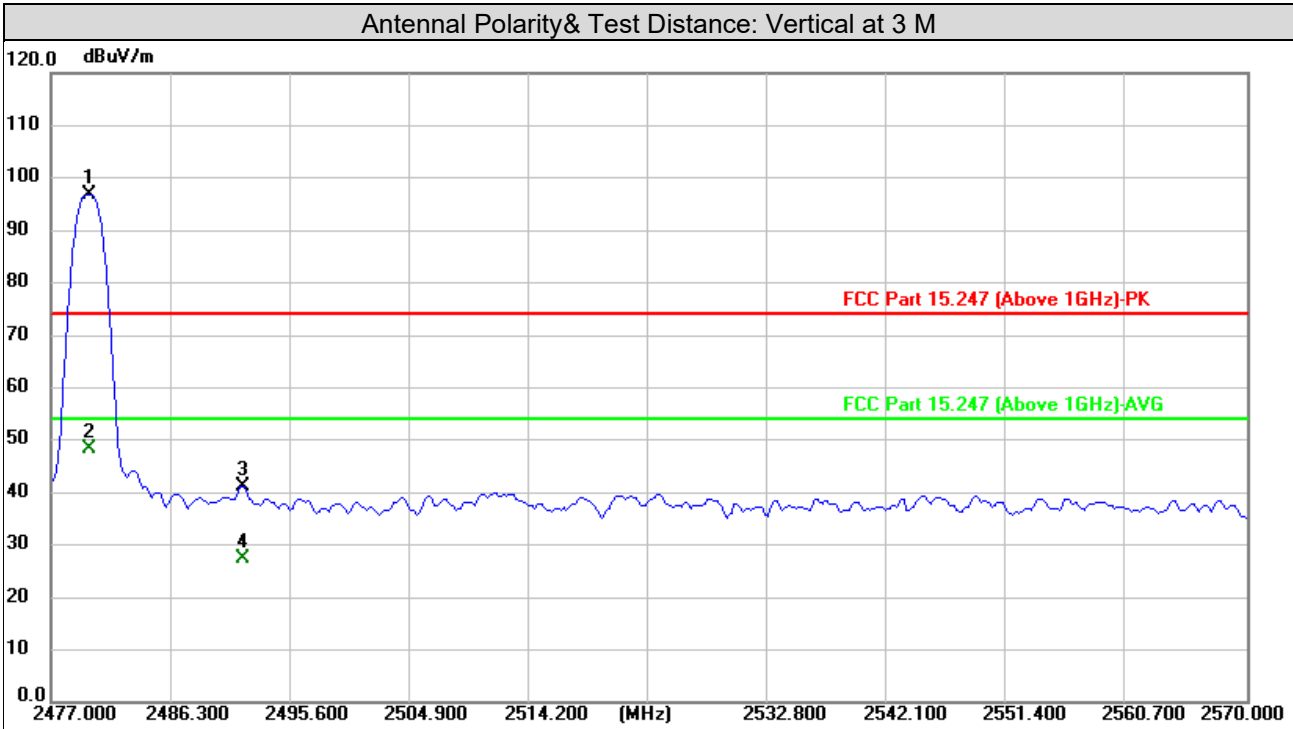


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1#	2479.982	96.98	-0.21	96.77			peak	100	283
2#	2479.982	48.59	-0.21	48.38			AVG	100	283
3	2491.910	41.47	-0.18	41.29	74.00	-32.71	peak	100	283
4	2491.910	27.64	-0.18	27.46	54.00	-26.54	AVG	100	283
5	4960.000	39.13	6.16	45.29	74.00	-28.71	peak	114	164
6	4960.000	28.50	6.16	34.66	54.00	-19.34	AVG	114	164
7	7440.000	41.93	12.91	54.84	74.00	-19.16	peak	246	251
8	7440.000	32.70	12.91	45.61	54.00	-8.39	AVG	246	251

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value
3. #2480MHz: Fundamental frequency.

**Above 1GHz Data:**  
**BLE-2Mbps**

Test channel	Channel 0	Frequency Range	1GHz ~ 25GHz
Detector Function	Peak (PK) Average (AVG)	Tested By	Hua

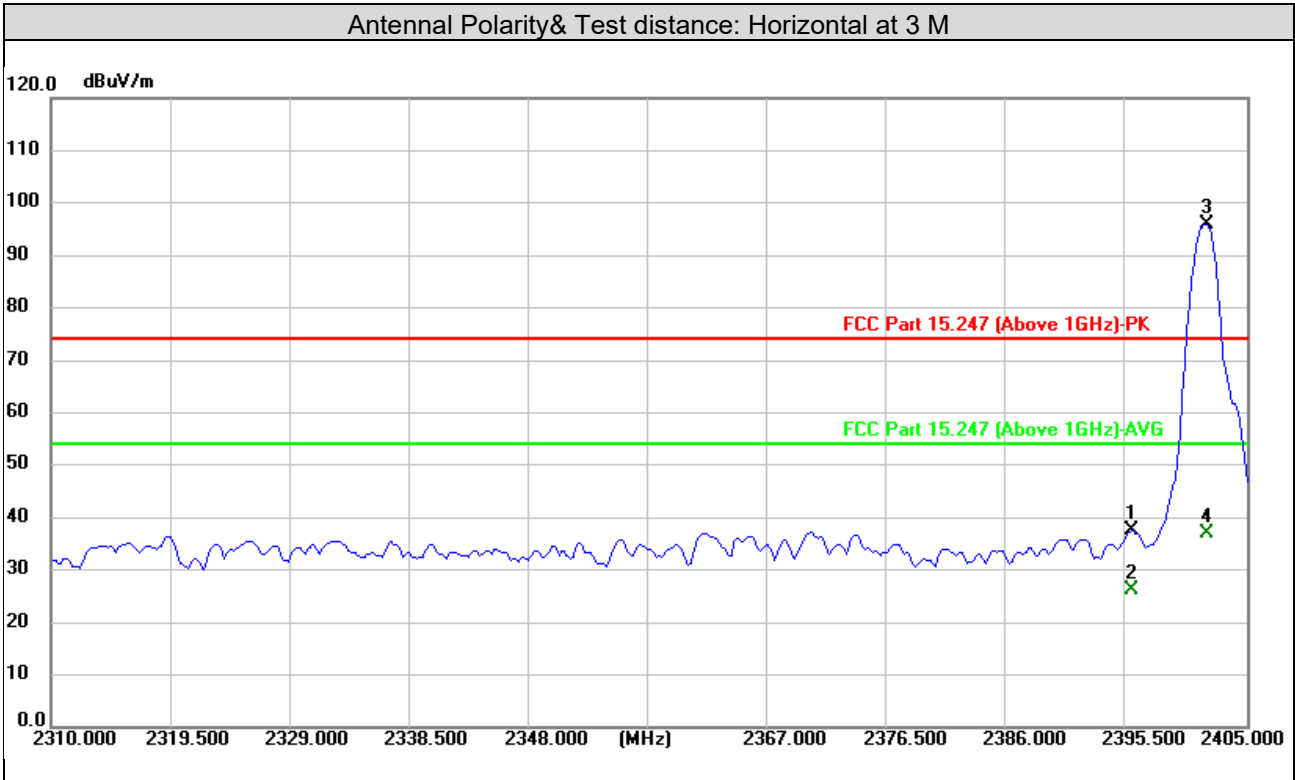


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1	2395.862	37.84	-0.40	37.44	74.00	-36.56	peak	129	332
2	2395.862	26.55	-0.40	26.15	54.00	-27.85	AVG	129	332
3 #	2401.764	96.42	-0.39	96.03			peak	129	332
4 #	2401.764	37.45	-0.39	37.06			AVG	129	332
5	4804.000	41.09	5.30	46.39	74.00	-27.61	peak	125	34
6	4804.000	29.37	5.30	34.67	54.00	-19.33	AVG	125	34
7	7206.000	41.79	12.40	54.19	74.00	-19.81	peak	153	184
8	7206.000	33.37	12.40	45.77	54.00	-8.23	AVG	153	184

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value
3. #2402MHz: Fundamental frequency.

Test channel	Channel 0	Frequency Range	1GHz ~ 25GHz
Detector Function	Peak (PK) Average (AVG)	Tested By	Hua

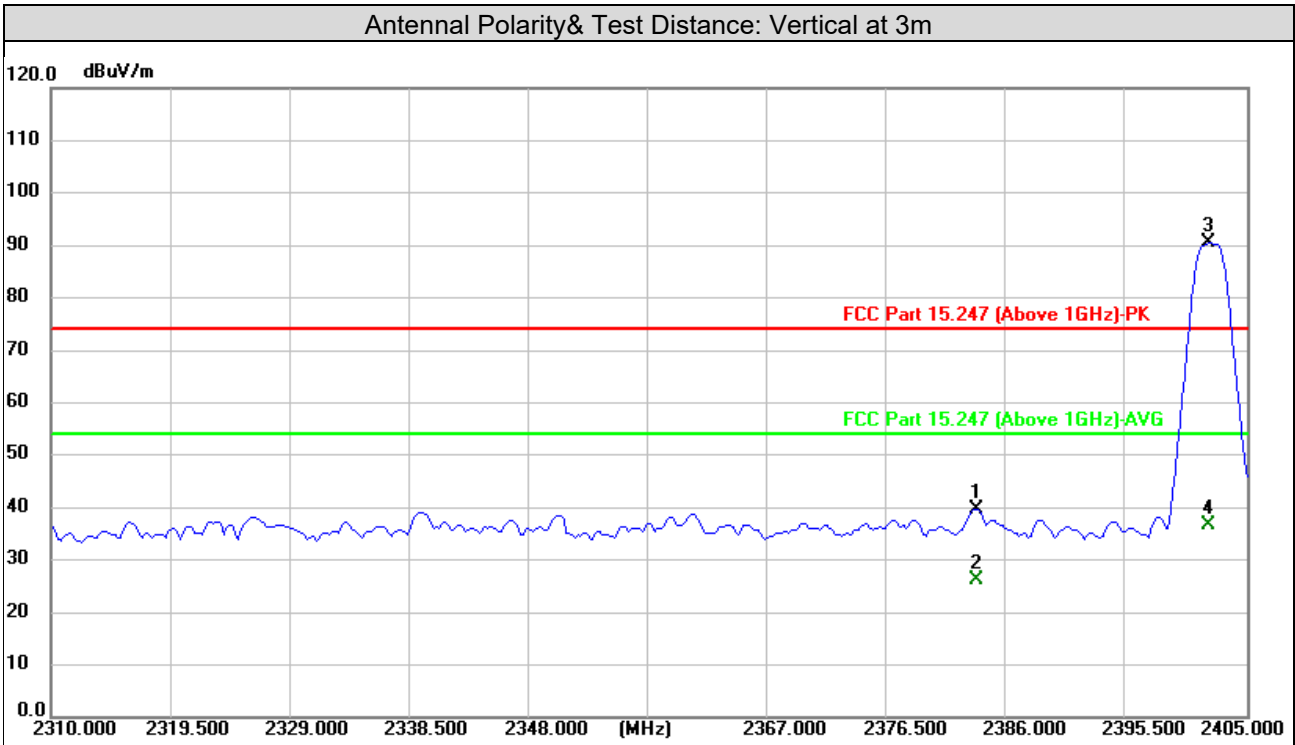

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1	2383.487	40.15	-0.43	39.72	74.00	-34.28	peak	116	81
2	2383.487	26.63	-0.43	26.20	54.00	-27.80	AVG	116	81
3 #	2402.144	90.92	-0.39	90.53			peak	116	81
4 #	2402.144	37.05	-0.39	36.66			AVG	116	81
5	4804.000	40.37	5.30	45.67	74.00	-28.33	peak	230	300
6	4804.000	28.80	5.30	34.10	54.00	-19.90	AVG	230	300
7	7206.000	41.88	12.40	54.28	74.00	-19.72	peak	308	353
8	7206.000	32.46	12.40	44.86	54.00	-9.14	AVG	308	353

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value
3. #2402MHz: Fundamental frequency.

Test channel	Channel 19	Frequency Range	1GHz ~ 25GHz
Detector Function	Peak (PK) Average (AVG)	Tested By	Hua

Antennal Polarity& Test Distance: Horizontal at 3m									
No.	Frequency (MHz)	Reading (dBUV)	Correct Factor (dB)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1#	2440.000	100.97	-0.31	100.66			peak	100	355
2#	2440.000	38.61	-0.31	38.30			AVG	100	355
3	4880.000	42.08	6.25	48.33	74.00	-25.67	peak	290	59
4	4880.000	29.02	6.25	35.27	54.00	-18.73	AVG	290	59
5	7320.000	41.99	12.65	54.64	74.00	-19.36	peak	255	156
6	7320.000	31.63	12.65	44.28	54.00	-9.72	AVG	255	156


Antennal Polarity& Test Distance: Vertical at 3 M									
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1#	2440.000	92.09	-0.31	91.78			peak	101	80
2#	2440.000	37.09	-0.31	36.78			AVG	101	80
3	4880.000	41.63	6.25	47.88	74.00	-26.12	peak	302	104
4	4880.000	31.73	6.25	37.98	54.00	-16.02	AVG	302	104
5	7320.000	42.96	12.65	55.61	74.00	-18.39	peak	116	309
6	7320.000	31.38	12.65	44.03	54.00	-9.97	AVG	116	309

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value
3. #2440MHz: Fundamental frequency.

Test channel	Channel 39	Frequency Range	1GHz ~ 25GHz
Detector Function	Peak (PK) Average (AVG)	Tested By	Hua

**Antenna Polarity& Test Distance: Horizontal at 3 M**

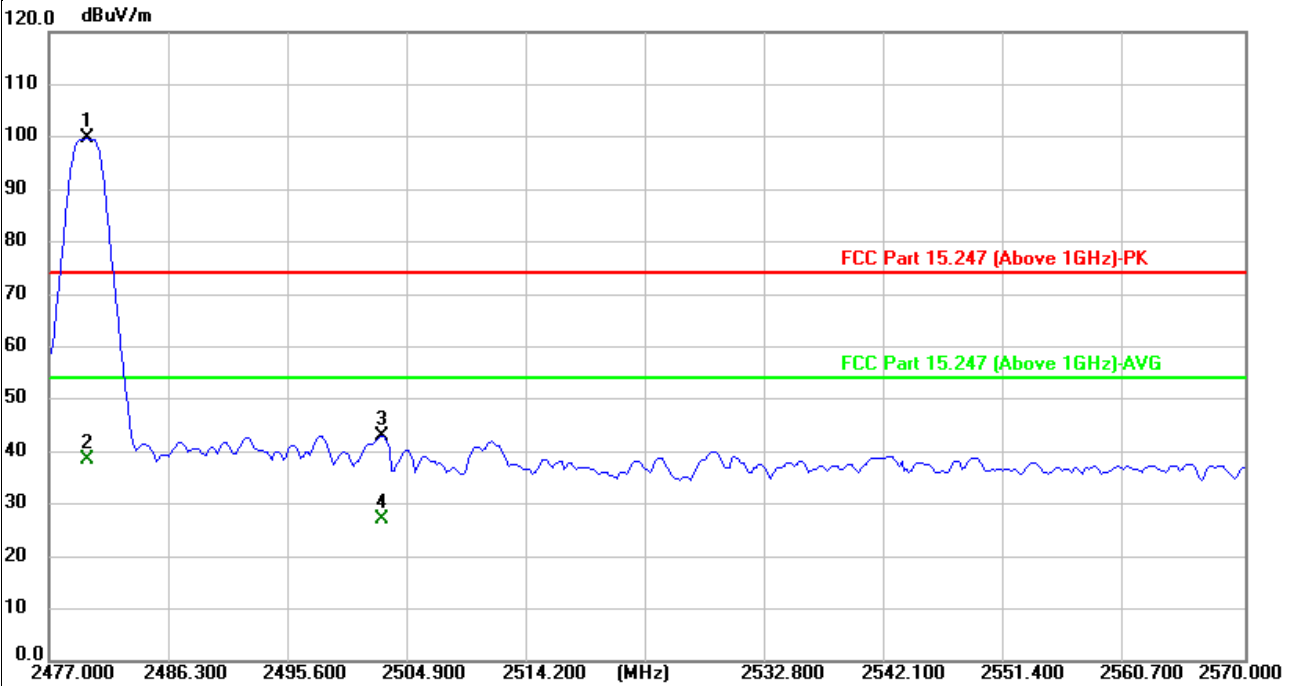


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1#	2479.982	99.91	-0.21	99.70			peak	269	4
2#	2479.982	38.55	-0.21	38.34			AVG	269	4
3	2502.906	43.14	-0.17	42.97	74.00	-31.03	peak	269	4
4	2502.906	27.21	-0.17	27.04	54.00	-26.96	AVG	269	4
5	4960.000	40.13	6.16	46.29	74.00	-27.71	peak	147	198
6	4960.000	29.51	6.16	35.67	54.00	-18.33	AVG	147	198
7	7440.000	41.25	12.91	54.16	74.00	-19.84	peak	332	85
8	7440.000	31.81	12.91	44.72	54.00	-9.28	AVG	332	85

**Remarks:**

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value
3. #2480MHz: Fundamental frequency.

Test channel	Channel 39	Frequency Range	1GHz ~ 25GHz
Detector Function	Peak (PK) Average (AVG)	Tested By	Hua

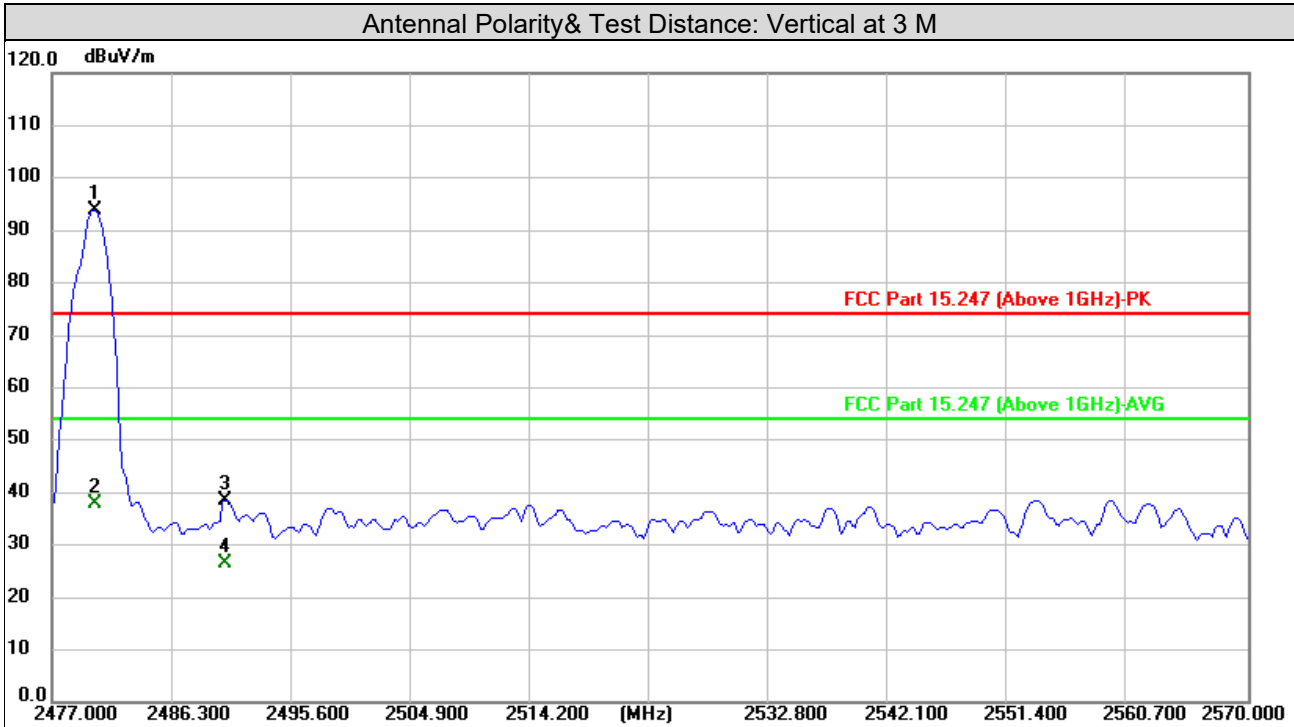

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1#	2480.355	94.00	-0.21	93.79			peak	106	283
2#	2480.355	37.92	-0.21	37.71			AVG	106	283
3	2490.419	38.74	-0.19	38.55	74.00	-35.45	peak	106	283
4	2490.419	26.60	-0.19	26.41	54.00	-27.59	AVG	106	283
5	4960.000	40.56	6.16	46.72	74.00	-27.28	peak	101	158
6	4960.000	29.00	6.16	35.16	54.00	-18.84	AVG	101	158
7	7440.000	43.03	12.91	55.94	74.00	-18.06	peak	348	239
8	7440.000	31.40	12.91	44.31	54.00	-9.69	AVG	348	239

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value
3. #2480MHz: Fundamental frequency.

**ATS2835P+JL7012C6:**

Test channel	Channel 19	Frequency Range	1GHz ~ 25GHz
Detector Function	Peak (PK) Average (AVG)	Tested By	Hua

Antennal Polarity& Test Distance: Horizontal at 3m									
No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1#	2440.000	101.97	-0.31	101.66			peak	337	205
2#	2440.000	98.73	-0.31	98.42			peak	104	199
3#	2440.000	40.59	-0.31	40.28			AVG	104	199
4#	2440.000	50.73	-0.31	50.42			AVG	337	205
5	4880.000	40.04	6.25	46.29	74.00	-27.71	peak	364	209
6	4880.000	41.37	6.25	47.62	74.00	-26.38	peak	105	261
7	4880.000	29.69	6.25	35.94	54.00	-18.06	AVG	364	209
8	4880.000	30.04	6.25	36.29	54.00	-17.71	AVG	105	261
9	7320.000	42.96	12.65	55.61	74.00	-18.39	peak	282	294
10	7320.000	42.00	12.65	54.65	74.00	-19.35	peak	183	158
11	7320.000	33.87	12.65	46.52	54.00	-7.48	AVG	183	158
12	7320.000	34.20	12.65	46.85	54.00	-7.15	AVG	282	294

Antennal Polarity& Test Distance: Vertical at 3 M									
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1#	2440.000	96.57	-0.31	96.26			peak	389	16
2#	2440.000	97.99	-0.31	97.68			peak	300	292
3#	2440.000	41.36	-0.31	41.05			AVG	300	292
4#	2440.000	48.48	-0.31	48.17			AVG	389	16
5	4880.000	41.04	6.25	47.29	74.00	-26.71	peak	244	109
6	4880.000	41.36	6.25	47.61	74.00	-26.39	peak	190	63
7	4880.000	29.62	6.25	35.87	54.00	-18.13	AVG	190	63
8	4880.000	30.34	6.25	36.59	54.00	-17.41	AVG	244	109
9	7320.000	42.81	12.65	55.46	74.00	-18.54	peak	357	250
10	7320.000	44.39	12.65	57.04	74.00	-16.96	peak	378	131
11	7320.000	30.57	12.65	43.22	54.00	-10.78	AVG	357	250
12	7320.000	33.74	12.65	46.39	54.00	-7.61	AVG	378	131

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value
3. #2480MHz&#2441MHz: Fundamental frequency.
4. This data is tested under ATS2835P and JL7012C6 emission state.

**3.2 Conducted Emission Measurement**

## 3.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

- Note: 1. The lower limit shall apply at the transition frequencies.  
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

## 3.2.2 Test Instruments

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR 7	101962	2024-12-17
Artificial Mains Network	Rohde&Schwarz	ENV216	3560.6550.15	2024-12-17
Test software	FARAD	EZ_EMV V1.1.4.2	N/A	N/A
Broadcast test system	R&S	SFU	100410	2024-08-06

- Note: 1. The calibration interval of the above test instruments is 12 months.  
2. The test was performed in Shielded Room.




### 3.2.3 Test Procedures

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit – 20dB)was not recorded.

**Note:** All modes of operation were investigated and the worst-case emissions are reported.

### 3.2.4 Test Setup

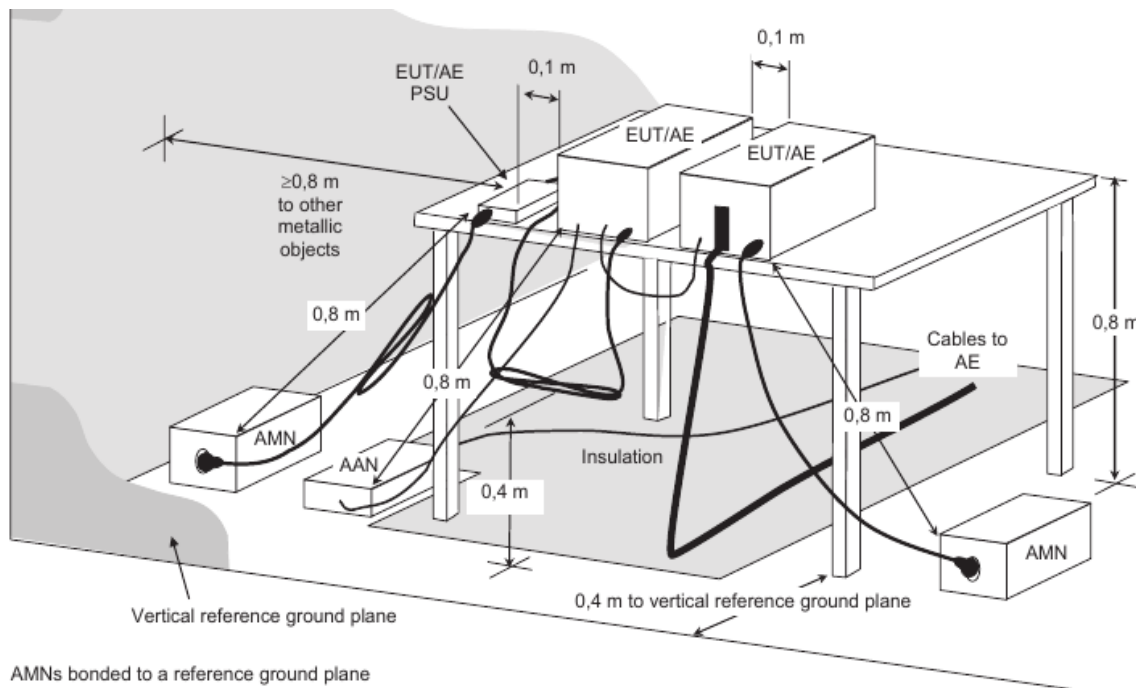

For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 3.2.5 EUT Operating Condition


Set the EUT under transmission condition continuously at specific channel frequency.

### 3.2.6 Deviation from Test Standard

No deviation.

### 3.2.7 Test Results

Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution andwidth	Quasi-Peak (QP) / Average (AV), 9kHz
-----------------	----------------	---	--------------------------------------

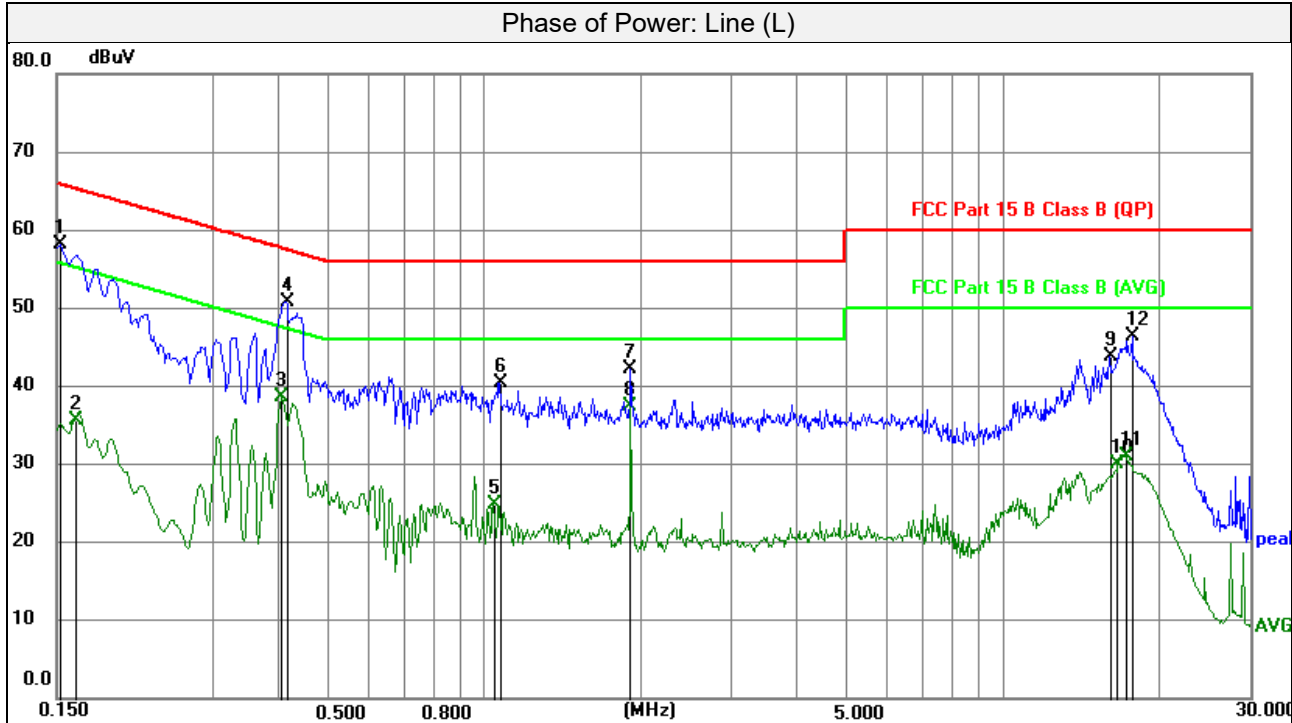


No.	Frequency (MHz)	Reading (dBuV)	Correction Factor (dB)	Emission Level (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1522	47.88	10.18	58.06	65.88	-7.82	peak
2	0.1624	25.53	10.17	35.70	55.34	-19.64	AVG
3	0.4087	28.42	10.11	38.53	47.67	-9.14	AVG
4	0.4155	40.67	10.11	50.78	57.54	-6.76	peak
5	1.0432	14.89	10.04	24.93	46.00	-21.07	AVG
6	1.0725	30.44	10.04	40.48	56.00	-15.52	peak
7	1.9230	32.07	10.09	42.16	56.00	-13.84	peak
8	1.9230	27.30	10.09	37.39	46.00	-8.61	AVG
9	16.1003	33.43	10.29	43.72	60.00	-16.28	peak
10	16.7055	19.77	10.31	30.08	50.00	-19.92	AVG
11	17.3445	20.64	10.33	30.97	50.00	-19.03	AVG
12	17.7675	36.06	10.35	46.41	60.00	-13.59	peak

#### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution andwidth	Quasi-Peak (QP) / Average (AV), 9kHz
-----------------	----------------	---	--------------------------------------

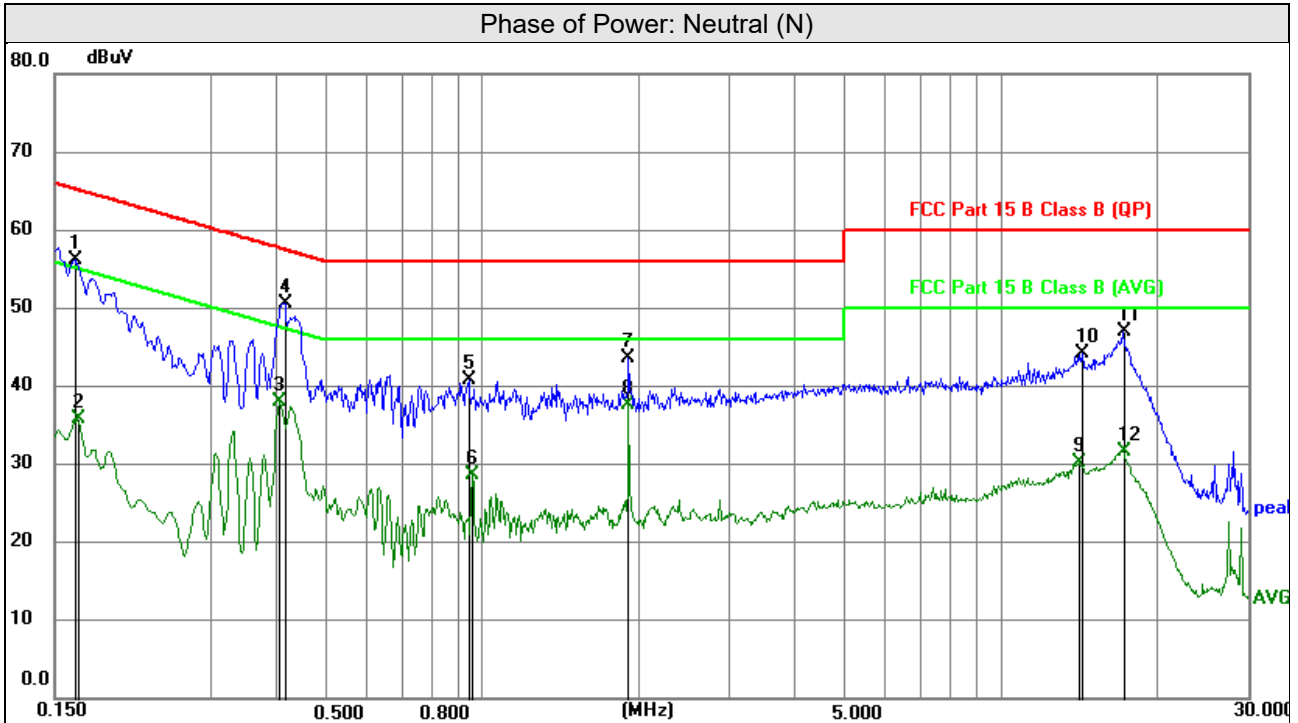

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Emission Level (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1635	46.01	10.17	56.18	65.28	-9.10	peak
2	0.1658	25.61	10.17	35.78	55.17	-19.39	AVG
3	0.4087	27.83	10.09	37.92	47.67	-9.75	AVG
4	0.4177	40.55	10.09	50.64	57.49	-6.85	peak
5	0.9442	30.70	10.06	40.76	56.00	-15.24	peak
6	0.9622	18.62	10.05	28.67	46.00	-17.33	AVG
7	1.9230	33.53	10.10	43.63	56.00	-12.37	peak
8	1.9230	27.50	10.10	37.60	46.00	-8.40	AVG
9	14.2103	19.92	10.25	30.17	50.00	-19.83	AVG
10	14.3700	33.91	10.26	44.17	60.00	-15.83	peak
11	17.2185	36.64	10.34	46.98	60.00	-13.02	peak
12	17.2185	21.36	10.34	31.70	50.00	-18.30	AVG

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.


### 3.3 6dB Bandwidth Measurement

#### 3.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

#### 3.3.2 Test Setup

Subclause 11.8 of ANSI C63.10 is applicable.

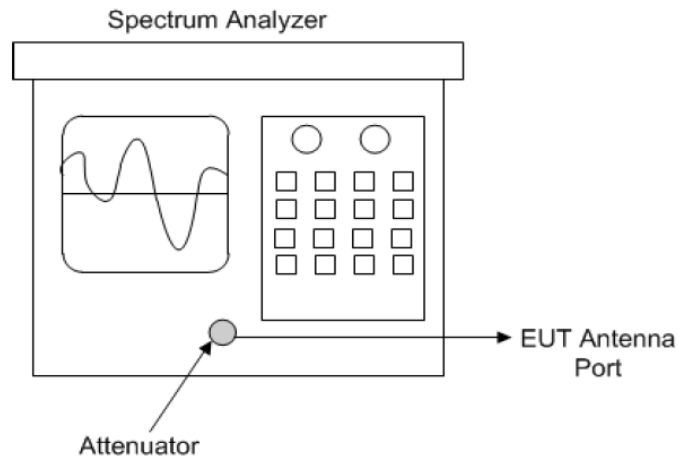

Spectrum analyzer test configuration

#### 3.3.3 Test Instruments

Refer to section 5 to get information of above instrument.

### 3.3.4 Test Procedure

#### Option 1:

- a. Set resolution bandwidth (RBW) = 30kHz
- b. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW
- c. Detector = Peak.
- d. Trace mode = max hold.
- e. Sweep = auto couple.
- f. Allow the trace to stabilize.
- g. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

#### Option 2:

The automatic bandwidth measurement capability of an instrument may be employed using the dB bandwidth mode with  $X$  set to 6 dB. if the functionality described in 11.8.1 (i.e. RBW= 100 kHz. VBW  $\geq 3 \times$  RBW. and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability. care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be  $\geq 6$  dB.

### 3.3.5 Deviation from Test Standard

No deviation.

### 3.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

## 3.3.7 Test Result

BLE-1Mbps			
Operation Channel	Frequency	Occupied Bandwidth (MHz)	
		Result	Limit
0	2402MHz	0.660	>0.5
19	2440MHz	0.688	>0.5
39	2480MHz	0.684	>0.5

BLE-2Mbps			
Operation Channel	Frequency	Occupied Bandwidth (MHz)	
		Result	Limit
0	2402MHz	0.972	>0.5
19	2440MHz	0.956	>0.5
39	2480MHz	0.976	>0.5




Lab: [Hwa-Hsing \(Dongguan\) Testing Co., Ltd.](#)  
 Address: [No.101, Building N1, Yuyuan 2 Road, Yuyuan Industrial Park, HuangJiang Town, Dongguan City, People's Republic of China](#)

Tel: [0769-83078199](tel:0769-83078199)  
 Web.: [www.hwa-hsing.com](http://www.hwa-hsing.com)  
 E-Mail: [customerservice.dg@hwa-hsing.com](mailto:customerservice.dg@hwa-hsing.com)

Release Ver. 1.5

### 3.4 Occupied Bandwidth Measurement

#### 3.4.1 Test Setup

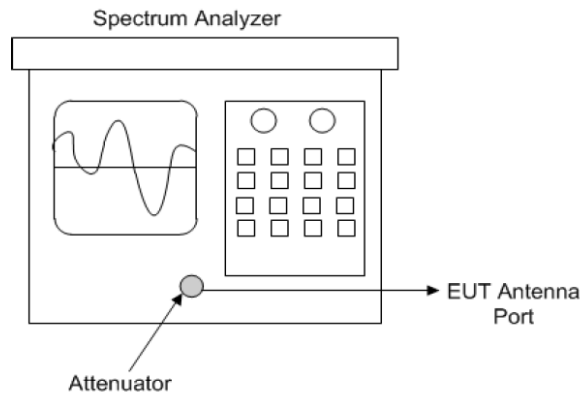

#### 3.4.2 Test Instruments

Refer to section 5 to get information of above instrument.

#### 3.4.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to peak. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 %of the total mean power of a given emission.

#### 3.4.4 Deviation from Test Standard

No deviation.

#### 3.4.5 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



## 3.4.6 Test Results

<b>BLE-1Mbps</b>			
Operation Channel	Frequency	Occupied Bandwidth (MHz)	
		Result	Limit
0	2402MHz	1.0267	2400~2483.5
19	2440MHz	1.0318	2400~2483.5
39	2480MHz	1.0362	2400~2483.5

<b>BLE-2Mbps</b>			
Operation Channel	Frequency	Occupied Bandwidth (MHz)	
		Result	Limit
0	2402MHz	1.9649	2400~2483.5
19	2440MHz	1.9793	2400~2483.5
39	2480MHz	1.9634	2400~2483.5



Lab: [Hwa-Hsing \(Dongguan\) Testing Co., Ltd.](#)  
 Address: [No.101, Building N1, Yuyuan 2 Road, Yuyuan Industrial Park, HuangJiang Town, Dongguan City, People's Republic of China](#)

Tel: [0769-83078199](tel:0769-83078199)  
 Web.: [www.hwa-hsing.com](http://www.hwa-hsing.com)  
 E-Mail: [customerservice.dg@hwa-hsing.com](mailto:customerservice.dg@hwa-hsing.com)

Release Ver. 1.5


### 3.5 Conducted Output Power Measurement

#### 3.5.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm).

#### 3.5.2 Test Setup

- Measurement using a spectrum analyzer (SA) Subclause 11.9.2.2 of ANSI C63.10 is applicable.

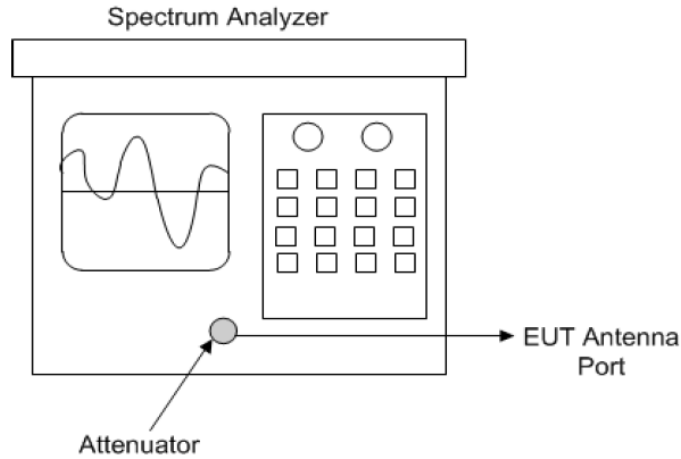

Spectrum analyzer output power test configuration

#### 3.5.3 Test Instruments

Refer to section 5 to get information of above instrument.

#### 3.5.4 Test Procedures

Measurement using a spectrum analyzer (SA), Selection of test method:

The proper test method is selected based on the following criteria:

- Method AVGSA-1 or method AVGSA-1A (alternative)** shall be applied if either of the following conditions can be satisfied:
  - 1) The EUT transmits continuously (or with a  $D > 98\%$ ).
  - 2) Sweep triggering can be implemented in such a way that the device transmits at the maximum power control level throughout the duration of each of the instrument sweeps to be averaged. This condition can generally be achieved by triggering the instrument's sweep if the duration of the sweep (with the instrument configured as in method AVGSA-1) is equal to or shorter than the duration  $T$  of each transmission from the EUT, and if those transmissions exhibit full power throughout their durations.
- Method AVGSA-2 or method AVGSA-2A (alternative)** shall be applied if the conditions of the preceding item a) cannot be achieved and the transmissions exhibit a constant duty cycle during the measurement duration. Duty cycle will be considered to be constant if variations are less than +2%.
- Method AVGSA-3 or method AVGSA-3A (alternative)** shall be applied if the conditions of the preceding item a) and item b) cannot be achieved.

Test Report No.: 24032702-RF-US-02

 Measurement using a spectrum analyzer (SA), Selection of test method: Maximum peak conducted output power

The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement:

- a) Set the RBW > DTS bandwidth.
- b) Set VBW > [3 x RBW]
- c) Set span > [3 x RBW]
- d) Sweep time = auto couple.
- e) Detector = peak
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

Test Report No.: 24032702-RF-US-02

 Maximum conducted (average) output power (Method AVGSA-2):

- a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b) Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c) SA Setting:
  - 1\* Set span to at least 1.5 times the OBW
  - 2\* Set sweep trigger to "free run."
  - 3\* Set RBW= 1% to 5% of the OBW. not to exceed 1MHz.
  - 4\* Set VBW  $\geq 3 \times$  RBW
  - 5\* Number of points in sweep  $\geq 2 \times$  span /RBW. (This gives bin-to-bin spacing  $\leq$  RBW / 2. so that narrowband signals are not lost between frequency bins).
  - 6\* Sweep time  $\leq$  (number of points in sweep) x T. where T is defined in 11.6. If this gives a sweep time less than the auto sweep time of the instrument. then method AVGSA-3 shall not be used (use AVGSA-3A). The purpose of this step is so that the averaging time in each bin is less than or equal to the minimum time of a transmission.
  - 7\* Detector =RMS (power averaging).
  - 8\* Trace mode =max hold.
  - 9\* Allow max hold to run for at least 60 s or longer as needed to allow the trace to stabilize.
  - 10\* Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function. then sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW
- d. Measure the captured power within the band and recording the plot.
- e. Repeat above procedures until all frequencies required were complete.

### 3.5.5 Deviation from Test Standard

No deviation.

### 3.5.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

3.5.7 Test Results


BLE-1Mbps						
Peak Power						
Channel	Freq.	RF Output Power		Limit (mW)		Verdict
No.	(MHz)	(dBm)	(mW)	Rss-247	FCC	
0	2402	3.85	2.427	<125	<1000	Pass
19	2440	3.56	2.270	<125	<1000	Pass
39	2480	4.12	2.582	<125	<1000	Pass

BLE-1Mbps						
Average Power						
Channel	Freq.	RF Output Power		Limit (mW)		Verdict
No.	(MHz)	(dBm)	(mW)	Rss-247	FCC	
0	2402	2.67	1.849	<125	<1000	Pass
19	2440	2.74	1.879	<125	<1000	Pass
39	2480	2.48	1.770	<125	<1000	Pass

BLE-2Mbps						
Peak Power						
Channel	Freq.	RF Output Power		Limit (mW)		Verdict
No.	(MHz)	(dBm)	(mW)	Rss-247	FCC	
0	2402	3.65	2.317	<125	<1000	Pass
19	2440	3.35	2.163	<125	<1000	Pass
39	2480	3.91	2.460	<125	<1000	Pass

BLE-2Mbps						
Average Power						
Channel	Freq.	RF Output Power		Limit (mW)		Verdict
No.	(MHz)	(dBm)	(mW)	Rss-247	FCC	
0	2402	2.14	1.637	<125	<1000	Pass
19	2440	1.83	1.524	<125	<1000	Pass
39	2480	2.04	1.600	<125	<1000	Pass

1Mbps

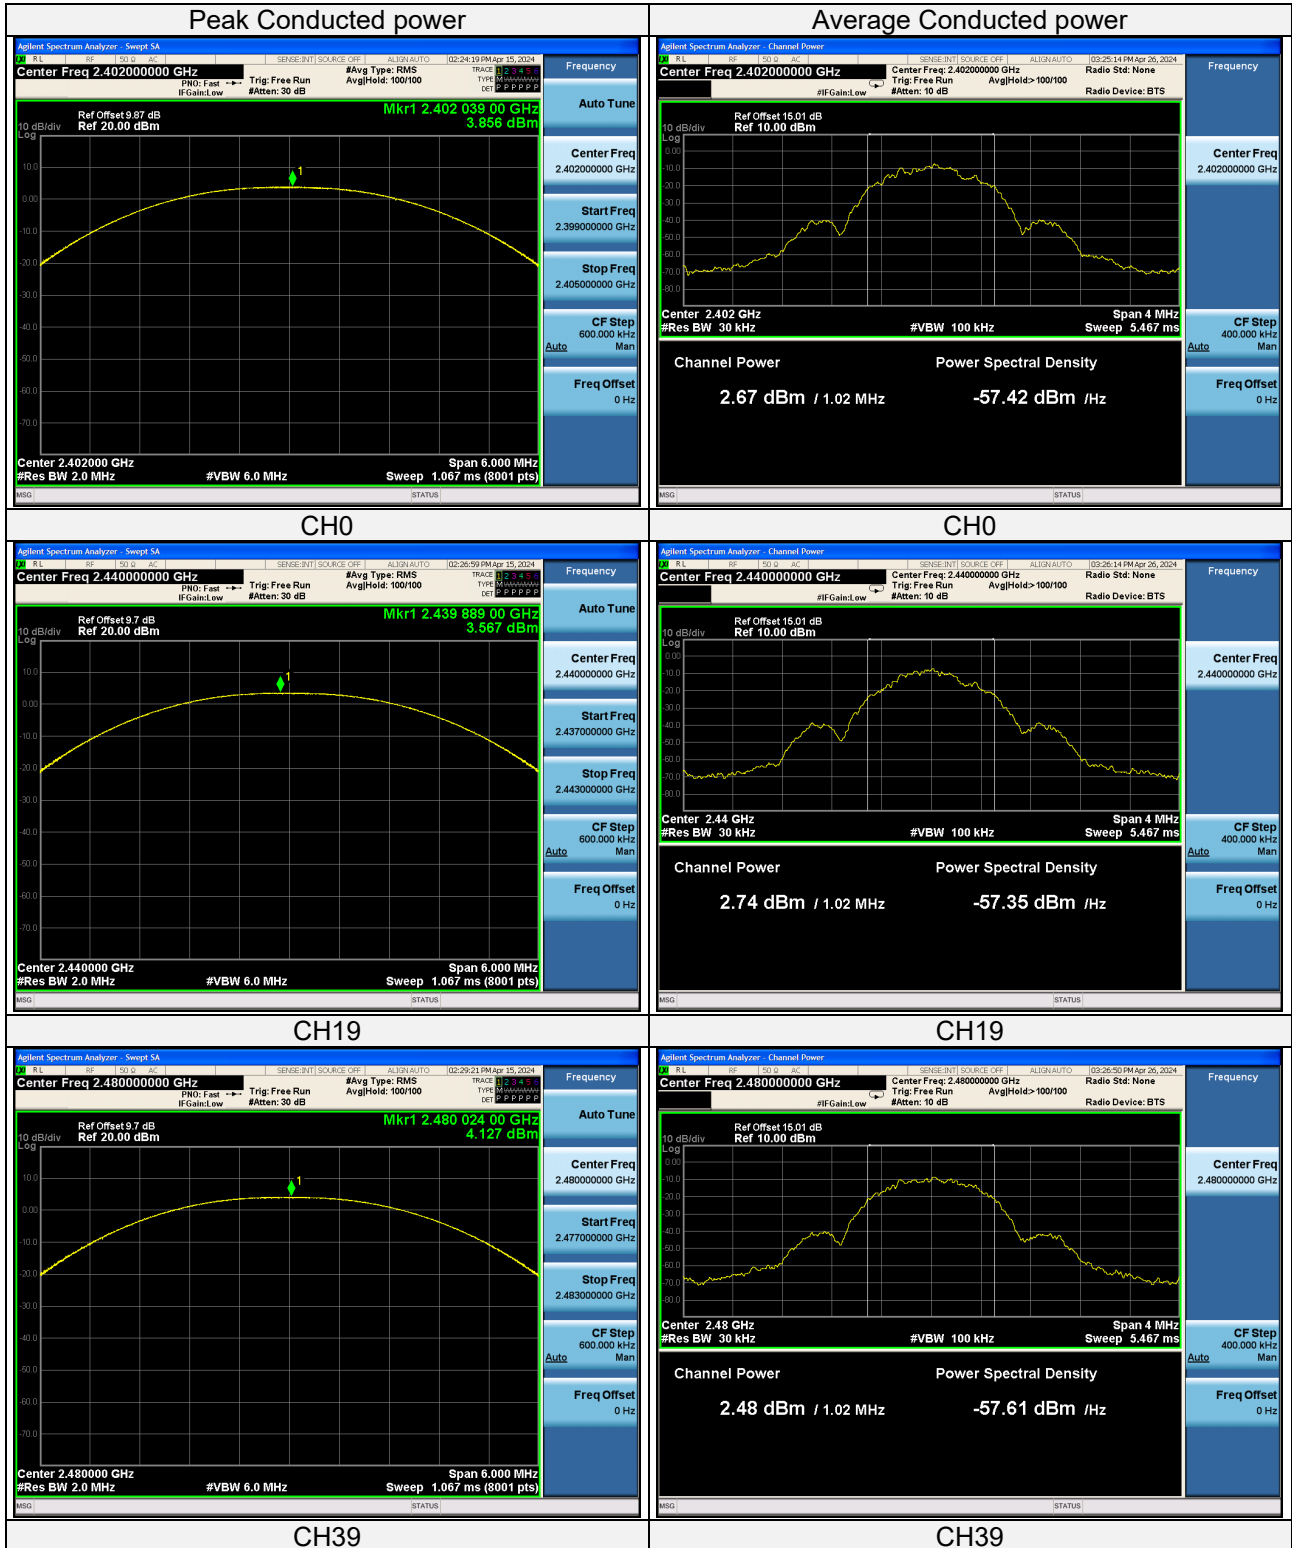


Lab: [Hwa-Hsing \(Dongguan\) Testing Co., Ltd.](#)  
 Address: [No.101, Building N1, Yuyuan 2 Road, Yuyuan Industrial Park, Huangjiang Town, Dongguan City, People's Republic of China](#)

Tel: [0769-83078199](tel:0769-83078199)  
 Web.: [www.hwa-hsing.com](http://www.hwa-hsing.com)  
 E-Mail: [customerservice.dg@hwa-hsing.com](mailto:customerservice.dg@hwa-hsing.com)

Release Ver. 1.5

## 2Mbps

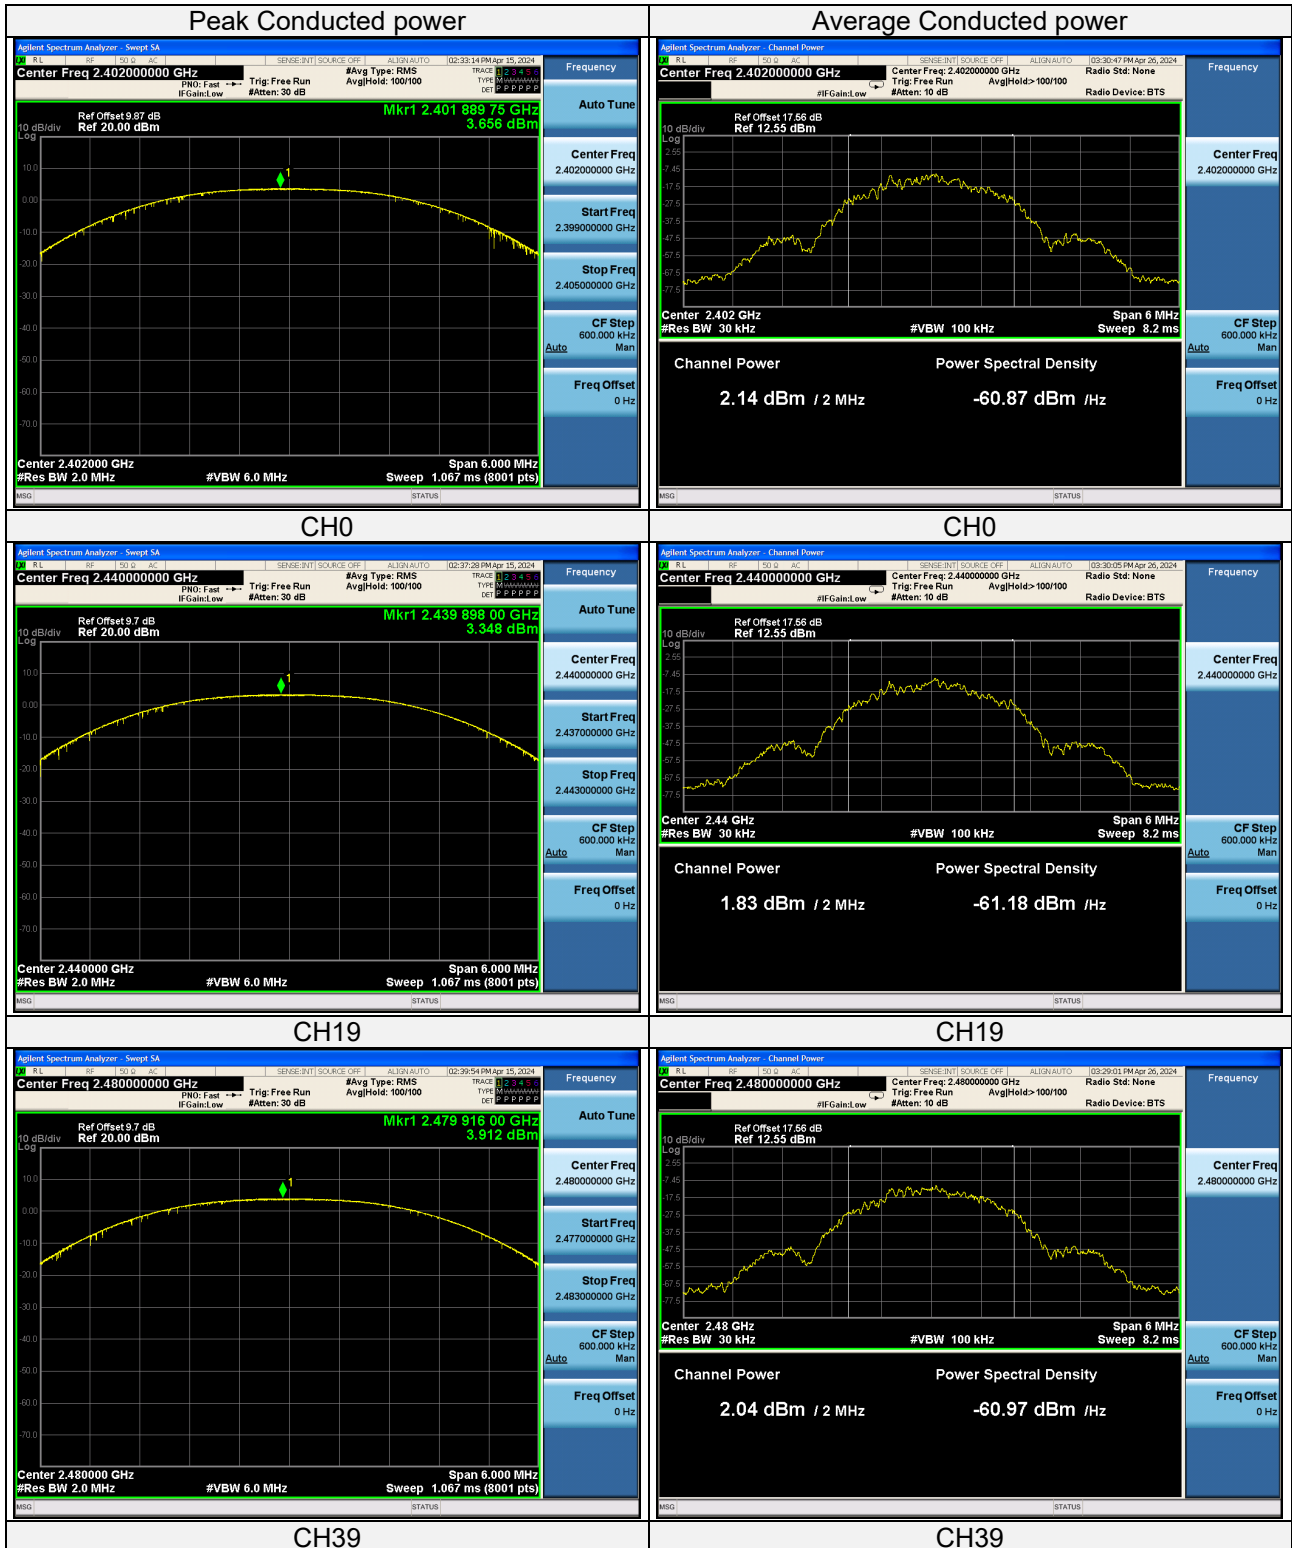

Lab: [Hwa-Hsing \(Dongguan\) Testing Co., Ltd.](#)  
 Address: [No.101, Building N1, Yuyuan 2 Road, Yuyuan Industrial Park, Huangjiang Town, Dongguan City, People's Republic of China](#)

Tel: [0769-83078199](tel:0769-83078199)  
 Web.: [www.hwa-hsing.com](http://www.hwa-hsing.com)  
 E-Mail: [customerservice.dg@hwa-hsing.com](mailto:customerservice.dg@hwa-hsing.com)

Release  
 Ver. 1.5




**3.6 Power Spectral Density Measurement**

3.6.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm/3kHz.

3.6.2 Test Setup

- DTS maximum power spectral density level in the fundamental emission Subclause 11.10 of ANSI C63.10 is applicable

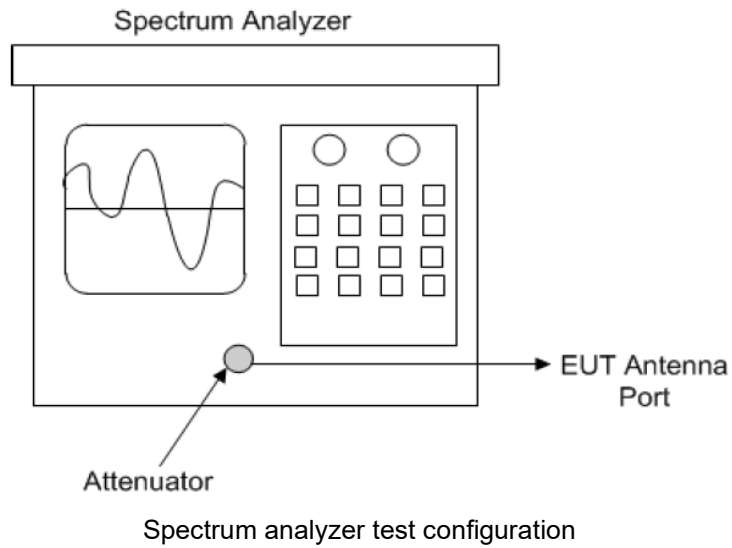

3.6.3 Test Instruments

Refer to section 5 to get information of above instrument.

### 3.6.4 Test Procedure

- a. **Method AVGPSD-1 or method AVGPSD-1A (alternative)** shall be applied if either of the following conditions can be satisfied:
- 1) The EUT transmits continuously (or with a  $D \geq 98\%$ ).
  - 2) Sweep triggering can be implemented in such a way that the device transmits at the maximum power control level throughout the duration of each of the instrument sweeps to be averaged. This condition can generally be achieved by triggering the instrument's sweep if the duration of the sweep is equal to or shorter than the duration  $I$  of each transmission from the EUT, and if those transmissions exhibit full power throughout these durations.
- b. **Method AVGPSD-2 or method AVGPSD-2A (alternative)** shall be applied if the conditions of the preceding item a) cannot be achieved. and the transmissions exhibit a constant duty cycle during the measurement duration. Duty cycle will be considered to be constant if variations are less than  $\pm 2\%$ .
- c. **Method AVGPSD-3 or method AVGPSD-3A (alternative)** shall be applied if the conditions of the preceding paragraphs a) and b) cannot be achieved.

#### Method AVGPSD-3:

Method AVGPSD-3 uses mms detection across ON and OFE times of the EUT with max hold. The following procedure is applicable when the EUT cannot be configured to transmit continuously (i.e.  $D < 98\%$ ), when sweep triggering/signal gating cannot be used to measure only when the EUT is transmitting at its maximum power control level. and when the transmission duty cycle is not constant (i.e., duty cycle variations exceed  $\pm 2\%$ ),

#### SA Setting:

- a. Set the instrument span to a minimum of 1.5 times the OBW.
  - b. Set sweep trigger to "free run."
  - c. Set the RBW = 3 kHz, VBW = 10 kHz,
  - d. Detector = RMS (power averaging).
  - e. Sweep time = Auto couple,
  - f. Allow max hold to run for at least 60 s or longer as needed to allow the trace to stabilize.
  - g. Use the peak marker function to determine the maximum PSD level
- If the measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced).

### 3.6.5 Deviation from Test Standard

No deviation.


### 3.6.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

## 3.6.7 Test Results

BLE-1Mbps		Power Density	
Test Channel	Channel Frequency	Test Result (dBm/10kHz)	Limit (dBm/3kHz)
0	2402MHz	-12.74	<8
19	2440MHz	-12.80	<8
39	2480MHz	-12.37	<8

BLE-2Mbps		Power Density	
Test Channel	Channel Frequency	Test Result (dBm/10kHz)	Limit (dBm/3kHz)
0	2402MHz	-14.89	<8
19	2440MHz	-15.22	<8
39	2480MHz	-14.59	<8

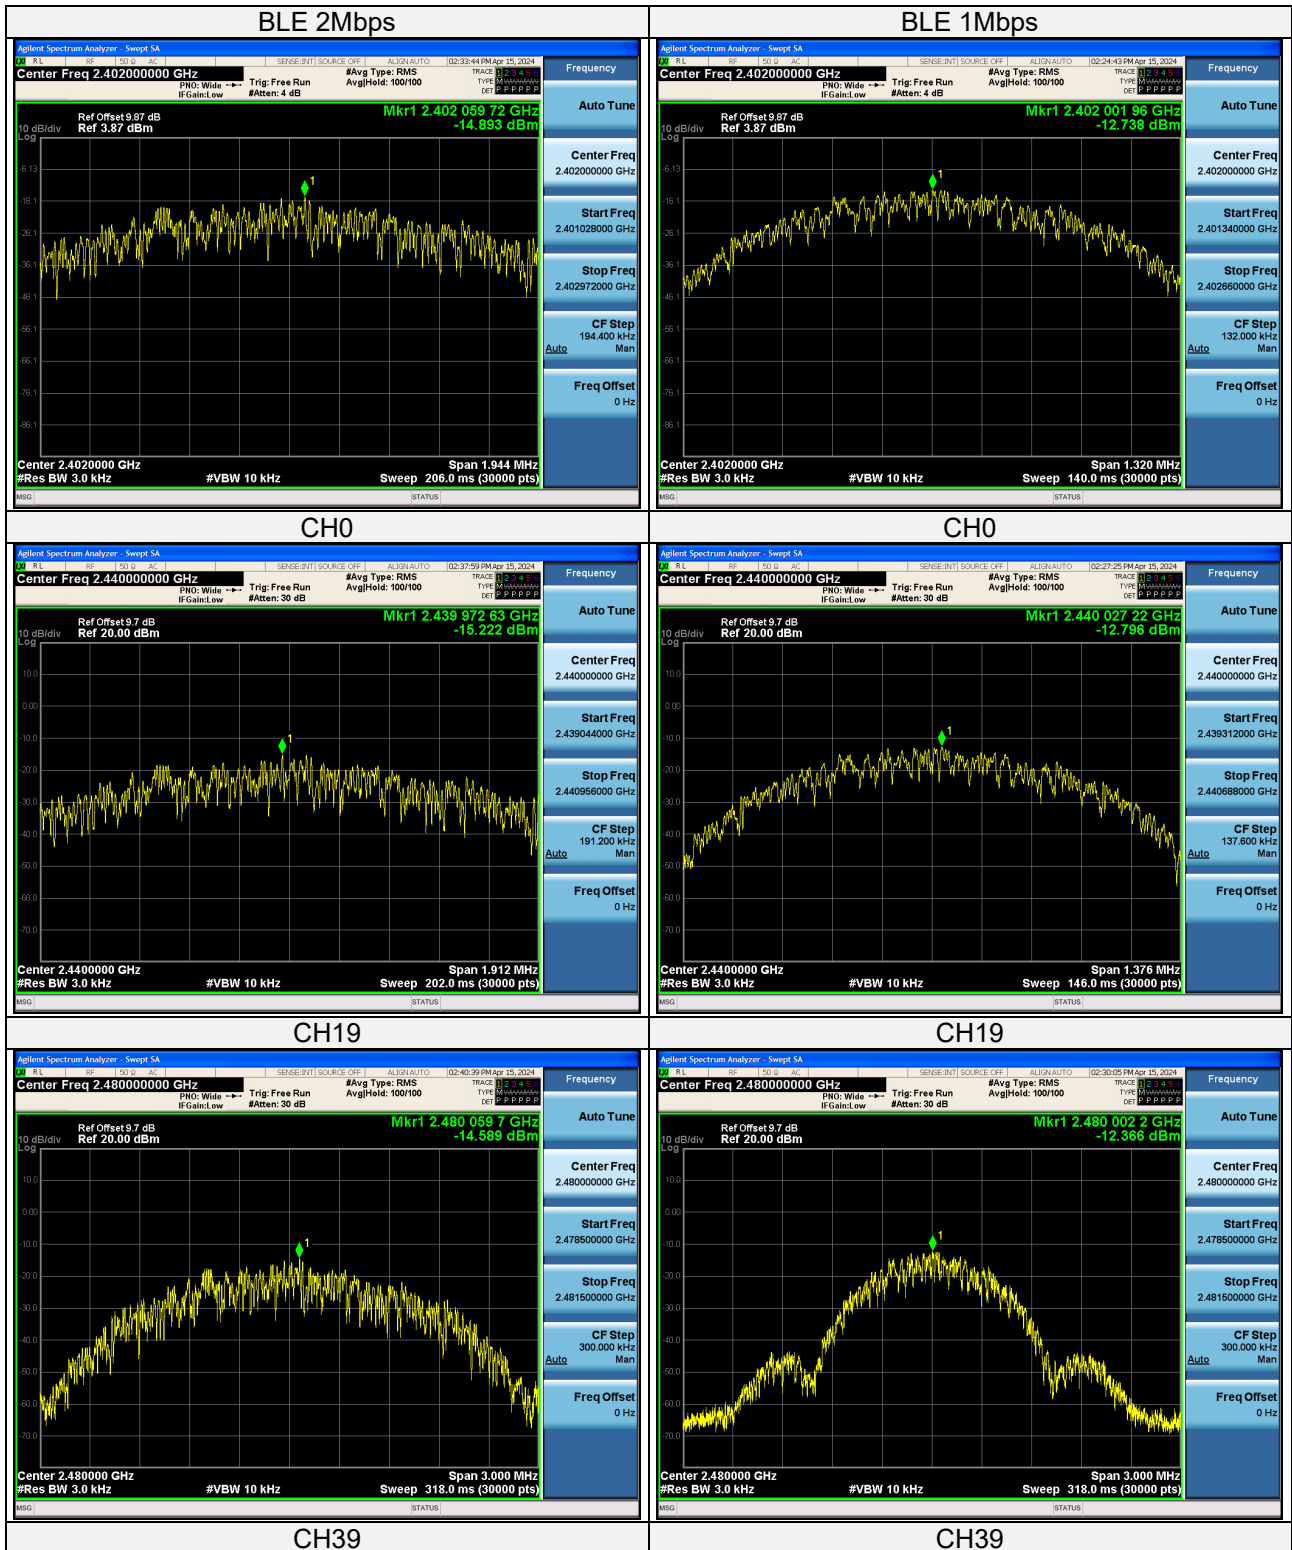

Lab: [Hwa-Hsing \(Dongguan\) Testing Co., Ltd.](#)  
 Address: [No.101, Building N1, Yuyuan 2 Road, Yuyuan Industrial Park, HuangJiang Town, Dongguan City, People's Republic of China](#)

Tel: [0769-83078199](tel:0769-83078199)  
 Web.: [www.hwa-hsing.com](http://www.hwa-hsing.com)  
 E-Mail: [customerservice.dg@hwa-hsing.com](mailto:customerservice.dg@hwa-hsing.com)

Release  
 Ver. 1.5


### 3.7 Conducted Out of Band Emission Measurement

#### 3.7.1 Limits of Conducted Out of Band Emission Measurement

- a. **If the maximum peak conducted output power procedure was used to determine compliance as described in 11.9.1**, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).
- b. **If maximum conducted (average) output power was used to determine compliance as described in 11.9.2**, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).

#### 3.7.2 Test Setup

- DTS emissions in non-restricted frequency bands Subclause 11.11 of ANSI C63.10 is applicable.
- DTS emissions in restricted frequency bands Subclause 11.12 of ANSI C63.10 is applicable.

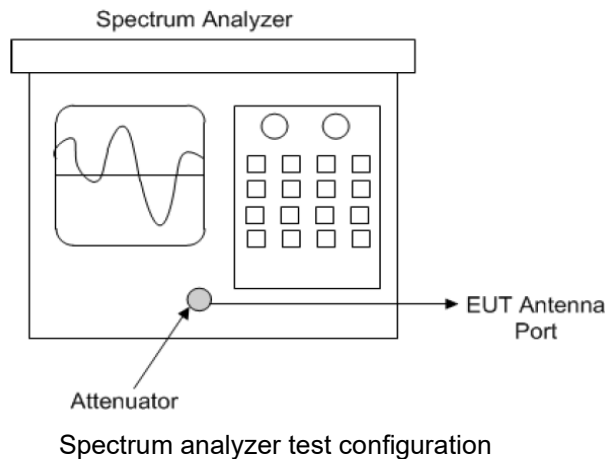

#### 3.7.3 Test Instruments

Refer to section 5 to get information of above instrument.

**3.7.4 Test Procedure**

a. Establish a reference level by using the following procedure:

- 1) Set instrument center frequency to DTS channel center frequency.
- 2) Set the span to 21.5 times the DTS bandwidth)
- 3) Set the RBW= 100 kHz)
- 4) Set the VBW  $\geq 3 \times$  RBW
- 5) Detector = peak
- 6) Sweep time = auto coupling
- 7) Trace mode =max hold
- 8) Allow trace to fully stabilize
- 9) Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

b. Establish an emission level by using the following procedure:

- 1) Set the center frequency and span to encompass frequency range to be measured.
- 2) Set the RBW = 100 kHz
- 3) Set the VBW  $\geq 300$  kHz.
- 4) Detector = peak.
- 5) Sweep time = auto couple.
- 6) Trace mode = max hold.
- 7) Allow trace to fully stabilize.
- 8) Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.


**3.7.5 Deviation from Test Standard**

No deviation.

**3.7.6 EUT Operating Condition**

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


## 3.7.7 Test results

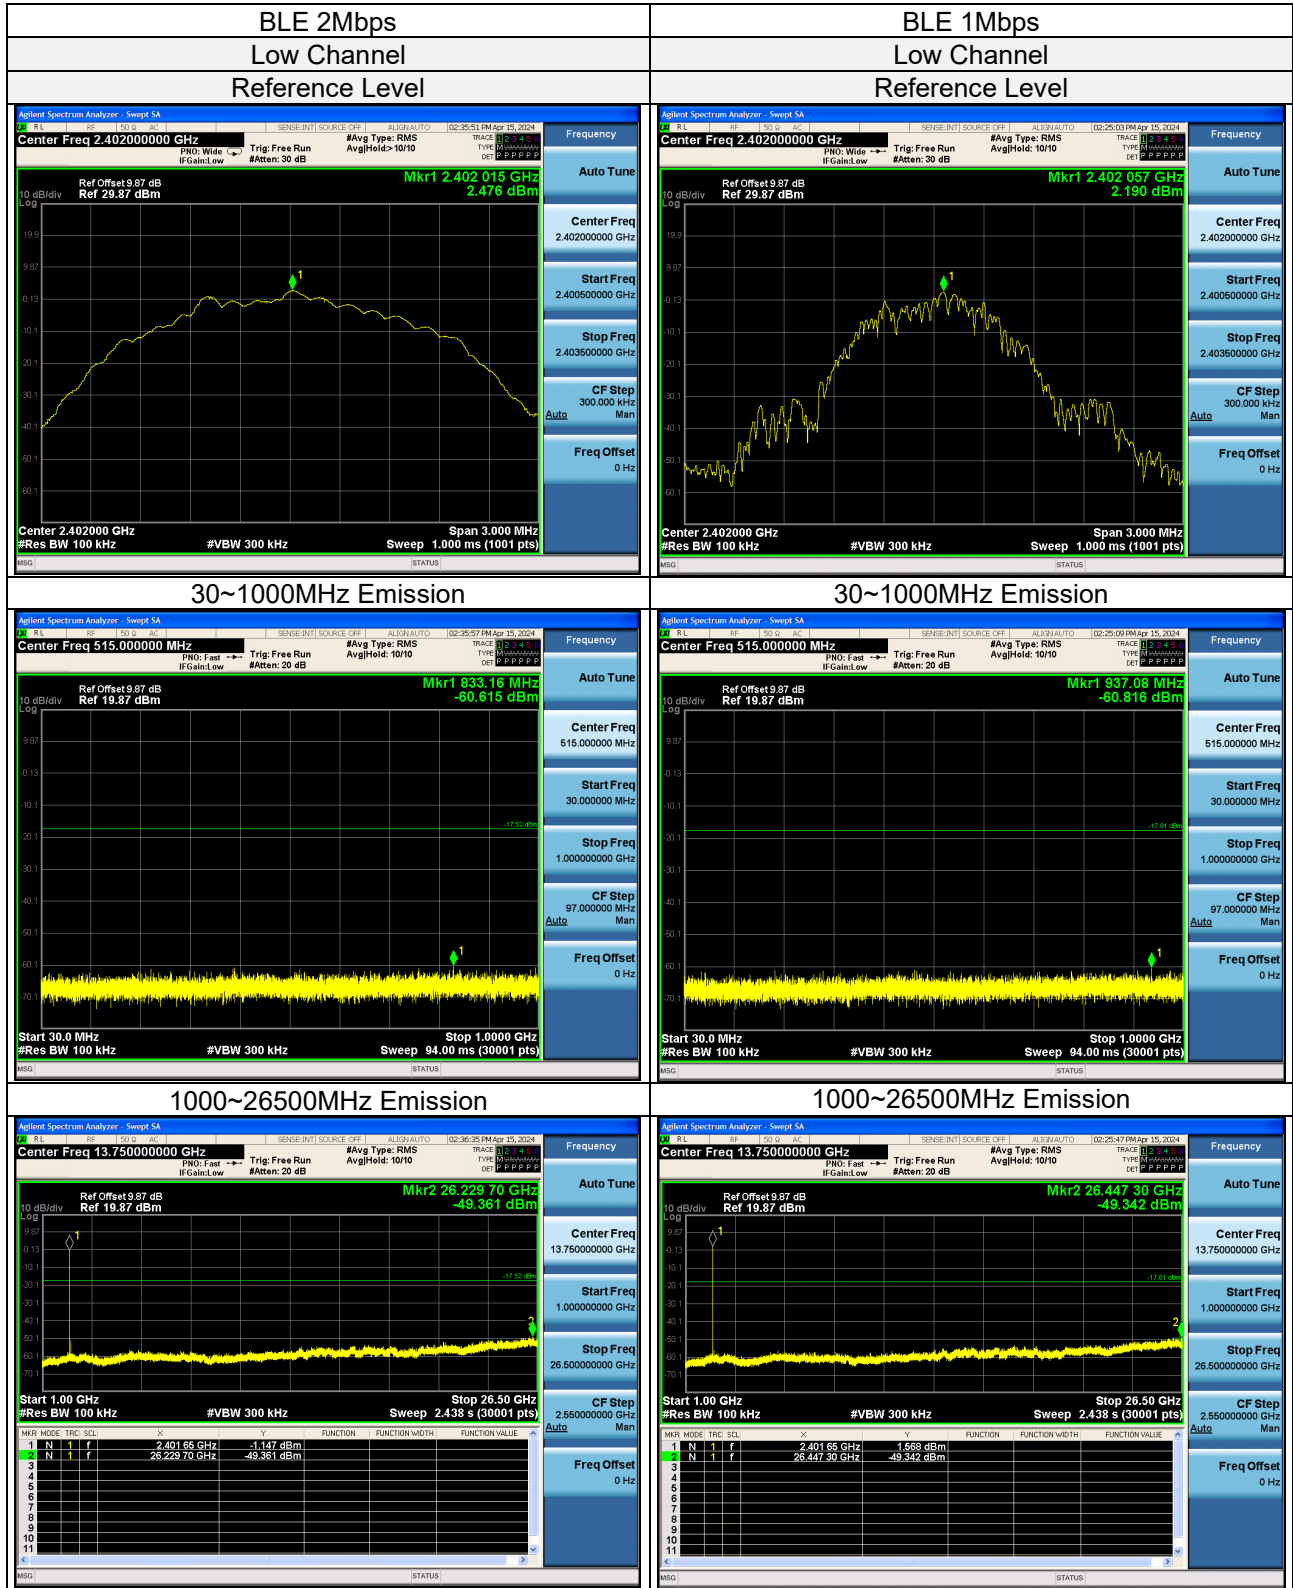

Lab: [Hwa-Hsing \(Dongguan\) Testing Co., Ltd.](#)  
 Address: [No.101, Building N1, Yuyuan 2 Road, Yuyuan Industrial Park, HuangJiang Town, Dongguan City, People's Republic of China](#)

Tel: [0769-83078199](tel:0769-83078199)  
 Web.: [www.hwa-hsing.com](http://www.hwa-hsing.com)  
 E-Mail: [customerservice.dg@hwa-hsing.com](mailto:customerservice.dg@hwa-hsing.com)

Release Ver. 1.5

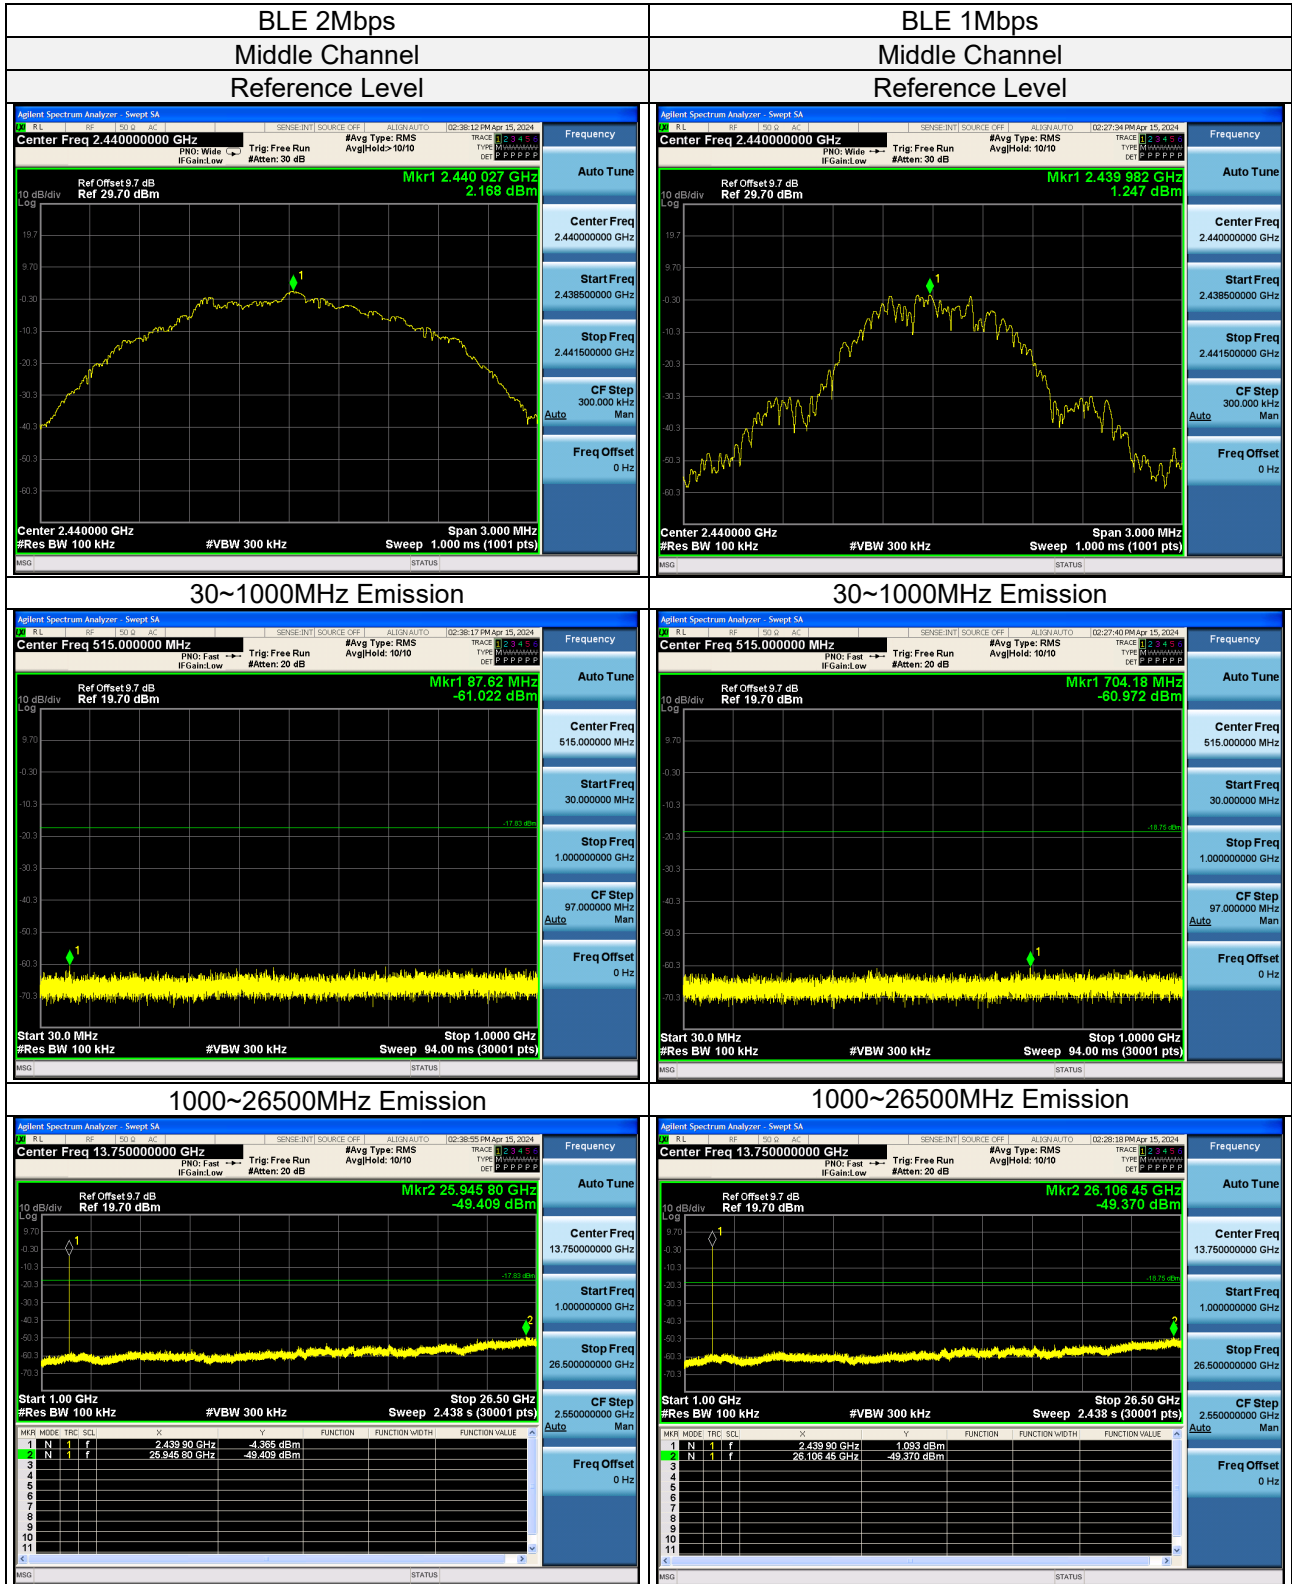


Lab: [Hwa-Hsing \(Dongguan\) Testing Co., Ltd.](#)  
 Address: [No.101, Building N1, Yuyuan 2 Road, Yuyuan Industrial Park, HuangJiang Town, Dongguan City, People's Republic of China](#)

Tel: [0769-83078199](tel:0769-83078199)  
 Web.: [www.hwa-hsing.com](http://www.hwa-hsing.com)  
 E-Mail: [customerservice.dg@hwa-hsing.com](mailto:customerservice.dg@hwa-hsing.com)

Release  
 Ver. 1.5




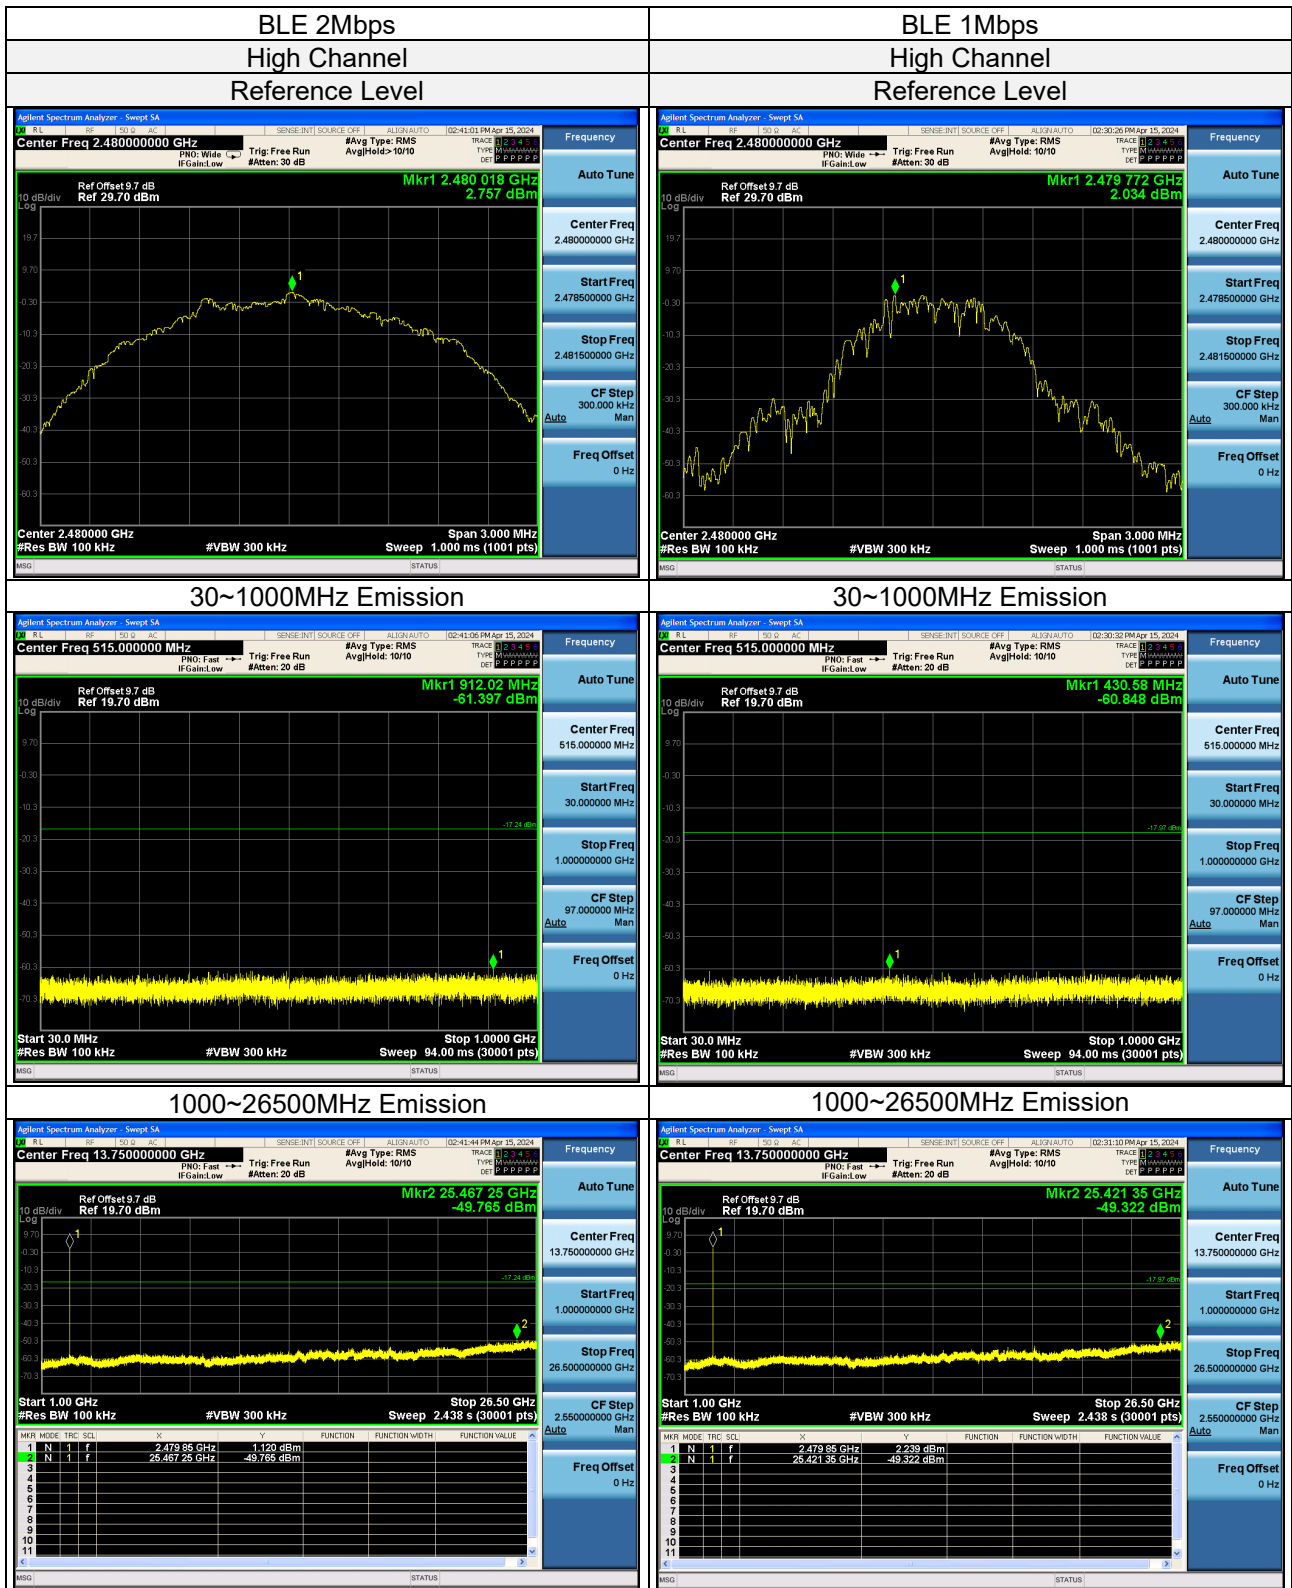

Lab: [Hwa-Hsing \(Dongguan\) Testing Co., Ltd.](#)  
 Address: [No.101, Building N1, Yuyuan 2 Road, Yuyuan Industrial Park, HuangJiang Town, Dongguan City, People's Republic of China](#)

Tel: [0769-83078199](tel:0769-83078199)  
 Web.: [www.hwa-hsing.com](http://www.hwa-hsing.com)  
 E-Mail: [customerservice.dg@hwa-hsing.com](mailto:customerservice.dg@hwa-hsing.com)

Release  
 Ver. 1.5

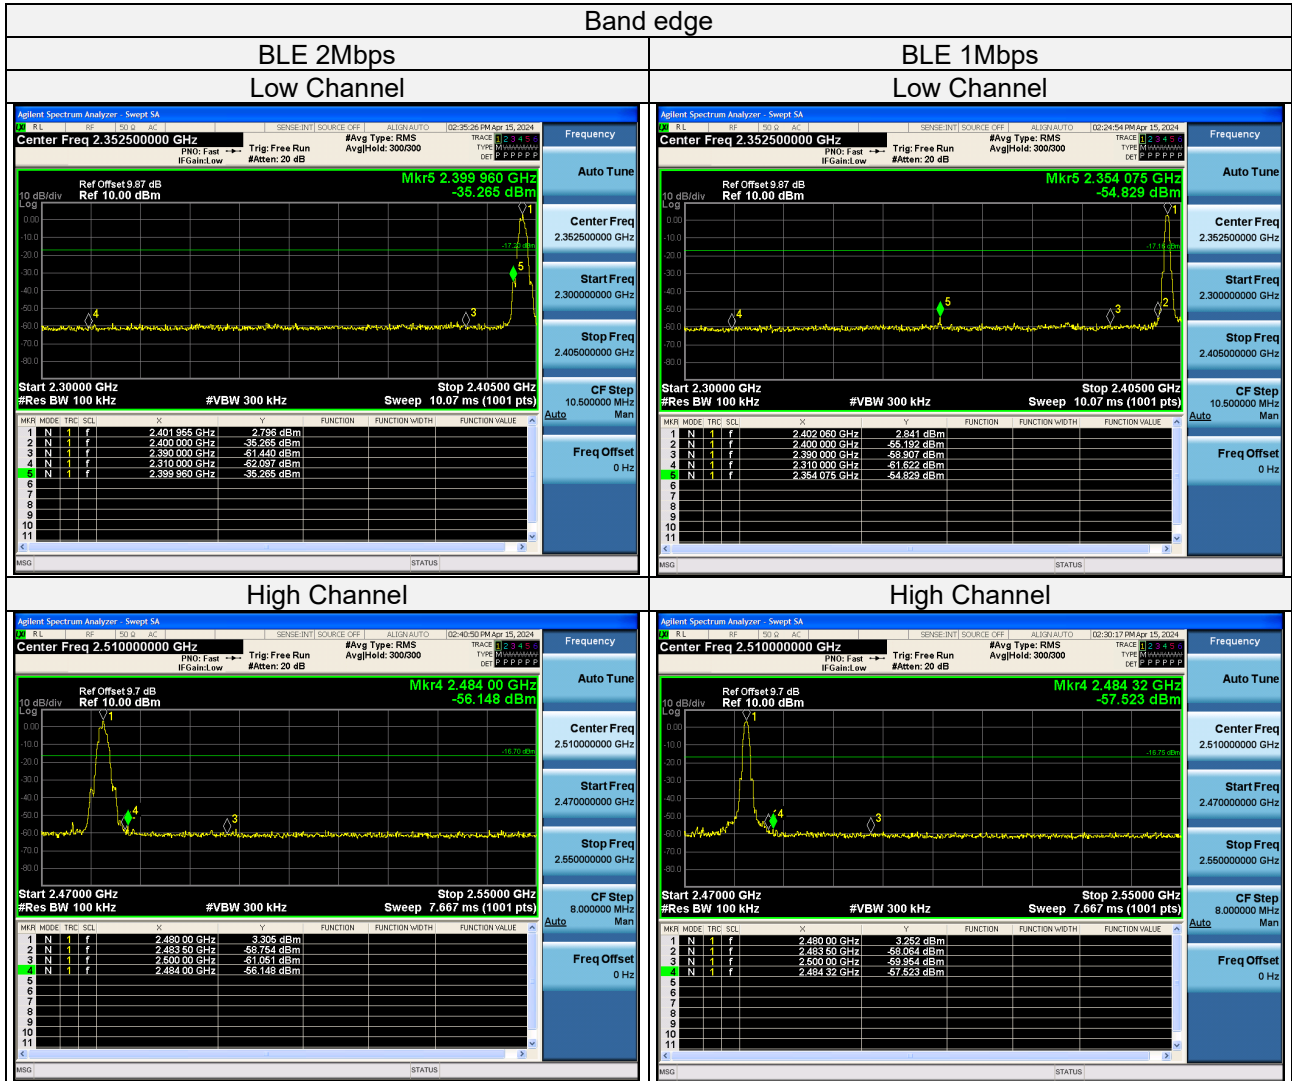

Lab: [Hwa-Hsing \(Dongguan\) Testing Co., Ltd.](#)  
 Address: [No.101, Building N1, Yuyuan 2 Road, Yuyuan Industrial Park, HuangJiang Town, Dongguan City, People's Republic of China](#)

Tel: [0769-83078199](tel:0769-83078199)  
 Web.: [www.hwa-hsing.com](http://www.hwa-hsing.com)  
 E-Mail: [customerservice.dg@hwa-hsing.com](mailto:customerservice.dg@hwa-hsing.com)

Release  
 Ver. 1.5

**4. Pictures of Test Arrangements**

Please refer to the attached file (Test Setup Photo).

**5. Test Instruments**

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.Date
Spectrum	Keysight	N9020A	MY51240612	2024-08-06
Spectrum Analyzer	Rohde&Schwarz	FSV-40N	101783	2024-12-17
Power Meter 10Hz~18GHz	Tonscend	JS0806-2	188060126	2024-08-06
Signal generator	Keysight	E4421B	GB40051020	2025-03-14
Universal Switch Control Unit	Rohde&Schwarz	CMW500	12010002k50	2024-12-17
Test Software	Tonscend	JS0806-2	NA	NA
Humidity tester	Jingchuang	GSP-8A	CMA22B000592	2024-12-24

- Note: 1. The calibration interval of the above test instruments is 12 months.  
2. The test was performed in RF Chamber.

**Appendix – Information on The Testing Laboratories**

We, [Hwa-Hsing \(Dongguan\) Testing Co., Ltd.](#), A global provider of TESTING and CERTIFICATION services for consumer products, electronic products and wireless information technology products. Adhering to the core values “HONEST and TRUSTWORTHY, OBJECTIVE and IMPARTIALITY, RIGOROUS and AFFICIENT”, commitment to provide professional, perfect and efficient comprehensive ONE-STOP solution of TESTING and CERTIFICATION services for Manufacturers, Buyers, Traders, Brands, Retailers. Assist client to better manage risk, protect their brands, reduce costs and cut time to over 150 markets in global. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lab Address: [No.101, Building N1, Yuyuan 2 Road, Yuyuan Industrial Park, HuangJiang Town, Dongguan City, People's Republic of China](#)

Contact Tel: [0769-83078199](tel:0769-83078199)

Email: [Customerservice.dg@hwa-hsing.com](mailto:Customerservice.dg@hwa-hsing.com)

Web Site: [www.hwa-hsing.com](http://www.hwa-hsing.com)

--- END ---