

Sunnyway Technology (China) Co., Ltd.

Antenna admission book

customer name: Notioni	project name: L28i	
Working frequency band: 2400 MHz-2500 MHz		
Motherboard version:L28i-N31		
Sunnyway material specifications		
specifications and models	Sunnyway material number	Customer material number

change the resume			
Preparation / change date	Change the content	Change the person	edition

Sunnyway will sign the column				
research and development	structure:	examine and verify:	Quality Engineer:	ratify;
	radio frequency:	examine and verify:		
customer signature field				
electronic engineer	project Manager	construction engineer	Quality engineer	

catalogue

1. Project pictures.....	1
2. Test the treatment equipment.....	2
3. Matching the circuit.....	2
4. S 1 1 test.....	3
<u>4. 1 S 11 Description of test method</u>	<u>3</u>
<u>4.2 S11 parameter</u>	<u>3</u>
5. Dark room test data.....	4
<u>5. 1 Passive test data</u>	<u>5</u>
<u>5. 1. 1 WIFI 0 Passive efficiency</u>	<u>5</u>
<u>5. 1. 2 WIFI 1 Passive efficiency</u>	<u>6</u>
<u>5.2 Active test data</u>	<u>7</u>
6. Mass production antenna index.....	8
7.Drawing.....	

1. project

information Machine

information




Note: The prototype of the customer's final verification of antenna performance is retained in our company for at least one year, which is convenient for analyzing and solving abnormal situations in the mass production of antennas.
Ensure the quality of antenna shipments.

2. Test the manufacturing equipment


Objective : To test the passive parameters of the antenna as accurately as possible.

Preparation method : the sample mechanism is to use a 50 ohm coaxial cable, one end is connected to the test point of the matching circuit (front end of the RF test hole), and the other end is connected to the SMA connector at the back end. The schematic diagram is as follows :

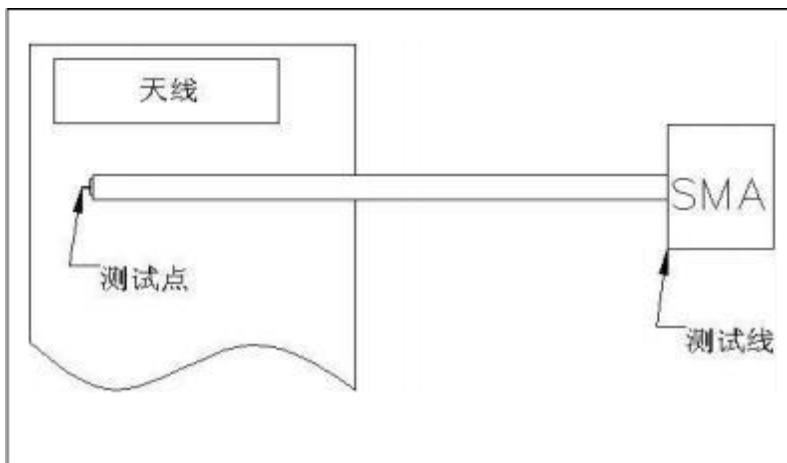


3. Matching the circuit

wifi antenna

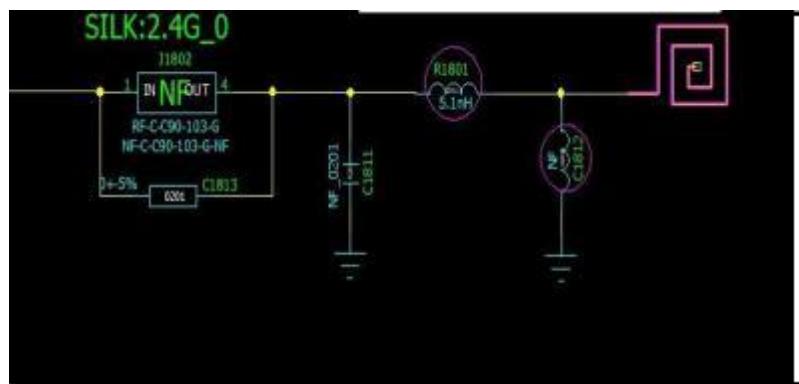

E1e metnt	Value	item	specific ations
E1	N/A		
E2	5. 1nH		
E3	N/A		

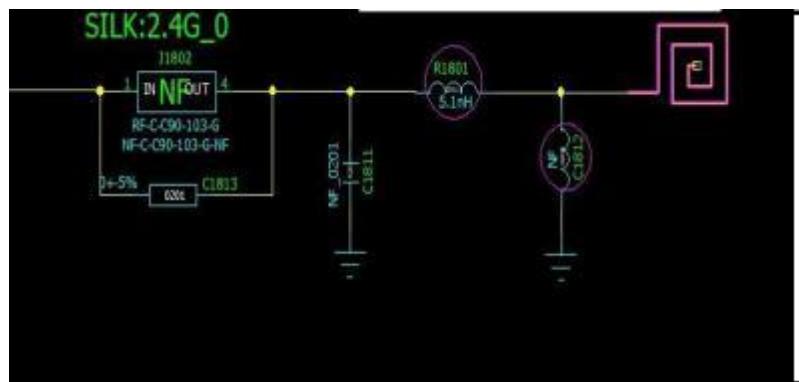


E1e metnt	Value	item	specific ations
E1	1pF		
E2	5. 6nH		
E3	N/A		

4. S 11 test

1. s11 test method description

Test Equipment : Network Analyzer (E 5071C)

Test method : Export a 50 ohm CABLE cable from the instrument test port, use the SMA connector of the connection mechanism after the calibration piece, and record the echo loss and standing wave ratio corresponding to the relevant frequency point. The test schematic diagram is as follows :

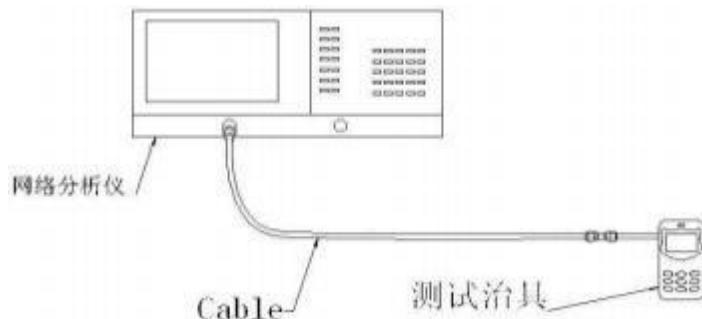

Schematic diagram of the test

.24 S11 parameters

wifi 0 Antenna



wifi 1 Antenna



5 Dark room test data

Test system: shield the dark room

Test environment: temperature $22^{\circ}\text{C} \pm 3^{\circ}\text{C}$, humidity 50% $\pm 15\%$

Test equipment: Use the network analyzer Agilent E 5062C when testing the passive data

When testing active data, use the comprehensive meter Agilent 8960 / CMW 500 / E 4438C


5.1 passive

test data

wifi 0

passive


efficiency

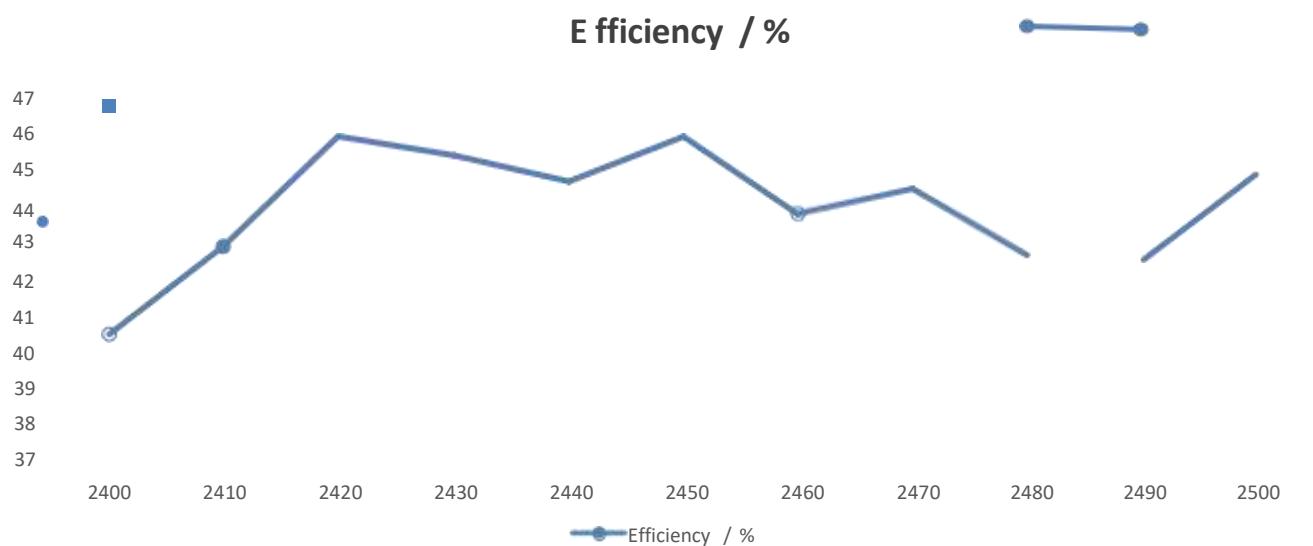

Freq . (MHz)		2400–2500		
		minimum	maximum	average value
Effi (%)	Effi (%)	40.27	45.81	43.83
Effi (dB)	Effi (dB)	-3.95	-3.39	-3.59

wifioAntennagain


MaxGain/dBi

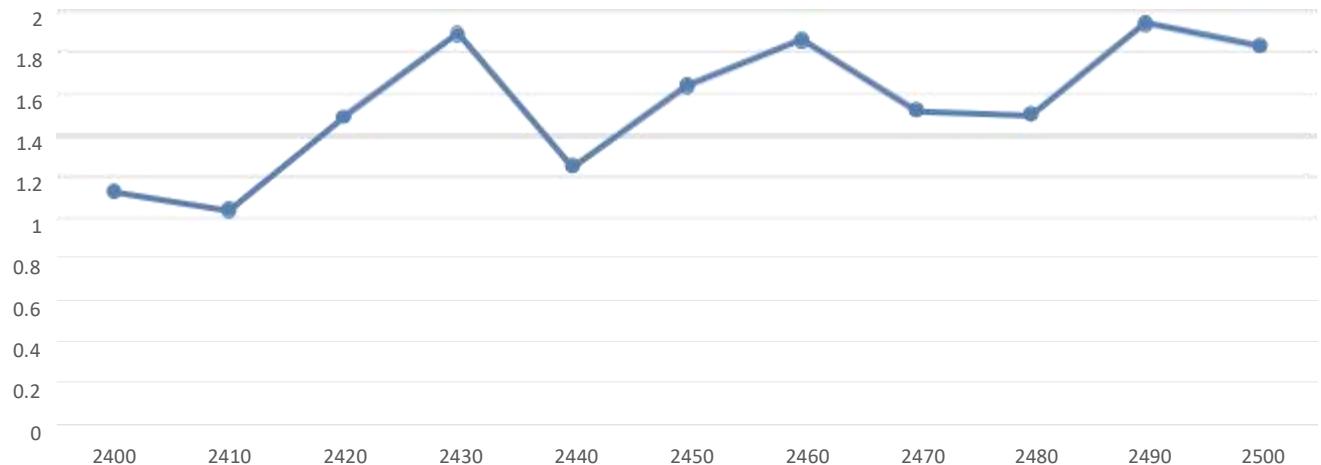

Freq . (MHz)	2400–2500		
	minimum	maximum	average value
MaxGain (dBi)	1.04	1.94	1.55

wifi 1 Active efficiency


Efficiency / %

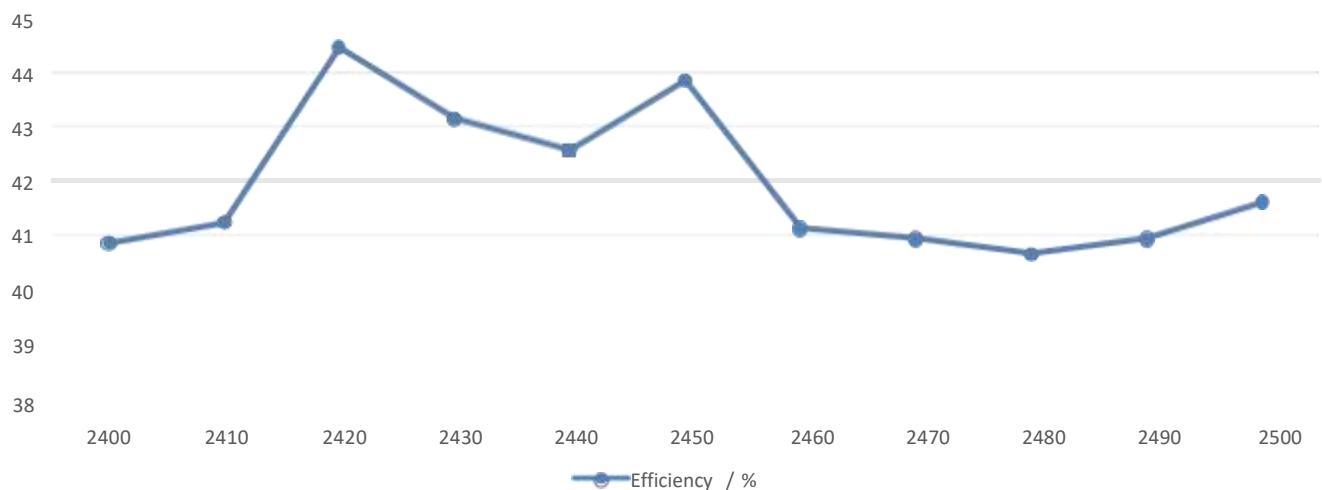

Freq . (MHz)		2400–2500		
		minimum	maximum	average value
Effi (%)	40.64	40.64	44.46	41.93
Effi (dB)	-3.91	-3.91	-3.52	-3.78

wifi 1 Antenna gain

MaxGain/dBi

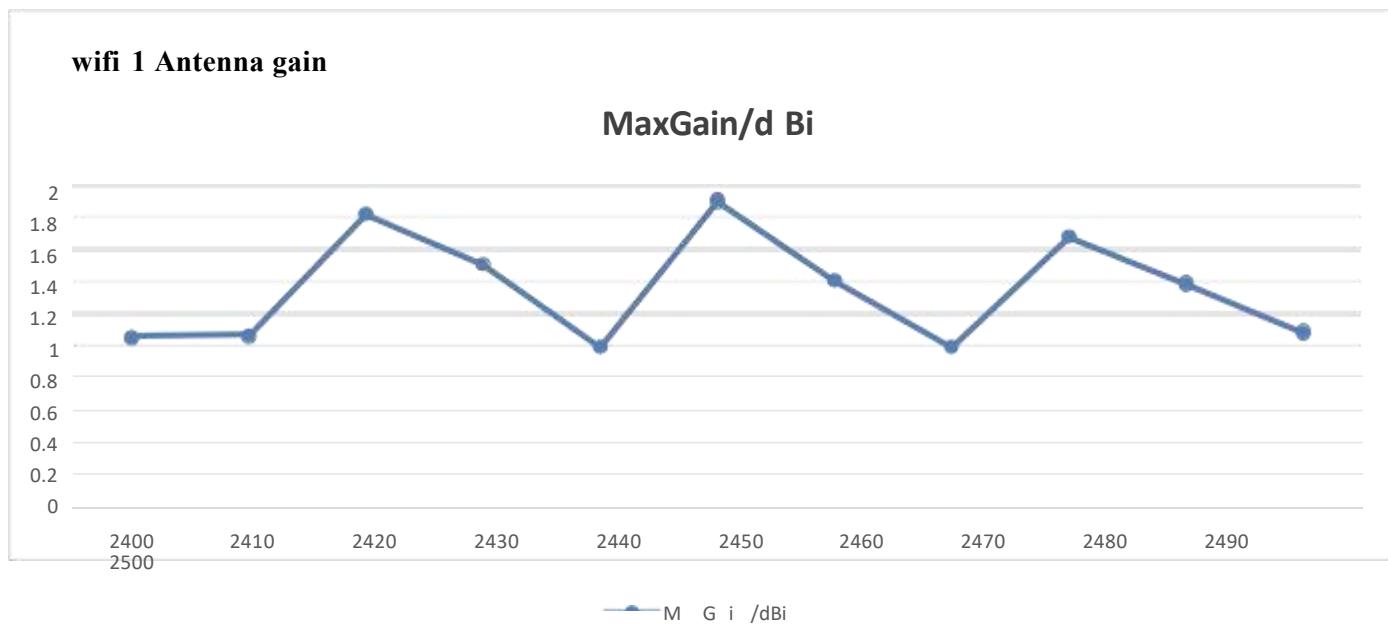

Freq . (MHz)		2400–2500		
		least value	crest value	average value
MaxGain (dBi)	1	1	1.9	1.36

5 Active test data

The WiFi antenna has active test data (free space, bright screen)

发射频率 (MHz)	接收频率 (MHz)	测试频段	信道	OTA测试数据	
				TRP	TIS
2400~2500	2400~2500	WiFi 2.4G 11g 54M	5	15.24	-76.23
			7	15.14	-75.92
			11	15.49	-76.57

6. Mass production antenna index


When the antenna is in mass production, the standing wave ratio is used as the test standard for mass production.

Based on the differences of the project itself, the following criteria are given :


Frequency (MHz)	Mass production standards
2400-2500	VSWR (Production Performance) < VSWR (Recognition Performance) + 1

7. Drawing

Antenna Photo & Length (mm)

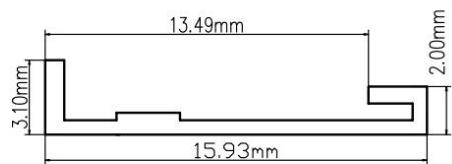

WiFi0

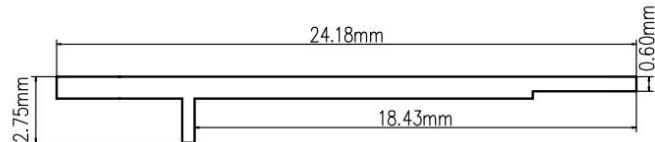

WiFi1