

Test Report (LTE)

Applicant: Shanghai Notion Information Technology CO. LTD
Address of Applicant: Floor 5,Building 5,NO 289,Bisheng Rd, Pudong district, Shanghai, China
Manufacturer: Shanghai Notion Information Technology CO. LTD
Address of Manufacturer: Floor 5,Building 5,NO 289,Bisheng Rd, Pudong district, Shanghai, China
Equipment Under Test (EUT)
Product Name: LTE MiFi
Model No.: M022, M022T, M028, M028B, M028AT, M028A, M023, L02C, L02I, L02H, L02B
FCC ID: 2AR45-MIFI01
Applicable standards: FCC CFR Title 47 Part 2
FCC CFR Title 47 Part 27
Date of sample receipt: October 10, 2020
Date of Test: October 12, 2020-November 06, 2020
Date of report issued: November 06, 2020
Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



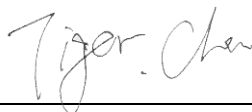
Robinson Luo
Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
00	November 06, 2020	Original

Prepared By:



Date:

November 06, 2020

Project Engineer

Check By:



Date:

November 06, 2020

Reviewer

3 Contents

Page

2	VERSION	2
3	CONTENTS	3
4	TEST SUMMARY	4
5	GENERAL INFORMATION	5
5.1	GENERAL DESCRIPTION OF EUT	5
5.2	RELATED SUBMITTAL(S) / GRANT (S)	6
5.3	TEST METHODOLOGY	6
5.4	DEVIATION FROM STANDARDS	6
5.5	ABNORMALITIES FROM STANDARD CONDITIONS	6
5.6	TEST FACILITY	6
5.7	TEST LOCATION	6
6	TEST INSTRUMENTS LIST	7
7	SYSTEM TEST CONFIGURATION	9
7.1	TEST MODE	9
7.2	CONFIGURATION OF TESTED SYSTEM	9
7.3	CONDUCTED AVERAGE OUTPUT POWER	10
7.4	PEAK-TO-AVERAGE RATIO	11
7.5	OCCUPY BANDWIDTH	12
7.6	MODULATION CHARACTERISTIC	13
7.7	OUT OF BAND EMISSION AT ANTENNA TERMINALS	13
7.8	FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT	14
7.9	FREQUENCY STABILITY V.S. TEMPERATURE MEASUREMENT	17
7.10	FREQUENCY STABILITY V.S. VOLTAGE MEASUREMENT	18
8	TEST SETUP PHOTO	19
9	EUT CONSTRUCTIONAL DETAILS	19

4 Test Summary

Test Item	Section in CFR 47	Result
RF Exposure (SAR)	Part 1.1307 Part 2.1091	Pass* (Please refer to SAR Report)
RF Output Power	Part 2.1046 Part 27.50(c)(10)/(d)(4)	Pass
Peak-to-Average Ratio	FCC Part 27.50	Pass
Modulation Characteristics	Part 2.1047	N/A
99% & -26 dB Occupied Bandwidth	Part 2.1049 Part 27.53(h)/(g)	Pass
Spurious Emissions at Antenna Terminal	Part 2.1051 Part 27.53(h)/(g)	Pass
Field Strength of Spurious Radiation	Part 2.1053 Part 27.53(h)/(g)	Pass
Out of band emission, Band Edge	Part 27.53(h)/(g)	Pass
Frequency stability vs. temperature	Part 2.1055(a)(1)(b)	Pass
Frequency stability vs. voltage	Part 2.1055(d)(1)(2)	Pass

Pass: The EUT complies with the essential requirements in the standard.

N/A: Not applicable.

5 General Information

5.1 General Description of EUT

Product Name:	LTE MiFi
Model No.:	M022, M022T, M028, M028B, M028AT, M028A, M023, L02C, L02I, L02H, L02B
Test Model No:	M022
Remark: All above models are identical in the same PCB layout, interior structure and electrical circuits. The only difference is model name for commercial purpose.	
S/N:	M022T190712000001
Tested Sample(s) ID:	GTS202010000008-1
Hardware Version:	L02I_1_10
Software Version:	L02IAVANTEL1_M022T_LCD_V003_8801_2.174.000_tx_develop_20190719_1800
Support Networks:	LTE
Support Bands:	LTE Band 7
TX Frequency:	Band 7: 2502.50MHz-2567.50MHz
Channel Bandwidth:	Band 7: 5MHz, 10MHz, 15MHz, 20MHz
Modulation type:	QPSK, 16QAM
Antenna type:	Integral antenna
Antenna gain:	1dBi
Power supply:	Power Adapter Model: SD-D05I100C Input: AC 100-240V, 50/60Hz, 0.2A Output: DC 5V/1A Or DC 3.7V 3000mAh(11.1Wh) Battery Li-Polymer

5.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is filing to comply with Section Part 27 of the FCC CFR 47 Rules.

5.3 Test Methodology

Both conducted and radiated testing were performed according to the procedures document on ANSI / TIA / EIA-603-D-2010 and FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01 and ANSI C63.26, FCC CFR 47.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055 and 2.1057

5.4 Deviation from Standards

None.

5.5 Abnormalities from Standard Conditions

None.

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC —Registration No.: 381383**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383.

- **IC —Registration No.: 9079A**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A.

- **NVLAP (LAB CODE:600179-0)**

Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP). LAB CODE:600179-0

5.7 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102

Tel: 0755-27798480

Fax: 0755-27798960

6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July. 02 2020	July. 01 2025
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June. 25 2020	June. 24 2021
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June. 25 2020	June. 24 2021
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	June. 25 2020	June. 24 2021
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	June. 25 2020	June. 24 2021
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	June. 25 2020	June. 24 2021
9	Coaxial Cable	GTS	N/A	GTS211	June. 25 2020	June. 24 2021
10	Coaxial cable	GTS	N/A	GTS210	June. 25 2020	June. 24 2021
11	Coaxial Cable	GTS	N/A	GTS212	June. 25 2020	June. 24 2021
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June. 25 2020	June. 24 2021
13	Amplifier(2GHz-20GHz)	HP	84722A	GTS206	June. 25 2020	June. 24 2021
14	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June. 25 2020	June. 24 2021
15	Band filter	Amindeon	82346	GTS219	June. 25 2020	June. 24 2021
16	Power Meter	Anritsu	ML2495A	GTS540	June. 25 2020	June. 24 2021
17	Power Sensor	Anritsu	MA2411B	GTS541	June. 25 2020	June. 24 2021
18	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	June. 25 2020	June. 24 2021
19	Splitter	Agilent	11636B	GTS237	June. 25 2020	June. 24 2021
20	Loop Antenna	ZHINAN	ZN30900A	GTS534	June. 25 2020	June. 24 2021
21	Breitband hornantenne	SCHWARZBECK	BBHA 9170	GTS579	Oct. 18 2020	Oct. 17 2021
22	Amplifier	TDK	PA-02-02	GTS574	Oct. 18 2020	Oct. 17 2021
23	Amplifier	TDK	PA-02-03	GTS576	Oct. 18 2020	Oct. 17 2021
24	PSA Series Spectrum Analyzer	Rohde & Schwarz	FSP	GTS578	June. 25 2020	June. 24 2021

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Humidity/ Temperature Indicator	KTJ	TA328	GTS243	June. 25 2020	June. 24 2021
2	Barometer	ChangChun	DYM3	GTS255	June. 25 2020	June. 24 2021

RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	June. 25 2020	June. 24 2021
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 25 2020	June. 24 2021
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June. 25 2020	June. 24 2021
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	June. 25 2020	June. 24 2021
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	June. 25 2020	June. 24 2021
6	USB RF Power Sensor	DARE	RPR3006W	GTS569	June. 25 2020	June. 24 2021
7	RF Switch Box	Shongyi	RFSW3003328	GTS571	June. 25 2020	June. 24 2021
8	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	June. 25 2020	June. 24 2021

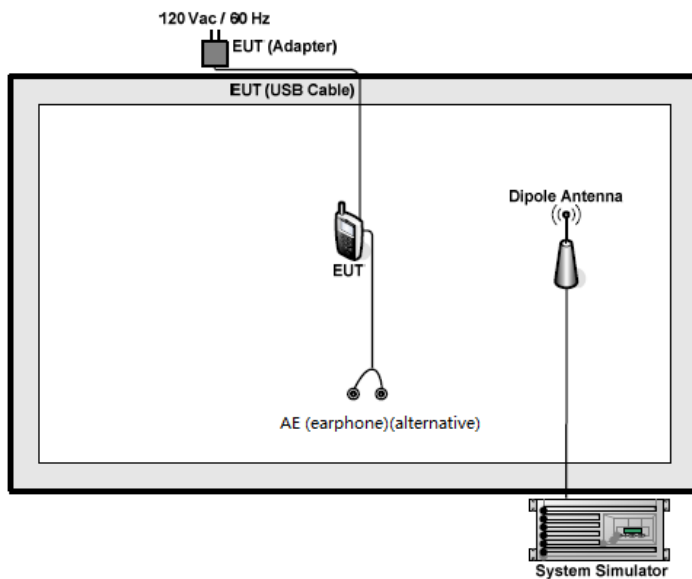
7 System test configuration

7.1 Test mode

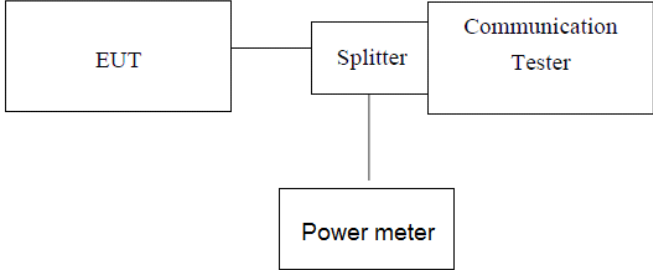
During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission.

Test modes		
Band	Radiated	Conducted
LTE Band 7	■ QPSK and 16QAM link	■ QPSK and 16QAM link

7.2 Configuration of Tested System

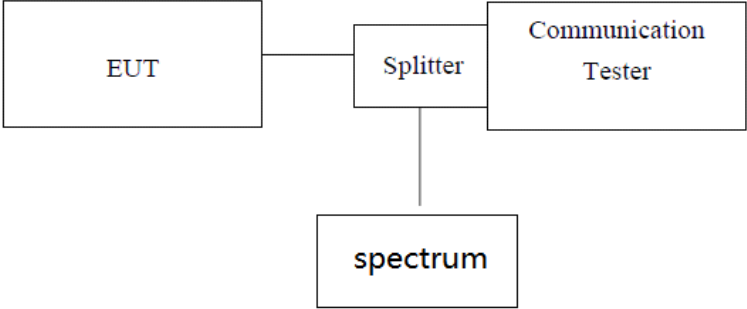


7.3 Conducted Average Output Power

Test Requirement for FCC:	Part 27.50(c)(10)/(d)(4)
Limit for FCC:	2W
Test setup:	 <p><i>Note: Measurement setup for testing on Antenna connector</i></p>
Test Procedure:	<ol style="list-style-type: none"> 1. The transmitter output port was connected to base station. 2. The RF output of EUT was connected to the power meter by RF cable and attenuator, the path loss was compensated to the results for each measurement. 3. Set EUT at maximum power through base station. 4. Select lowest, middle, and highest channels for each band and different modulation. 5. Measure the maximum burst average power.
Test Instruments:	Refer to section 6 for details
Test mode:	Refer to section 7.1 for details
Test results:	Pass

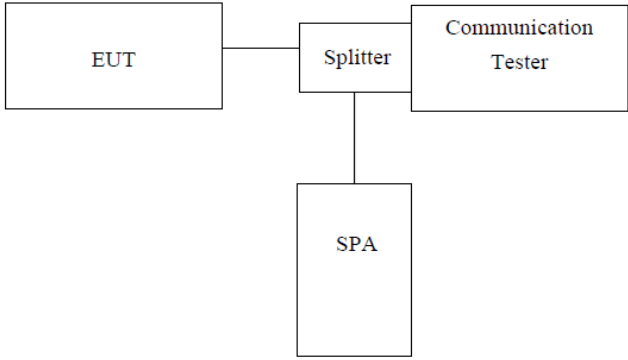
Measurement Data: The detailed test data see Appendix

7.4 Peak-to-Average Ratio

Test Requirement for FCC:	FCC part24.232(d) & FCC Part 27.50
Limit:	13db
Test setup:	 <p style="text-align: center;"><i>Note: Measurement setup for testing on Antenna connector</i></p>
Test Instruments:	Refer to section 6 for details
Test mode:	Refer to section 7.1 for details
Test results:	Pass

Measurement Data: The detailed test data see Appendix

7.5 Occupancy Bandwidth

Test Requirement for FCC:	Part 24.238; FCC Part 27.53(h)/(g)
Test setup:	 <p><i>Note: Measurement setup for testing on Antenna connector</i></p>
Test Procedure:	<ol style="list-style-type: none"> 1. The EUT's output RF connector was connected with a short cable to the spectrum analyzer 2. RBW was set to about 1% of emission BW, VBW= 3 times RBW. 3. -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.
Test Instruments:	Refer to section 6 for details
Test mode:	Refer to section 7.1 for details
Test results:	Pass

Measurement Data: The detailed test data see Appendix

7.6 MODULATION CHARACTERISTIC

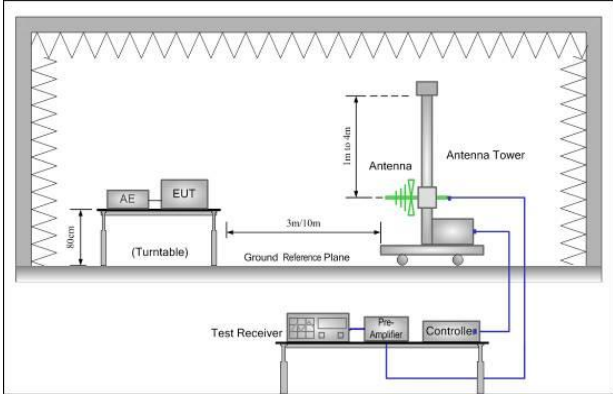
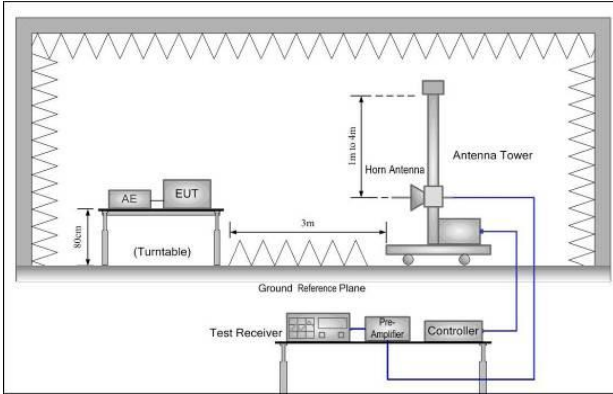
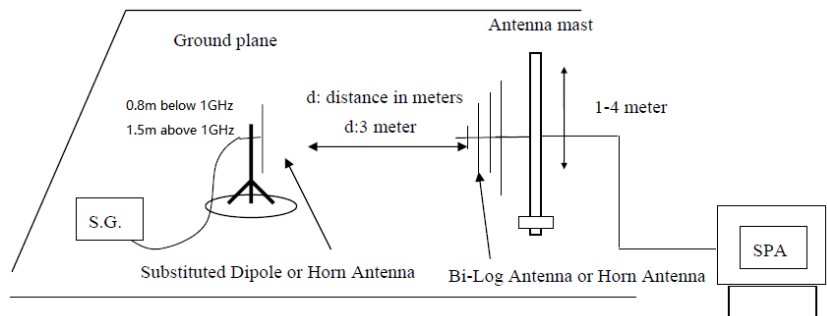
According to FCC § 2.1047(d), Part 27 there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

7.7 Out of band emission at antenna terminals

Test Requirement for FCC:	Part 24.238 (a); FCC Part 27.53(h)/(g)
Limit:	-25dBm
Test setup:	<pre> graph LR EUT[EUT] --- Splitter[Splitter] Splitter --- CT[Communication Tester] Splitter --- Filter[Filter] Filter --- SPA[SPA] </pre> <p><i>Note: Measurement setup for testing on Antenna connector</i></p>
Test Procedure:	<ol style="list-style-type: none"> 1 The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. 2 The resolution bandwidth of the spectrum analyzer was set at 1MHz, sufficient scans were taken to show the out of band Emissions if any up to 10th harmonic. 3 For the out of band: Set the RBW, VBW = 1MHz, Start=30MHz, Stop= 10th harmonic. 4 Band Edge Requirements: In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions.
Test Instruments:	Refer to section 6 for details
Test mode:	Refer to section 7.1 for details
Test results:	Pass

Measurement Data: The detailed test data see Appendix

7.8 Field strength of spurious radiation measurement

Test Requirement for FCC:	Part 24.238 (a); FCC Part 27.53(h)/(g)					
Limit:	-25dBm					
Test setup:	<p>Below 1GHz</p>  <p>Above 1GHz</p>  <p>Substituted method:</p> 					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1 012mbar
Test Instruments:	Refer to section 6 for details					
Test mode:	Refer to section 7.1 for details					
Test results:	Pass					

Measurement Data

Remark:

1. The emission behavior belongs to narrowband spurious emission.
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

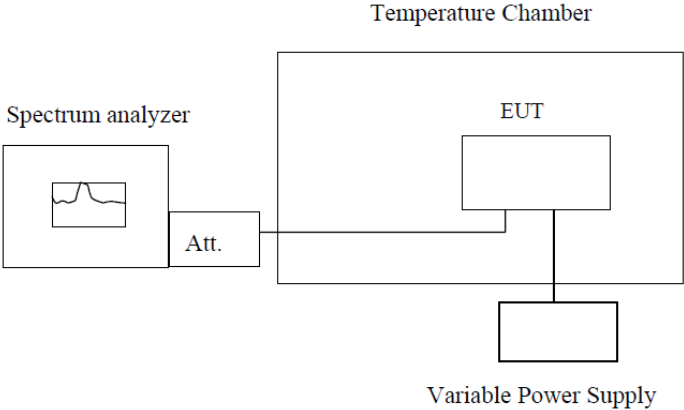
QPSK mode:

Test mode:	Band 7 (5MHz)		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
5005.00	Vertical	-44.52	-25.00	Pass
7507.50	V	-44.65		
10010.00	V	-44.14		
12512.50	V	-43.79		
15015.00	V	-43.93		
5005.00	Horizontal	-44.68	-25.00	Pass
7507.50	H	-41.51		
10010.00	H	-41.62		
12512.50	H	-41.78		
15015.00	H	-40.42		
Test mode:	Band 7 (5MHz)		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
5070.00	Vertical	-40.52	-25.00	Pass
7605.00	V	-42.86		
10140.00	V	-44.96		
12675.00	V	-44.18		
15210.00	V	-44.09		
5070.00	Horizontal	-42.98	-25.00	Pass
7605.00	H	-42.91		
10140.00	H	-42.19		
12675.00	H	-44.34		
15210.00	H	-40.17		
Test mode:	Band 7 (5MHz)		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
5135.00	Vertical	-41.06	-25.00	Pass
7702.50	V	-43.71		
10270.00	V	-43.68		
12837.50	V	-42.40		
15405.00	V	-44.42		
5135.00	Horizontal	-44.18	-25.00	Pass
7702.50	H	-41.63		
10270.00	H	-41.02		
12837.50	H	-44.17		
15405.00	H	-40.29		

16QAM mode:

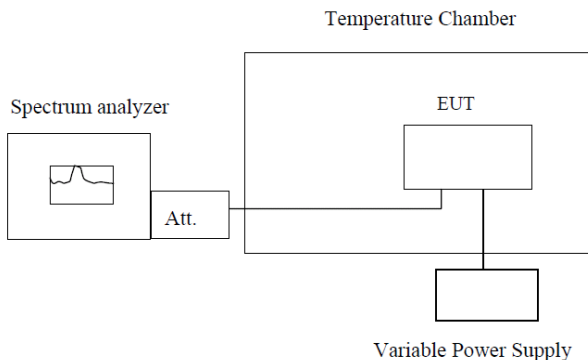
Test mode:		Band 7 (5MHz)		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result	
	Polarization	Level (dBm)			
5005.00	Vertical	-43.76	-25.00	Pass	
7507.50	V	-40.01			
10010.00	V	-40.48			
12512.50	V	-44.27			
15015.00	V	-40.62			
5005.00	Horizontal	-42.00	-25.00	Pass	
7507.50	H	-44.53			
10010.00	H	-40.79			
12512.50	H	-41.39			
15015.00	H	-44.54			
Test mode:		Band 7 (5MHz)		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result	
	Polarization	Level (dBm)			
5070.00	Vertical	-40.21	-25.00	Pass	
7605.00	V	-42.67			
10140.00	V	-40.54			
12675.00	V	-42.28			
15210.00	V	-41.21			
5070.00	Horizontal	-40.50	-25.00	Pass	
7605.00	H	-40.93			
10140.00	H	-44.27			
12675.00	H	-42.41			
15210.00	H	-40.39			
Test mode:		Band 7 (5MHz)		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result	
	Polarization	Level (dBm)			
5135.00	Vertical	-42.61	-25.00	Pass	
7702.50	V	-41.26			
10270.00	V	-42.63			
12837.50	V	-40.37			
15405.00	V	-41.61			
5135.00	Horizontal	-42.95	-25.00	Pass	
7702.50	H	-42.04			
10270.00	H	-42.53			
12837.50	H	-40.10			
15405.00	H	-42.81			

7.9 Frequency stability V.S. Temperature measurement

Test Requirement for FCC:	FCC Part2.1055(a)(1)(b)
Limit:	2.5ppm
Test setup:	 <p style="text-align: center;">Temperature Chamber</p> <p style="text-align: center;">Spectrum analyzer</p> <p style="text-align: center;">Att.</p> <p style="text-align: center;">EUT</p> <p style="text-align: center;">Variable Power Supply</p> <p>Note : Measurement setup for testing on Antenna connector</p>
Test procedure:	<ol style="list-style-type: none"> 1. The equipment under test was connected to an external DC power supply and input rated voltage. 2. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. 3. The EUT was placed inside the temperature chamber. 4. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25°C operating frequency as reference frequency. 5. Turn EUT off and set the chamber temperature to -20°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. 6. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.
Test Instruments:	Refer to section 6 for details
Test mode:	Refer to section 7.1 for details
Test results:	Pass

Measurement Data: The detailed test data see Appendix

7.10 Frequency stability V.S. Voltage measurement

Test Requirement for FCC:	FCC Part2.1055(d)(1)(2)
Limit:	2.5ppm
Test setup:	 <p style="text-align: center;">Temperature Chamber</p> <p style="text-align: center;">Spectrum analyzer Att. EUT</p> <p style="text-align: center;">Variable Power Supply</p> <p>Note : Measurement setup for testing on Antenna connector</p>
Test procedure:	<ol style="list-style-type: none"> 1. Set chamber temperature to 25°C. Use a variable DC power source to power the EUT and set the voltage to rated voltage. 2. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency. 3. Reduce the input voltage to specified extreme voltage variation (+/- 15%) and endpoint, record the maximum frequency change.
Test Instruments:	Refer to section 6 for details
Test mode:	Refer to section 7.1 for details
Test results:	Pass

Measurement Data: The detailed test data see Appendix

8 Test Setup Photo

Reference to the **appendix I** for details.

9 EUT Constructional Details

Reference to the **appendix II** for details.

-----End-----