

FCC Part 18 Measurement and Test Report

For

Ruee Appliances Co., Ltd

No. 100, Jintong Road, Tangxia Town, Pengjiang Section,

Jiangmen City, G.D. China

FCC ID: 2AR5Q-LBSH46S

Test Rule(s):	<u>FCC Part 18</u>
Product Description:	<u>Table luminaire</u>
Tested Model:	<u>LR31857-T1</u>
Report No.:	<u>STR18128198I-2</u>
Sample Receipt Date:	<u>2018-12-18</u>
Tested Date:	<u>2018-12-18 to 2018-12-24</u>
Issued Date:	<u>2018-12-24</u>
Tested By:	<u>Mike Shi / Engineer</u>
Reviewed By:	<u>Silin Chen / EMC Manager</u>
Approved & Authorized By:	<u>Jandy So / PSQ Manager</u>
Prepared By:	

Mike Shi

Silin Chen

Jandy So

Shenzhen SEM Test Technology Co., Ltd.

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,

Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM Test Technology Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS.....	4
1.3 TEST METHODOLOGY.....	4
1.4 TEST FACILITY.....	4
1.5 EUT SETUP AND OPERATION MODE.....	5
1.6 MEASUREMENT UNCERTAINTY.....	5
1.7 TEST EQUIPMENT LIST AND DETAILS.....	6
2. SUMMARY OF TEST RESULTS.....	7
3. CONDUCTED EMISSIONS.....	8
3.1 STANDARD APPLICABLE.....	8
3.2 TEST PROCEDURE.....	8
3.3 BASIC TEST SETUP BLOCK DIAGRAM.....	8
3.4 ENVIRONMENTAL CONDITIONS.....	9
3.5 TEST RECEIVER SETUP.....	9
3.6 SUMMARY OF TEST RESULTS/PLOTS.....	9
4. RADIATED EMISSIONS.....	12
4.1 TEST PROCEDURE.....	12
4.2 TEST RECEIVER SETUP.....	12
4.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	12
4.4 ENVIRONMENTAL CONDITIONS.....	13
4.5 SUMMARY OF TEST RESULTS/PLOTS.....	13

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Ruee Appliances Co., Ltd
Address of applicant: No. 100, Jintong Road, Tangxia Town, Pengjiang
Section, Jiangmen City, G.D. China

Manufacturer: Ruee Appliances Co., Ltd
Address of manufacturer: No. 100, Jintong Road, Tangxia Town, Pengjiang
Section, Jiangmen City, G.D. China

General Description of EUT	
Product Name:	Table luminaire
Trade Name:	Scott Living
Model No.:	LR31857-T1
Adding Model(s):	LBSH46S
<i>Note: The test data is gathered from a production sample, provided by the manufacturer. The appearance of others models listed in the report is different from main-test model LR31857-T1, but the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

Technical Characteristics of EUT	
Rated Voltage:	AC120V/60Hz
Rated Current:	Output(Wireless Charger): 1A
Rated Power:	Output(Wireless Charger): 5W
Power Adapter Model:	/
Wireless Charger Transmit Frequency Range:	110~205kHz

1.2 Test Standards

The tests were performed according to following standards:

FCC Part 18 Subpart C: Industrial, Scientific, and medical medical equipment.

ANSI C63.4-2014:American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

1.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC – Registration No.: 125990

Shenzhen SEM Test Technology Co., Ltd. Laboratory has been recognized to perform compliance testing on equipment subject to the Commissions Declaration Of Conformity (DOC). The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted according to the operation manual for use, more detailed description as follows:

Test Mode List:

Test Mode	Description	Remark	Power Supply Mode
TM1	Wireless charging	Transmit	AC120V/60Hz

EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
AC Cable	3.5	Unshielded	Without Core

Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
/	/	/	/

Special Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
Conducted Emissions	Conducted	9-150kHz ± 3.74 dB
		0.15-30MHz ± 3.34 dB
Radiated Emissions	Radiated	30-200MHz ± 4.52 dB
		0.2-1GHz ± 5.56 dB
		1-6GHz ± 3.84 dB
		6-18GHz ± 3.92 dB

1.7 Test Equipment List and Details

Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
Spectrum Analyzer	Agilent	E4407B	MY41440400	2018-05-22	2019-05-21
Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2018-05-22	2019-05-21
EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2018-05-22	2019-05-21
Amplifier	Agilent	8447F	3113A06717	2018-05-22	2019-05-21
Amplifier	C&D	PAP-1G18	2002	2018-05-22	2019-05-21
Broadband Antenna	Schwarz beck	VULB9163	9163-333	2017-06-08	2018-06-07
Horn Antenna	ETS	3117	00086197	2017-06-08	2018-06-07
Loop Antenna	Schwarz beck	FMZB 1516	9773	2017-06-08	2018-06-07
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2018-05-22	2019-05-21
L.I.S.N	Schwarz beck	NSLK8126	8126-224	2018-05-22	2019-05-21
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2018-05-22	2019-05-21

2. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§ 18.307 (b)	Conducted Emission	Compliant
§ 18.305 (b)	Radiated Emission	Compliant

3. Conducted Emissions

3.1 Standard Applicable

According to FCC 18.307(b), the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies shall not exceed the limits in the following tables:

Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50


3.2 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 18.307 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

3.3 Basic Test Setup Block Diagram

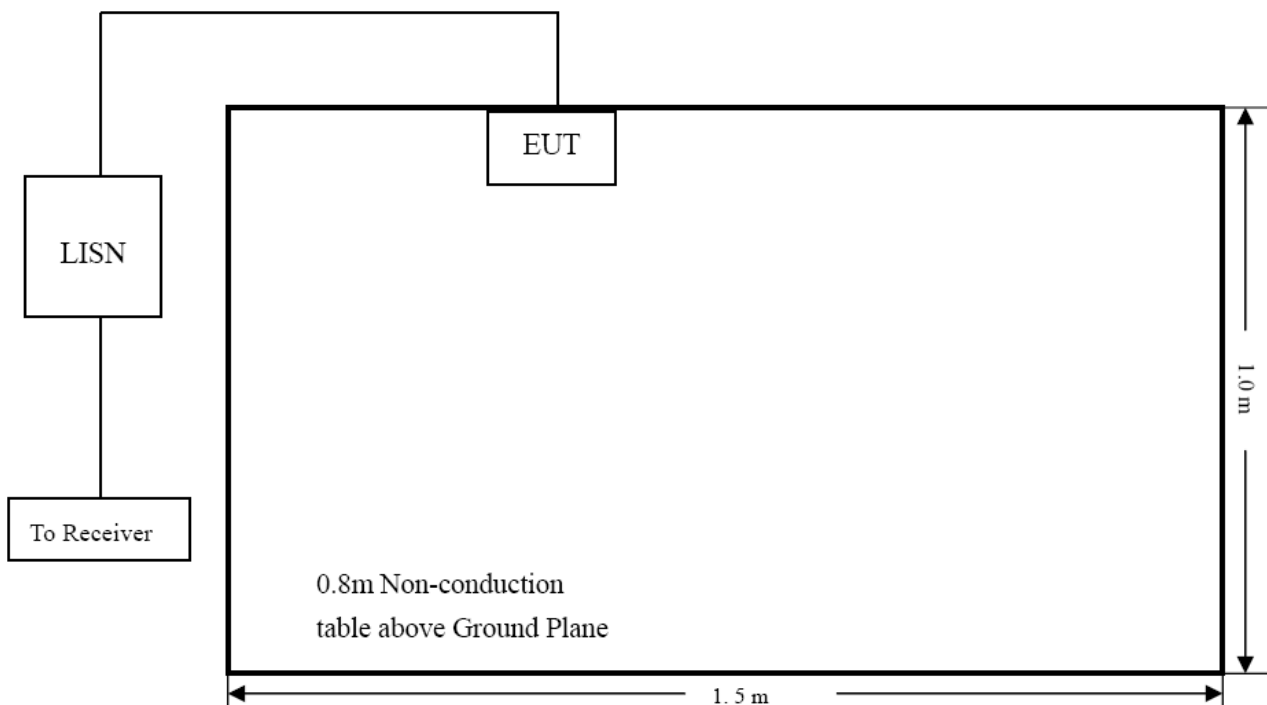

3.4 Environmental Conditions

Temperature:	25° C
Relative Humidity:	54%
ATM Pressure:	1016 mbar

3.5 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:


Start Frequency 150 kHz
Stop Frequency..... 30 MHz
Sweep Speed Auto
IF Bandwidth..... 10 kHz
Quasi-Peak Adapter Bandwidth 9 kHz
Quasi-Peak Adapter Mode Normal

3.6 Summary of Test Results/Plots

According to the data in this section, the EUT complied with the FCC Part 18C Conducted margin for Any non-ISM frequency device, with the *worst* margin reading of:


-8.30 dB at 0.1580 MHz in the Line, QP detector, TM1 detector, 0.15-30MHz

Test mode:	TM1	Polarity:	Line
------------	-----	-----------	------

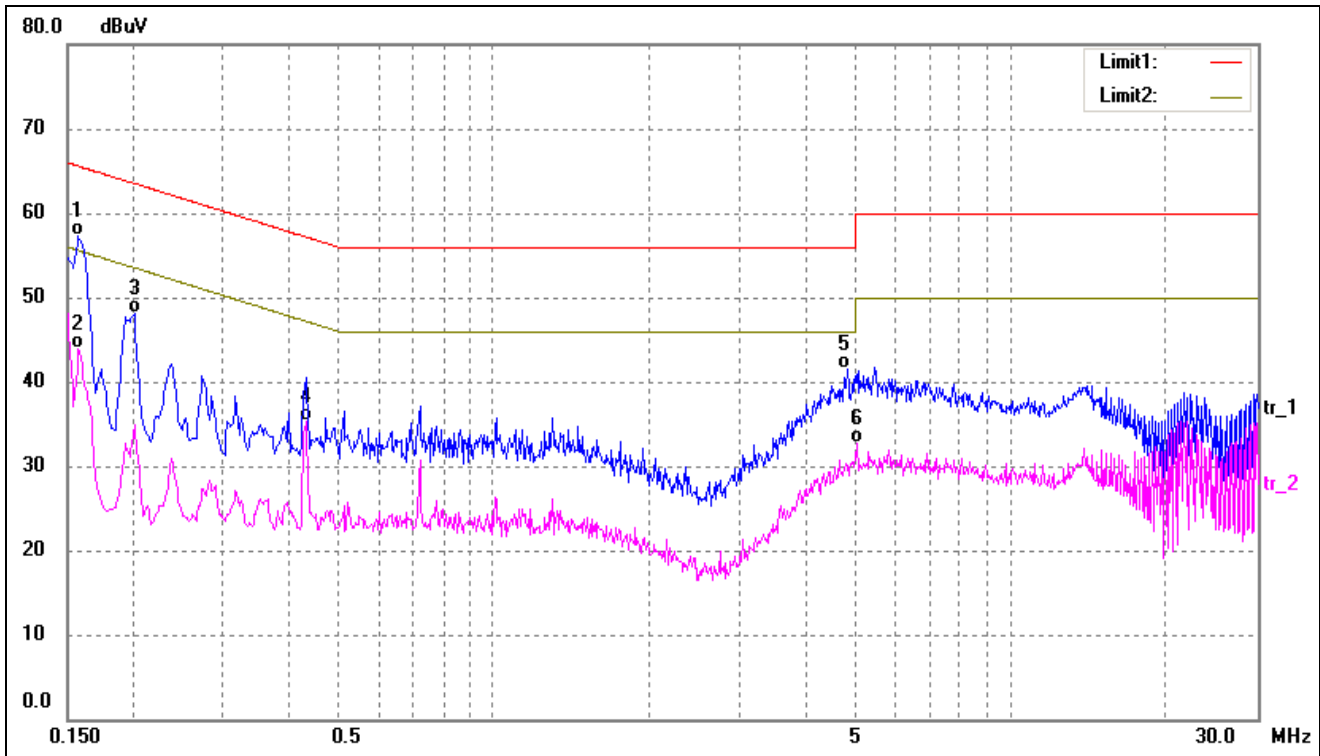

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1580	47.17	10.10	57.27	65.57	-8.30	QP
2	0.1580	33.80	10.10	43.90	55.57	-11.67	AVG
3	0.2020	38.04	10.12	48.16	63.53	-15.37	QP
4	0.4340	25.08	10.26	35.34	47.18	-11.84	AVG
5	4.8460	30.78	10.75	41.53	56.00	-14.47	QP
6	5.0420	21.94	10.76	32.70	50.00	-17.30	AVG

Test mode:	TM1	Polarity:	Neutral
------------	-----	-----------	---------

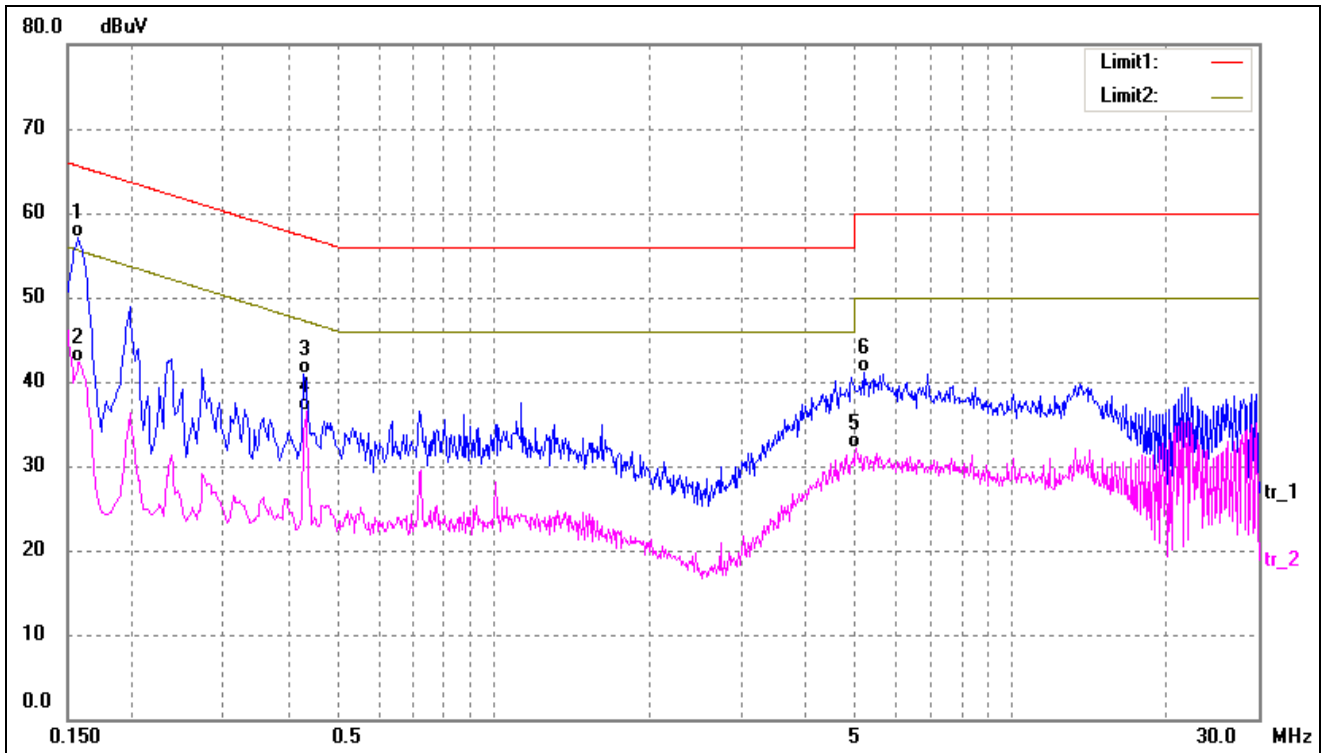

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1580	46.95	10.10	57.05	65.57	-8.52	QP
2	0.1580	32.27	10.10	42.37	55.57	-13.20	AVG
3	0.4300	30.64	10.26	40.90	57.25	-16.35	QP
4	0.4340	26.27	10.26	36.53	47.18	-10.65	AVG
5	5.0180	21.35	10.76	32.11	50.00	-17.89	AVG
6	5.2140	30.41	10.77	41.18	60.00	-18.82	QP


4. Radiated Emissions

4.1 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 18.305 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

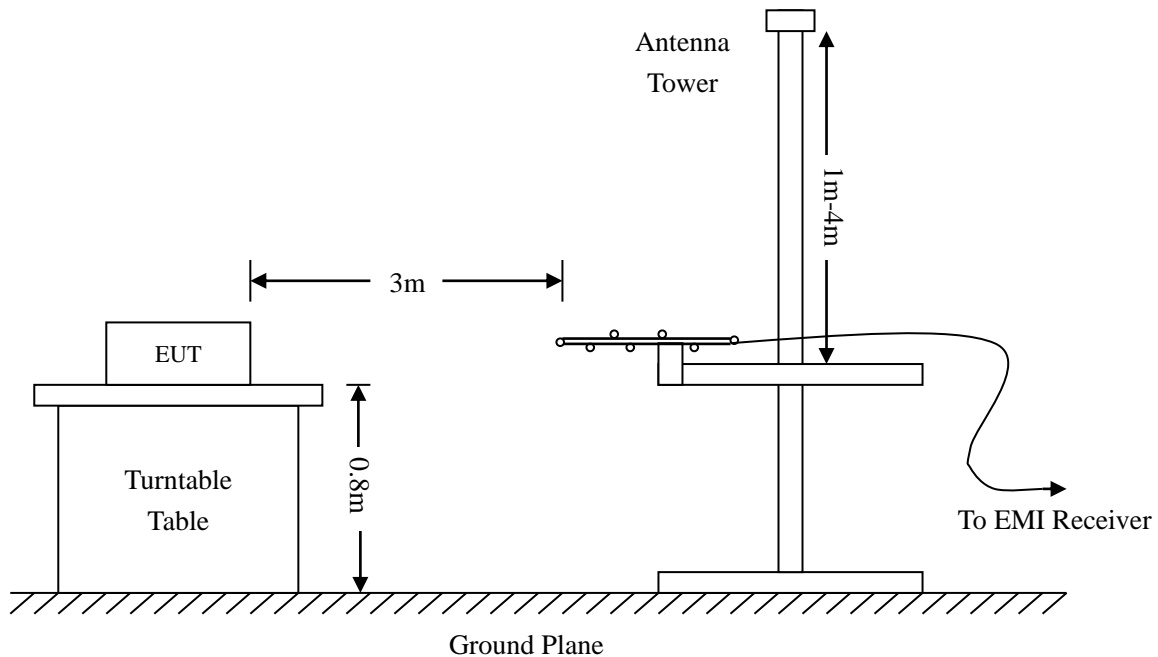

4.2 Test Receiver Setup

Frequency :9kHz-30MHz

RBW=10KHz,

VBW =30KHz

Sweep time= Auto

Trace = max hold

Detector function = peak

Frequency :30MHz-1GHz

RBW=120KHz,

VBW=300KHz

Sweep time= Auto

Trace = max hold

Detector function = peak, QP

Frequency :Above 1GHz

RBW=1MHz,

VBW=3MHz(Peak), 10Hz(AV)

Sweep time= Auto

Trace = max hold

Detector function = peak, AV

4.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of $-6\text{dB}\mu\text{V}$ means the emission is $6\text{dB}\mu\text{V}$ below the maximum limit for Any non-ISM frequency device. The equation for margin calculation is as follows:

Margin = Corr. Ampl. – FCC Part 18.305 Limit

4.4 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	55 %
ATM Pressure:	1011 mbar


4.5 Summary of Test Results/Plots

According to the data, the EUT complied with the FCC Part 18.305 rule, and had the worst margin of:

-20.81 dB at 0.1507 MHz in the Vertical polarization, TM1 mode, Below 30MHz, 3Meters

Plot of Radiated Emissions Test Data (9K-30M)


Test mode:	TM1	Polarity:	Vertical
------------	-----	-----------	----------

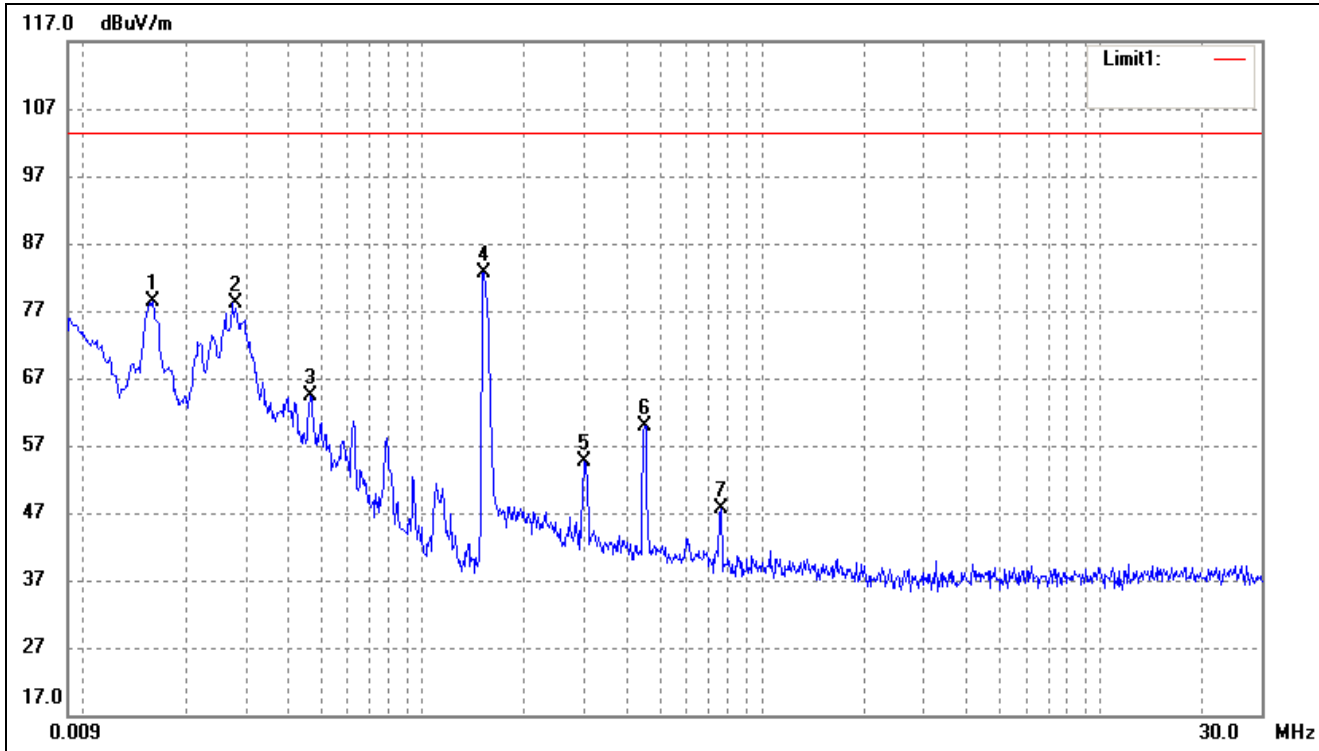

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	0.0160	78.30	0.00	78.30	103.50	-25.20	359	100	peak
2	0.0277	78.05	0.00	78.05	103.50	-25.45	233	100	peak
3	0.0466	64.27	0.00	64.27	103.50	-39.23	77	100	peak
4	0.1507	82.69	0.00	82.69	103.50	-20.81	153	100	peak
5	0.3003	54.51	0.00	54.51	103.50	-48.99	188	100	peak
6	0.4515	59.98	0.00	59.98	103.50	-43.52	157	100	peak
7	0.7549	47.74	0.00	47.74	103.50	-55.76	359	100	peak


Plot of Radiated Emissions Test Data (Above 30MHz)

Test mode:	TM1	Polarity:	Horizontal
------------	-----	-----------	------------

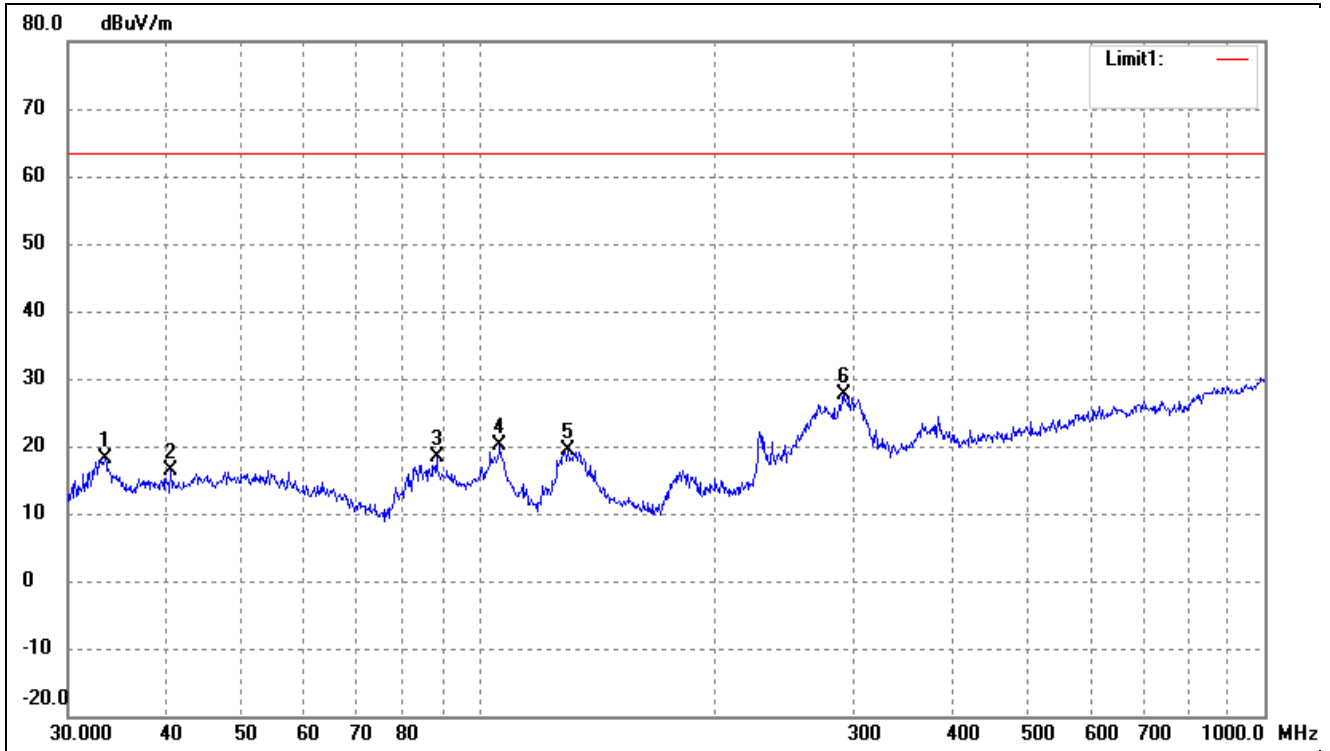

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	33.4449	32.97	-14.82	18.15	63.50	-45.35	325	100	peak
2	40.5591	28.86	-12.56	16.30	63.50	-47.20	100	100	peak
3	88.3421	33.04	-14.69	18.35	63.50	-45.15	85	100	peak
4	106.3850	33.67	-13.51	20.16	63.50	-43.34	117	100	peak
5	129.9226	36.21	-16.88	19.33	63.50	-44.17	112	100	peak
6	291.0360	36.11	-8.44	27.67	63.50	-35.83	346	100	peak

Test mode:	TM1	Polarity:	Vertical
------------	-----	-----------	----------

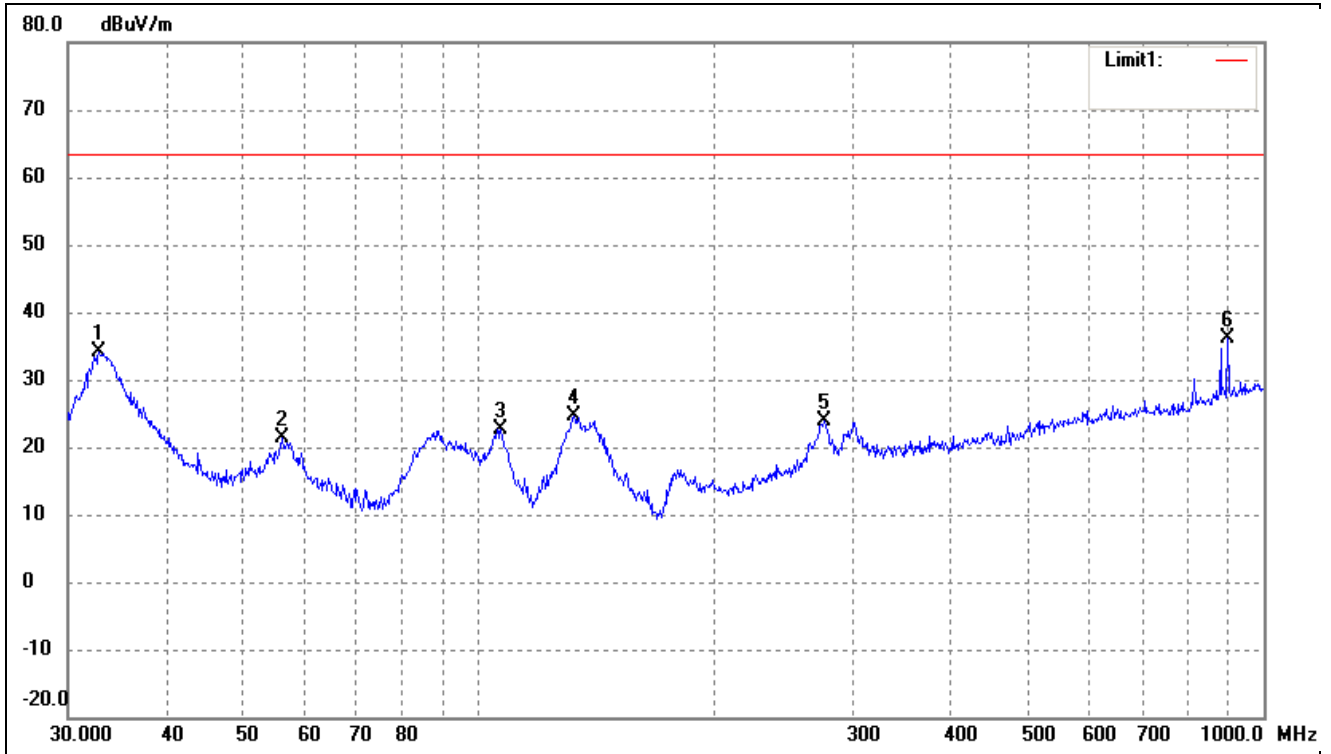

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	32.8637	48.95	-14.83	34.12	63.50	-29.38	208	100	peak
2	56.1974	33.82	-12.44	21.38	63.50	-42.12	95	100	peak
3	106.7587	36.10	-13.55	22.55	63.50	-40.95	332	100	peak
4	132.2206	41.67	-17.05	24.62	63.50	-38.88	105	100	peak
5	275.1570	32.85	-8.97	23.88	63.50	-39.62	119	100	peak
6	900.1474	35.39	0.86	36.25	63.50	-27.25	210	100	peak

***** END OF REPORT *****