

TEST REPORT

ACCORDING TO: FCC 47CFR part 15 subpart C § 15.247 (DTS)

FOR:

Valerann Ltd.

Gateway module of the Smart Road System

Model: AS3100

FCC ID:2AR64A3100

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested. This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.



Table of contents

1	Applicant information.....	3
2	Equipment under test attributes	3
3	Manufacturer information	3
4	Test details.....	3
5	Tests summary.....	4
6	EUT description.....	5
6.1	General information.....	5
6.2	Ports and lines	5
6.3	Changes made in EUT	5
6.4	Operating frequencies	5
6.5	Test configuration.....	5
6.6	Transmitter characteristics	6
7	Transmitter tests according to 47CFR part 15 subpart C requirements	7
7.1	Minimum 6 dB bandwidth	7
7.2	Maximum output power	9
7.3	Field strength of spurious emissions	13
7.4	Band edge radiated emissions	20
7.5	Maximum power spectral density (PSD)	23
7.6	Antenna requirements	26
8	Emission tests according to 47CFR part 15 subpart B requirements	27
8.1	Conducted emissions	27
8.2	Radiated emission measurements	31
9	APPENDIX A Test equipment and ancillaries used for tests	36
10	APPENDIX B Test equipment correction factors.....	37
11	APPENDIX C Measurement uncertainties	41
12	APPENDIX D Specification references	42
13	APPENDIX E Abbreviations and acronyms.....	43



1 Applicant information

Client name: Valerann Ltd.
Address: 26 Elifelet street, Tel Aviv 6608026, Israel
Telephone: +972 54-7414542
E-mail: Daniel.Yakovich@valerann.com
Contact name: Daniel Yakovich

2 Equipment under test attributes

Product name: Gateway module of the Smart Road System
Product type: Automotive
Model(s): AS3100
Serial number: AS3100
Hardware version: 3
Software release: 2
Receipt date: 25-Sep-18

3 Manufacturer information

Manufacturer name: 26 Elifelet street, Tel Aviv 6608026, Israel
Address: +972 54-7414542
Telephone: Daniel.Yakovich@valerann.com
E-Mail: Daniel Yakovich
Contact name: 26 Elifelet street, Tel Aviv 6608026, Israel

4 Test details

Project ID: 31514
Location: Hermon Laboratories Ltd. P.O. Box 23, Binyamina 3055001, Israel
Test started: 08-Oct-18
Test completed: 28-Nov-18
Test specification(s): FCC 47CFR part 15 subpart C § 15.247 (DTS)



5 Tests summary

Test	Status
Transmitter characteristics	
Section 15.247(a)2, 6 dB bandwidth	Pass
Section 15.247(d), Radiated spurious emissions	Pass
Section 15.247(b)3, Peak output power	Pass
Section 15.247(b)5, RF exposure	Pass *
Section 15.247(d), Band edge emissions	Pass
Section 15.247(d), Peak power density	Pass
Section 15.207(a), Conducted emission	Pass
Unintentional emissions	
Section 15.107, Conducted emission at AC power port	Pass
Section 15.109, Radiated emission	Pass

* Pass, the exhibit to the application of certification is provided.

This test report supersedes the previously issued test report identified by Doc ID:VALRAD_FCC.31514_GW. Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested. The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

	Name and Title	Date	Signature
Tested by:	Mr. S. Samokha, test engineer	08-Oct-18 – 28-Nov-18	
Reviewed by:	Mrs. Y. Rapin, technical writer	08-Dec-18	
Approved by:	Mr. K. Zushchuk, project and customer manager, EMC and radio group	04-Feb-19	



6 EUT description

6.1 General information

The EUT is a gateway of the Smart Road System. The EUT is powered from AC mains through AC/DC adapter (model: SWI110-N-USB; input 90-264 VAC / 47-63 Hz; output 5 VDC).

Valerann's smart road system enable effective traffic management and mitigation of congestion, road risks and accidents. The product has two devices: the sensor unit, refer as the road stud [P/N AS2200], and the gateway [P/N AS3100] which collects the data from the road studs and send it to Valerann's cloud-based server. The road stud is a wireless IoT road pavement marker that collects data from the road network. It contains several sensors that enable the capture of road traffic and environmental data.

6.2 Ports and lines

Port type	Port description	Conn. from	Conn. to	Qty.	Cable type	Cable length, m	Indoor / outdoor
Power	DC	CONEC	GATEWAY	1	Shielded	1	outdoor


6.3 Changes made in EUT

No changes were implemented in the EUT during the testing.

6.4 Operating frequencies

Source	Frequency						
Clock	24 MHz	1500 MHz	792 MHz	48 MHz	25 MHz	1 MHz	32.768 kHz
Tx	915 MHz	-	-	-	-	-	-
Rx	915 MHz	-	-	-	-	-	-

6.5 Test configuration

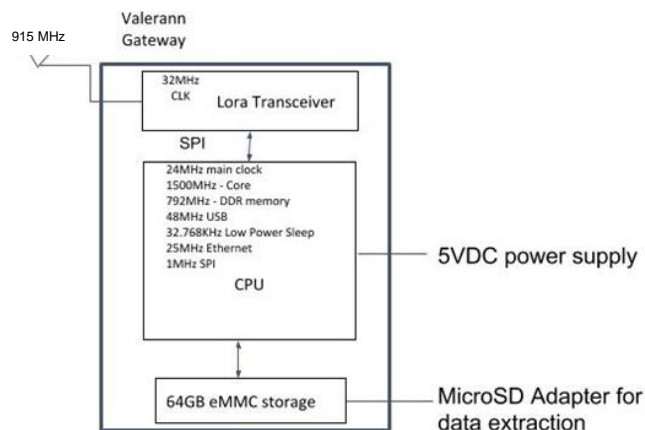



6.6 Transmitter characteristics

Type of equipment			
	Stand-alone (Equipment with or without its own control provisions)		
X	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)		
	Plug-in card (Equipment intended for a variety of host systems)		
Intended use		Condition of use	
	fixed	Always at a distance more than 2 m from all people	
	mobile	Always at a distance more than 20 cm from all people	
X	portable	May operate at a distance closer than 20 cm to human body	
Assigned frequency range		902-928 MHz	
Operating frequency range		915 MHz	
Maximum rated output power		At transmitter 50 Ω RF output connector	NA
		Peak output power	5.63 dBm
Is transmitter output power variable?		X	No
			Yes
			continuous variable
			stepped variable with stepsize
	minimum RF power	dBm	
	maximum RF power	dBm	
Antenna connection			
unique coupling	standard connector	X	integral
			X
			with temporary RF connector
			without temporary RF connector
Antenna/s technical characteristics			
Type	Manufacturer	Model number	Gain
Omnidirectional	Laird	FG9023	5.15 dBi
Transmitter aggregate data rate/s			
Type of modulation		FSK	
Modulating test signal (baseband)			
Transmitter power source			
	Battery	Nominal rated voltage	VDC
			Battery type
X	DC	Nominal rated voltage	5 VDC
	AC mains	Nominal rated voltage	VAC
			Frequency
			Hz
Common power source for transmitter and receiver		X	yes
			no



Test specification:	Section 15.247(a)2, 6 dB bandwidth		
Test procedure:	ANSI C63.10 section 11.8.1		
Test mode:	Compliance	Verdict: PASS	
Date(s):	08-Oct-18		
Temperature: 24.3 °C	Relative Humidity: 46 %	Air Pressure: 1009 hPa	Power: 120 VAC, 50 Hz
Remarks:			

7 Transmitter tests according to 47CFR part 15 subpart C requirements

7.1 Minimum 6 dB bandwidth

7.1.1 General

This test was performed to measure 6 dB bandwidth of the EUT carrier frequency. Specification test limits are given in Table 7.1.1.

Table 7.1.1 6 dB bandwidth limits

Assigned frequency, MHz	Modulation envelope reference points*, dBc	Minimum bandwidth, kHz
902.0 – 928.0	6.0	500.0
2400.0 – 2483.5		
5725.0 – 5850.0		

* - Modulation envelope reference points provided in terms of attenuation below the peak of modulated carrier.

7.1.2 Test procedure

7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and its proper operation was checked.

7.1.2.2 The EUT was set to transmit modulated carrier.

7.1.2.3 The transmitter minimum 6 dB bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.1.2 and associated plot.

Figure 7.1.1 6 dB bandwidth test setup





HERMON LABORATORIES

Test specification:	Section 15.247(a)2, 6 dB bandwidth		
Test procedure:	ANSI C63.10 section 11.8.1		
Test mode:	Compliance	Verdict: PASS	
Date(s):	08-Oct-18		
Temperature: 24.3 °C	Relative Humidity: 46 %	Air Pressure: 1009 hPa	Power: 120 VAC, 50 Hz
Remarks:			

Table 7.1.2 6 dB bandwidth test results

ASSIGNED FREQUENCY BAND: 902 – 928 MHz
 DETECTOR USED: Peak
 SWEEP MODE: Max Hold
 SWEEP TIME: Auto
 RESOLUTION BANDWIDTH: 100 kHz
 VIDEO BANDWIDTH: 300 kHz
 MODULATION ENVELOPE REFERENCE POINTS: 6.0 dBc
 MODULATION: FSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 20 kbps

Carrier frequency, MHz	6 dB bandwidth, kHz	Limit, kHz	Margin, kHz*	Verdict
Mid frequency				
914.61	765.0	500.0	-265.0	Pass


* - Margin = Specification limit – 6 dB bandwidth

Reference numbers of test equipment used

HL 0337	HL 3903	HL 5376						
---------	---------	---------	--	--	--	--	--	--

Full description is given in Appendix A.

Plot 7.1.1 6 dB bandwidth test result at carrier frequency

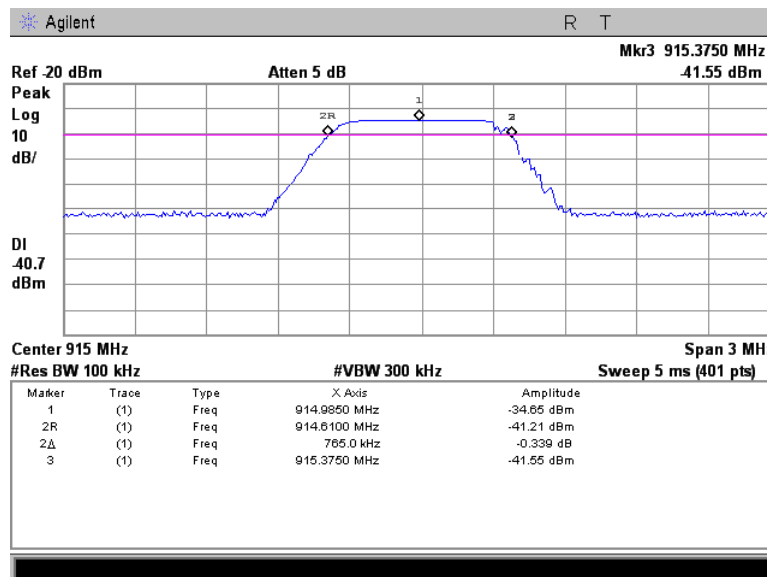



Test specification:	Section 15.247(b), Maximum output power		
Test procedure:	ANSI C63.10 section 11.9.1.1		
Test mode:	Compliance	Verdict:	PASS
Date(s):	10-Oct-18 - 11-Oct-18		
Temperature: 23 °C	Relative Humidity: 49 %	Air Pressure: 1012 hPa	Power: 120 VAC, 50 Hz
Remarks:			

7.2 Maximum output power

7.2.1 General

This test was performed to measure the maximum peak output power radiated by transmitter. Specification test limits are given in Table 7.2.1.

Table 7.2.1 Peak output power limits

Assigned frequency range, MHz	Maximum antenna gain, dBi	Peak output power*		Equivalent field strength limit @ 3m, dB(µV/m)**
		W	dBm	
902.0 – 928.0	6.0	1.0	30.0	131.2
2400.0 – 2483.5				
5725.0 – 5850.0				

*- The limit is provided in terms of conducted RF power at the antenna connector. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power limit shall be reduced below the stated value as follows:

- by 1 dB for every 3 dB that the directional gain of antenna exceeds 6 dBi for fixed point-to-point transmitters operate in 2400-2483.5 MHz band;
- without any corresponding reduction for fixed point-to-point transmitters operate in 5725-5850 MHz band;
- by the amount in dB that the directional gain of antenna exceeds 6 dBi for the rest of transmitters.

**- Equivalent field strength limit was calculated from the peak output power as follows: $E = \sqrt{30 \times P \times G} / r$, where P is peak output power in Watts, r is antenna to EUT distance in meters and G is transmitter antenna gain in dBi.

7.2.2 Test procedure

7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized and its proper operation was checked.

7.2.2.2 The EUT was adjusted to produce maximum available to end user RF output power.

7.2.2.3 The resolution bandwidth of spectrum analyzer was set wider than 6 dB bandwidth of the EUT and the field strength of the EUT carrier frequency was measured with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept in both vertical and horizontal polarizations.

7.2.2.4 The maximum field strength of the EUT carrier frequency was measured as provided in Table 7.2.2 and associated plots.

7.2.2.5 The maximum peak output power was calculated from the field strength of carrier as follows:

$$P = (E \times d)^2 / (30 \times G),$$

where P is the peak output power in W, E is the field strength in V/m, d is the test distance and G is the transmitter numeric antenna gain over an isotropic radiator.

The above equation was converted in logarithmic units for 3 m test distance:

$$\text{Peak output power in dBm} = \text{Field strength in dB}(\mu\text{V/m}) - \text{Transmitter antenna gain in dBi} - 95.23 \text{ dB}$$


7.2.2.6 The worst test results (the lowest margins) were recorded in Table 7.2.2.



HERMON LABORATORIES

Test specification:	Section 15.247(b), Maximum output power		
Test procedure:	ANSI C63.10 section 11.9.1.1		
Test mode:	Compliance	Verdict:	PASS
Date(s):	10-Oct-18 - 11-Oct-18		
Temperature: 23 °C	Relative Humidity: 49 %	Air Pressure: 1012 hPa	Power: 120 VAC, 50 Hz
Remarks:			

Figure 7.2.1 Setup for carrier field strength measurements

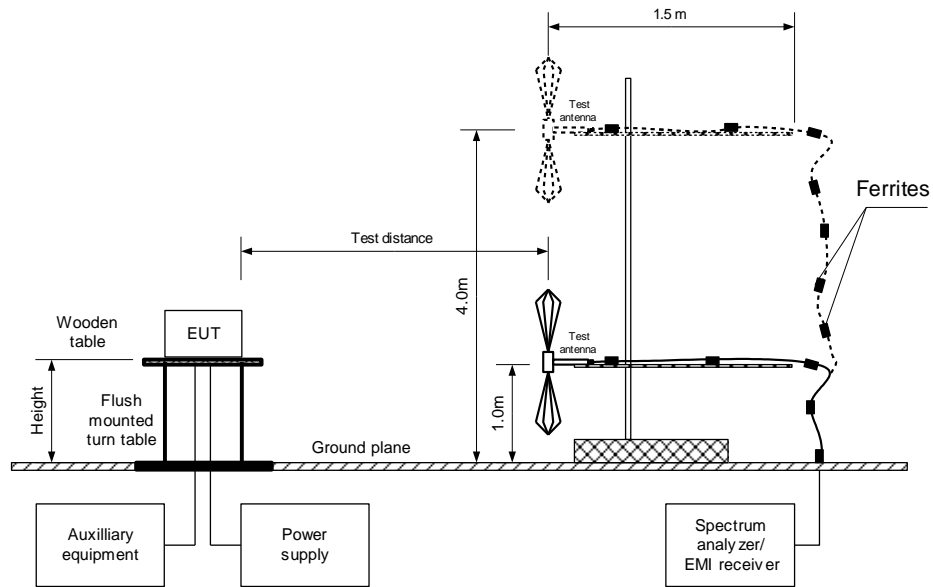



Test specification:	Section 15.247(b), Maximum output power		
Test procedure:	ANSI C63.10 section 11.9.1.1		
Test mode:	Compliance	Verdict: PASS	
Date(s):	10-Oct-18 - 11-Oct-18		
Temperature: 23 °C	Relative Humidity: 49 %	Air Pressure: 1012 hPa	Power: 120 VAC, 50 Hz
Remarks:			

Table 7.2.2 Peak output power test results

ASSIGNED FREQUENCY: 915 MHz
 TEST DISTANCE: 3 m
 TEST SITE: Semi anechoic chamber
 EUT HEIGHT: 0.8 m
 DETECTOR USED: Peak
 TEST ANTENNA TYPE: Biconilog (30 MHz – 1000 MHz)
 MODULATION: FSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 62 kbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 DETECTOR USED: Peak
 EUT 6 dB BANDWIDTH: 530 kHz
 RESOLUTION BANDWIDTH: 3 MHz
 VIDEO BANDWIDTH: 50 MHz

Frequency, MHz	Field strength, dB(μV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	EUT antenna gain, dBi	Peak output power, dBm**	Limit, dBm	Margin, dB***	Verdict
915.10	106.01	V	1.02	-175.0	5.15	5.63	30.0	-24.37	Pass

* - EUT front panel refer to 0 degrees position of turntable.

** - Peak output power was calculated from the field strength of carrier as follows: $P = (E \times d)^2 / (30 \times G)$, where P is the peak output power in W, E is the field strength in V/m, d is the test distance in meters and G is the transmitter numeric antenna gain over an isotropic radiator. The above equation was converted in logarithmic units for 3 m test distance: *Peak output power in dBm = Field strength in dB(μV/m) - Transmitter antenna gain in dBi - 95.23 dB*

*** - Margin = Peak output power – specification limit.

Reference numbers of test equipment used

HL 3901	HL 3818	HL 5288	HL 5112				
---------	---------	---------	---------	--	--	--	--


Full description is given in Appendix A.




HERMON LABORATORIES

Test specification:	Section 15.247(b), Maximum output power		
Test procedure:	ANSI C63.10 section 11.9.1.1		
Test mode:	Compliance	Verdict: PASS	
Date(s):	10-Oct-18 - 11-Oct-18		
Temperature: 23 °C	Relative Humidity: 49 %	Air Pressure: 1012 hPa	Power: 120 VAC, 50 Hz
Remarks:			

Plot 7.2.1 Field strength of carrier at 915 MHz frequency, vertical antenna polarization

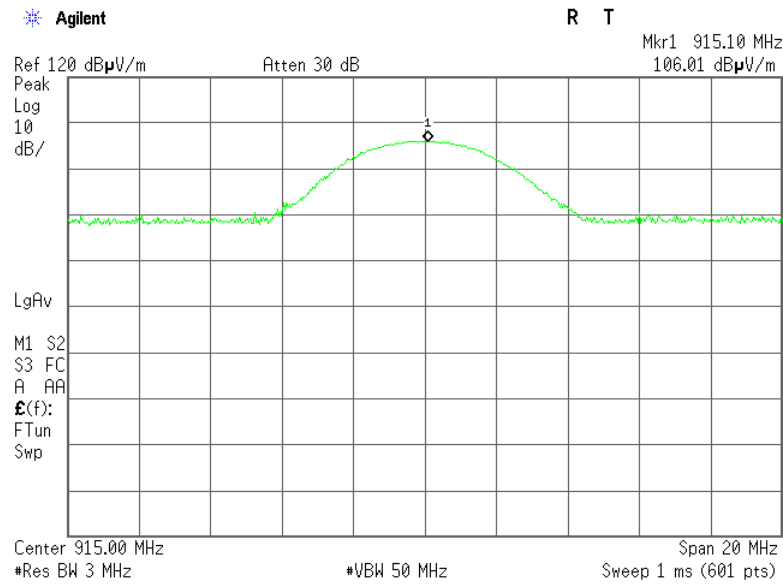

Plot 7.2.2 Field strength of carrier at 915 MHz frequency, horizontal antenna polarization

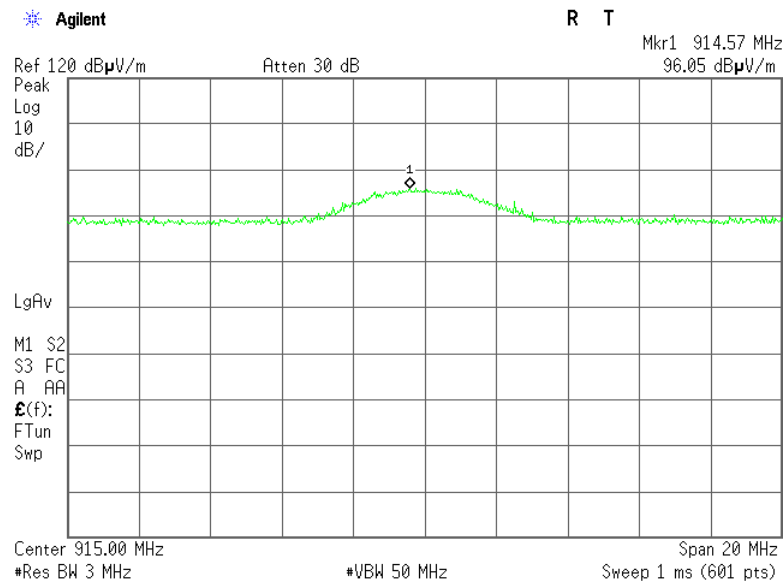



Test specification:	Section 15.247(d), Radiated spurious emissions		
Test procedure:	ANSI C63.10 section 11.12.1		
Test mode:	Compliance	Verdict:	PASS
Date(s):	08-Oct-18 - 11-Oct-18		
Temperature: 23 °C	Relative Humidity: 49 %	Air Pressure: 1010 hPa	Power: 120 VAC, 50 Hz
Remarks:			

7.3 Field strength of spurious emissions

7.3.1 General

This test was performed to measure field strength of spurious emissions from the EUT. Specification test limits are given in Table 7.3.1.

Table 7.3.1 Radiated spurious emissions limits

Frequency, MHz	Field strength at 3 m within restricted bands, dB(μV/m)*			Attenuation of field strength of spurious versus carrier outside restricted bands, dBc***
	Peak	Quasi Peak	Average	
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**	20.0
0.090 – 0.110	NA	108.5 – 106.8**	NA	
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**	
0.490 – 1.705	NA	73.8 – 63.0**	NA	
1.705 – 30.0*		69.5		
30 – 88		40.0		
88 – 216		43.5		
216 – 960		46.0		
960 - 1000		54.0		
1000 – 10 th harmonic	74.0	NA	54.0	

* - The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$Lims_2 = Lims_1 + 40 \log (S_1/S_2),$$

where S₁ and S₂ – standard defined and test distance respectively in meters.

** - The limit decreases linearly with the logarithm of frequency.

*** - The field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.

7.3.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized and the performance check was conducted.

7.3.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.3.2.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.

7.3.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.3.3.1 The EUT was set up as shown in Figure 7.3.2, Figure 1.1.3, energized and the performance check was conducted.

7.3.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.

7.3.3.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.



Test specification:	Section 15.247(d), Radiated spurious emissions		
Test procedure:	ANSI C63.10 section 11.12.1		
Test mode:	Compliance	Verdict:	PASS
Date(s):	08-Oct-18 - 11-Oct-18		
Temperature: 23 °C	Relative Humidity: 49 %	Air Pressure: 1010 hPa	Power: 120 VAC, 50 Hz
Remarks:			

Figure 7.3.1 Setup for spurious emission field strength measurements below 30 MHz

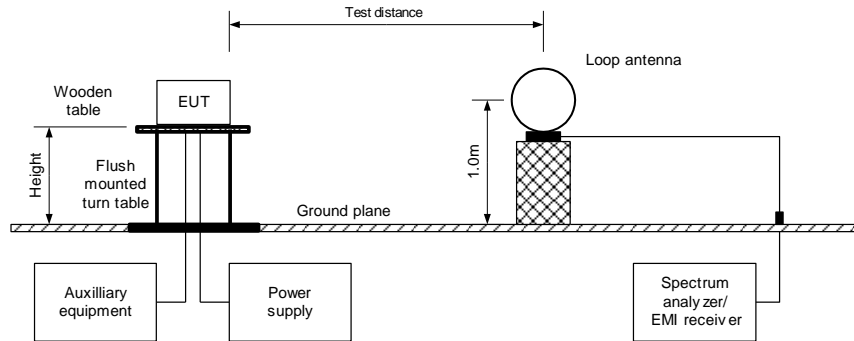


Figure 7.3.2 Setup for spurious emission field strength measurements in 30 – 1000 MHz


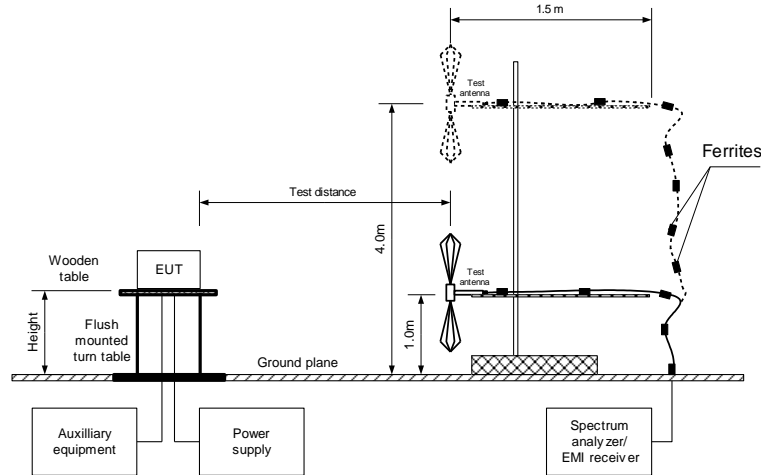


Figure 7.3.3 Setup for spurious emission field strength measurements above 1000 MHz



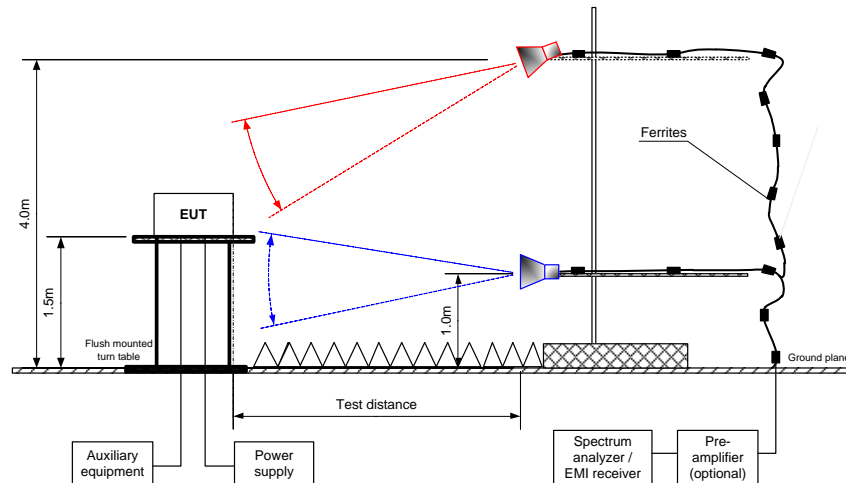

HERMON LABORATORIES

Test specification:	Section 15.247(d), Radiated spurious emissions		
Test procedure:	ANSI C63.10 section 11.12.1		
Test mode:	Compliance	Verdict: PASS	
Date(s):	08-Oct-18 - 11-Oct-18		
Temperature: 23 °C	Relative Humidity: 49 %	Air Pressure: 1010 hPa	Power: 120 VAC, 50 Hz
Remarks:			

Table 7.3.2 Field strength of emissions outside restricted bands

ASSIGNED FREQUENCY: 915 MHz
 INVESTIGATED FREQUENCY RANGE: 0.009 – 9500 MHz
 TEST DISTANCE: 3 m
 MODULATION: FSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 62 kbps
 DUTY CYCLE: 0.39 %
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 100 kHz
 VIDEO BANDWIDTH: 300 kHz
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
 Biconilog (30 MHz – 1000 MHz)
 Double ridged guide (above 1000 MHz)

Frequency, MHz	Field strength of spurious, dB(μV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	Field strength of carrier, dB(μV/m)	Attenuation below carrier, dBc	Limit, dBc	Margin, dB**	Verdict
Mid carrier frequency 915 MHz									
1986.9823	48.43	V	1.81	-19.0	106.01	57.58	20.0	37.58	Pass
3566.1540	54.81	H	1.81	-63.0		51.20		31.20	
5489.6150	49.96	V	2.43	56.0		56.05		36.05	
6403.6263	50.42	V	1.28	5.0		55.59		35.59	
7991.9727	50.23	V	4.00	-38.0		55.78		35.78	

*- EUT front panel refers to 0 degrees position of turntable.
 **- Margin = Attenuation below carrier – specification limit.



Test specification:	Section 15.247(d), Radiated spurious emissions		
Test procedure:	ANSI C63.10 section 11.12.1		
Test mode:	Compliance	Verdict:	PASS
Date(s):	08-Oct-18 - 11-Oct-18		
Temperature: 23 °C	Relative Humidity: 49 %	Air Pressure: 1010 hPa	Power: 120 VAC, 50 Hz
Remarks:			

Table 7.3.3 Field strength of spurious emissions above 1 GHz within restricted bands

ASSIGNED FREQUENCY: 915 MHz
 INVESTIGATED FREQUENCY RANGE: 1000 - 9500 MHz
 TEST DISTANCE: 3 m
 MODULATION: FSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 62 kbps
 DUTY CYCLE: 0.39 %
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 1000 kHz
 TEST ANTENNA TYPE: Double ridged guide

Frequency, MHz	Antenna		Azimuth, degrees*	Peak field strength(VBW=3 MHz)			Average field strength(VBW=10 Hz)				Verdict
	Polarization	Height, m		Measured, dB(µV/m)	Limit, dB(µV/m)	Margin, dB**	Measured, dB(µV/m)	Calculated, dB(µV/m)	Limit, dB(µV/m)	Margin, dB***	
Mid carrier frequency 915 MHz											
1142.9536	V	1.54	-81.0	46.76	74.0	-27.24	46.76	35.06	54.0	-18.94	Pass
2376.2460	V	1.02	-17.0	59.04	74.0	-14.96	59.04	47.34	54.0	-6.66	
3961.2602	V	1.00	-82.0	56.43	74.0	-17.57	56.43	44.73	54.0	-9.27	
4576.3940	H	1.29	93.0	51.91	74.0	-22.09	51.91	40.21	54.0	-13.79	

*- EUT front panel refers to 0 degrees position of turntable.
 **- Margin = Measured field strength - specification limit.
 ***- Margin = Calculated field strength - specification limit,
 where Calculated field strength = Measured field strength + average factor.

Table 7.3.4 Average factor calculation

Transmission pulse		Transmission burst		Transmission train duration, ms	Average factor, dB
Duration, ms	Period, ms	Duration, ms	Period, ms		
26.0	9982	NA	NA	NA	-11.7

*- Average factor was calculated as follows
 for pulse train shorter than 100 ms: $Average\ factor = 20 \times \log_{10} \left(\frac{Pulse\ duration}{Pulse\ period} \times \frac{Burst\ duration}{Train\ duration} \times Number\ of\ bursts\ within\ pulse\ train \right)$
 for pulse train longer than 100 ms: $Average\ factor = 20 \times \log_{10} \left(\frac{Pulse\ duration}{Pulse\ period} \times \frac{Burst\ duration}{100ms} \times Number\ of\ bursts\ within\ 100ms \right)$



HERMON LABORATORIES

Test specification:	Section 15.247(d), Radiated spurious emissions		
Test procedure:	ANSI C63.10 section 11.12.1		
Test mode:	Compliance	Verdict:	PASS
Date(s):	08-Oct-18 - 11-Oct-18		
Temperature: 23 °C	Relative Humidity: 49 %	Air Pressure: 1010 hPa	Power: 120 VAC, 50 Hz
Remarks:			

Table 7.3.5 Field strength of spurious emissions below 1 GHz within restricted bands

ASSIGNED FREQUENCY: 915 MHz MHz
 INVESTIGATED FREQUENCY RANGE: 0.009 – 1000 MHz
 TEST DISTANCE: 3 m
 MODULATION: FSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 62 kbps
 DUTY CYCLE: 0.26 %
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 RESOLUTION BANDWIDTH: 0.2 kHz (9 kHz – 150 kHz)
 9.0 kHz (150 kHz – 30 MHz)
 120 kHz (30 MHz – 1000 MHz)
 VIDEO BANDWIDTH: > Resolution bandwidth
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
 Biconilog (30 MHz – 1000 MHz)

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
Mid carrier frequency 915 MHz								
No emissions were found								Pass

*- Margin = Measured emission - specification limit.

** - EUT front panel refer to 0 degrees position of turntable.

Table 7.3.6 Restricted bands

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.37625 - 8.38675	73 - 74.6	399.9 - 410	2690 - 2900	10.6 - 12.7
0.495 - 0.505	8.41425 - 8.41475	74.8 - 75.2	608 - 614	3260 - 3267	13.25 - 13.4
2.1735 - 2.1905	12.29 - 12.293	108 - 121.94	960 - 1240	3332 - 3339	14.47 - 14.5
4.125 - 4.128	12.51975 - 12.52025	123 - 138	1300 - 1427	3345.8 - 3358	15.35 - 16.2
4.17725 - 4.17775	12.57675 - 12.57725	149.9 - 150.05	1435 - 1626.5	3600 - 4400	17.7 - 21.4
4.20725 - 4.20775	13.36 - 13.41	156.52475 - 156.52525	1645.5 - 1646.5	4500 - 5150	22.01 - 23.12
6.215 - 6.218	16.42 - 16.423	156.7 - 156.9	1660 - 1710	5350 - 5460	23.6 - 24
6.26775 - 6.26825	16.69475 - 16.69525	162.0125 - 167.17	1718.8 - 1722.2	7250 - 7750	31.2 - 31.8
6.31175 - 6.31225	16.80425 - 16.80475	167.72 - 173.2	2200 - 2300	8025 - 8500	36.43 - 36.5
8.291 - 8.294	25.5 - 25.67	240 - 285	2310 - 2390	9000 - 9200	Above 38.6
8.362 - 8.366	37.5 - 38.25	322 - 335.4	2483.5 - 2500	9300 - 9500	

Reference numbers of test equipment used

HL 3901	HL 4360	HL 4956	HL 5288	HL 5112		
---------	---------	---------	---------	---------	--	--


Full description is given in Appendix A.



Test specification:	Section 15.247(d), Radiated spurious emissions		
Test procedure:	ANSI C63.10 section 11.12.1		
Test mode:	Compliance	Verdict:	PASS
Date(s):	08-Oct-18 - 11-Oct-18		
Temperature: 23 °C	Relative Humidity: 49 %	Air Pressure: 1010 hPa	Power: 120 VAC, 50 Hz
Remarks:			


Plot 7.3.1 Radiated emission measurements from 9 kHz to 30 MHz at the 915 MHz carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

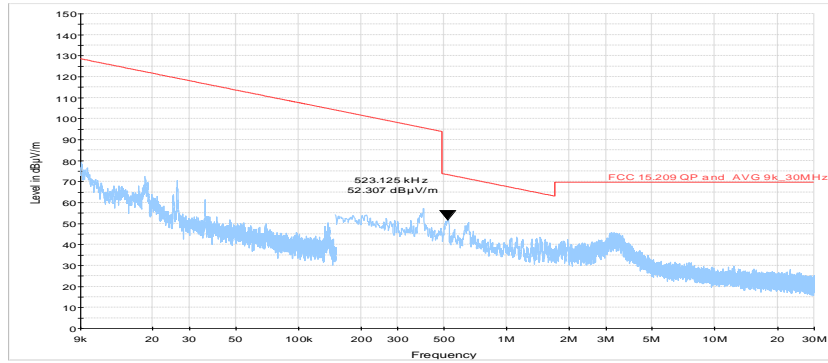

Plot 7.3.2 Radiated emission measurements from 30 to 1000 MHz at the 915 MHz carrier frequency


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

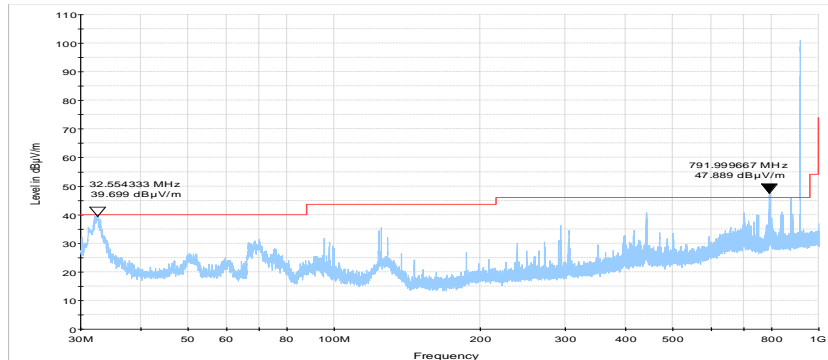

Note: Emission belongs to unintentional portion, refer to section 9.2 of the present Test Report.

Plot 7.3.3 Radiated emission measurements from 1000 to 9500 MHz at the 915 MHz carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

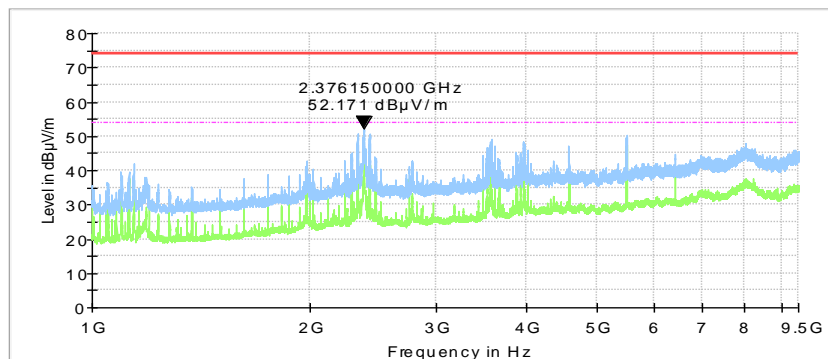






HERMON LABORATORIES

Test specification:	Section 15.247(d), Radiated spurious emissions		
Test procedure:	ANSI C63.10 section 11.12.1		
Test mode:	Compliance	Verdict: PASS	
Date(s):	08-Oct-18 - 11-Oct-18		
Temperature: 23 °C	Relative Humidity: 49 %	Air Pressure: 1010 hPa	Power: 120 VAC, 50 Hz
Remarks:			

Plot 7.3.4 Transmission pulse duration

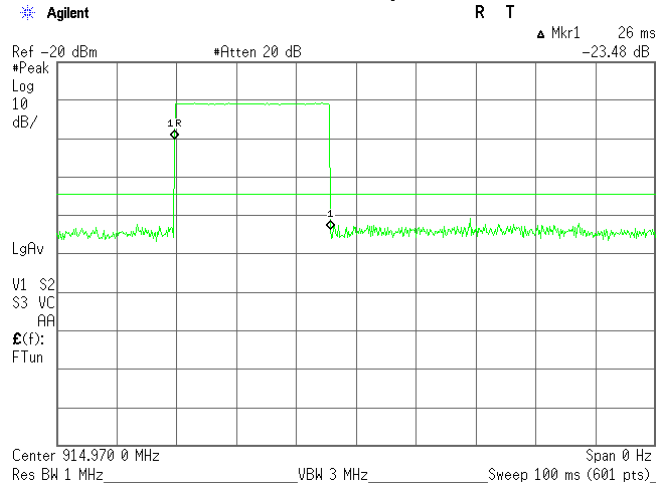

Plot 7.3.5 Transmission pulse period

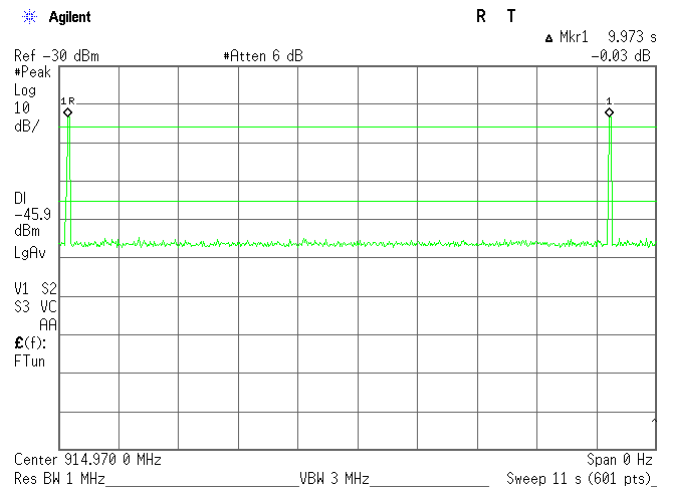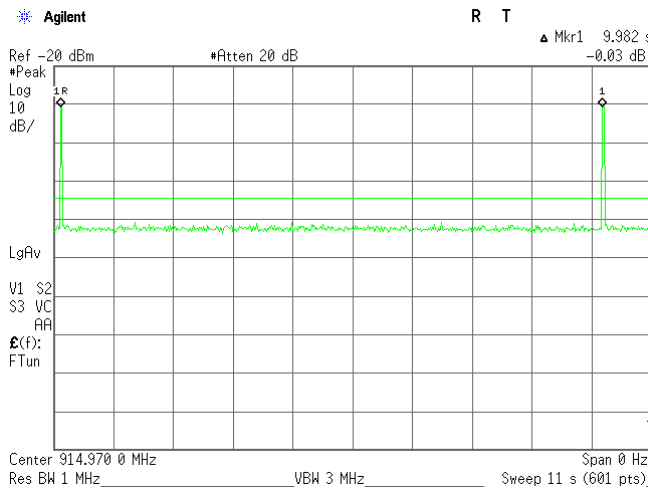



Test specification:	Section 15.247(d), Band edge emissions		
Test procedure:	ANSI C63.10 section 11.12.1		
Test mode:	Compliance	Verdict:	PASS
Date(s):	08-Oct-18 - 01-Nov-18		
Temperature: 24 °C	Relative Humidity: 44 %	Air Pressure: 1011 hPa	Power: 120 VAC, 50 Hz
Remarks:			

7.4 Band edge radiated emissions

7.4.1 General

This test was performed to measure emissions, radiated from the EUT at the assigned frequency band edges. Specification test limits are given in Table 7.4.1.

Table 7.4.1 Band edge emission limits


Output power	Assigned frequency, MHz	Attenuation below carrier*, dBc	Field strength at 3 m within restricted bands, dB(μV/m)	
			Peak	Average
Peak	902.0 – 928.0	20.0	74.0	54.0
	2400.0 – 2483.5			
	5725.0 – 5850.0			
Averaged over a time interval	902.0 – 928.0	30.0	74.0	54.0
	2400.0 – 2483.5			
	5725.0 – 5850.0			

* - Band edge emission limit is provided in terms of attenuation below the peak of modulated carrier measured with the same resolution bandwidth.

7.4.2 Test procedure

- 7.4.2.1 The EUT was set up as shown in Figure 7.4.1, energized normally modulated at the maximum data rate and its proper operation was checked.
- 7.4.2.2 The EUT was adjusted to produce maximum available to end user RF output power at the lowest carrier frequency.
- 7.4.2.3 The spectrum analyzer span was set to capture the carrier frequency and associated modulation products. The resolution bandwidth was set wider than 1 % of the frequency span.
- 7.4.2.4 The spectrum analyzer was set in max hold mode and allowed trace to stabilize. The highest emission level within the authorized band was measured.
- 7.4.2.5 The maximum band edge emission and modulation product outside of the band were measured as provided in **Table 7.4.2** and associated plots and referenced to the highest emission level measured within the authorized band.
- 7.4.2.6 The above procedure was repeated with the EUT adjusted to produce maximum RF output power at the highest carrier frequency.
- 7.4.2.7 The above procedure was repeated with the frequency hopping function enabled.

Figure 7.4.1 Band edge emission test setup

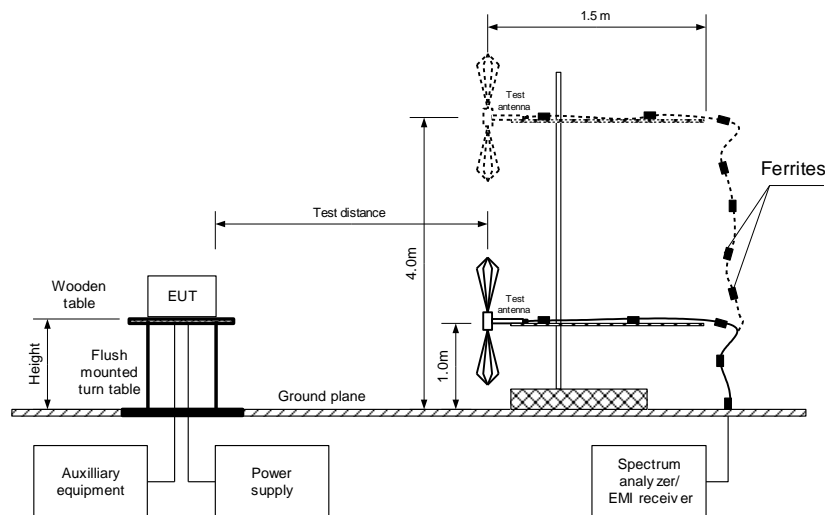



HERMON LABORATORIES

Test specification:	Section 15.247(d), Band edge emissions		
Test procedure:	ANSI C63.10 section 11.12.1		
Test mode:	Compliance	Verdict: PASS	
Date(s):	08-Oct-18 - 01-Nov-18		
Temperature: 24 °C	Relative Humidity: 44 %	Air Pressure: 1011 hPa	Power: 120 VAC, 50 Hz
Remarks:			

Table 7.4.2 Band edge emission test results

ASSIGNED FREQUENCY RANGE: 902-928 MHz
DETECTOR USED: Peak
MODULATION: FSK
MODULATING SIGNAL: PRBS
BIT RATE: 62 kbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum
RESOLUTION BANDWIDTH: 120 kHz
VIDEO BANDWIDTH: ≥ RBW

Frequency, MHz	Band edge emission, dBm	Emission at carrier, dBm	Attenuation below carrier, dBc	Limit, dBc	Margin, dB*	Verdict
Peak power						
902.00	35.61	106.01	70.4	20.0	50.4	Pass
928.00	36.01		70		51	

*- Margin = Attenuation below carrier – specification limit.

Reference numbers of test equipment used

HL 3818	HL 3901	HL 5112	HL 5288				
---------	---------	---------	---------	--	--	--	--


Full description is given in Appendix A.




HERMON LABORATORIES

Test specification:	Section 15.247(d), Band edge emissions		
Test procedure:	ANSI C63.10 section 11.12.1		
Test mode:	Compliance	Verdict:	PASS
Date(s):	08-Oct-18 - 01-Nov-18		
Temperature: 24 °C	Relative Humidity: 44 %	Air Pressure: 1011 hPa	Power: 120 VAC, 50 Hz
Remarks:			

Plot 7.4.1 The highest low band edge emission

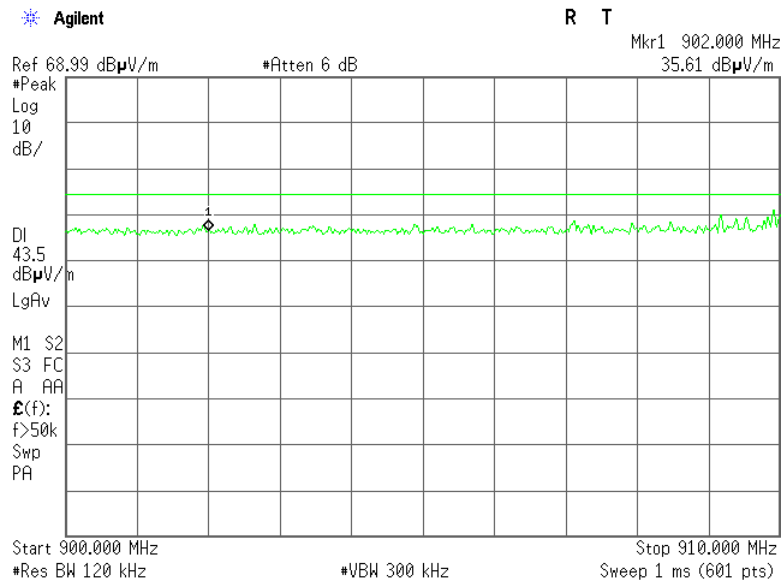

Plot 7.4.2 The highest high band edge emission

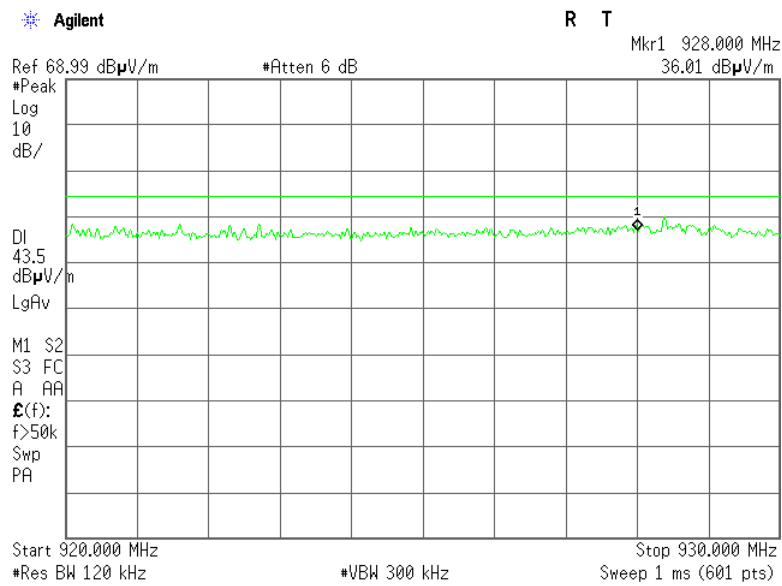



Test specification:	Section 15.247(e), Maximum power spectral density		
Test procedure:	ANSI C63.10 section 11.10.2		
Test mode:	Compliance	Verdict:	PASS
Date(s):	08-Oct-18 - 01-Nov-18		
Temperature: 24 °C	Relative Humidity: 44 %	Air Pressure: 1011 hPa	Power: 120 VAC, 50 Hz
Remarks:			

7.5 Maximum power spectral density (PSD)

7.5.1 General

This test was performed to measure the peak spectral power density radiated by the transmitter RF antenna. Specification test limits are given in Table 7.5.1.

Table 7.5.1 Peak spectral power density limits

Assigned frequency range, MHz	Measurement bandwidth, kHz	Peak spectral power density, dBm	Equivalent field strength limit @ 3m, dB(μV/m)*
902.0 – 928.0	3.0	8.0	103.2
2400.0 – 2483.5			
5725.0 – 5850.0			

* - Equivalent field strength limit was calculated from the peak spectral power density as follows: $E = \sqrt{30 \times P} / r$, where P is peak spectral power density and r is antenna to EUT distance in meters.

7.5.2 Test procedure for field strength measurements

7.5.2.1 The EUT was set up as shown in Figure 7.5.1, energized and its proper operation was checked.


7.5.2.2 The EUT was adjusted to produce maximum available to end user RF output power.

7.5.2.3 The field strength of the EUT carrier frequency was measured with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept in both vertical and horizontal polarizations.

7.5.2.4 The frequency span of spectrum analyzer was set to capture the entire 6 dB band of the transmitter, in peak hold mode with resolution bandwidth set to 3.0 kHz, video bandwidth wider than resolution bandwidth, auto sweep time and sufficient number of sweeps was allowed for trace stabilization. The spectrum lines spacing was verified to be wider than 3 kHz. Otherwise the resolution bandwidth was reduced until individual spectrum lines were resolved and the power of individual spectrum lines was integrated over 3 kHz band.

7.5.2.5 The peak of emission was zoomed with span set just wide enough to capture the emission peak area and sweep time was set equal to span width divided by resolution bandwidth. Spectrum analyzer was set in peak hold mode, sufficient number of sweeps was allowed for trace stabilization and peak spectral power density was measured as provided in Table 7.5.2 and associated plots.

Figure 7.5.1 Setup for carrier field strength measurements

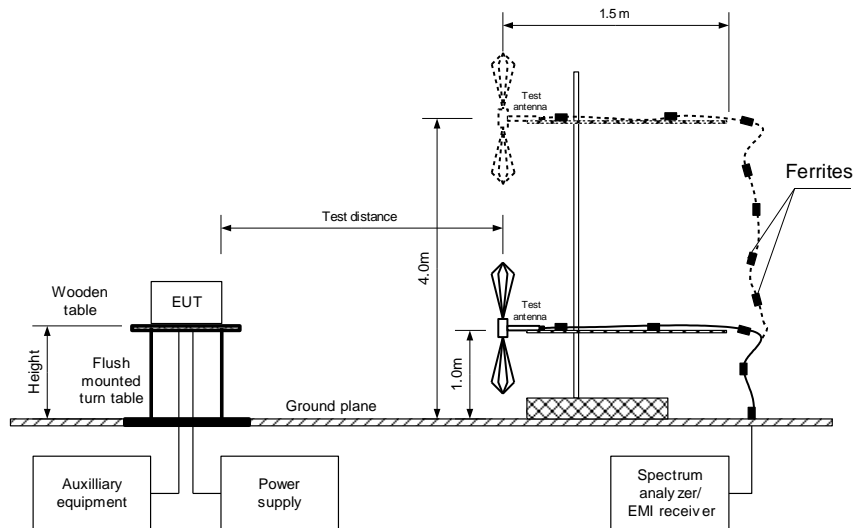



Test specification:	Section 15.247(e), Maximum power spectral density		
Test procedure:	ANSI C63.10 section 11.10.2		
Test mode:	Compliance	Verdict: PASS	
Date(s):	08-Oct-18 - 01-Nov-18		
Temperature: 24 °C	Relative Humidity: 44 %	Air Pressure: 1011 hPa	Power: 120 VAC, 50 Hz
Remarks:			

Table 7.5.2 Field strength measurement of peak spectral power density

ASSIGNED FREQUENCY: 902-928 MHz
TEST DISTANCE: 3 m
TEST SITE: Semi anechoic chamber
EUT HEIGHT: 0.8 m
DETECTOR USED: Peak
RESOLUTION BANDWIDTH: 10 kHz
VIDEO BANDWIDTH: 30 kHz
TEST ANTENNA TYPE: Biconilog (30 MHz – 1000 MHz)
Double ridged guide (above 1000 MHz)
MODULATION: FSK
MODULATING SIGNAL: PRBS
BIT RATE: 62 kbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

Frequency, MHz	Field strength, dB(µV/m)	EUT antenna gain, dBi	Limit, dB(µV/m)	Margin, dB*	Antenna polarization	Antenna height, m	Turn-table position**, degrees
915	101.83	0	103.2	-1.37	Vertical	1.02	-175.0

*- Margin = Field strength - EUT antenna gain - calculated field strength limit.

** - EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used

HL 2909	HL 3615	HL 4276	HL 5288	HL 5376			
---------	---------	---------	---------	---------	--	--	--


Full description is given in Appendix A.



HERMON LABORATORIES

Test specification:	Section 15.247(e), Maximum power spectral density		
Test procedure:	ANSI C63.10 section 11.10.2		
Test mode:	Compliance	Verdict: PASS	
Date(s):	08-Oct-18 - 01-Nov-18		
Temperature: 24 °C	Relative Humidity: 44 %	Air Pressure: 1011 hPa	Power: 120 VAC, 50 Hz
Remarks:			

Plot 7.5.1 Peak spectral power density at carrier frequency within 6 dB band

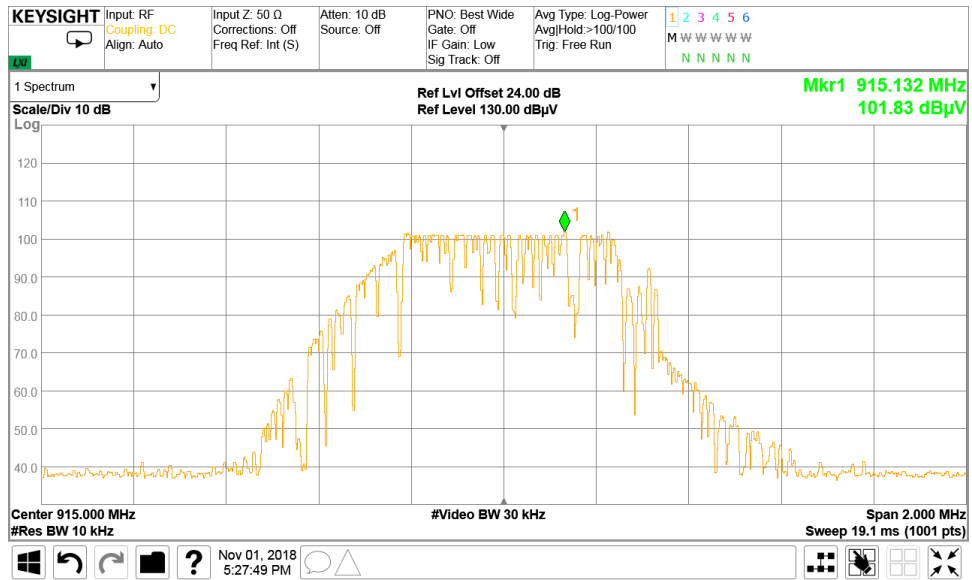



Test specification:	FCC Part 15, Section 203, Antenna requirements		
Test procedure:	Visual inspection		
Test mode:	Compliance	Verdict:	PASS
Date(s):	08-Oct-18		
Temperature: 26 °C	Relative Humidity: 40 %	Air Pressure: 1005 hPa	Power: 120 VAC, 50 Hz
Remarks:			

7.6 Antenna requirements


The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters.

The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.6.1.

Table 7.6.1 Antenna requirements

Requirement	Rationale	Verdict
The transmitter antenna is permanently attached	Visual inspection	Comply
The transmitter employs a unique antenna connector	NA	
The transmitter requires professional installation	NA	

Photograph 7.6.1 Antenna assembly

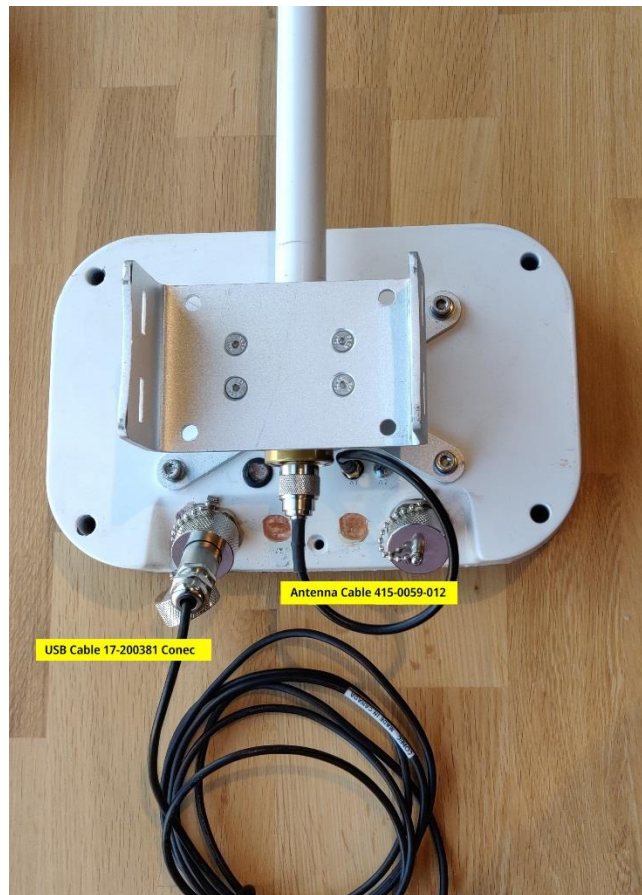



Test specification:	Section 15.107, Conducted emission at AC power port		
Test procedure:	ANSI C63.4, Sections 11.5 and 12.1.3		
Test mode:	Compliance	Verdict:	PASS
Date(s):	01-Nov-18		
Temperature: 24 °C	Relative Humidity: 43 %	Air Pressure: 1020 hPa	Power: 120 VAC, 50 Hz
Remarks:			

8 Emission tests according to 47CFR part 15 subpart B requirements

8.1 Conducted emissions

8.1.1 General

This test was performed to measure common mode conducted emissions at the mains power port. Specification test limits are given in Table 8.1.1. The worst test results (the lowest margins) were recorded in Table 8.1.2 and shown in the associated plots.

Table 8.1.1 Limits for conducted emissions

Frequency, MHz	Class B limit, dB(μ V)		Class A limit, dB(μ V)	
	QP	AVRG	QP	AVRG
0.15 - 0.5	66 - 56*	56 - 46*	79	66
0.5 - 5.0	56	46	73	60
5.0 - 30	60	50	73	60

* The limit decreases linearly with the logarithm of frequency.

8.1.2 Test procedure

8.1.2.1 The EUT was set up as shown in Figure 8.1.1 and associated photographs, energized and the performance check was conducted.


8.1.2.2 The measurements were performed at power terminals with the LISN, connected to a spectrum analyzer in the frequency range referred to in Table 8.1.2. Unused coaxial connector of the LISN was terminated with 50 Ohm. Quasi-peak and average detectors were used throughout the testing.

8.1.2.3 The position of the device cables was varied to determine maximum emission level.



Test specification:	Section 15.107, Conducted emission at AC power port		
Test procedure:	ANSI C63.4, Sections 11.5 and 12.1.3		
Test mode:	Compliance	Verdict:	PASS
Date(s):	01-Nov-18		
Temperature: 24 °C	Relative Humidity: 43 %	Air Pressure: 1020 hPa	Power: 120 VAC, 50 Hz
Remarks:			

Figure 8.1.1 Setup for conducted emission measurements

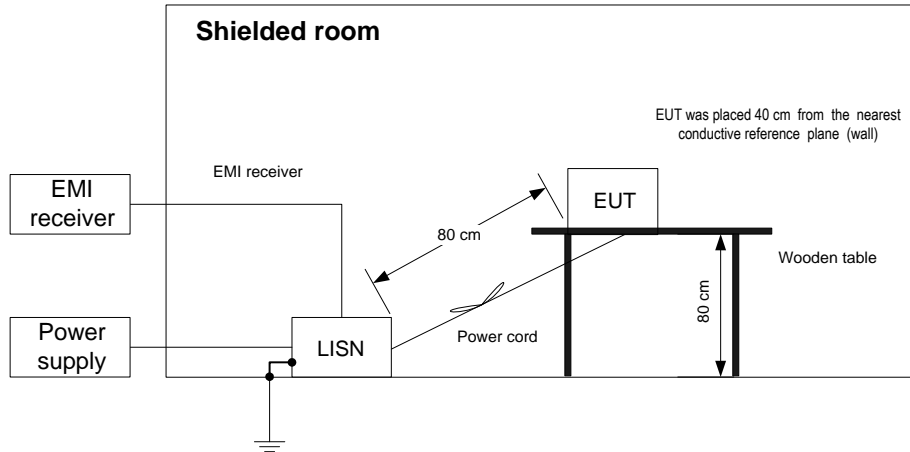

Photograph 8.1.1 Setup for conducted emission measurements





HERMON LABORATORIES

Test specification:	Section 15.107, Conducted emission at AC power port		
Test procedure:	ANSI C63.4, Sections 11.5 and 12.1.3		
Test mode:	Compliance	Verdict: PASS	
Date(s):	01-Nov-18		
Temperature: 24 °C	Relative Humidity: 43 %	Air Pressure: 1020 hPa	Power: 120 VAC, 50 Hz
Remarks:			

Table 8.1.2 Conducted emission test results

LINE: AC mains
LIMIT: Class A
EUT OPERATING MODE: Receive / Stand-by
EUT SET UP: TABLE-TOP
TEST SITE: SHIELDED ROOM
DETECTORS USED: PEAK / QUASI-PEAK / AVERAGE
FREQUENCY RANGE: 150 kHz - 30 MHz
RESOLUTION BANDWIDTH: 9 kHz

Frequency, MHz	Peak emission, dB(µV)	Quasi-peak			Average			Line ID	Verdict
		Measured emission, dB(µV)	Limit, dB(µV)	Margin, dB*	Measured emission, dB(µV)	Limit, dB(µV)	Margin, dB*		
0.227	55.7	52.8	79.0	-26.2	39.8	66.0	-26.2	L1	Pass
0.450	51.1	46.9	79.0	-32.1	28.4	66.0	-37.6		
0.697	46.1	44.5	73.0	-28.5	30.8	60.0	-29.2		
0.910	40.7	37.3	73.0	-35.7	26.3	60.0	-33.7		
1.126	40.5	36.3	73.0	-36.7	18.9	60.0	-41.1		
1.355	42.3	38.1	73.0	-34.9	17.4	60.0	-42.6		
0.226	54.3	52.4	79.0	-26.6	35.8	66.0	-30.2	L2	Pass
0.451	50.3	47.2	79.0	-31.8	27.4	66.0	-38.6		
0.692	47.6	45.9	73.0	-27.1	31.3	60.0	-28.7		
0.931	42.6	39.8	73.0	-33.2	24.8	60.0	-35.2		
1.354	45.6	42.1	73.0	-30.9	21.0	60.0	-39.0		
2.327	41.9	37.6	73.0	-35.4	21.0	60.0	-39.0		

*- Margin = Measured emission - specification limit.

Reference numbers of test equipment used

HL 0495	HL 0787	HL 3016	HL 4278	HL 4778			
---------	---------	---------	---------	---------	--	--	--

Full description is given in Appendix A.



HERMON LABORATORIES


Test specification:	Section 15.107, Conducted emission at AC power port		
Test procedure:	ANSI C63.4, Sections 11.5 and 12.1.3		
Test mode:	Compliance	Verdict:	PASS
Date(s):	01-Nov-18		
Temperature: 24 °C	Relative Humidity: 43 %	Air Pressure: 1020 hPa	Power: 120 VAC, 50 Hz
Remarks:			

Plot 8.1.1 Conducted emission measurements

LINE: L1
 LIMIT: Class A
 EUT OPERATING MODE: Receive / Stand-by
 LIMIT: QUASI-PEAK, AVERAGE
 DETECTOR: PEAK



ACTV DET: PEAK
 MERS DET: PEAK OP AVG
 MKR 220 kHz
 55.55 dBµV

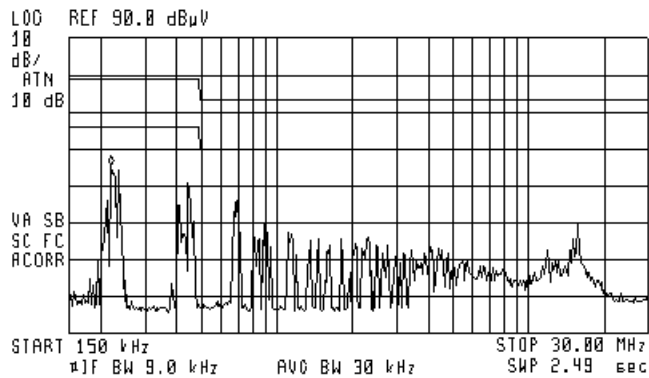


Plot 8.1.2 Conducted emission measurements

LINE: L2
 LIMIT: Class A
 EUT OPERATING MODE: Receive / Stand-by
 LIMIT: QUASI-PEAK, AVERAGE
 DETECTOR: PEAK



ACTV DET: PEAK
 MERS DET: PEAK OP AVG
 MKR 220 kHz
 52.97 dBµV

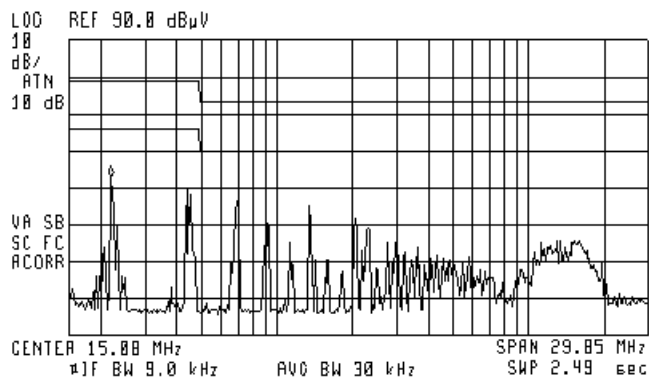



Test specification:	Section 15.109, Radiated emission			
Test procedure:	ANSI C63.4, Sections 11.6 and 12.1.4			
Test mode:	Compliance	Verdict:		PASS
Date(s):	08-Oct-18 - 11-Oct-18			
Temperature: 23 °C	Relative Humidity: 47 %	Air Pressure: 1010 hPa	Power: 120 VAC, 50 Hz	
Remarks:				

8.2 Radiated emission measurements

8.2.1 General

This test was performed to measure radiated emissions from the EUT enclosure. Specification test limits are given in Table 8.2.1.

Table 8.2.1 Radiated emission test limits

Frequency, MHz	Class B limit, dB(μ V/m)		Class A limit, dB(μ V/m)	
	10 m distance	3 m distance	10 m distance	3 m distance
30 - 88	29.5*	40.0	39.0	49.5*
88 - 216	33.0*	43.5	43.5	54.0*
216 - 960	35.5*	46.0	46.4	56.9*
Above 960	43.5*	54.0	49.5	60.0*

* The limit for test distance other than specified was calculated using the inverse linear distance extrapolation factor as follows: $Lims_2 = Lims_1 + 20 \log(S_1/S_2)$, where S_1 and S_2 – standard defined and test distance respectively in meters.

8.2.2 Test procedure for measurements in semi-anechoic chamber

8.2.2.1 The EUT was set up as shown in Figure 8.2.1 and associated photographs, energized and the performance check was conducted.


8.2.2.2 The specified frequency range was investigated with biconilog antenna connected to EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal and the EUT cables position was varied.

8.2.2.3 The worst test results (the lowest margins) were recorded in Table 8.2.2 and shown in the associated plots.





Test specification:	Section 15.109, Radiated emission		
Test procedure:	ANSI C63.4, Sections 11.6 and 12.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	08-Oct-18 - 11-Oct-18		
Temperature: 23 °C	Relative Humidity: 47 %	Air Pressure: 1010 hPa	Power: 120 VAC, 50 Hz
Remarks:			

Figure 8.2.1 Setup for radiated emission measurements

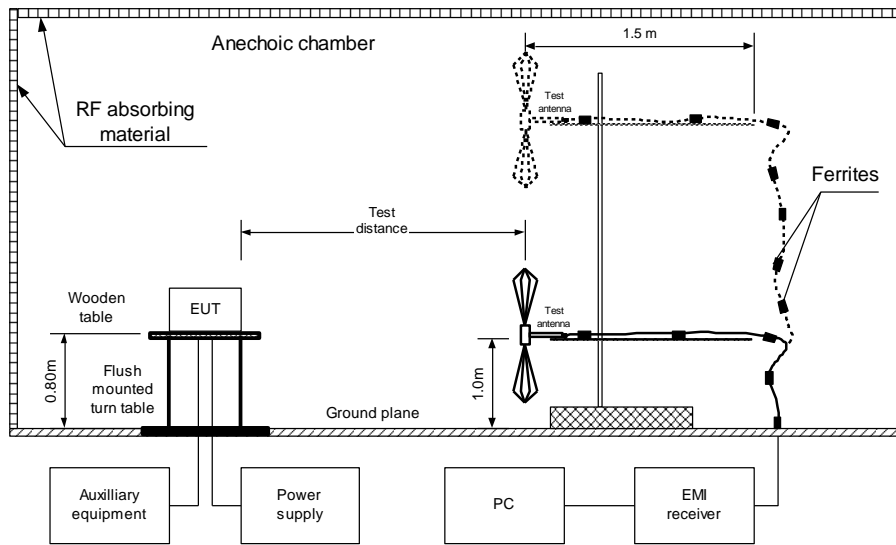

Photograph 8.2.1 Setup for final radiated emission measurements, general view

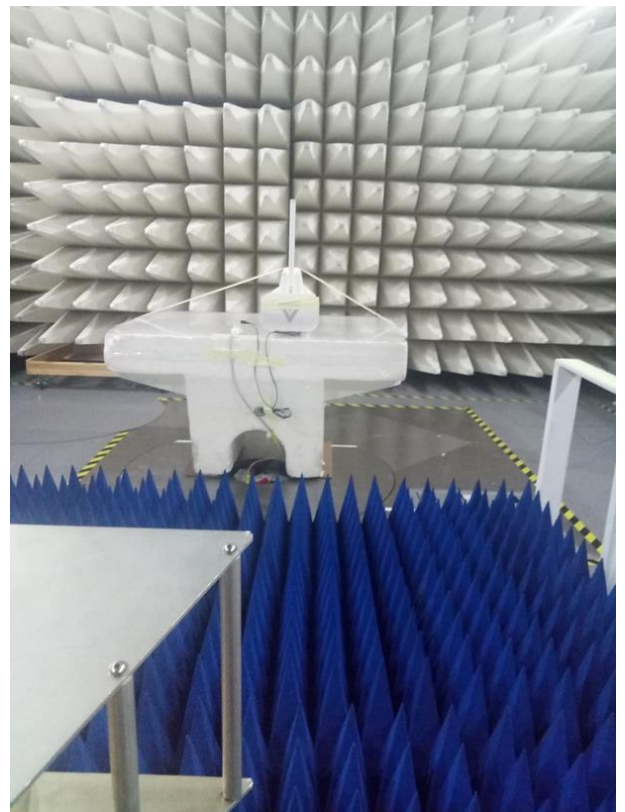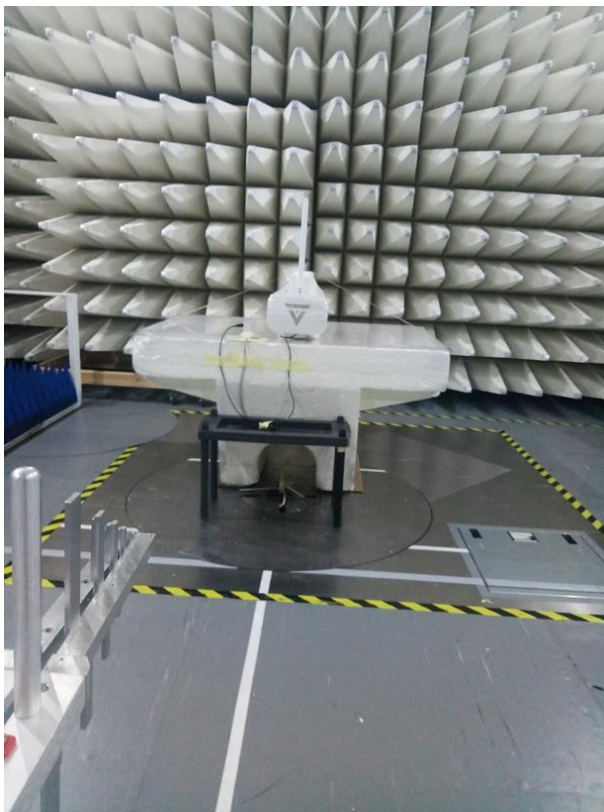




HERMON LABORATORIES

Test specification:	Section 15.109, Radiated emission		
Test procedure:	ANSI C63.4, Sections 11.6 and 12.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	08-Oct-18 - 11-Oct-18		
Temperature: 23 °C	Relative Humidity: 47 %	Air Pressure: 1010 hPa	Power: 120 VAC, 50 Hz
Remarks:			

Photograph 8.2.2 Setup for final radiated emission measurements, EUT cabling

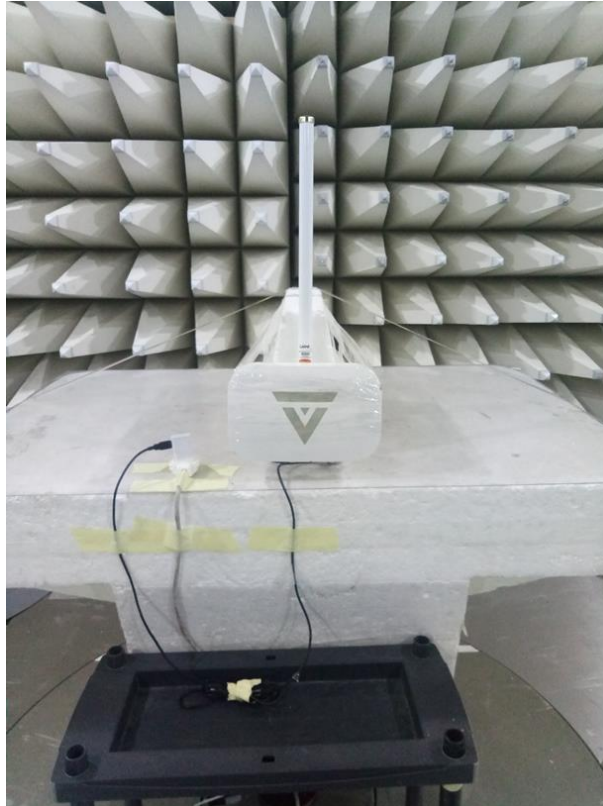



HERMON LABORATORIES

Test specification:	Section 15.109, Radiated emission		
Test procedure:	ANSI C63.4, Sections 11.6 and 12.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	08-Oct-18 - 11-Oct-18		
Temperature: 23 °C	Relative Humidity: 47 %	Air Pressure: 1010 hPa	Power: 120 VAC, 50 Hz
Remarks:			

Table 8.2.2 Radiated emission test results

EUT SET UP:	TABLE-TOP
LIMIT:	Class B
EUT OPERATING MODE:	Receive / Stand-by
TEST SITE:	SEMI ANECHOIC CHAMBER
TEST DISTANCE:	3 m
DETECTORS USED:	PEAK / QUASI-PEAK
FREQUENCY RANGE:	30 MHz – 1000 MHz
RESOLUTION BANDWIDTH:	120 kHz

Frequency, MHz	Peak emission, dB(μV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
32.3141	39.70	36.32	40.0	-3.68	V	102.0	-111.0	Pass
69.43122	32.64	27.37	40.0	-12.63	V	100.0	-52.0	
441.3647	43.25	39.90	46.0	-6.10	V	102.0	-180.0	
700.9612	44.94	40.45	46.0	-5.55	H	100.0	-156.0	
791.997	49.61	45.54	46.0	-0.46	H	100.0	-123.0	
874.9612	47.69	45.68	46.0	-0.32	V	104.0	-154.0	

TEST SITE:	SEMI ANECHOIC CHAMBER
TEST DISTANCE:	3 m
DETECTORS USED:	PEAK / AVERAGE
FREQUENCY RANGE:	1000 MHz – 9200 MHz
RESOLUTION BANDWIDTH:	1000 kHz

Frequency, MHz	Peak			Average			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
	Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*	Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
1124.7903	47.22	74.0	-26.78	44.68	54.0	-9.32	H	1.30	-142.0	Pass
1624.7190	44.66	74.0	-29.34	41.12	54.0	-12.88	H	1.02	-105.0	
2376.0941	64.00	74.0	-10.00	47.52	54.0	-6.48	H	1.02	142.0	
3564.7345	54.59	74.0	-19.41	33.8	54.0	-20.20	V	1.30	156.0	
3958.8898	55.33	74.0	-18.67	37.86	54.0	-16.14	V	1.27	-105.0	
8116.6493	49.18	74.0	-24.82	35.43	54.0	-18.57	H	1.00	169.0	

*- Margin = Measured emission - specification limit.
**- EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used

HL 3901	HL 4360	HL 4956	HL 5112	HL 5288		
---------	---------	---------	---------	---------	--	--


Full description is given in Appendix A.



Test specification:	Section 15.109, Radiated emission		
Test procedure:	ANSI C63.4, Sections 11.6 and 12.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	08-Oct-18 - 11-Oct-18		
Temperature: 23 °C	Relative Humidity: 47 %	Air Pressure: 1010 hPa	Power: 120 VAC, 50 Hz
Remarks:			


Plot 8.2.1 Radiated emission measurements in 30 - 1000 MHz range, vertical & horizontal antenna polarization

TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Receive

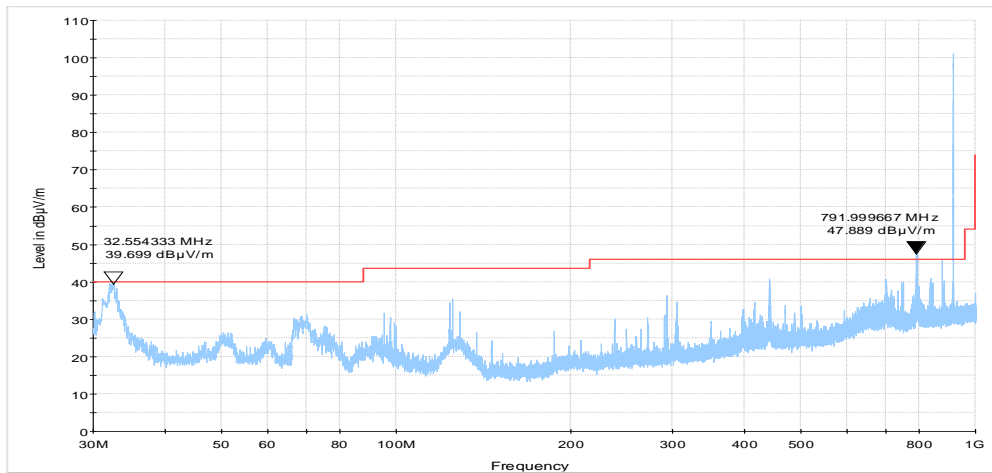

Plot 8.2.2 Radiated emission measurements above 1000 MHz, vertical & horizontal antenna polarization

TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Receive

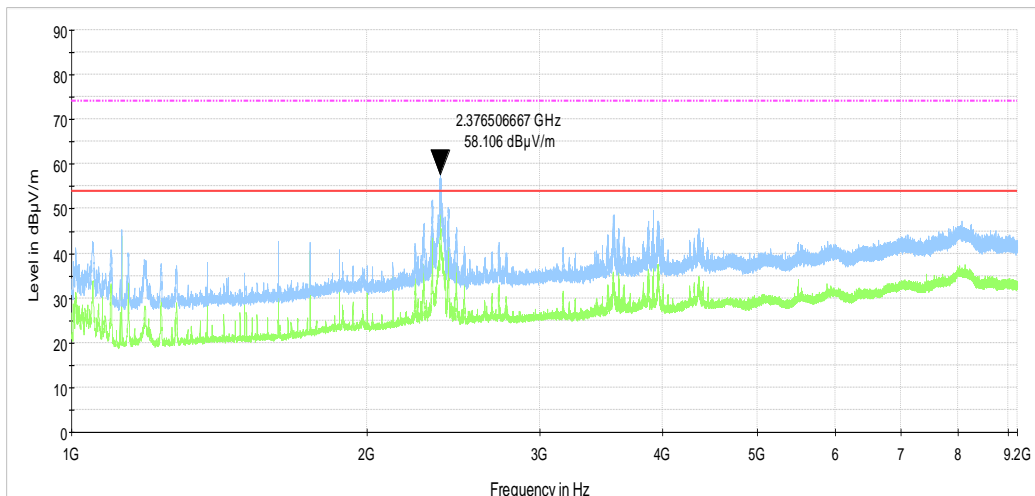

**9 APPENDIX A Test equipment and ancillaries used for tests**

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./ Check	Due Cal./ Check
0337	Probe Set, Hand held, 5 probes	Electro-Metrics	EHFP-30	238	03-Jun-18	03-Jun-19
0446	Antenna, Loop, Active, 10 kHz - 30 MHz	EMCO	6502	2857	11-Feb-18	11-Feb-19
0495	Autotransformer 0-255V, 10A	Variac	EMPL01	495	03-Jun-18	03-Jun-19
0787	Transient Limiter 9 kHz-200 MHz	Hewlett Packard	11947A	3107A01877	08-Oct-18	08-Oct-19
2909	Spectrum analyzer, ESA-E, 100 Hz to 26.5 GHz	Agilent Technologies	E4407B	MY41444762	27-Mar-18	27-Mar-19
3016	LISN, Two-line V-network, 9 kHz to 30 MHz, (50 uH+5 Ohm), CISPR16-1, MIL-461E	Rohde & Schwarz	ESH 3-Z5	892239/002	11-Jan-18	11-Jan-19
3615	Cable RF, 6.5 m, N type-N type, DC-6 GHz	Suhner Switzerland	RG 214/U	NA	10-Jun-18	10-Jun-19
3818	PSA Series Spectrum Analyzer, 3 Hz- 44 GHz	Agilent Technologies	E4446A	MY48250288	28-May-18	28-May-19
3901	Microwave Cable Assembly, 40.0 GHz, 3.5 m, SMA/SMA	Huber-Suhner	SUCOFLE X 102A	1225/2A	07-Feb-18	07-Feb-19
3903	Microwave Cable Assembly, 40.0 GHz, 1.5 m, SMA/SMA	Huber-Suhner	SUCOFLE X 102A	1226/2A	07-Feb-18	07-Feb-19
4276	Test Cable , DC-18 GHz, 3.05 m, N/M - N/M	Mini-Circuits	APC-10FT-NMNM+	0747A	01-Aug-18	01-Aug-19
4278	Test Cable , DC-18 GHz, 4.6 m, N/M - N/M	Mini-Circuits	APC-15FT-NMNM+	0755A	01-Aug-18	01-Aug-19
4360	EMI Test Receiver, 20 Hz to 40 GHz.	Rohde & Schwarz	ESU40	100322	26-Dec-17	26-Dec-18
4778	EMI Receiver, 9 kHz - 2.9 GHz, System: HL1431, HL4777	Hewlett Packard	8542E	30807A00262, 3427A00123	28-Oct-18	28-Oct-19
4956	Active horn antenna, 18 to 40 GHz	COM-POWER CORPORATION	AHA-840	105004	11-Jan-18	11-Jan-19
5112	RF cable, 40 GHz, 5.5 m, K-type	Huber-Suhner	SF102EA/11SK/11SK/5500MM	502494/2EA	02-Aug-18	02-Aug-19
5288	Trilog Antenna, 25 MHz - 8 GHz, 100W	Frankonia	ALX-8000E	809	21-Jan-18	21-Jan-19
5376	EXA Signal Analyzer, 10 Hz - 32 GHz	Keysight Technologies	N9010B	MY57470404	16-Mar-18	16-Mar-19



10 APPENDIX B Test equipment correction factors

HL 0446: Active Loop Antenna
EMCO, model: 6502, s/n 2857

Frequency,	Measured antenna factor, dBS/m	Measurement uncertainty, dB
10	-33.4	±1.0
20	-37.8	±1.0
50	-40.5	±1.0
75	-41.0	±1.0
100	-41.2	±1.0
150	-41.2	±1.0
250	-41.1	±1.0
500	-41.2	±1.0
750	-41.3	±1.0
1000	-41.3	±1.0

Frequency,	Measured antenna factor, dBS/m	Measurement uncertainty, dB
2000	-41.4	±1.0
3000	-41.4	±1.0
4000	-41.5	±1.0
5000	-41.5	±1.0
10000	-41.7	±1.0
15000	-42.1	±1.0
20000	-42.7	±1.0
25000	-44.2	±1.0
30000	-45.8	±1.0

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ A/m.

HL 4956: Active horn antenna
COM-POWER Corp., model: AHA-840, s/n 105004

Frequency, MHz	Measured antenna factor, dB/m
18000	5.1
18500	3.6
19000	2.2
19500	0.7
20000	0.7
20500	0.8
21000	0.5
21500	-1.3
22000	-2.1
22500	-2.0
23000	-1.6
23500	-2.9
24000	-2.3
24500	-2.6
25000	-1.8
25500	-1.2
26000	-0.5
26500	-1.2
27000	-0.1
27500	-1.0
28000	-0.7
28500	0.5

Frequency, MHz	Measured antenna factor, dB/m
29500	1.4
30000	2.9
30500	2.9
31000	2.9
31500	1.2
32000	0.7
32500	0.2
33000	-1.7
33500	-2.2
34000	2.3
34500	-1.1
35000	0.7
35500	-1.1
36000	0.1
36500	1.4
37000	3.7
37500	5.8
38000	6.6
38500	7.3
39000	6.5
39500	7.3
40000	7.1

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.



HL 5288: Trilog Antenna
Frankonia, model: ALX-8000E, s/n: 00809

Frequency, MHz	Antenna factor, dB/m
30	14.96
35	15.33
40	16.37
45	17.56
50	17.95
60	16.87
70	13.22
80	10.56
90	13.61
100	15.46
120	14.03
140	12.23

Frequency, MHz	Antenna factor, dB/m
160	12.67
180	13.34
200	15.40
250	16.42
300	17.28
400	19.98
500	21.11
600	22.90
700	24.13
800	25.25
900	26.35
1000	27.18

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.

HL 3615: Cable RF
Suhner Switzerland, model: RG 214/U, s/n: NA, HL 3615

Set / Applied, MHz	Measured, dB	Uncertainty, dB
50	0.31	+0.08 / -0.08 dB
100	0.45	+0.08 / -0.08 dB
200	0.66	+0.08 / -0.08 dB
300	0.83	+0.09 / -0.09 dB
400	0.98	+0.09 / -0.09 dB
500	1.12	+0.09 / -0.09 dB
600	1.26	+0.09 / -0.09 dB
700	1.38	+0.09 / -0.09 dB
800	1.50	+0.09 / -0.09 dB
900	1.63	+0.09 / -0.09 dB
1000	1.74	+0.09 / -0.09 dB
1100	1.85	+0.09 / -0.09 dB
1200	1.97	+0.09 / -0.09 dB
1300	2.08	+0.09 / -0.09 dB
1400	2.19	+0.09 / -0.09 dB
1500	2.30	+0.09 / -0.09 dB
1600	2.41	+0.09 / -0.09 dB
1700	2.53	+0.09 / -0.09 dB
1800	2.63	+0.09 / -0.09 dB
1900	2.74	+0.09 / -0.09 dB
2000	2.83	+0.09 / -0.09 dB
2100	2.93	+0.11 / -0.11 dB
2200	3.00	+0.11 / -0.11 dB
2300	3.07	+0.11 / -0.11 dB
2400	3.13	+0.11 / -0.11 dB
2500	3.19	+0.15 / -0.15 dB
2600	3.25	+0.15 / -0.15 dB
2700	3.33	+0.15 / -0.15 dB
2800	3.40	+0.15 / -0.15 dB
2900	3.48	+0.15 / -0.15 dB
3000	3.57	+0.15 / -0.15 dB
3100	3.63	+0.17 / -0.17 dB
3200	3.71	+0.17 / -0.17 dB

Set / Applied, MHz	Measured, dB	Uncertainty, dB
3300	3.78	+0.17 / -0.17 dB
3400	3.88	+0.17 / -0.17 dB
3500	3.96	+0.17 / -0.17 dB
3600	4.06	+0.17 / -0.17 dB
3700	4.15	+0.17 / -0.17 dB
3800	4.26	+0.17 / -0.17 dB
3900	4.36	+0.17 / -0.17 dB
4000	4.48	+0.17 / -0.17 dB
4100	4.58	+0.22 / -0.23 dB
4200	4.72	+0.22 / -0.23 dB
4300	4.80	+0.22 / -0.23 dB
4400	4.93	+0.22 / -0.23 dB
4500	5.00	+0.22 / -0.23 dB
4600	5.10	+0.22 / -0.23 dB
4700	5.20	+0.22 / -0.23 dB
4800	5.30	+0.22 / -0.23 dB
4900	5.43	+0.22 / -0.23 dB
5000	5.54	+0.22 / -0.23 dB
5100	5.65	+0.22 / -0.23 dB
5200	5.73	+0.22 / -0.23 dB
5300	5.86	+0.22 / -0.23 dB
5400	5.95	+0.22 / -0.23 dB
5500	6.05	+0.22 / -0.23 dB
5600	6.16	+0.22 / -0.23 dB
5700	6.28	+0.22 / -0.23 dB
5800	6.38	+0.22 / -0.23 dB
5900	6.53	+0.22 / -0.23 dB
6000	6.63	+0.22 / -0.23 dB
6100	6.75	+0.22 / -0.23 dB
6200	6.82	+0.22 / -0.23 dB
6300	6.93	+0.22 / -0.23 dB
6400	7.00	+0.22 / -0.23 dB
6500	7.05	+0.22 / -0.23 dB



HL 4277:Test Cable
Mini-Circuits, model: APC-10FT-NMNM+, s/n 0748A

Set / Applied, MHz	Measured, dB	Uncertainty, dB
0.1	0.26	+0.07 / -0.07 dB
50	0.27	+0.07 / -0.07 dB
100	0.38	+0.07 / -0.07 dB
200	0.55	+0.07 / -0.07 dB
300	0.69	+0.08 / -0.09 dB
400	0.80	+0.08 / -0.09 dB
500	0.91	+0.08 / -0.09 dB
600	1.00	+0.08 / -0.09 dB
700	1.08	+0.08 / -0.09 dB
800	1.17	+0.08 / -0.09 dB
900	1.24	+0.08 / -0.09 dB
1000	1.32	+0.08 / -0.09 dB
1100	1.39	+0.12 / -0.13 dB
1200	1.45	+0.12 / -0.13 dB
1300	1.52	+0.12 / -0.13 dB
1400	1.58	+0.12 / -0.13 dB
1500	1.65	+0.12 / -0.13 dB
1600	1.71	+0.12 / -0.13 dB
1700	1.77	+0.12 / -0.13 dB
1800	1.82	+0.12 / -0.13 dB
1900	1.88	+0.12 / -0.13 dB
2000	1.93	+0.12 / -0.13 dB
2100	1.99	+0.12 / -0.13 dB
2200	2.05	+0.12 / -0.13 dB
2300	2.10	+0.12 / -0.13 dB
2400	2.15	+0.12 / -0.13 dB
2500	2.20	+0.17 / -0.18 dB
2600	2.25	+0.17 / -0.18 dB
2700	2.30	+0.17 / -0.18 dB
2800	2.35	+0.17 / -0.18 dB
2900	2.40	+0.17 / -0.18 dB
3000	2.44	+0.17 / -0.18 dB
3100	2.49	+0.19 / -0.2 dB
3200	2.54	+0.19 / -0.2 dB
3300	2.58	+0.19 / -0.2 dB
3400	2.62	+0.19 / -0.2 dB
3500	2.66	+0.19 / -0.2 dB
3600	2.71	+0.19 / -0.2 dB
3700	2.75	+0.19 / -0.2 dB
3800	2.79	+0.19 / -0.2 dB
3900	2.84	+0.19 / -0.2 dB
4000	2.88	+0.19 / -0.2 dB

Set / Applied, MHz	Measured, dB	Uncertainty, dB
4100	2.84	+0.19 / -0.2 dB
4200	2.88	+0.19 / -0.2 dB
4300	2.92	+0.3 / -0.33 dB
4400	2.96	+0.3 / -0.33 dB
4500	3.01	+0.3 / -0.33 dB
4600	3.05	+0.3 / -0.33 dB
4700	3.09	+0.3 / -0.33 dB
4800	3.13	+0.3 / -0.33 dB
4900	3.18	+0.3 / -0.33 dB
5000	3.21	+0.3 / -0.33 dB
5100	3.25	+0.3 / -0.33 dB
5200	3.30	+0.3 / -0.33 dB
5300	3.34	+0.3 / -0.33 dB
5400	3.39	+0.3 / -0.33 dB
5500	3.44	+0.3 / -0.33 dB
5600	3.48	+0.3 / -0.33 dB
5700	3.53	+0.3 / -0.33 dB
5800	3.57	+0.3 / -0.33 dB
5900	3.60	+0.3 / -0.33 dB
6000	3.65	+0.3 / -0.33 dB
6100	3.68	+0.3 / -0.33 dB
6200	3.72	+0.3 / -0.33 dB
6300	3.77	+0.3 / -0.33 dB
6400	3.83	+0.3 / -0.33 dB
6500	3.86	+0.3 / -0.33 dB
6600	3.92	+0.3 / -0.33 dB
6700	3.96	+0.3 / -0.33 dB
6800	4.00	+0.3 / -0.33 dB
6900	4.04	+0.3 / -0.33 dB
7000	4.08	+0.3 / -0.33 dB
7100	4.11	+0.3 / -0.33 dB
7200	4.16	+0.3 / -0.33 dB
7300	4.20	+0.3 / -0.33 dB
7400	4.24	+0.3 / -0.33 dB
7500	4.29	+0.3 / -0.33 dB
7600	4.33	+0.3 / -0.33 dB
7700	4.38	+0.3 / -0.33 dB
7800	4.42	+0.3 / -0.33 dB
7900	4.51	+0.3 / -0.33 dB
8000	4.52	+0.3 / -0.33 dB
8100	4.55	+0.34 / -0.36 dB
8200	4.55	+0.34 / -0.36 dB



HL 4277: Insertion loss

Set / Applied, MHz	Measured, dB	Uncertainty, dB
8300	4.57	+0.34 / -0.36 dB
8400	4.60	+0.34 / -0.36 dB
8500	4.60	+0.34 / -0.36 dB
8600	4.63	+0.34 / -0.36 dB
8700	4.63	+0.34 / -0.36 dB
8800	4.64	+0.34 / -0.36 dB
8900	4.65	+0.34 / -0.36 dB
9000	4.67	+0.34 / -0.36 dB
9100	4.69	+0.34 / -0.36 dB
9200	4.71	+0.34 / -0.36 dB
9300	4.73	+0.34 / -0.36 dB
9400	4.76	+0.34 / -0.36 dB
9500	4.78	+0.34 / -0.36 dB
9600	4.81	+0.34 / -0.36 dB
9700	4.85	+0.34 / -0.36 dB
9800	4.87	+0.34 / -0.36 dB
9900	4.89	+0.34 / -0.36 dB
10000	4.93	+0.34 / -0.36 dB
10100	4.96	+0.4 / -0.44 dB
10200	4.99	+0.4 / -0.44 dB
10300	5.02	+0.4 / -0.44 dB
10400	5.05	+0.4 / -0.44 dB
10500	5.08	+0.4 / -0.44 dB
10600	5.11	+0.4 / -0.44 dB
10700	5.14	+0.4 / -0.44 dB
10800	5.17	+0.4 / -0.44 dB
10900	5.19	+0.4 / -0.44 dB
11000	5.22	+0.4 / -0.44 dB
11100	5.25	+0.4 / -0.44 dB
11200	5.28	+0.4 / -0.44 dB
11300	5.31	+0.4 / -0.44 dB
11400	5.34	+0.4 / -0.44 dB
11500	5.38	+0.4 / -0.44 dB
11600	5.41	+0.4 / -0.44 dB
11700	5.45	+0.4 / -0.44 dB
11800	5.49	+0.4 / -0.44 dB
11900	5.53	+0.4 / -0.44 dB
12000	5.56	+0.4 / -0.44 dB
12100	5.60	+0.4 / -0.44 dB
12200	5.63	+0.4 / -0.44 dB
12300	5.68	+0.4 / -0.44 dB
12400	5.72	+0.4 / -0.44 dB
12500	5.75	+0.47 / -0.52 dB
12600	5.80	+0.47 / -0.52 dB
12700	5.84	+0.47 / -0.52 dB
12800	5.93	+0.47 / -0.52 dB
12900	5.94	+0.47 / -0.52 dB
13000	5.98	+0.47 / -0.52 dB
13100	6.03	+0.47 / -0.52 dB

Set / Applied, MHz	Measured, dB	Uncertainty, dB
13200	6.09	+0.47 / -0.52 dB
13300	6.17	+0.47 / -0.52 dB
13400	6.27	+0.47 / -0.52 dB
13500	6.37	+0.47 / -0.52 dB
13600	6.49	+0.47 / -0.52 dB
13700	6.57	+0.47 / -0.52 dB
13800	6.60	+0.47 / -0.52 dB
13900	6.61	+0.47 / -0.52 dB
14000	6.59	+0.47 / -0.52 dB
14100	6.57	+0.47 / -0.52 dB
14200	6.54	+0.47 / -0.52 dB
14300	6.53	+0.47 / -0.52 dB
14400	6.49	+0.47 / -0.52 dB
14500	6.48	+0.47 / -0.52 dB
14600	6.46	+0.47 / -0.52 dB
14700	6.46	+0.47 / -0.52 dB
14800	6.49	+0.47 / -0.52 dB
14900	6.51	+0.47 / -0.52 dB
15000	6.54	+0.47 / -0.52 dB
15100	6.57	+0.47 / -0.52 dB
15200	6.62	+0.47 / -0.52 dB
15300	6.64	+0.47 / -0.52 dB
15400	6.68	+0.47 / -0.52 dB
15500	6.71	+0.47 / -0.52 dB
15600	6.78	+0.47 / -0.52 dB
15700	6.79	+0.47 / -0.52 dB
15800	6.82	+0.47 / -0.52 dB
15900	6.88	+0.47 / -0.52 dB
16000	6.89	+0.47 / -0.52 dB
16100	6.96	+0.47 / -0.52 dB
16200	6.97	+0.47 / -0.52 dB
16300	7.02	+0.47 / -0.52 dB
16400	7.07	+0.47 / -0.52 dB
16500	7.12	+0.47 / -0.52 dB
16600	7.17	+0.47 / -0.52 dB
16700	7.20	+0.47 / -0.52 dB
16800	7.22	+0.47 / -0.52 dB
16900	7.23	+0.47 / -0.52 dB
17000	7.24	+0.47 / -0.52 dB
17100	7.27	+0.47 / -0.52 dB
17200	7.28	+0.47 / -0.52 dB
17300	7.28	+0.47 / -0.52 dB
17400	7.30	+0.47 / -0.52 dB
17500	7.34	+0.47 / -0.52 dB
17600	7.35	+0.47 / -0.52 dB
17700	7.39	+0.47 / -0.52 dB
17800	7.41	+0.47 / -0.52 dB
17900	7.41	+0.47 / -0.52 dB
18000	7.44	+0.47 / -0.52 dB



11 APPENDIX C Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Conducted carrier power at RF antenna connector	Below 12.4 GHz: ± 1.7 dB 12.4 GHz to 40 GHz: ± 2.3 dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: ± 2.6 dB 2.9 GHz to 6.46 GHz: ± 3.5 dB 6.46 GHz to 13.2 GHz: ± 4.3 dB 13.2 GHz to 22.0 GHz: ± 5.0 dB 22.0 GHz to 26.8 GHz: ± 5.5 dB 26.8 GHz to 40.0 GHz: ± 4.8 dB
Occupied bandwidth	± 8.0 %
Duty cycle, timing (Tx ON / OFF) and average factor measurements	± 1.0 %
Conducted emissions with LISN	9 kHz to 150 kHz: ± 3.9 dB 150 kHz to 30 MHz: ± 3.8 dB
Radiated emissions at 3 m measuring distance Horizontal polarization	Biconilog antenna: ± 5.3 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.3 dB Double ridged horn antenna: ± 5.3 dB
Vertical polarization	Biconilog antenna: ± 6.0 dB Biconical antenna: ± 5.7 dB Log periodic antenna: ± 6.0 dB Double ridged horn antenna: ± 6.0 dB

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.



12 APPENDIX D

Specification references

FCC 47CFR part 15: 2017

ANSI C63.2:2016

ANSI C63.4:2014

ANSI C63.10:2013

558074 D01 DTS
Meas_Guidance v05

Radio Frequency Devices.

American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications.

American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

Guidance for compliance measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices operating under section 15.247 of the FCC rules



13 APPENDIX E Abbreviations and acronyms

A	ampere
AC	alternating current
A/m	ampere per meter
AM	amplitude modulation
AVRG	average (detector)
cm	centimeter
CDN	coupling/ decoupling network
dB	decibel
dB(μ V)	decibel referred to one microvolt
dB(μ V/m)	decibel referred to one microvolt per meter
dB(μ A)	decibel referred to one microampere
DC	direct current
EMC	electromagnetic compatibility
EMI	electromagnetic interference
EN	European Norm
EUT	equipment under test
GHz	gigahertz
GND	ground
H	height
HCP	horizontal coupling plane
HL	Hermon laboratories
Hz	hertz
ITE	information technology equipment
k	kilo
kHz	kilohertz
kV	kilovolt
L	length
LISN	line impedance stabilization network
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
μ s	microsecond
NA	not applicable
NP	normal performance
OATS	open area test site
Ω	Ohm
QP	quasi-peak
PS	power supply
RE	radiated emission
RF	radio frequency
rms	root mean square
s	second
V	volt
VCP	vertical coupling plane

END OF DOCUMENT