





Test report No:
2410620R-RF-US-P06V02

FCC TEST REPORT

Product Name	IEEE 802.11a/b/g/n/ac 2T2R USB Wi-Fi Module Integrated Bluetooth 2.1+EDR/4.2/5.1
Model and /or type reference	SKI.WB663U.2
FCC ID	2AR82-SKIWB663U21
IC	24728-SKIWB663U21
Applicant's name / address	Guangzhou Shikun Electronics Co., Ltd NO.6 Liankun Road, Huangpu District, Guangzhou 510530, China
Test method requested, standard	47 CFR FCC Part 15 (Section 15.247) RSS-Gen Issue5 Amendment 2 RSS-247 Issue3
Verdict Summary	IN COMPLIANCE
Documented by (name / position & signature)	Tim Cao/Project Manager 
Approved by (name / position & signature)	Jack Zhang/ Manager 
Date of issue	2024-04-07
Report Version	V1.0
Report template No	Template_FCC Part 15C-RF-V1.0

INDEX

	page
General conditions.....	4
Environmental conditions	4
Possible test case verdicts	5
Abbreviations.....	5
Document History	6
Remarks and Comments.....	6
Used Equipment.....	7
Uncertainty	9
1 General Information.....	10
1.1 General Description of the Item(s)	10
1.2 Antenna Information	11
1.3 Channel List	12
2 Description of Test Setup	13
2.1 Operating mode(s) used for tests.....	13
2.2 Auxiliary equipment / Test software for the EUT	13
2.3 Test Configuration / Block diagram used for tests	14
2.4 Testing process.....	15
3 Verdict summary section	16
3.1 Standards.....	16
3.2 Deviation(s) from the Standard(s) / Test Specification(s)	16
3.3 Overview of results.....	17
3.4 Power setting in test.....	18
3.5 Test Matrix.....	18
3.6 Test Facility	19
4 Test Items Of Limit/Setup/Procedure	20
4.1 Maximum Conducted Output Power	20
4.1.1 Limit.....	20
4.1.2 Test Setup.....	20
4.1.3 Test Procedure.....	21
4.2 Band Edge Measurements.....	22
4.2.1 Limit.....	22
4.2.2 Test Setup.....	22
4.2.3 Test Procedure.....	22
4.3 Emissions in Restricted Bands.....	23

4.3.1	Limit.....	23
4.3.2	Test Setup.....	25
4.3.3	Test Procedure.....	26
4.4	Antenna Requirement	27
4.4.1	Limit:.....	27
4.4.2	Antenna Connector Construction:.....	27
5	Test setup photo and EUT Photo	27
6	Test Result	28
	Appendix A: Maximum Conducted Output Power	28
	Appendix B: Band edge measurements.....	29
	Appendix C: Emissions in Restricted Bands	45

COMPETENCES AND GUARANTEES

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

GENERAL CONDITIONS

Test Location	No. 99, Hongye Road, Suzhou Industrial Park Suzhou, 215006, P.R. China
Date(receive sample)	Feb. 04, 2024
Date (start test)	Feb. 29, 2024
Date (finish test)	Mar. 19, 2024

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or Competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA.

ENVIRONMENTAL CONDITIONS

The climatic conditions during the tests are within the limits specified by the manufacturer for the operation of the EUT and the test equipment. The climatic conditions during the tests were within the following limits:

Ambient temperature	15 °C – 35 °C
Relative Humidity air	30% - 60%

If explicitly required in the basic standard or applied product / product family standard the climatic values are recorded and documented separately in this test report.

POSSIBLE TEST CASE VERDICTS

Test case does not apply to test object	N/A
Test object does meet requirement	P (Pass) / PASS
Test object does not meet requirement	F (Fail) / FAIL
Not measured	N/M

ABBREVIATIONS

For the purposes of the present document, the following abbreviations apply:

EUT	: Equipment Under Test
QP	: Quasi-Peak
CAV	: CISPR Average
AV	: Average
CDN	: Coupling Decoupling Network
SAC	: Semi-Anechoic Chamber
OATS	: Open Area Test Site
BW	: Bandwidth
AM	: Amplitude Modulation
PM	: Pulse Modulation
HCP	: Horizontal Coupling Plane
VCP	: Vertical Coupling Plane
U_N	: Nominal voltage
T_x	: Transmitter
R_x	: Receiver
N/A	: Not Applicable
N/M	: Not Measured

DOCUMENT HISTORY

Report No.	Version	Description	Issued Date
2410620R-RF-US-P06V02	V1.0	Initial issue of report.	2024-04-07

REMARKS AND COMMENTS

1. The equipment under test (EUT) does meet the essential requirements of the stated standard(s)/test(s).
2. This report is based on the certified module with only the antenna added, so only output power, radiated spurious emissions and radiated band edge tests have been performed to demonstrate compliance with the requirements of Part 15 Subpart C 15.247(RSS-Gen Issue5 and RSS-247 Issue3) and to meet the requirements of the Calss II permissible variations. The module certification report number is 4790010773.1-1.
3. The measurement result is considered in conformance with the requirement if it is within the prescribed limit, It is not necessary to account the uncertainty associated with the measurement result.
4. The test results presented in this report relate only to the object tested.
5. The test report shall not be reproduced without the written approval of DEKRA Testing and Certification (Suzhou) Co., Ltd.
6. This report will not be used for social proof function in China market.
7. DEKRA declines any responsibility with the following test data provided by customer that may affect the validity of result:
 - Chapter 1.1 General Description of the Item(s);
 - Chapter 1.2 Antenna Informaion;
 - Chapter 1.3 Channel List.

USED EQUIPMENT

Maximum Conducted Output Power / TR8

Instrument	Manufacturer	Model No.	Serial No.	Cal.Date	Next Cal. Date	Firmware Version	Software version
Wireless Connectivity Tester	R&S	CMW 270	102593	2023.05.20	2024.05.19	V 4.0.60	N/A
Coaxial Cable	N/A	N/A	2477	2023.06.08	2024.06.07	N/A	N/A
Coaxial Cable	N/A	N/A	2478	2023.06.08	2024.06.07	N/A	N/A
High and low temperature and fast temperature change test box	ASTUOD	ASTD-FBT-225K	N/A	2023.05.20	2024.05.19	N/A	N/A
Temperature/Humidity Meter	RTS	RTS-8S	RF08	2023.08.25	2024.08.24	N/A	N/A
Test system							
Instrument	Manufacturer	Model No.	Serial No.	Cal.Date	Next Cal. Date	Firmware Version	Software version
MAX Signal Analyzer	Keysight	N9010A	MY48030494	2023.11.08	2024.11.07	A.14.03	N/A
RF Control Unit	Tonscend	JS0806-2	22G8060594	2024.02.06	2025.02.05	N/A	N/A
MXG-B RF Vector Signal Generator	Keysight	N5182B	MY61252529	2023.05.20	2024.05.19	B.01.96	N/A
Frequency extender for EXG or MXG	Keysight	N5182BX07	MY59362500	2023.05.20	2024.05.19	N/A	N/A
EXG-B MW Analog Signal Generator	Keysight	N5173B	MY61252566	2023.08.26	2024.08.25	B.01.95	N/A
Test Software	Tonscend	TS1120	JS1120-3	N/A	N/A	N/A	V3.0.22

Radiated Emission(9kHz-1GHz) / AC3

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date	Firmware Version	Software version
EMI Test Receiver	R&S	ESCI	100573	2023.09.17	2024.09.16	4.42 SP3	N/A
Loop Antenna	R&S	HFH2-Z2E	101149	2023.04.25	2024.04.24	N/A	N/A
Bilog Antenna	Teseq GmbH	CBL6112D	27613	2023.09.13	2024.09.12	N/A	N/A
Temperature/Humidity Meter	RTS	RTS-8S	AC2-TH	2023.05.19	2024.05.18	N/A	N/A
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC2-C	2023.05.21	2024.05.20	N/A	N/A
Dekra test software	Dekra	N/A	N/A	N/A	N/A	N/A	3

Radiated Emission (1GHz-40GHz) / AC5

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date	Firmware Version	Software version
EXA Spectrum Analyzer	Keysight	N9020B	MY60112218	2023.11.08	2024.11.07	A.31.05	N/A
Pre-Amplifier	SKET	LNPA_0118 G-45	SK20210901 01	2023.05.14	2024.05.13	N/A	N/A
Preamplifier	CHENGYI	EMC184045 SE	980263	2023.07.09	2024.07.08	N/A	N/A
DRG Horn	ETS-Lindgren	3117	123988	2023.11.07	2024.11.06	N/A	N/A
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	294	2023.05.31	2024.05.30	N/A	N/A
Filter Switch Box	MVE	MSW-F196	C070001S	2023.05.21	2024.05.20	N/A	N/A
Temperature/Humidity Meter	RTS	RTS-8S	AC5-TH	2023.05.19	2024.05.18	N/A	N/A
Coaxial Cable	ROSENBERGER	LA1-C011- 2000/3000	AC5-40G	2024.01.25	2025.01.24	N/A	N/A
Coaxial Cable	ROSENBERGER	LA1-C011- 2000/3000	AC5-40G-2	2023.05.21	2024.05.20	N/A	N/A
Cable	Rosenberger	LA1-C011- 1000	0523	2023.05.21	2024.05.20	N/A	N/A
Cable	Rosenberger	LA1-C011- 1000	0623	2023.05.21	2024.05.20	N/A	N/A
Dekra test software	Dekra	N/A	N/A	N/A	N/A	N/A	3

UNCERTAINTY

Uncertainties have been calculated according to the DEKRA internal document. The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95% .

Test item	Uncertainty
AC Power Line Conducted Emission	9kHz~150kHz: 2.80dB 150kHz~30MHz: 2.40dB
Peak Power Output	± 1.27 dB
Radiated Emission(30MHz~1GHz)	Horizontal: 30MHz~200MHz: 3.50 dB 300MHz~1GHz: 3.60 dB Vertical: 30MHz~200MHz: 3.60 dB 300MHz~1GHz: 3.50 dB
Radiated Emission(1GHz~26.5GHz)	Horizontal: 1GHz~18GHz: 5.00 dB Vertical: 1GHz~18GHz: 4.80 dB
RF antenna conducted test	± 1.27 dB
Radiated Emission Band Edge	± 3.9 dB
DTS Bandwidth	± 150 Hz
Occupied Bandwidth	± 1 kHz
Power Density	± 1.27 dB

1 GENERAL INFORMATION

1.1 General Description of the Item(s)

Product Name.....:	IEEE 802.11a/b/g/n/ac 2T2R USB Wi-Fi Module Integrated Bluetooth 2.1+EDR/4.2/5.1
Model No.:	SKI.WB663U.2
Trademark	2AR82-SKIWB663U21
FCC ID.....:	24728-SKIWB663U21
Manufacturer	Guangzhou Shikun Electronics Co., Ltd
Manufacturer address.....:	NO.6 Liankun Road, Huangpu District, Guangzhou 510530, China
Factory.....:	Guangzhou Shikun Electronics Co., Ltd
Factory address.....:	NO.6 Liankun Road, Huangpu District, Guangzhou 510530, China

Wireless specification	Bluetooth 5.1			
Operating frequency range(s)	2402~2480MHz			
Type of Modulation	GFSK			
PHYs	<input checked="" type="checkbox"/> LE 1M	<input checked="" type="checkbox"/> LE 2M	<input type="checkbox"/> LE Coded S=2/8	
Data Rate	<input checked="" type="checkbox"/> 1Mbit/s	<input checked="" type="checkbox"/> 2Mbit/s	<input type="checkbox"/> 500/125 Kbit/s	
Number of channel	40			

Rated power supply	Voltage and Frequency			
	<input type="checkbox"/>	AC: 220 - 240 Vac, 50/60 Hz		
	<input type="checkbox"/>	AC: 100 - 240 Vac, 50/60 Hz		
	<input checked="" type="checkbox"/>	DC: 3.3 Vdc		
	<input type="checkbox"/>	Battery:		
	<input type="checkbox"/>	Adapter:		
Brand of adapter	N/A			
Adapter model.....:	N/A			
Mounting position	<input type="checkbox"/>	Table top equipment		
	<input type="checkbox"/>	Wall/Ceiling mounted equipment		
	<input type="checkbox"/>	Floor standing equipment		
	<input type="checkbox"/>	Hand-held/Portable equipment		
	<input checked="" type="checkbox"/>	Other: RF Module		

1.2 Antenna Information

Material number.....:	61005-00778	61005-00701
Host model	43UM340E0UZ	75UM340E0UZ
Antenna Delivery	<input checked="" type="checkbox"/> 1TX + 1RX	
	<input type="checkbox"/> 2TX + 2RX	
	<input type="checkbox"/> Others:.....	
Antenna technology.....:	<input checked="" type="checkbox"/> SISO	
	<input type="checkbox"/> MIMO	<input type="checkbox"/> CDD
		<input type="checkbox"/> Beam-forming
Antenna Type	<input checked="" type="checkbox"/> External	<input type="checkbox"/> Dipole
		<input type="checkbox"/> Sectorized
		<input checked="" type="checkbox"/> FPC
	<input type="checkbox"/> Internal	<input type="checkbox"/> PIFA
		<input type="checkbox"/> PCB
		<input type="checkbox"/> Dipole
		<input type="checkbox"/> Others.....
Antenna Gain.....:	61005-00778: 2.48 dBi 61005-00701: 2.10 dBi	
	Note: The antenna used in the test was the highest gain antenna which Material number is 61005-00778.	

1.3 Channel List

Bluetooth Working Frequency of Each Channel: (For LE)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	01	2404 MHz	02	2406 MHz	03	2408 MHz
04	2410 MHz	05	2412 MHz	06	2414 MHz	07	2416 MHz
08	2418 MHz	09	2420 MHz	10	2422 MHz	11	2424 MHz
12	2426 MHz	13	2428 MHz	14	2430 MHz	15	2432 MHz
16	2434 MHz	17	2436 MHz	18	2438 MHz	19	2440 MHz
20	2442 MHz	21	2444 MHz	22	2446 MHz	23	2448 MHz
24	2450 MHz	25	2452 MHz	26	2454 MHz	27	2456 MHz
28	2458 MHz	29	2460 MHz	30	2462 MHz	31	2464 MHz
32	2466 MHz	33	2468 MHz	34	2470 MHz	35	2472 MHz
36	2474 MHz	37	2476 MHz	38	2478 MHz	39	2480 MHz

Note: The General Description of the Item , antenna information and Channel List for the EUT in clause 1 are provided and confirmed by the client.

2 DESCRIPTION OF TEST SETUP

2.1 Operating mode(s) used for tests

During the tests the following operating mode(s) has(have) been used.

Test Mode For Bluetooth	Mode 1: Transmit by LE_1Mbps
	Mode 2: Transmit by LE_2Mbps
	Mode 3: Transmit by LE_Coded S=8
	Mode 4: Transmit by LE_Coded S=2


2.2 Auxiliary equipment / Test software for the EUT

Auxiliary equipment	Type / Version	Manufacturer	Supplied by
(1) Notebook	Think pad x220	Lenovo	Adapter
(2) USB Control Cable	N/A	N/A	N/A
(3) USB Control Cable	N/A	N/A	N/
software	Type / Version	Manufacturer	Supplied by
MT7663_Win10_Driver_QA_Combo_Tool	N/A	N/A	N/A


Accessories Information	Cable		
	Length used during test [m]	Attached during test	Shielded
(2)USB Control Cable	1	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
(3)USB Control Cable	8	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

2.3 Test Configuration / Block diagram used for tests

Test setup Diagram- Conducted test

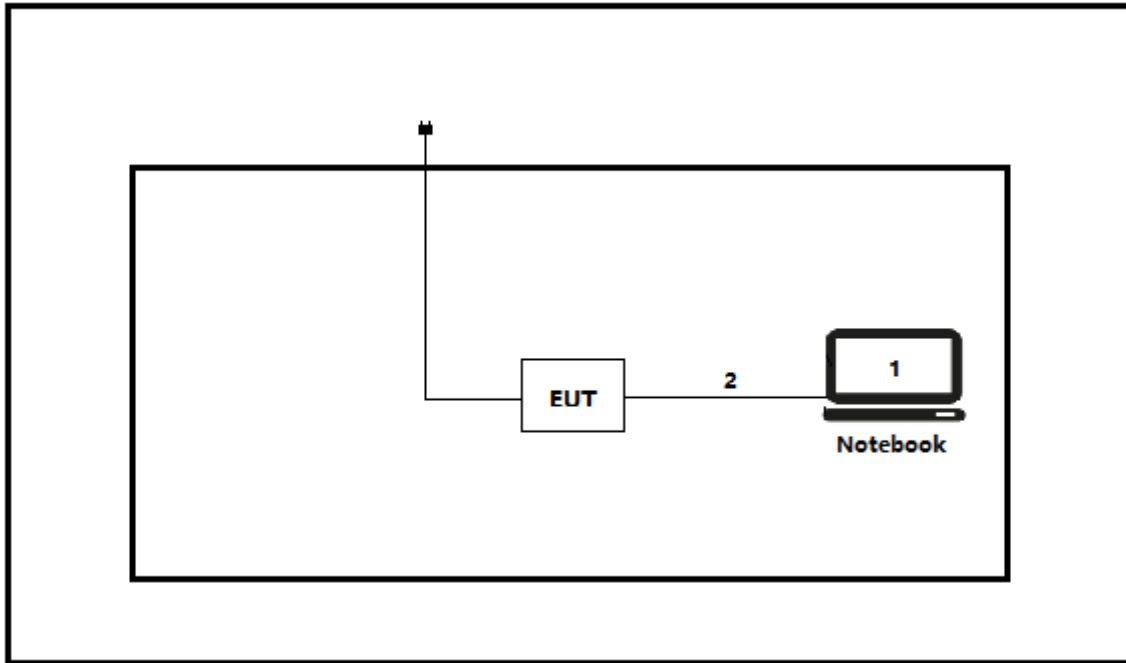

Test setup Diagram- Ratiated test

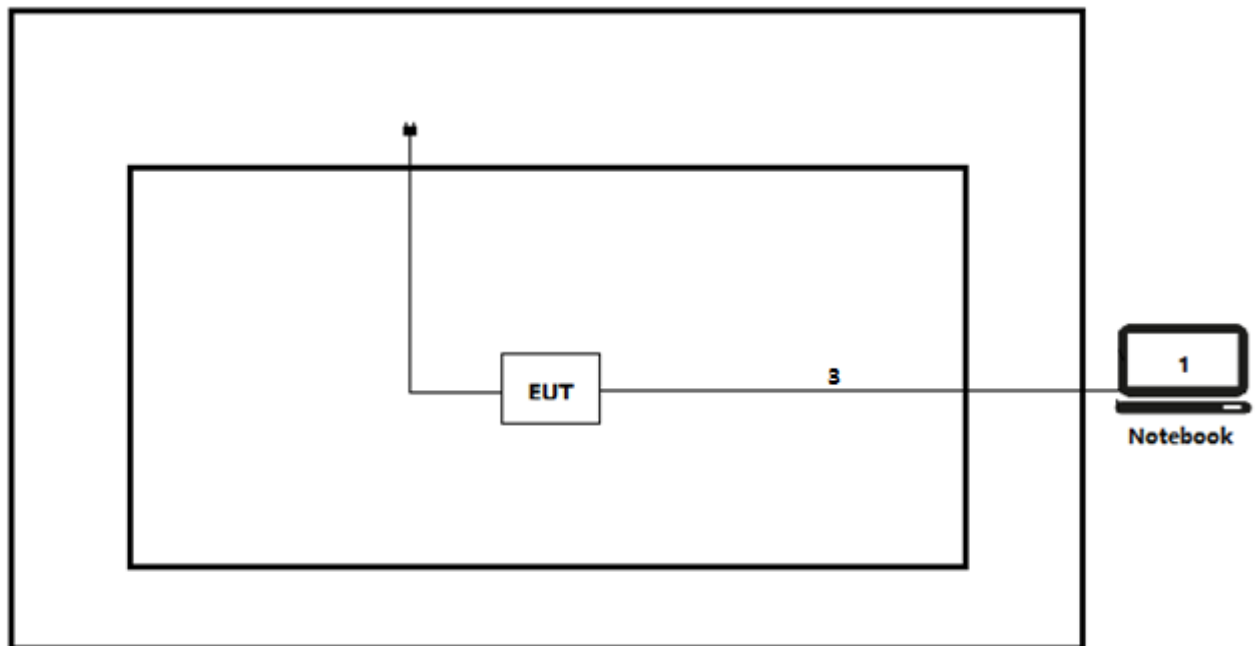

2.4 Testing process

1	Setup the EUT shown in Section 2.3.
2	Execute the [MT7663_Win10_Driver_QA_Combo_Tool] on the notebook.
3	Configure the test mode, the test channel, and the data rate.
4	Verify that the EUT works properly.

3 VERDICT SUMMARY SECTION

This chapter presents an overview of standards and results. Refer to the next chapters for details of measured test results and applied test levels.

3.1 Standards

Standard	Year	Description
FCC CFR Title 47 Part 15 Subpart E Section 15.247	2024	Operation within the bands 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz.
ANSI C63.10	2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB558074 D01 v05r02	2019	Guidance for performing compliance measurements on Digital Transmission System (DTS) operating under section 15.247
RSS-Gen	2021	General Requirements for Compliance of Radio Apparatus
RSS-247	2023	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

3.2 Deviation(s) from the Standard(s) / Test Specification(s)

The following deviation(s) was / were made from the published requirements of the listed standards: N/A.

(Please define the deviations from the standard(s) if applicable)

3.3 Overview of results

Requirement – Test Item of FCC	Standard(s)	Verdict	Remark
Maximum conducted output power	FCC 15.247(b)3 RSS-247 Issue 3 Paragraph 5.4(d)	PASS	Test data please refer to Appendix A
Band edge measurements	FCC 15.247(d) FCC 15.205 FCC 15.209 RSS-Gen Issue 5 Paragraph 8.10	PASS	Test data please refer to Appendix B
Emissions in Restricted Bands	FCC 15.205 FCC 15.209 RSS-Gen Issue 5 Paragraph 8.9	PASS	Test data please refer to Appendix C
Antenna Requirement	FCC 15.203 RSS-Gen Issue 5 Paragraph 6.8	PASS	---

3.4 Power setting in test

Mode	Channel	Frequency (MHz)	Power setting
LE_1Mbps	00	2402	Default
	19	2440	Default
	39	2480	Default
LE_2Mbps	00	2402	Default
	19	2440	Default
	39	2480	Default

3.5 Test Matrix

Test item	Model: SKI.WB663U.2		
	1(#1)	2()	3()
DTS Bandwidth	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Maximum conducted output power	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Maximum power spectral density	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Band edge measurements	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Conducted Spurious Emission	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Duty cycle	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Emissions in Restricted Bands	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
AC Power Line Conducted Emission	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Antenna Requirement	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

3.6 Test Facility

USA	:	FCC Designation Number: CN1199
CA	:	ISED CAB identifier: CN0040

4 TEST ITEMS OF LIMIT/SETUP/PROCEDURE

4.1 Maximum Conducted Output Power


VERDICT: PASS

4.1.1 Limit

Standard		FCC Part 15 Subpart C Paragraph 15.247 (b)(3); RSS-247 Issue 3 Paragraph 5.4(d).
<input checked="" type="checkbox"/>	GTX < 6dBi	$P_{out} \leq 30 \text{ dBm}$
<input type="checkbox"/>	GTX > 6dBi	
<input type="checkbox"/>	Non-Fix point-point	$P_{out} \leq 30 - (GTX - 6)$
<input type="checkbox"/>	Fix point-point	$P_{out} \leq 30 - [(GTX - 6)]/3$
<input type="checkbox"/>	Point-to-multipoint	$P_{out} \leq 30 - (GTX - 6)$
<input type="checkbox"/>	Overlap Beams	$P_{out} \leq 30 - [(GTX - 6)]/3$
<input type="checkbox"/>	Aggregate power transmitted simultaneously on all beams	$P_{out} \leq 30 - [(GTX - 6)]/3$
<input type="checkbox"/>	single directional beam	$P_{out} \leq 30 - [(GTX - 6)]/3 + 8 \text{ dB}$

Note 1 : GTX directional gain of transmitting antennas.
Note 2 : Pout is maximum peak conducted output power .

4.1.2 Test Setup

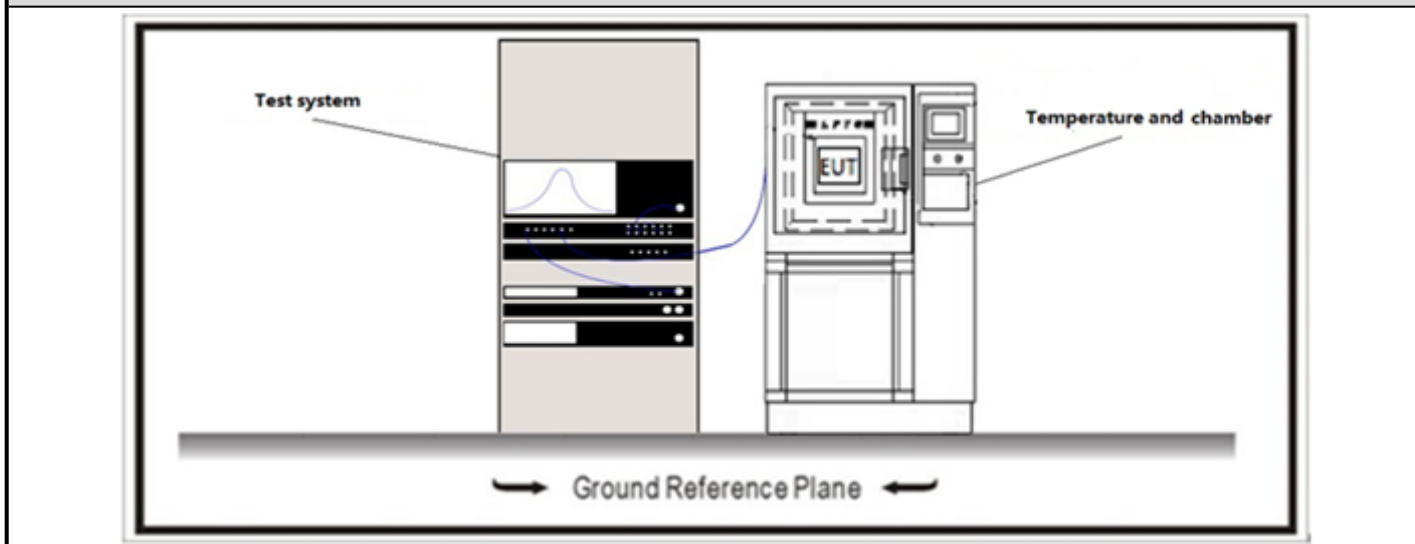

4.1.3 Test Procedure

	References Rule		Chapter	Description
<input checked="" type="checkbox"/>	ANSI C63.10		11.9	Fundamental emission output power
<input checked="" type="checkbox"/>	ANSI C63.10		11.9.1	Maximum peak conducted output power
	<input type="checkbox"/>	ANSI C63.10	11.9.1.1	RBW ≥ DTS bandwidth
	<input type="checkbox"/>	ANSI C63.10	11.9.1.2	Integrated band power method
	<input checked="" type="checkbox"/>	ANSI C63.10	11.9.1.3	PKPM1 Peak power meter method
<input type="checkbox"/>	ANSI C63.10		11.9.2	Maximum conducted (average) output power
	<input type="checkbox"/>	ANSI C63.10	11.9.2.2	Measurement using a spectrum analyzer (SA)
	<input type="checkbox"/>	ANSI C63.10	11.9.2.2.2	Method AVGSA-1(Duty cycle ≥98%)
	<input type="checkbox"/>	ANSI C63.10	11.9.2.2.3	Method AVGSA-1A(Duty cycle ≥98%)
	<input type="checkbox"/>	ANSI C63.10	11.9.2.2.4	Method AVGSA-2(Duty cycle ≤98%)
	<input type="checkbox"/>	ANSI C63.10	11.9.2.2.5	Method AVGSA-2A(Duty cycle ≤98%)
	<input type="checkbox"/>	ANSI C63.10	11.9.2.2.4	Method AVGSA-3
	<input type="checkbox"/>	ANSI C63.10	11.9.2.2.5	Method AVGSA-3A
	<input type="checkbox"/>	ANSI C63.10	11.9.2.3	Measurement using a power meter (PM)
	<input type="checkbox"/>	ANSI C63.10	11.9.2.3.1	Method AVGPM
	<input type="checkbox"/>	ANSI C63.10	11.9.2.3.2	Method AVGPM-G

4.2 Band Edge Measurements	VERDICT: PASS
-----------------------------------	----------------------


4.2.1 Limit

Standard		FCC Part 15 Subpart C Paragraph 15.247(d) , 15.209;		
Frequency bands (MHz)	Detector	Limit (dBµV/m)	RBW (MHz)	Distance (m)
2310-2390	PK	74	1	3
2483.5-2500	AV	54	1	3

Note: The field strength of emissions appearing within these frequency bands shall not exceed the limits.

4.2.2 Test Setup

Above 1GHz Test Setup:

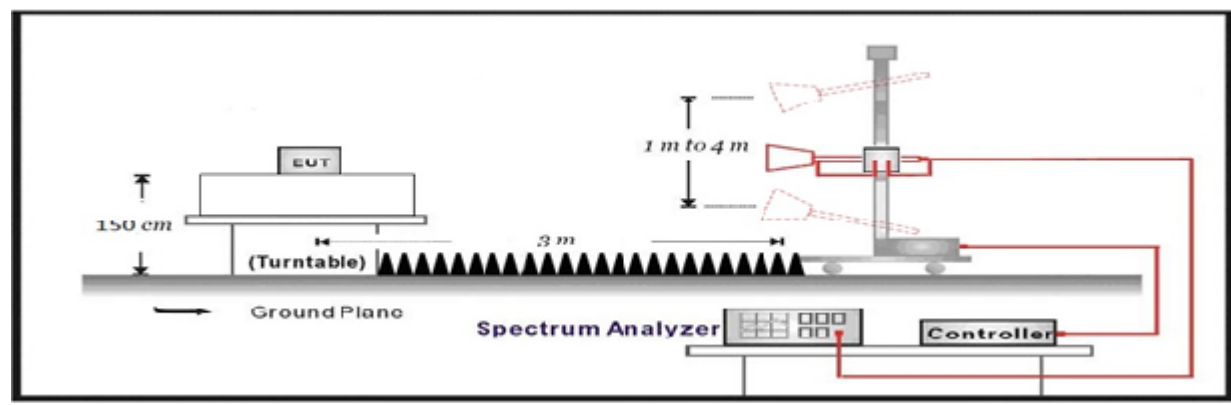

4.2.3 Test Procedure

	References Rule	Chapter	Description
<input checked="" type="checkbox"/>	ANSI C63.10	6.10	Band-edge testing
	<input checked="" type="checkbox"/> ANSI C63.10	6.10.5	Restricted-band band-edge measurements
	<input type="checkbox"/> ANSI C63.10	6.10.6	Marker-delta method
<input checked="" type="checkbox"/>	ANSI C63.10	11.12	Emissions in restricted frequency bands
	<input checked="" type="checkbox"/> ANSI C63.10	11.12.1	Radiated emission measurements
	<input checked="" type="checkbox"/> ANSI C63.10	11.12.2.7	Radiated spurious emission test
<input type="checkbox"/>	ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
<input type="checkbox"/>	ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
<input checked="" type="checkbox"/>	ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz

4.3 Emissions in Restricted Bands

VERDICT: PASS

4.3.1 Limit

Standard

FCC Part 15 Subpart C Paragraph 15.205

Restricted Bands of operation

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	608 – 614	5.35 – 5.46
2.1735 – 2.1905	16.80425 – 16.80475	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2483.5 – 2500	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	2690 – 2900	22.01 – 23.12
8.81425 – 8.81475	162.0125 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 – 3339	31.2 – 31.8
12.51975 – 12.52025	240 – 285	3345.8 – 3358	36.43 – 36.5
12.57675 – 12.57725	322 – 335.4	3600 – 4400	
13.36 – 13.41			

Restricted Band Emissions Limit

FCC Part 15 Subpart C Paragraph 15.209


Frequency (MHz)	Field strength (μV/m)	Field strength (dBμV/m)	Measurement distance (m)
0.009 - 0.49	2400/F(kHz)	48.5 – 13.8	300 _(Note 1)
0.49 - 1.705	24000/F(kHz)	33.8 - 23	30 _(Note 1)
1.705 - 30	30	29.5	30 _(Note 1)
30 - 88	100	40	3 _(Note 2)
88 - 216	150	43.5	3 _(Note 2)
216 - 960	200	46	3 _(Note 2)
Above 960	500	54	3 _(Note 2)

Note 1: At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).


Note 2: At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

4.3.2 Test Setup


Below 30MHz Test Setup:

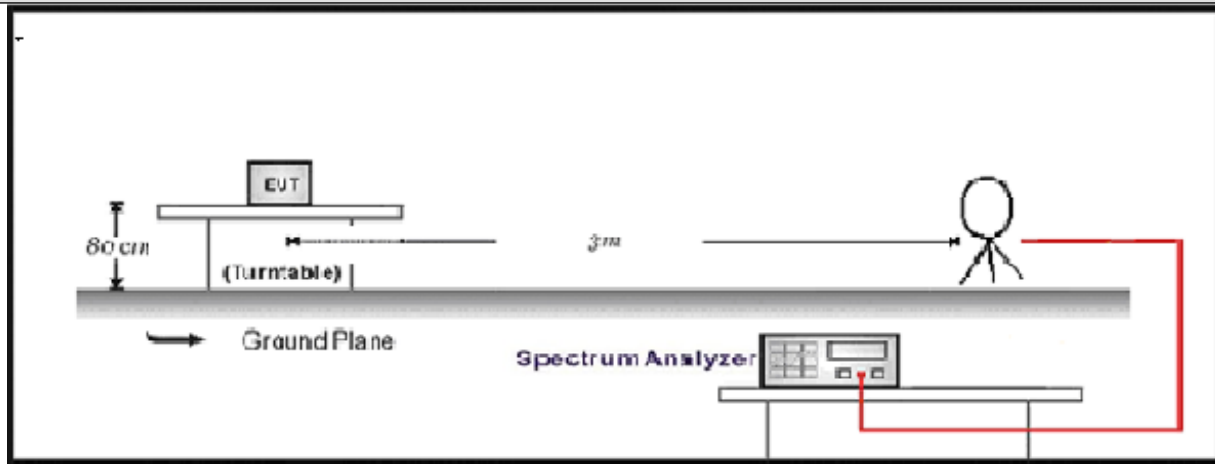

30MHz-1GHz Test Setup:

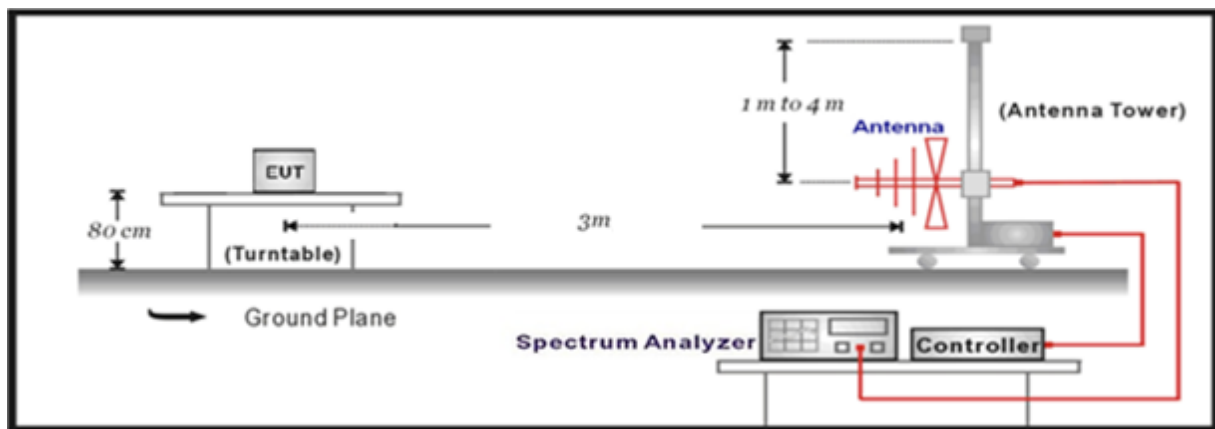

Above 1GHz Test Setup:

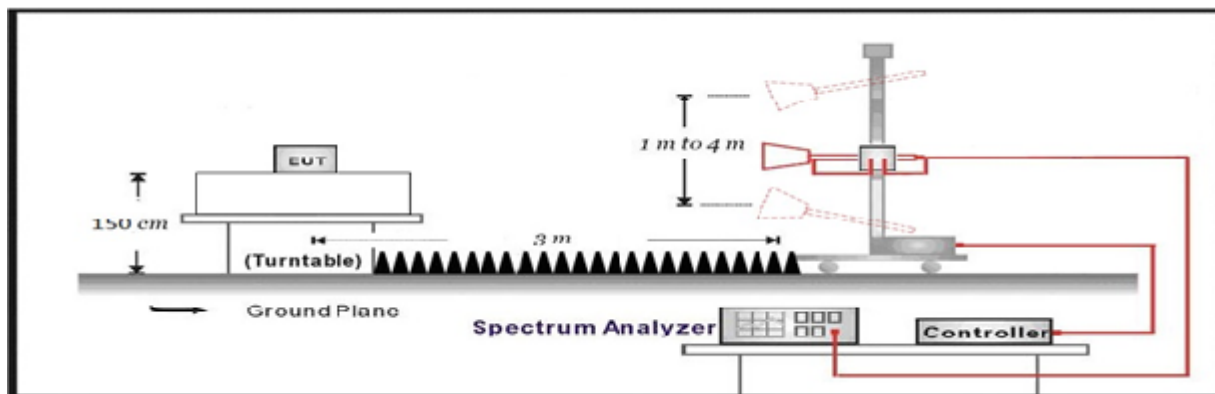

4.3.3 Test Procedure

	References Rule	Chapter	Description
<input checked="" type="checkbox"/>	ANSI C63.10	11.12	Emissions in restricted frequency bands
	<input checked="" type="checkbox"/> ANSI C63.10	11.12.1	Radiated emission measurements
	<input checked="" type="checkbox"/> ANSI C63.10	11.12.2.7	Radiated spurious emission test
	<input checked="" type="checkbox"/> ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
	<input checked="" type="checkbox"/> ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
	<input checked="" type="checkbox"/> ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz

4.4 Antenna Requirement

VERDICT: PASS

4.4.1 Limit:

Standard

FCC Part 15 Subpart C Paragraph 15.203;

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

4.4.2 Antenna Connector Construction:

<input checked="" type="checkbox"/>	The use of a permanently attached antenna
<input type="checkbox"/>	The antenna use of a unique coupling to the intentional radiator
<input type="checkbox"/>	The use of a nonstandard antenna jack or electrical connector
Please refer to the attached document "Internal Photograph" to show the antenna connector.	

5 TEST SETUP PHOTO AND EUT PHOTO

Remark: The test setup photo and EUT Photo please see appendix.


6 TEST RESULT

Appendix A: Maximum Conducted Output Power

Test Mode	Frequency[MHz]	Conducted Peak Power[dBm]	Conducted Limit[dBm]	EIRP[dBm]	EIRP Limit[dBm]	Verdict
Mode1	2402	4.92	≤29.66	7.40	≤36	PASS
	2440	4.74	≤29.66	7.22	≤36	PASS
	2480	4.86	≤29.66	7.34	≤36	PASS
Mode2	2402	4.51	≤29.66	6.99	≤36	PASS
	2440	4.49	≤29.66	6.97	≤36	PASS
	2480	4.47	≤29.66	6.95	≤36	PASS
Note 1: EIRP = Conducted power + Antenna gain						
Note 2: Please refer to callus 1.2 for antenna gain.						


Appendix B: Band edge measurements

Profile: 2410620R	Page No.: 1
Engineer: Pengchengyang	
Site: AC5	Time: 2024/03/07 - 15:01
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: SKI.WB663U.2	Power: 120Vac/60Hz
Note: Mode 1: Transmit at 2402MHz by LE_1Mbps	

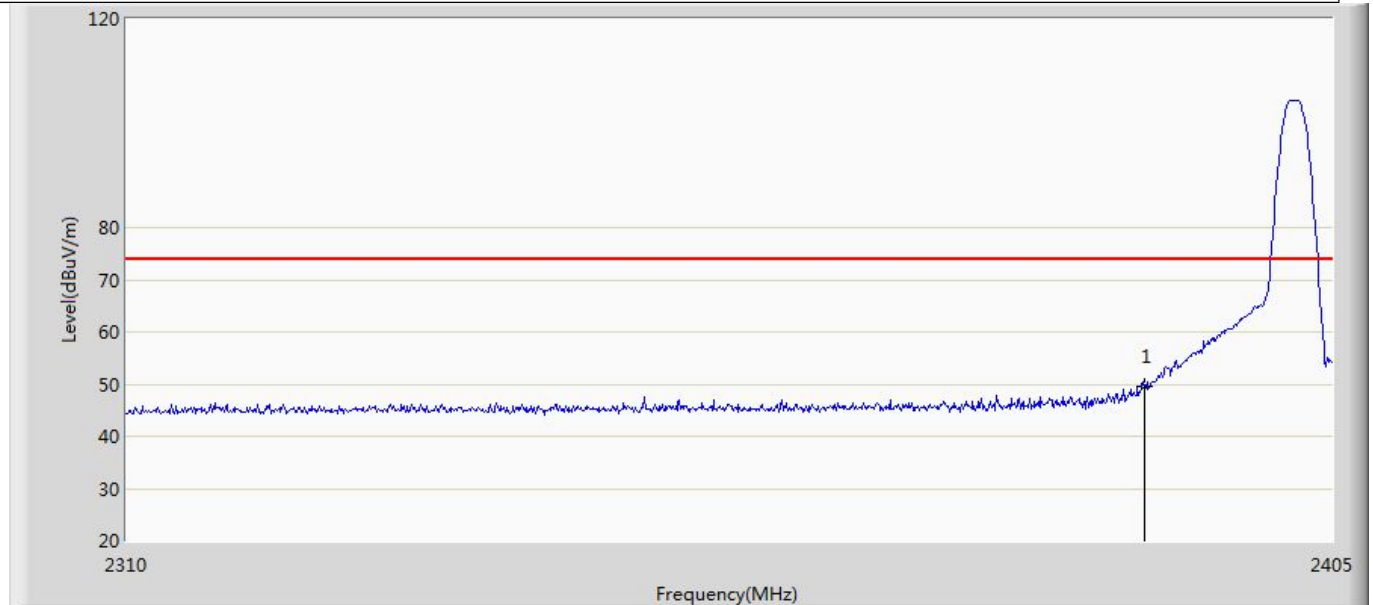


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	49.704	15.553	-24.296	74.000	34.151	PK

Profile: 2410620R	Page No.: 2
Engineer: Pengchengyang	
Site: AC5	Time: 2024/03/07 - 15:04
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: SKI.WB663U.2	Power: 120Vac/60Hz
Note: Mode 1: Transmit at 2402MHz by LE_1Mbps	

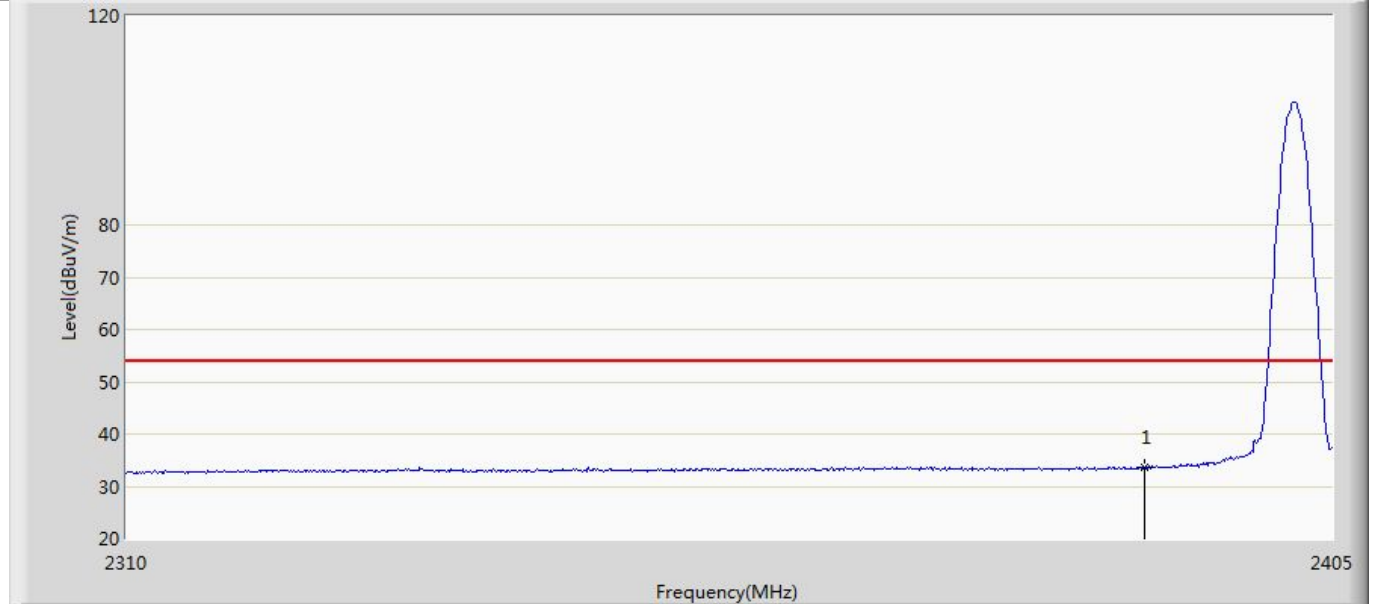


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	33.602	-0.549	-20.398	54.000	34.151	AV

Profile: 2410620R	Page No.: 3
Engineer: Pengchengyang	
Site: AC5	Time: 2024/03/07 - 15:06
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: SKI.WB663U.2	Power: 120Vac/60Hz
Note: Mode 1: Transmit at 2402MHz by LE_1Mbps	

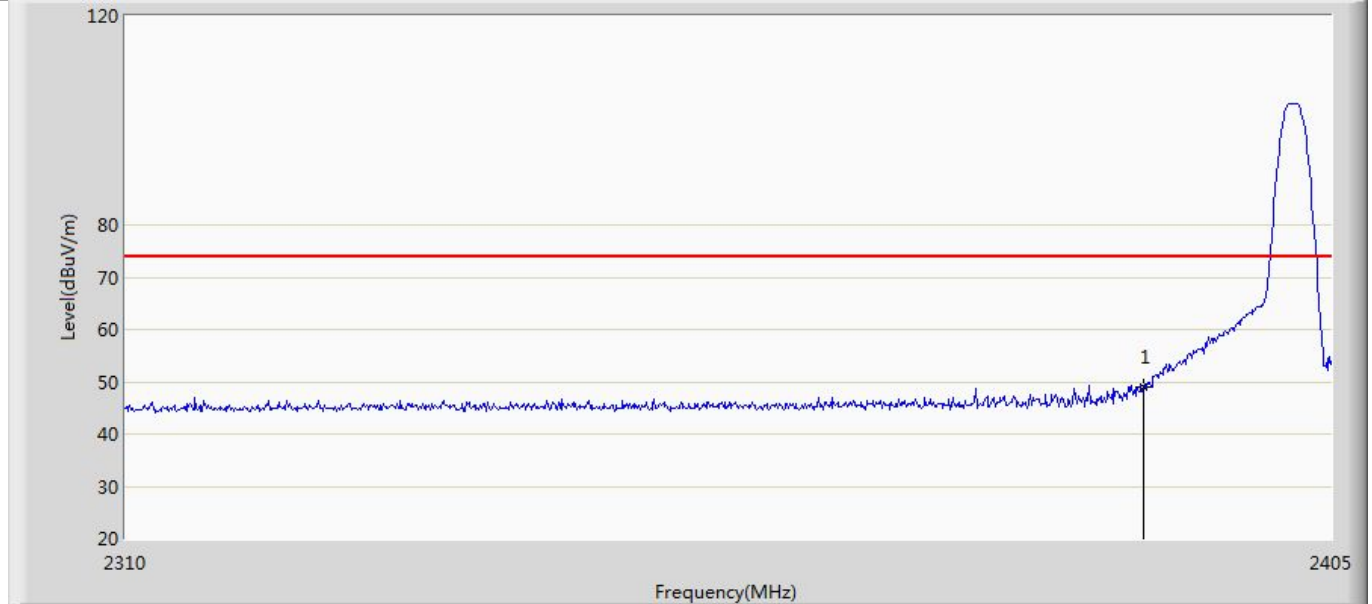


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	48.970	14.819	-25.030	74.000	34.151	PK

Profile: 2410620R	Page No.: 4
Engineer: Pengchengyang	
Site: AC5	Time: 2024/03/07 - 15:07
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: SKI.WB663U.2	Power: 120Vac/60Hz
Note: Mode 1: Transmit at 2402MHz by LE_1Mbps	

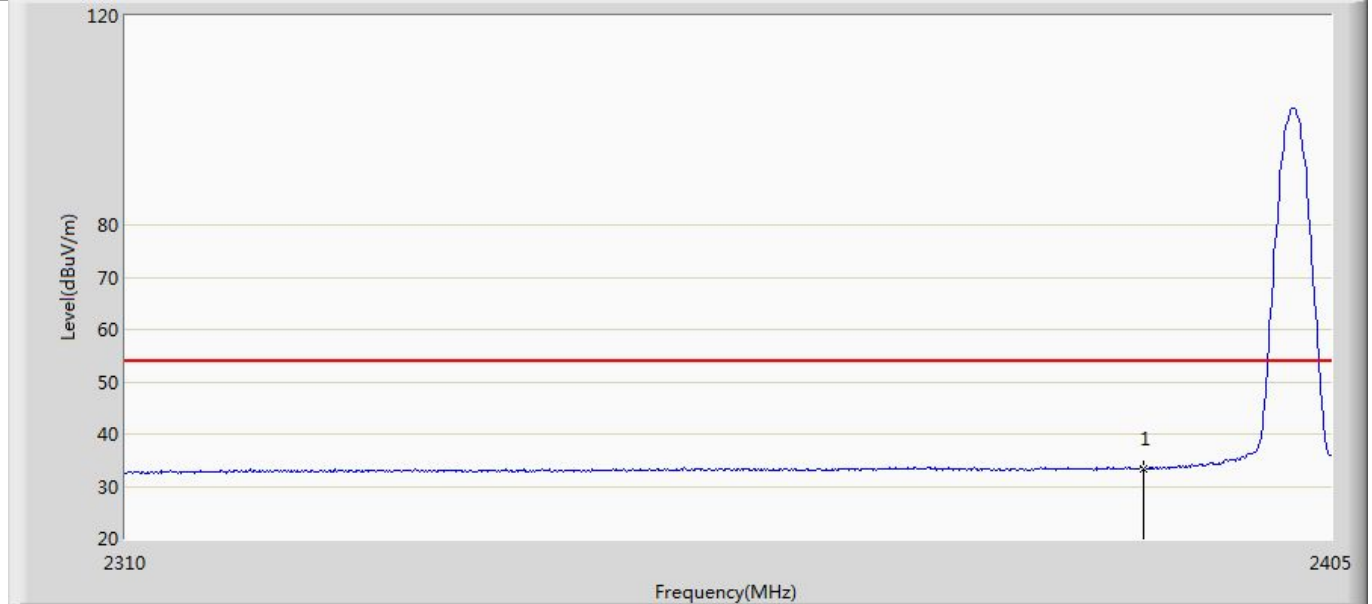


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	33.371	-0.780	-20.629	54.000	34.151	AV

Profile: 2410620R	Page No.: 5
Engineer: Pengchengyang	
Site: AC5	Time: 2024/03/07 - 15:08
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: SKI.WB663U.2	Power: 120Vac/60Hz
Note: Mode 1: Transmit at 2480MHz by LE_1Mbps	

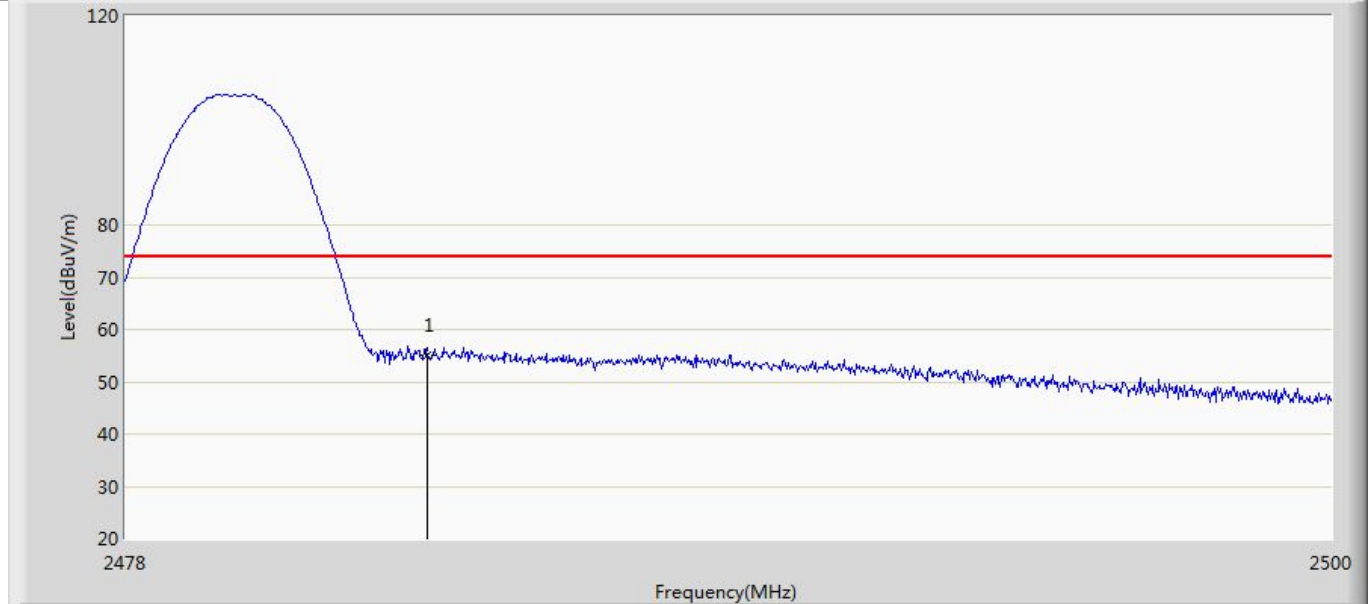


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	55.110	20.654	-18.890	74.000	34.456	PK

Profile: 2410620R	Page No.: 6
Engineer: Pengchengyang	
Site: AC5	Time: 2024/03/07 - 15:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: SKI.WB663U.2	Power: 120Vac/60Hz
Note: Mode 1: Transmit at 2480MHz by LE_1Mbps	

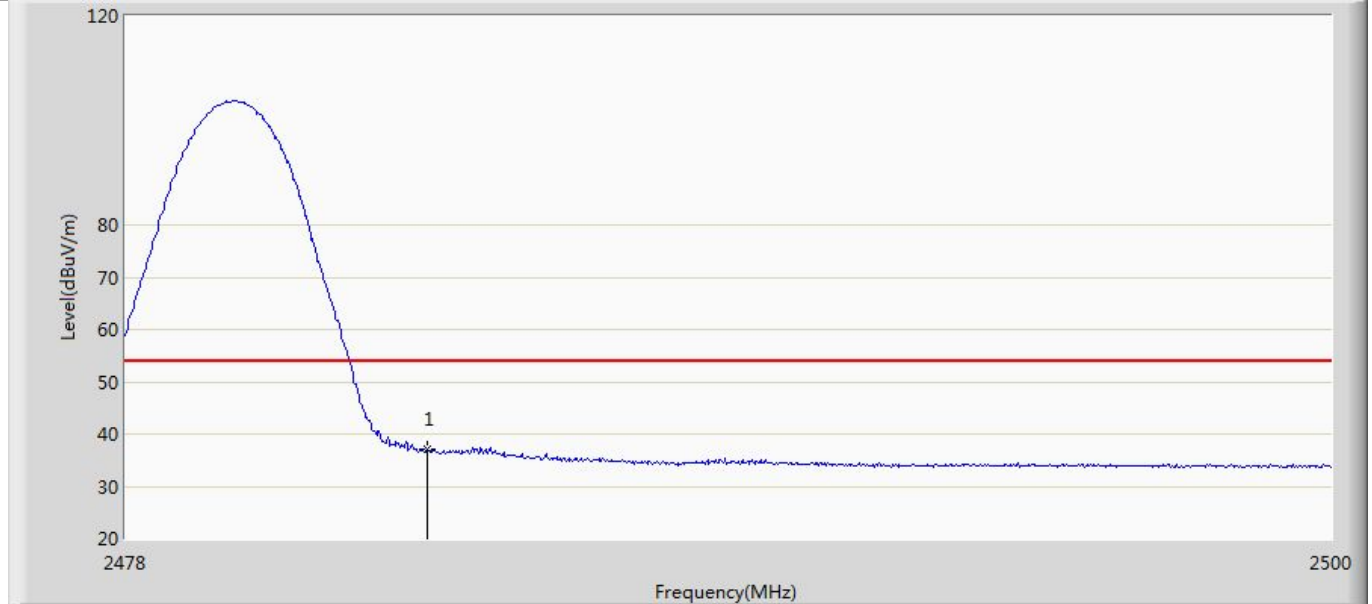


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	37.043	2.587	-16.957	54.000	34.456	AV

Profile: 2410620R	Page No.: 7
Engineer: Pengchengyang	
Site: AC5	Time: 2024/03/07 - 15:11
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: SKI.WB663U.2	Power: 120Vac/60Hz
Note: Mode 1: Transmit at 2480MHz by LE_1Mbps	

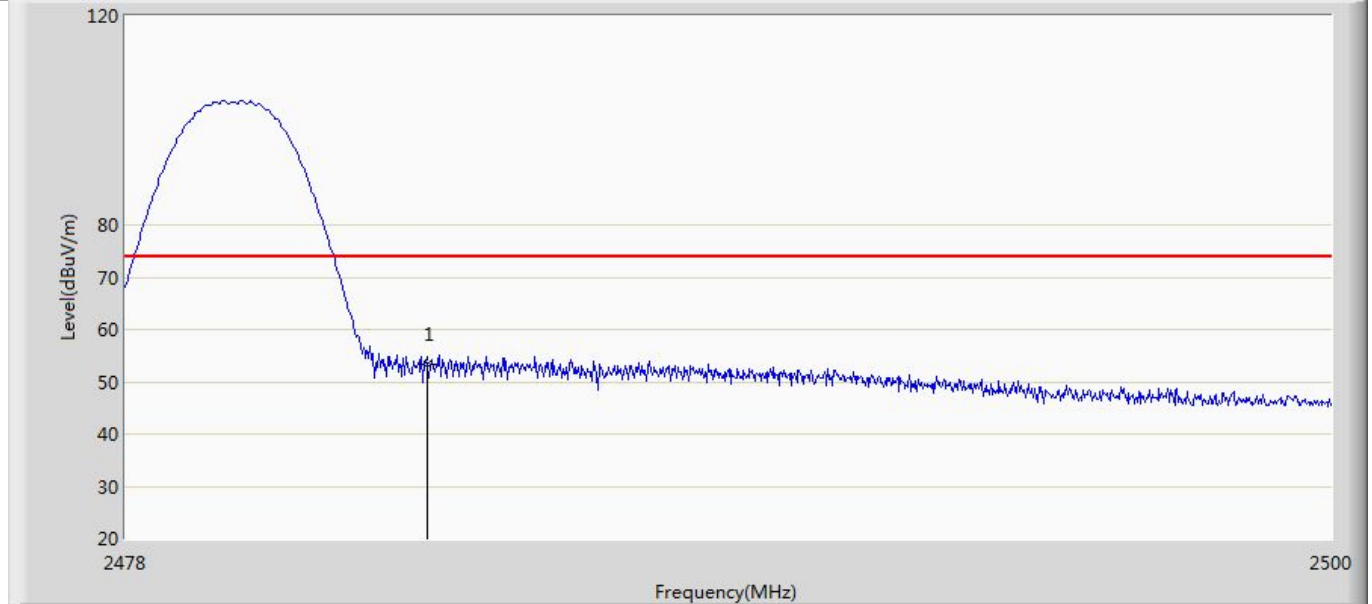


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	53.260	18.804	-20.740	74.000	34.456	PK

Profile: 2410620R	Page No.: 8
Engineer: Pengchengyang	
Site: AC5	Time: 2024/03/07 - 15:12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: SKI.WB663U.2	Power: 120Vac/60Hz
Note: Mode 1: Transmit at 2480MHz by LE_1Mbps	

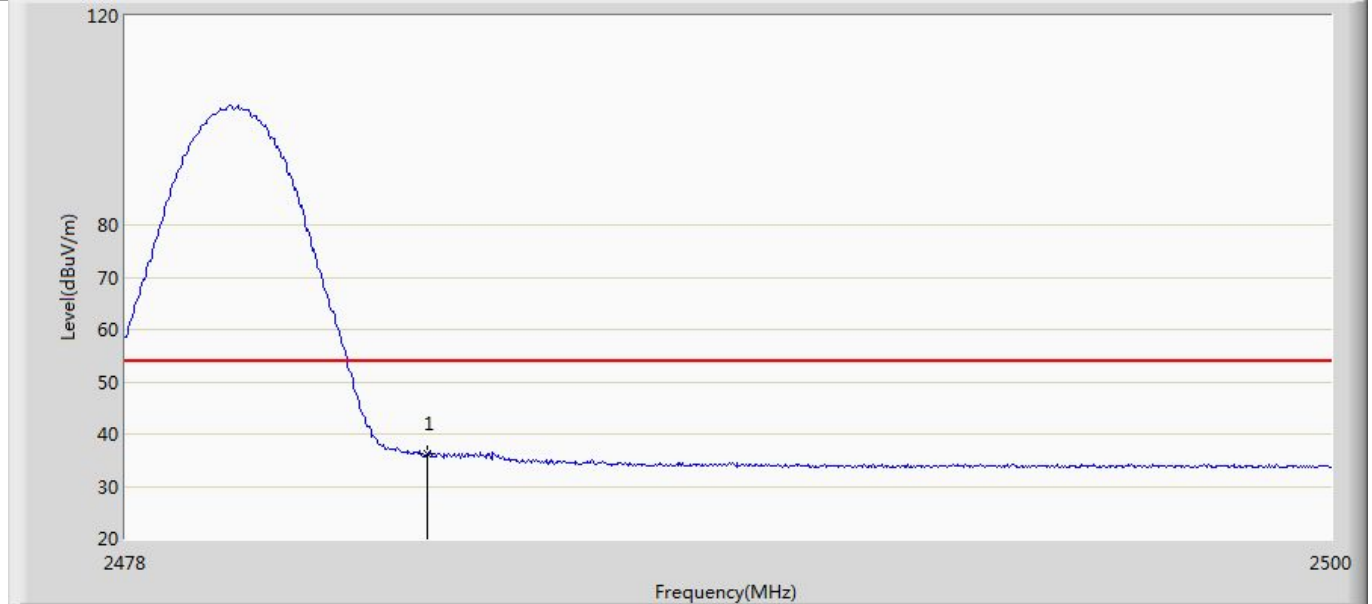


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	36.328	1.872	-17.672	54.000	34.456	AV

Profile: 2410620R	Page No.: 9
Engineer: Pengchengyang	
Site: AC5	Time: 2024/03/07 - 15:13
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: SKI.WB663U.2	Power: 120Vac/60Hz
Note: Mode 2: Transmit at 2402MHz by LE_2Mbps	

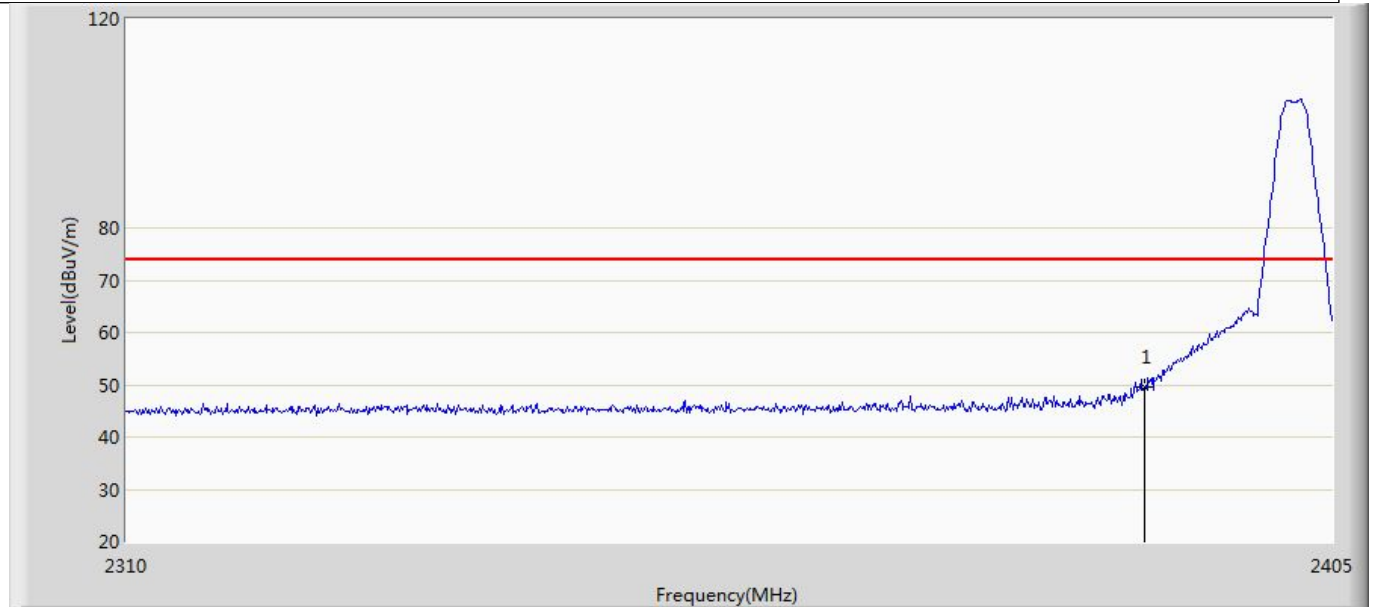


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	49.482	15.331	-24.518	74.000	34.151	PK

Profile: 2410620R	Page No.: 10
Engineer: Pengchengyang	
Site: AC5	Time: 2024/03/07 - 15:16
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: SKI.WB663U.2	Power: 120Vac/60Hz
Note: Mode 2: Transmit at 2402MHz by LE_2Mbps	

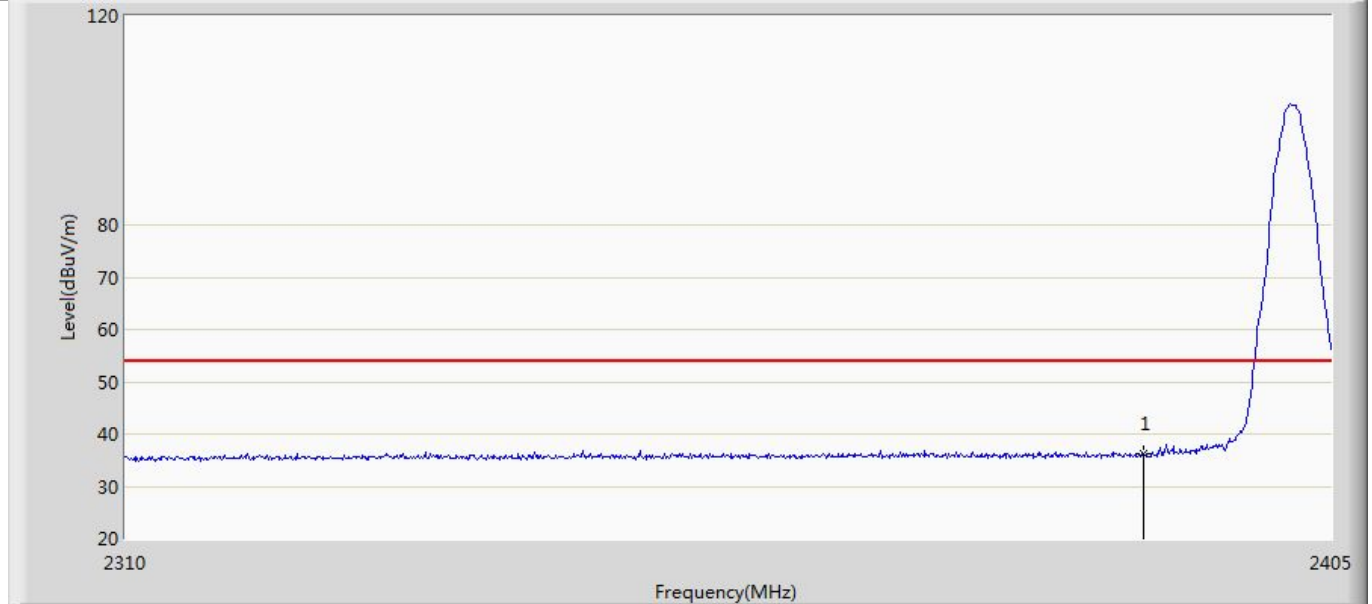


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	36.140	1.989	-17.860	54.000	34.151	AV

Profile: 2410620R	Page No.: 11
Engineer: Pengchengyang	
Site: AC5	Time: 2024/03/07 - 15:17
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: SKI.WB663U.2	Power: 120Vac/60Hz
Note: Mode 2: Transmit at 2402MHz by LE_2Mbps	

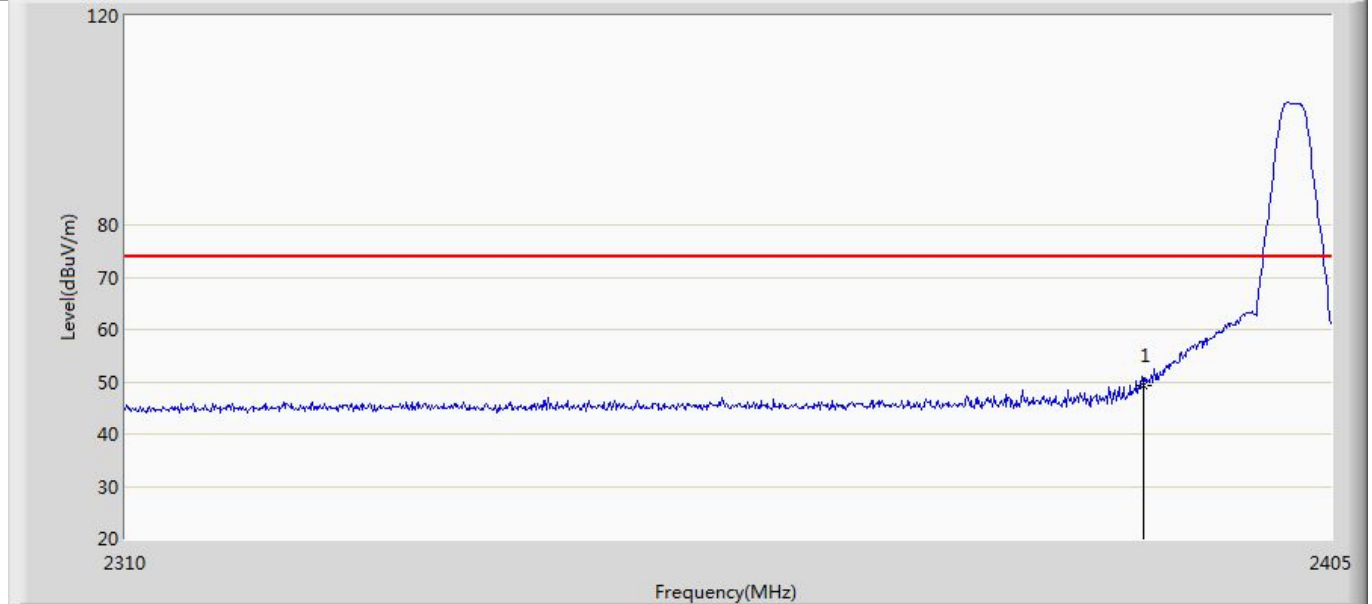


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	49.343	15.192	-24.657	74.000	34.151	PK

Profile: 2410620R	Page No.: 12
Engineer: Pengchengyang	
Site: AC5	Time: 2024/03/07 - 15:18
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: SKI.WB663U.2	Power: 120Vac/60Hz
Note: Mode 2: Transmit at 2402MHz by LE_2Mbps	

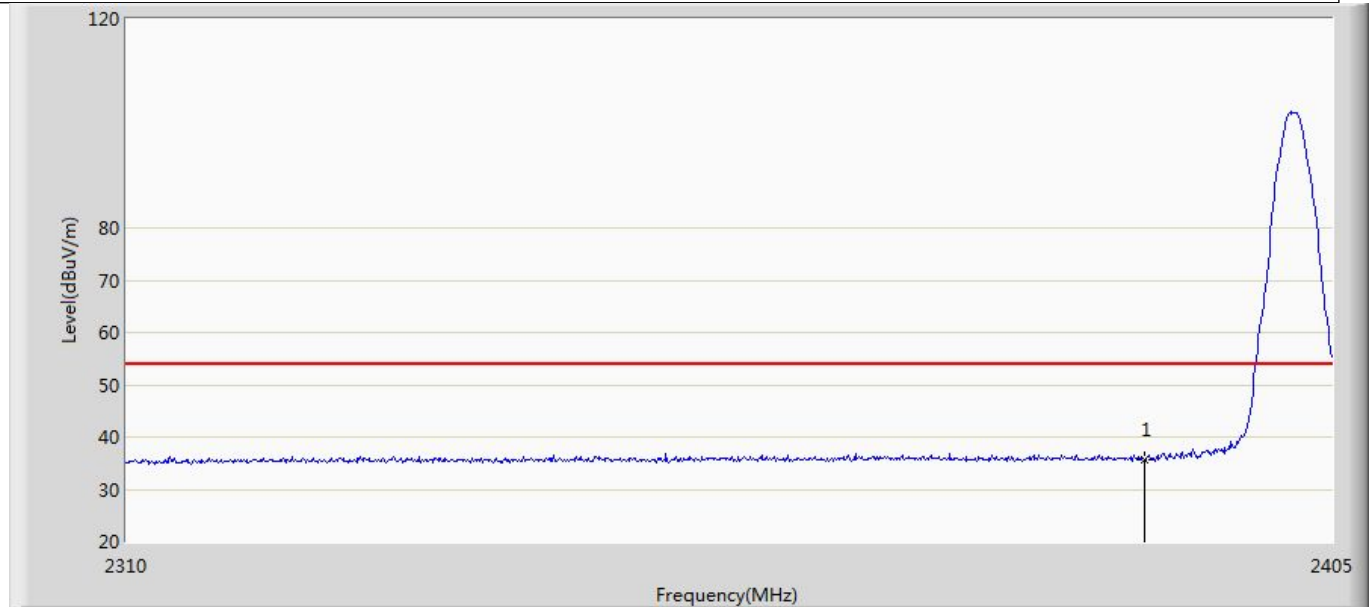


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	35.744	1.593	-18.256	54.000	34.151	AV

Profile: 2410620R	Page No.: 13
Engineer: Pengchengyang	
Site: AC5	Time: 2024/03/07 - 15:19
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: SKI.WB663U.2	Power: 120Vac/60Hz
Note: Mode 2: Transmit at 2480MHz by LE_2Mbps	

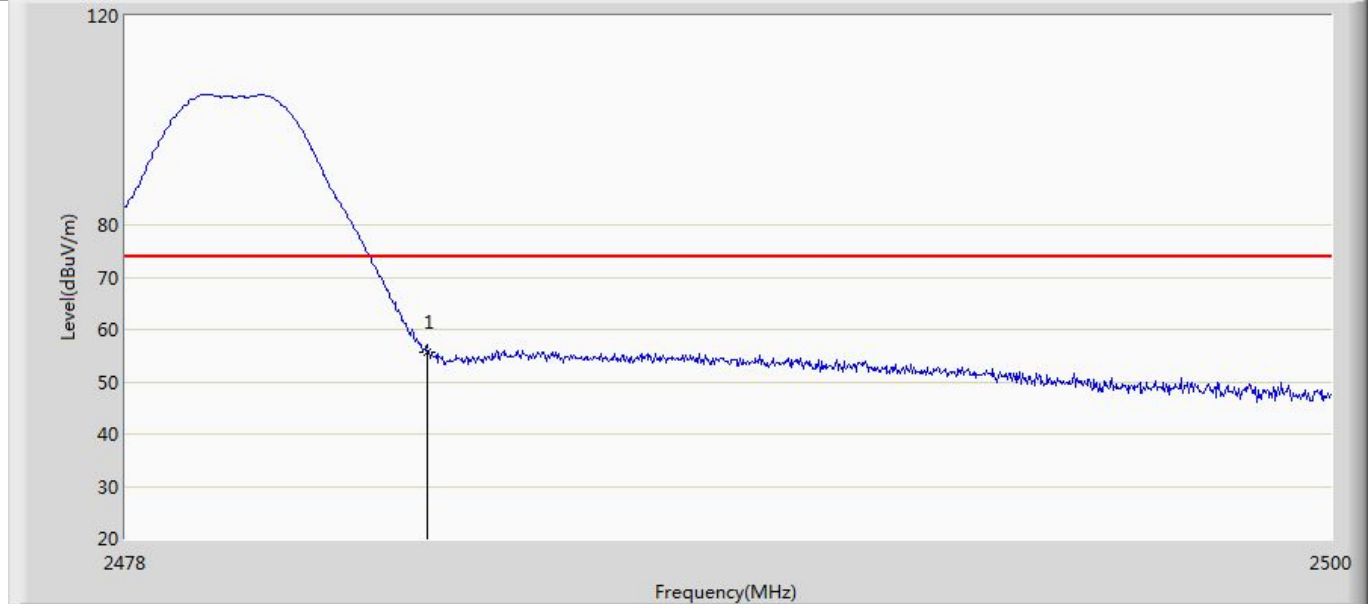


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	55.769	21.313	-18.231	74.000	34.456	PK

Profile: 2410620R	Page No.: 14
Engineer: Pengchengyang	
Site: AC5	Time: 2024/03/07 - 15:21
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: SKI.WB663U.2	Power: 120Vac/60Hz
Note: Mode 2: Transmit at 2480MHz by LE_2Mbps	

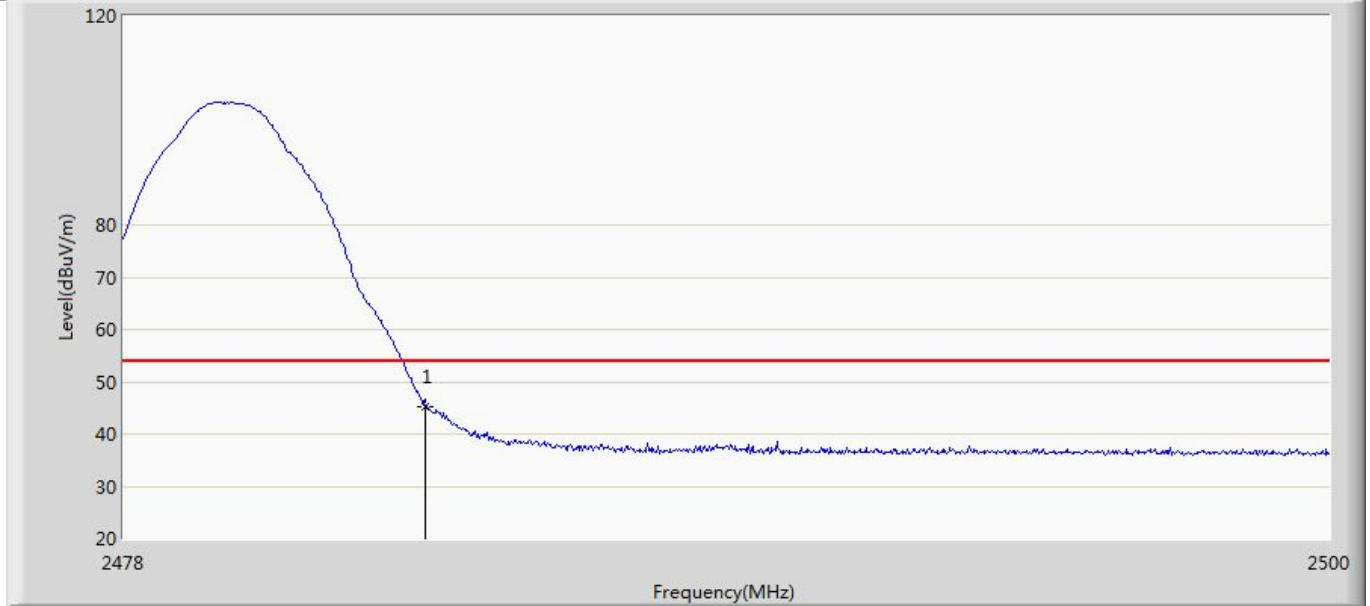


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	45.323	10.867	-8.677	54.000	34.456	AV

Profile: 2410620R	Page No.: 15
Engineer: Pengchengyang	
Site: AC5	Time: 2024/03/07 - 15:22
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: SKI.WB663U.2	Power: 120Vac/60Hz
Note: Mode 2: Transmit at 2480MHz by LE_2Mbps	

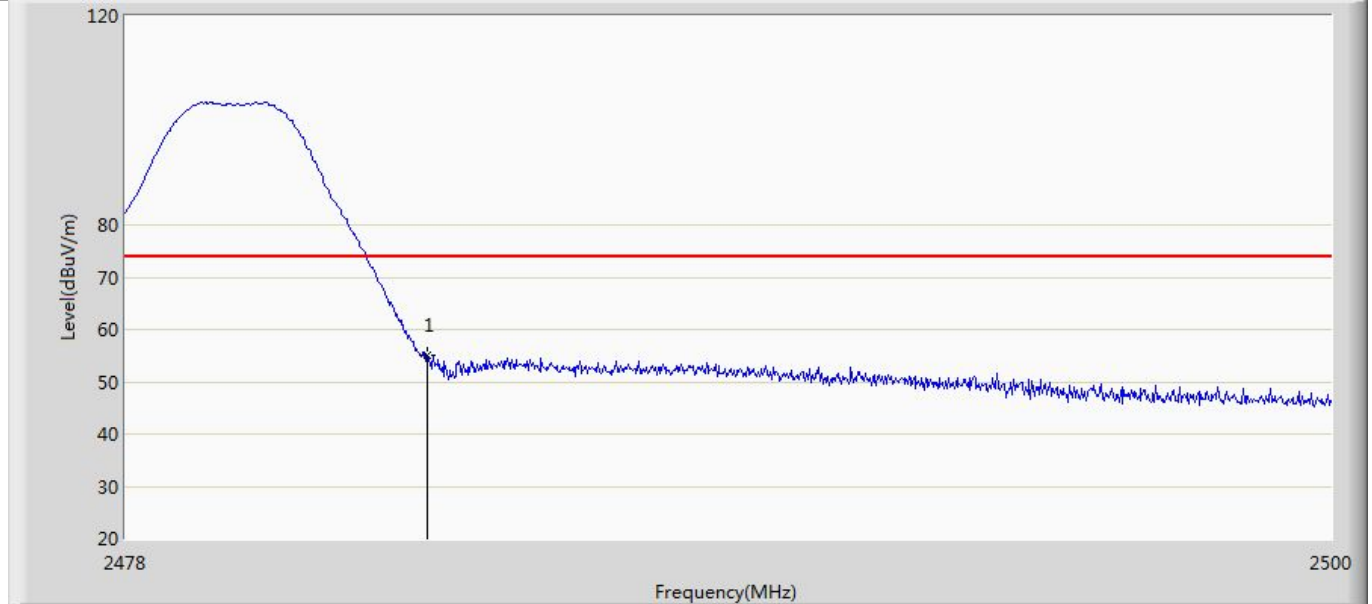

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	55.066	20.610	-18.934	74.000	34.456	PK

Profile: 2410620R	Page No.: 16
Engineer: Pengchengyang	
Site: AC5	Time: 2024/03/07 - 15:23
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: SKI.WB663U.2	Power: 120Vac/60Hz
Note: Mode 2: Transmit at 2480MHz by LE_2Mbps	

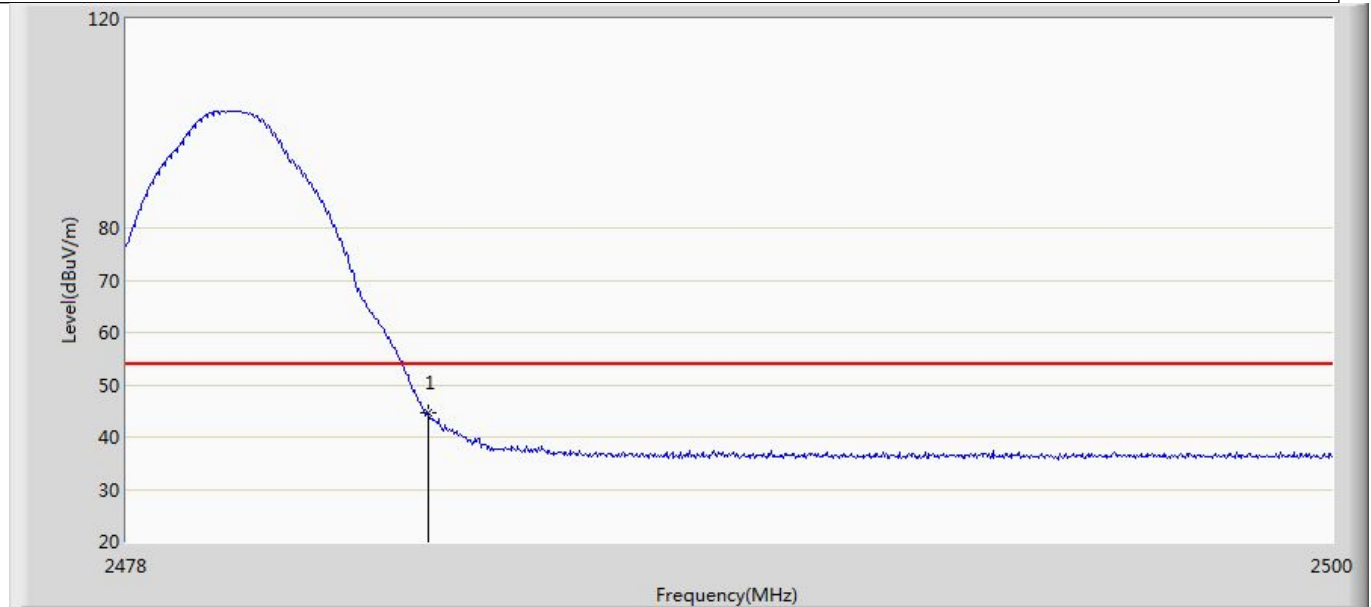


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	44.672	10.216	-9.328	54.000	34.456	AV

Note:

1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp). Test Photograph.


Appendix C: Emissions in Restricted Bands

Profile: 2410620R	Page No.: 13
Engineer: Pengchengyang	
Site: AC5	Time: 2024/03/08 - 13:33
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: SKI.WB663U.2	Power: 120Vac/60Hz
Note: Mode 1: Transmit at 2402MHz by LE_1Mbps	

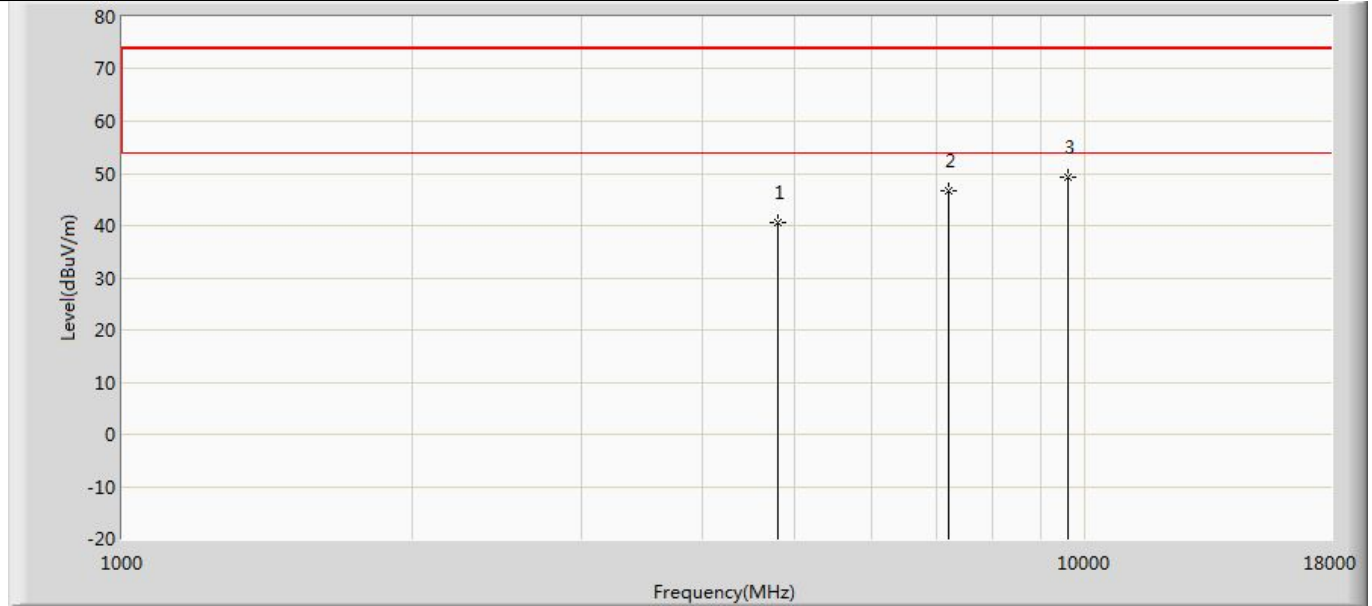


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4804.000	40.556	52.444	-33.444	74.000	-11.888	PK
2		7206.000	46.612	52.778	-27.388	74.000	-6.166	PK
3	*	9608.000	49.163	52.386	-24.837	74.000	-3.222	PK

Profile: 2410620R	Page No.: 14
Engineer: Pengchengyang	
Site: AC5	Time: 2024/03/08 - 13:33
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: SKI.WB663U.2	Power: 120Vac/60Hz
Note: Mode 1: Transmit at 2402MHz by LE_1Mbps	

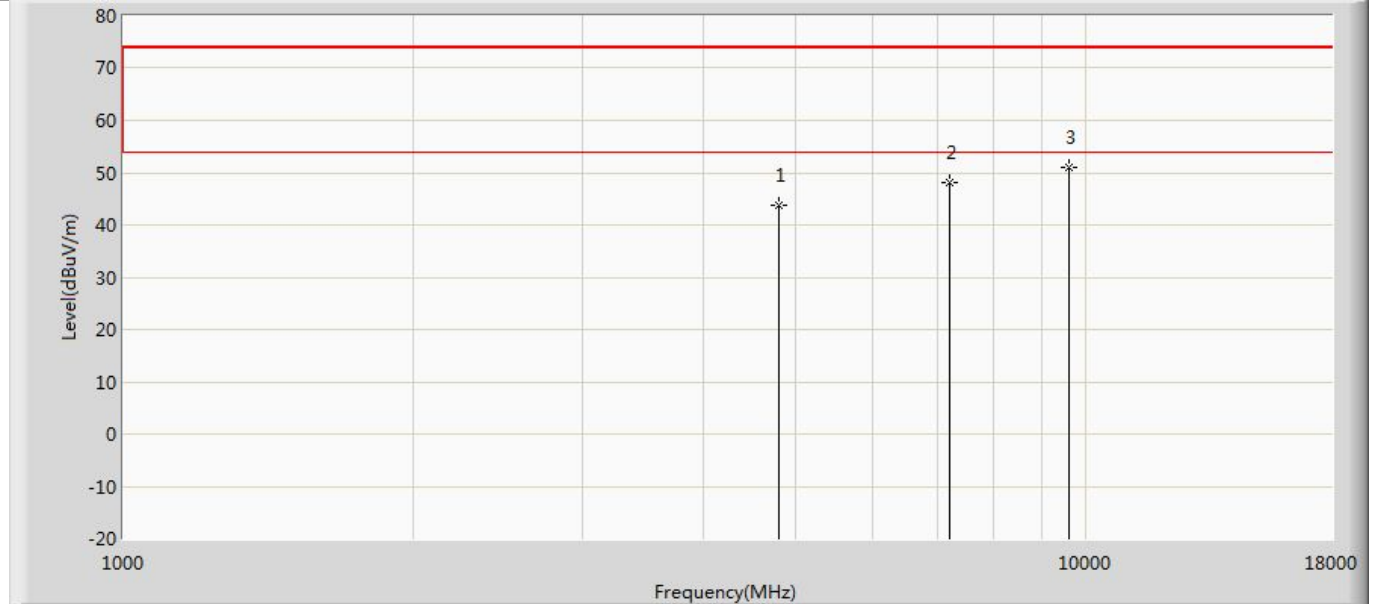


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4804.000	43.840	55.728	-30.160	74.000	-11.888	PK
2		7206.000	47.988	54.154	-26.012	74.000	-6.166	PK
3	*	9608.000	51.028	54.251	-22.972	74.000	-3.222	PK

Profile: 2410620R	Page No.: 15
Engineer: Pengchengyang	
Site: AC5	Time: 2024/03/08 - 13:33
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: SKI.WB663U.2	Power: 120Vac/60Hz
Note: Mode 1: Transmit at 2440MHz by LE_1Mbps	

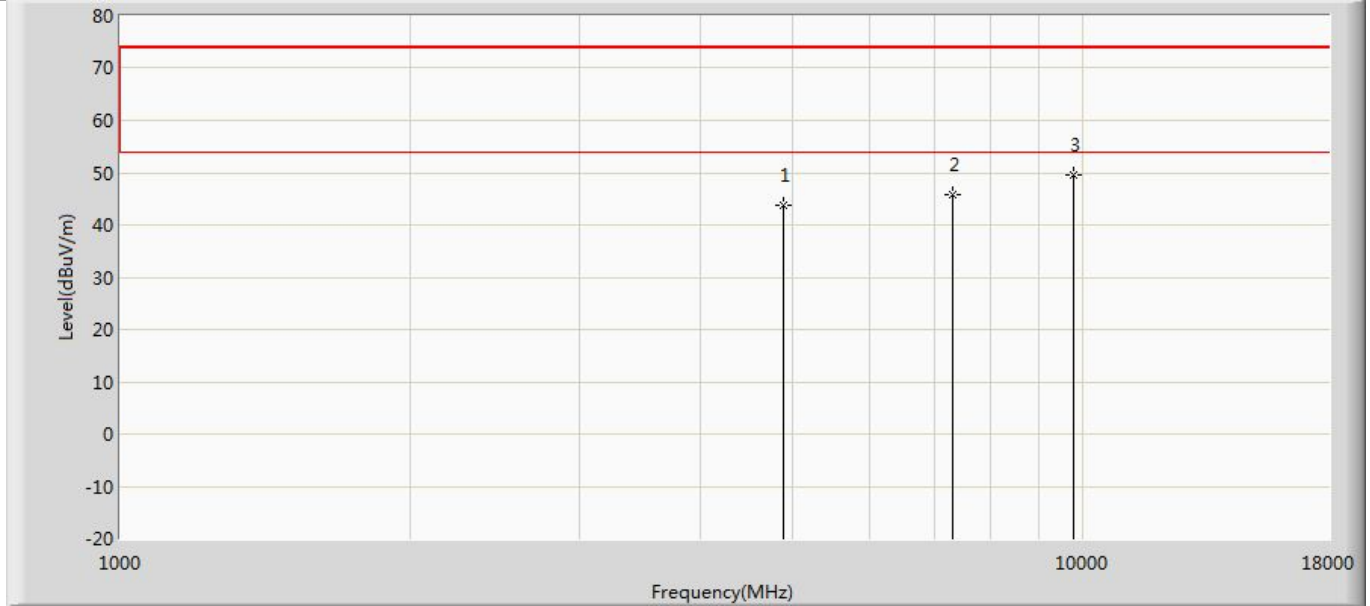


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4880.000	43.709	54.313	-30.291	74.000	-10.603	PK
2		7320.000	45.723	52.650	-28.277	74.000	-6.927	PK
3	*	9760.000	49.450	52.323	-24.550	74.000	-2.874	PK

Profile: 2410620R	Page No.: 16
Engineer: Pengchengyang	
Site: AC5	Time: 2024/03/08 - 13:33
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: SKI.WB663U.2	Power: 120Vac/60Hz
Note: Mode 1: Transmit at 2440MHz by LE_1Mbps	

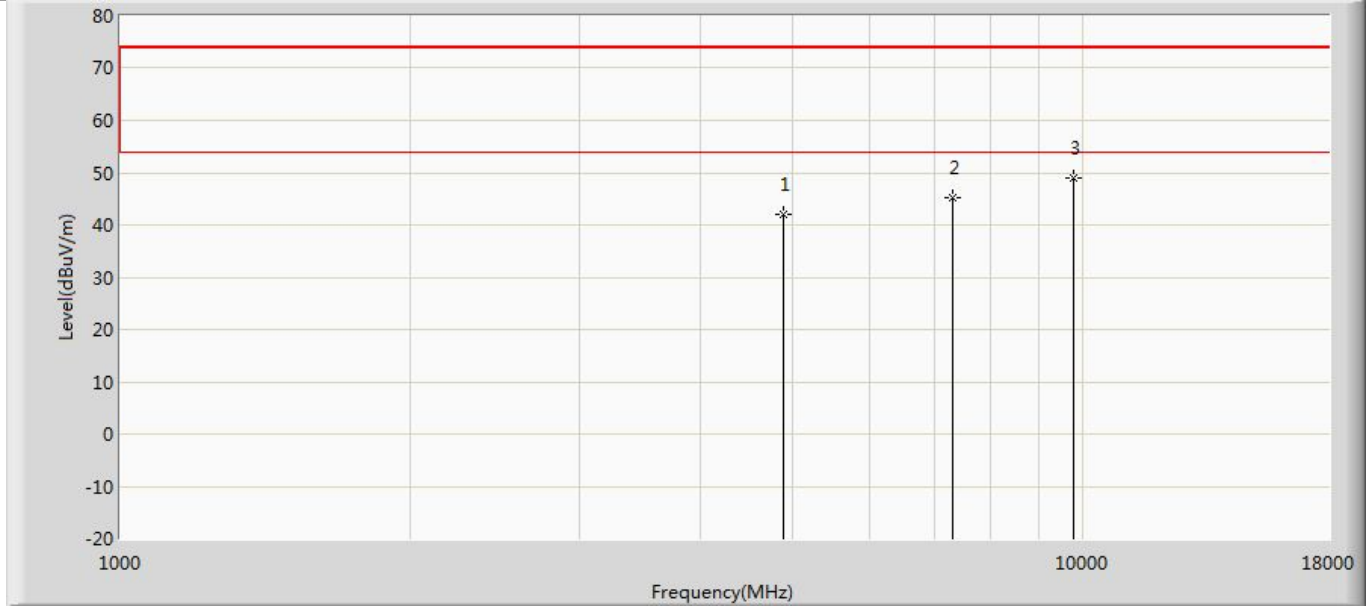


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4880.000	41.955	52.559	-32.045	74.000	-10.603	PK
2		7320.000	45.159	52.086	-28.841	74.000	-6.927	PK
3	*	9760.000	49.073	51.946	-24.927	74.000	-2.874	PK

Profile: 2410620R	Page No.: 17
Engineer: Pengchengyang	
Site: AC5	Time: 2024/03/08 - 13:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: SKI.WB663U.2	Power: 120Vac/60Hz
Note: Mode 1: Transmit at 2480MHz by LE_1Mbps	

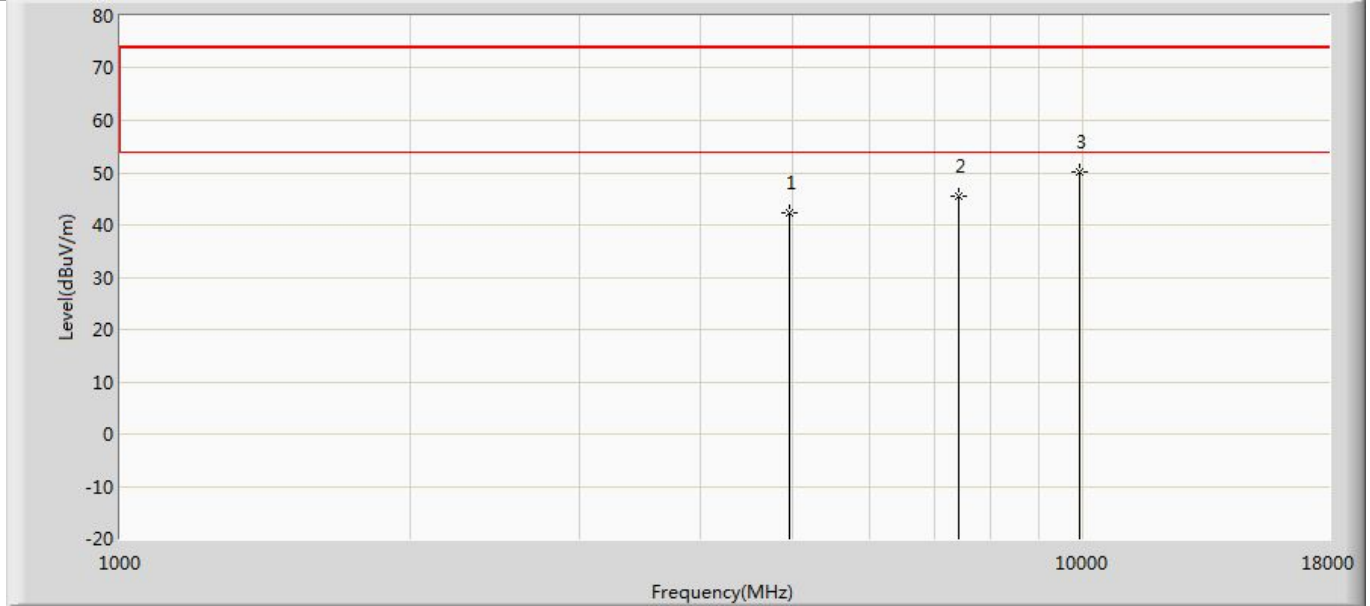


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	42.257	52.963	-31.743	74.000	-10.707	PK
2		7440.000	45.638	52.417	-28.362	74.000	-6.779	PK
3	*	9920.000	50.268	52.090	-23.732	74.000	-1.821	PK

Profile: 2410620R	Page No.: 18
Engineer: Pengchengyang	
Site: AC5	Time: 2024/03/08 - 13:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: SKI.WB663U.2	Power: 120Vac/60Hz
Note: Mode 1: Transmit at 2480MHz by LE_1Mbps	

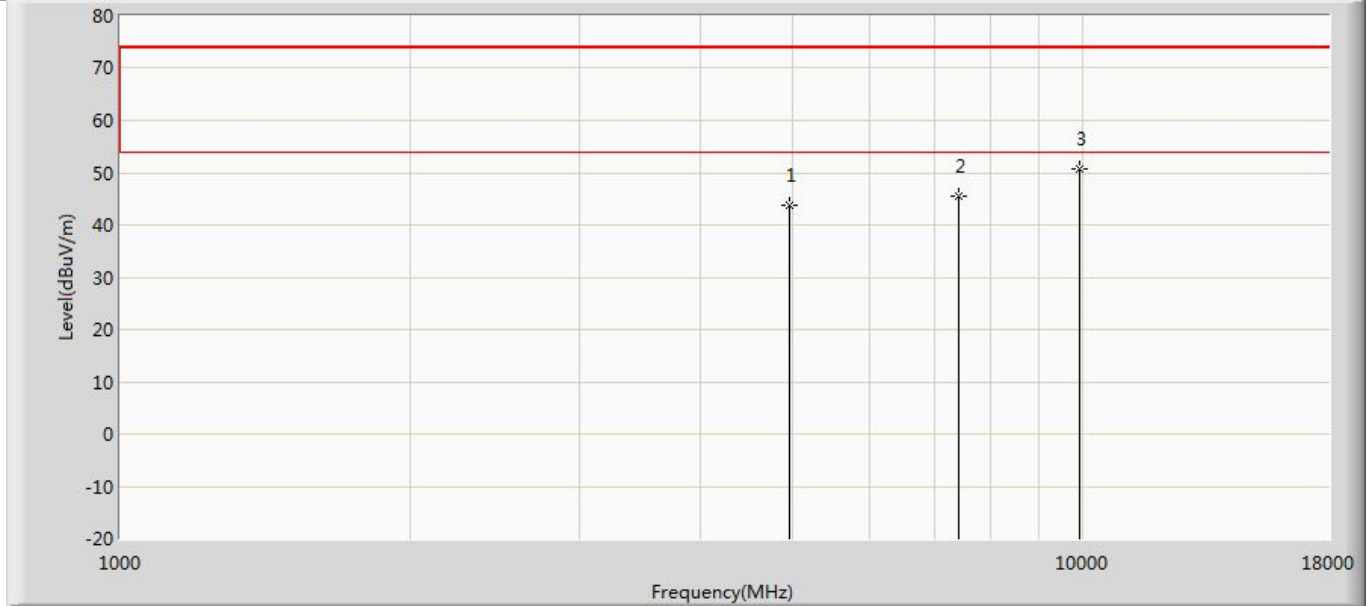


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	43.626	54.332	-30.374	74.000	-10.707	PK
2		7440.000	45.622	52.401	-28.378	74.000	-6.779	PK
3	*	9920.000	50.856	52.678	-23.144	74.000	-1.821	PK

Profile: 2410620R	Page No.: 19
Engineer: Pengchengyang	
Site: AC5	Time: 2024/03/08 - 13:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: SKI.WB663U.2	Power: 120Vac/60Hz
Note: Mode 2: Transmit at 2402MHz by LE_2Mbps	

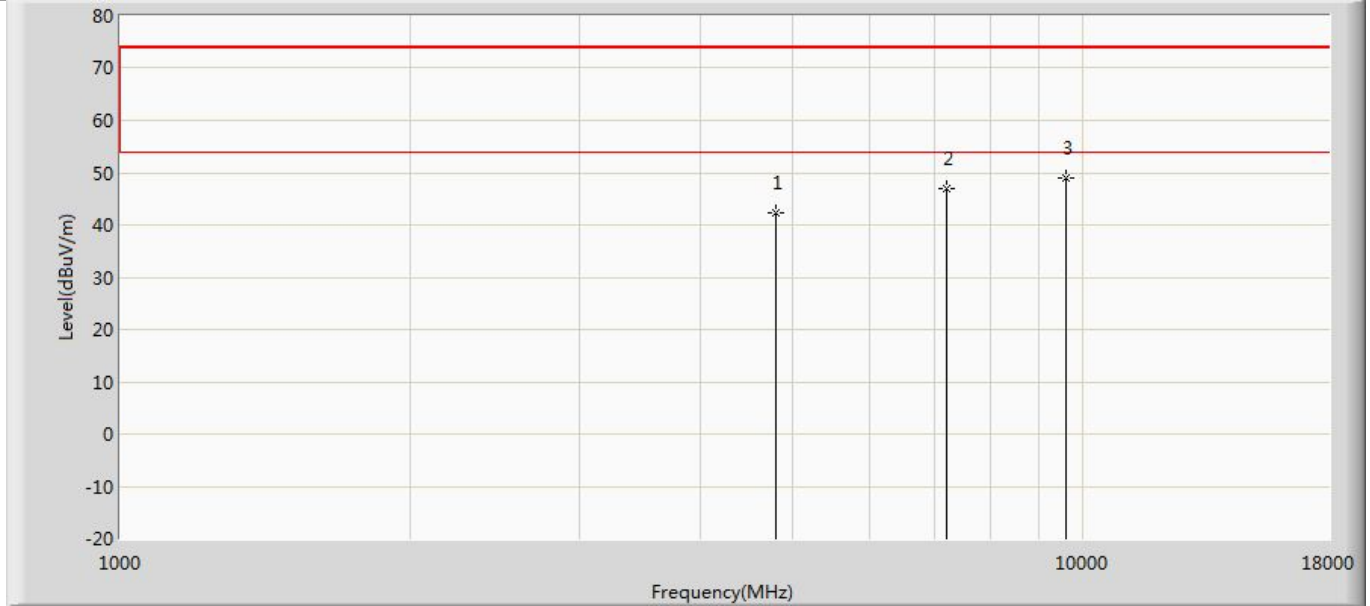


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4804.000	42.407	54.295	-31.593	74.000	-11.888	PK
2		7206.000	46.951	53.117	-27.049	74.000	-6.166	PK
3	*	9608.000	48.905	52.128	-25.095	74.000	-3.222	PK

Profile: 2410620R	Page No.: 20
Engineer: Pengchengyang	
Site: AC5	Time: 2024/03/08 - 13:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: SKI.WB663U.2	Power: 120Vac/60Hz
Note: Mode 2: Transmit at 2402MHz by LE_2Mbps	

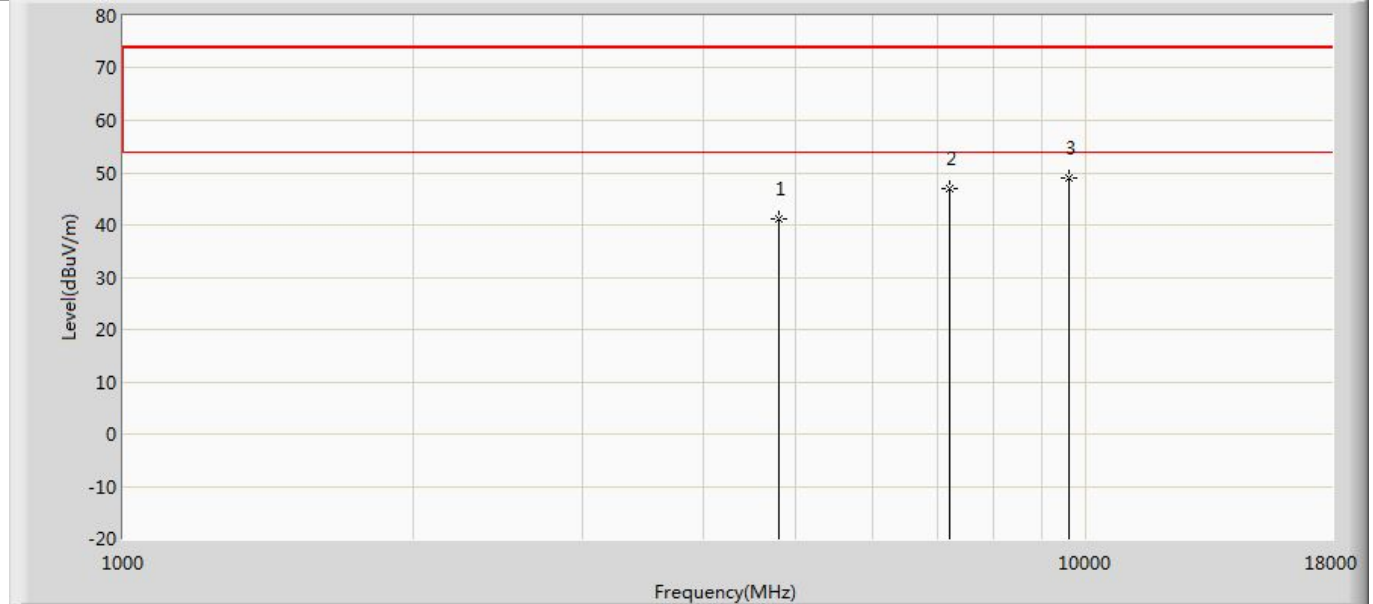


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4804.000	41.291	53.179	-32.709	74.000	-11.888	PK
2		7206.000	47.098	53.264	-26.902	74.000	-6.166	PK
3	*	9608.000	48.888	52.111	-25.112	74.000	-3.222	PK

Profile: 2410620R	Page No.: 21
Engineer: Pengchengyang	
Site: AC5	Time: 2024/03/08 - 13:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: SKI.WB663U.2	Power: 120Vac/60Hz
Note: Mode 2: Transmit at 2440MHz by LE_2Mbps	

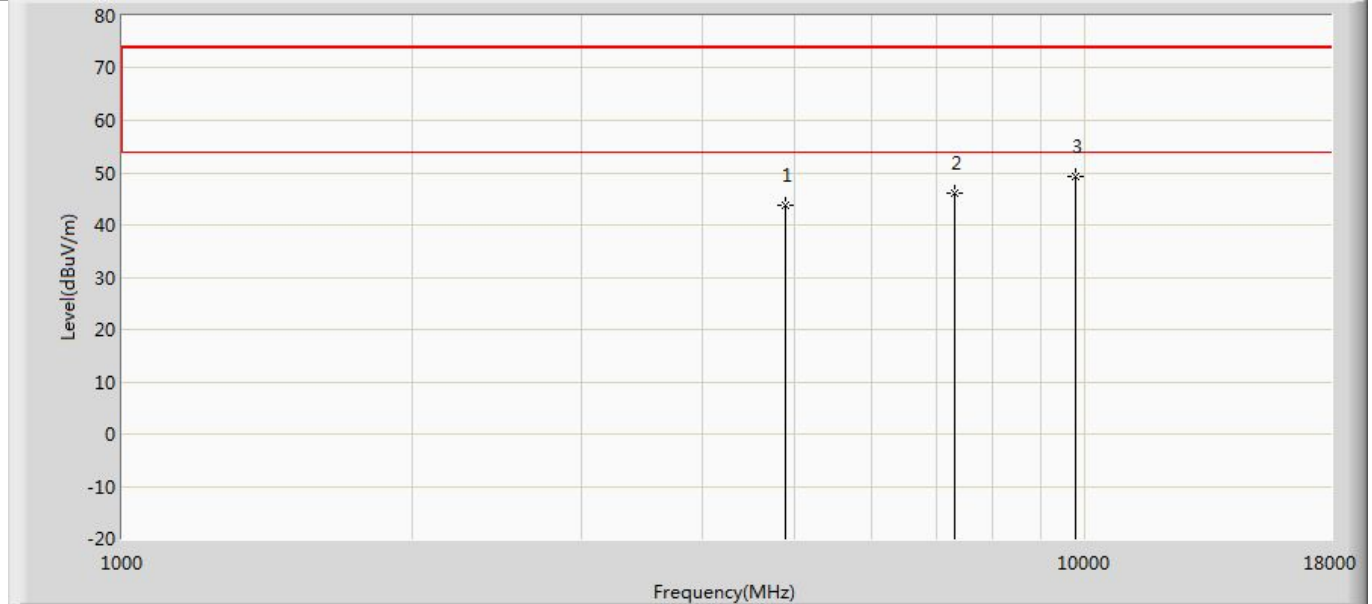


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4880.000	43.792	54.396	-30.208	74.000	-10.603	PK
2		7320.000	45.962	52.889	-28.038	74.000	-6.927	PK
3	*	9760.000	49.140	52.013	-24.860	74.000	-2.874	PK

Profile: 2410620R	Page No.: 22
Engineer: Pengchengyang	
Site: AC5	Time: 2024/03/08 - 13:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: SKI.WB663U.2	Power: 120Vac/60Hz
Note: Mode 2: Transmit at 2440MHz by LE_2Mbps	

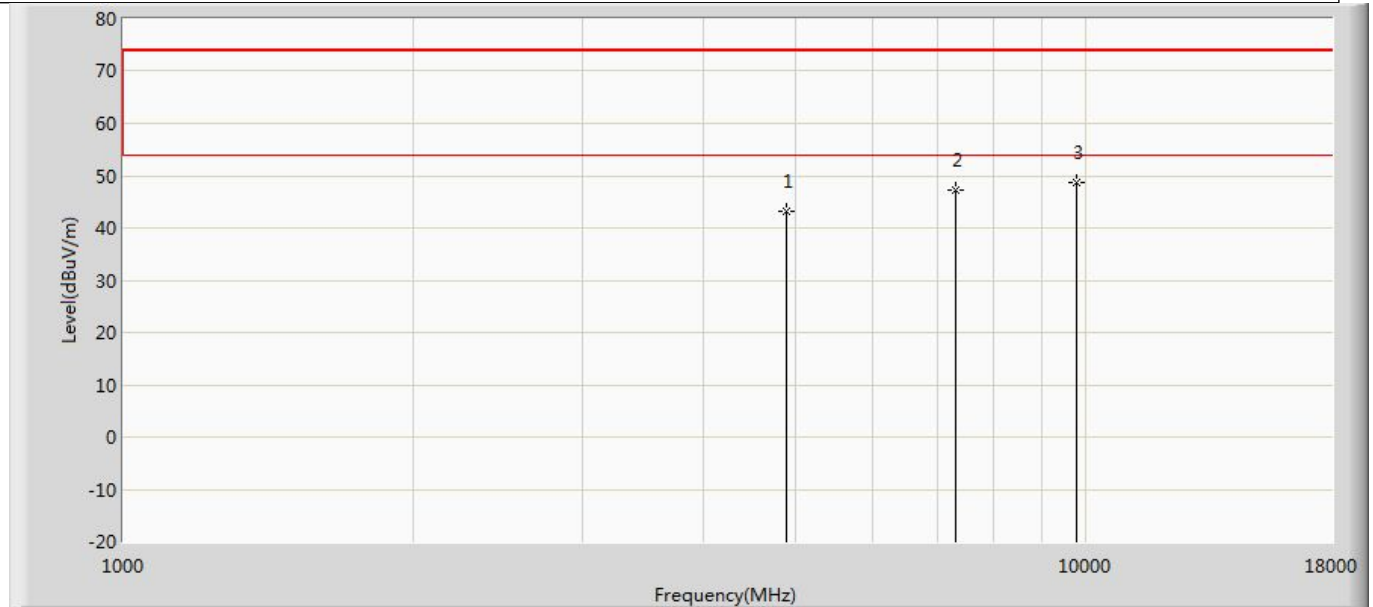


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4880.000	43.146	53.750	-30.854	74.000	-10.603	PK
2		7320.000	47.131	54.058	-26.869	74.000	-6.927	PK
3	*	9760.000	48.793	51.666	-25.207	74.000	-2.874	PK

Profile: 2410620R	Page No.: 23
Engineer: Pengchengyang	
Site: AC5	Time: 2024/03/08 - 13:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: SKI.WB663U.2	Power: 120Vac/60Hz
Note: Mode 2: Transmit at 2480MHz by LE_2Mbps	

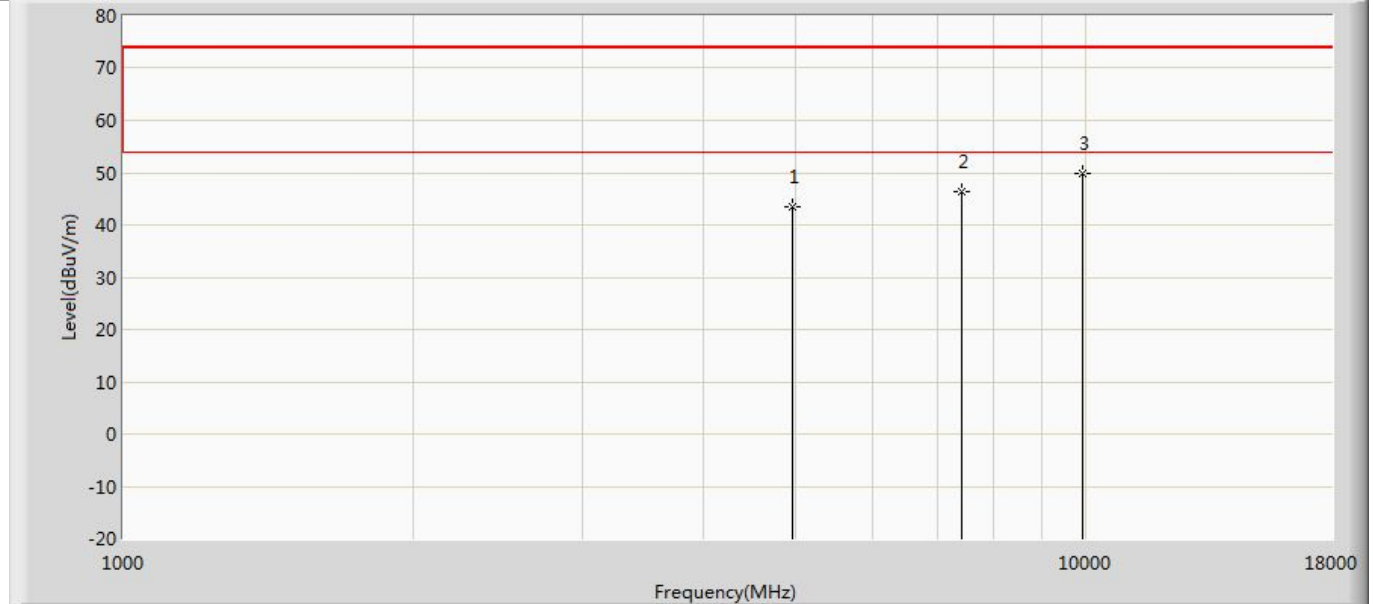

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	43.517	54.223	-30.483	74.000	-10.707	PK
2		7440.000	46.302	53.081	-27.698	74.000	-6.779	PK
3	*	9920.000	49.746	51.568	-24.254	74.000	-1.821	PK

Profile: 2410620R	Page No.: 24
Engineer: Pengchengyang	
Site: AC5	Time: 2024/03/08 - 13:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: SKI.WB663U.2	Power: 120Vac/60Hz
Note: Mode 2: Transmit at 2480MHz by LE_2Mbps	

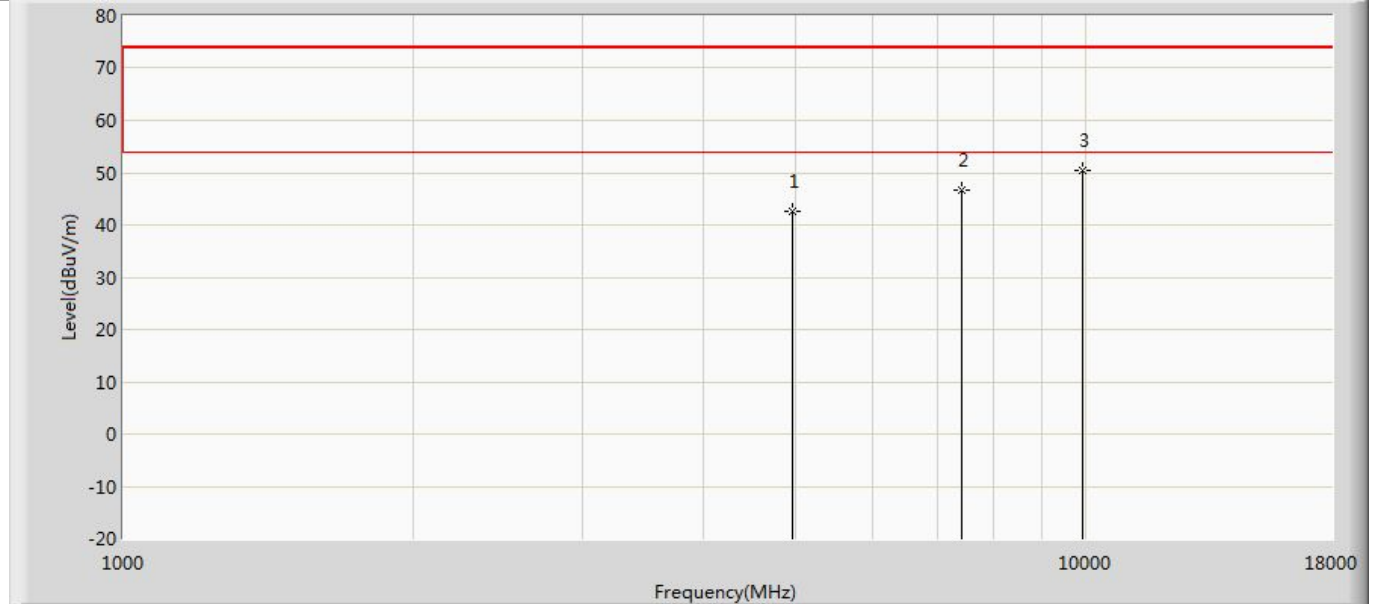


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	42.733	53.439	-31.267	74.000	-10.707	PK
2		7440.000	46.742	53.521	-27.258	74.000	-6.779	PK
3	*	9920.000	50.336	52.158	-23.664	74.000	-1.821	PK

Note:

1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp). Test Photograph.


The worst case of radiation emissions in restricted bands below 1GHz:

Profile: 2410620R	Page No.: 89
Engineer: Pengchengyang	
Site: AC2	Time: 2024/03/19 - 07:40
Limit: FCC_Part 15.109_RE (3m)_Class B	Margin: 0
Probe: CBL6112D_27613(30-1000MHz)	Polarity: Horizontal
EUT: SKI.WB663U.2	Power: 120Vac/60Hz
Note: Mode 1: Transmit at 2480MHz by LE_1Mbps	

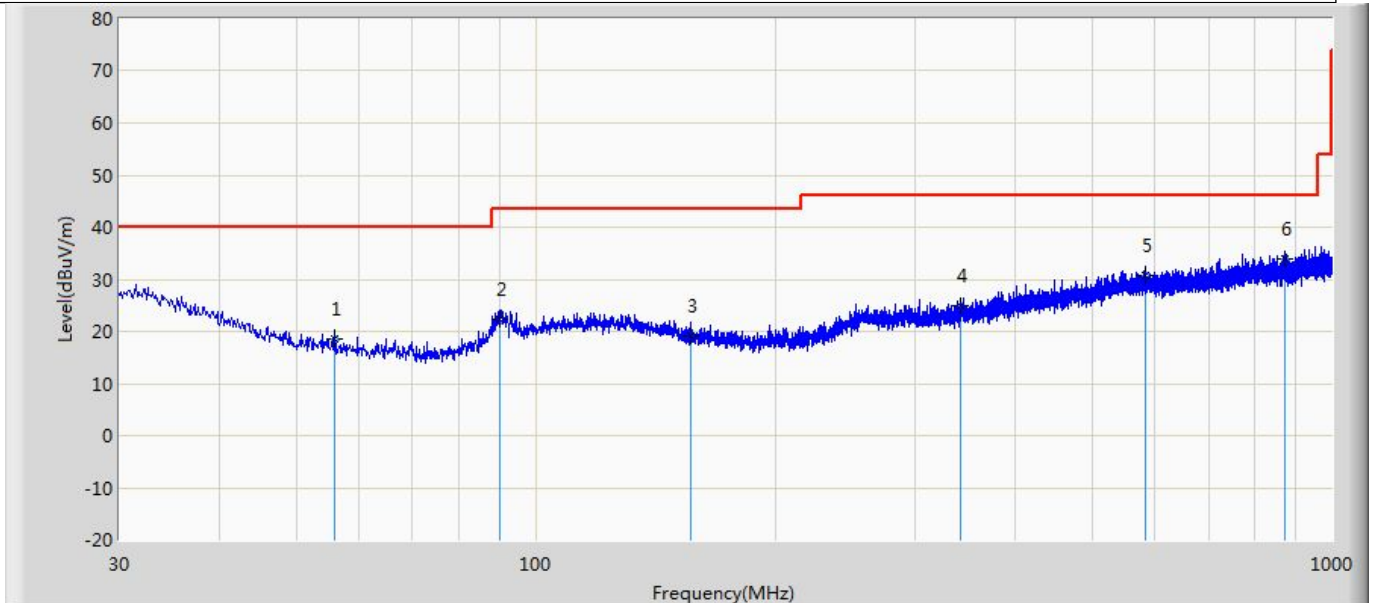

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		55.826	18.439	4.896	-21.561	40.000	13.543	QP
2		90.261	22.421	6.472	-21.079	43.500	15.950	QP
3		156.464	19.216	2.082	-24.284	43.500	17.134	QP
4		341.491	24.943	3.229	-21.057	46.000	21.714	QP
5		583.991	30.850	3.700	-15.150	46.000	27.150	QP
6	*	873.900	33.822	4.393	-12.178	46.000	29.429	QP

Profile: 2410620R	Page No.: 90
Engineer: Pengchengyang	
Site: AC2	Time: 2024/03/19 - 07:40
Limit: FCC_Part 15.109_RE (3m)_Class B	Margin: 0
Probe: CBL6112D_27613(30-1000MHz)	Polarity: Vertical
EUT: SKI.WB663U.2	Power: 120Vac/60Hz
Note: Mode 1: Transmit at 2480MHz by LE_1Mbps	

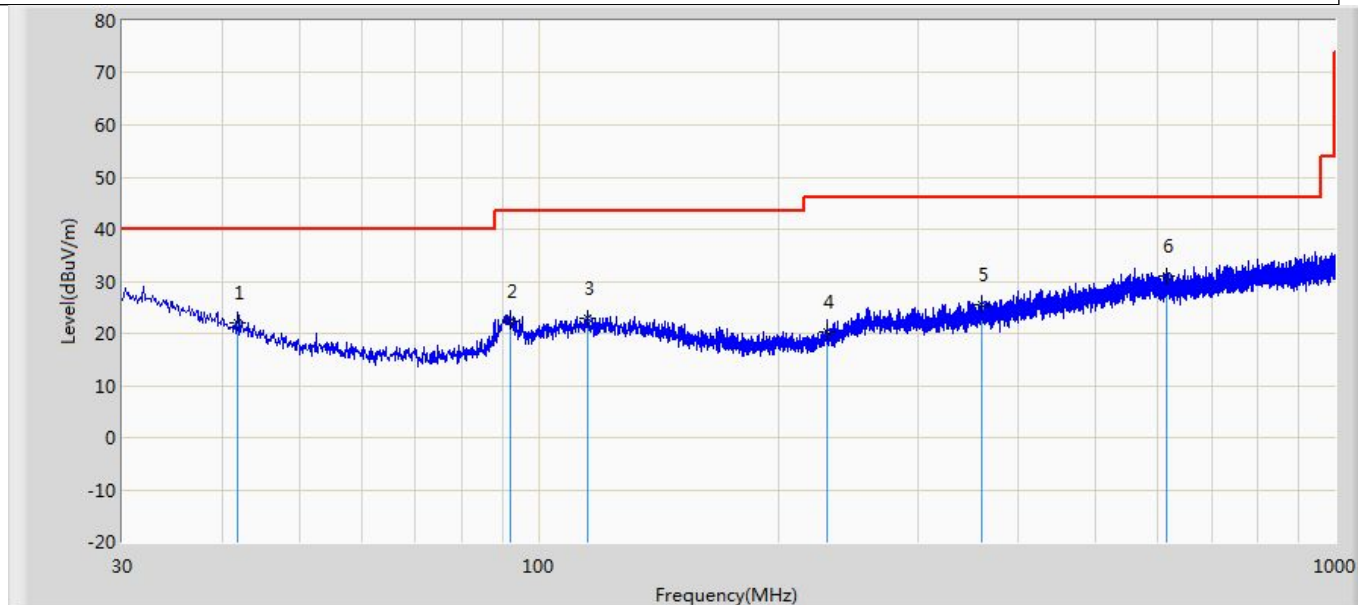

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		41.882	21.891	3.311	-18.109	40.000	18.580	QP
2		92.201	22.178	5.779	-21.322	43.500	16.399	QP
3		114.996	22.768	3.517	-20.732	43.500	19.250	QP
4		230.790	20.259	2.530	-25.741	46.000	17.729	QP
5		360.406	25.610	3.095	-20.390	46.000	22.515	QP
6	*	614.667	30.974	3.730	-15.026	46.000	27.243	QP

Note:

1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp). Test Photograph.
3. The test data below 30MHz and above 18GHz is more than 20dB below the limit, so there no data shown in report.

The End