


# Test Report

Project Information			
EUT:	Module Integrated Bluetooth	Environment:	22.1°C 48%
Model:	SKI.WB822CU.2	SN:	
Mode:	11AC20_5180	Voltage:	DC 3.3V
Customer:		Engineer:	Winnie Meng
Remark:			

Start of Test: 2024-03-05 15:14:19

## Test Graph

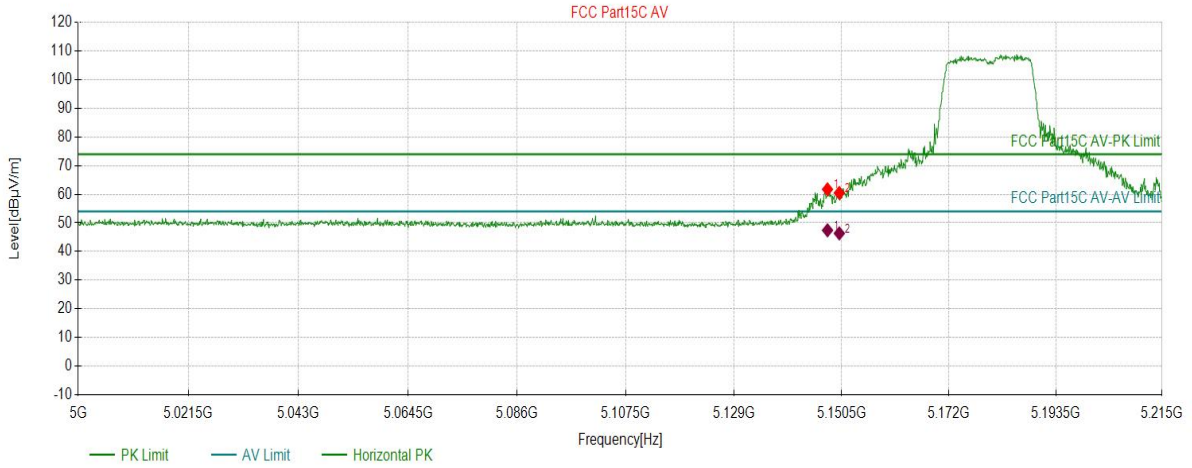

## Suspected Data List

NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	5147.6713	61.71	16.47	74.00	12.29	150	262	PK	Horizontal
2	5150.0375	60.44	16.46	74.00	13.56	150	219	PK	Horizontal

## AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5147.6710	16.47	47.43	54.00	6.57	150	305.8	Horizontal
2	5150.0375	16.46	46.34	54.00	7.66	150	219	Horizontal

# Test Report

Project Information			
EUT:	Module Integrated Bluetooth	Environment:	22.1°C 48%
Model:	SKI.WB822CU.2	SN:	
Mode:	11AC20_5180	Voltage:	DC 3.3V
Customer:		Engineer:	Winnie Meng
Remark:			

Start of Test: 2024-03-05 15:15:08

## Test Graph

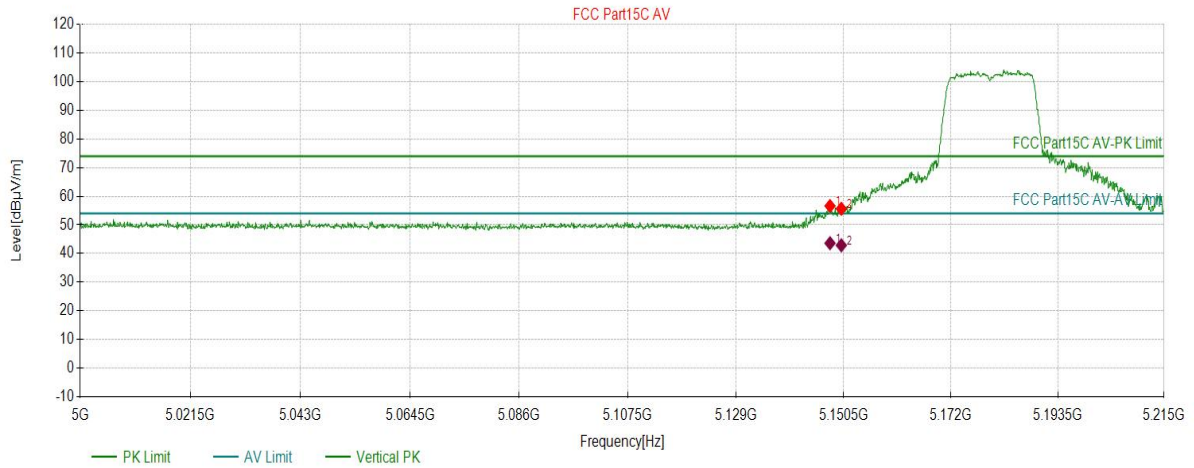

## Suspected Data List

NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	5147.7789	56.60	16.47	74.00	17.40	150	254	PK	Vertical
2	5150.0375	55.63	16.46	74.00	18.37	150	50	PK	Vertical

## AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5147.7789	16.47	43.62	54.00	10.38	150	254	Vertical
2	5150.0375	16.46	42.90	54.00	11.10	150	50	Vertical

# Test Report

Project Information			
EUT:	Module Integrated Bluetooth	Environment:	22.1°C 48%
Model:	SKI.WB822CU.2	SN:	
Mode:	11AC20_5320	Voltage:	DC 3.3V
Customer:		Engineer:	Winnie Meng
Remark:			

Start of Test: 2024-03-05 15:30:37

## Test Graph

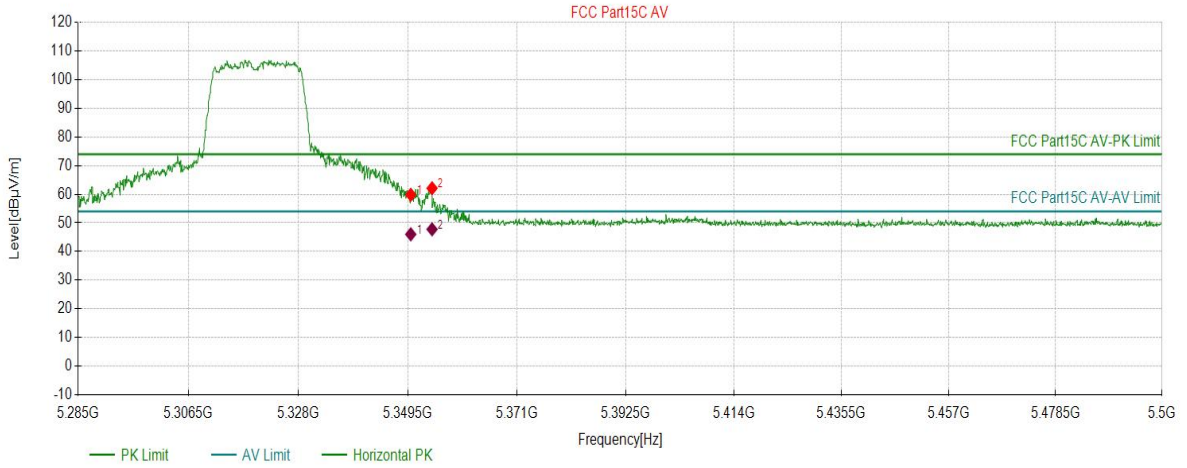

Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	5350.0700	59.83	16.65	74.00	14.17	150	262	PK	Horizontal
2	5354.2646	62.09	16.67	74.00	11.91	150	262	PK	Horizontal


AV Final Data List								
NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.0700	16.65	46.03	54.00	7.97	150	262	Horizontal
2	5354.2650	16.67	47.76	54.00	6.24	150	264.6	Horizontal

# Test Report

Project Information			
EUT:	Module Integrated Bluetooth	Environment:	22.1°C 48%
Model:	SKI.WB822CU.2	SN:	
Mode:	11AC20_5320	Voltage:	DC 3.3V
Customer:		Engineer:	Winnie Meng
Remark:			

Start of Test: 2024-03-05 15:31:26

## Test Graph

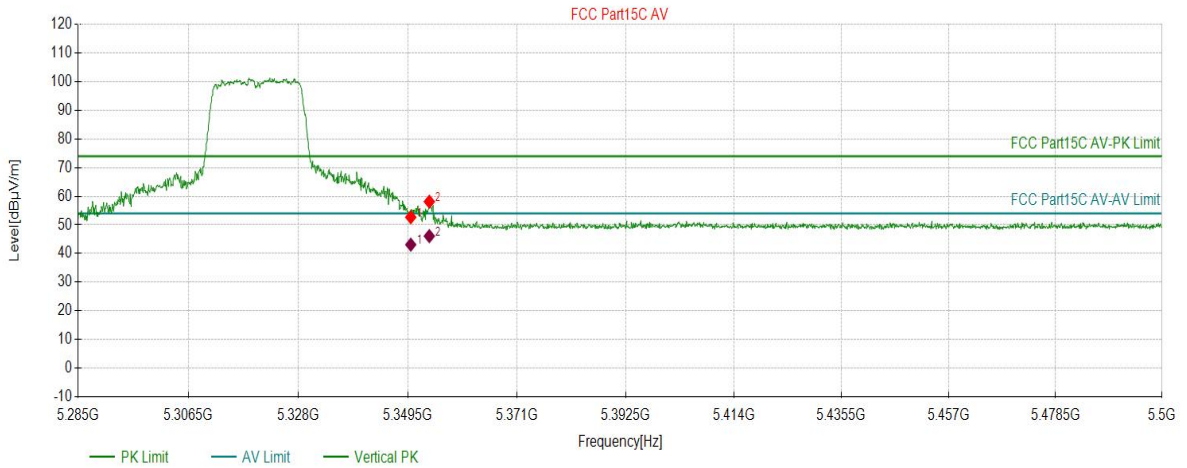

## Suspected Data List

NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	5350.0700	52.67	16.65	74.00	21.33	150	66	PK	Vertical
2	5353.7269	58.11	16.66	74.00	15.89	150	29	PK	Vertical

## AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.0700	16.65	43.10	54.00	10.90	150	66	Vertical
2	5353.7269	16.66	46.09	54.00	7.91	150	29	Vertical

# Test Report

Project Information			
EUT:	Module Integrated Bluetooth	Environment:	22.1°C 48%
Model:	SKI.WB822CU.2	SN:	
Mode:	11AC20_5700	Voltage:	DC 3.3V
Customer:		Engineer:	Winnie Meng
Remark:			

Start of Test: 2024-03-05 15:52:23

## Test Graph

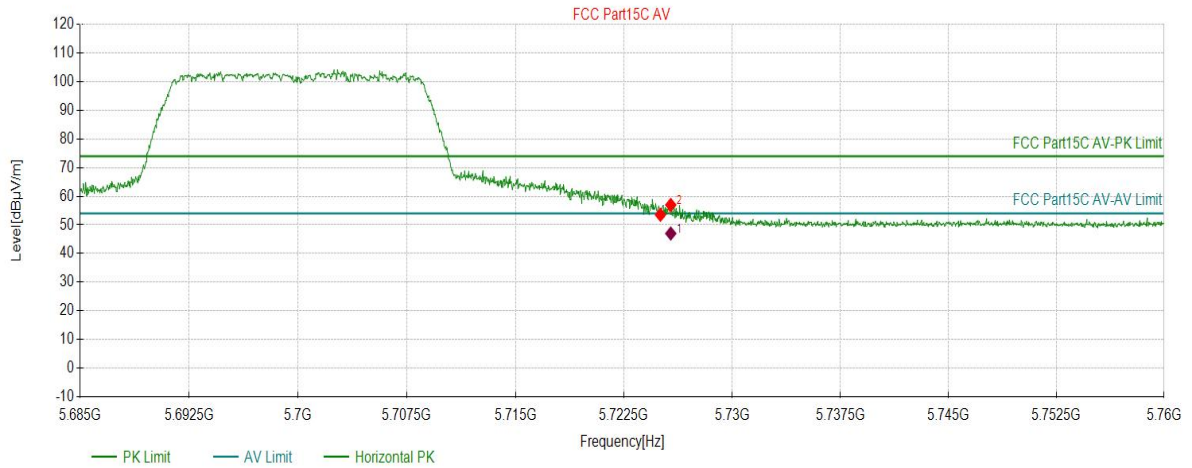

## Suspected Data List

NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	5725.0325	53.52	17.99	74.00	20.48	150	336	PK	Horizont
2	5725.7454	56.97	18.00	74.00	17.03	150	322	PK	Horizont

## AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.7454	18.00	46.99	54.00	7.01	150	322	Horizontal

# Test Report

Project Information			
EUT:	Module Integrated Bluetooth	Environment:	22.1°C 48%
Model:	SKI.WB822CU.2	SN:	
Mode:	11AC20_5700	Voltage:	DC 3.3V
Customer:		Engineer:	Winnie Meng
Remark:			

Start of Test: 2024-03-05 15:53:12

## Test Graph

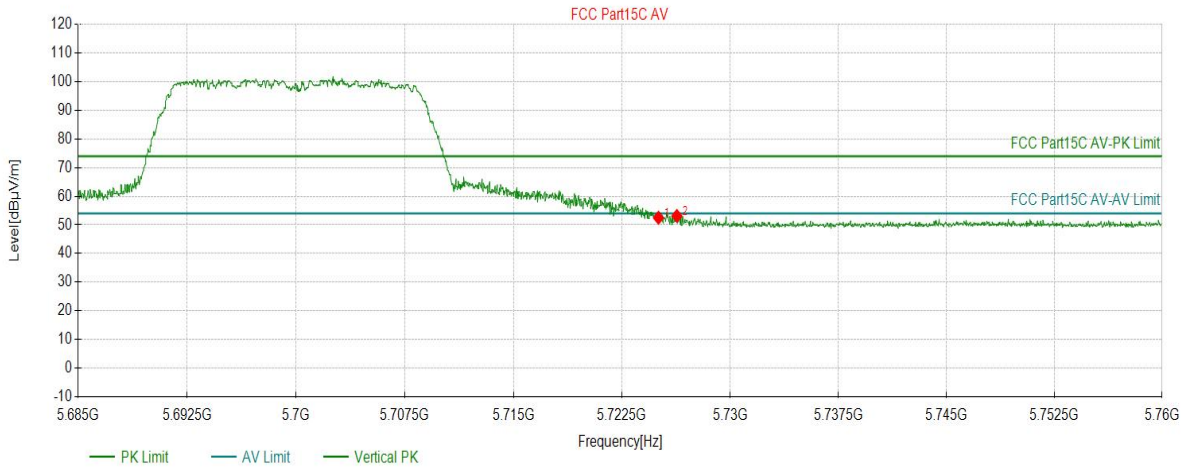

## Suspected Data List


NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	5725.0325	52.51	17.99	74.00	21.49	150	336	PK	Vertical
2	5726.3082	53.13	18.00	74.00	20.87	150	24	PK	Vertical

# Test Report

Project Information			
EUT:	Module Integrated Bluetooth	Environment:	22.1°C 48%
Model:	SKI.WB822CU.2	SN:	
Mode:	11AC20_5500	Voltage:	DC 3.3V
Customer:		Engineer:	Winnie Meng
Remark:			

Start of Test: 2024-03-05 16:05:08

## Test Graph

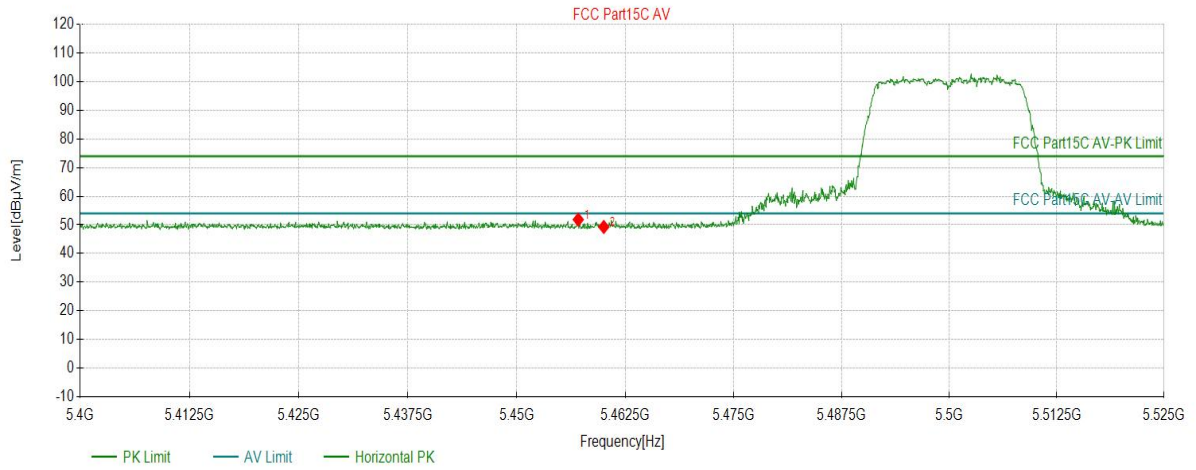


Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	5457.0910	51.86	16.86	74.00	22.14	150	323	PK	Horizont
2	5460.0300	49.28	16.86	74.00	24.72	150	6	PK	Horizont

# Test Report

Project Information			
EUT:	Module Integrated Bluetooth	Environment:	22.1°C 48%
Model:	SKI.WB822CU.2	SN:	
Mode:	11AC20_5500	Voltage:	DC 3.3V
Customer:		Engineer:	Winnie Meng
Remark:			

Start of Test: 2024-03-05 16:05:57

## Test Graph

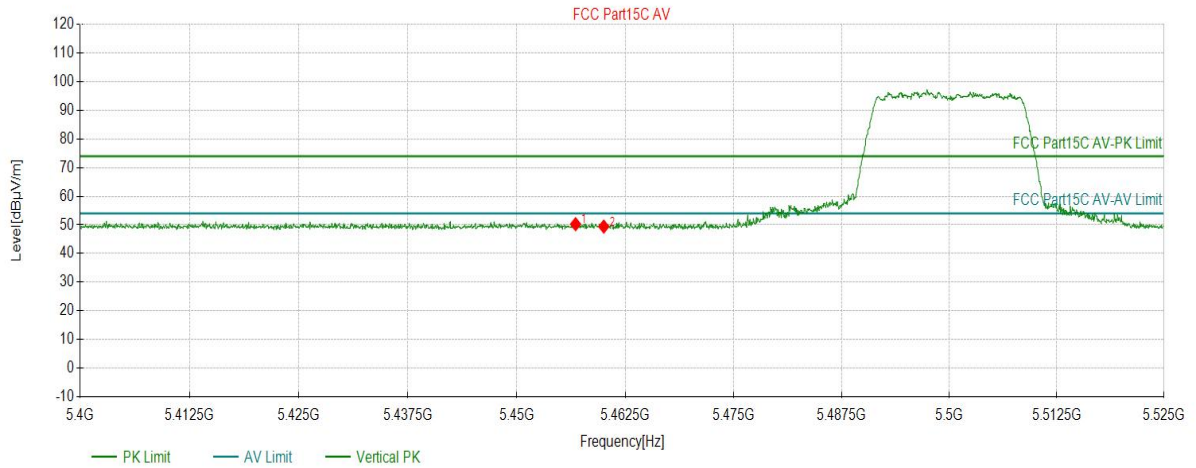

Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	5456.7784	50.26	16.86	74.00	23.74	150	332	PK	Vertical
2	5460.0300	49.41	16.86	74.00	24.59	150	155	PK	Vertical




# Test Report

Project Information			
EUT:	Module Integrated Bluetooth	Environment:	22.1°C 48%
Model:	SKI.WB822CU.2	SN:	
Mode:	11AC40_5190	Voltage:	DC 3.3V
Customer:		Engineer:	Winnie Meng
Remark:			

Start of Test: 2024-03-05 16:10:07

## Test Graph

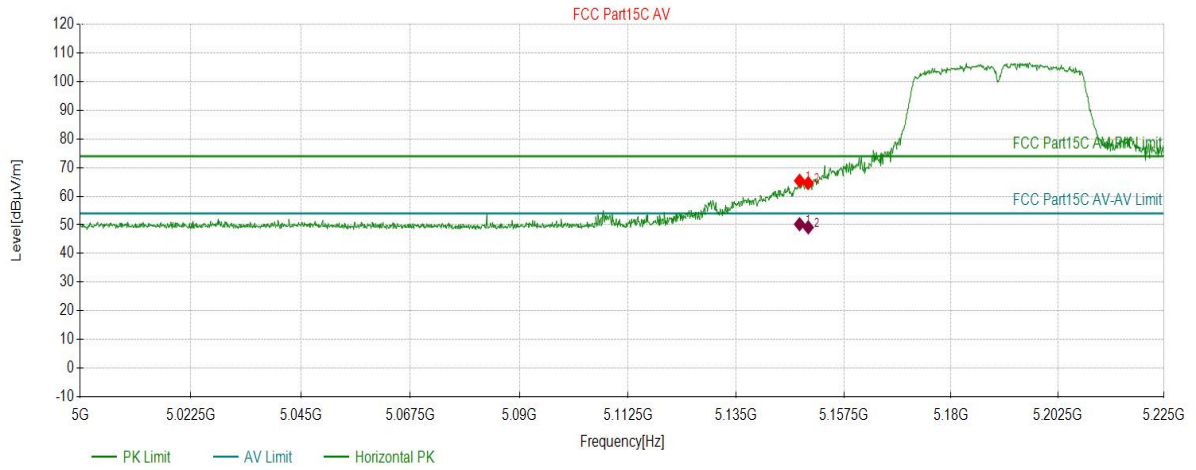

## Suspected Data List

NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	5148.2366	65.40	16.47	74.00	8.60	150	303	PK	Horizontal
2	5150.0375	64.59	16.46	74.00	9.41	150	205	PK	Horizontal

## AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5148.2366	16.47	50.23	54.00	3.77	150	265.9	Horizontal
2	5150.0375	16.46	49.14	54.00	4.86	150	205	Horizontal

# Test Report

Project Information			
EUT:	Module Integrated Bluetooth	Environment:	22.1°C 48%
Model:	SKI.WB822CU.2	SN:	
Mode:	11AC40_5190	Voltage:	DC 3.3V
Customer:		Engineer:	Winnie Meng
Remark:			

Start of Test: 2024-03-05 16:15:09

## Test Graph

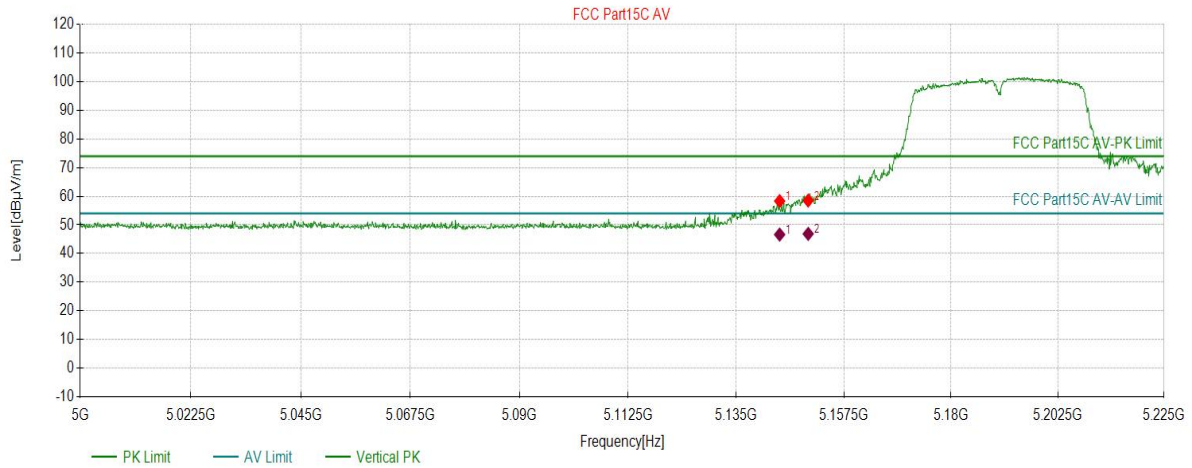

## Suspected Data List

NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	5144.0720	58.32	16.48	74.00	15.68	150	60	PK	Vertical
2	5150.0375	58.50	16.46	74.00	15.50	150	252	PK	Vertical

## AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5144.0720	16.48	46.64	54.00	7.36	150	60	Vertical
2	5150.0375	16.46	46.88	54.00	7.12	150	252	Vertical

# Test Report

Project Information			
EUT:	Module Integrated Bluetooth	Environment:	22.1°C 48%
Model:	SKI.WB822CU.2	SN:	
Mode:	11AC40_5310	Voltage:	DC 3.3V
Customer:		Engineer:	Winnie Meng
Remark:			

Start of Test: 2024-03-05 16:22:52

## Test Graph

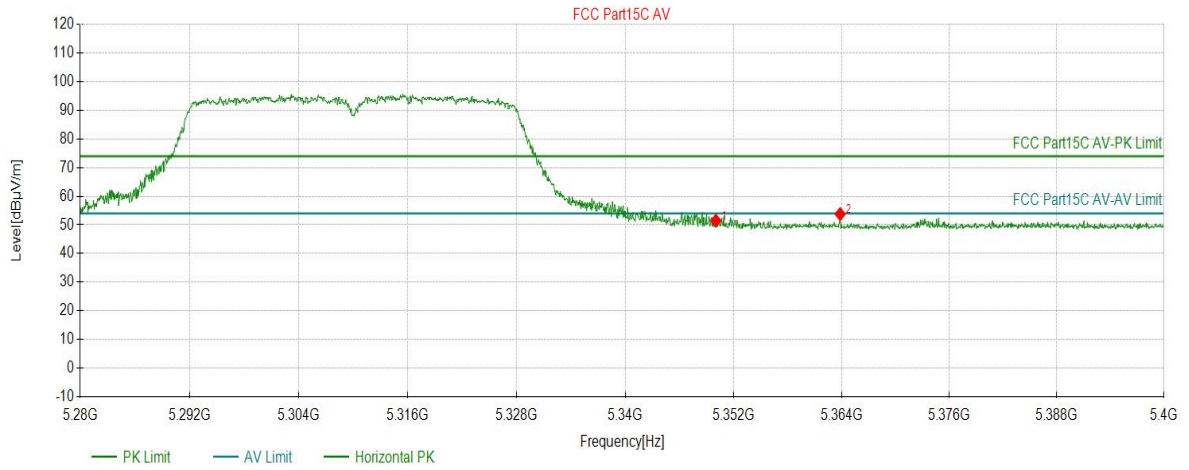


Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	5350.0550	51.50	16.65	74.00	22.50	150	291	PK	Horizont
2	5363.8619	53.79	16.70	74.00	20.21	150	291	PK	Horizont

# Test Report

Project Information			
EUT:	Module Integrated Bluetooth	Environment:	22.1°C 48%
Model:	SKI.WB822CU.2	SN:	
Mode:	11AC40_5310	Voltage:	DC 3.3V
Customer:		Engineer:	Winnie Meng
Remark:			

Start of Test: 2024-03-05 16:24:45

## Test Graph

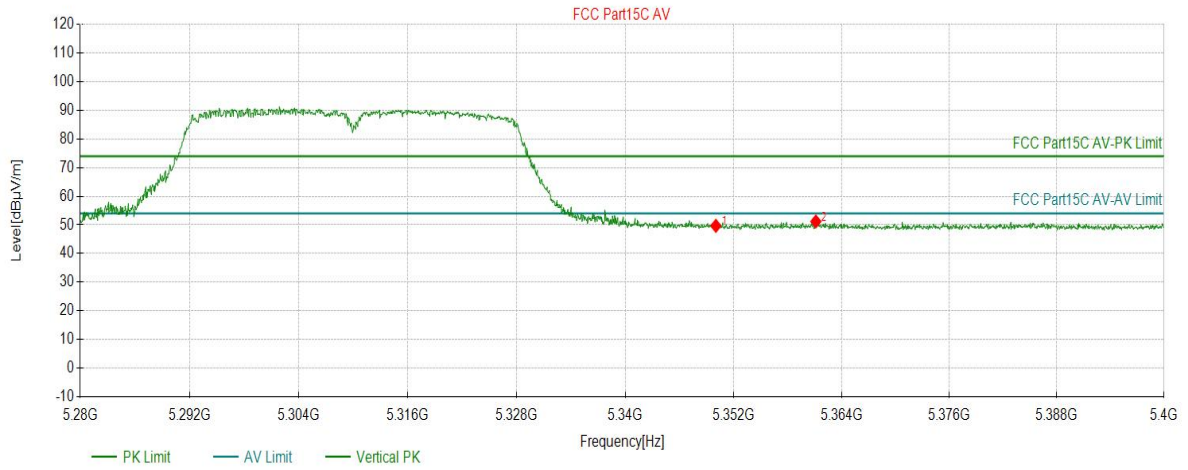

## Suspected Data List


NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	5350.0550	49.68	16.65	74.00	24.32	150	244	PK	Vertical
2	5361.1606	51.21	16.69	74.00	22.79	150	31	PK	Vertical

# Test Report

Project Information			
EUT:	Module Integrated Bluetooth	Environment:	22.1°C 48%
Model:	SKI.WB822CU.2	SN:	
Mode:	11AC40_5510	Voltage:	DC 3.3V
Customer:		Engineer:	Winnie Meng
Remark:			

Start of Test: 2024-03-05 16:28:12

## Test Graph

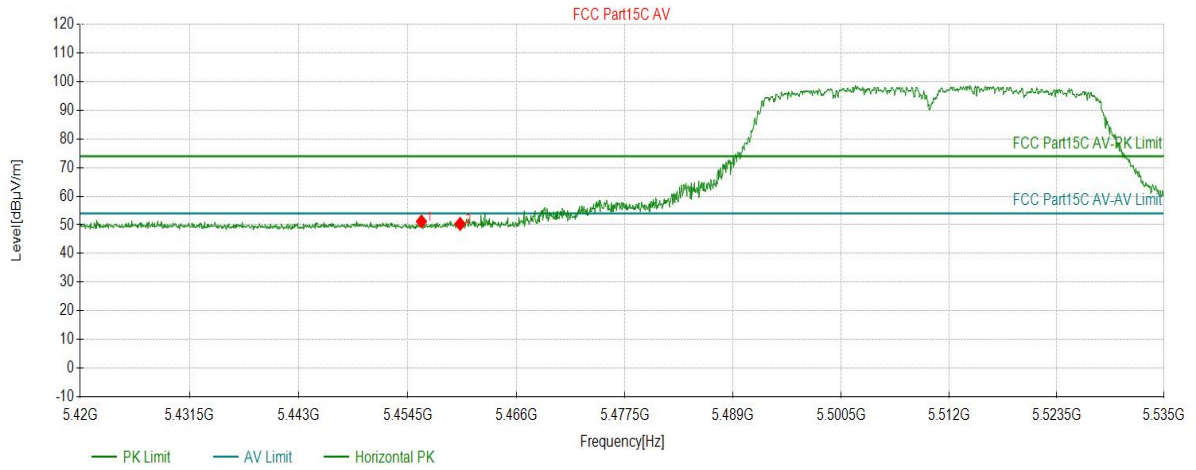

## Suspected Data List


NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	5455.9555	51.20	16.86	74.00	22.80	150	236	PK	Horizont
2	5460.0400	50.35	16.86	74.00	23.65	150	327	PK	Horizont

# Test Report

Project Information			
EUT:	Module Integrated Bluetooth	Environment:	22.1°C 48%
Model:	SKI.WB822CU.2	SN:	
Mode:	11AC40_5510	Voltage:	DC 3.3V
Customer:		Engineer:	Winnie Meng
Remark:			

Start of Test: 2024-03-05 16:29:01

## Test Graph

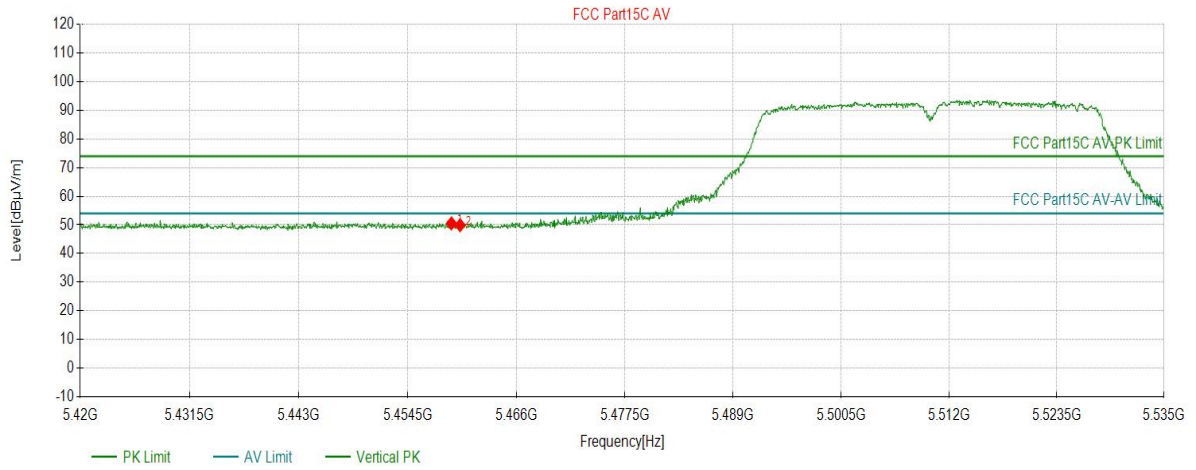


Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	5459.1196	50.53	16.86	74.00	23.47	150	208	PK	Vertical
2	5460.0400	49.90	16.86	74.00	24.10	150	344	PK	Vertical

# Test Report

Project Information			
EUT:	Module Integrated Bluetooth	Environment:	22.1°C 48%
Model:	SKI.WB822CU.2	SN:	
Mode:	11AC40_5670	Voltage:	DC 3.3V
Customer:		Engineer:	Winnie Meng
Remark:			

Start of Test: 2024-03-05 16:31:50

## Test Graph

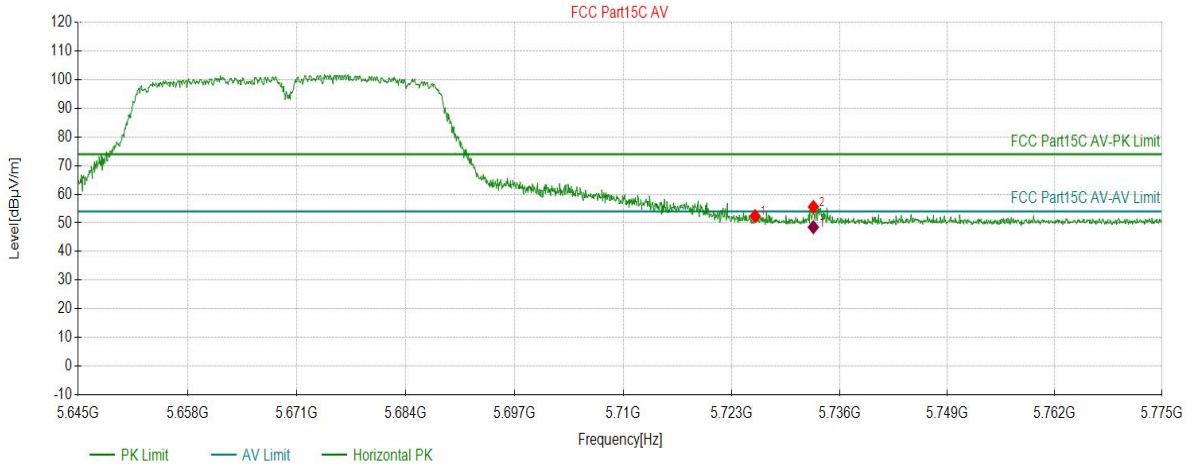

Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	5725.8354	52.35	18.00	74.00	21.65	150	158	PK	Horizont
2	5732.8589	55.58	18.03	74.00	18.42	150	213	PK	Horizont


AV Final Data List								
NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5732.8589	18.03	48.50	54.00	5.50	150	213	Horizontal

# Test Report

Project Information			
EUT:	Module Integrated Bluetooth	Environment:	22.1°C 48%
Model:	SKI.WB822CU.2	SN:	
Mode:	11AC40_5670	Voltage:	DC 3.3V
Customer:		Engineer:	Winnie Meng
Remark:			

Start of Test: 2024-03-05 16:32:38

## Test Graph

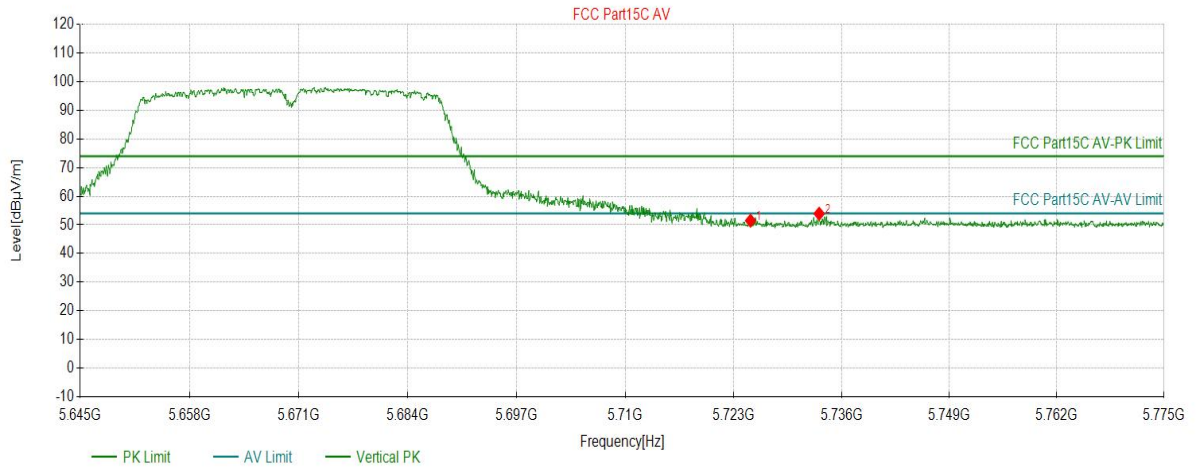

Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	5725.0550	51.49	17.99	74.00	22.51	150	240	PK	Vertical
2	5733.3142	53.92	18.04	74.00	20.08	150	65	PK	Vertical




# Test Report

Project Information			
EUT:	Module Integrated Bluetooth	Environment:	22.1°C 48%
Model:	SKI.WB822CU.2	SN:	
Mode:	11AC80_5210	Voltage:	DC 3.3V
Customer:		Engineer:	Winnie Meng
Remark:			

Start of Test: 2024-03-05 17:04:01

## Test Graph

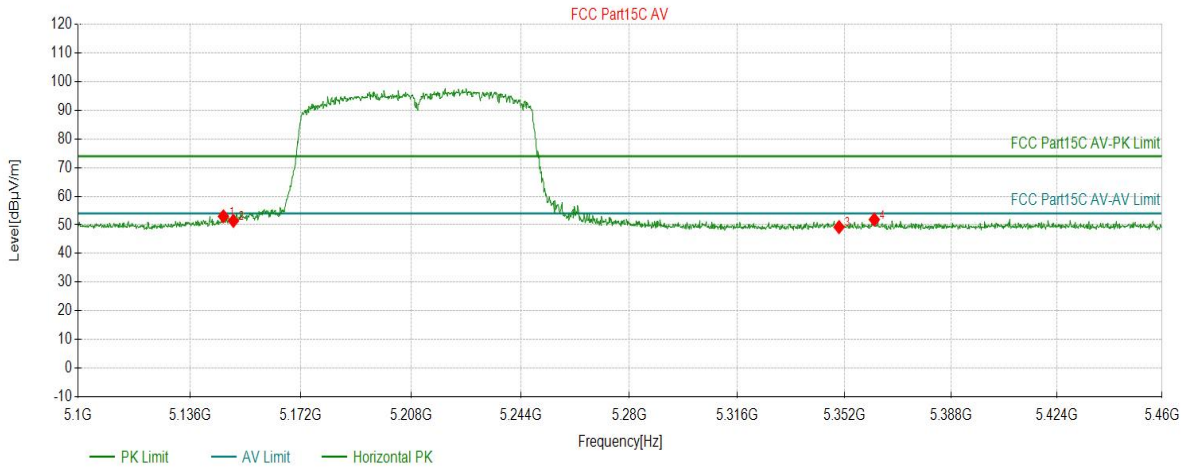


Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	5146.8234	53.00	16.47	74.00	21.00	150	264	PK	Horizont
2	5150.0650	51.39	16.46	74.00	22.61	150	332	PK	Horizont
3	5350.1451	49.24	16.65	74.00	24.76	150	282	PK	Horizont
4	5362.0310	51.89	16.70	74.00	22.11	150	118	PK	Horizont

# Test Report

Project Information			
EUT:	Module Integrated Bluetooth	Environment:	22.1°C 48%
Model:	SKI.WB822CU.2	SN:	
Mode:	11AC80_5210	Voltage:	DC 3.3V
Customer:		Engineer:	Winnie Meng
Remark:			

Start of Test: 2024-03-05 17:04:50

## Test Graph

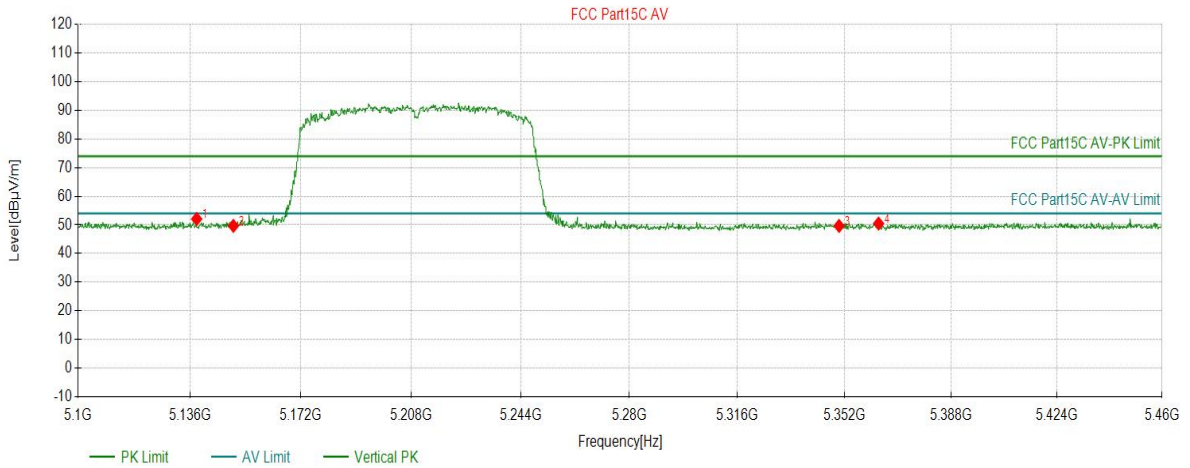


Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	5138.1791	52.08	16.49	74.00	21.92	150	89	PK	Vertical
2	5150.0650	49.66	16.46	74.00	24.34	150	111	PK	Vertical
3	5350.1451	49.65	16.65	74.00	24.35	150	170	PK	Vertical
4	5363.4717	50.48	16.70	74.00	23.52	150	223	PK	Vertical

# Test Report

Project Information			
EUT:	Module Integrated Bluetooth	Environment:	22.1°C 48%
Model:	SKI.WB822CU.2	SN:	
Mode:	11AC80_5290	Voltage:	DC 3.3V
Customer:		Engineer:	Winnie Meng
Remark:			

Start of Test: 2024-03-05 17:21:59

## Test Graph

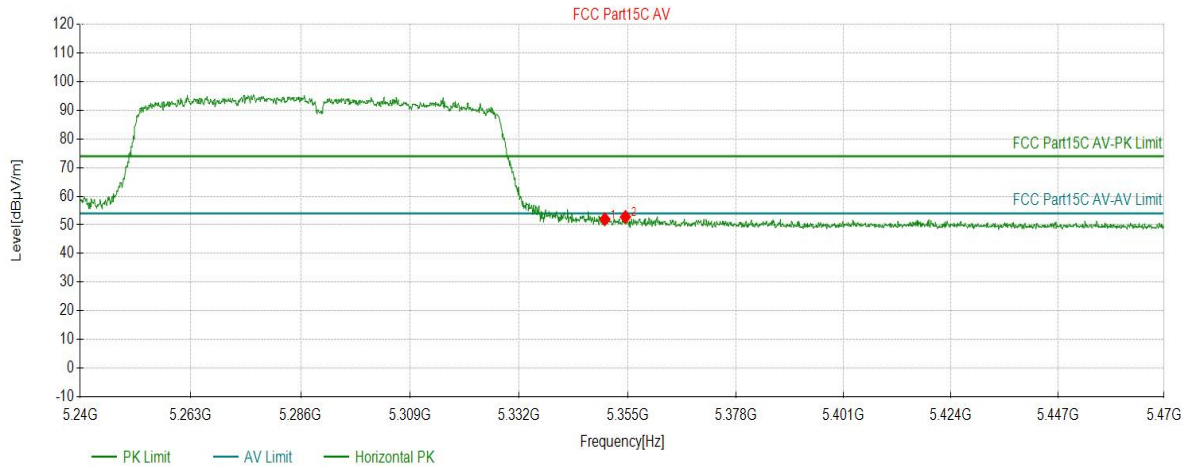


Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	5350.1101	51.98	16.65	74.00	22.02	150	290	PK	Horizont
2	5354.4822	52.78	16.67	74.00	21.22	150	269	PK	Horizont

# Test Report

Project Information			
EUT:	Module Integrated Bluetooth	Environment:	22.1°C 48%
Model:	SKI.WB822CU.2	SN:	
Mode:	11AC80_5290	Voltage:	DC 3.3V
Customer:		Engineer:	Winnie Meng
Remark:			

Start of Test: 2024-03-05 17:22:48

## Test Graph

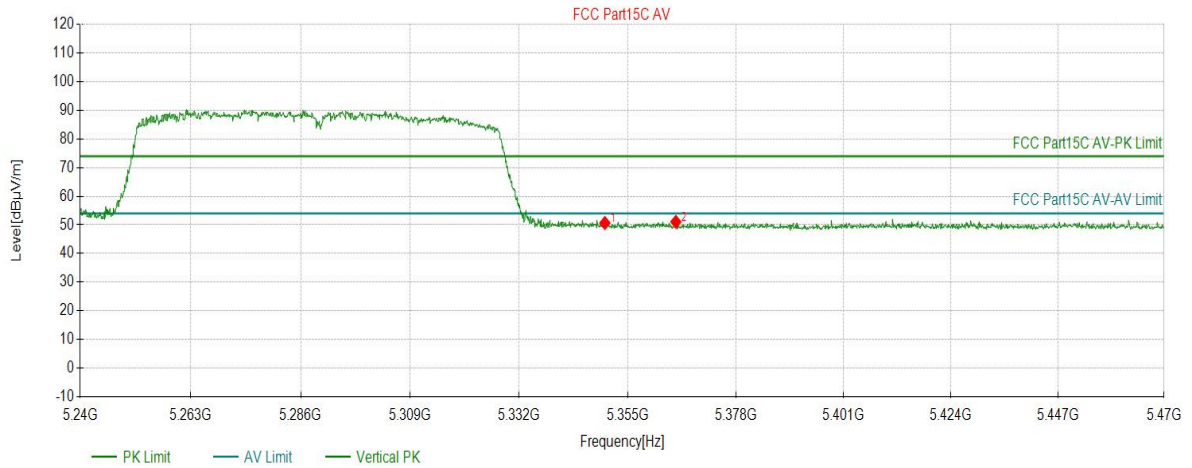


Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	5350.1101	50.67	16.65	74.00	23.33	150	199	PK	Vertical
2	5365.1826	51.07	16.71	74.00	22.93	150	140	PK	Vertical

# Test Report

Project Information			
EUT:	Module Integrated Bluetooth	Environment:	22.1°C 48%
Model:	SKI.WB822CU.2	SN:	
Mode:	11AC80_5530	Voltage:	DC 3.3V
Customer:		Engineer:	Winnie Meng
Remark:			

Start of Test: 2024-03-05 17:30:07

## Test Graph

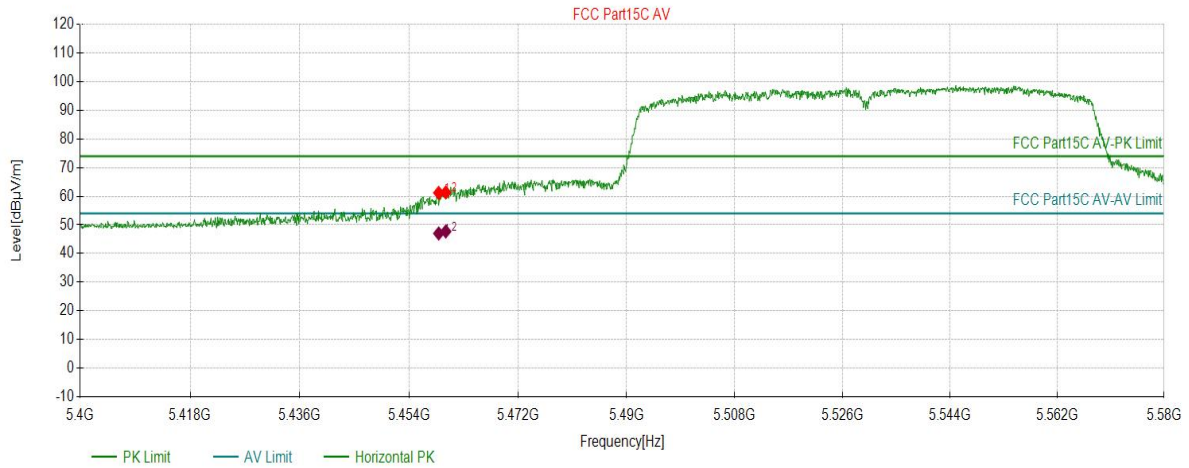

## Suspected Data List

NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	5458.8894	61.18	16.86	74.00	12.82	150	217	PK	Horizont
2	5460.0600	61.33	16.86	74.00	12.67	150	290	PK	Horizont

## AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5458.8894	16.86	47.02	54.00	6.98	150	217	Horizontal
2	5460.0599	16.86	47.71	54.00	6.29	150	292.4	Horizontal

# Test Report

Project Information			
EUT:	Module Integrated Bluetooth	Environment:	22.1°C 48%
Model:	SKI.WB822CU.2	SN:	
Mode:	11AC80_5530	Voltage:	DC 3.3V
Customer:		Engineer:	Winnie Meng
Remark:			

Start of Test: 2024-03-05 17:30:55

## Test Graph

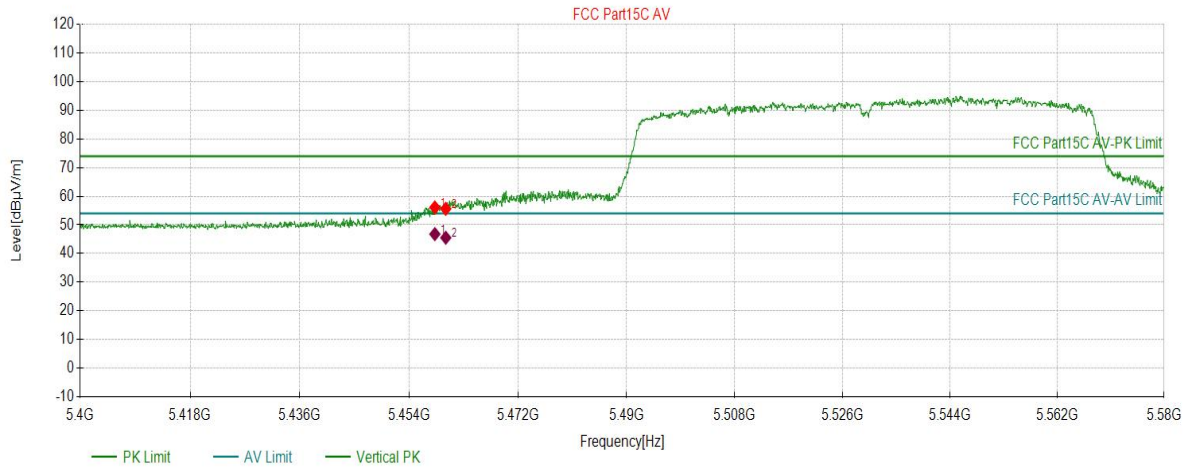

## Suspected Data List

NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	5458.2591	56.11	16.86	74.00	17.89	150	111	PK	Vertical
2	5460.0600	55.62	16.86	74.00	18.38	150	322	PK	Vertical

## AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5458.2591	16.86	46.79	54.00	7.21	150	111	Vertical
2	5460.0600	16.86	45.52	54.00	8.48	150	322	Vertical

# Test Report

Project Information			
EUT:	Module Integrated Bluetooth	Environment:	22.1°C 48%
Model:	SKI.WB822CU.2	SN:	
Mode:	11AC80_5610	Voltage:	DC 3.3V
Customer:		Engineer:	Winnie Meng
Remark:			

Start of Test: 2024-03-05 17:37:20

## Test Graph

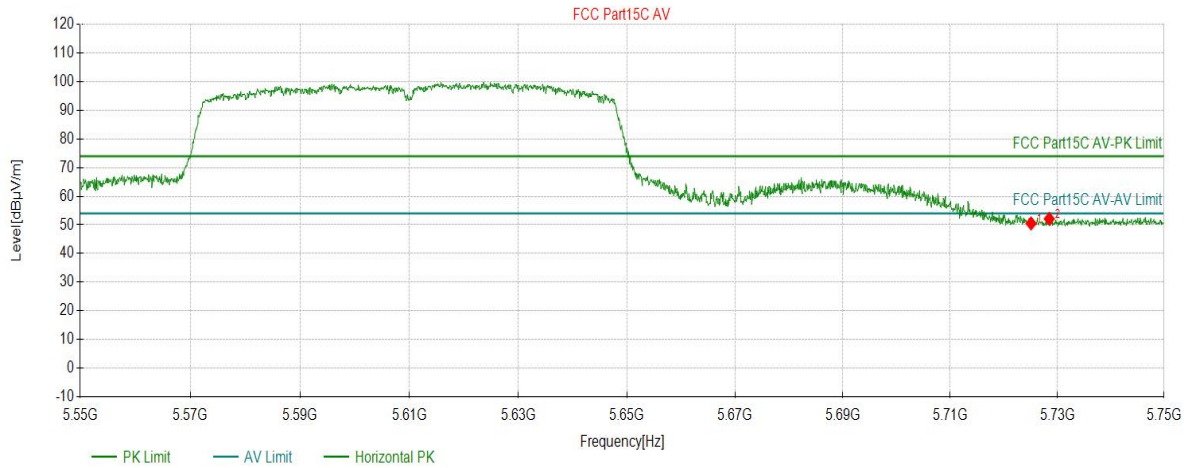


Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	5725.0875	50.51	17.99	74.00	23.49	150	1	PK	Horizont
2	5728.4892	52.11	18.01	74.00	21.89	150	323	PK	Horizont

# Test Report

Project Information			
EUT:	Module Integrated Bluetooth	Environment:	22.1°C 48%
Model:	SKI.WB822CU.2	SN:	
Mode:	11AC80_5610	Voltage:	DC 3.3V
Customer:		Engineer:	Winnie Meng
Remark:			

Start of Test: 2024-03-05 17:38:09

## Test Graph

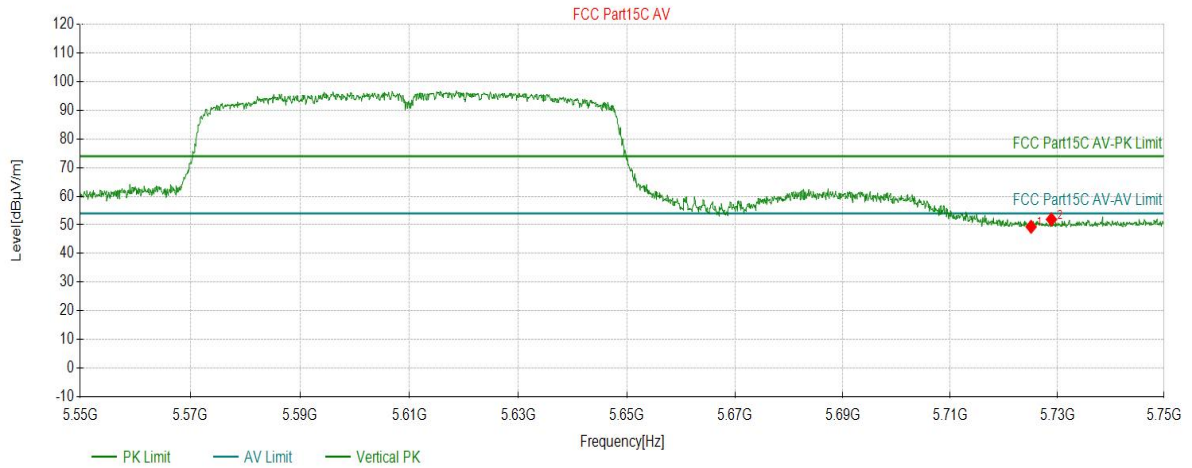

Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	5725.0875	49.34	17.99	74.00	24.66	150	19	PK	Vertical
2	5728.8894	51.91	18.01	74.00	22.09	150	316	PK	Vertical

**END OF REPORT**