


Test Report

| Project Information | | | |
|---------------------|---|--------------|------------|
| EUT: | IEEE 802.11a/b/g/n/ac 2T2R Wi-Fi Module Integrated BT 2.1/3.0/4.2/5.0 | | |
| Model: | SKI.WB822CU.5 | Environment: | 23.6°C 53% |
| Mode: | DH5_2480 | Voltage: | DC 3.3V |
| Customer: | | Engineer: | Soho Liu |
| Remark: | | | |

Start of Test: 2024-01-09 18:02:36

Test Graph

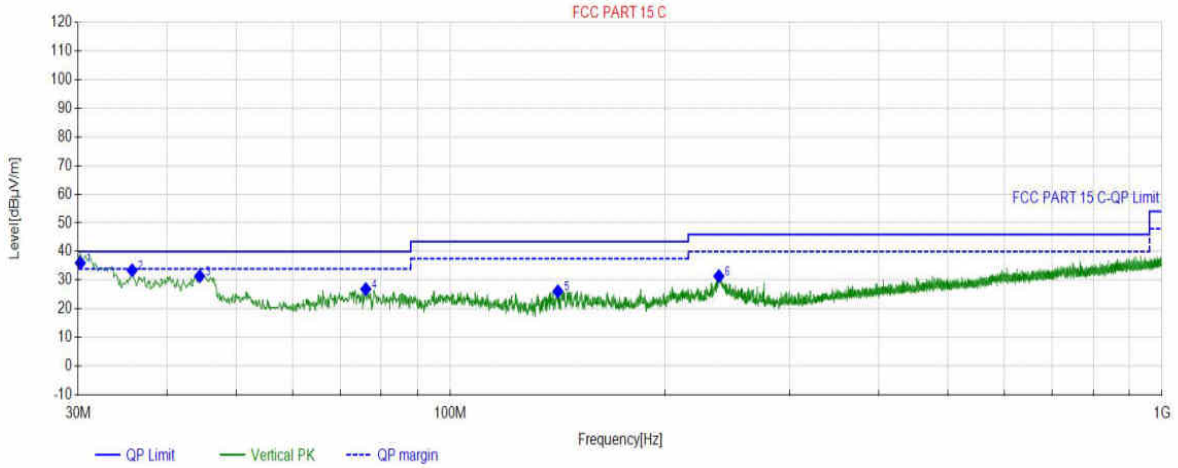

Final Data List

| NO | Freq. (MHz) | Factor (dB) | QP Value (dBµV/m) | QP Limit (dBµV/m) | Margin (dB) | Height (cm) | Angle (°) | Polarity |
|----|-------------|-------------|-------------------|-------------------|-------------|-------------|-----------|----------|
| 1 | 30.2100 | 18.54 | 36.02 | 40.00 | 3.98 | 100.1 | 151.1 | Vertical |
| 2 | 35.7236 | 19.42 | 33.46 | 40.00 | 6.54 | 100 | 100 | Vertical |
| 3 | 44.4544 | 22.04 | 31.42 | 40.00 | 8.58 | 100 | 157 | Vertical |
| 4 | 76.0796 | 16.45 | 26.88 | 40.00 | 13.12 | 100 | 282 | Vertical |
| 5 | 141.6582 | 16.95 | 26.10 | 43.50 | 17.40 | 100 | 69 | Vertical |
| 6 | 238.4738 | 21.02 | 31.42 | 46.00 | 14.58 | 100 | 117 | Vertical |


APPENDIX B – Radiated Emission Above 1GHz Test Data

Test Report

| Project Information | | | |
|---------------------|---|--------------|------------|
| EUT: | IEEE 802.11a/b/g/n/ac 2T2R Wi-Fi Module Integrated BT 2.1/3.0/4.2/5.0 | | |
| Model: | SKI.WB822CU.5 | Environment: | 23.6°C 53% |
| Mode: | DH5_2402 | Voltage: | DC 3.3V |
| Customer: | | Engineer: | Soho Liu |
| Remark: | | | |

Start of Test: 2024-01-09 20:20:53

Test Graph

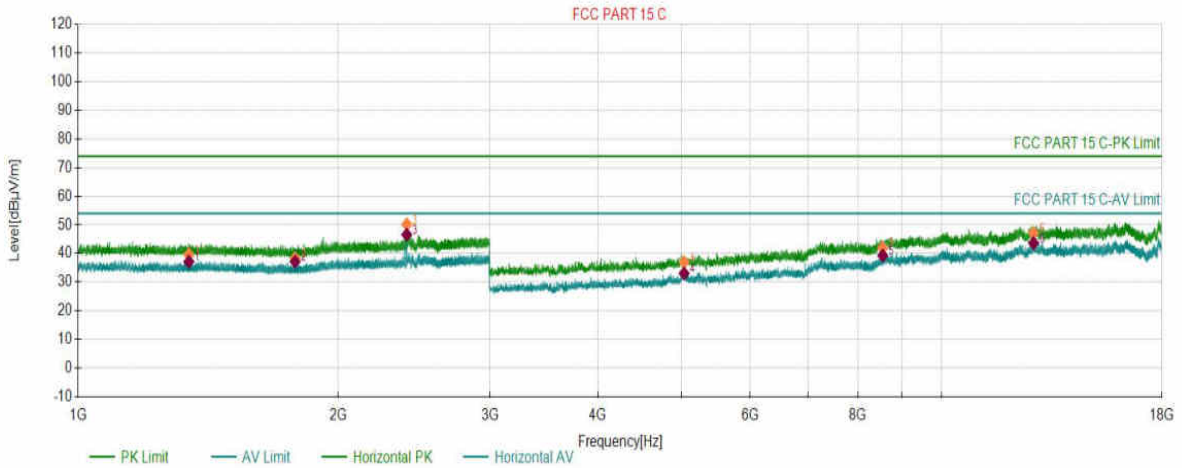

| PK Final Data List | | | | | | | | |
|--------------------|-------------|-------------|-------------------|-------------------|----------------|-------------|-----------|------------|
| NO. | Freq. (MHz) | Factor (dB) | PK Value (dBμV/m) | PK Limit (dBμV/m) | PK Margin (dB) | Height (cm) | Angle (°) | Polarity |
| 1 | 1343.5172 | 2.92 | 39.69 | 74.00 | 34.31 | 150 | 166 | Horizontal |
| 2 | 1783.5392 | 3.36 | 38.37 | 74.00 | 35.63 | 150 | 320 | Horizontal |
| 3 | 2402.0701 | 7.13 | 50.18 | 74.00 | 23.82 | 150 | 266 | Horizontal |
| 4 | 5032.6016 | -8.53 | 37.01 | 74.00 | 36.99 | 150 | 159 | Horizontal |
| 5 | 8545.7773 | 1.51 | 41.99 | 74.00 | 32.01 | 150 | 195 | Horizontal |
| 6 | 12777.4889 | 9.17 | 47.16 | 74.00 | 26.84 | 150 | 2 | Horizontal |


| AV Final Data List | | | | | | | | |
|--------------------|-------------|-------------|-------------------|-------------------|----------------|-------------|-----------|------------|
| NO. | Freq. (MHz) | Factor (dB) | AV Value (dBμV/m) | AV Limit (dBμV/m) | AV Margin (dB) | Height (cm) | Angle (°) | Polarity |
| 1 | 1343.5172 | 2.92 | 37.15 | 54.00 | 16.85 | 150 | 166 | Horizontal |
| 2 | 1783.5392 | 3.36 | 37.17 | 54.00 | 16.83 | 150 | 320 | Horizontal |
| 3 | 2402.0701 | 7.13 | 46.58 | 54.00 | 7.42 | 150 | 266 | Horizontal |
| 4 | 5032.6016 | -8.53 | 33.08 | 54.00 | 20.92 | 150 | 159 | Horizontal |
| 5 | 8545.7773 | 1.51 | 39.27 | 54.00 | 14.73 | 150 | 195 | Horizontal |
| 6 | 12777.4889 | 9.17 | 43.67 | 54.00 | 10.33 | 150 | 2 | Horizontal |

Test Report

| Project Information | | | |
|---------------------|---|--------------|------------|
| EUT: | IEEE 802.11a/b/g/n/ac 2T2R Wi-Fi Module Integrated BT 2.1/3.0/4.2/5.0 | | |
| Model: | SKI.WB822CU.5 | Environment: | 23.6°C 53% |
| Mode: | DH5_2402 | Voltage: | DC 3.3V |
| Customer: | | Engineer: | Soho Liu |
| Remark: | | | |

Start of Test: 2024-01-09 20:22:35

Test Graph

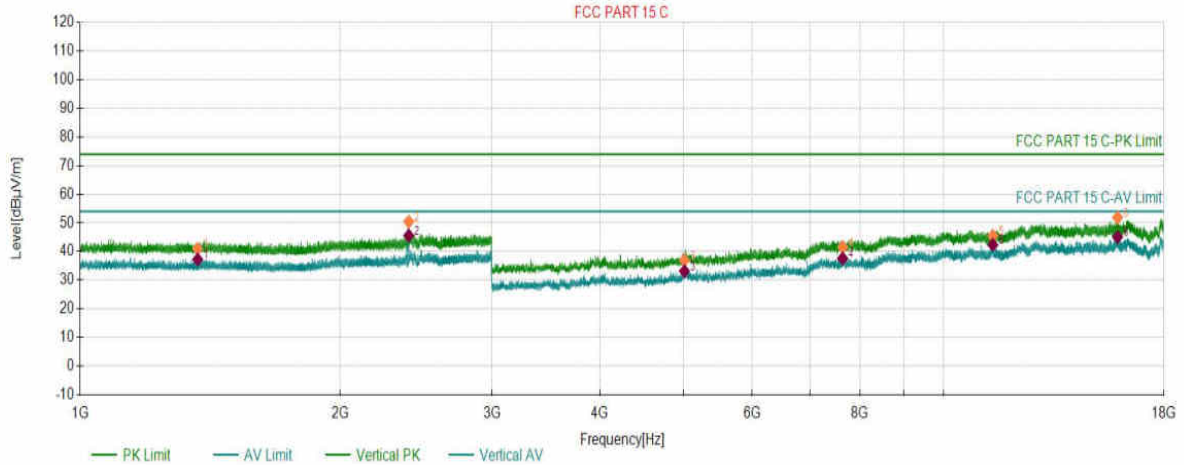

PK Final Data List

| NO. | Freq. (MHz) | Factor (dB) | PK Value (dBµV/m) | PK Limit (dBµV/m) | PK Margin (dB) | Height (cm) | Angle (°) | Polarity |
|-----|-------------|-------------|-------------------|-------------------|----------------|-------------|-----------|----------|
| 1 | 1368.0184 | 3.06 | 40.98 | 74.00 | 33.02 | 150 | 358 | Vertical |
| 2 | 2402.0701 | 7.13 | 50.43 | 74.00 | 23.57 | 150 | 7 | Vertical |
| 3 | 5010.1005 | -8.58 | 36.97 | 74.00 | 37.03 | 150 | 12 | Vertical |
| 4 | 7639.7320 | -1.23 | 41.58 | 74.00 | 32.42 | 150 | 285 | Vertical |
| 5 | 11402.6701 | 6.44 | 45.46 | 74.00 | 28.54 | 150 | 151 | Vertical |
| 6 | 15902.8951 | 12.33 | 51.85 | 74.00 | 22.15 | 150 | 20 | Vertical |

AV Final Data List


| NO. | Freq. (MHz) | Factor (dB) | AV Value (dBµV/m) | AV Limit (dBµV/m) | AV Margin (dB) | Height (cm) | Angle (°) | Polarity |
|-----|-------------|-------------|-------------------|-------------------|----------------|-------------|-----------|----------|
| 1 | 1368.0184 | 3.06 | 37.25 | 54.00 | 16.75 | 150 | 358 | Vertical |
| 2 | 2402.0701 | 7.13 | 45.56 | 54.00 | 8.44 | 150 | 7 | Vertical |
| 3 | 5010.1005 | -8.58 | 33.15 | 54.00 | 20.85 | 150 | 12 | Vertical |
| 4 | 7639.7320 | -1.23 | 37.58 | 54.00 | 16.42 | 150 | 285 | Vertical |
| 5 | 11402.6701 | 6.44 | 42.34 | 54.00 | 11.66 | 150 | 151 | Vertical |
| 6 | 15902.8951 | 12.33 | 45.09 | 54.00 | 8.91 | 150 | 20 | Vertical |

Test Report

| Project Information | | | |
|---------------------|---|--------------|------------|
| EUT: | IEEE 802.11a/b/g/n/ac 2T2R Wi-Fi Module Integrated BT 2.1/3.0/4.2/5.0 | | |
| Model: | SKI.WB822CU.5 | Environment: | 23.6°C 53% |
| Mode: | DH5_2441 | Voltage: | DC 3.3V |
| Customer: | | Engineer: | Soho Liu |
| Remark: | | | |

Start of Test: 2024-01-09 20:28:32

Test Graph

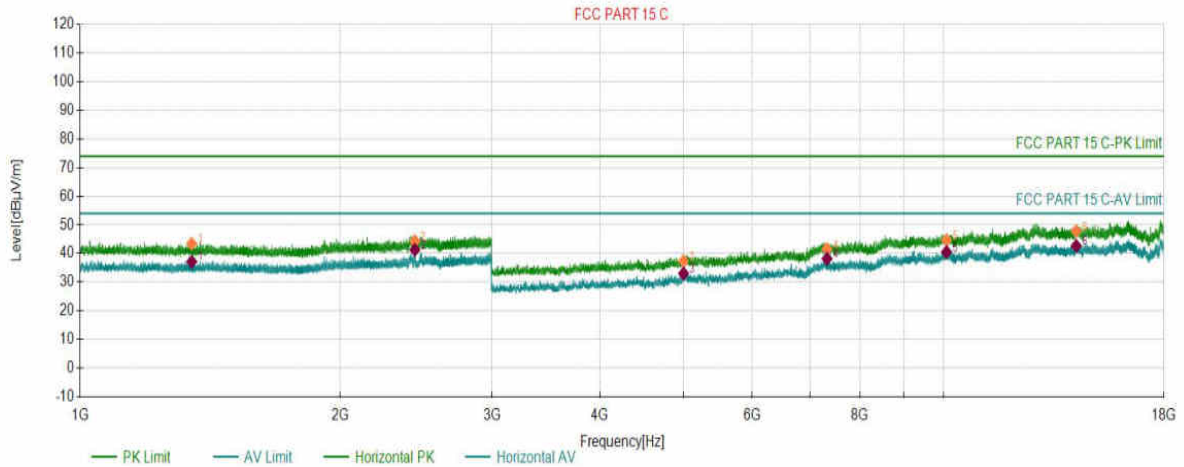

| PK Final Data List | | | | | | | | |
|--------------------|-------------|-------------|-------------------|-------------------|----------------|-------------|-----------|------------|
| NO. | Freq. (MHz) | Factor (dB) | PK Value (dBµV/m) | PK Limit (dBµV/m) | PK Margin (dB) | Height (cm) | Angle (°) | Polarity |
| 1 | 1346.6173 | 2.93 | 43.44 | 74.00 | 30.56 | 150 | 331 | Horizontal |
| 2 | 2441.2721 | 7.37 | 44.35 | 74.00 | 29.65 | 150 | 176 | Horizontal |
| 3 | 4998.0999 | -8.61 | 37.36 | 74.00 | 36.64 | 150 | 205 | Horizontal |
| 4 | 7328.4664 | -1.28 | 41.59 | 74.00 | 32.41 | 150 | 360 | Horizontal |
| 5 | 10078.8539 | 4.65 | 44.72 | 74.00 | 29.28 | 150 | 324 | Horizontal |
| 6 | 14243.0622 | 10.95 | 47.79 | 74.00 | 26.21 | 150 | 102 | Horizontal |


| AV Final Data List | | | | | | | | |
|--------------------|-------------|-------------|-------------------|-------------------|----------------|-------------|-----------|------------|
| NO. | Freq. (MHz) | Factor (dB) | AV Value (dBµV/m) | AV Limit (dBµV/m) | AV Margin (dB) | Height (cm) | Angle (°) | Polarity |
| 1 | 1346.6173 | 2.93 | 37.16 | 54.00 | 16.84 | 150 | 331 | Horizontal |
| 2 | 2441.2721 | 7.37 | 41.30 | 54.00 | 12.70 | 150 | 176 | Horizontal |
| 3 | 4998.0999 | -8.61 | 33.06 | 54.00 | 20.94 | 150 | 205 | Horizontal |
| 4 | 7328.4664 | -1.28 | 38.21 | 54.00 | 15.79 | 150 | 360 | Horizontal |
| 5 | 10078.8539 | 4.65 | 40.54 | 54.00 | 13.46 | 150 | 324 | Horizontal |
| 6 | 14243.0622 | 10.95 | 42.66 | 54.00 | 11.34 | 150 | 102 | Horizontal |

Test Report

| Project Information | | | |
|---------------------|---|--------------|------------|
| EUT: | IEEE 802.11a/b/g/n/ac 2T2R Wi-Fi Module Integrated BT 2.1/3.0/4.2/5.0 | | |
| Model: | SKI.WB822CU.5 | Environment: | 23.6°C 53% |
| Mode: | DH5_2441 | Voltage: | DC 3.3V |
| Customer: | | Engineer: | Soho Liu |
| Remark: | | | |

Start of Test: 2024-01-09 20:30:14

Test Graph

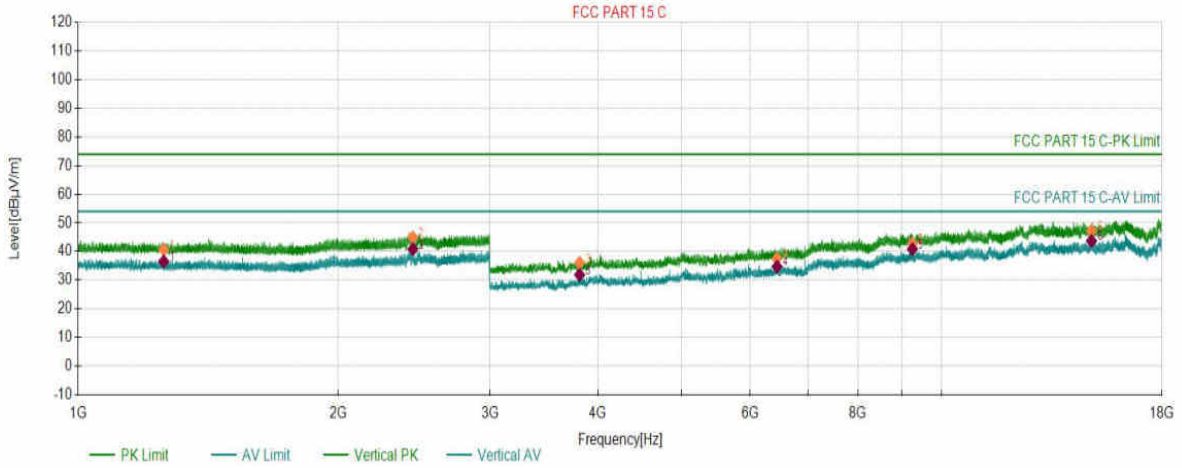

| PK Final Data List | | | | | | | | |
|--------------------|-------------|-------------|-------------------|-------------------|----------------|-------------|-----------|----------|
| NO. | Freq. (MHz) | Factor (dB) | PK Value (dBµV/m) | PK Limit (dBµV/m) | PK Margin (dB) | Height (cm) | Angle (°) | Polarity |
| 1 | 1256.3128 | 2.49 | 40.64 | 74.00 | 33.36 | 150 | 211 | Vertical |
| 2 | 2441.3721 | 7.37 | 44.91 | 74.00 | 29.09 | 150 | 302 | Vertical |
| 3 | 3808.5404 | -14.05 | 36.08 | 74.00 | 37.92 | 150 | 266 | Vertical |
| 4 | 6447.9224 | -4.16 | 37.50 | 74.00 | 36.50 | 150 | 2 | Vertical |
| 5 | 9251.5626 | 3.35 | 42.79 | 74.00 | 31.21 | 150 | 360 | Vertical |
| 6 | 14913.5957 | 11.65 | 47.24 | 74.00 | 26.76 | 150 | 240 | Vertical |


| AV Final Data List | | | | | | | | |
|--------------------|-------------|-------------|-------------------|-------------------|----------------|-------------|-----------|----------|
| NO. | Freq. (MHz) | Factor (dB) | AV Value (dBµV/m) | AV Limit (dBµV/m) | AV Margin (dB) | Height (cm) | Angle (°) | Polarity |
| 1 | 1256.3128 | 2.49 | 36.54 | 54.00 | 17.46 | 150 | 211 | Vertical |
| 2 | 2441.3721 | 7.37 | 40.82 | 54.00 | 13.18 | 150 | 302 | Vertical |
| 3 | 3808.5404 | -14.05 | 31.88 | 54.00 | 22.12 | 150 | 266 | Vertical |
| 4 | 6447.9224 | -4.16 | 34.73 | 54.00 | 19.27 | 150 | 2 | Vertical |
| 5 | 9251.5626 | 3.35 | 40.83 | 54.00 | 13.17 | 150 | 360 | Vertical |
| 6 | 14913.5957 | 11.65 | 43.72 | 54.00 | 10.28 | 150 | 240 | Vertical |

Test Report

| Project Information | | | |
|---------------------|---|--------------|------------|
| EUT: | IEEE 802.11a/b/g/n/ac 2T2R Wi-Fi Module Integrated BT 2.1/3.0/4.2/5.0 | | |
| Model: | SKI.WB822CU.5 | Environment: | 23.6°C 53% |
| Mode: | DH5_2480 | Voltage: | DC 3.3V |
| Customer: | | Engineer: | Soho Liu |
| Remark: | | | |

Start of Test: 2024-01-09 20:34:33

Test Graph

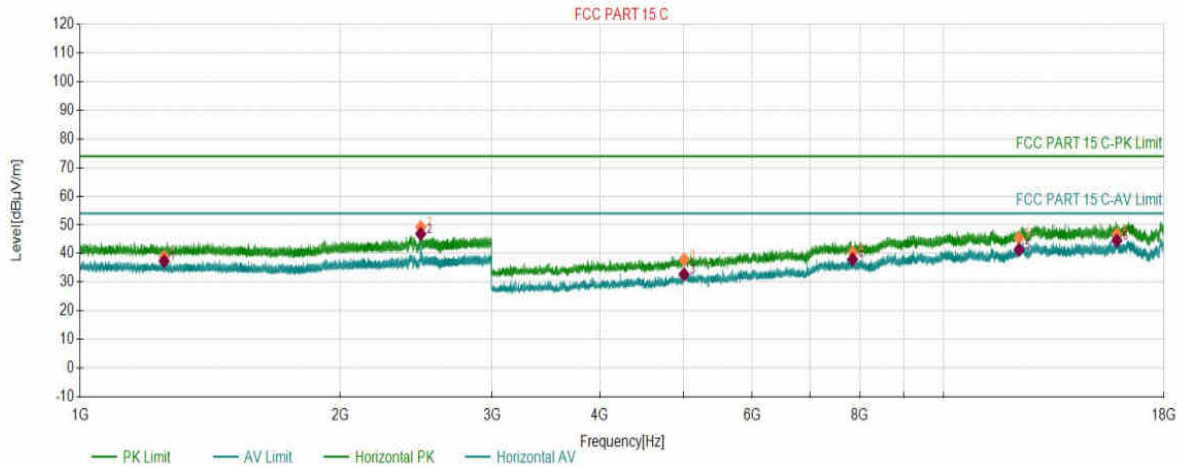

| PK Final Data List | | | | | | | | |
|--------------------|-------------|-------------|-------------------|-------------------|----------------|-------------|-----------|------------|
| NO. | Freq. (MHz) | Factor (dB) | PK Value (dBµV/m) | PK Limit (dBµV/m) | PK Margin (dB) | Height (cm) | Angle (°) | Polarity |
| 1 | 1251.1126 | 2.47 | 38.90 | 74.00 | 35.10 | 150 | 358 | Horizontal |
| 2 | 2480.1740 | 7.60 | 49.25 | 74.00 | 24.75 | 150 | 167 | Horizontal |
| 3 | 5005.6003 | -8.59 | 37.85 | 74.00 | 36.15 | 150 | 360 | Horizontal |
| 4 | 7845.2423 | -0.51 | 40.39 | 74.00 | 33.61 | 150 | 228 | Horizontal |
| 5 | 12226.2113 | 6.81 | 45.42 | 74.00 | 28.58 | 150 | 237 | Horizontal |
| 6 | 15872.8936 | 12.04 | 46.72 | 74.00 | 27.28 | 150 | 182 | Horizontal |


| AV Final Data List | | | | | | | | |
|--------------------|-------------|-------------|-------------------|-------------------|----------------|-------------|-----------|------------|
| NO. | Freq. (MHz) | Factor (dB) | AV Value (dBµV/m) | AV Limit (dBµV/m) | AV Margin (dB) | Height (cm) | Angle (°) | Polarity |
| 1 | 1251.1126 | 2.47 | 37.36 | 54.00 | 16.64 | 150 | 358 | Horizontal |
| 2 | 2480.1740 | 7.60 | 46.87 | 54.00 | 7.13 | 150 | 167 | Horizontal |
| 3 | 5005.6003 | -8.59 | 32.80 | 54.00 | 21.20 | 150 | 360 | Horizontal |
| 4 | 7845.2423 | -0.51 | 37.94 | 54.00 | 16.06 | 150 | 228 | Horizontal |
| 5 | 12226.2113 | 6.81 | 41.39 | 54.00 | 12.61 | 150 | 237 | Horizontal |
| 6 | 15872.8936 | 12.04 | 44.49 | 54.00 | 9.51 | 150 | 182 | Horizontal |

Test Report

| Project Information | | | |
|---------------------|---|--------------|------------|
| EUT: | IEEE 802.11a/b/g/n/ac 2T2R Wi-Fi Module Integrated BT 2.1/3.0/4.2/5.0 | | |
| Model: | SKI.WB822CU.5 | Environment: | 23.6°C 53% |
| Mode: | DH5_2480 | Voltage: | DC 3.3V |
| Customer: | | Engineer: | Soho Liu |
| Remark: | | | |

Start of Test: 2024-01-09 20:36:14

Test Graph

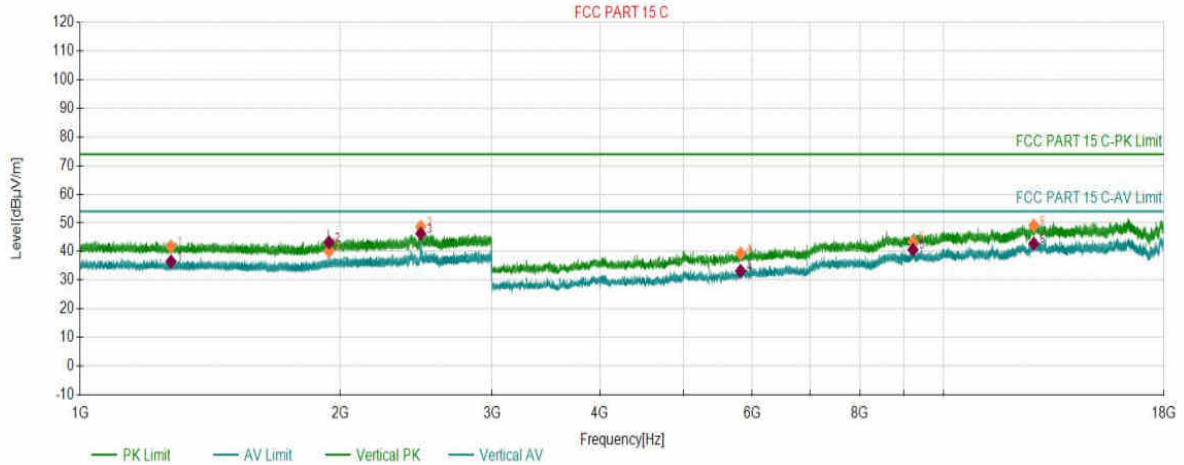

PK Final Data List

| NO. | Freq. (MHz) | Factor (dB) | PK Value (dBµV/m) | PK Limit (dBµV/m) | PK Margin (dB) | Height (cm) | Angle (°) | Polarity |
|-----|-------------|-------------|-------------------|-------------------|----------------|-------------|-----------|----------|
| 1 | 1274.3137 | 2.55 | 41.78 | 74.00 | 32.22 | 150 | 2 | Vertical |
| 2 | 1941.8471 | 4.71 | 40.15 | 74.00 | 33.85 | 150 | 32 | Vertical |
| 3 | 2480.2740 | 7.60 | 48.63 | 74.00 | 25.37 | 150 | 285 | Vertical |
| 4 | 5818.6409 | -6.43 | 39.30 | 74.00 | 34.70 | 150 | 145 | Vertical |
| 5 | 9215.5608 | 3.47 | 43.40 | 74.00 | 30.60 | 150 | 55 | Vertical |
| 6 | 12720.4860 | 8.44 | 49.08 | 74.00 | 24.92 | 150 | 2 | Vertical |

AV Final Data List


| NO. | Freq. (MHz) | Factor (dB) | AV Value (dBµV/m) | AV Limit (dBµV/m) | AV Margin (dB) | Height (cm) | Angle (°) | Polarity |
|-----|-------------|-------------|-------------------|-------------------|----------------|-------------|-----------|----------|
| 1 | 1274.3137 | 2.55 | 36.53 | 54.00 | 17.47 | 150 | 2 | Vertical |
| 2 | 1941.8471 | 4.71 | 43.23 | 54.00 | 10.77 | 150 | 32 | Vertical |
| 3 | 2480.2740 | 7.60 | 46.25 | 54.00 | 7.75 | 150 | 285 | Vertical |
| 4 | 5818.6409 | -6.43 | 33.24 | 54.00 | 20.76 | 150 | 145 | Vertical |
| 5 | 9215.5608 | 3.47 | 40.61 | 54.00 | 13.39 | 150 | 55 | Vertical |
| 6 | 12720.4860 | 8.44 | 42.74 | 54.00 | 11.26 | 150 | 2 | Vertical |

Test Report

| Project Information | | | |
|---------------------|---|--------------|------------|
| EUT: | IEEE 802.11a/b/g/n/ac 2T2R Wi-Fi Module Integrated BT 2.1/3.0/4.2/5.0 | | |
| Model: | SKI.WB822CU.5 | Environment: | 23.6°C 53% |
| Mode: | DH5_2402 | Voltage: | DC 3.3V |
| Customer: | | Engineer: | Soho Liu |
| Remark: | | | |

Start of Test: 2024-01-09 17:08:36

Test Graph

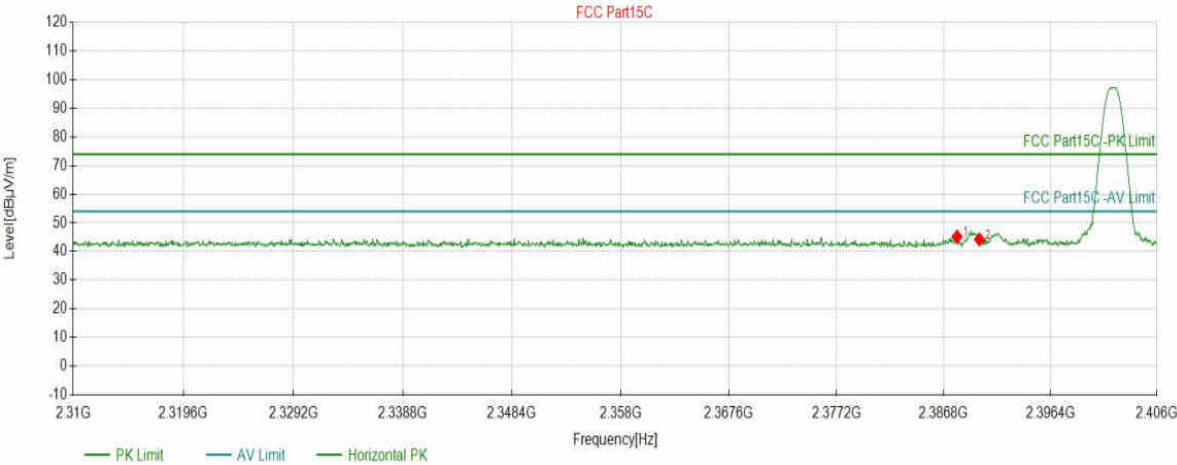


| Suspected Data List | | | | | | | | | |
|---------------------|-------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|----------|
| NO. | Freq. (MHz) | Level (dBµV/m) | Factor (dB) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Angle (°) | Detector | Polarity |
| 1 | 2387.9910 | 45.19 | 5.65 | 74.00 | 28.81 | 150 | 203 | PK | Horizont |
| 2 | 2390.0080 | 44.22 | 5.65 | 74.00 | 29.78 | 150 | 152 | PK | Horizont |

Test Report

| Project Information | | | |
|---------------------|---|--------------|------------|
| EUT: | IEEE 802.11a/b/g/n/ac 2T2R Wi-Fi Module Integrated BT 2.1/3.0/4.2/5.0 | | |
| Model: | SKI.WB822CU.5 | Environment: | 23.6°C 53% |
| Mode: | DH5_2402 | Voltage: | DC 3.3V |
| Customer: | | Engineer: | Soho Liu |
| Remark: | | | |

Start of Test: 2024-01-09 17:09:24

Test Graph

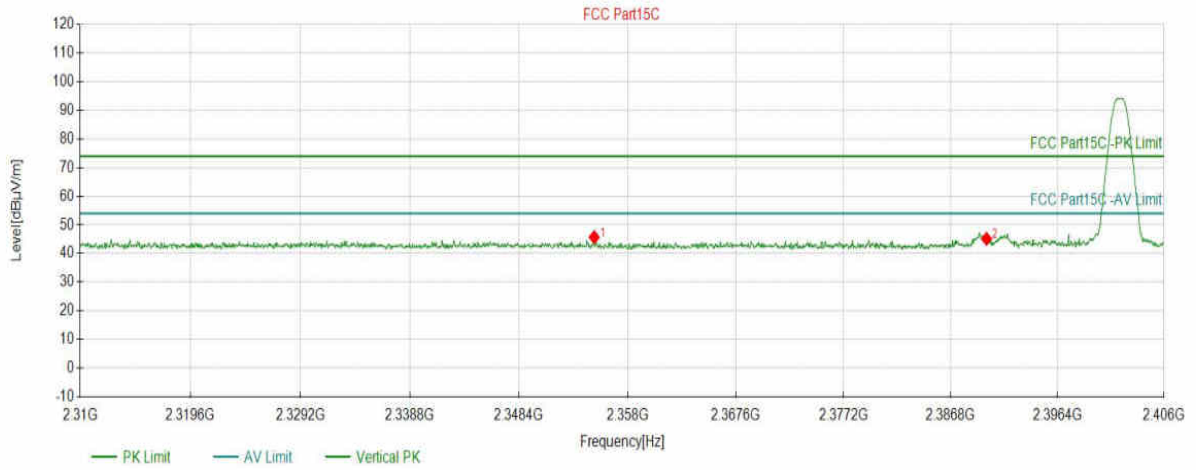


| Suspected Data List | | | | | | | | | |
|---------------------|-------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|----------|
| NO. | Freq. (MHz) | Level (dBµV/m) | Factor (dB) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Angle (°) | Detector | Polarity |
| 1 | 2355.0465 | 45.72 | 5.68 | 74.00 | 28.28 | 150 | 92 | PK | Vertical |
| 2 | 2390.0080 | 45.15 | 5.65 | 74.00 | 28.85 | 150 | 72 | PK | Vertical |

Test Report

| Project Information | | | |
|---------------------|---|--------------|------------|
| EUT: | IEEE 802.11a/b/g/n/ac 2T2R Wi-Fi Module Integrated BT 2.1/3.0/4.2/5.0 | | |
| Model: | SKI.WB822CU.5 | Environment: | 23.6°C 53% |
| Mode: | DH5_2480 | Voltage: | DC 3.3V |
| Customer: | | Engineer: | Soho Liu |
| Remark: | | | |

Start of Test: 2024-01-09 15:58:25

Test Graph

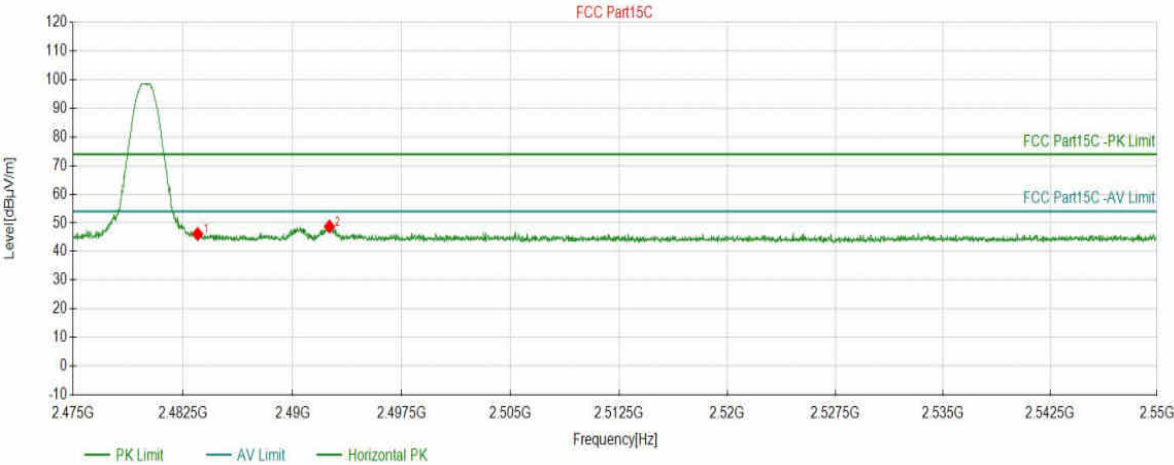


| Suspected Data List | | | | | | | | | |
|---------------------|-------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|----------|
| NO. | Freq. (MHz) | Level (dBµV/m) | Factor (dB) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Angle (°) | Detector | Polarity |
| 1 | 2483.5028 | 46.12 | 6.24 | 74.00 | 27.88 | 150 | 359 | PK | Horizont |
| 2 | 2492.5308 | 48.72 | 6.31 | 74.00 | 25.28 | 150 | 303 | PK | Horizont |

Test Report

| Project Information | | | |
|---------------------|---|--------------|------------|
| EUT: | IEEE 802.11a/b/g/n/ac 2T2R Wi-Fi Module Integrated BT 2.1/3.0/4.2/5.0 | | |
| Model: | SKI.WB822CU.5 | Environment: | 23.6°C 53% |
| Mode: | DH5_2480 | Voltage: | DC 3.3V |
| Customer: | | Engineer: | Soho Liu |
| Remark: | | | |

Start of Test: 2024-01-09 15:59:02

Test Graph

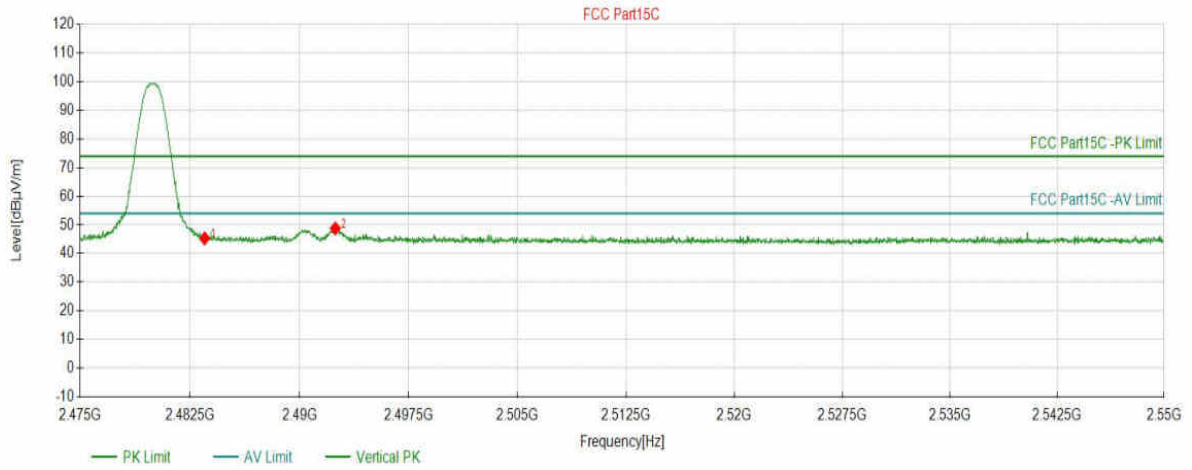

Suspected Data List


| NO. | Freq. (MHz) | Level (dBµV/m) | Factor (dB) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Angle (°) | Detector | Polarity |
|-----|-------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|----------|
| 1 | 2483.5028 | 45.28 | 6.24 | 74.00 | 28.72 | 150 | 224 | PK | Vertical |
| 2 | 2492.4558 | 48.76 | 6.31 | 74.00 | 25.24 | 150 | 270 | PK | Vertical |

Test Report

| Project Information | | | |
|---------------------|---|--------------|------------|
| EUT: | IEEE 802.11a/b/g/n/ac 2T2R Wi-Fi Module Integrated BT 2.1/3.0/4.2/5.0 | | |
| Model: | SKI.WB822CU.5 | Environment: | 23.6°C 53% |
| Mode: | 2DH5_2402 | Voltage: | DC 3.3V |
| Customer: | | Engineer: | Soho Liu |
| Remark: | | | |

Start of Test: 2024-01-09 16:04:57

Test Graph

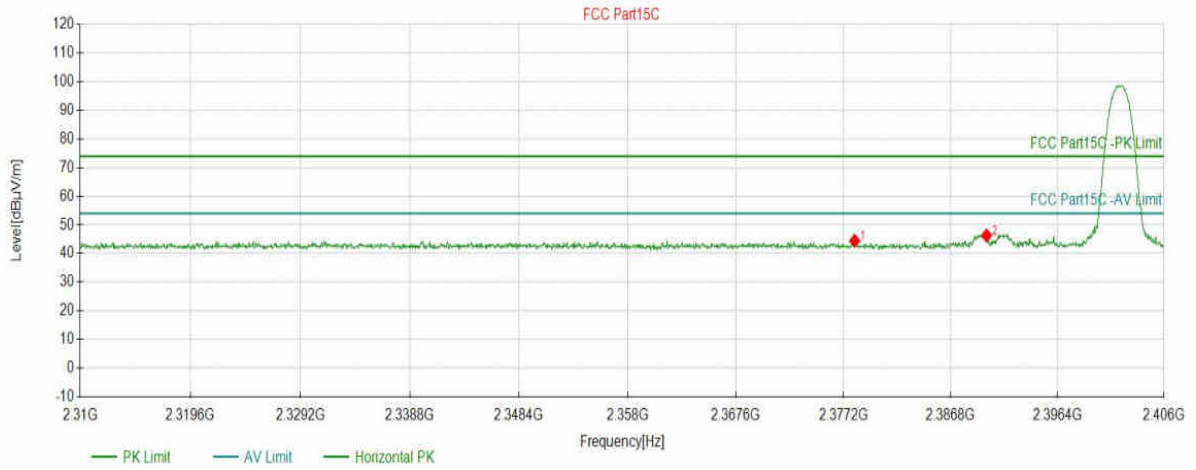

Suspected Data List


| NO. | Freq. (MHz) | Level (dBµV/m) | Factor (dB) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Angle (°) | Detector | Polarity |
|-----|-------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|----------|
| 1 | 2378.1941 | 44.46 | 5.66 | 74.00 | 29.54 | 150 | 108 | PK | Horizont |
| 2 | 2390.0080 | 46.32 | 5.65 | 74.00 | 27.68 | 150 | 151 | PK | Horizont |

Test Report

| Project Information | | | |
|---------------------|---|--------------|------------|
| EUT: | IEEE 802.11a/b/g/n/ac 2T2R Wi-Fi Module Integrated BT 2.1/3.0/4.2/5.0 | | |
| Model: | SKI.WB822CU.5 | Environment: | 23.6°C 53% |
| Mode: | 2DH5_2402 | Voltage: | DC 3.3V |
| Customer: | | Engineer: | Soho Liu |
| Remark: | | | |

Start of Test: 2024-01-09 16:05:45

Test Graph

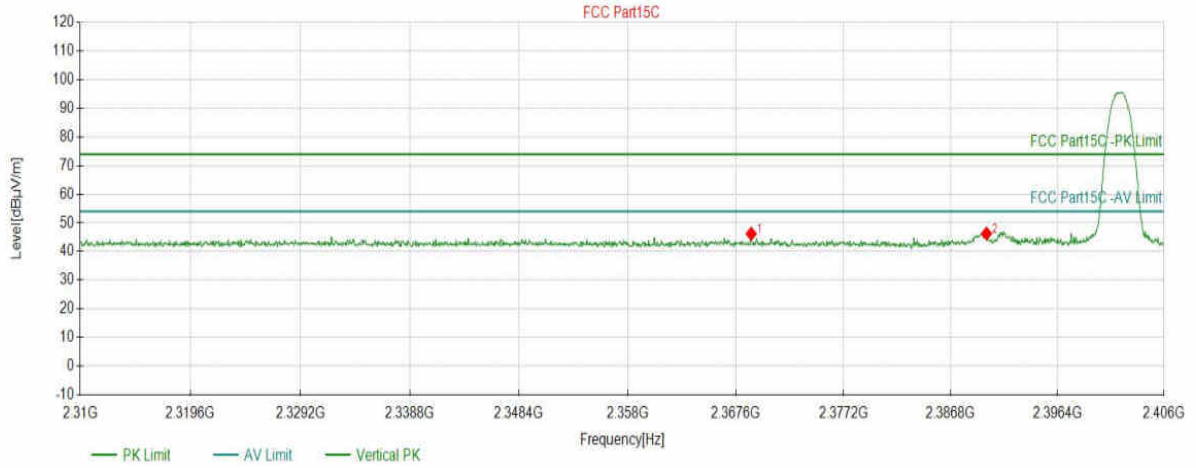

Suspected Data List


| NO. | Freq. (MHz) | Level (dBµV/m) | Factor (dB) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Angle (°) | Detector | Polarity |
|-----|-------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|----------|
| 1 | 2368.9735 | 46.20 | 5.67 | 74.00 | 27.80 | 150 | 248 | PK | Vertical |
| 2 | 2390.0080 | 46.28 | 5.65 | 74.00 | 27.72 | 150 | 80 | PK | Vertical |

Test Report

| Project Information | | | |
|---------------------|---|--------------|------------|
| EUT: | IEEE 802.11a/b/g/n/ac 2T2R Wi-Fi Module Integrated BT 2.1/3.0/4.2/5.0 | | |
| Model: | SKI.WB822CU.5 | Environment: | 23.6°C 53% |
| Mode: | 2DH5_2480 | Voltage: | DC 3.3V |
| Customer: | | Engineer: | Soho Liu |
| Remark: | | | |

Start of Test: 2024-01-09 16:07:55

Test Graph

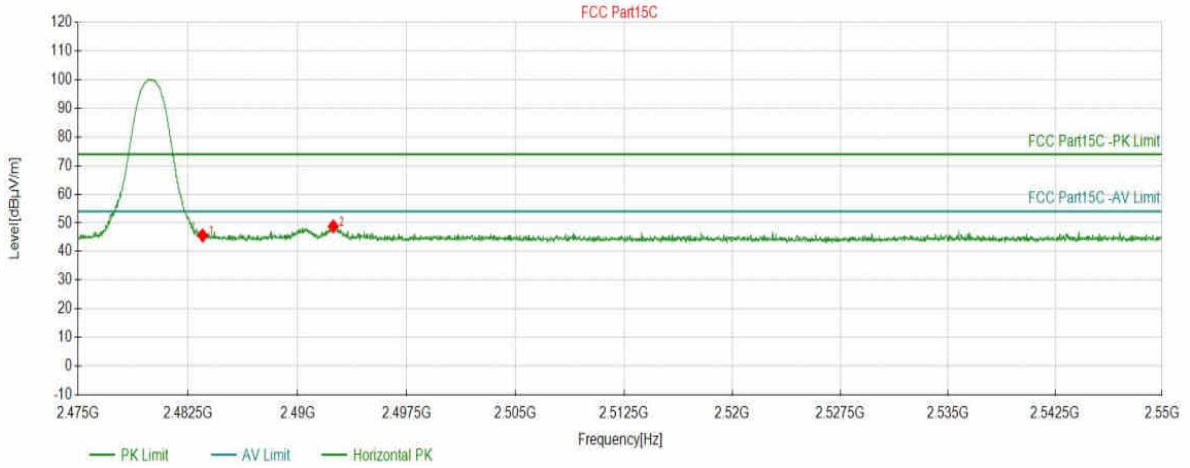

Suspected Data List


| NO. | Freq. (MHz) | Level (dBµV/m) | Factor (dB) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Angle (°) | Detector | Polarity |
|-----|-------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|----------|
| 1 | 2483.5028 | 45.58 | 6.24 | 74.00 | 28.42 | 150 | 304 | PK | Horizont |
| 2 | 2492.4558 | 48.77 | 6.31 | 74.00 | 25.23 | 150 | 299 | PK | Horizont |

Test Report

| Project Information | | | |
|---------------------|---|--------------|------------|
| EUT: | IEEE 802.11a/b/g/n/ac 2T2R Wi-Fi Module Integrated BT 2.1/3.0/4.2/5.0 | | |
| Model: | SKI.WB822CU.5 | Environment: | 23.6°C 53% |
| Mode: | 2DH5_2480 | Voltage: | DC 3.3V |
| Customer: | | Engineer: | Soho Liu |
| Remark: | | | |

Start of Test: 2024-01-09 16:08:40

Test Graph

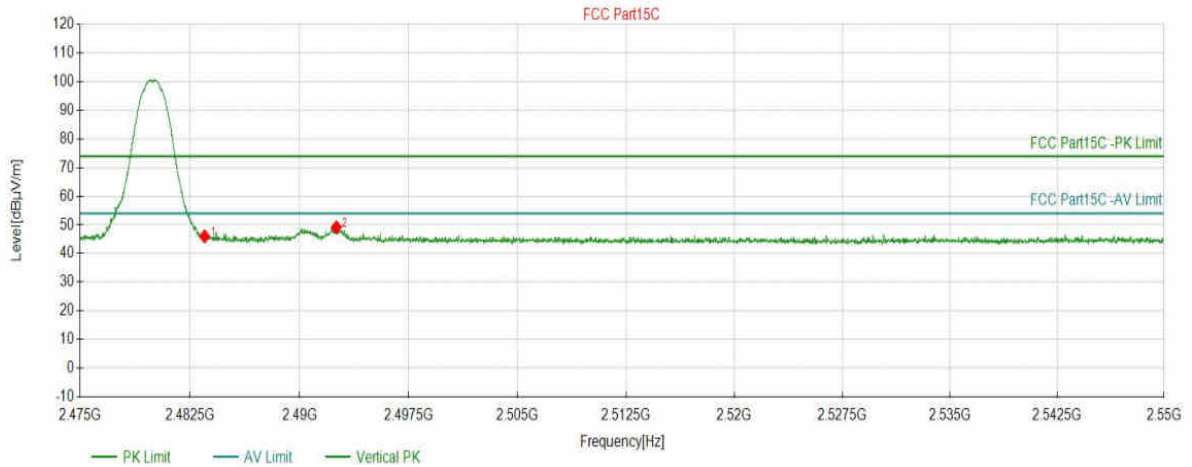

Suspected Data List


| NO. | Freq. (MHz) | Level (dBµV/m) | Factor (dB) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Angle (°) | Detector | Polarity |
|-----|-------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|----------|
| 1 | 2483.5028 | 45.98 | 6.24 | 74.00 | 28.02 | 150 | 271 | PK | Vertical |
| 2 | 2492.5308 | 49.14 | 6.31 | 74.00 | 24.86 | 150 | 226 | PK | Vertical |

Test Report

| Project Information | | | |
|---------------------|---|--------------|------------|
| EUT: | IEEE 802.11a/b/g/n/ac 2T2R Wi-Fi Module Integrated BT 2.1/3.0/4.2/5.0 | | |
| Model: | SKI.WB822CU.5 | Environment: | 23.6°C 53% |
| Mode: | 3DH5_2402 | Voltage: | DC 3.3V |
| Customer: | | Engineer: | Soho Liu |
| Remark: | | | |

Start of Test: 2024-01-09 16:11:01

Test Graph

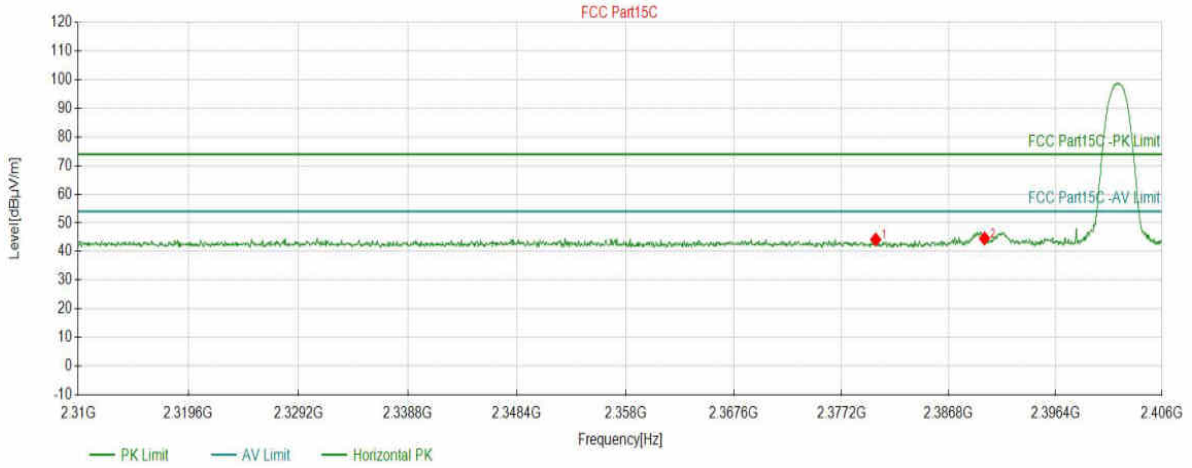

Suspected Data List


| NO. | Freq. (MHz) | Level (dBµV/m) | Factor (dB) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Angle (°) | Detector | Polarity |
|-----|-------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|----------|
| 1 | 2380.2591 | 44.18 | 5.66 | 74.00 | 29.82 | 150 | 102 | PK | Horizont |
| 2 | 2390.0080 | 44.59 | 5.65 | 74.00 | 29.41 | 150 | 182 | PK | Horizont |

Test Report

| Project Information | | | |
|---------------------|---|--------------|------------|
| EUT: | IEEE 802.11a/b/g/n/ac 2T2R Wi-Fi Module Integrated BT 2.1/3.0/4.2/5.0 | | |
| Model: | SKI.WB822CU.5 | Environment: | 23.6°C 53% |
| Mode: | 3DH5_2402 | Voltage: | DC 3.3V |
| Customer: | | Engineer: | Soho Liu |
| Remark: | | | |

Start of Test: 2024-01-09 16:11:49

Test Graph

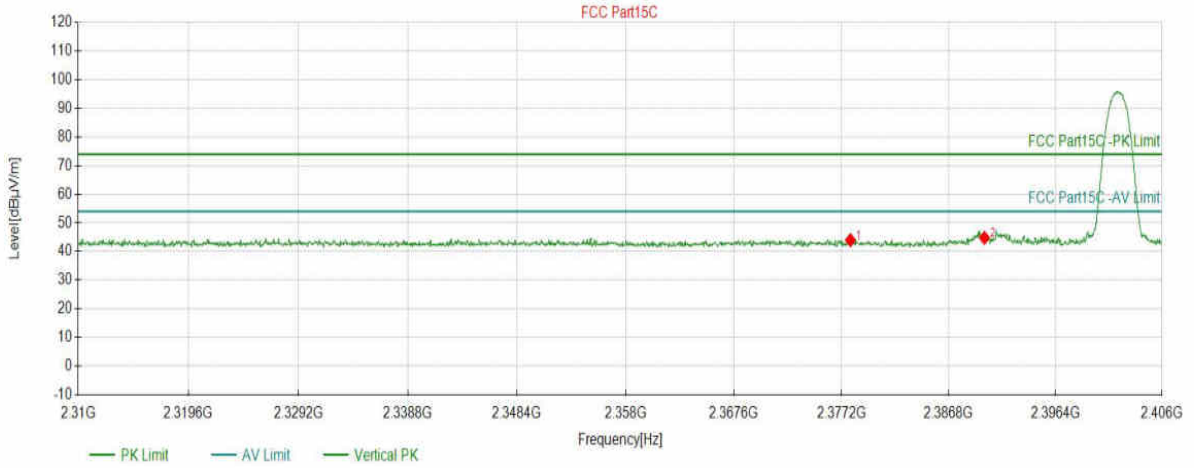

Suspected Data List


| NO. | Freq. (MHz) | Level (dBµV/m) | Factor (dB) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Angle (°) | Detector | Polarity |
|-----|-------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|----------|
| 1 | 2378.0020 | 43.98 | 5.66 | 74.00 | 30.02 | 150 | 0 | PK | Vertical |
| 2 | 2390.0080 | 44.77 | 5.65 | 74.00 | 29.23 | 150 | 0 | PK | Vertical |

Test Report

| Project Information | | | |
|---------------------|---|--------------|------------|
| EUT: | IEEE 802.11a/b/g/n/ac 2T2R Wi-Fi Module Integrated BT 2.1/3.0/4.2/5.0 | | |
| Model: | SKI.WB822CU.5 | Environment: | 23.6°C 53% |
| Mode: | 3DH5_2480 | Voltage: | DC 3.3V |
| Customer: | | Engineer: | Soho Liu |
| Remark: | | | |

Start of Test: 2024-01-09 16:13:51

Test Graph

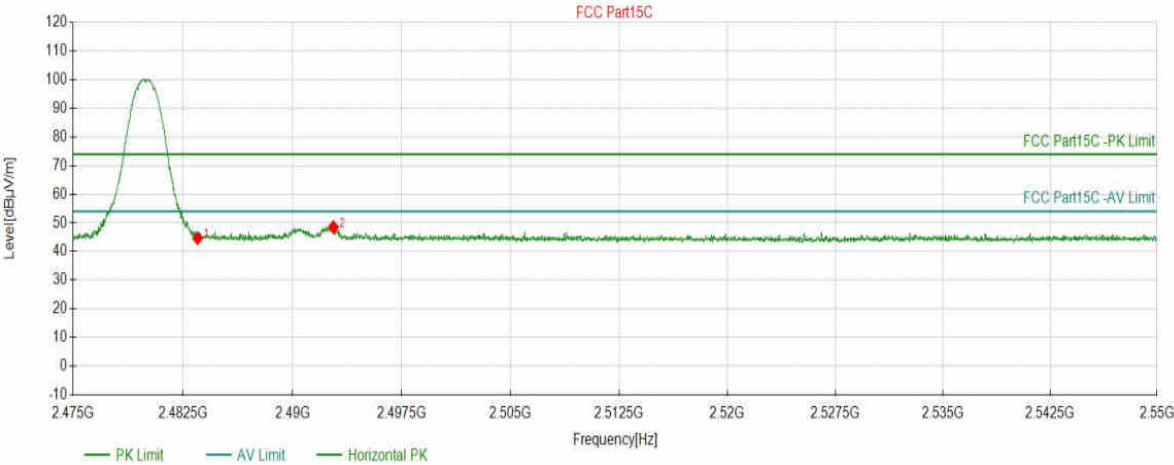


| Suspected Data List | | | | | | | | | |
|---------------------|-------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|----------|
| NO. | Freq. (MHz) | Level (dBµV/m) | Factor (dB) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Angle (°) | Detector | Polarity |
| 1 | 2483.5028 | 44.68 | 6.24 | 74.00 | 29.32 | 150 | 2 | PK | Horizont |
| 2 | 2492.8059 | 48.50 | 6.31 | 74.00 | 25.50 | 150 | 301 | PK | Horizont |

Test Report

| Project Information | | | |
|---------------------|---|--------------|------------|
| EUT: | IEEE 802.11a/b/g/n/ac 2T2R Wi-Fi Module Integrated BT 2.1/3.0/4.2/5.0 | | |
| Model: | SKI.WB822CU.5 | Environment: | 23.6°C 53% |
| Mode: | 3DH5_2480 | Voltage: | DC 3.3V |
| Customer: | | Engineer: | Soho Liu |
| Remark: | | | |

Start of Test: 2024-01-09 16:14:36

Test Graph

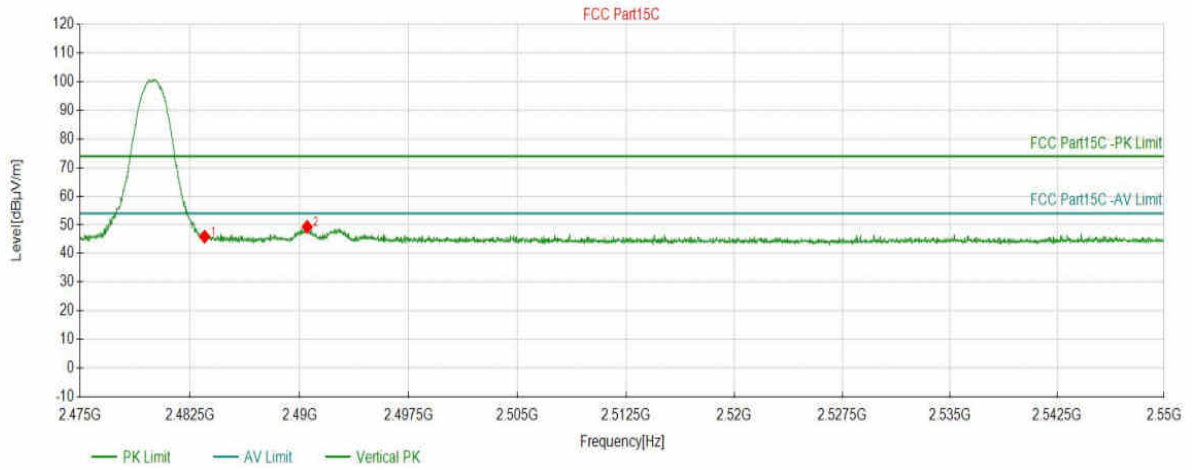

| Suspected Data List | | | | | | | | | |
|---------------------|-------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|----------|
| NO. | Freq. (MHz) | Level (dBµV/m) | Factor (dB) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Angle (°) | Detector | Polarity |
| 1 | 2483.5028 | 45.89 | 6.24 | 74.00 | 28.11 | 150 | 203 | PK | Vertical |
| 2 | 2490.5302 | 49.32 | 6.29 | 74.00 | 24.68 | 150 | 223 | PK | Vertical |

END OF REPORT