


2DH5 Conducted Spurious Emissions

Channel 00 (2402MHz)



Channel 39 (2441MHz)

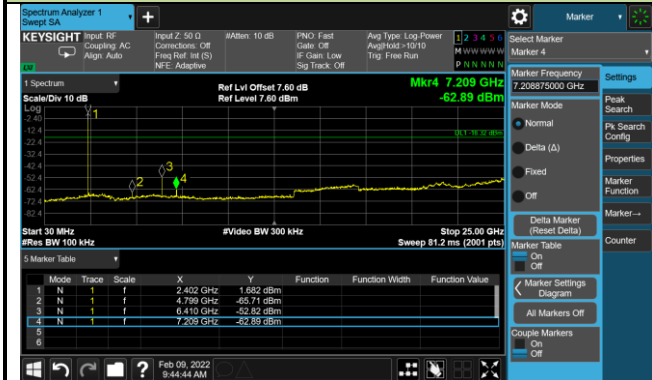

Channel 78 (2480MHz)



3DH5 Conducted Spurious Emissions

Channel 00 (2402MHz)



Channel 39 (2441MHz)



Channel 78 (2480MHz)



Test Site	WZ-SR5	Test Engineer	Liz Yuan
Test Date	2022/02/09	RF Port	BT 1

Test Mode	Channel No.	Frequency (MHz)	Limit (MHz)	Result
DH5	00	2402	20dBc	Pass
DH5	39	2441	20dBc	Pass
DH5	78	2480	20dBc	Pass
2DH5	00	2402	20dBc	Pass
2DH5	39	2441	20dBc	Pass
2DH5	78	2480	20dBc	Pass
3DH5	00	2402	20dBc	Pass
3DH5	39	2441	20dBc	Pass
3DH5	78	2480	20dBc	Pass

DH5 Conducted Spurious Emissions


Channel 00 (2402MHz)



Channel 39 (2441MHz)



Channel 78 (2480MHz)

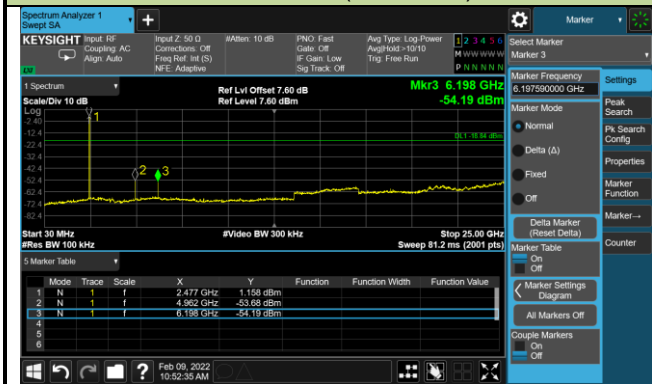

2DH5 Conducted Spurious Emissions


Channel 00 (2402MHz)



Channel 39 (2441MHz)



Channel 78 (2480MHz)

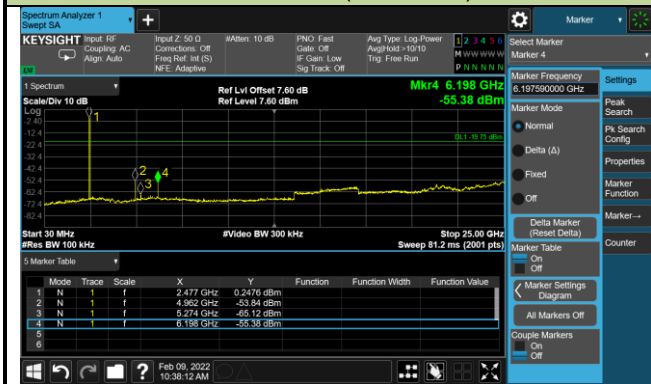

3DH5 Conducted Spurious Emissions

Channel 00 (2402MHz)



Channel 39 (2441MHz)



Channel 78 (2480MHz)



A.9 Radiated Spurious Emission Test Result
BT 0:

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2022/02/24	Test Mode:	DH5
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	3966.5	34.0	0.6	34.6	74.0	-39.4	Peak	Horizontal
	4119.5	34.6	1.2	35.8	74.0	-38.2	Peak	Horizontal
	4799.5	34.7	4.0	38.7	74.0	-35.3	Peak	Horizontal
	3907.0	35.0	0.2	35.2	74.0	-38.8	Peak	Vertical
	4085.5	34.8	1.1	35.9	74.0	-38.1	Peak	Vertical
	4808.0	36.5	4.0	40.5	74.0	-33.5	Peak	Vertical
39	4026.0	34.5	0.8	35.3	74.0	-38.7	Peak	Horizontal
	4289.5	34.2	1.9	36.1	74.0	-37.9	Peak	Horizontal
	4884.5	34.9	3.7	38.6	74.0	-35.4	Peak	Horizontal
	4026.0	34.5	0.8	35.3	74.0	-38.7	Peak	Vertical
	4663.5	33.0	3.4	36.4	74.0	-37.6	Peak	Vertical
	4884.5	34.3	3.7	38.0	74.0	-36.0	Peak	Vertical
78	4000.5	34.9	0.6	35.5	74.0	-38.5	Peak	Horizontal
	4357.5	34.8	2.2	37.0	74.0	-37.0	Peak	Horizontal
	4961.0	36.6	3.6	40.2	74.0	-33.8	Peak	Horizontal
	3898.5	35.6	0.2	35.8	74.0	-38.2	Peak	Vertical
	4000.5	34.9	0.6	35.5	74.0	-38.5	Peak	Vertical
	4816.5	33.6	3.9	37.5	74.0	-36.5	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor ((dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2022/02/24	Test Mode:	2DH5
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	3932.5	35.2	0.3	35.5	74.0	-38.5	Peak	Horizontal
	4128.0	35.8	1.2	37.0	74.0	-37.0	Peak	Horizontal
	4663.5	34.5	3.4	37.9	74.0	-36.1	Peak	Horizontal
	3932.5	35.2	0.3	35.5	74.0	-38.5	Peak	Vertical
	4145.0	35.1	1.2	36.3	74.0	-37.7	Peak	Vertical
	4927.0	34.5	3.9	38.4	74.0	-35.6	Peak	Vertical
39	3745.5	35.5	0.1	35.6	74.0	-38.4	Peak	Horizontal
	4128.0	35.1	1.2	36.3	74.0	-37.7	Peak	Horizontal
	4646.5	33.8	3.4	37.2	74.0	-36.8	Peak	Horizontal
	4102.5	34.7	1.2	35.9	74.0	-38.1	Peak	Vertical
	4306.5	34.1	2.0	36.1	74.0	-37.9	Peak	Vertical
	4901.5	33.8	3.7	37.5	74.0	-36.5	Peak	Vertical
78	3660.5	36.0	0.0	36.0	74.0	-38.0	Peak	Horizontal
	3975.0	34.8	0.6	35.4	74.0	-38.6	Peak	Horizontal
	4927.0	34.4	3.9	38.3	74.0	-35.7	Peak	Horizontal
	3847.5	35.2	0.2	35.4	74.0	-38.6	Peak	Vertical
	4153.5	35.4	1.3	36.7	74.0	-37.3	Peak	Vertical
	4969.5	34.0	3.7	37.7	74.0	-36.3	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor ((dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2022/02/24	Test Mode:	3DH5
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	3830.5	35.5	0.2	35.7	74.0	-38.3	Peak	Horizontal
	3983.5	34.9	0.6	35.5	74.0	-38.5	Peak	Horizontal
	4672.0	34.9	3.4	38.3	74.0	-35.7	Peak	Horizontal
	3983.5	35.8	0.6	36.4	74.0	-37.6	Peak	Vertical
	4213.0	34.4	1.5	35.9	74.0	-38.1	Peak	Vertical
	4808.0	34.2	4.0	38.2	74.0	-35.8	Peak	Vertical
39	3839.0	35.3	0.2	35.5	74.0	-38.5	Peak	Horizontal
	4136.5	36.3	1.2	37.5	74.0	-36.5	Peak	Horizontal
	4927.0	33.9	3.9	37.8	74.0	-36.2	Peak	Horizontal
	3830.5	35.9	0.2	36.1	74.0	-37.9	Peak	Vertical
	4068.5	35.7	0.9	36.6	74.0	-37.4	Peak	Vertical
	4927.0	33.9	3.9	37.8	74.0	-36.2	Peak	Vertical
78	3949.5	35.4	0.4	35.8	74.0	-38.2	Peak	Horizontal
	4272.5	35.2	1.8	37.0	74.0	-37.0	Peak	Horizontal
	4961.0	35.0	3.6	38.6	74.0	-35.4	Peak	Horizontal
	3949.5	35.4	0.4	35.8	74.0	-38.2	Peak	Vertical
	4281.0	33.7	1.9	35.6	74.0	-38.4	Peak	Vertical
	4961.0	34.5	3.6	38.1	74.0	-35.9	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor ((dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

BT 1:

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2022/02/24	Test Mode:	DH5
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	3898.5	36.4	0.2	36.6	74.0	-37.4	Peak	Horizontal
	3983.5	36.7	0.6	37.3	74.0	-36.7	Peak	Horizontal
	4808.0	38.3	4.0	42.3	74.0	-31.7	Peak	Horizontal
	3728.5	35.8	0.1	35.9	74.0	-38.1	Peak	Vertical
	3975.0	35.6	0.6	36.2	74.0	-37.8	Peak	Vertical
	4799.5	36.7	4.0	40.7	74.0	-33.3	Peak	Vertical
39	3847.5	35.8	0.2	36.0	74.0	-38.0	Peak	Horizontal
	4213.0	34.9	1.5	36.4	74.0	-37.6	Peak	Horizontal
	4884.5	38.1	3.7	41.8	74.0	-32.2	Peak	Horizontal
	3864.5	35.1	0.2	35.3	74.0	-38.7	Peak	Vertical
	4221.5	35.3	1.5	36.8	74.0	-37.2	Peak	Vertical
	4884.5	36.3	3.7	40.0	74.0	-34.0	Peak	Vertical
78	3830.5	35.6	0.2	35.8	74.0	-38.2	Peak	Horizontal
	4136.5	34.8	1.2	36.0	74.0	-38.0	Peak	Horizontal
	4961.0	39.0	3.6	42.6	74.0	-31.4	Peak	Horizontal
	3856.0	35.9	0.2	36.1	74.0	-37.9	Peak	Vertical
	4264.0	36.9	1.8	38.7	74.0	-35.3	Peak	Vertical
	4961.0	38.2	3.6	41.8	74.0	-32.2	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor ((dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2022/02/24	Test Mode:	2DH5
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	3975.0	36.6	0.6	37.2	74.0	-36.8	Peak	Horizontal
	4136.5	35.3	1.2	36.5	74.0	-37.5	Peak	Horizontal
	4808.0	35.6	4.0	39.6	74.0	-34.4	Peak	Horizontal
	3788.0	36.1	0.1	36.2	74.0	-37.8	Peak	Vertical
	4051.5	35.2	0.8	36.0	74.0	-38.0	Peak	Vertical
	4672.0	34.0	3.4	37.4	74.0	-36.6	Peak	Vertical
39	3652.0	36.2	0.0	36.2	74.0	-37.8	Peak	Horizontal
	4349.0	34.8	2.2	37.0	74.0	-37.0	Peak	Horizontal
	4961.0	34.8	3.6	38.4	74.0	-35.6	Peak	Horizontal
	3677.5	36.5	-0.2	36.3	74.0	-37.7	Peak	Vertical
	4264.0	36.5	1.8	38.3	74.0	-35.7	Peak	Vertical
	4961.0	34.8	3.6	38.4	74.0	-35.6	Peak	Vertical
78	3915.5	35.2	0.3	35.5	74.0	-38.5	Peak	Horizontal
	4281.0	34.1	1.9	36.0	74.0	-38.0	Peak	Horizontal
	4961.0	35.4	3.6	39.0	74.0	-35.0	Peak	Horizontal
	4136.5	36.3	1.2	37.5	74.0	-36.5	Peak	Vertical
	4323.5	35.3	2.1	37.4	74.0	-36.6	Peak	Vertical
	4961.0	35.8	3.6	39.4	74.0	-34.6	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor ((dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2022/02/24	Test Mode:	3DH5
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		


Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	3949.5	34.1	0.4	34.5	74.0	-39.5	Peak	Horizontal
	4349.0	35.0	2.2	37.2	74.0	-36.8	Peak	Horizontal
	4808.0	37.5	4.0	41.5	74.0	-32.5	Peak	Horizontal
	3677.5	36.5	-0.2	36.3	74.0	-37.7	Peak	Vertical
	4128.0	36.3	1.2	37.5	74.0	-36.5	Peak	Vertical
	4808.0	36.7	4.0	40.7	74.0	-33.3	Peak	Vertical
39	3932.5	35.1	0.3	35.4	74.0	-38.6	Peak	Horizontal
	4196.0	35.1	1.5	36.6	74.0	-37.4	Peak	Horizontal
	4884.5	35.8	3.7	39.5	74.0	-34.5	Peak	Horizontal
	3975.0	35.7	0.6	36.3	74.0	-37.7	Peak	Vertical
	4119.5	34.3	1.2	35.5	74.0	-38.5	Peak	Vertical
	4884.5	36.7	3.7	40.4	74.0	-33.6	Peak	Vertical
78	3754.0	35.4	0.0	35.4	74.0	-38.6	Peak	Horizontal
	4187.5	35.2	1.5	36.7	74.0	-37.3	Peak	Horizontal
	4961.0	36.8	3.6	40.4	74.0	-33.6	Peak	Horizontal
	3822.0	35.5	0.2	35.7	74.0	-38.3	Peak	Vertical
	4119.5	34.4	1.2	35.6	74.0	-38.4	Peak	Vertical
	4672.0	35.2	3.4	38.6	74.0	-35.4	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor ((dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Result of Radiated Emission below 1GHz:

Site: WZ-AC1	Test Date: 2022/02/22
Limit: FCC_Part15.209_RSE(3m)	Engineer: Kin Xia
Probe: WZ-AC1_VULB 9168 _30-1000MHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by DH5 at channel 2441MHz	

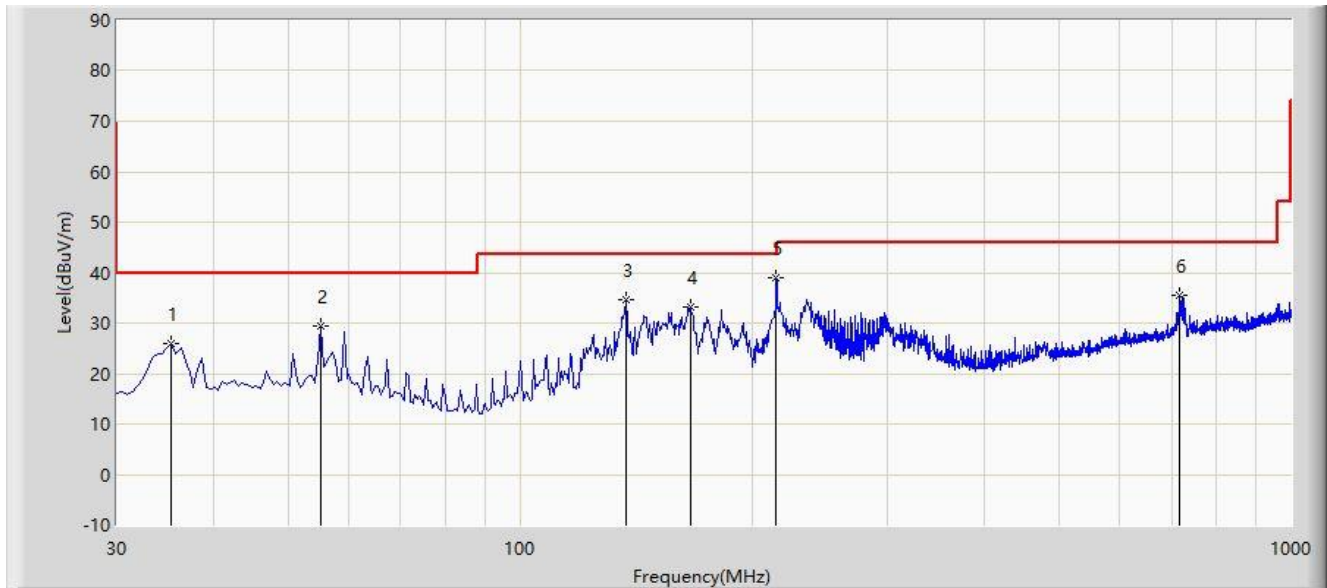

No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor	Type
1			35.335	26.037	8.956	-13.963	40.000	17.081	PK
2			55.220	29.535	11.359	-10.465	40.000	18.176	PK
3			137.185	34.690	17.525	-8.810	43.500	17.165	PK
4			166.285	33.208	15.402	-10.292	43.500	17.806	PK
5		*	214.785	39.091	24.648	-4.409	43.500	14.443	PK
6			716.760	35.563	8.380	-10.437	46.000	27.183	PK

Note 1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)


Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: QP measurement was not performed when peak measure level was lower than the QP limit.

Note 3: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

Site: WZ-AC1	Test Date: 2022/02/22
Limit: FCC_Part15.209_RSE(3m)	Engineer: Kin Xia
Probe: WZ-AC1_VULB 9168 _30-1000MHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by DH5 at channel 2441MHz	

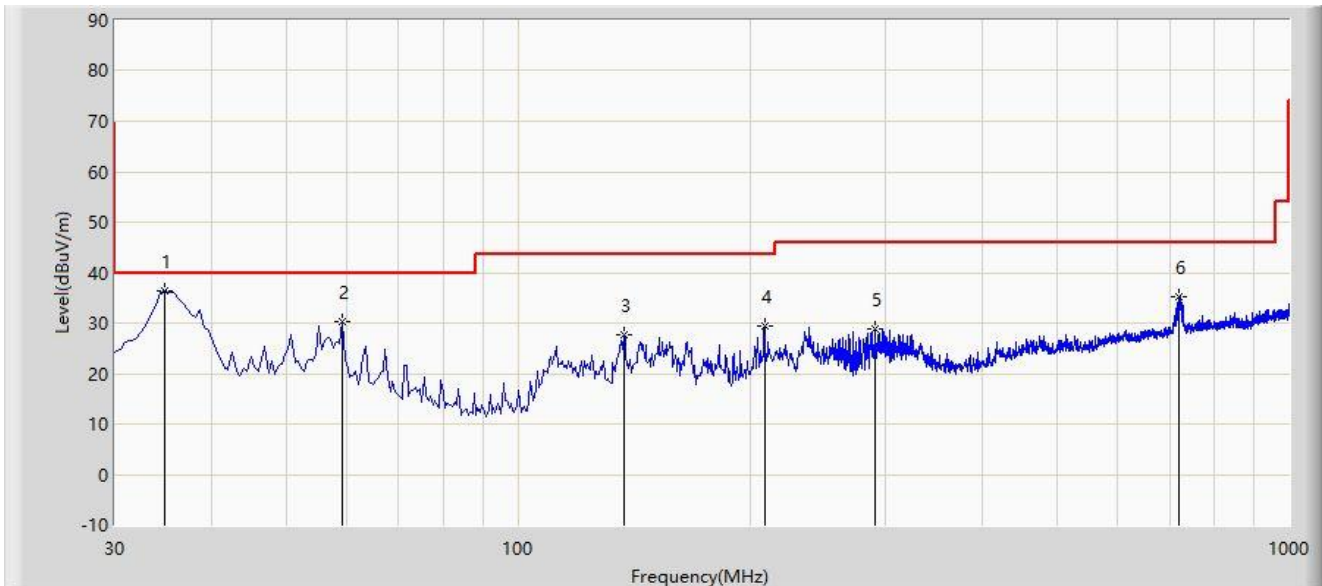

No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor	Type
1		*	34.850	36.503	19.485	-3.497	40.000	17.018	PK
2			59.100	30.160	12.352	-9.840	40.000	17.808	PK
3			137.185	27.657	10.492	-15.843	43.500	17.165	PK
4			208.965	29.441	15.102	-14.059	43.500	14.339	PK
5			290.930	28.832	10.961	-17.168	46.000	17.871	PK
6			720.155	35.354	8.167	-10.646	46.000	27.187	PK

Note 1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)


Note 2: QP measurement was not performed when peak measure level was lower than the QP limit.

Note 3: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

A.10 Radiated Restricted Band Edge Test Result

Site: WZ-AC1	Test Date: 2022/01/28 - 18:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by BT DH5 at Channel 2402MHz - BT 0	

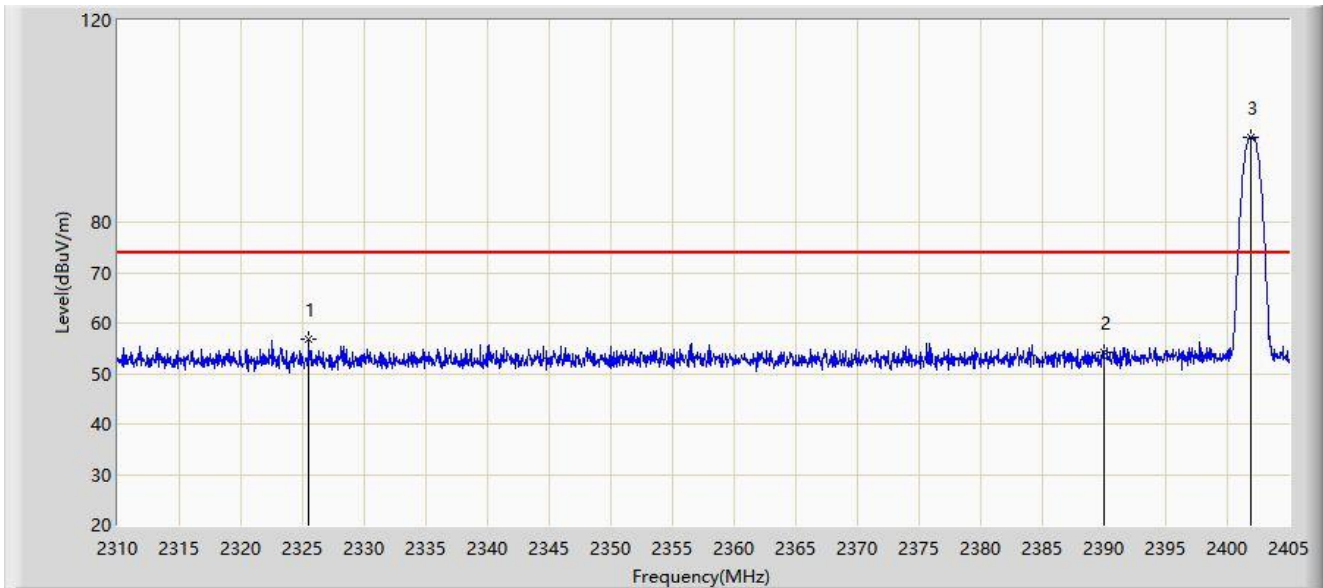


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			2325.532	56.787	25.963	-17.213	74.000	30.824	PK
2			2390.000	54.118	23.302	-19.882	74.000	30.816	PK
3		*	2401.913	96.876	66.037	N/A	N/A	30.839	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022/01/28 - 18:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by BT DH5 at Channel 2402MHz - BT 0	

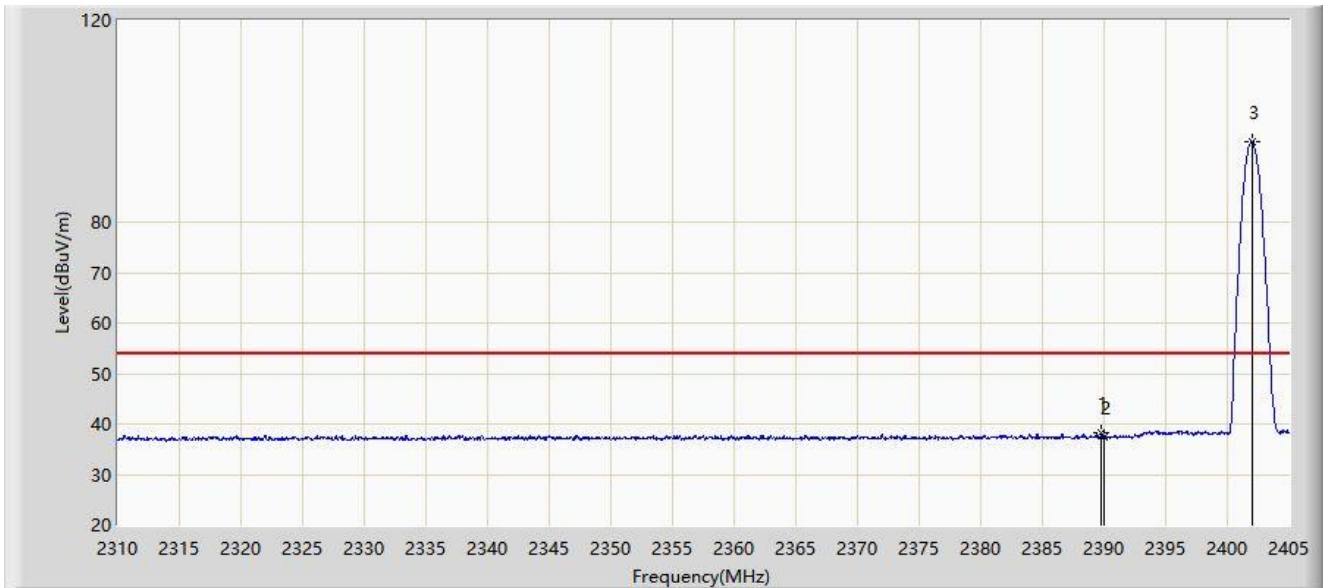


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			2389.800	38.297	7.482	-15.703	54.000	30.815	AV
2			2390.000	37.481	6.665	-16.519	54.000	30.816	AV
3		*	2402.008	95.981	65.142	N/A	N/A	30.839	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022/01/28 - 18:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by BT DH5 at Channel 2402MHz - BT 0	

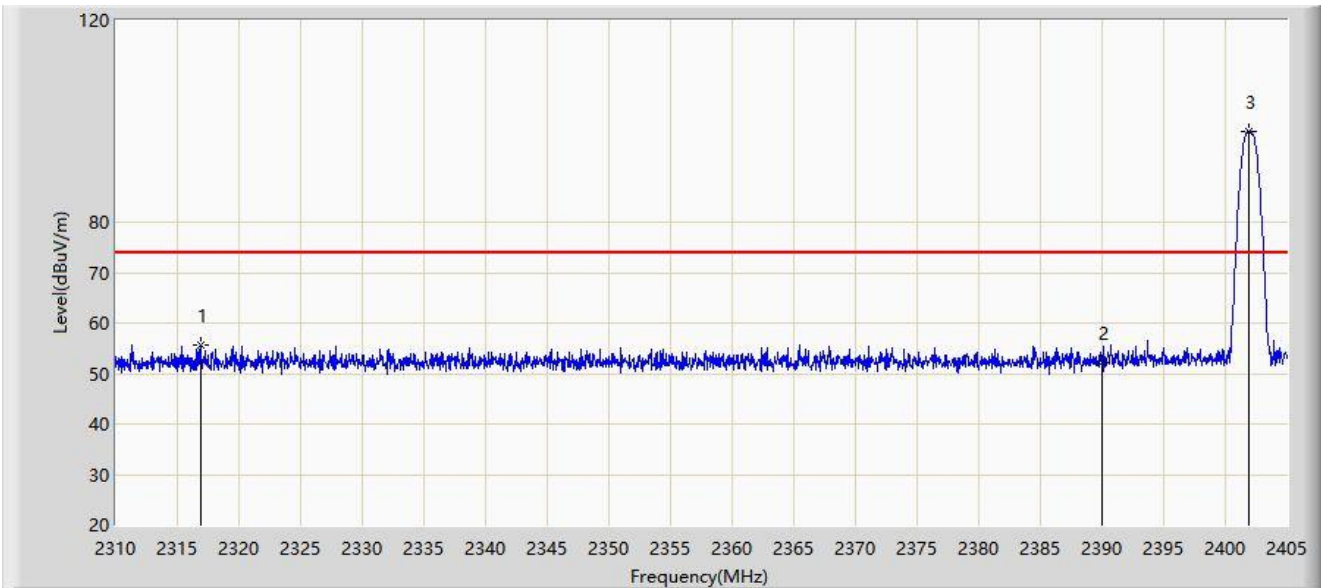


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			2316.887	55.644	24.827	-18.356	74.000	30.817	PK
2			2390.000	52.317	21.501	-21.683	74.000	30.816	PK
3		*	2401.865	97.981	67.142	N/A	N/A	30.839	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022/01/28 - 18:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by BT DH5 at Channel 2402MHz - BT 0	

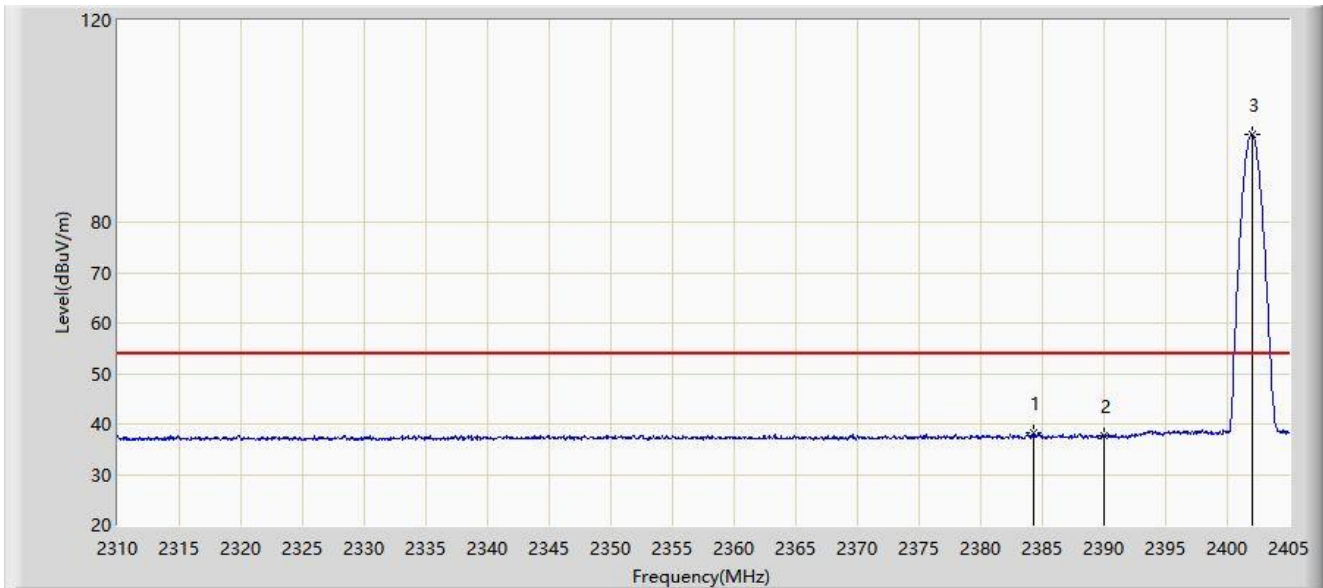


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			2384.242	38.163	7.353	-15.837	54.000	30.809	AV
2			2390.000	37.598	6.782	-16.402	54.000	30.816	AV
3		*	2402.008	97.310	66.471	N/A	N/A	30.839	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022/01/28 - 18:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by BT DH5 at Channel 2480MHz - BT 0	

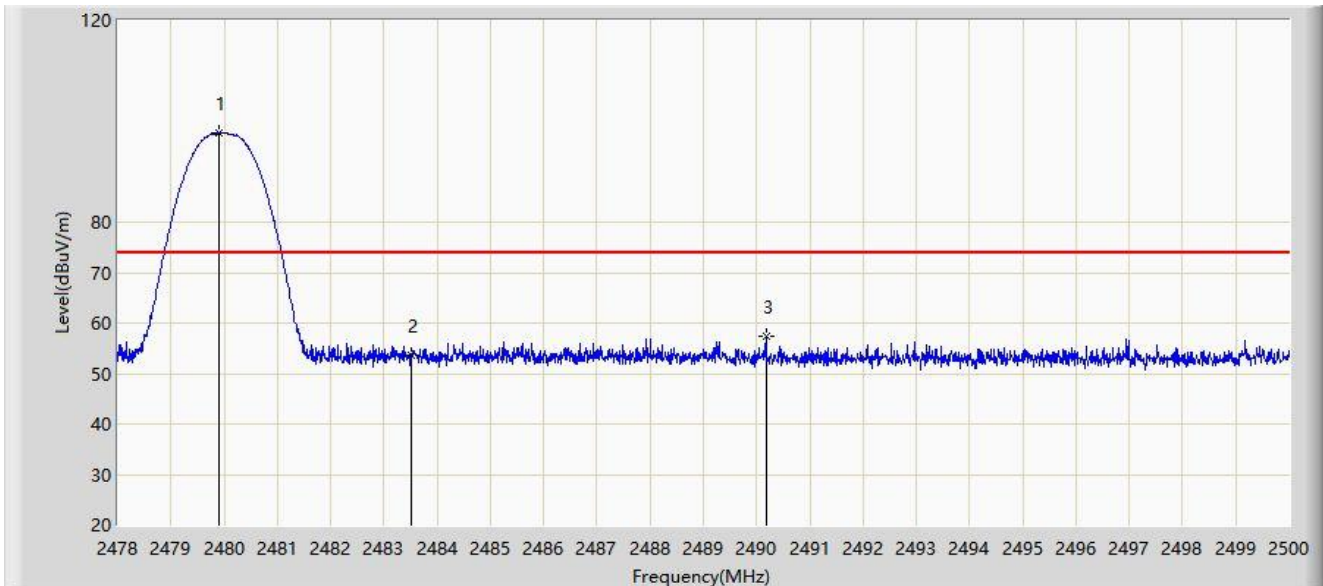


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	2479.914	97.667	66.662	N/A	N/A	31.005	PK
2			2483.500	53.544	22.523	-20.456	74.000	31.021	PK
3			2490.177	57.354	26.305	-16.646	74.000	31.049	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022/01/28 - 18:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by BT DH5 at Channel 2480MHz - BT 0	

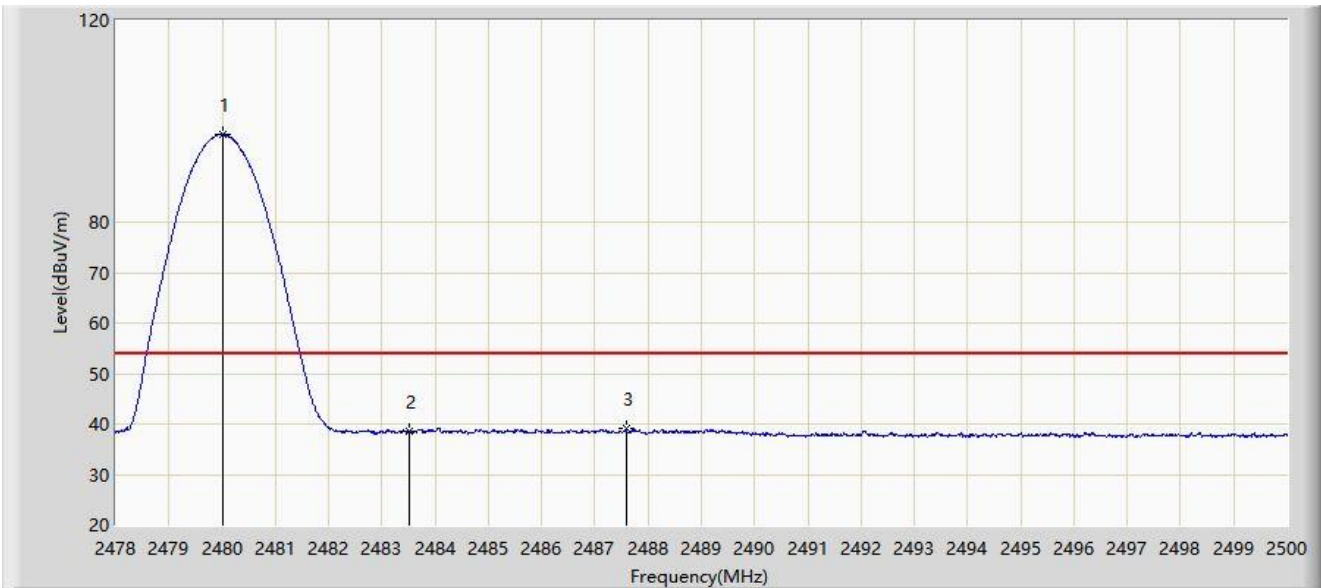


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		*	2480.024	97.352	66.346	N/A	N/A	31.006	AV
2			2483.500	38.460	7.439	-15.540	54.000	31.021	AV
3			2487.581	39.003	7.965	-14.997	54.000	31.038	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022/01/28 - 18:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by BT DH5 at Channel 2480MHz - BT 0	

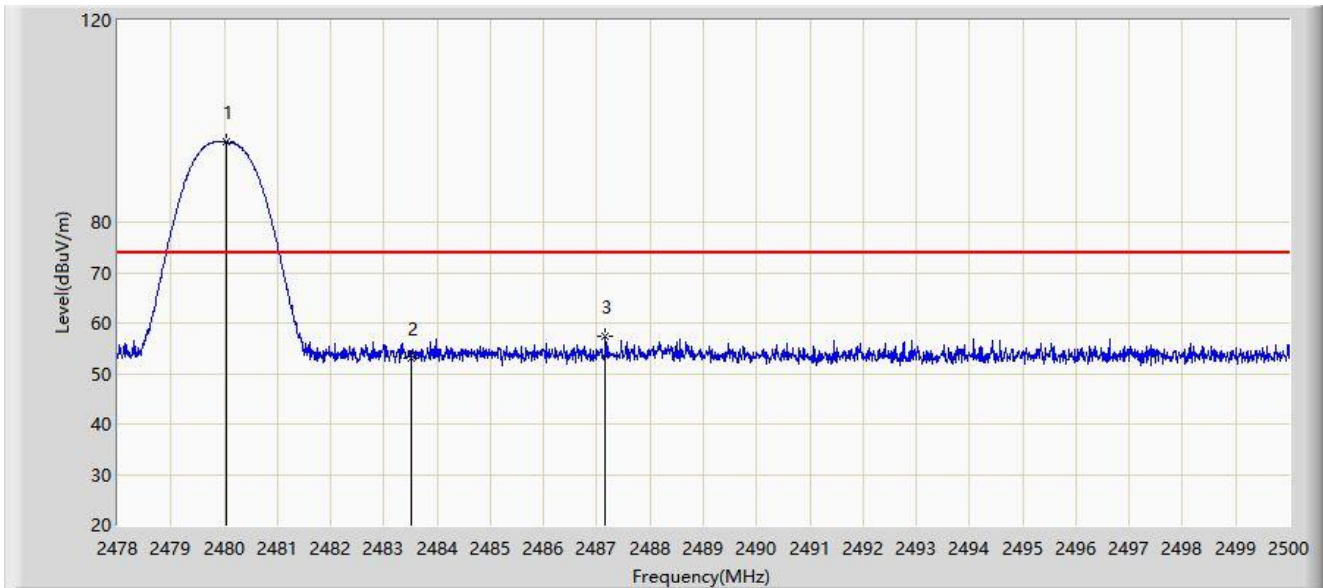


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		*	2480.035	95.924	64.918	N/A	N/A	31.006	PK
2			2483.500	53.012	21.991	-20.988	74.000	31.021	PK
3			2487.152	57.396	26.360	-16.604	74.000	31.036	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022/01/28 - 18:50
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by BT DH5 at Channel 2480MHz - BT 0	

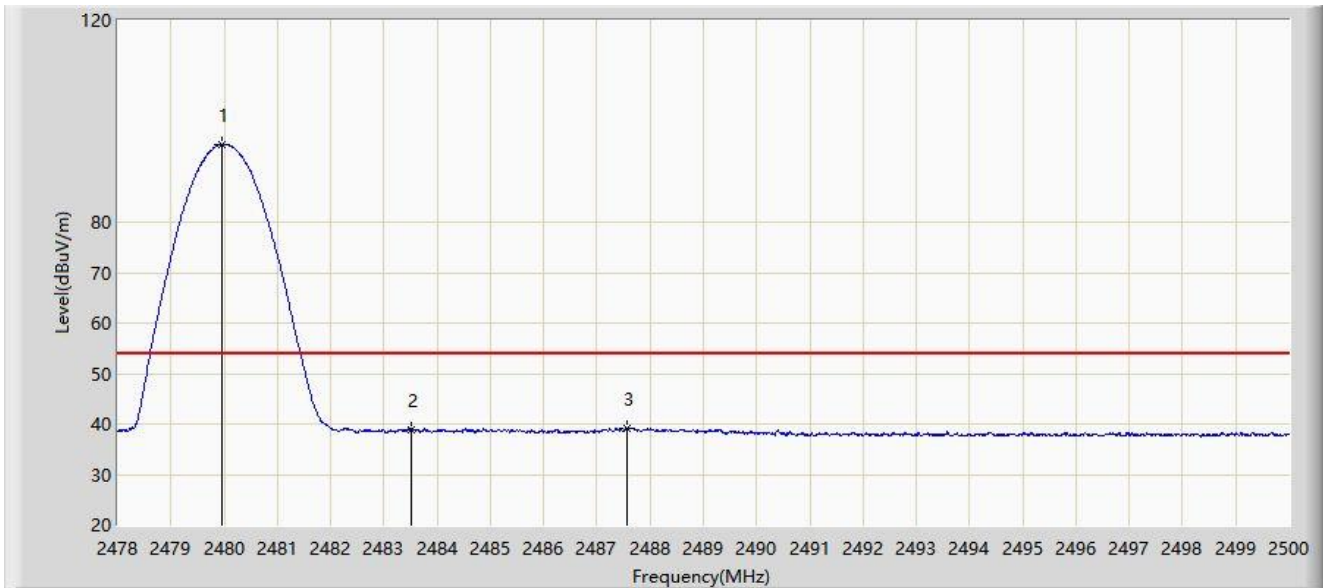


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		*	2479.969	95.463	64.457	N/A	N/A	31.005	AV
2			2483.500	38.983	7.962	-15.017	54.000	31.021	AV
3			2487.559	39.238	8.200	-14.762	54.000	31.038	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022/01/28 - 19:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by BT 2DH5 at Channel 2402MHz - BT 0	

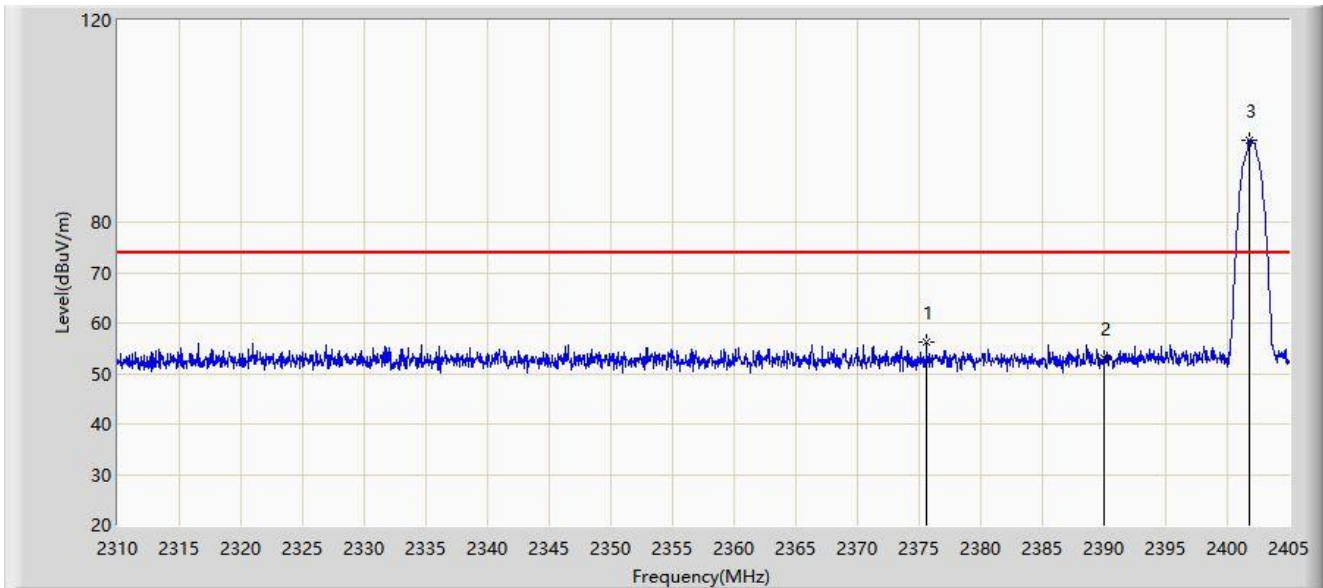


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			2375.597	56.123	25.324	-17.877	74.000	30.799	PK
2			2390.000	53.061	22.245	-20.939	74.000	30.816	PK
3		*	2401.770	96.258	65.419	N/A	N/A	30.839	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022/01/28 - 19:02
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by BT 2DH5 at Channel 2402MHz - BT 0	

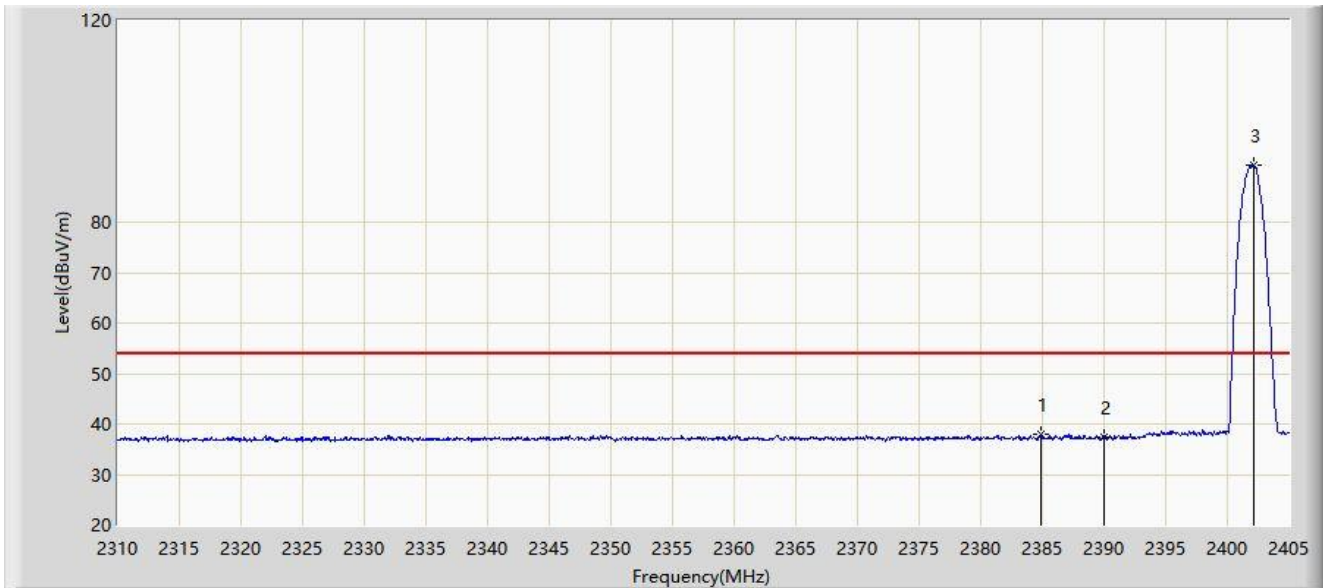


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			2384.860	38.028	7.218	-15.972	54.000	30.810	AV
2			2390.000	37.318	6.502	-16.682	54.000	30.816	AV
3		*	2402.103	91.320	60.481	N/A	N/A	30.839	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022/01/28 - 19:04
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by BT 2DH5 at Channel 2402MHz - BT 0	

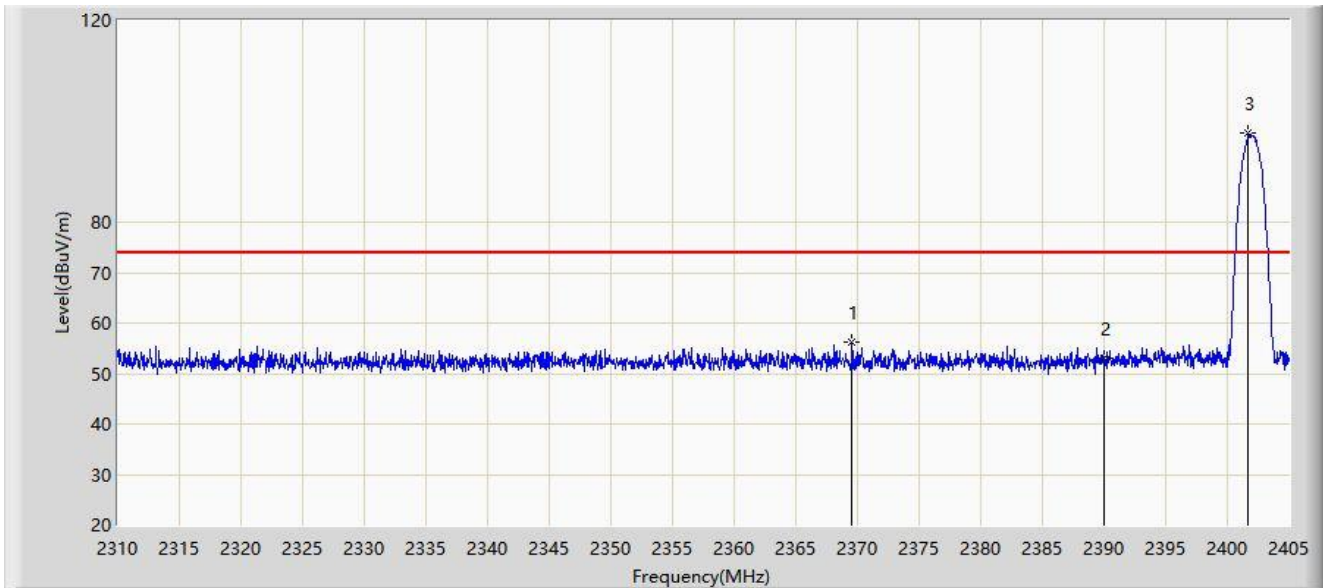


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			2369.565	56.090	25.300	-17.910	74.000	30.790	PK
2			2390.000	53.017	22.201	-20.983	74.000	30.816	PK
3		*	2401.722	97.732	66.894	N/A	N/A	30.838	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022/01/28 - 19:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by BT 2DH5 at Channel 2402MHz - BT 0	

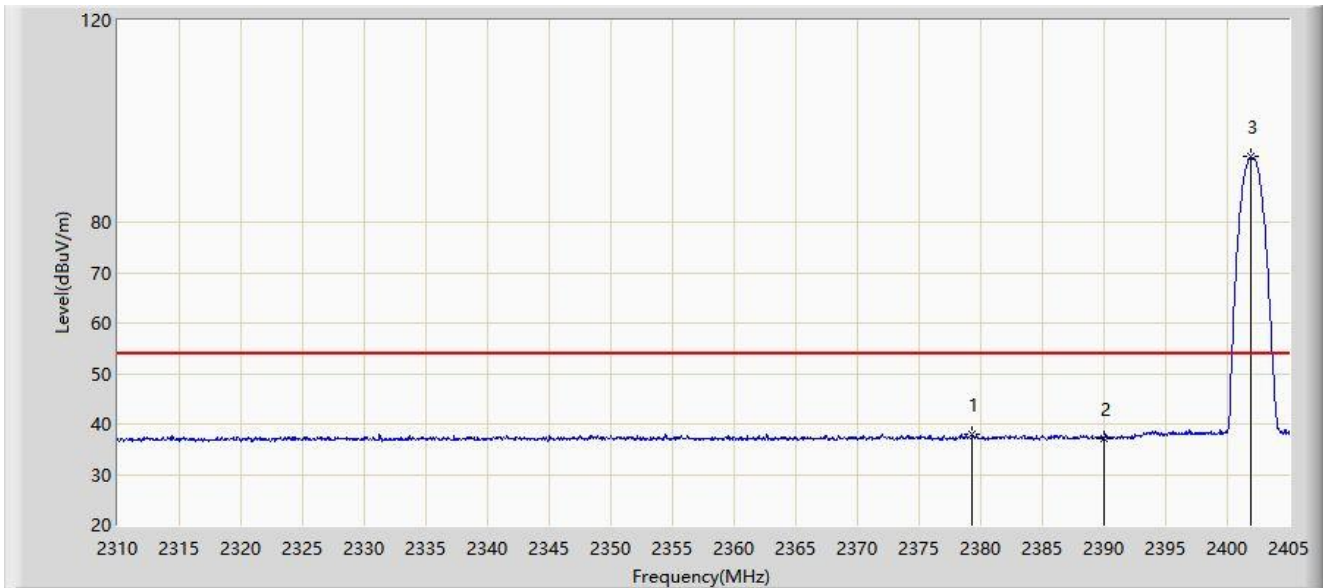


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2379.302	37.945	7.141	-16.055	54.000	30.804	AV
2			2390.000	37.244	6.428	-16.756	54.000	30.816	AV
3		*	2401.865	93.025	62.186	N/A	N/A	30.839	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022/01/28 - 18:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by BT 2DH5 at Channel 2480MHz - BT 0	

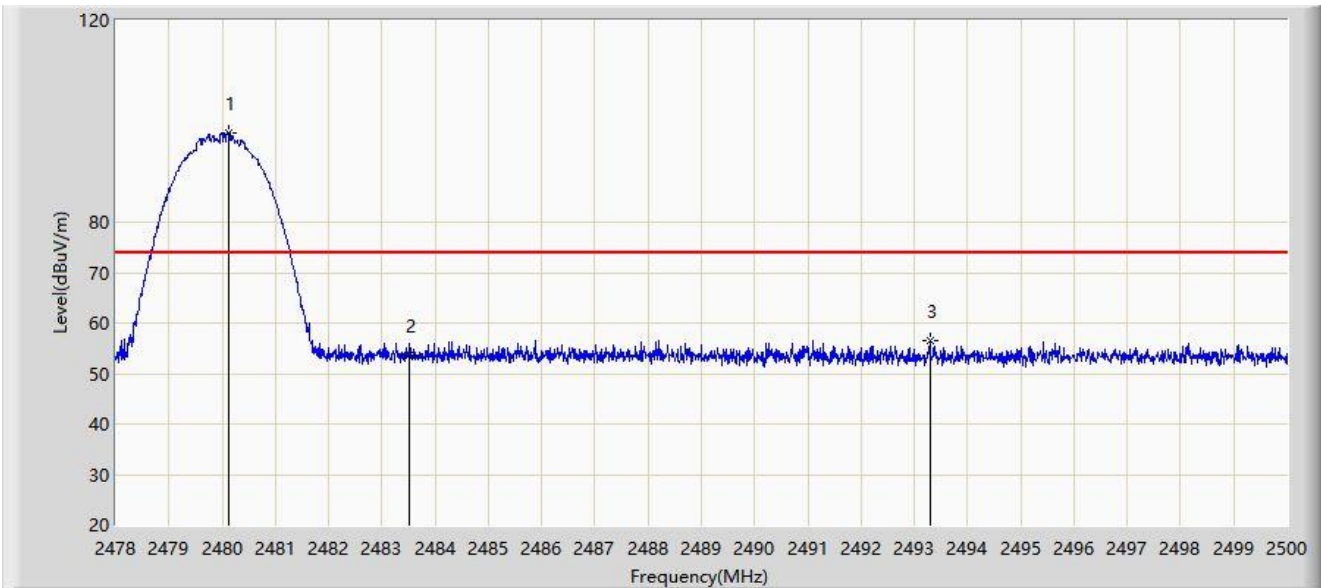


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	2480.112	97.720	66.714	N/A	N/A	31.007	PK
2			2483.500	53.501	22.480	-20.499	74.000	31.021	PK
3			2493.290	56.489	25.429	-17.511	74.000	31.061	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022/01/28 - 18:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by BT 2DH5 at Channel 2480MHz - BT 0	

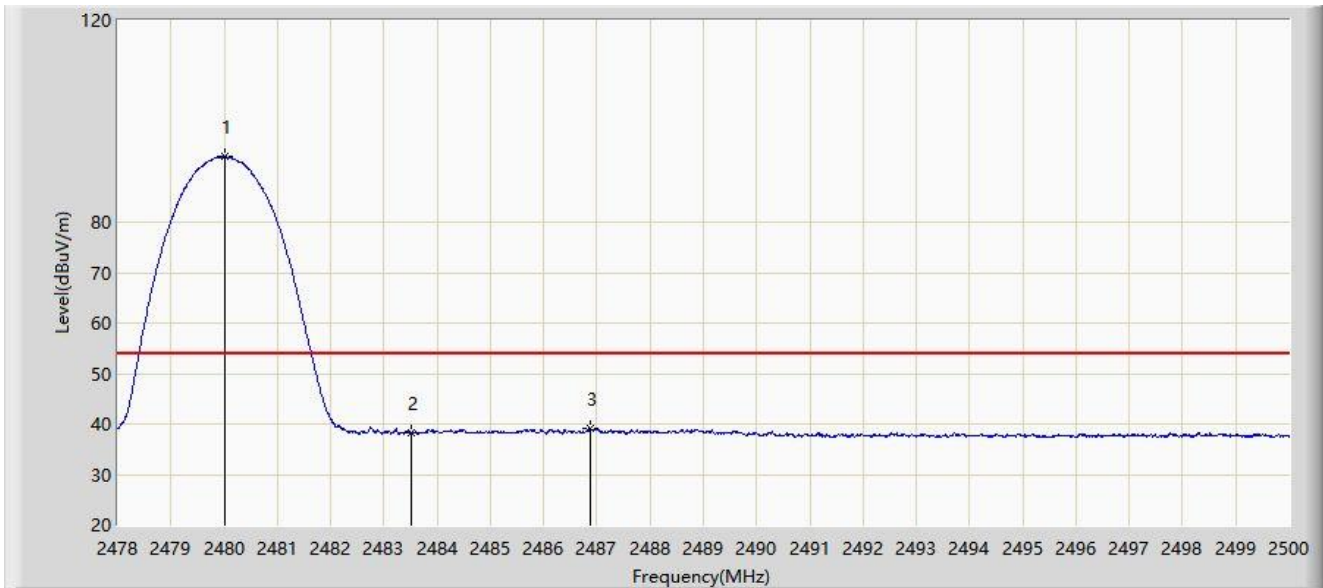


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	2480.024	92.911	61.905	N/A	N/A	31.006	AV
2			2483.500	38.118	7.097	-15.882	54.000	31.021	AV
3			2486.866	39.250	8.215	-14.750	54.000	31.035	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022/01/28 - 18:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by BT 2DH5 at Channel 2480MHz - BT 0	

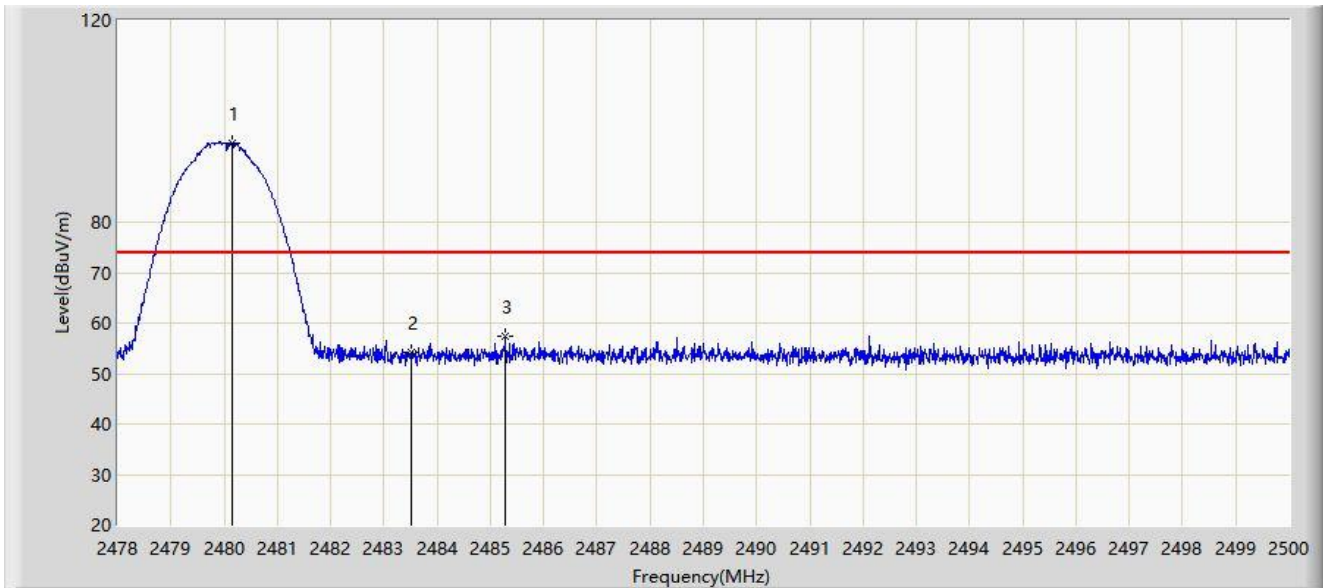


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		*	2480.145	95.792	64.786	N/A	N/A	31.007	PK
2			2483.500	54.217	23.196	-19.783	74.000	31.021	PK
3			2485.282	57.471	26.443	-16.529	74.000	31.028	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022/01/28 - 18:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by BT 2DH5 at Channel 2480MHz - BT 0	

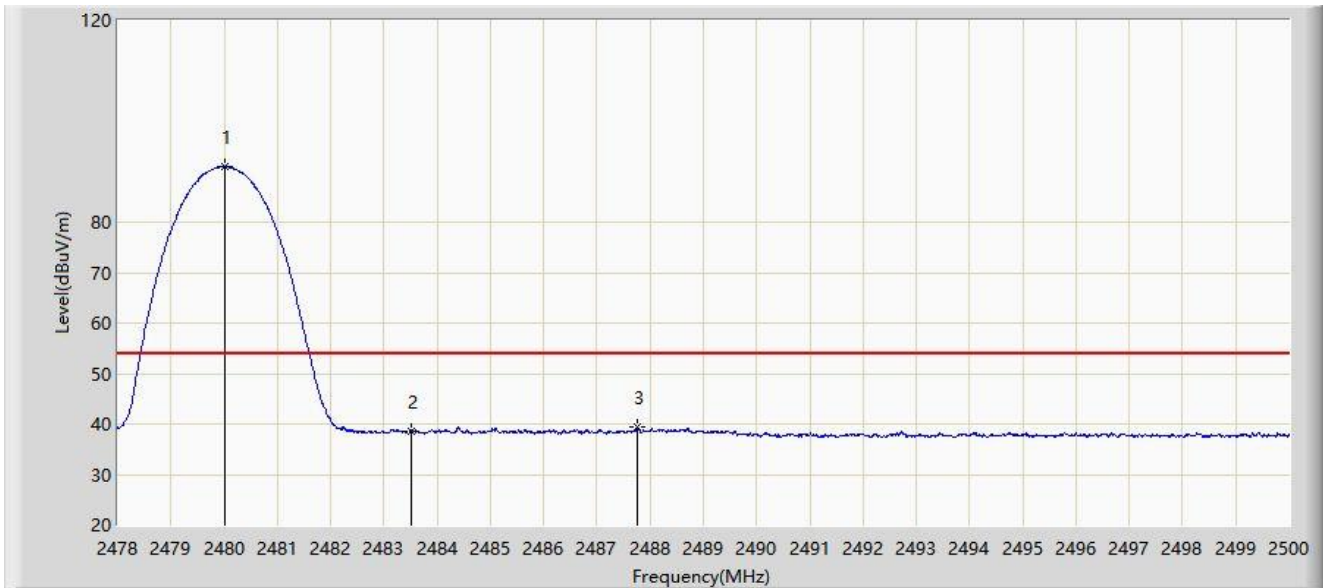


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	2480.002	91.025	60.019	N/A	N/A	31.006	AV
2			2483.500	38.492	7.471	-15.508	54.000	31.021	AV
3			2487.757	39.434	8.395	-14.566	54.000	31.039	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022/01/28 - 19:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by BT 3DH5 at Channel 2402MHz - BT 0	

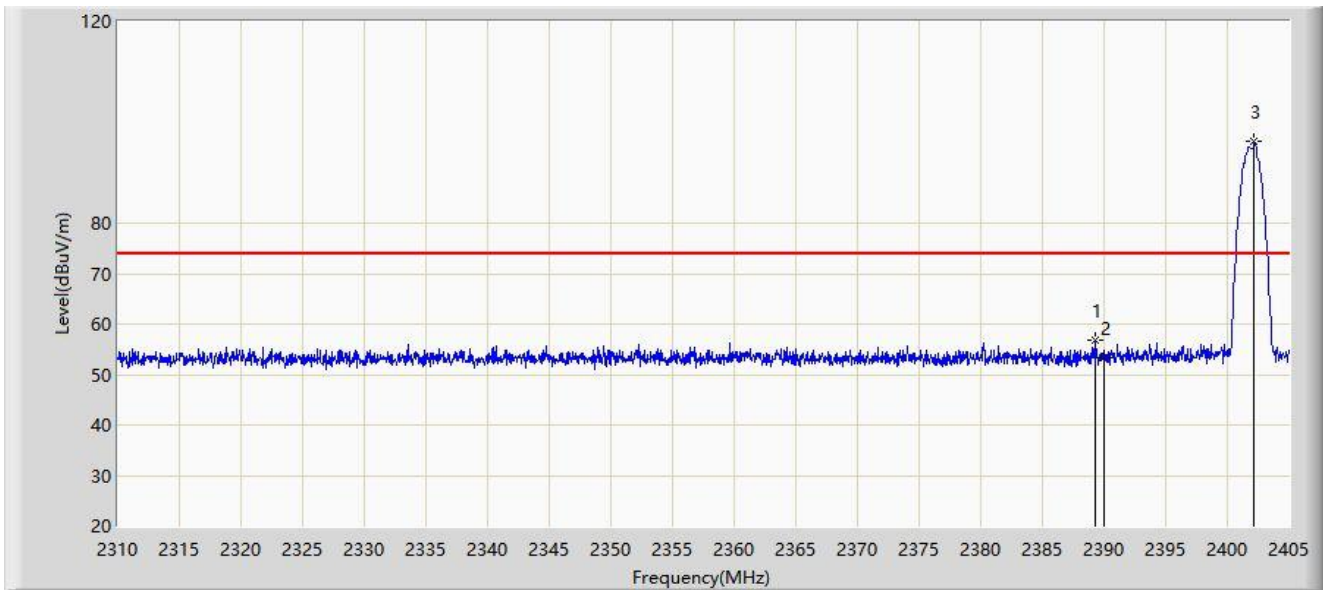


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			2389.230	56.954	26.139	-17.046	74.000	30.815	PK
2			2390.000	53.246	22.430	-20.754	74.000	30.816	PK
3		*	2402.150	96.163	65.324	N/A	N/A	30.839	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022/01/28 - 19:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by BT 3DH5 at Channel 2402MHz - BT 0	

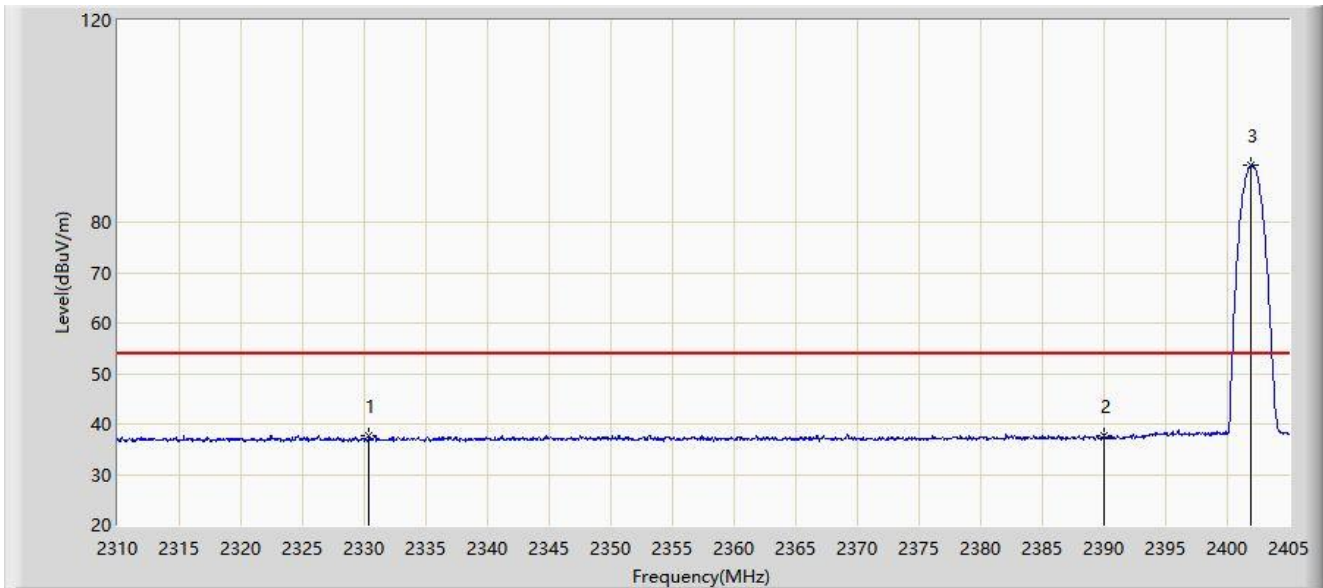


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			2330.377	37.767	6.939	-16.233	54.000	30.828	AV
2			2390.000	37.560	6.744	-16.440	54.000	30.816	AV
3		*	2401.960	91.216	60.377	N/A	N/A	30.839	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022/01/28 - 19:13
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by BT 3DH5 at Channel 2402MHz - BT 0	

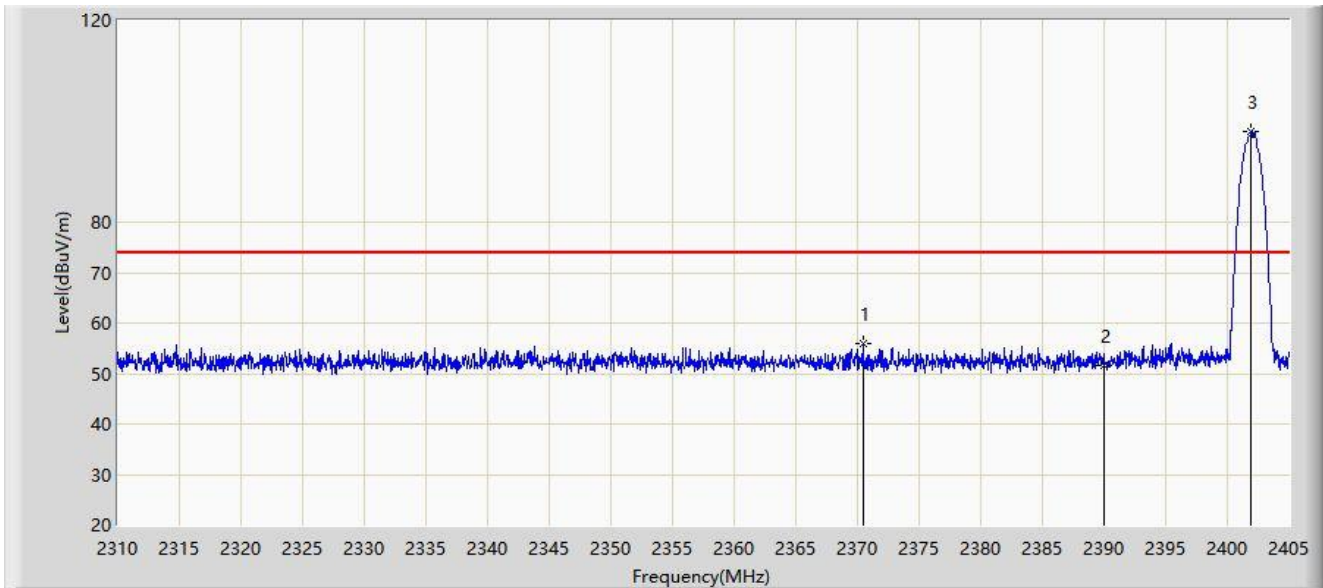


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			2370.420	55.990	25.199	-18.010	74.000	30.791	PK
2			2390.000	51.653	20.837	-22.347	74.000	30.816	PK
3		*	2401.913	97.944	67.105	N/A	N/A	30.839	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022/01/28 - 19:14
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by BT 3DH5 at Channel 2402MHz - BT 0	

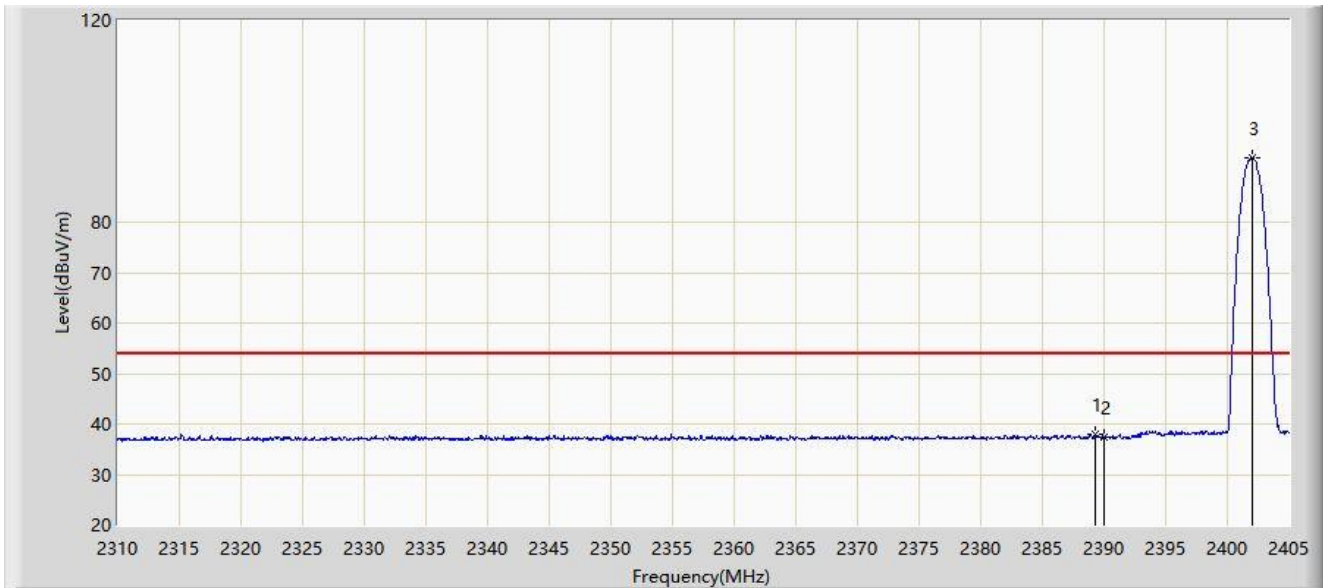


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			2389.278	37.962	7.147	-16.038	54.000	30.815	AV
2			2390.000	37.379	6.563	-16.621	54.000	30.816	AV
3		*	2402.008	92.850	62.011	N/A	N/A	30.839	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022/01/28 - 19:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by BT 3DH5 at Channel 2480MHz - BT 0	

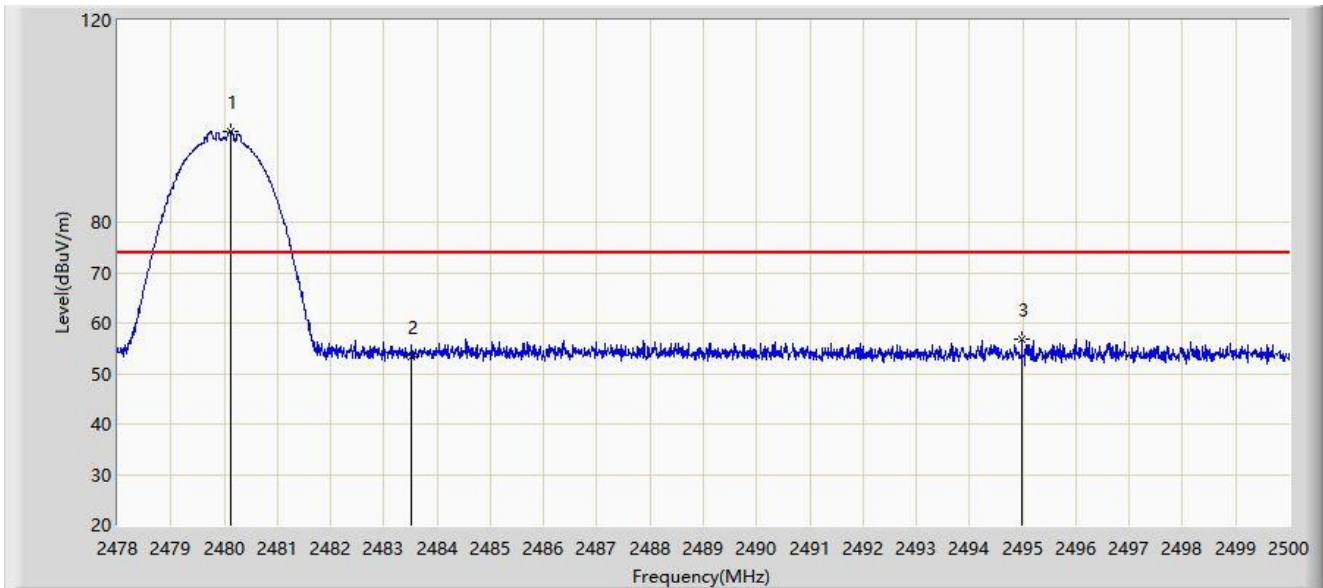


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	2480.123	97.986	66.980	N/A	N/A	31.007	PK
2			2483.500	53.253	22.232	-20.747	74.000	31.021	PK
3			2494.984	56.889	25.824	-17.111	74.000	31.065	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022/01/28 - 19:22
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by BT 3DH5 at Channel 2480MHz - BT 0	

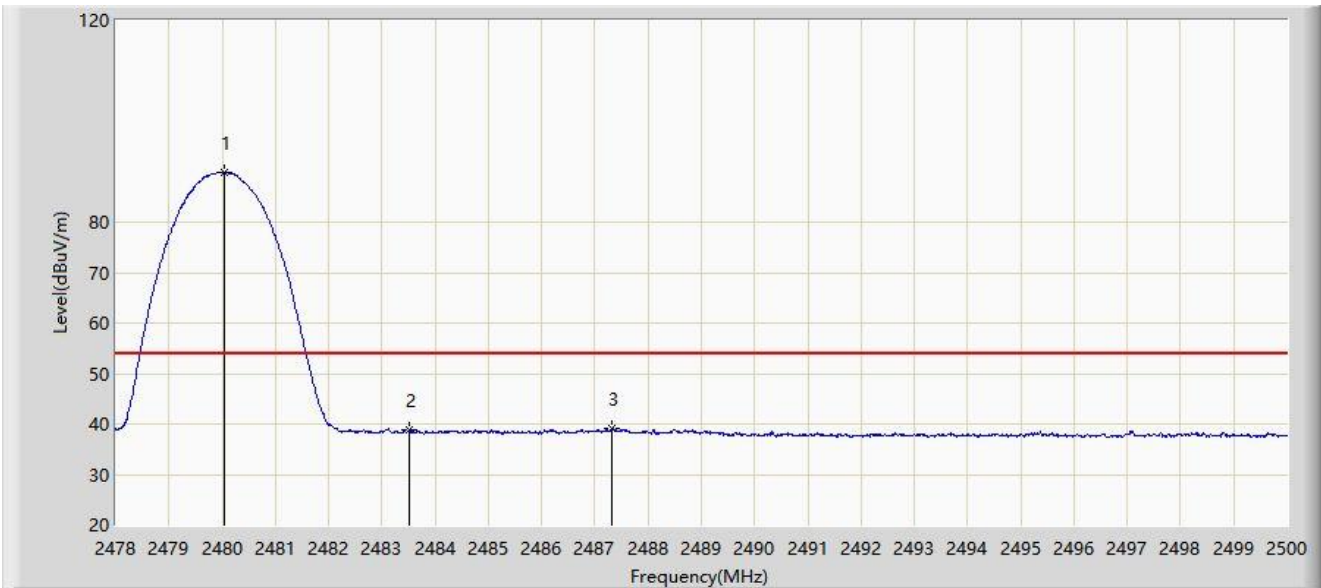


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	2480.035	89.881	58.875	N/A	N/A	31.006	AV
2			2483.500	38.724	7.703	-15.276	54.000	31.021	AV
3			2487.317	39.048	8.011	-14.952	54.000	31.037	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022/01/28 - 19:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by BT 3DH5 at Channel 2480MHz - BT 0	

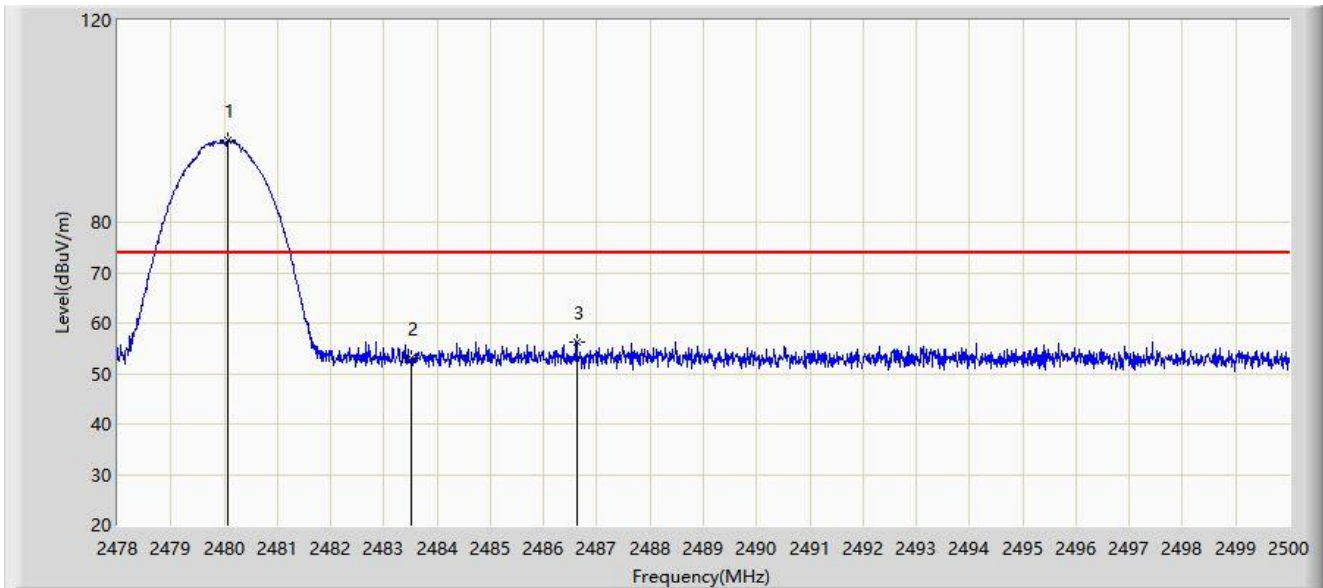


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		*	2480.068	96.098	65.092	N/A	N/A	31.007	PK
2			2483.500	52.983	21.962	-21.017	74.000	31.021	PK
3			2486.624	56.298	25.264	-17.702	74.000	31.034	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022/01/28 - 19:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by BT 3DH5 at Channel 2480MHz - BT 0	

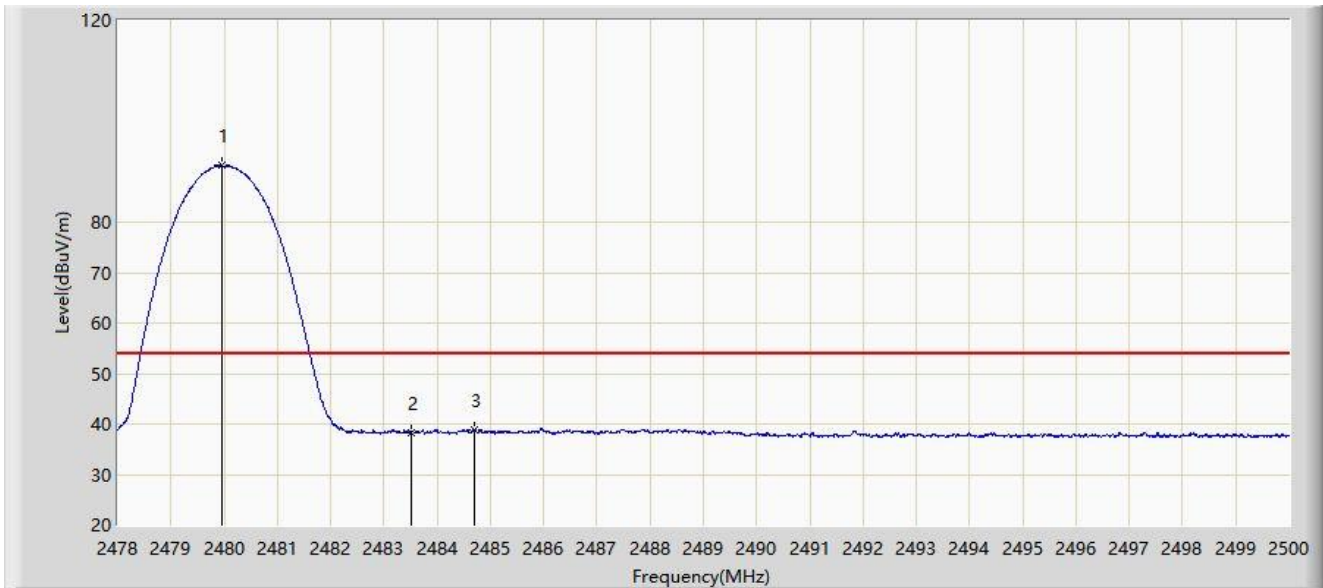


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	2479.969	91.258	60.252	N/A	N/A	31.005	AV
2			2483.500	38.385	7.364	-15.615	54.000	31.021	AV
3			2484.699	38.802	7.776	-15.198	54.000	31.025	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022/01/28 - 20:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by BT DH5 at Channel 2402MHz - BT 1	

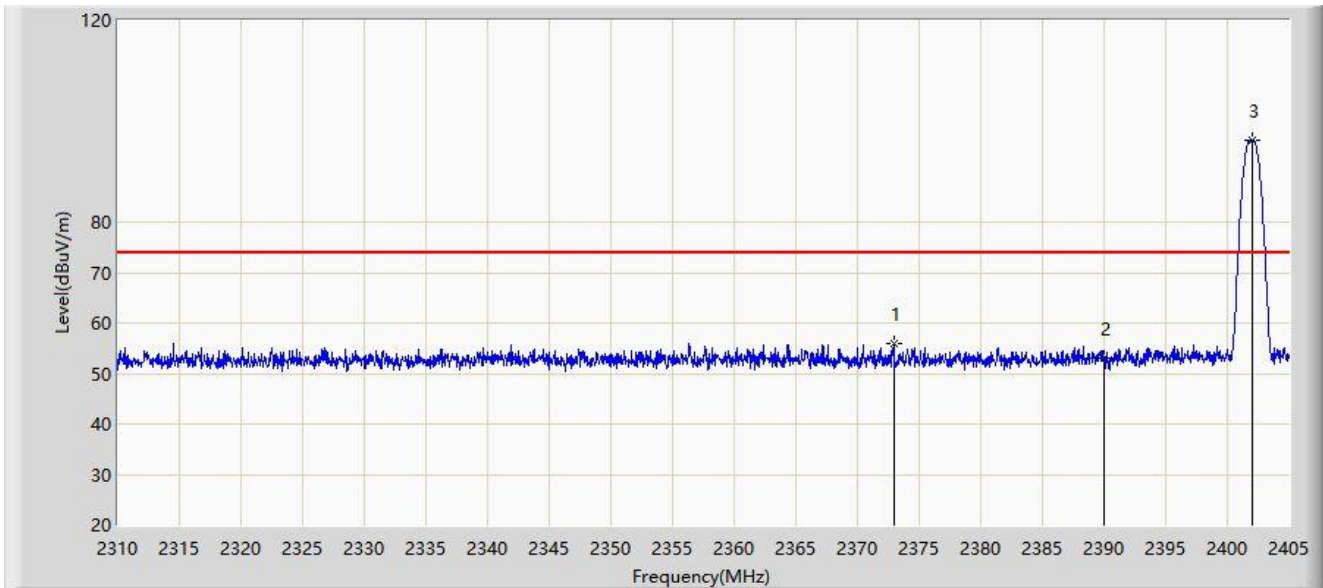


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			2372.937	55.831	25.036	-18.169	74.000	30.795	PK
2			2390.000	52.934	22.118	-21.066	74.000	30.816	PK
3		*	2402.055	96.267	65.428	N/A	N/A	30.839	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022/01/28 - 20:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by BT DH5 at Channel 2402MHz - BT 1	

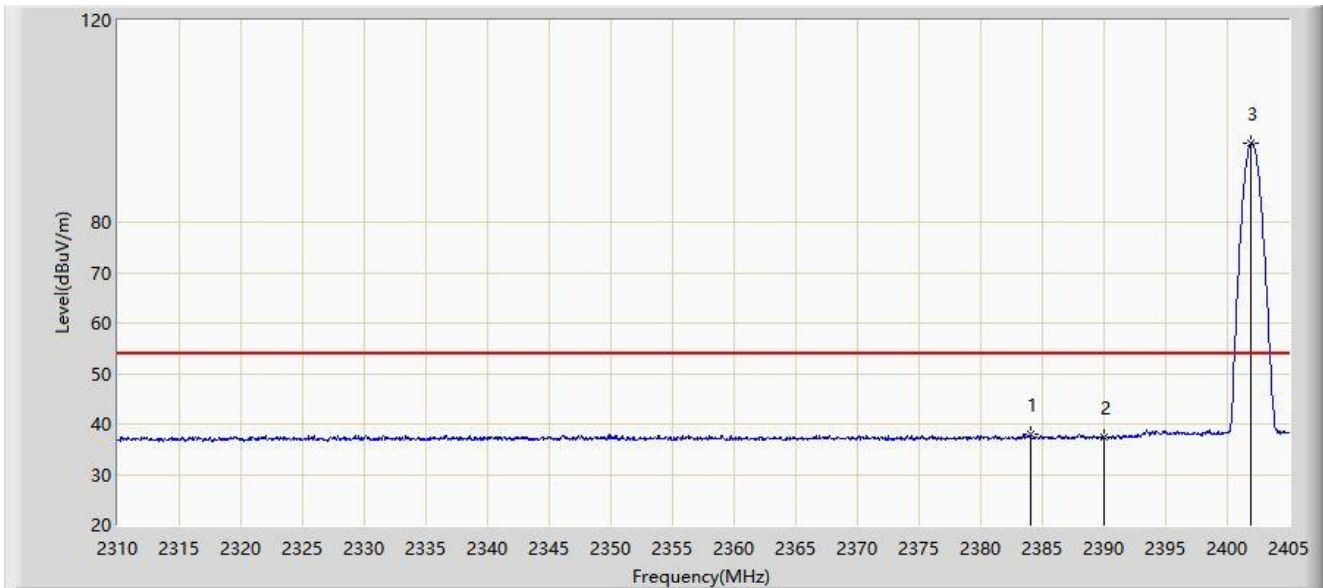


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			2384.005	37.878	7.068	-16.122	54.000	30.810	AV
2			2390.000	37.494	6.678	-16.506	54.000	30.816	AV
3		*	2401.960	95.661	64.822	N/A	N/A	30.839	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022/01/28 - 20:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by BT DH5 at Channel 2402MHz - BT 1	

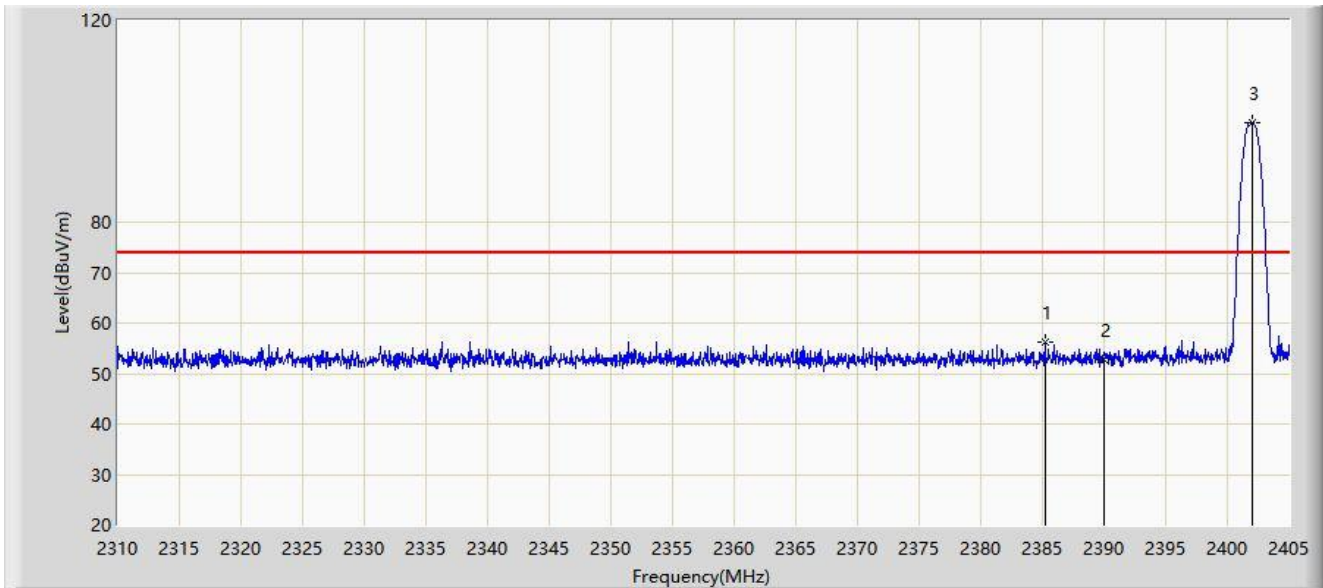


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1			2385.192	56.238	25.427	-17.762	74.000	30.811	PK
2			2390.000	52.680	21.864	-21.320	74.000	30.816	PK
3		*	2402.008	99.798	68.959	N/A	N/A	30.839	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022/01/28 - 20:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by BT DH5 at Channel 2402MHz - BT 1	

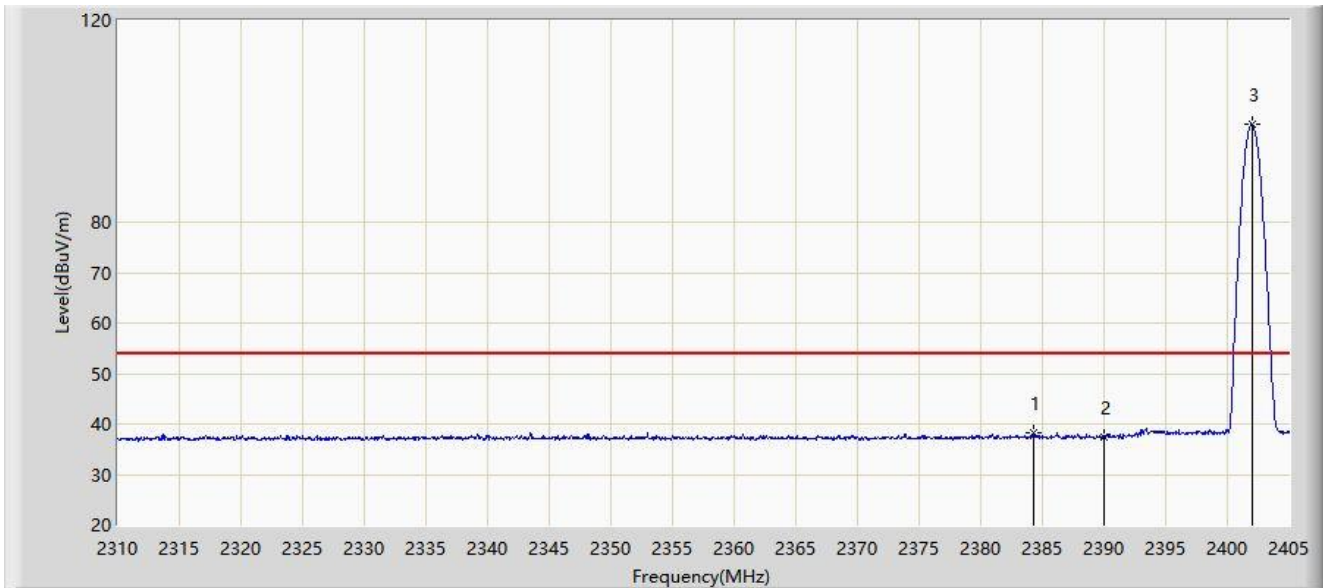


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			2384.290	38.231	7.421	-15.769	54.000	30.809	AV
2			2390.000	37.533	6.717	-16.467	54.000	30.816	AV
3		*	2402.008	99.330	68.491	N/A	N/A	30.839	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022/01/28 - 19:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by BT DH5 at Channel 2480MHz - BT 1	

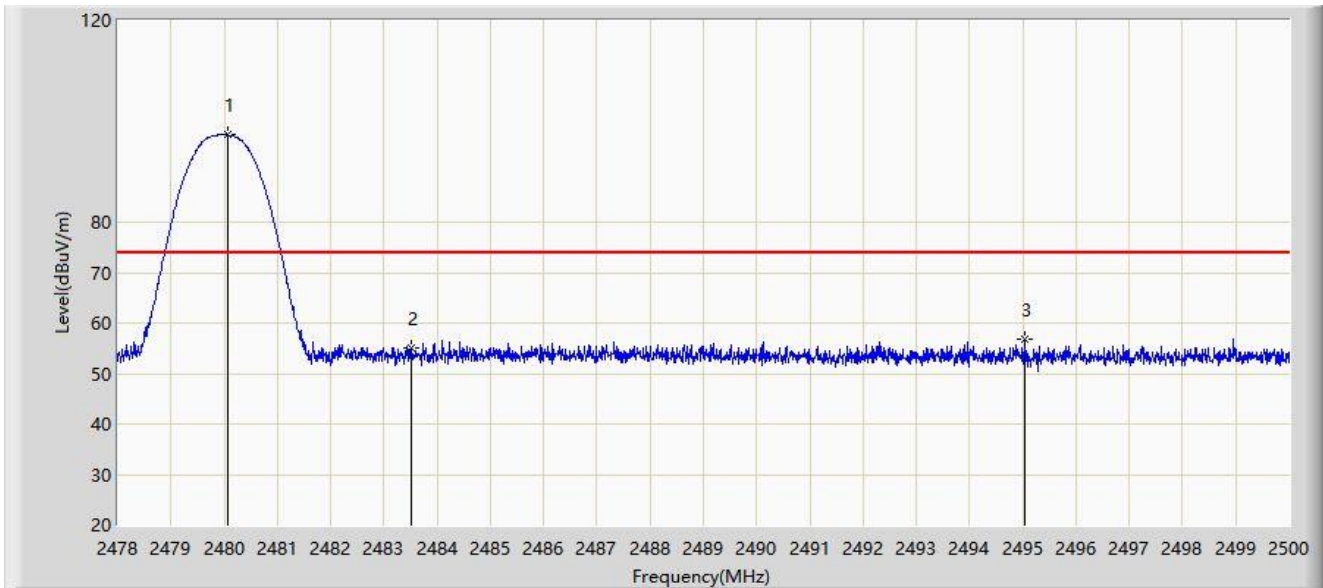


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		*	2480.057	97.338	66.332	N/A	N/A	31.006	PK
2			2483.500	55.010	23.989	-18.990	74.000	31.021	PK
3			2495.028	56.772	25.707	-17.228	74.000	31.065	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022/01/28 - 19:30
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by BT DH5 at Channel 2480MHz - BT 1	

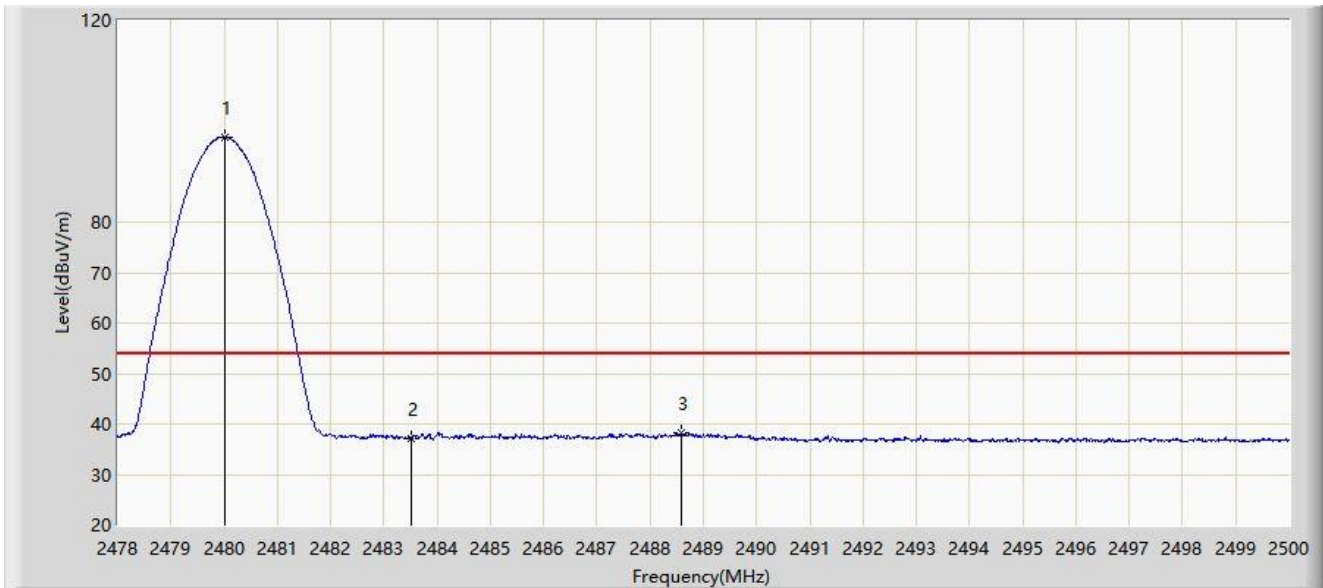


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	2480.002	96.880	65.874	N/A	N/A	31.006	AV
2			2483.500	37.230	6.209	-16.770	54.000	31.021	AV
3			2488.593	38.237	7.195	-15.763	54.000	31.043	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022/01/28 - 19:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by BT DH5 at Channel 2480MHz - BT 1	

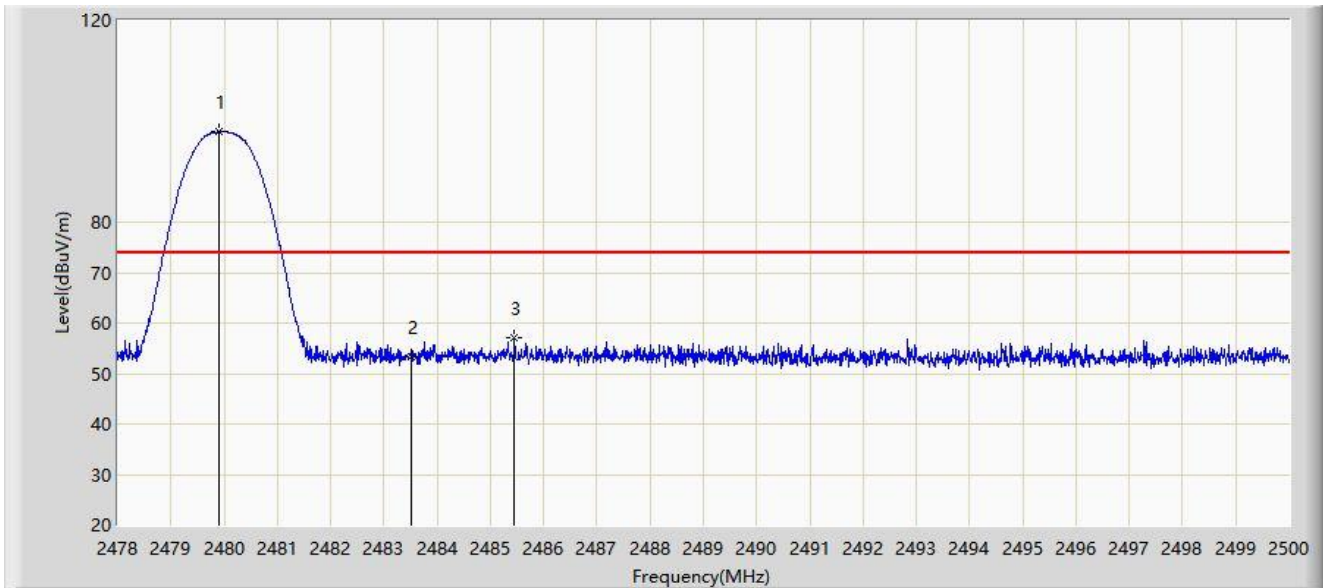


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		*	2479.903	97.910	66.905	N/A	N/A	31.005	PK
2			2483.500	53.463	22.442	-20.537	74.000	31.021	PK
3			2485.447	57.163	26.134	-16.837	74.000	31.029	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022/01/28 - 19:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by BT DH5 at Channel 2480MHz - BT 1	

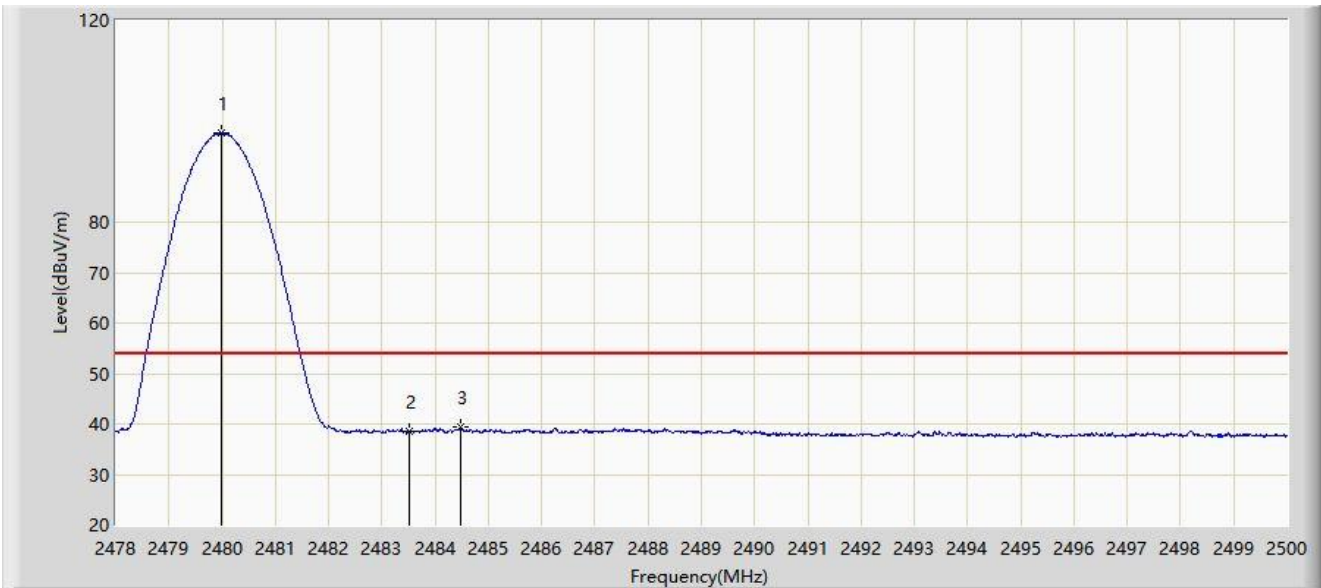


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	2479.991	97.622	66.616	N/A	N/A	31.005	AV
2			2483.500	38.587	7.566	-15.413	54.000	31.021	AV
3			2484.490	39.333	8.308	-14.667	54.000	31.025	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022/01/28 - 20:08
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by BT 2DH5 at Channel 2402MHz - BT 1	

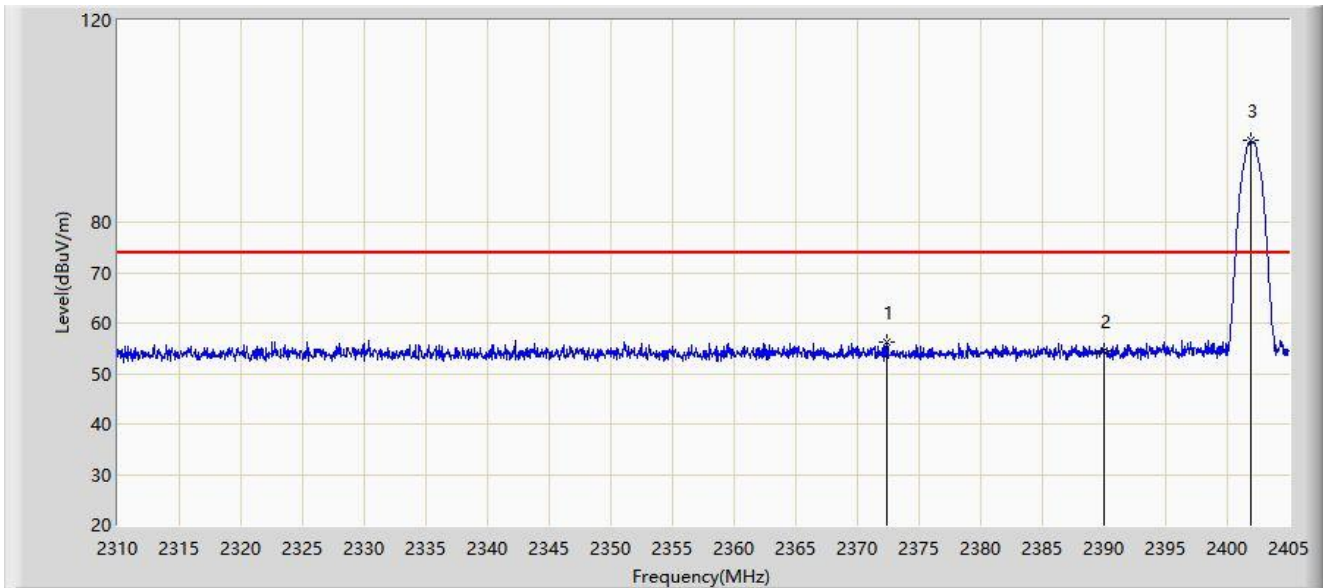


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			2372.415	56.244	25.450	-17.756	74.000	30.794	PK
2			2390.000	54.452	23.636	-19.548	74.000	30.816	PK
3		*	2401.865	96.121	65.282	N/A	N/A	30.839	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022/01/28 - 20:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by BT 2DH5 at Channel 2402MHz - BT 1	

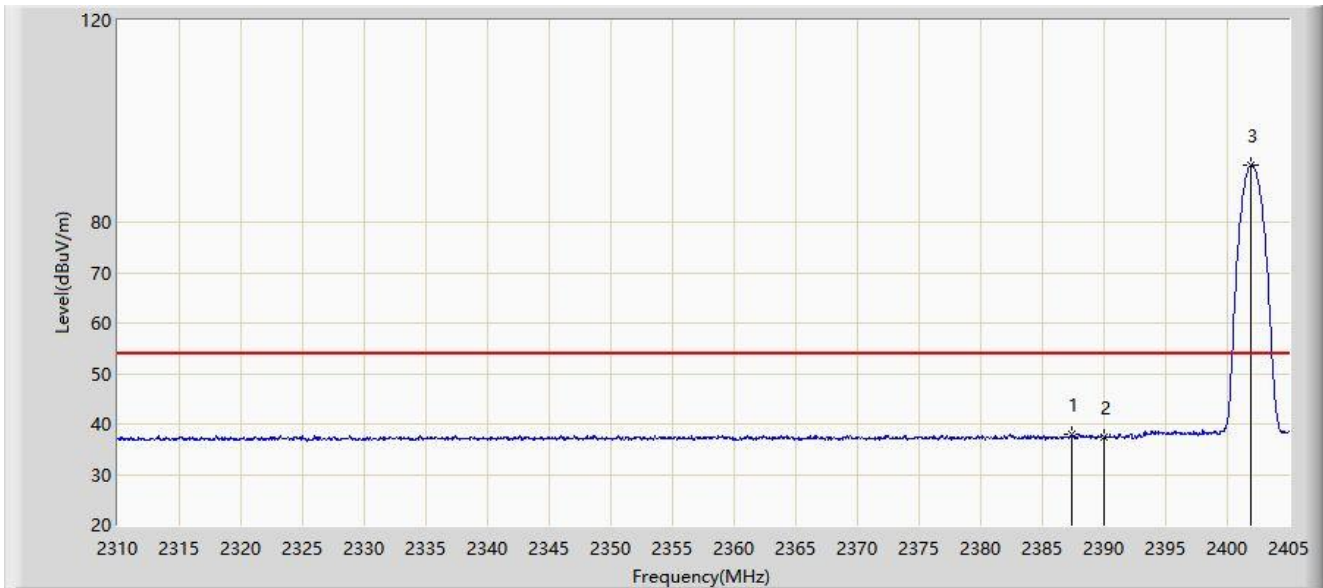


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			2387.425	37.934	7.121	-16.066	54.000	30.813	AV
2			2390.000	37.347	6.531	-16.653	54.000	30.816	AV
3		*	2401.960	91.358	60.519	N/A	N/A	30.839	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022/01/28 - 20:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by BT 2DH5 at Channel 2402MHz - BT 1	

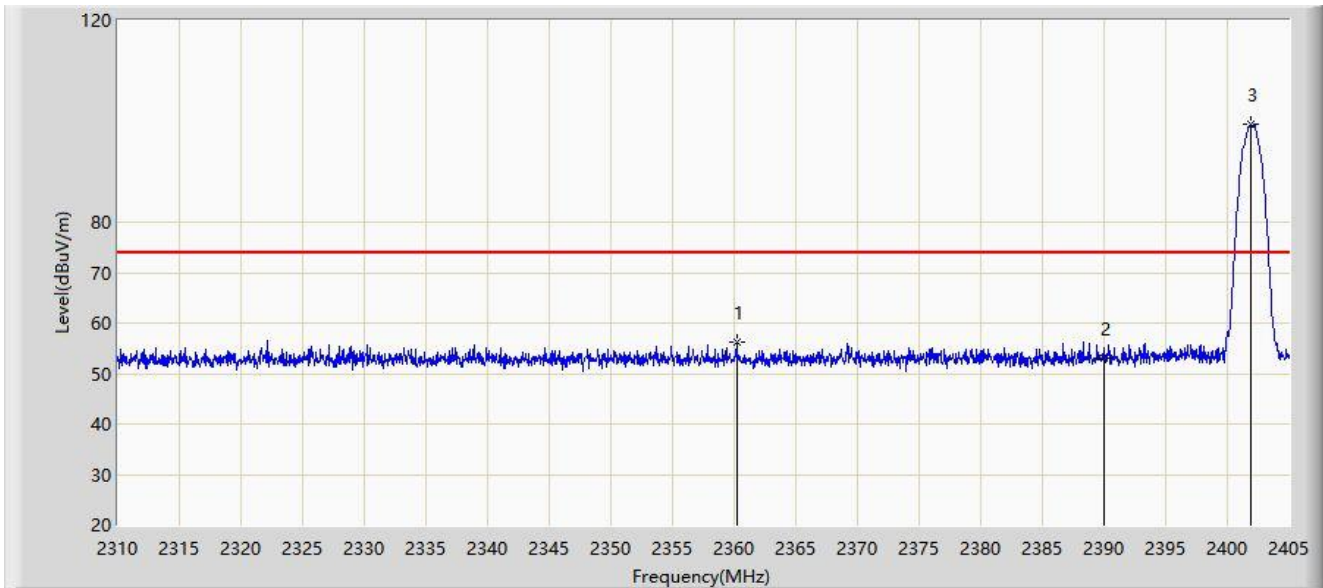


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			2360.208	56.338	25.533	-17.662	74.000	30.805	PK
2			2390.000	53.075	22.259	-20.925	74.000	30.816	PK
3		*	2401.865	99.533	68.694	N/A	N/A	30.839	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022/01/28 - 20:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by BT 2DH5 at Channel 2402MHz - BT 1	

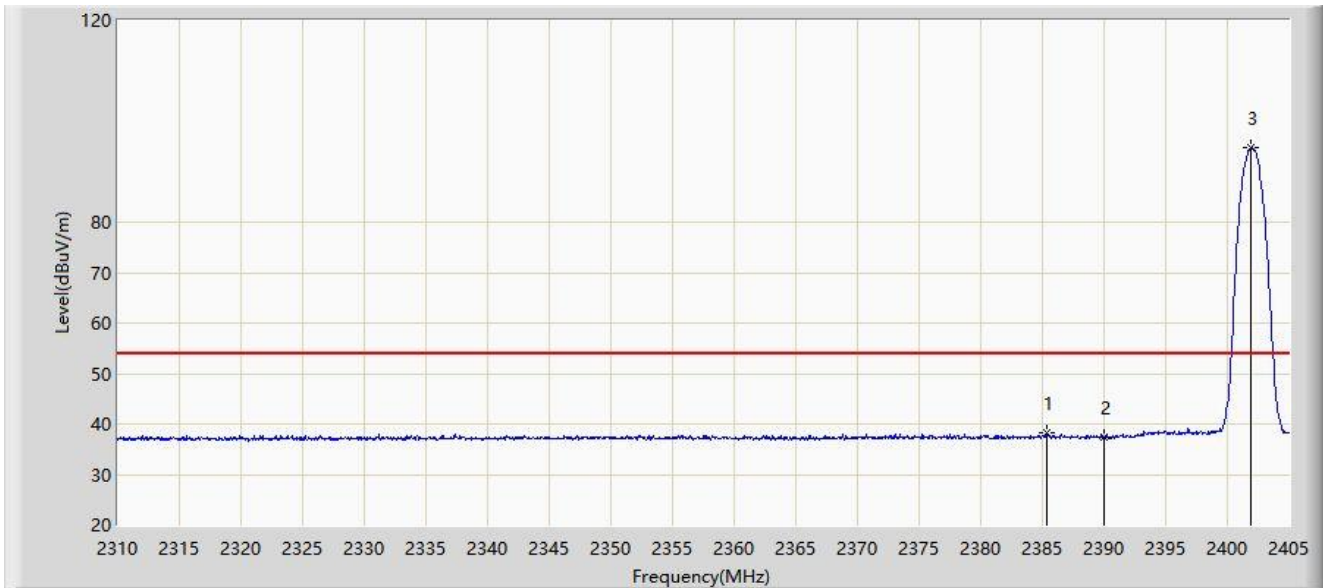


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			2385.335	38.206	7.395	-15.794	54.000	30.811	AV
2			2390.000	37.303	6.487	-16.697	54.000	30.816	AV
3		*	2401.913	94.694	63.855	N/A	N/A	30.839	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022/01/28 - 19:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by BT 2DH5 at Channel 2480MHz - BT 1	

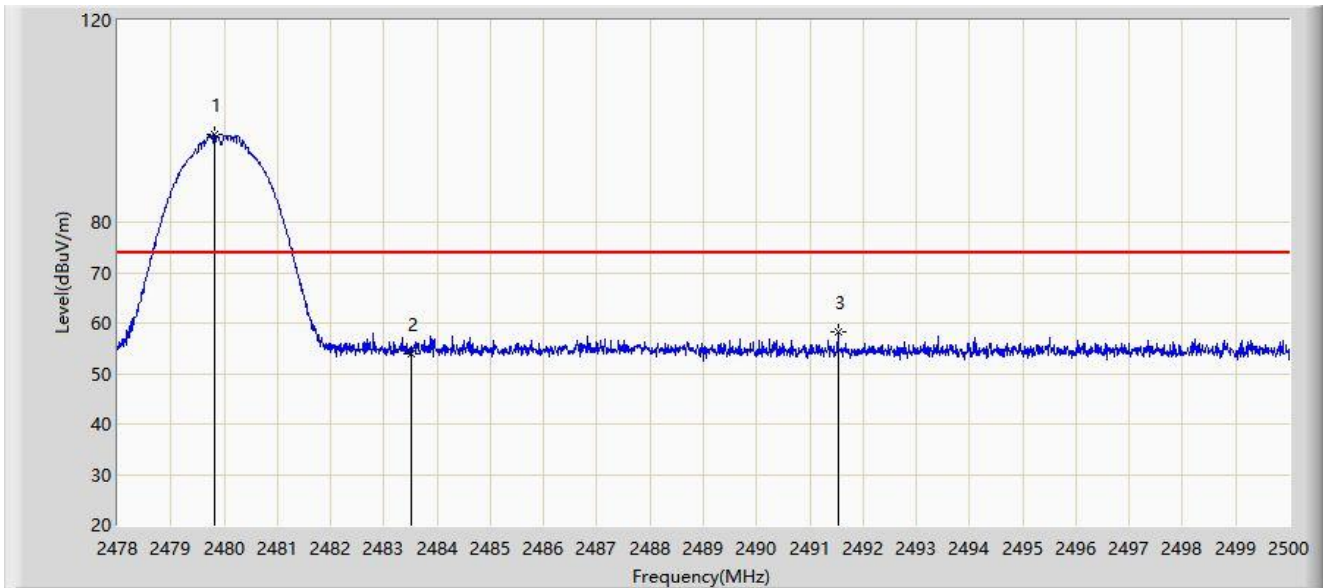


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		*	2479.815	97.453	66.448	N/A	N/A	31.005	PK
2			2483.500	53.853	22.832	-20.147	74.000	31.021	PK
3			2491.530	58.172	27.117	-15.828	74.000	31.054	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022/01/28 - 19:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by BT 2DH5 at Channel 2480MHz - BT 1	

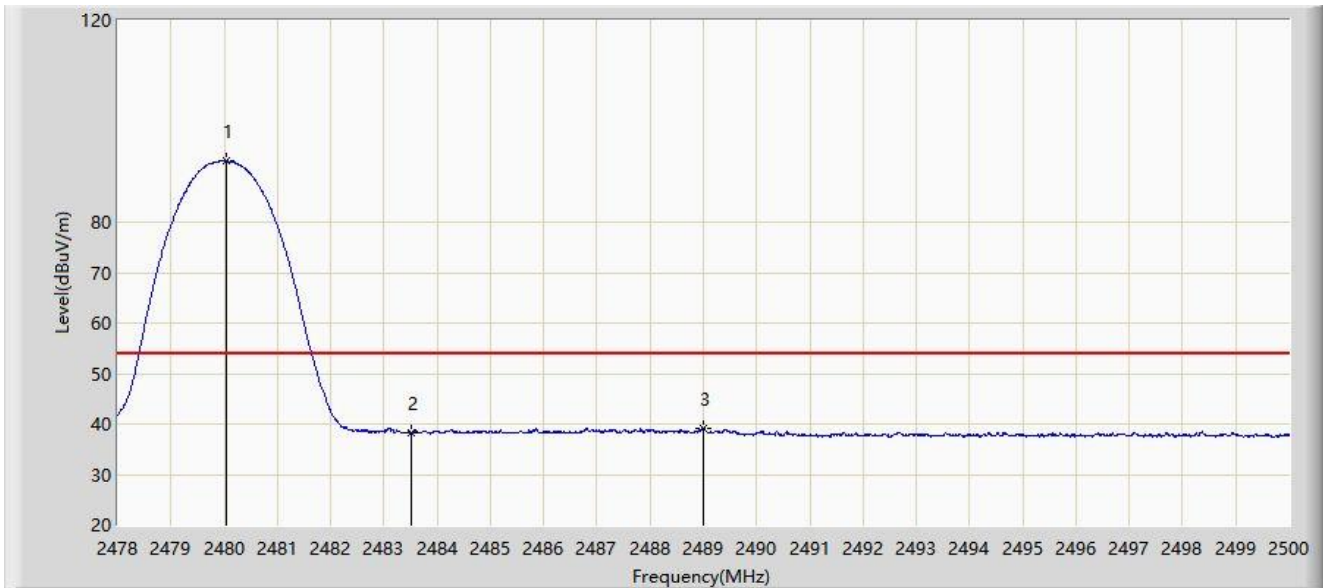


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	2480.035	92.120	61.114	N/A	N/A	31.006	AV
2			2483.500	38.243	7.222	-15.757	54.000	31.021	AV
3			2489.000	39.237	8.193	-14.763	54.000	31.045	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022/01/28 - 19:52
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by BT 2DH5 at Channel 2480MHz - BT 1	

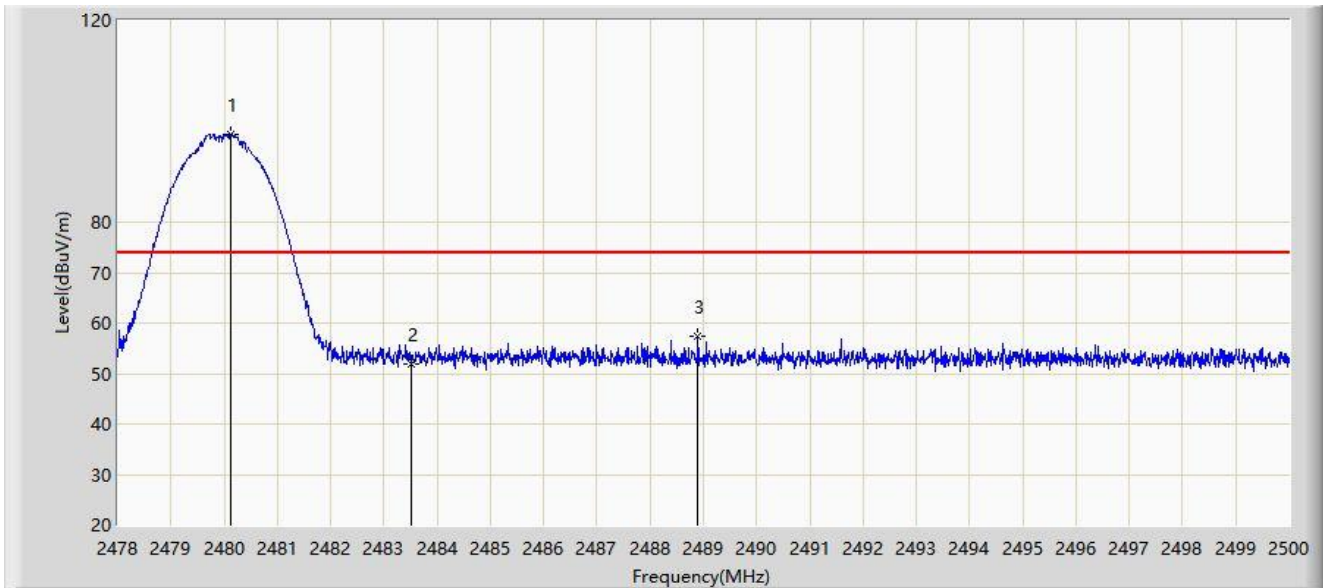


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		*	2480.112	97.517	66.511	N/A	N/A	31.007	PK
2			2483.500	51.876	20.855	-22.124	74.000	31.021	PK
3			2488.901	57.396	26.352	-16.604	74.000	31.043	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022/01/28 - 19:52
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by BT 2DH5 at Channel 2480MHz - BT 1	

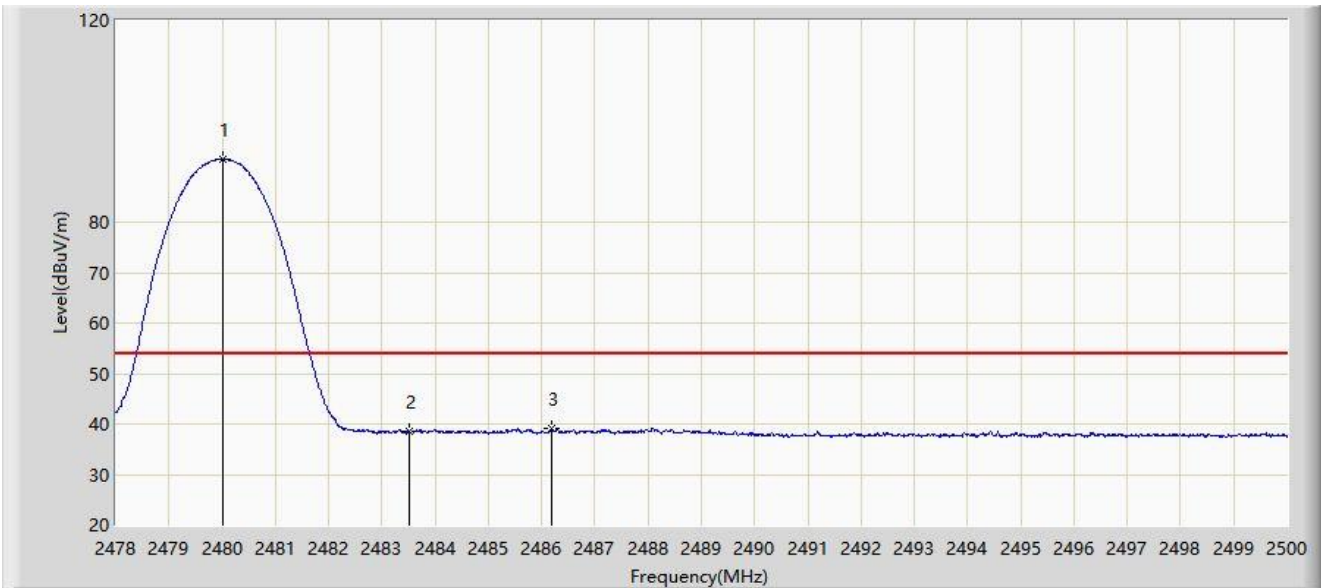


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	2480.002	92.519	61.513	N/A	N/A	31.006	AV
2			2483.500	38.618	7.597	-15.382	54.000	31.021	AV
3			2486.195	39.107	8.075	-14.893	54.000	31.032	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022/01/28 - 19:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by BT 3DH5 at Channel 2402MHz - BT 1	

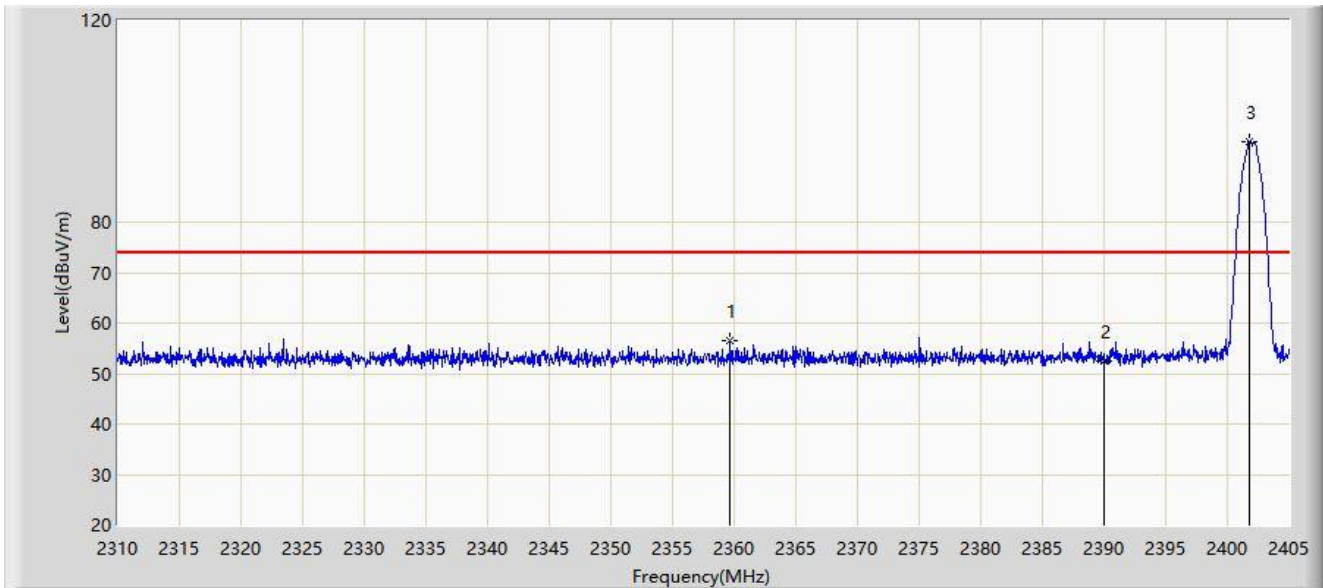


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			2359.685	56.606	25.799	-17.394	74.000	30.806	PK
2			2390.000	52.392	21.576	-21.608	74.000	30.816	PK
3		*	2401.817	96.049	65.210	N/A	N/A	30.839	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022/01/28 - 20:02
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by BT 3DH5 at Channel 2402MHz - BT 1	

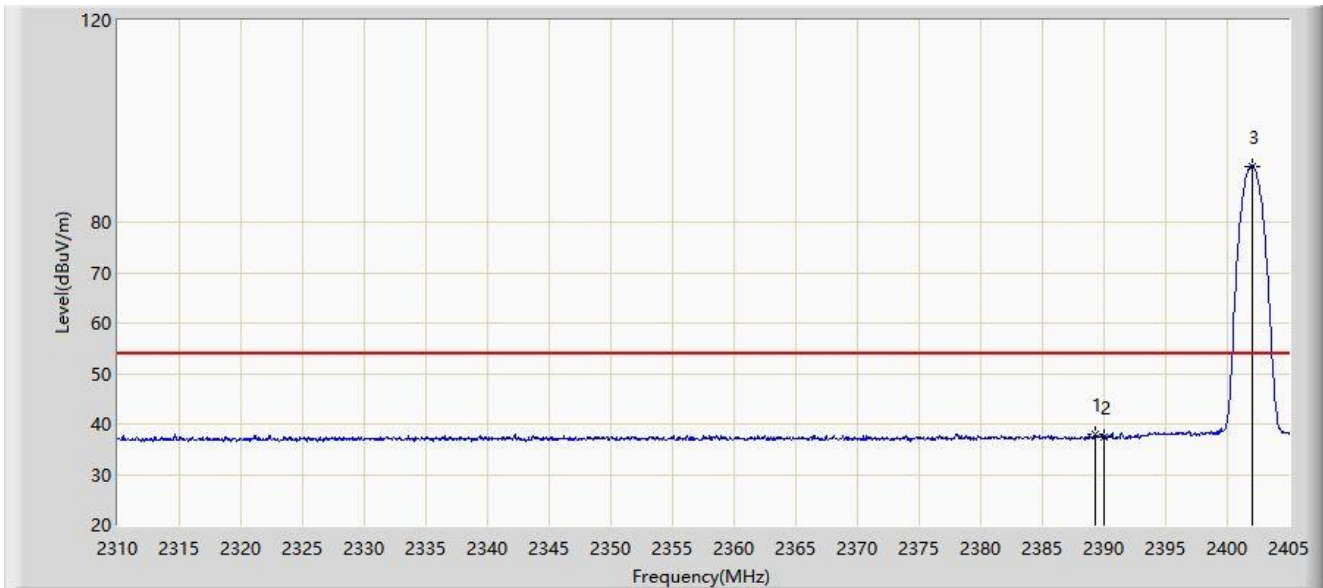


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			2389.230	38.059	7.244	-15.941	54.000	30.815	AV
2			2390.000	37.440	6.624	-16.560	54.000	30.816	AV
3		*	2402.055	91.152	60.313	N/A	N/A	30.839	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022/01/28 - 20:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by BT 3DH5 at Channel 2402MHz - BT 1	

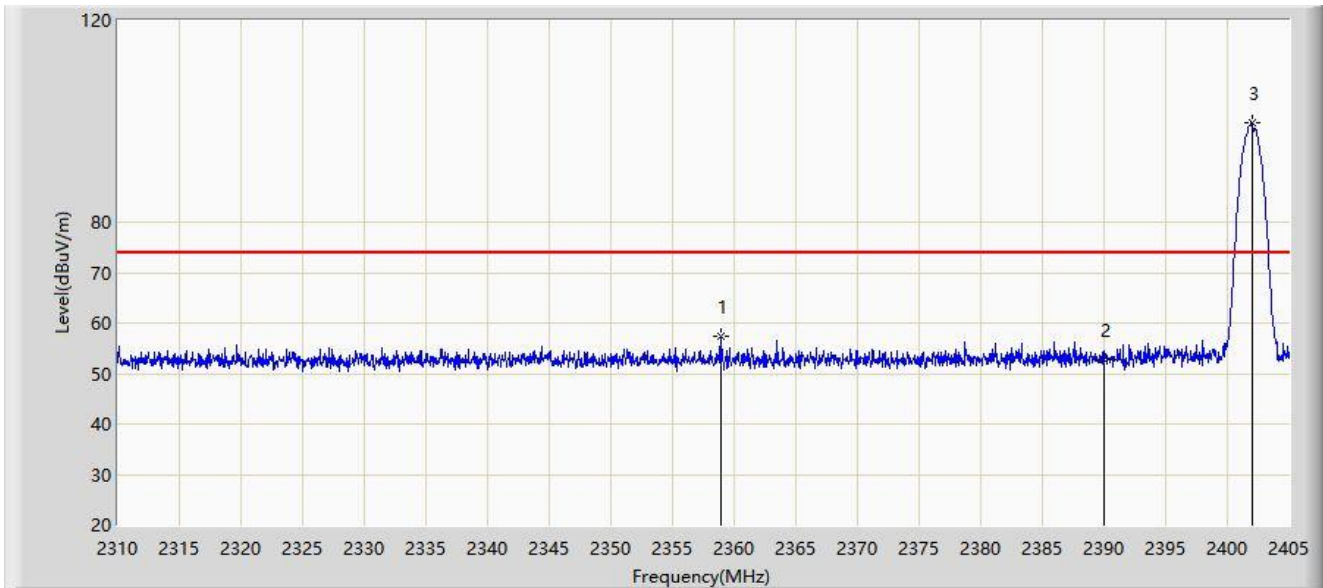


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			2358.877	57.308	26.498	-16.692	74.000	30.810	PK
2			2390.000	52.646	21.830	-21.354	74.000	30.816	PK
3		*	2402.008	99.742	68.903	N/A	N/A	30.839	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022/01/28 - 20:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by BT 3DH5 at Channel 2402MHz - BT 1	

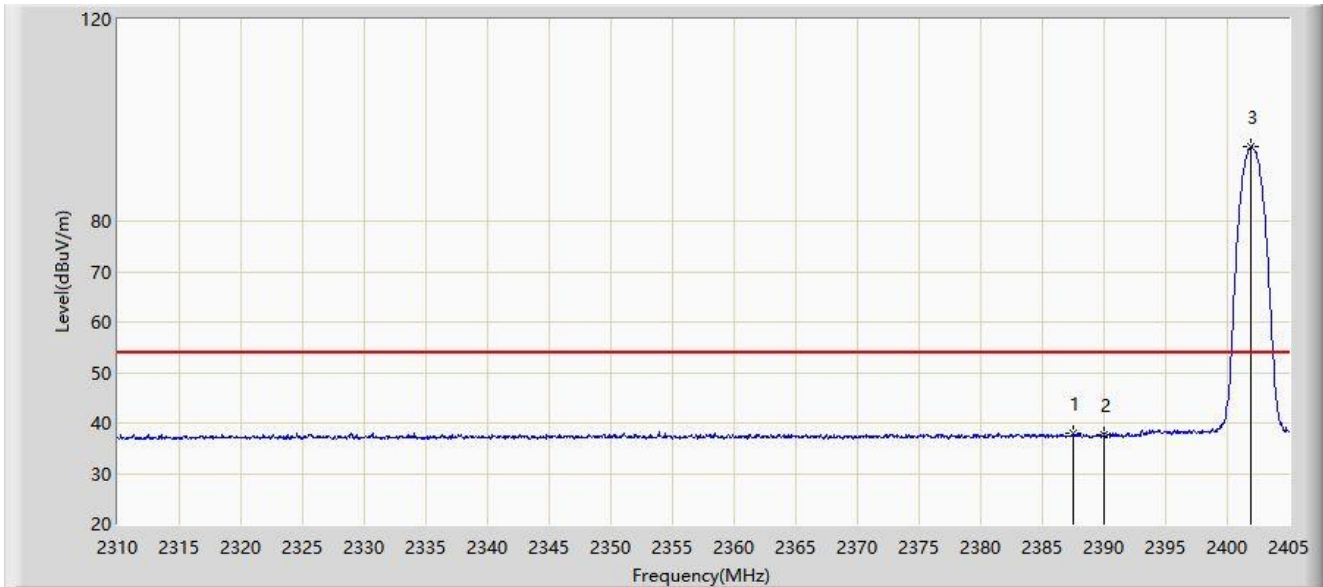


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			2387.472	37.964	7.151	-16.036	54.000	30.813	AV
2			2390.000	37.814	6.998	-16.186	54.000	30.816	AV
3		*	2401.960	94.871	64.032	N/A	N/A	30.839	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022/01/28 - 19:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by BT 3DH5 at Channel 2480MHz - BT 1	

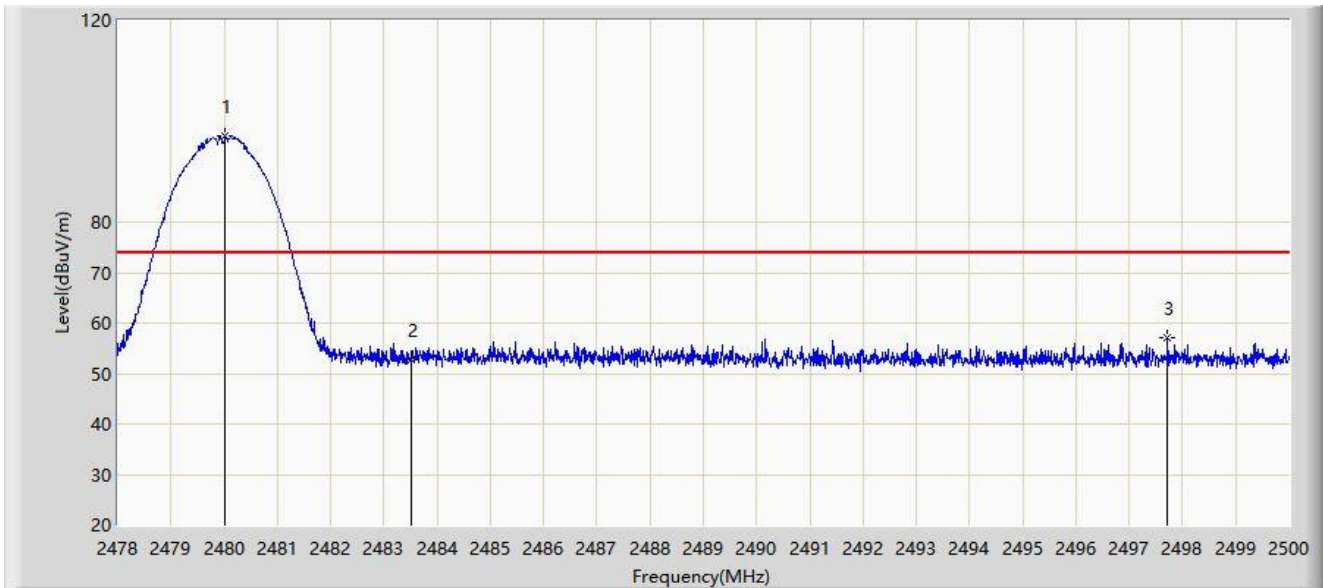


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		*	2480.024	97.005	65.999	N/A	N/A	31.006	PK
2			2483.500	52.777	21.756	-21.223	74.000	31.021	PK
3			2497.723	57.133	26.061	-16.867	74.000	31.072	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022/01/28 - 19:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by BT 3DH5 at Channel 2480MHz - BT 1	

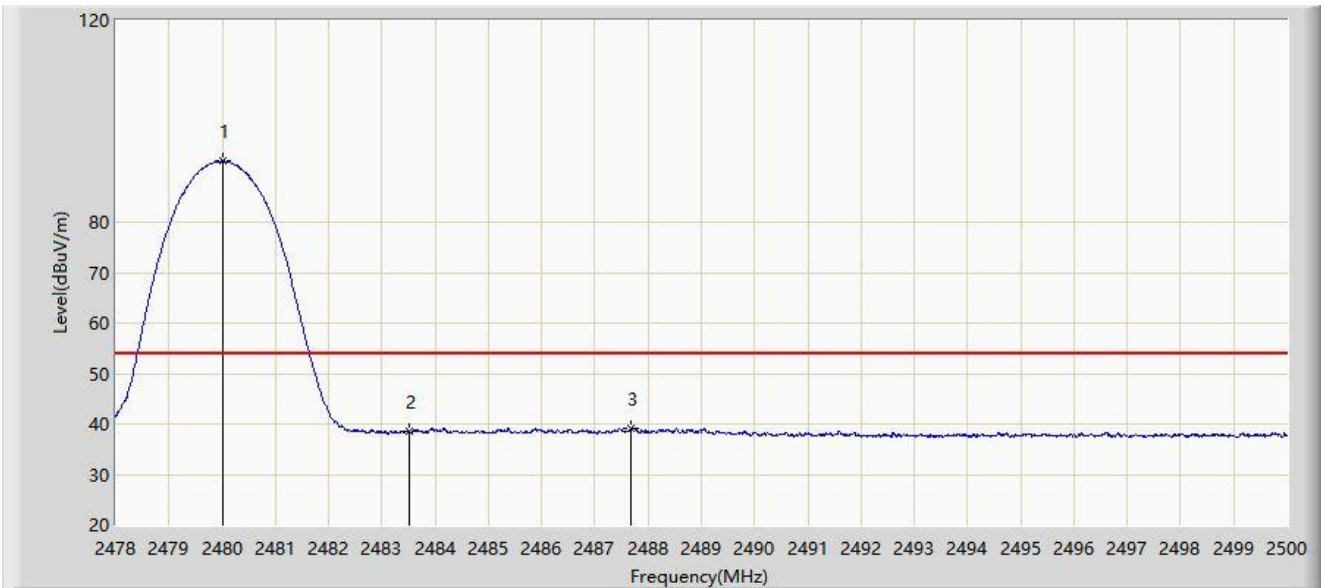


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	2480.013	92.048	61.042	N/A	N/A	31.006	AV
2			2483.500	38.553	7.532	-15.447	54.000	31.021	AV
3			2487.680	39.252	8.214	-14.748	54.000	31.038	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022/01/28 - 19:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by BT 3DH5 at Channel 2480MHz - BT 1	

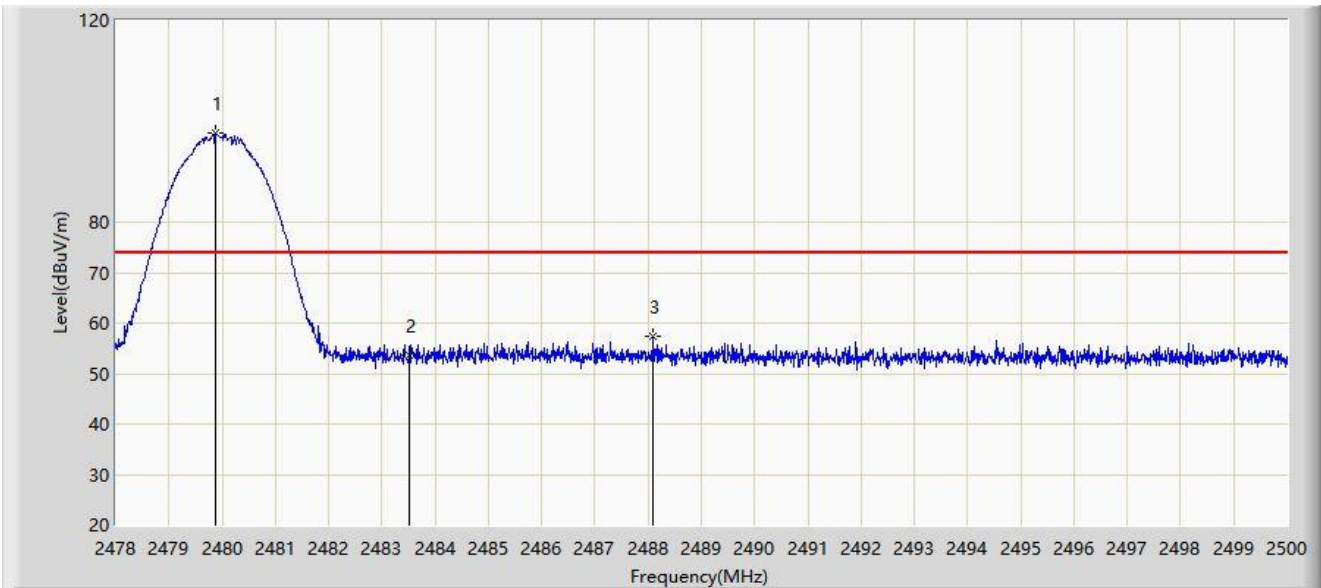


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		*	2479.881	97.570	66.565	N/A	N/A	31.005	PK
2			2483.500	53.608	22.587	-20.392	74.000	31.021	PK
3			2488.098	57.393	26.353	-16.607	74.000	31.040	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2022/01/28 - 19:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by BT 3DH5 at Channel 2480MHz - BT 1	

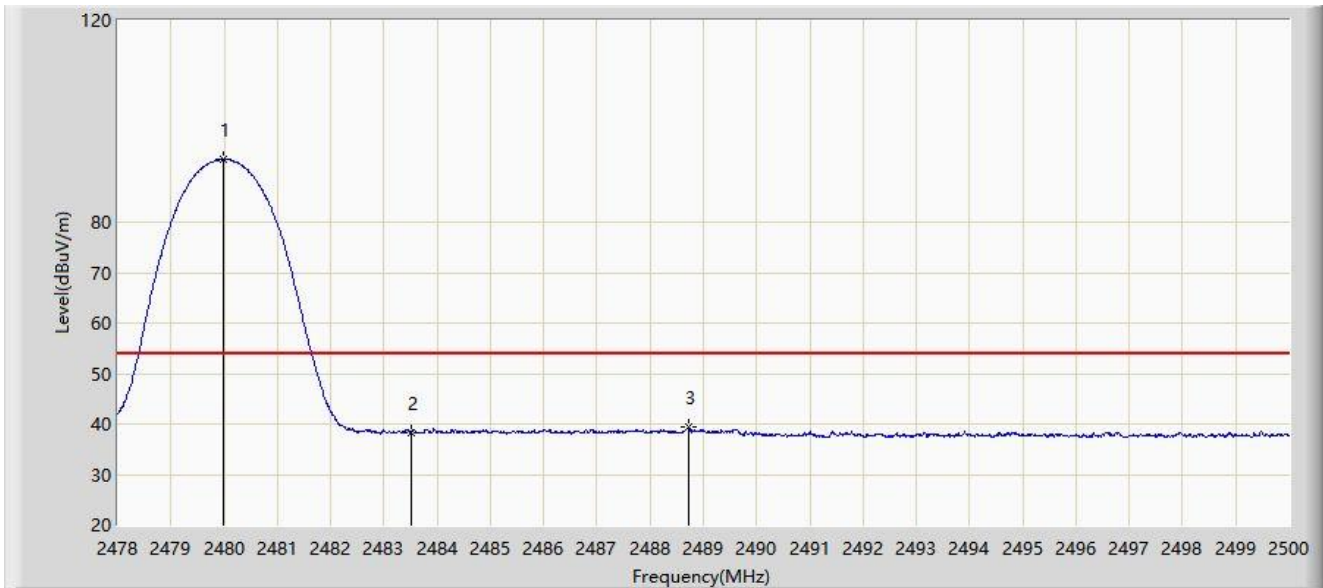


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	2479.991	92.419	61.413	N/A	N/A	31.005	AV
2			2483.500	38.124	7.103	-15.876	54.000	31.021	AV
3			2488.725	39.392	8.349	-14.608	54.000	31.043	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

A.11 AC Conducted Emissions Test Result

Site: WZ-SR2	Test Date: 2022/02/22
Temperature: 16.9°C	Humidity: 34.8%
Limit: FCC_Part15.207_CE_AC Power	Engineer: Helen Han
Probe: ENV216_101683_Filter Off_E	Polarity: Line
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by DH5 at channel 2441MHz	

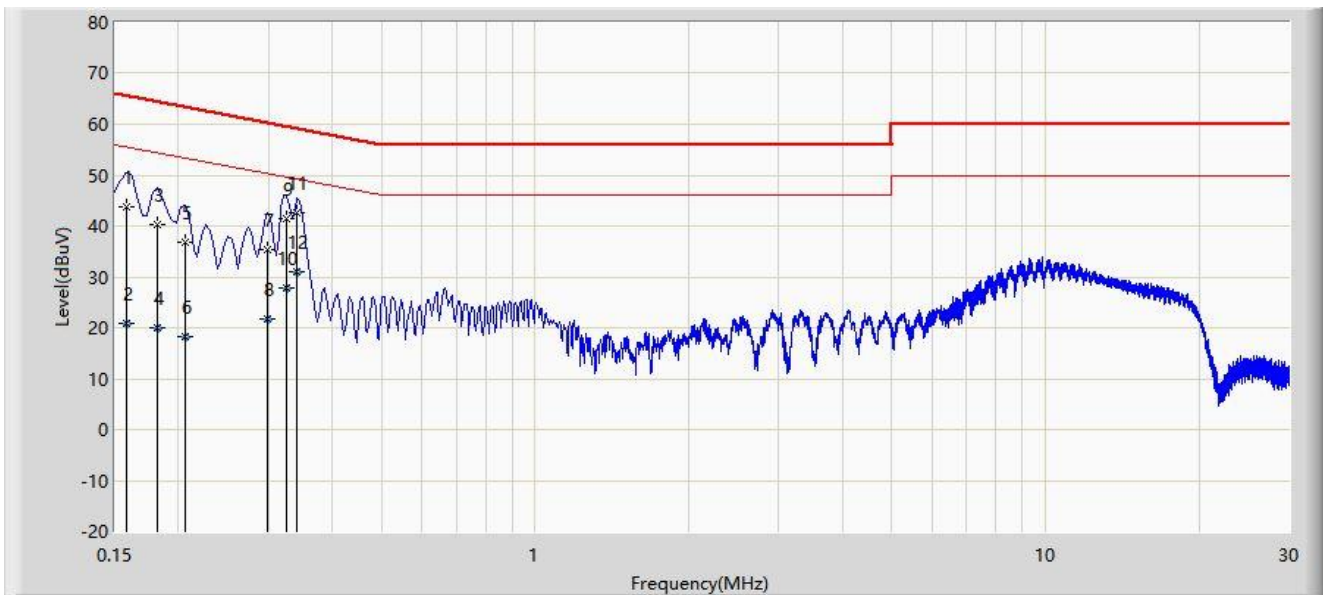


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1			0.158	43.832	33.932	-21.736	65.568	9.900	QP
2			0.158	20.741	10.841	-34.828	55.568	9.900	AV
3			0.182	40.320	30.420	-24.074	64.394	9.900	QP
4			0.182	19.921	10.021	-34.473	54.394	9.900	AV
5			0.206	36.805	26.904	-26.560	63.365	9.901	QP
6			0.206	18.394	8.493	-34.971	53.365	9.901	AV
7			0.298	35.425	25.519	-24.873	60.298	9.906	QP
8			0.298	21.882	11.975	-28.417	50.298	9.906	AV
9			0.326	41.508	31.600	-18.045	59.552	9.908	QP
10			0.326	27.736	17.828	-21.817	49.552	9.908	AV
11		*	0.342	42.500	32.591	-16.654	59.155	9.909	QP
12			0.342	31.061	21.152	-18.093	49.155	9.909	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Site: WZ-SR2	Test Date: 2022/02/22
Temperature: 16.9°C	Humidity: 34.8%
Limit: FCC_Part15.207_CE_AC Power	Engineer: Helen Han
Probe: ENV216_101683_Filter Off_E	Polarity: Neutral
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 2DH5 at channel 2441MHz	

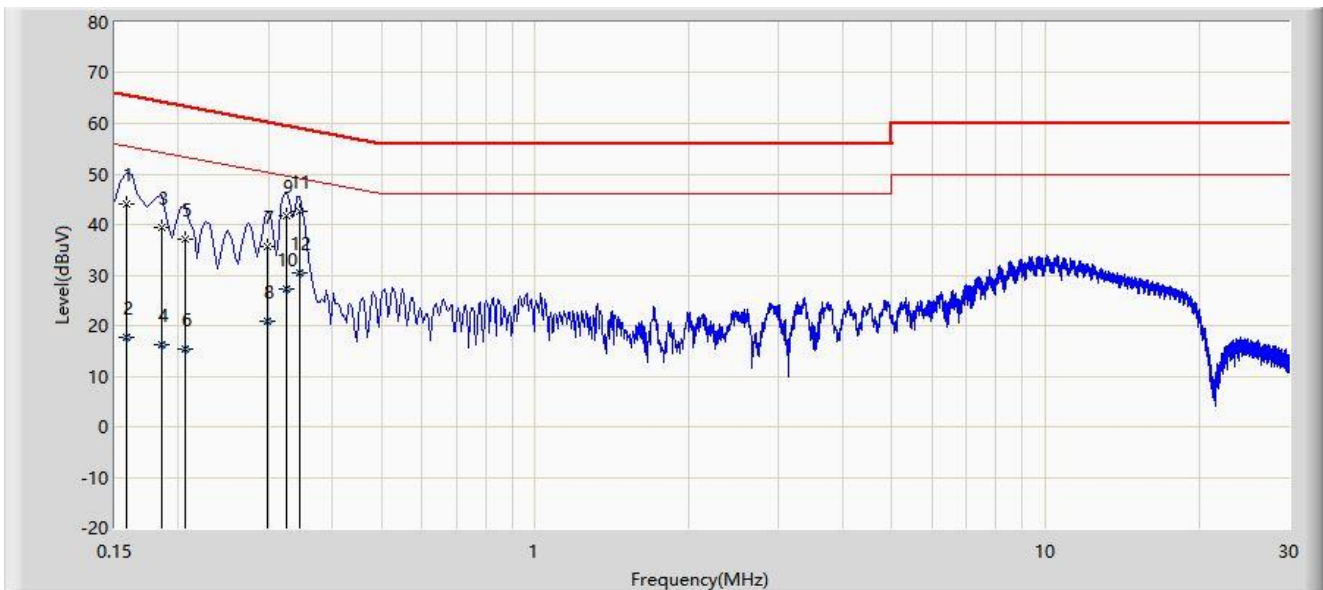

No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1			0.158	44.068	34.150	-21.501	65.568	9.918	QP
2			0.158	17.718	7.800	-37.851	55.568	9.918	AV
3			0.186	39.343	29.431	-24.870	64.213	9.913	QP
4			0.186	16.260	6.347	-37.954	54.213	9.913	AV
5			0.206	37.159	27.248	-26.206	63.365	9.912	QP
6			0.206	15.367	5.456	-37.998	53.365	9.912	AV
7			0.298	35.679	25.763	-24.619	60.298	9.916	QP
8			0.298	20.793	10.877	-29.505	50.298	9.916	AV
9			0.326	41.697	31.778	-17.856	59.552	9.918	QP
10			0.326	27.261	17.343	-22.292	49.552	9.918	AV
11		*	0.346	42.726	32.807	-16.332	59.058	9.919	QP
12			0.346	30.416	20.496	-18.642	49.058	9.919	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Appendix B - Test Setup Photograph

Refer to "2112RSU080-UT" file.

Appendix C - EUT Photograph

Refer to "2112RSU080-UE" file.

The End