


Site: WZ-AC2	Test Date: 2022/02/14 - 23:18
Limit: FCC_Part15.407_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz	

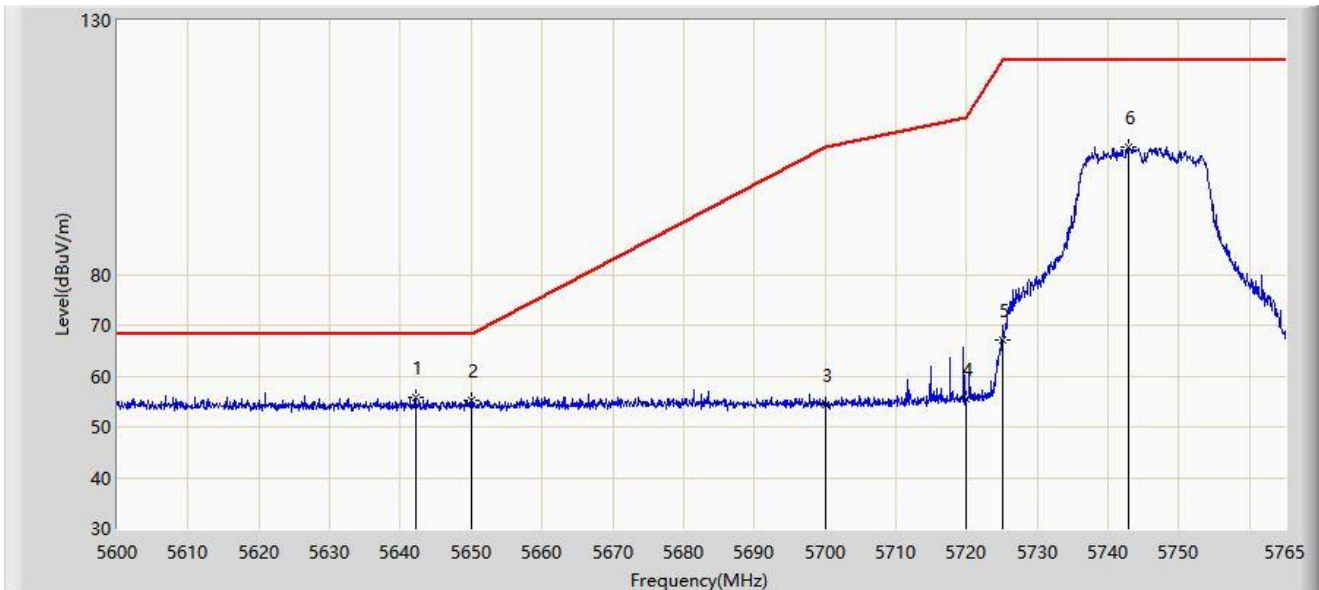


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		*	5642.158	55.752	51.043	-12.448	68.200	4.709	PK
2			5650.000	55.356	50.545	-12.844	68.200	4.810	PK
3			5700.000	54.456	49.462	-50.744	105.200	4.993	PK
4			5720.000	55.429	50.177	-55.371	110.800	5.252	PK
5			5725.000	67.178	61.812	-55.022	122.200	5.366	PK
6			5742.973	105.017	99.511	N/A	N/A	5.507	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/14 - 23:20
Limit: FCC_Part15.407_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz	

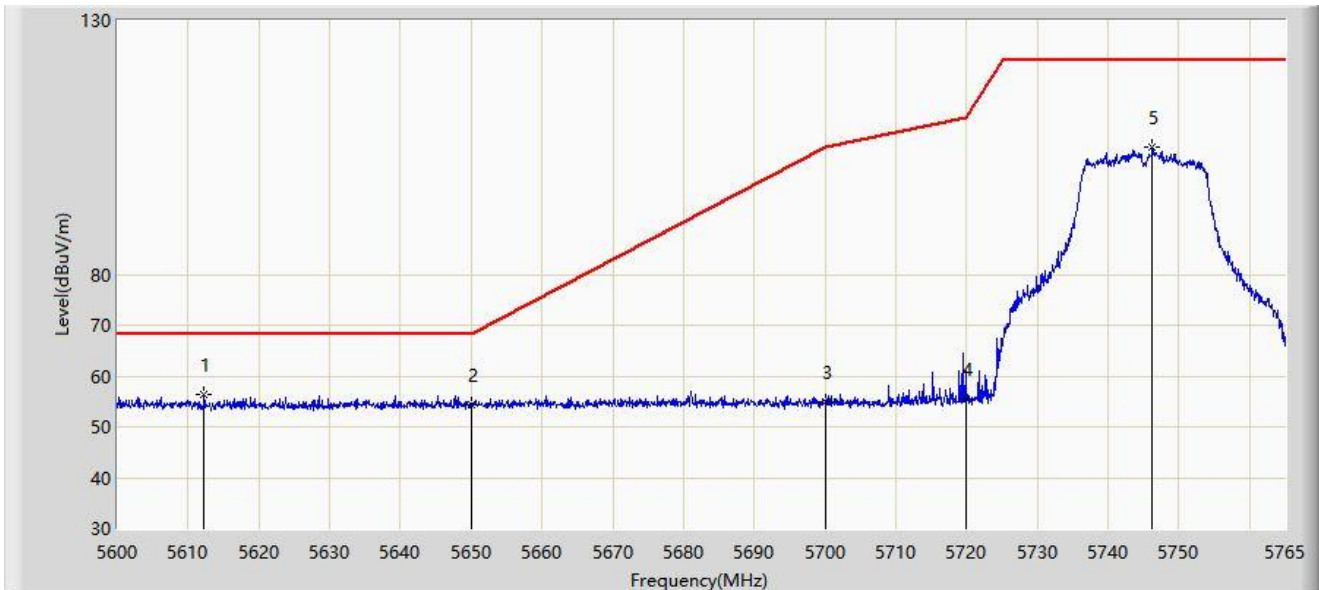


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5612.292	56.352	51.755	-11.848	68.200	4.598	PK
2			5650.000	54.472	49.661	-13.728	68.200	4.810	PK
3			5700.000	55.011	50.017	-50.189	105.200	4.993	PK
4			5720.000	55.440	50.188	-55.360	110.800	5.252	PK
5			5746.272	105.001	99.523	N/A	N/A	5.479	PK
6			57250.000	65.908	36.374	NaN	NaN	29.534	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/14 - 23:23
Limit: FCC_Part15.407_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz	

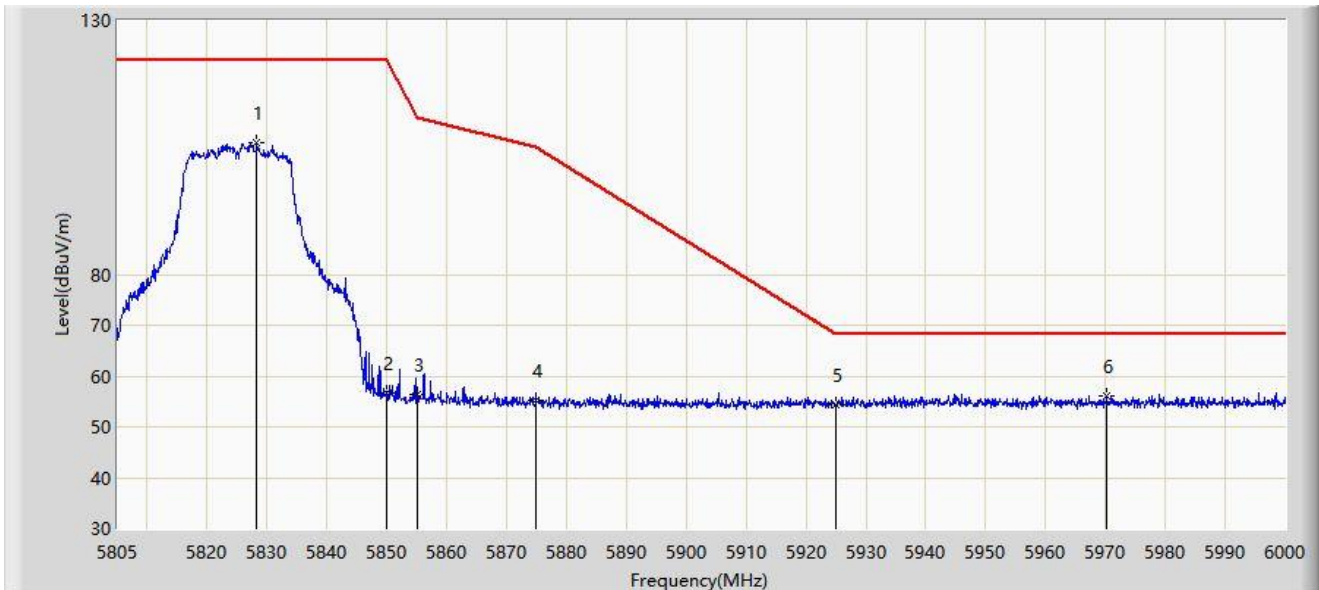


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5828.303	106.045	100.343	N/A	N/A	5.702	PK
2			5850.000	56.629	50.871	-65.571	122.200	5.758	PK
3			5855.000	56.440	50.654	-54.360	110.800	5.787	PK
4			5875.000	55.125	49.221	-50.075	105.200	5.904	PK
5			5925.000	54.227	48.207	-13.973	68.200	6.020	PK
6		*	5970.165	56.057	49.845	-12.143	68.200	6.212	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/14 - 23:26
Limit: FCC_Part15.407_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz	

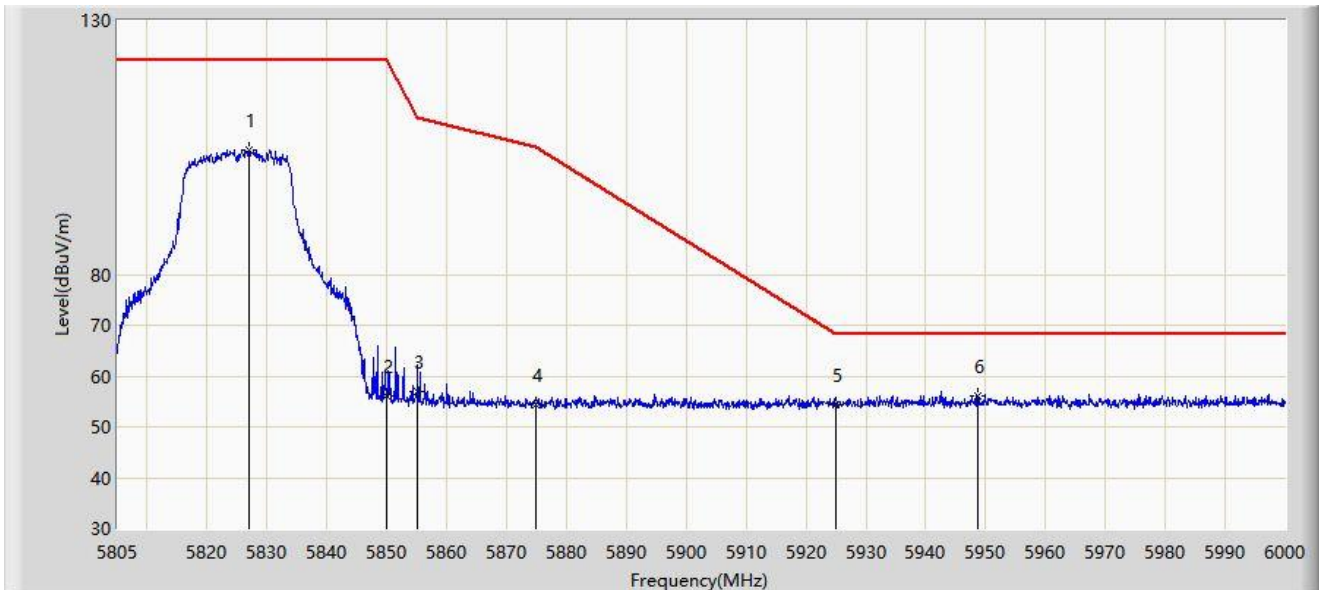


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5826.937	104.597	98.893	N/A	N/A	5.704	PK
2			5850.000	56.198	50.440	-66.002	122.200	5.758	PK
3			5855.000	56.948	51.162	-53.852	110.800	5.787	PK
4			5875.000	54.243	48.339	-50.957	105.200	5.904	PK
5			5925.000	54.265	48.245	-13.935	68.200	6.020	PK
6		*	5948.715	56.146	49.830	-12.054	68.200	6.316	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/14 - 23:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz	

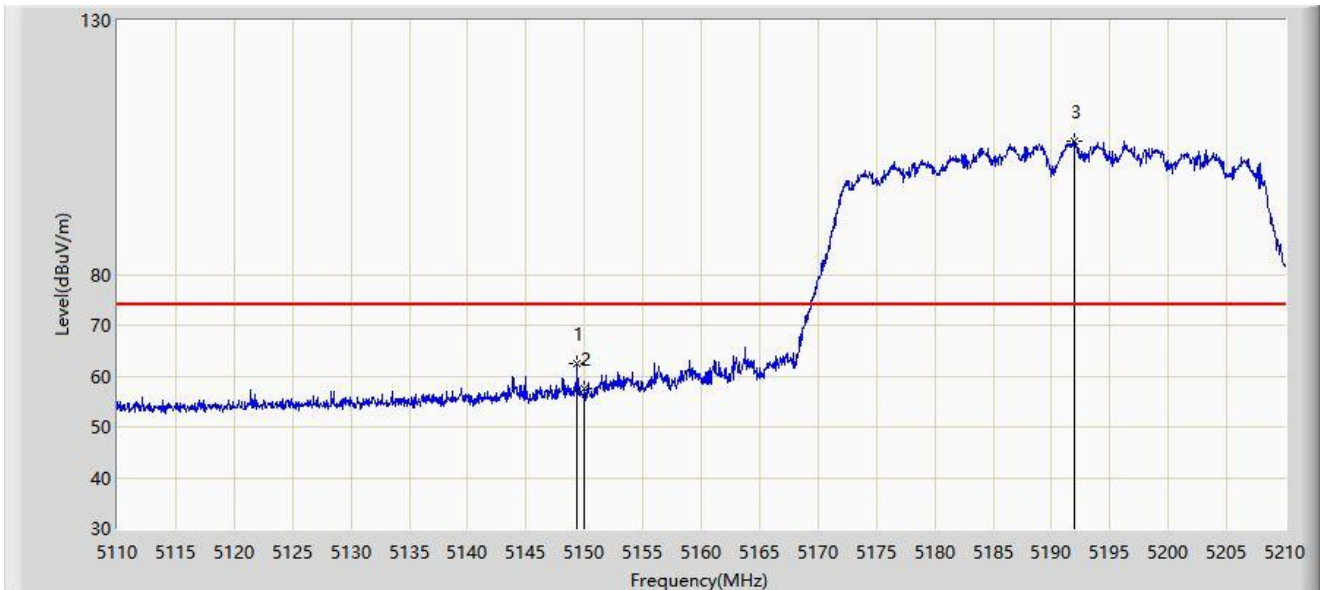


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5149.400	62.425	58.242	-11.575	74.000	4.183	PK
2			5150.000	57.426	53.254	-16.574	74.000	4.173	PK
3		*	5192.000	106.335	102.703	N/A	N/A	3.631	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/14 - 23:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz	

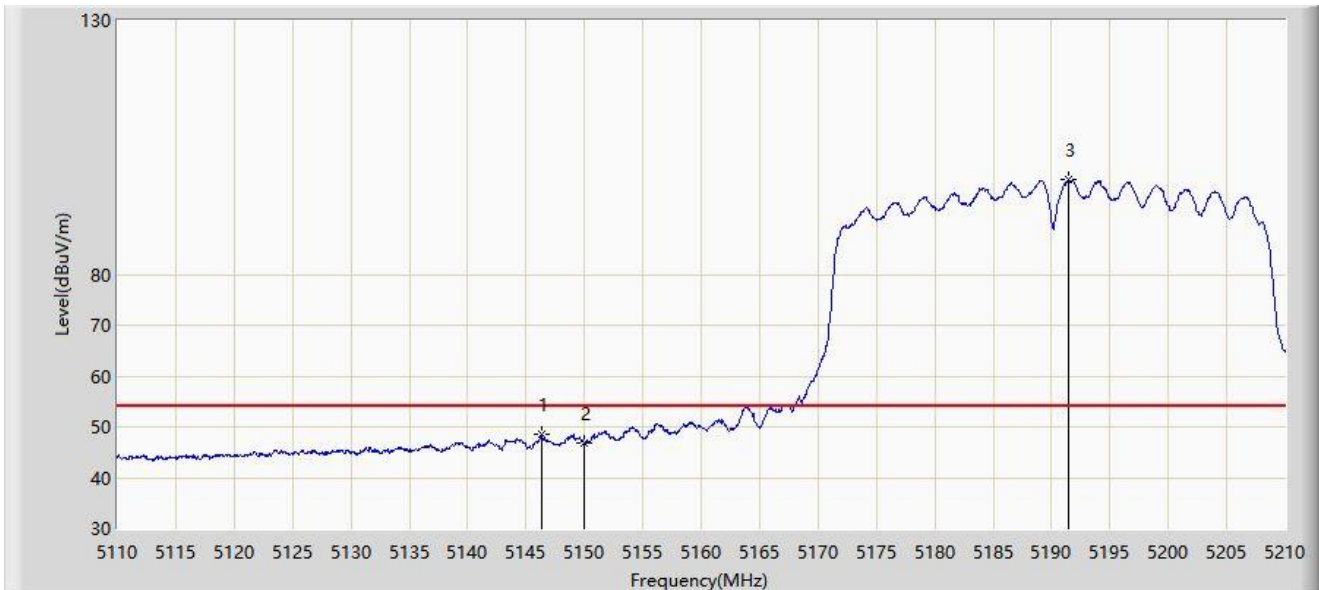


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5146.350	48.677	44.478	-5.323	54.000	4.199	AV
2			5150.000	46.722	42.550	-7.278	54.000	4.173	AV
3		*	5191.450	98.624	94.993	N/A	N/A	3.631	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/14 - 23:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz	

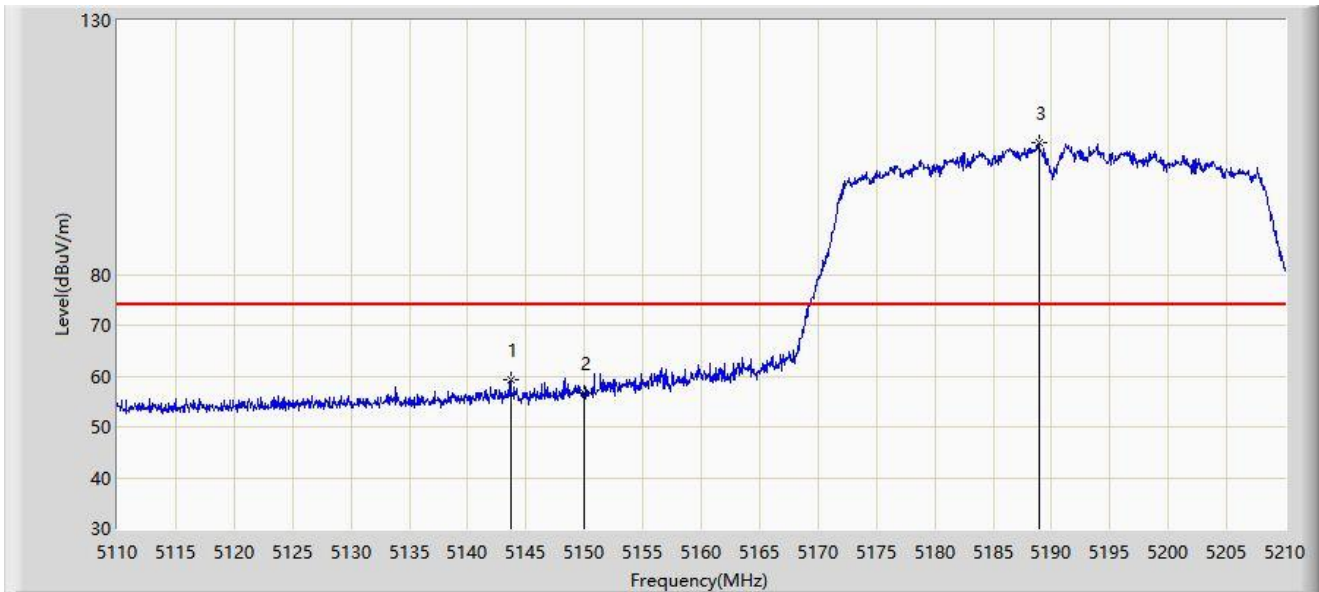


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5143.650	59.364	55.182	-14.636	74.000	4.183	PK
2			5150.000	56.569	52.397	-17.431	74.000	4.173	PK
3		*	5188.900	106.079	102.454	N/A	N/A	3.625	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/14 - 23:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz	

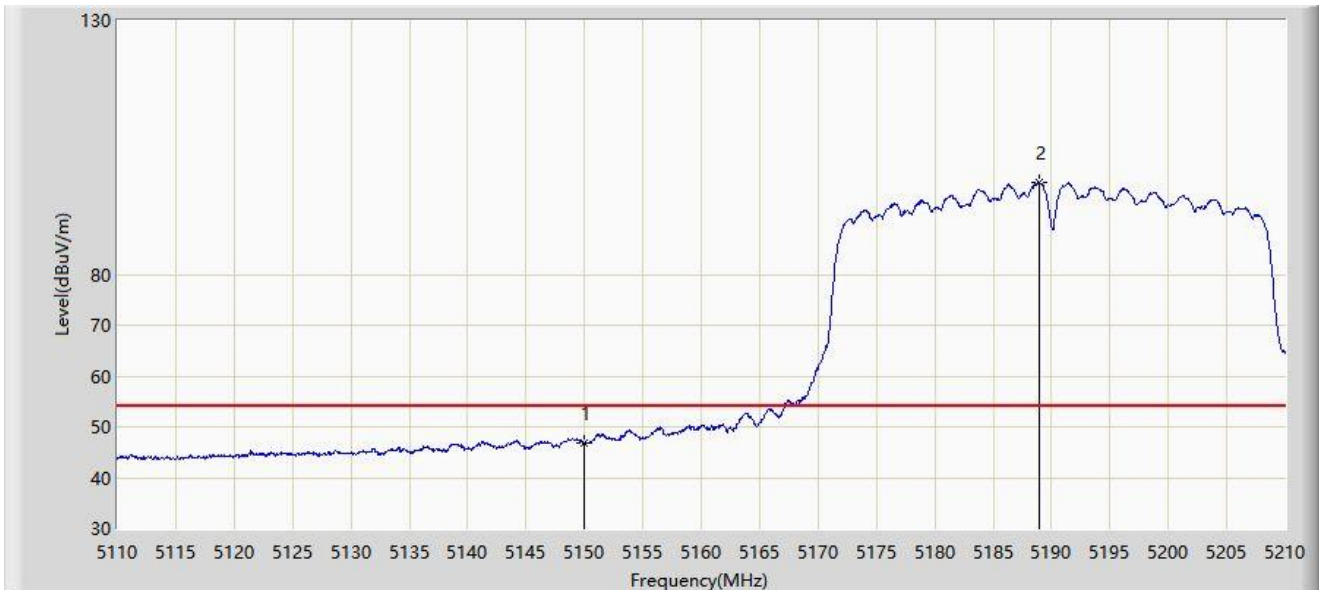


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1			5150.000	46.763	42.591	-7.237	54.000	4.173	AV
2		*	5188.950	97.987	94.362	N/A	N/A	3.625	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/14 - 23:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz	

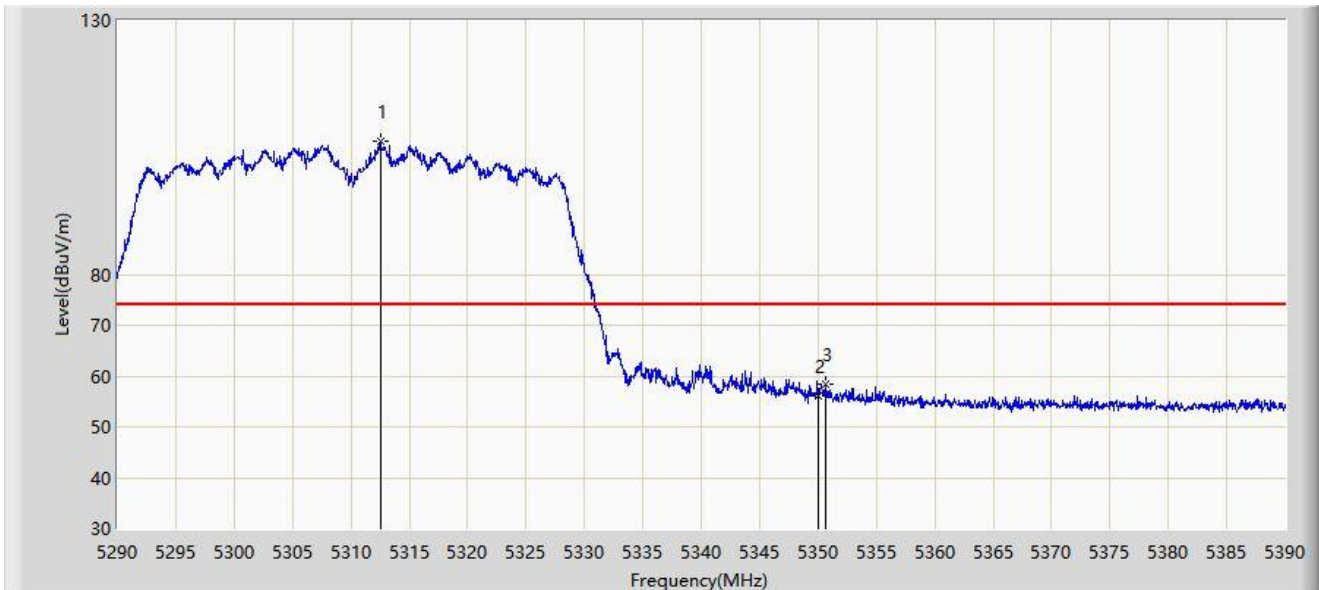


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5312.500	106.292	102.739	N/A	N/A	3.553	PK
2			5350.000	56.012	52.126	-17.988	74.000	3.886	PK
3			5350.600	58.426	54.528	-15.574	74.000	3.898	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/14 - 23:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz	

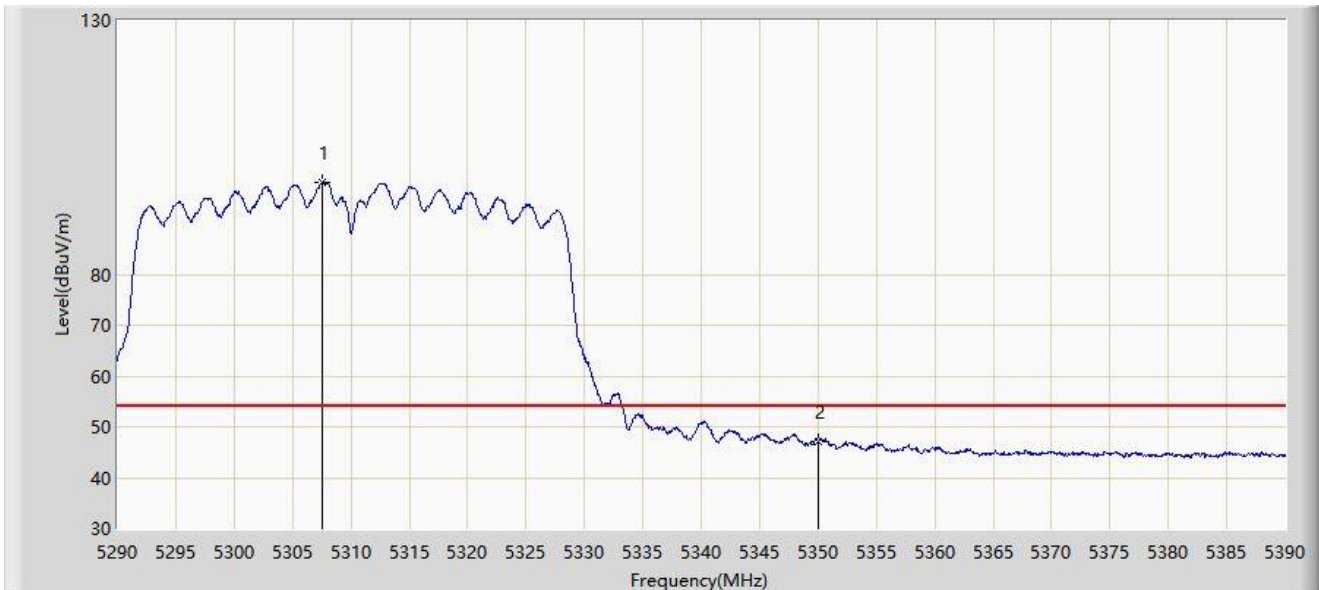


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5307.600	98.213	94.599	N/A	N/A	3.614	AV
2			5350.000	47.191	43.305	-6.809	54.000	3.886	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/14 - 23:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz	

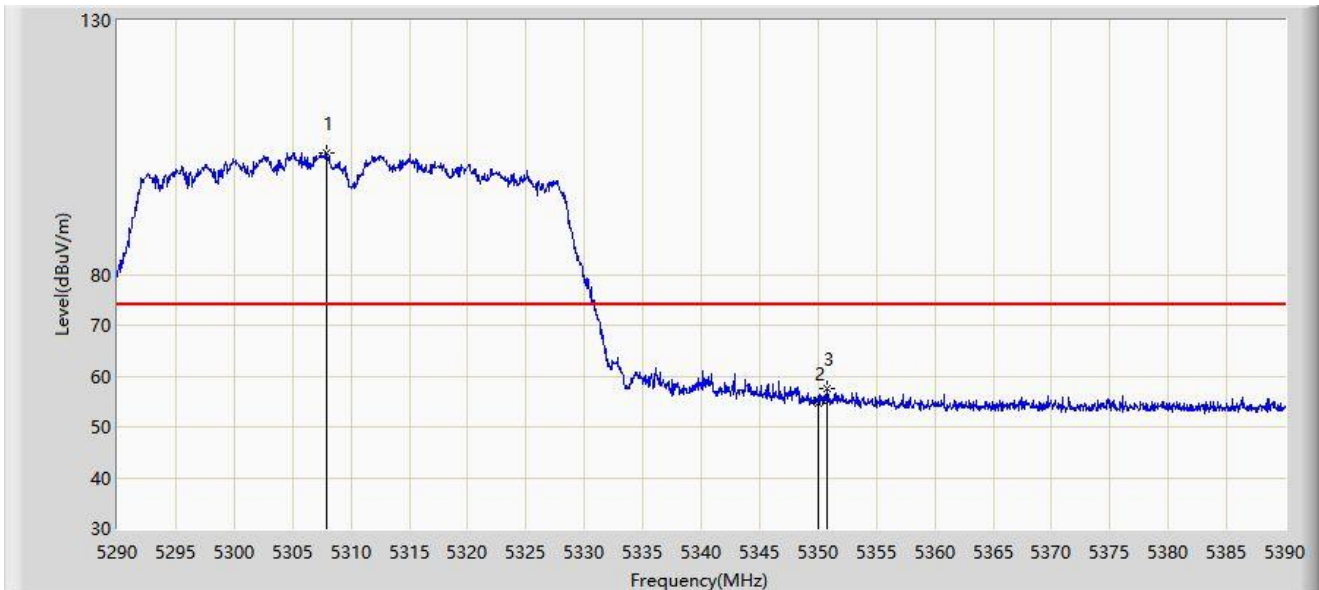


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5307.950	103.803	100.194	N/A	N/A	3.610	PK
2			5350.000	54.625	50.739	-19.375	74.000	3.886	PK
3			5350.800	57.538	53.636	-16.462	74.000	3.903	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/14 - 23:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz	

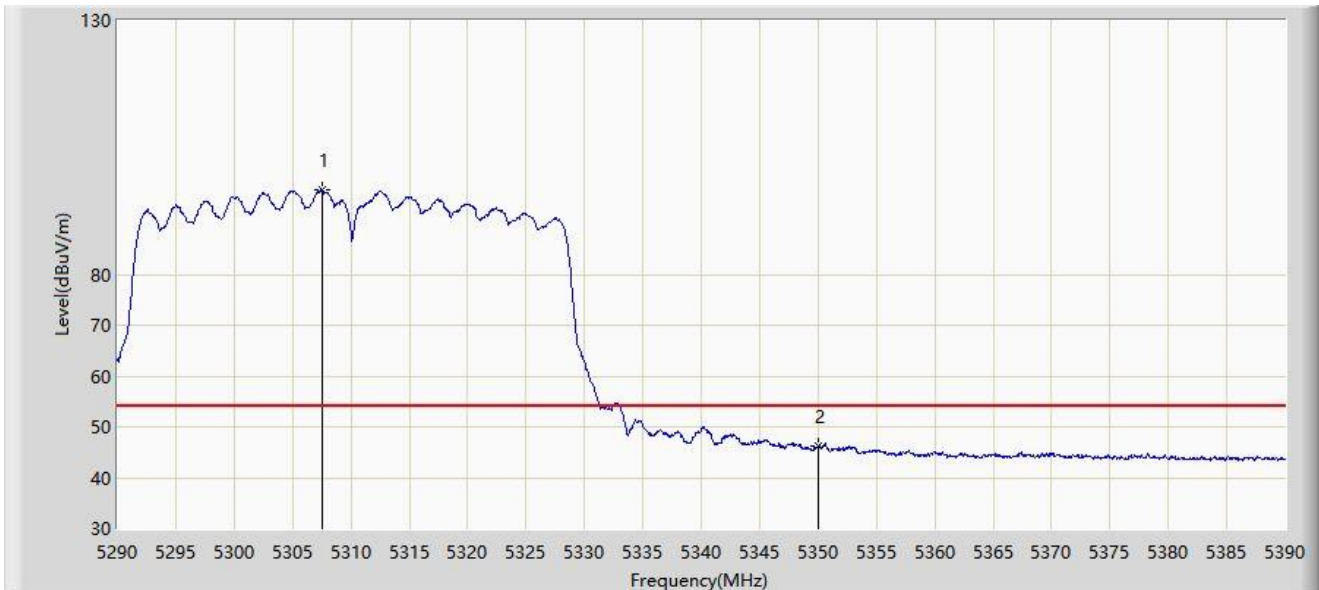


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5307.500	96.599	92.984	N/A	N/A	3.615	AV
2			5350.000	46.158	42.272	-7.842	54.000	3.886	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/14 - 23:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz	

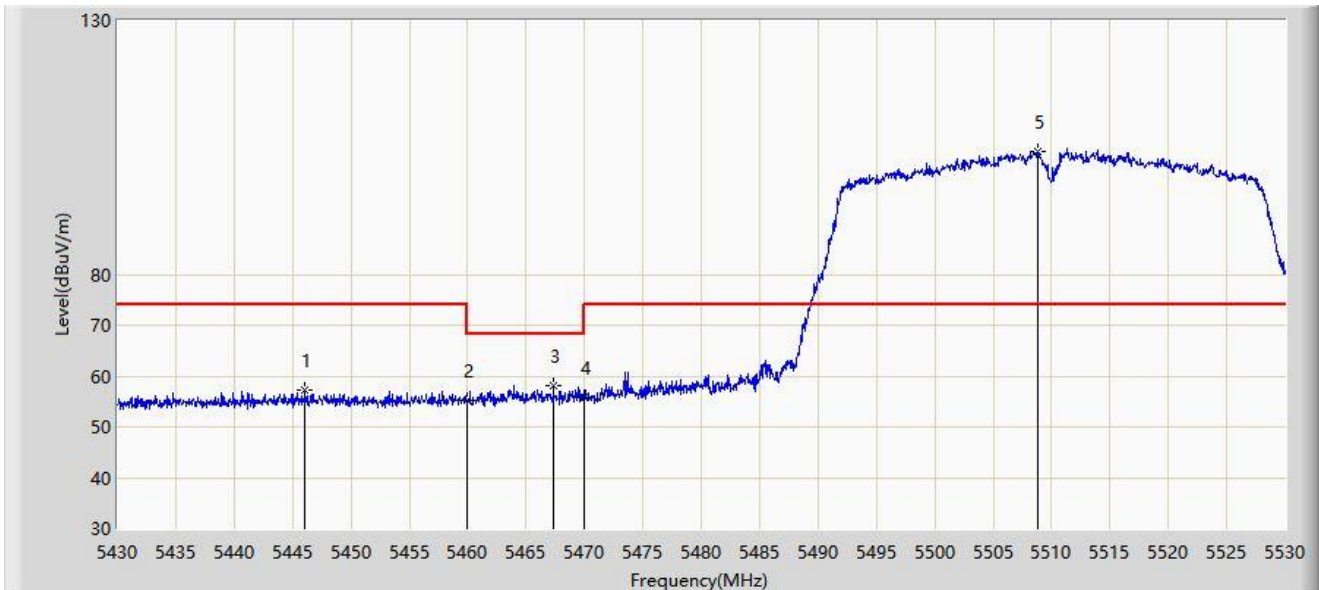


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5446.100	57.302	52.956	-16.698	74.000	4.345	PK
2			5460.000	55.332	51.124	-18.668	74.000	4.208	PK
3			5467.350	58.159	54.042	-10.041	68.200	4.117	PK
4			5470.000	55.704	51.620	-12.496	68.200	4.084	PK
5		*	5508.850	104.134	99.719	N/A	N/A	4.414	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/14 - 23:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz	

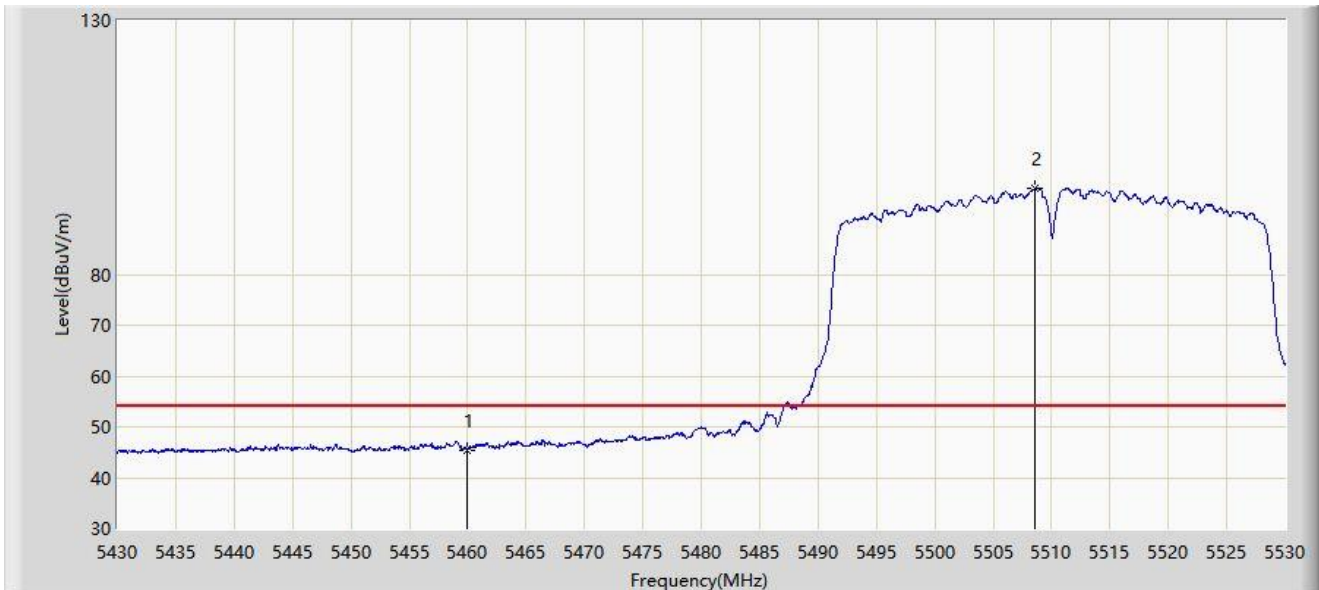


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1			5460.000	45.506	41.298	-8.494	54.000	4.208	AV
2		*	5508.550	96.942	92.527	N/A	N/A	4.415	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/14 - 23:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz	

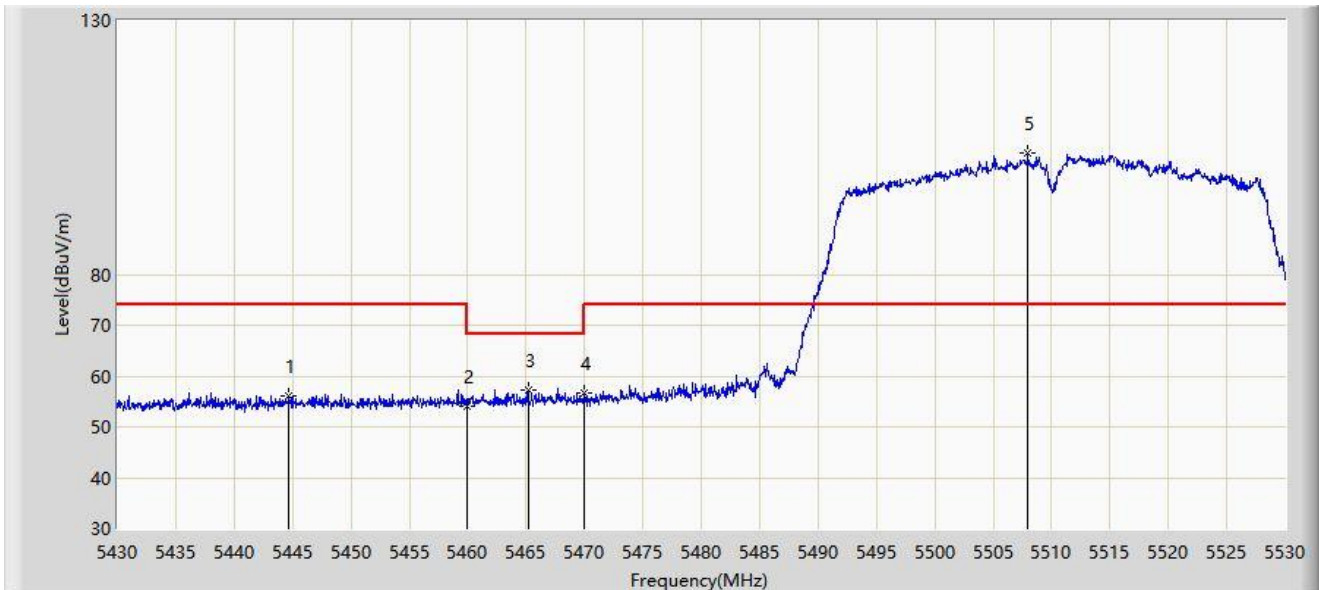


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5444.700	55.970	51.614	-18.030	74.000	4.355	PK
2			5460.000	54.163	49.955	-19.837	74.000	4.208	PK
3			5465.200	57.341	53.197	-10.859	68.200	4.143	PK
4			5470.000	56.658	52.574	-11.542	68.200	4.084	PK
5		*	5508.000	104.053	99.636	N/A	N/A	4.417	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/14 - 23:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz	

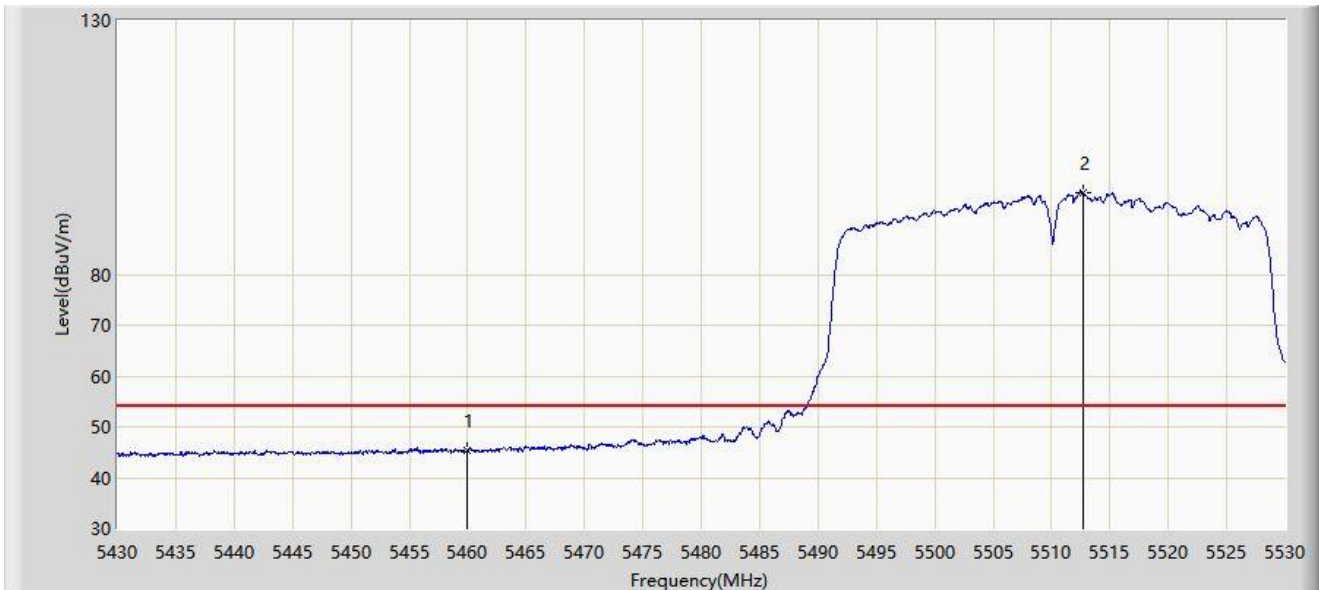


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1			5460.000	45.290	41.082	-8.710	54.000	4.208	AV
2		*	5512.700	96.116	91.700	N/A	N/A	4.416	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/14 - 23:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz	

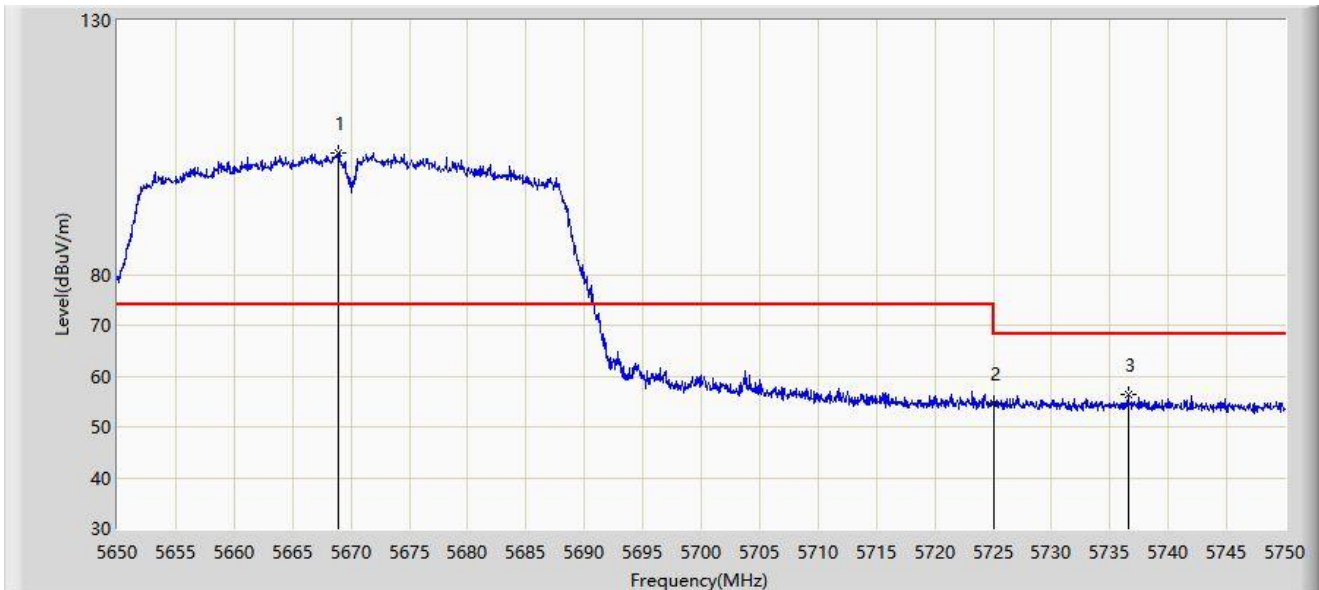


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		*	5668.900	104.047	99.056	N/A	N/A	4.991	PK
2			5725.000	54.688	49.322	-13.512	68.200	5.366	PK
3			5736.550	56.278	50.816	-11.922	68.200	5.462	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/14 - 23:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz	

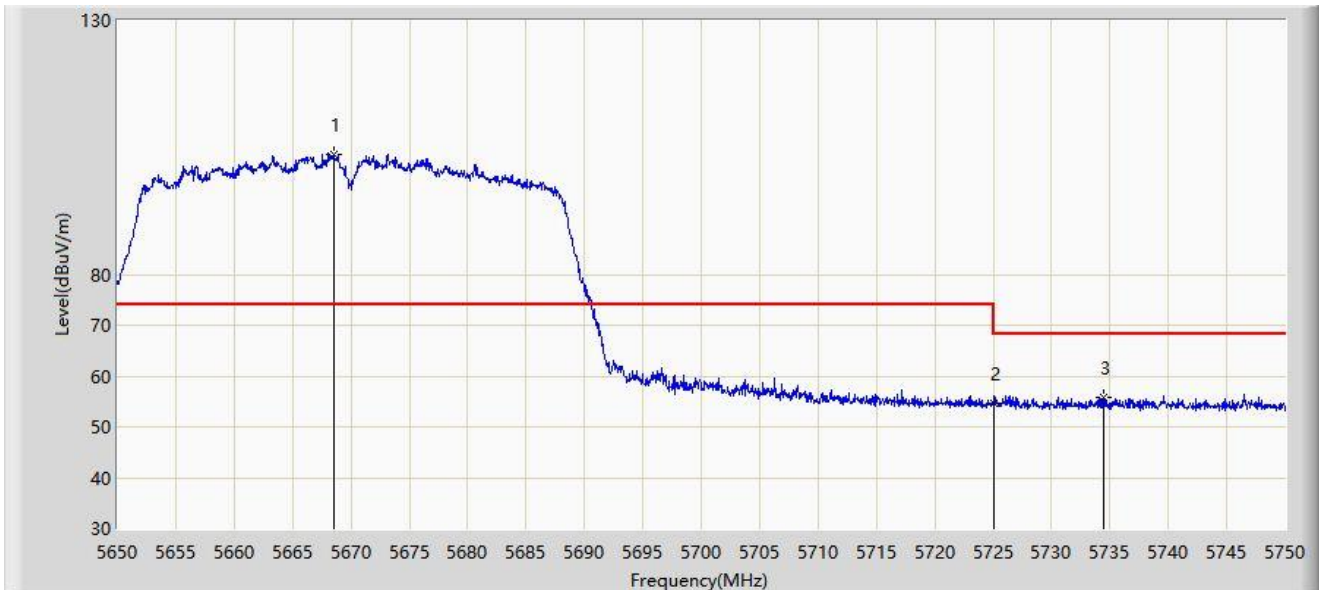


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5668.500	103.760	98.771	N/A	N/A	4.989	PK
2			5725.000	54.677	49.311	-13.523	68.200	5.366	PK
3			5734.450	55.703	50.256	-12.497	68.200	5.447	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/14 - 23:49
Limit: FCC_Part15.407_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz	

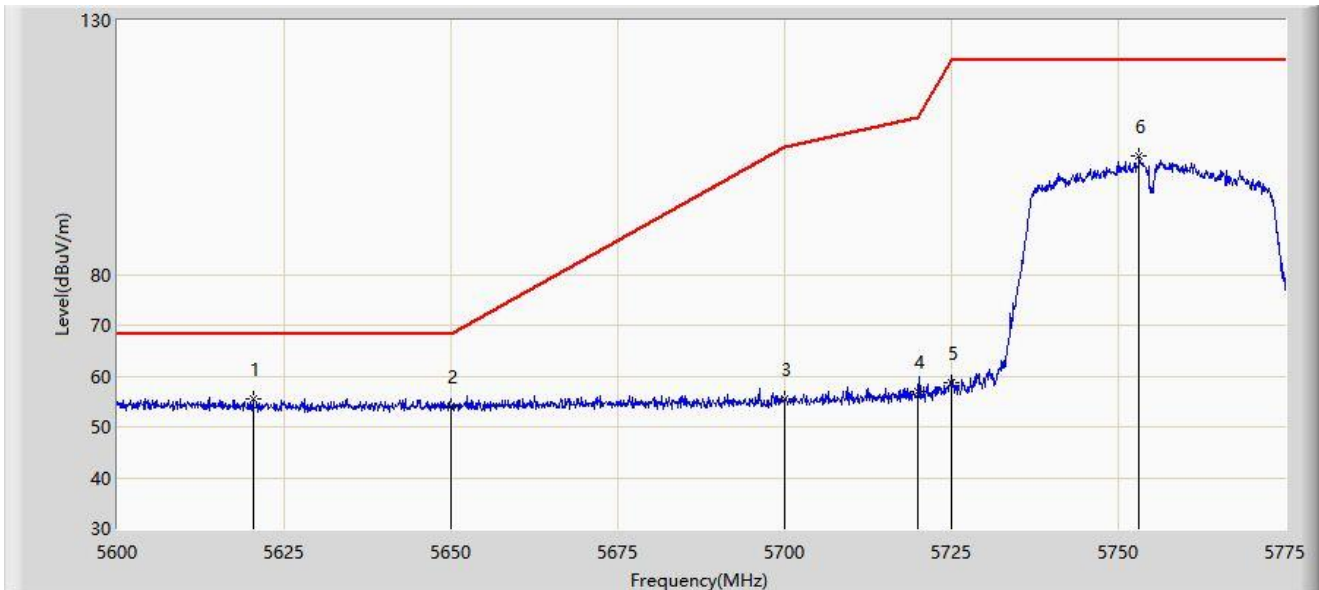


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		*	5620.388	55.404	50.874	-12.796	68.200	4.530	PK
2			5650.000	54.149	49.338	-14.051	68.200	4.810	PK
3			5700.000	55.404	50.410	-49.796	105.200	4.993	PK
4			5720.000	57.083	51.831	-53.717	110.800	5.252	PK
5			5725.000	58.775	53.409	-63.425	122.200	5.366	PK
6			5753.125	103.242	97.846	N/A	N/A	5.396	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/14 - 23:51
Limit: FCC_Part15.407_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz	

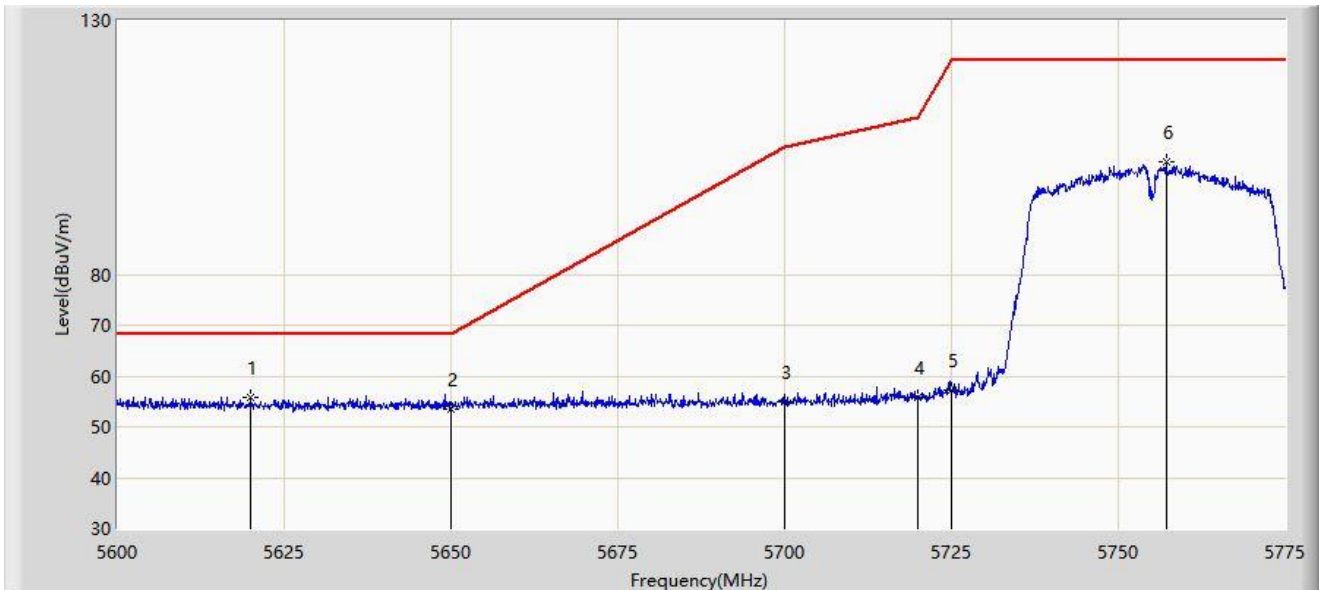


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5620.038	55.721	51.188	-12.479	68.200	4.533	PK
2			5650.000	53.562	48.751	-14.638	68.200	4.810	PK
3			5700.000	54.784	49.790	-50.416	105.200	4.993	PK
4			5720.000	55.700	50.448	-55.100	110.800	5.252	PK
5			5725.000	57.362	51.996	-64.838	122.200	5.366	PK
6			5757.150	102.124	96.776	N/A	N/A	5.348	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/14 - 23:52
Limit: FCC_Part15.407_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz	

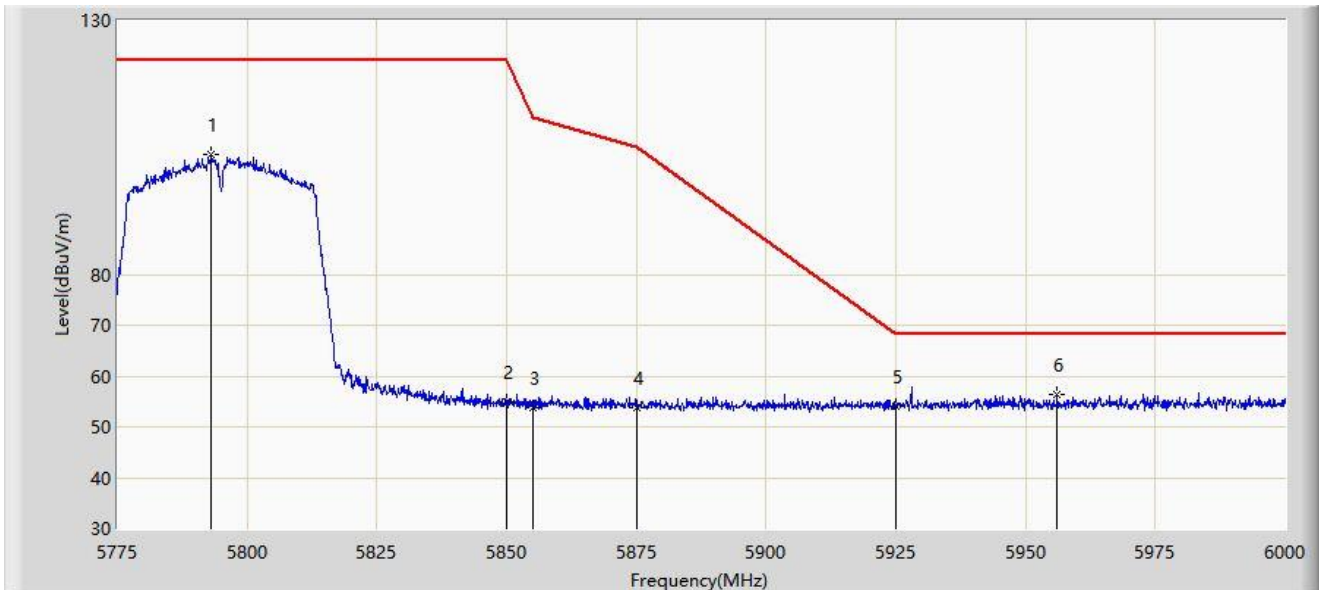


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5793.112	103.489	97.945	N/A	N/A	5.545	PK
2			5850.000	55.026	49.268	-67.174	122.200	5.758	PK
3			5855.000	53.728	47.942	-57.072	110.800	5.787	PK
4			5875.000	53.880	47.976	-51.320	105.200	5.904	PK
5			5925.000	54.154	48.134	-14.046	68.200	6.020	PK
6		*	5956.125	56.275	50.011	-11.925	68.200	6.264	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/14 - 23:54
Limit: FCC_Part15.407_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz	

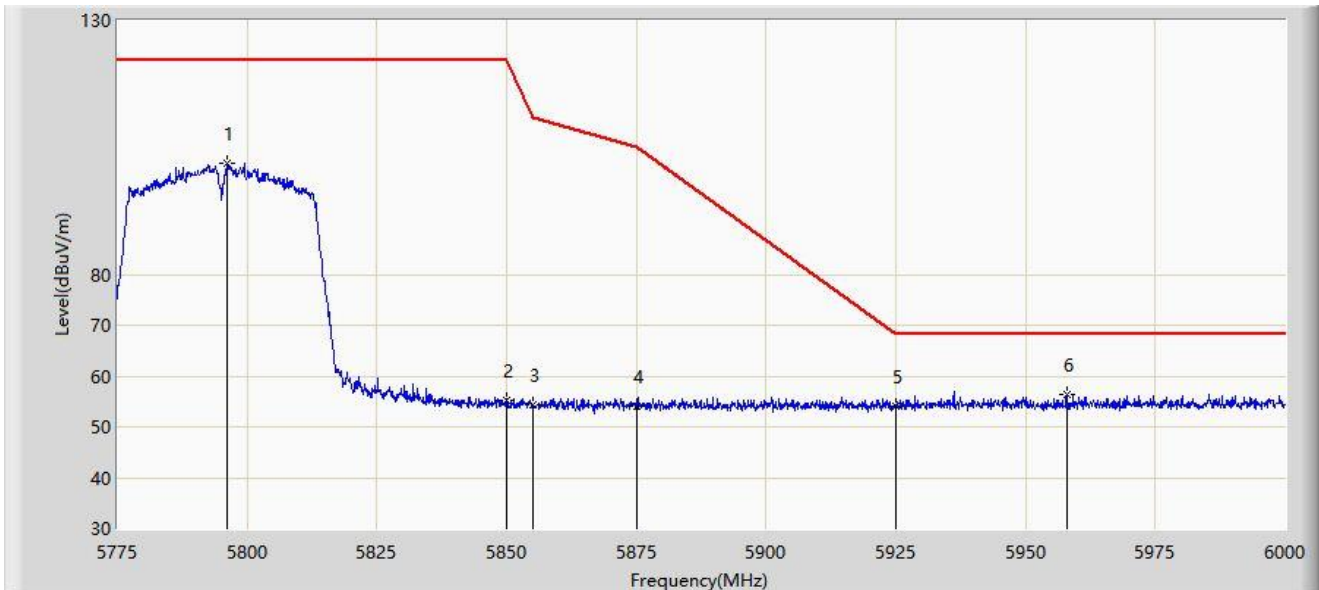


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1			5796.150	102.025	96.432	N/A	N/A	5.593	PK
2			5850.000	55.160	49.402	-67.040	122.200	5.758	PK
3			5855.000	54.416	48.630	-56.384	110.800	5.787	PK
4			5875.000	53.996	48.092	-51.204	105.200	5.904	PK
5			5925.000	54.117	48.097	-14.083	68.200	6.020	PK
6		*	5958.038	56.443	50.192	-11.757	68.200	6.252	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 00:04
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz	

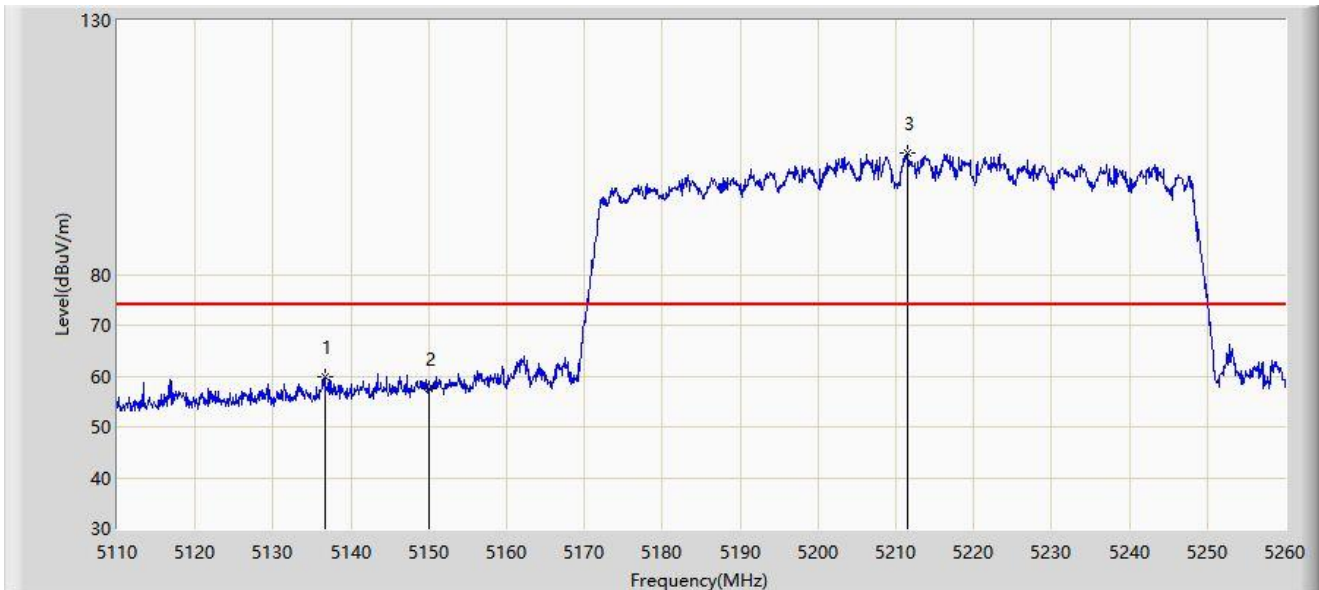


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5136.700	59.814	55.675	-14.186	74.000	4.139	PK
2			5150.000	57.396	53.224	-16.604	74.000	4.173	PK
3		*	5211.475	103.999	100.193	N/A	N/A	3.806	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/14 - 23:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz	

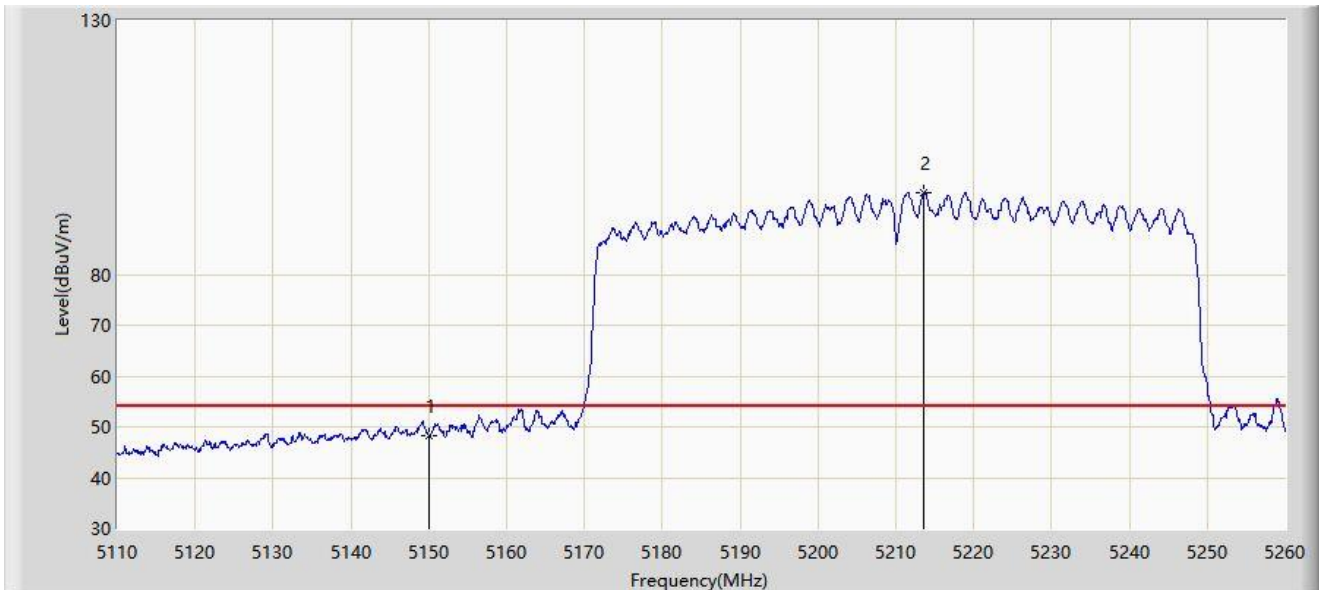


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5150.000	48.278	44.106	-5.722	54.000	4.173	AV
2		*	5213.650	96.077	92.236	N/A	N/A	3.841	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 00:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz	

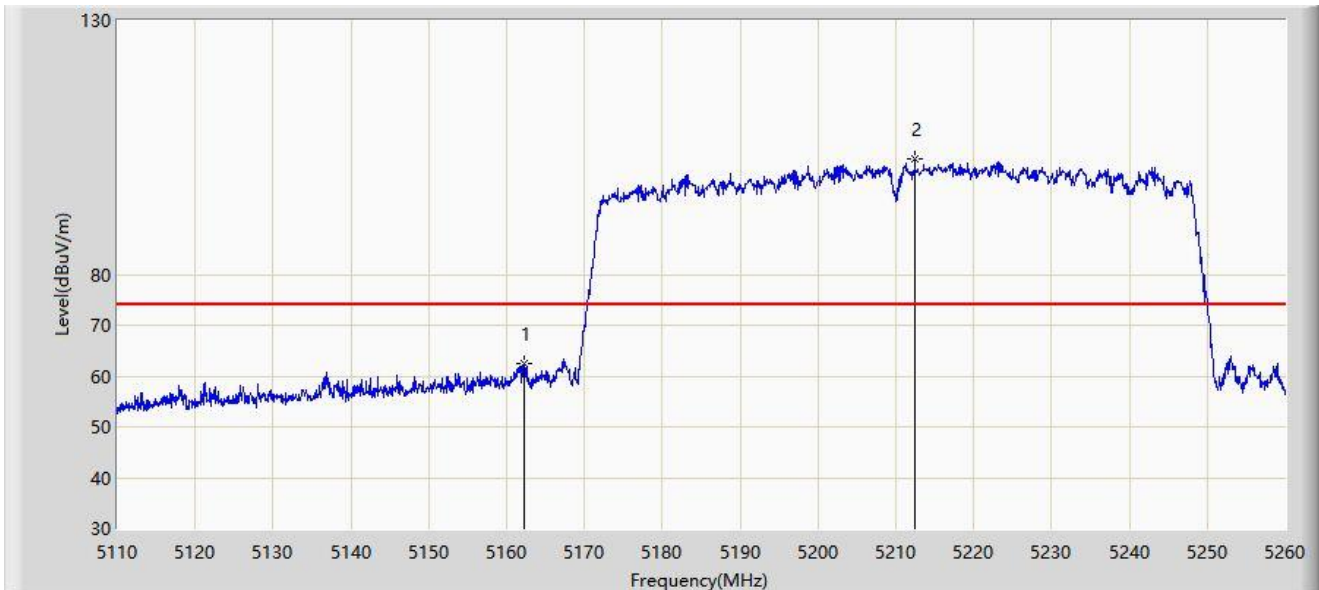


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5162.275	62.459	58.458	-11.541	74.000	4.001	PK
2		*	5212.450	102.868	99.046	N/A	N/A	3.822	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 00:07
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz	

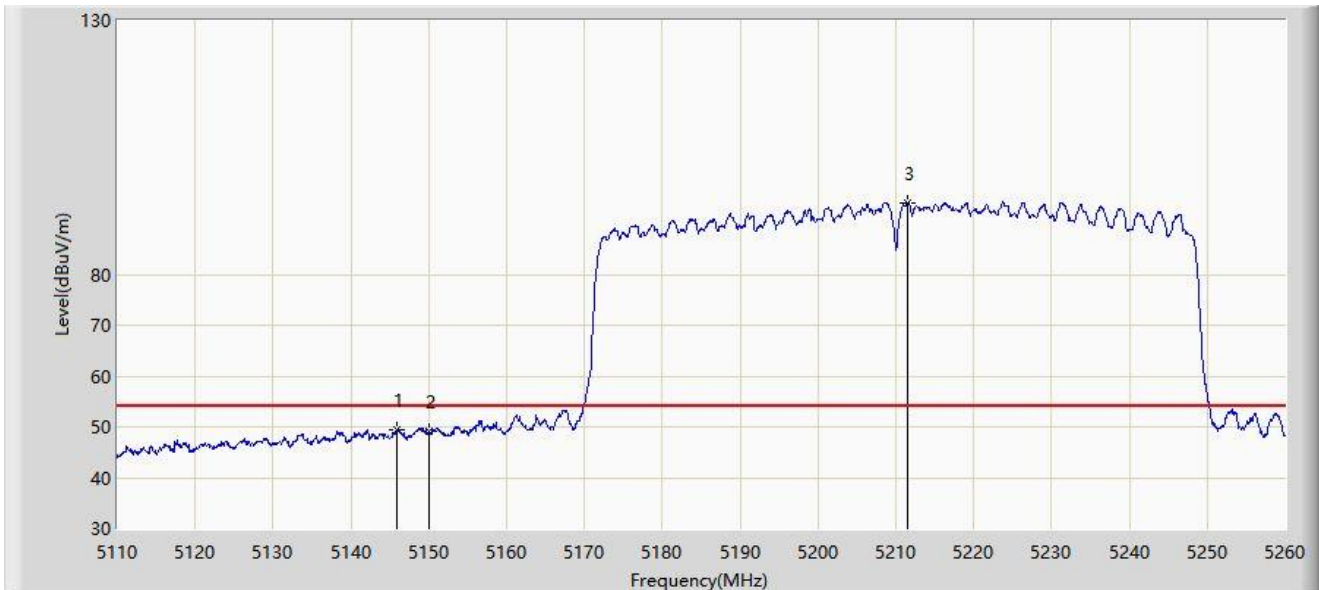


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1			5145.925	49.432	45.236	-4.568	54.000	4.196	AV
2			5150.000	49.033	44.861	-4.967	54.000	4.173	AV
3		*	5211.550	94.137	90.330	N/A	N/A	3.807	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 00:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz	

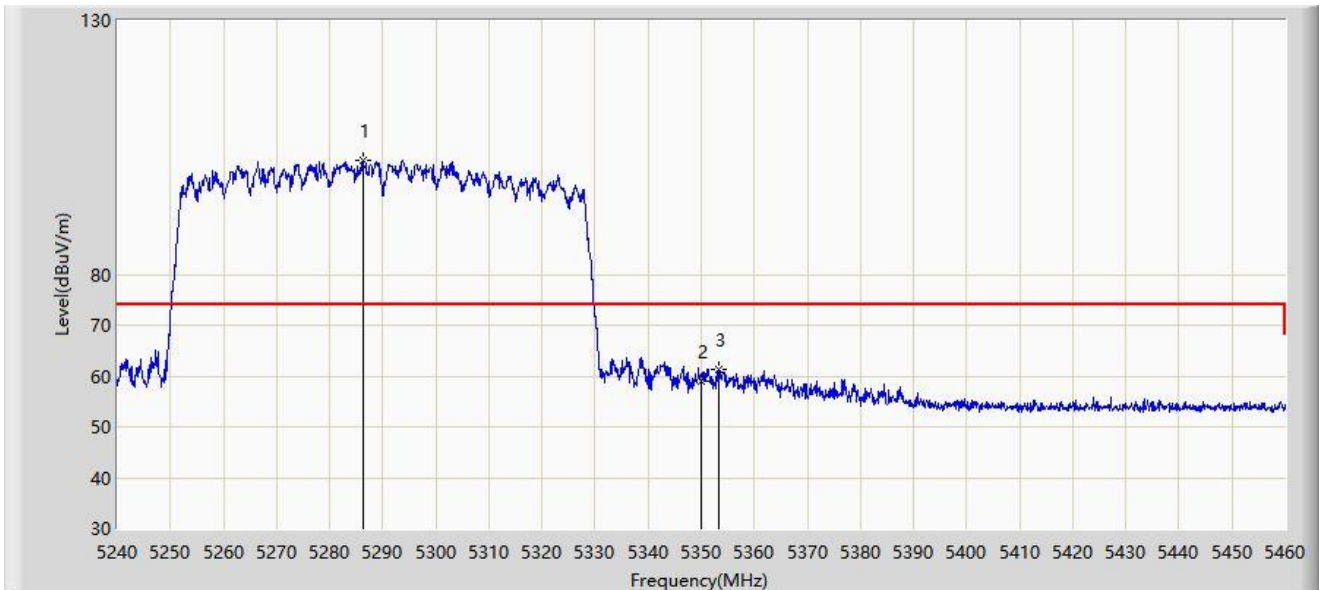


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5286.200	102.408	98.668	N/A	N/A	3.740	PK
2			5350.000	59.113	55.227	-14.887	74.000	3.886	PK
3			5353.190	61.357	57.410	-12.643	74.000	3.947	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 00:08
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz	

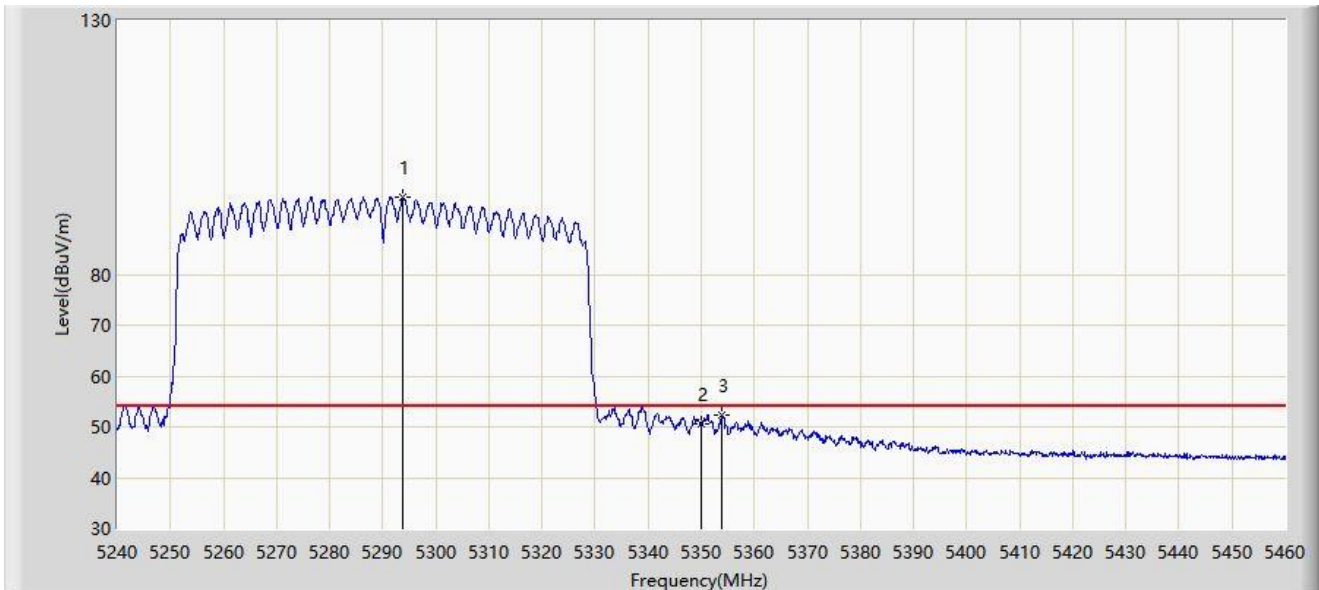


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		*	5293.790	95.235	91.513	N/A	N/A	3.722	AV
2			5350.000	50.439	46.553	-3.561	54.000	3.886	AV
3			5353.960	52.270	48.310	-1.730	54.000	3.960	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 00:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz	

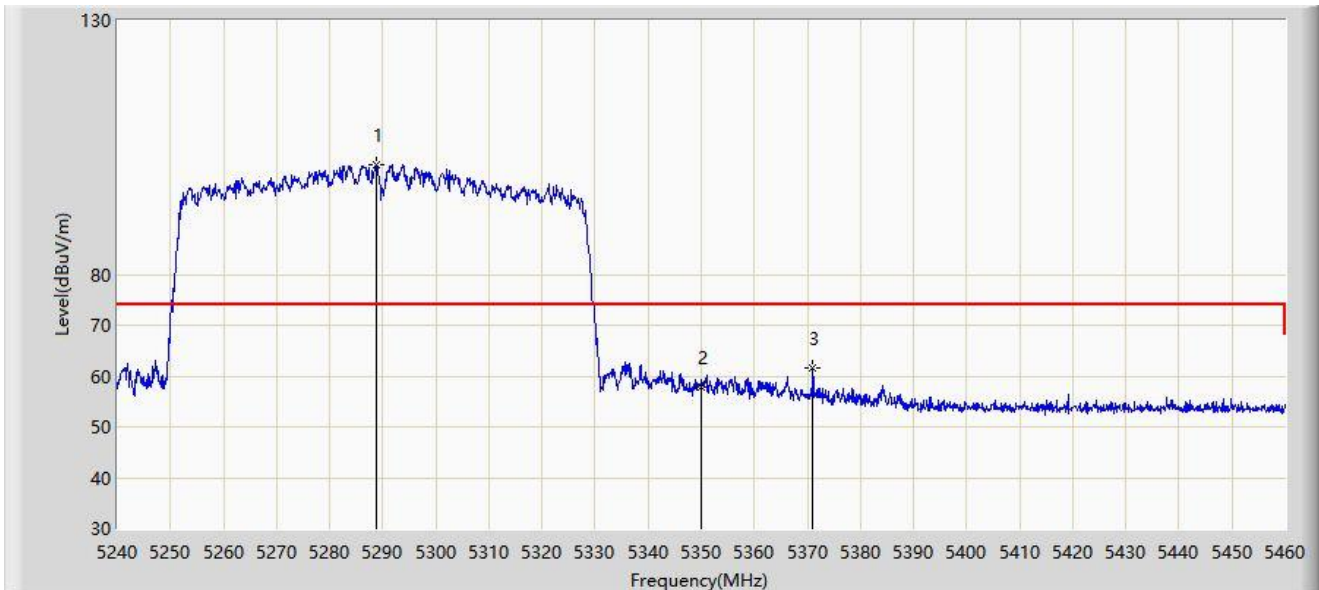


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5288.840	101.714	97.980	N/A	N/A	3.734	PK
2			5350.000	57.934	54.048	-16.066	74.000	3.886	PK
3			5371.010	61.522	57.293	-12.478	74.000	4.229	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 00:13
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz	

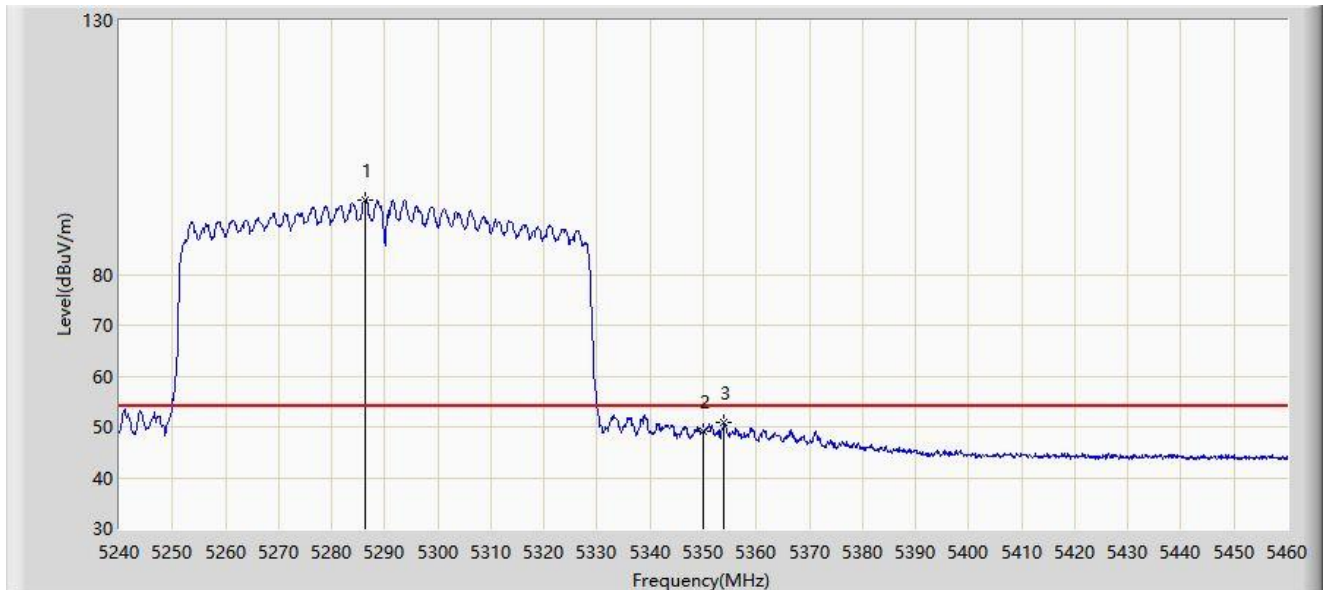


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5286.420	94.772	91.033	N/A	N/A	3.739	AV
2			5350.000	49.235	45.349	-4.765	54.000	3.886	AV
3			5353.960	50.725	46.765	-3.275	54.000	3.960	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 00:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz	

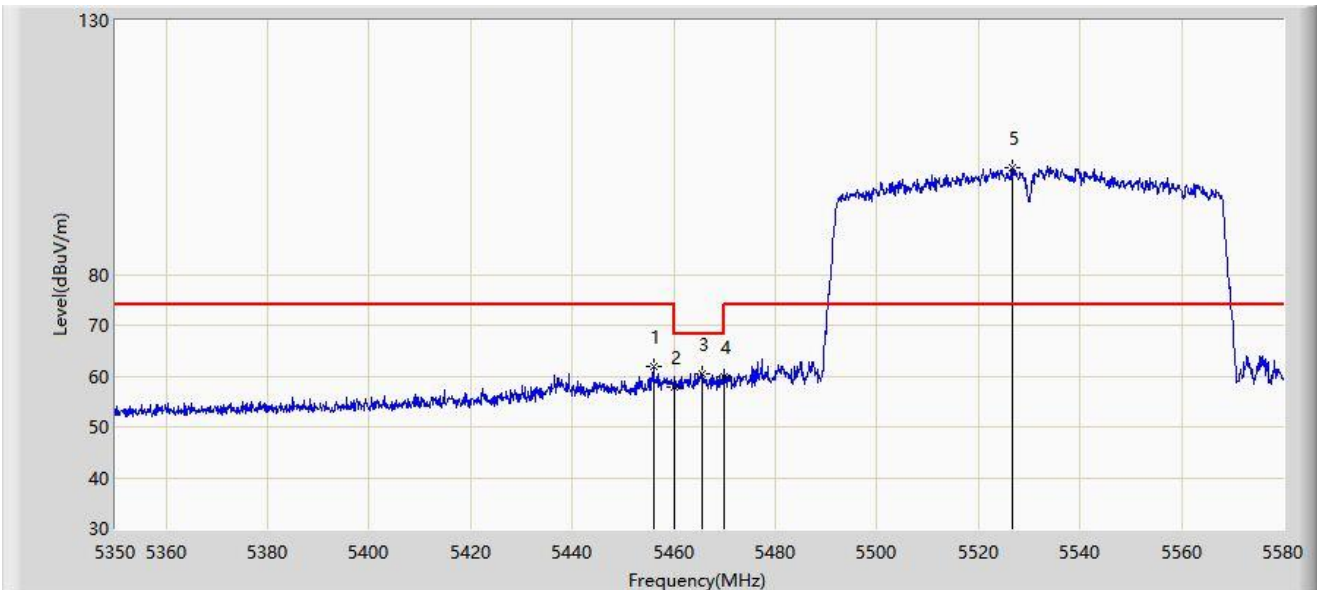


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5456.030	61.889	57.630	-12.111	74.000	4.258	PK
2			5460.000	57.807	53.599	-16.193	74.000	4.208	PK
3			5465.690	60.386	56.248	-7.814	68.200	4.137	PK
4			5470.000	59.885	55.801	-8.315	68.200	4.084	PK
5		*	5526.755	100.884	96.466	N/A	N/A	4.418	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 00:15
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz	

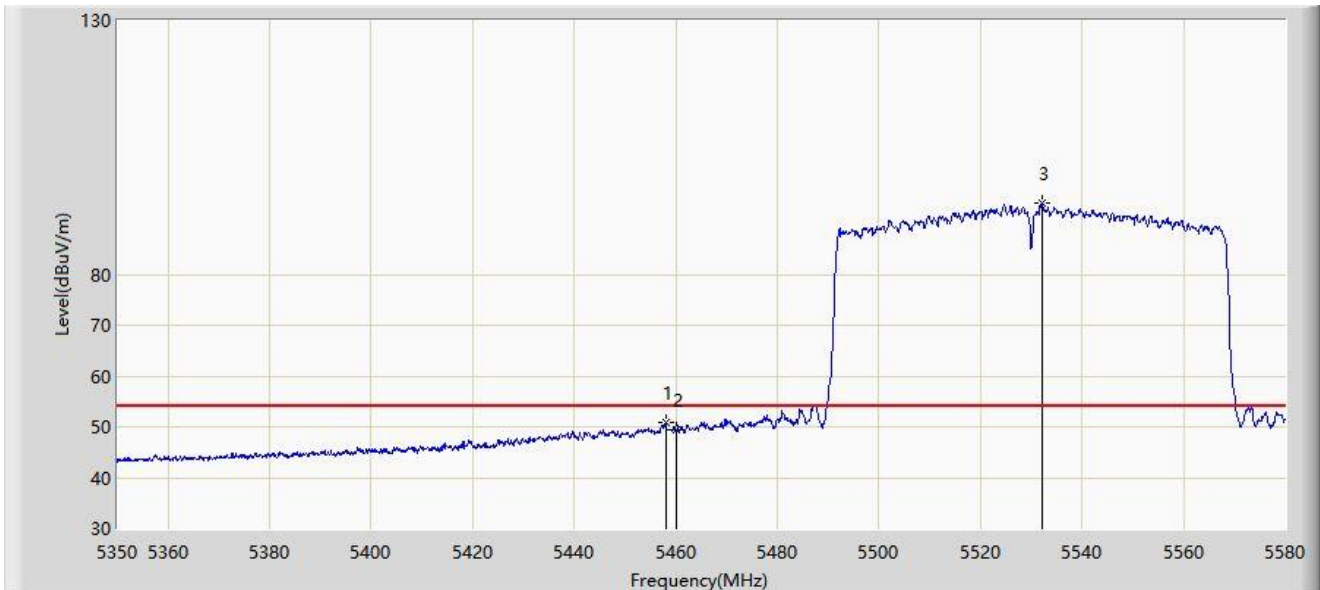


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5457.985	50.778	46.545	-3.222	54.000	4.233	AV
2			5460.000	49.549	45.341	-4.451	54.000	4.208	AV
3		*	5532.160	93.926	89.578	N/A	N/A	4.348	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 00:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz	

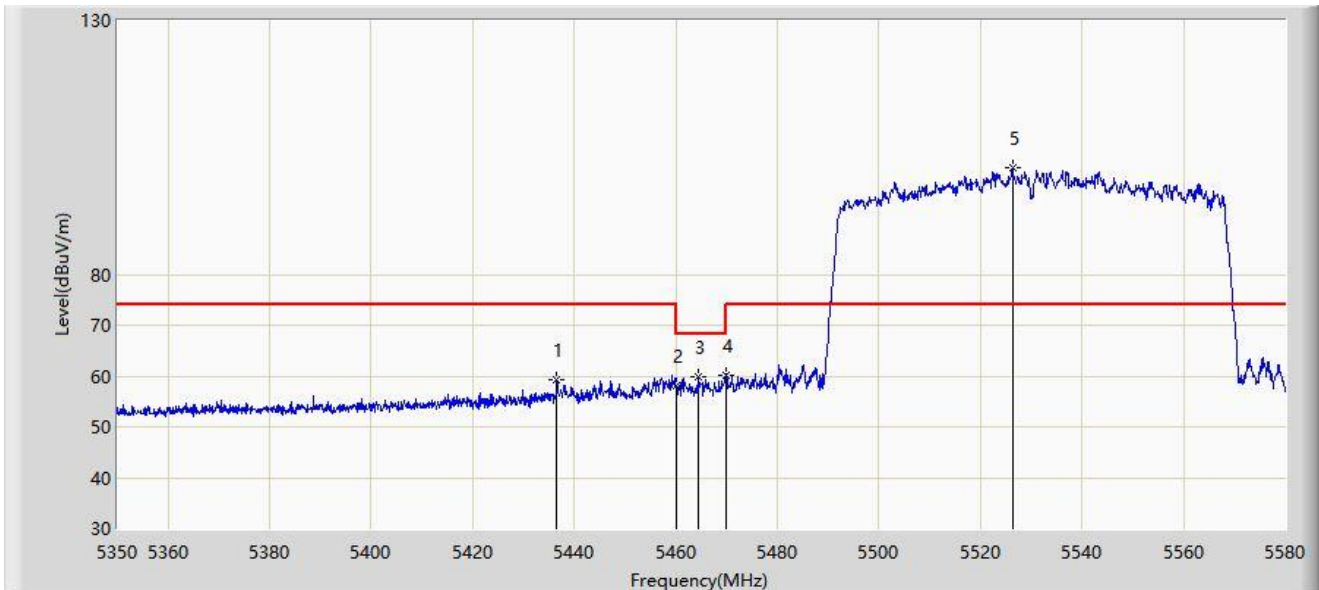


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1			5436.595	59.385	54.977	-14.615	74.000	4.408	PK
2			5460.000	57.986	53.778	-16.014	74.000	4.208	PK
3			5464.425	59.880	55.727	-8.320	68.200	4.154	PK
4			5470.000	60.032	55.948	-8.168	68.200	4.084	PK
5		*	5526.295	100.960	96.539	N/A	N/A	4.421	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 00:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz	

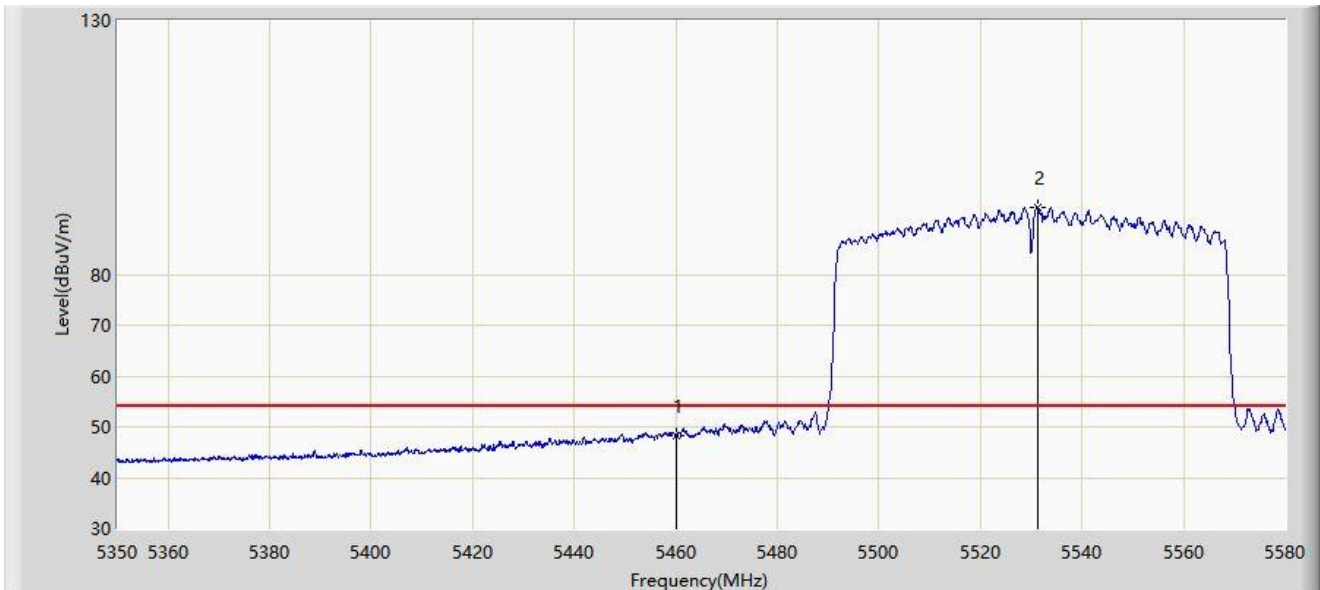


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5460.000	48.201	43.993	-5.799	54.000	4.208	AV
2		*	5531.240	93.277	88.914	N/A	N/A	4.363	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 00:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5610MHz	

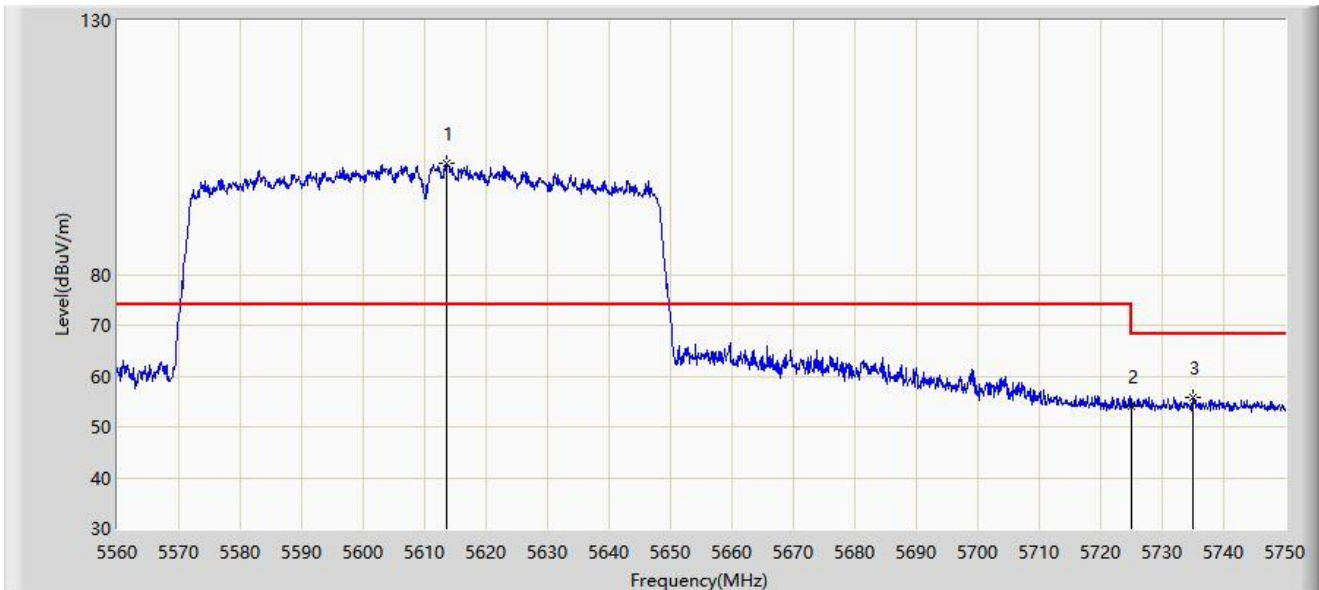


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5613.675	101.923	97.337	N/A	N/A	4.586	PK
2			5725.000	54.116	48.750	-14.084	68.200	5.366	PK
3			5734.895	55.679	50.229	-12.521	68.200	5.451	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 00:22
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5610MHz	

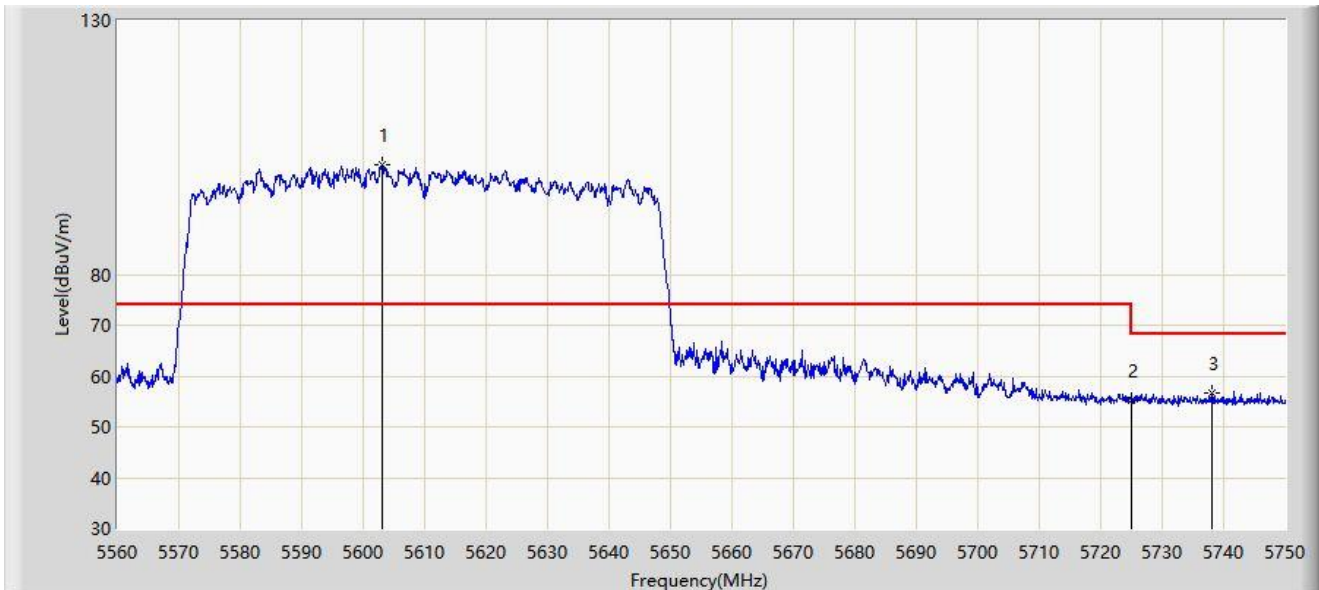


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		*	5603.035	101.604	96.930	N/A	N/A	4.675	PK
2			5725.000	55.165	49.799	-13.035	68.200	5.366	PK
3			5738.030	56.662	51.190	-11.538	68.200	5.472	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 00:39
Limit: FCC_Part15.407_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz	

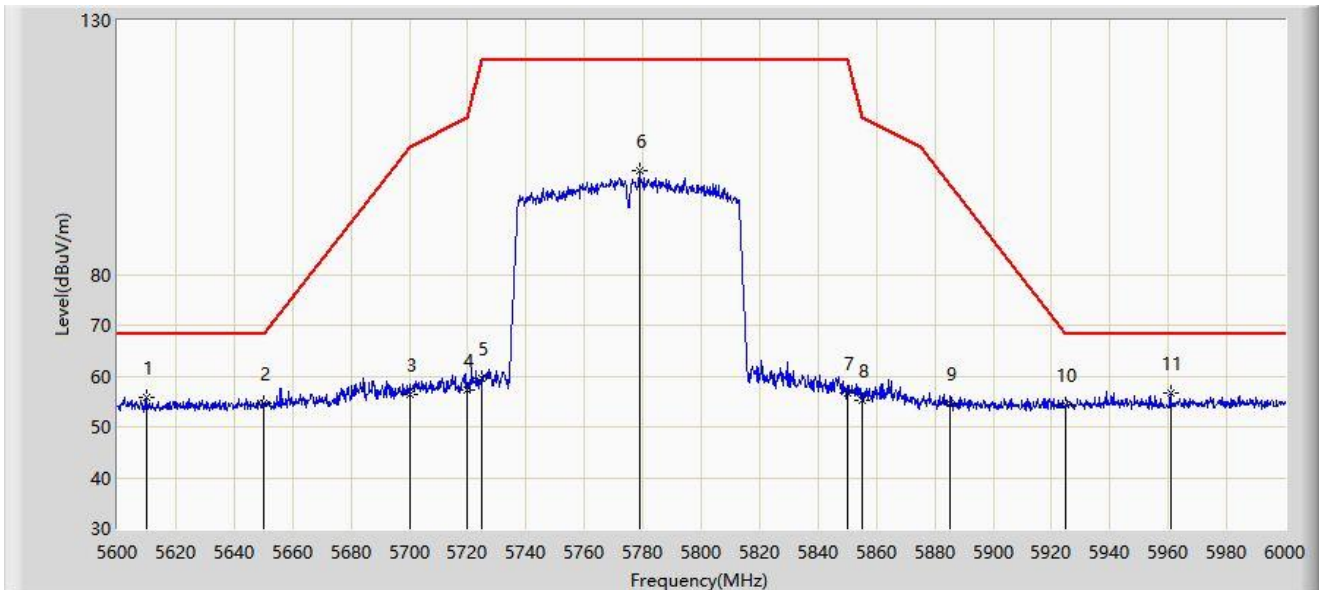


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5610.000	55.901	51.285	-12.299	68.200	4.616	PK
2			5650.000	54.718	49.907	-13.482	68.200	4.810	PK
3			5700.000	56.270	51.276	-48.930	105.200	4.993	PK
4			5720.000	57.345	52.093	-53.455	110.800	5.252	PK
5			5725.000	59.636	54.270	-62.564	122.200	5.366	PK
6			5778.800	100.431	95.118	N/A	N/A	5.314	PK
7			5850.000	56.710	50.952	-65.490	122.200	5.758	PK
8			5855.000	55.235	49.449	-55.565	110.800	5.787	PK
9			5885.000	54.532	48.627	-43.243	97.775	5.905	PK
10			5925.000	54.373	48.353	-13.827	68.200	6.020	PK
11		*	5960.800	56.796	50.559	-11.404	68.200	6.236	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 00:41
Limit: FCC_Part15.407_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz	

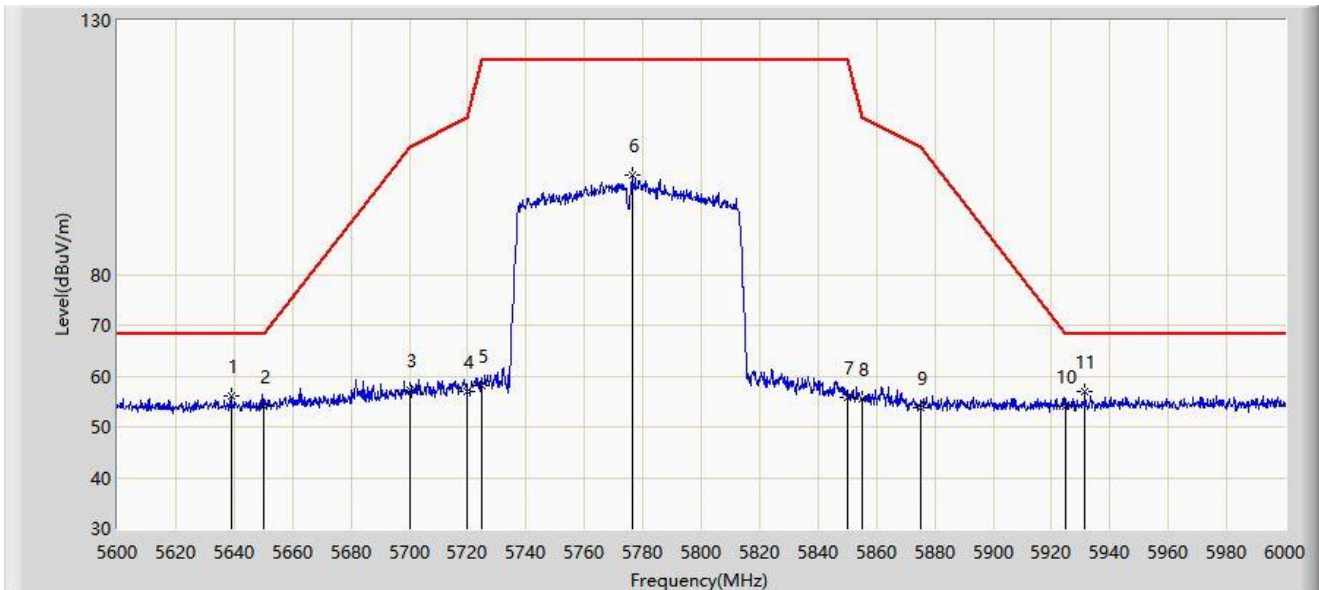


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5639.000	56.194	51.516	-12.006	68.200	4.678	PK
2			5650.000	54.049	49.238	-14.151	68.200	4.810	PK
3			5700.000	57.125	52.131	-48.075	105.200	4.993	PK
4			5720.000	57.067	51.815	-53.733	110.800	5.252	PK
5			5725.000	58.134	52.768	-64.066	122.200	5.366	PK
6			5776.200	99.641	94.349	N/A	N/A	5.292	PK
7			5850.000	55.940	50.182	-66.260	122.200	5.758	PK
8			5855.000	55.414	49.628	-55.386	110.800	5.787	PK
9			5875.000	53.654	47.750	-51.546	105.200	5.904	PK
10			5925.000	54.069	48.049	-14.131	68.200	6.020	PK
11		*	5931.400	56.982	50.853	-11.218	68.200	6.129	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 00:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ax-HE20 at Channel 5180MHz	

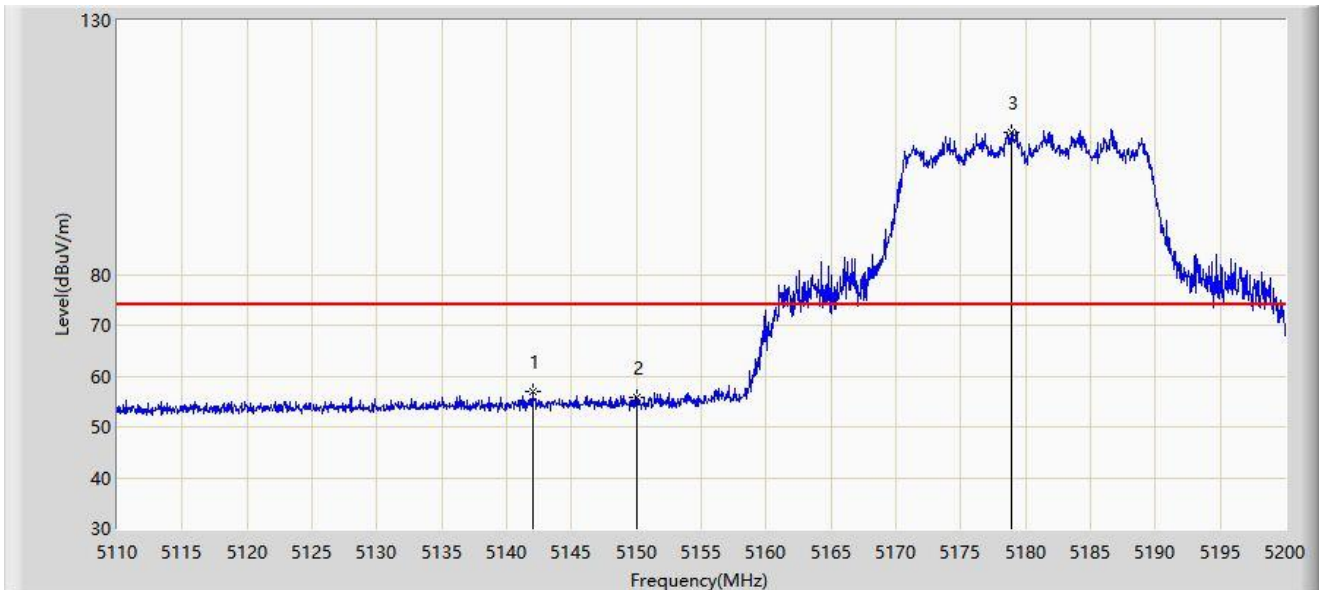

No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1			5141.995	56.918	52.746	-17.082	74.000	4.171	PK
2			5150.000	55.670	51.498	-18.330	74.000	4.173	PK
3		*	5178.895	108.113	104.416	N/A	N/A	3.697	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 00:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ax-HE20 at Channel 5180MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5150.000	44.881	40.709	-9.119	54.000	4.173	AV
2		*	5178.985	98.217	94.522	N/A	N/A	3.695	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 00:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ax-HE20 at Channel 5180MHz	

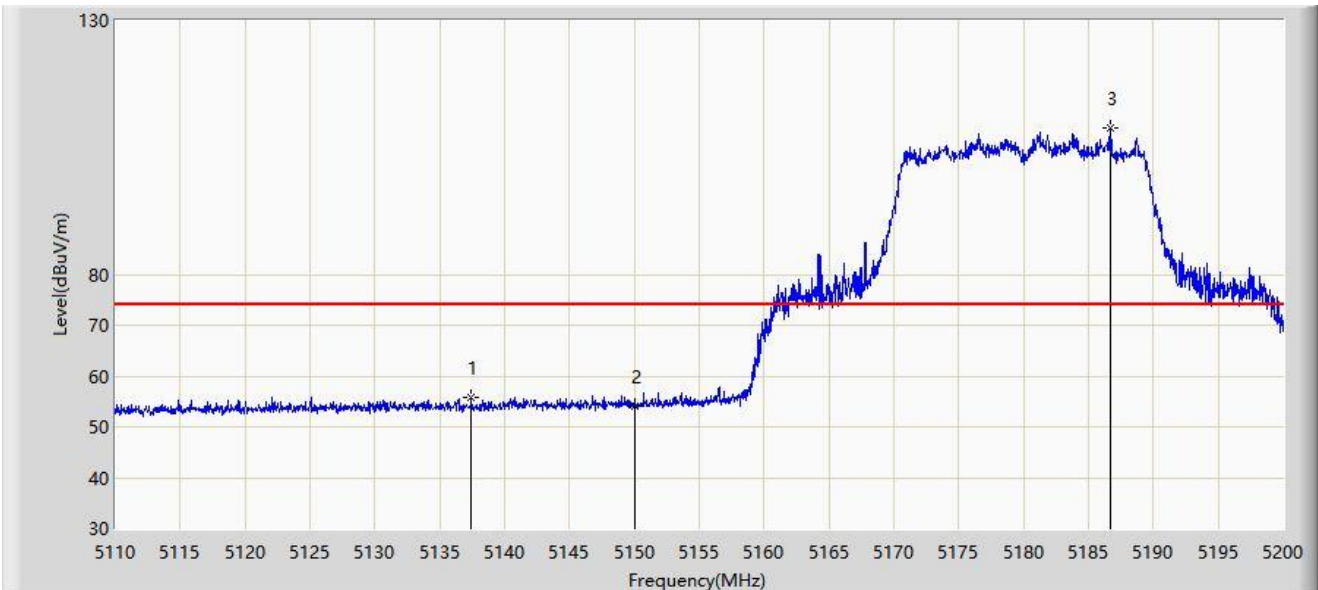

No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5137.450	55.661	51.517	-18.339	74.000	4.144	PK
2			5150.000	54.051	49.879	-19.949	74.000	4.173	PK
3		*	5186.680	108.817	105.195	N/A	N/A	3.621	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 00:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ax-HE20 at Channel 5180MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5150.000	44.745	40.573	-9.255	54.000	4.173	AV
2		*	5181.460	97.992	94.354	N/A	N/A	3.638	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 00:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ax-HE20 at Channel 5320MHz	

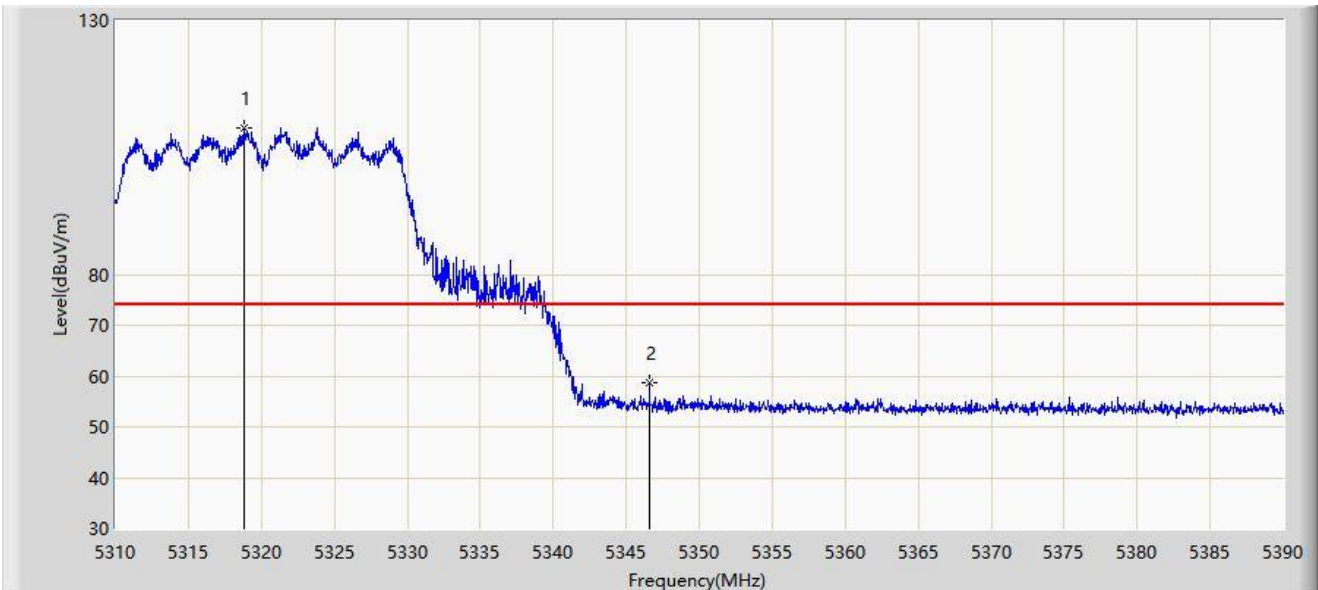


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5318.840	108.787	105.270	N/A	N/A	3.517	PK
2			5346.600	58.627	54.813	-15.373	74.000	3.814	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 00:50
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ax-HE20 at Channel 5320MHz	

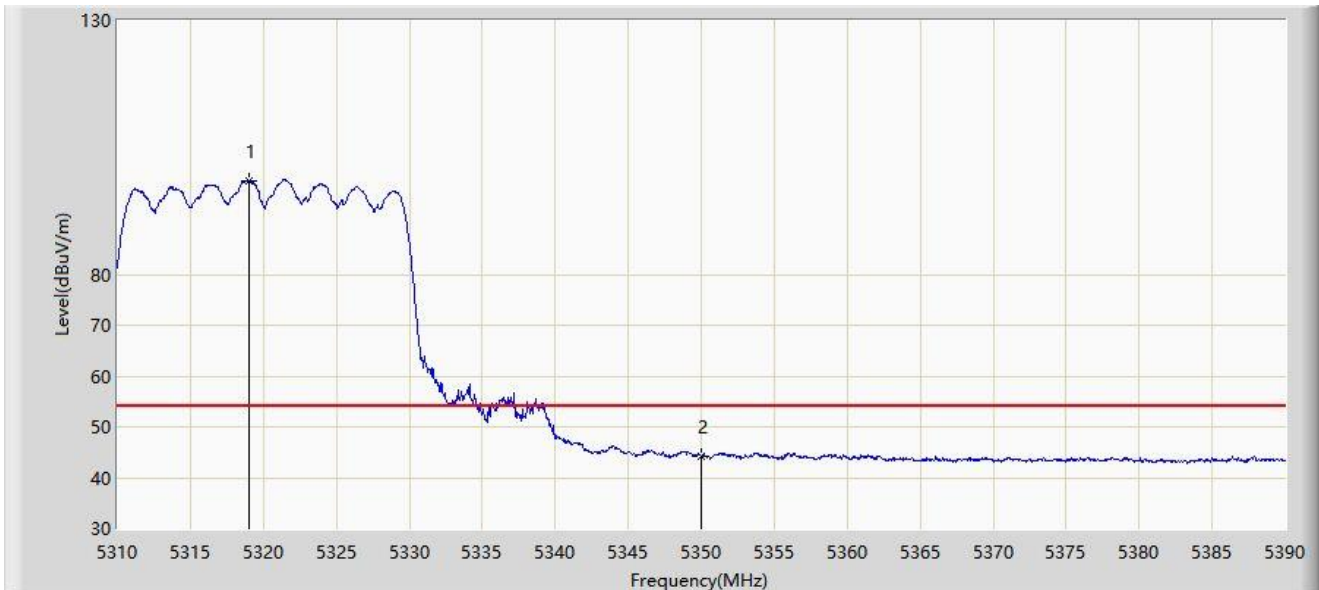


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5319.040	98.516	94.998	N/A	N/A	3.518	AV
2			5350.000	44.272	40.386	-9.728	54.000	3.886	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 00:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ax-HE20 at Channel 5320MHz	

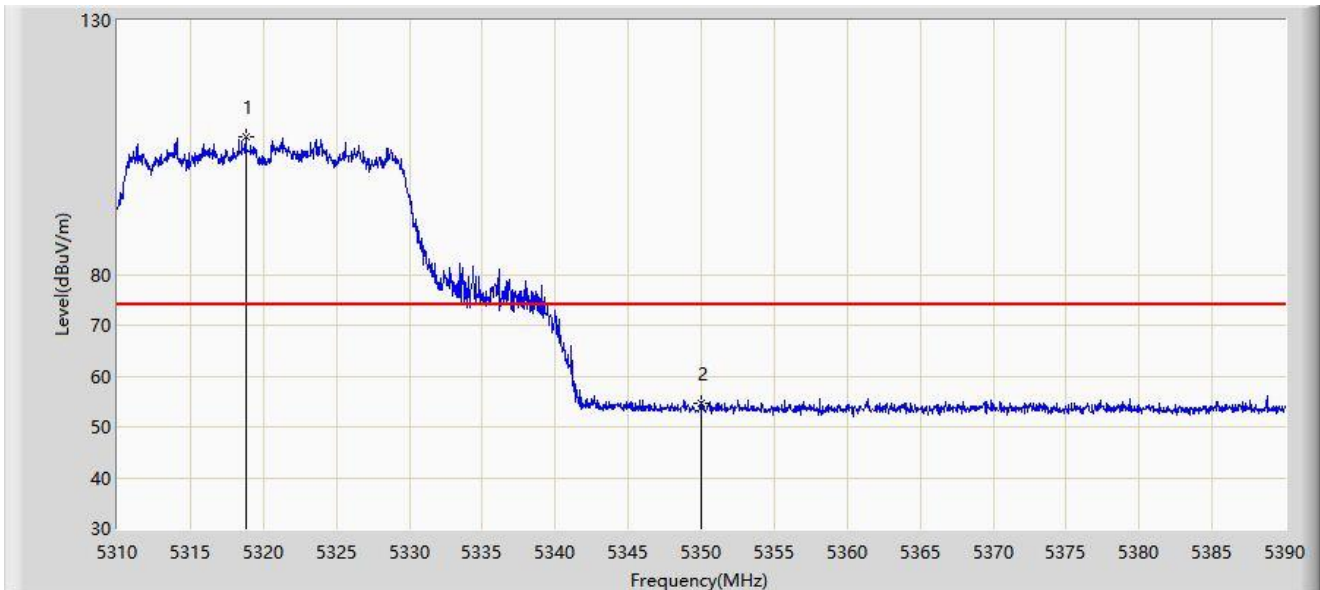

No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5318.800	106.972	103.455	N/A	N/A	3.517	PK
2			5350.000	54.498	50.612	-19.502	74.000	3.886	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 00:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ax-HE20 at Channel 5320MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5320.960	96.933	93.409	N/A	N/A	3.524	AV
2			5350.000	43.254	39.368	-10.746	54.000	3.886	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 00:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ax-HE20 at Channel 5500MHz	

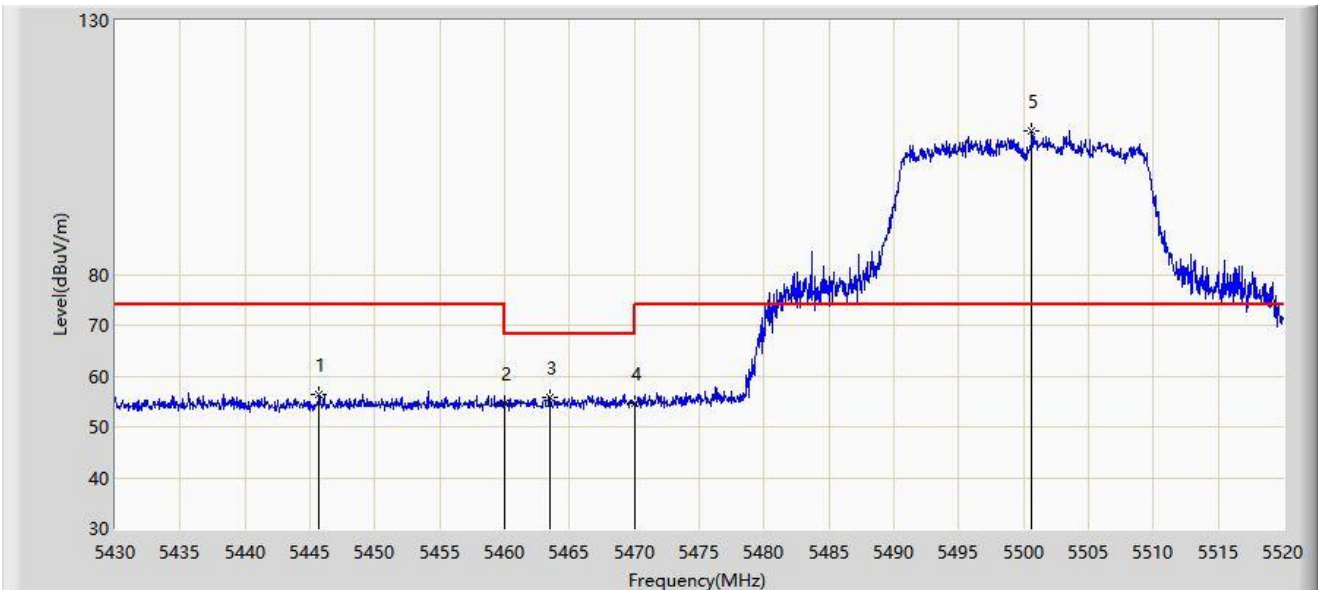


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5445.705	56.393	52.044	-17.607	74.000	4.348	PK
2			5460.000	54.633	50.425	-19.367	74.000	4.208	PK
3			5463.525	55.934	51.770	-12.266	68.200	4.165	PK
4			5470.000	54.597	50.513	-13.603	68.200	4.084	PK
5		*	5500.650	108.169	103.806	N/A	N/A	4.364	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 00:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ax-HE20 at Channel 5500MHz	

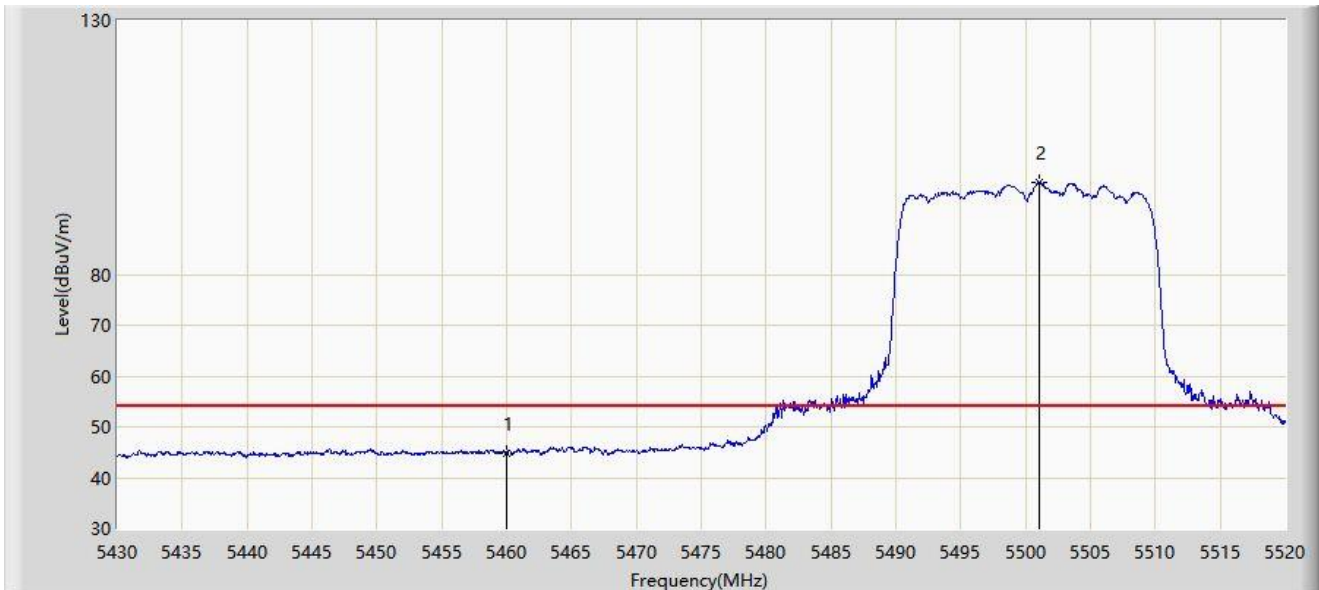


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5460.000	44.855	40.647	-9.145	54.000	4.208	AV
2		*	5501.100	98.170	93.800	N/A	N/A	4.369	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 00:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ax-HE20 at Channel 5500MHz	

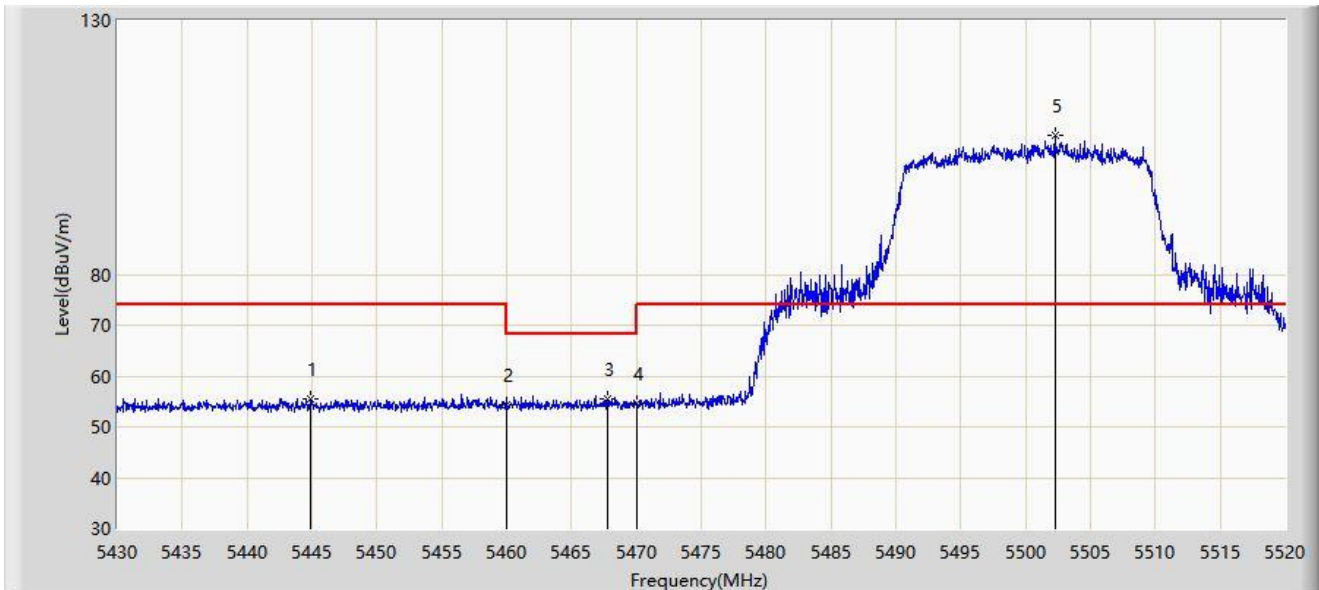


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1			5444.940	55.446	51.092	-18.554	74.000	4.354	PK
2			5460.000	54.272	50.064	-19.728	74.000	4.208	PK
3			5467.755	55.639	51.527	-12.561	68.200	4.112	PK
4			5470.000	54.653	50.569	-13.547	68.200	4.084	PK
5		*	5502.270	107.290	102.904	N/A	N/A	4.386	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 01:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ax-HE20 at Channel 5500MHz	

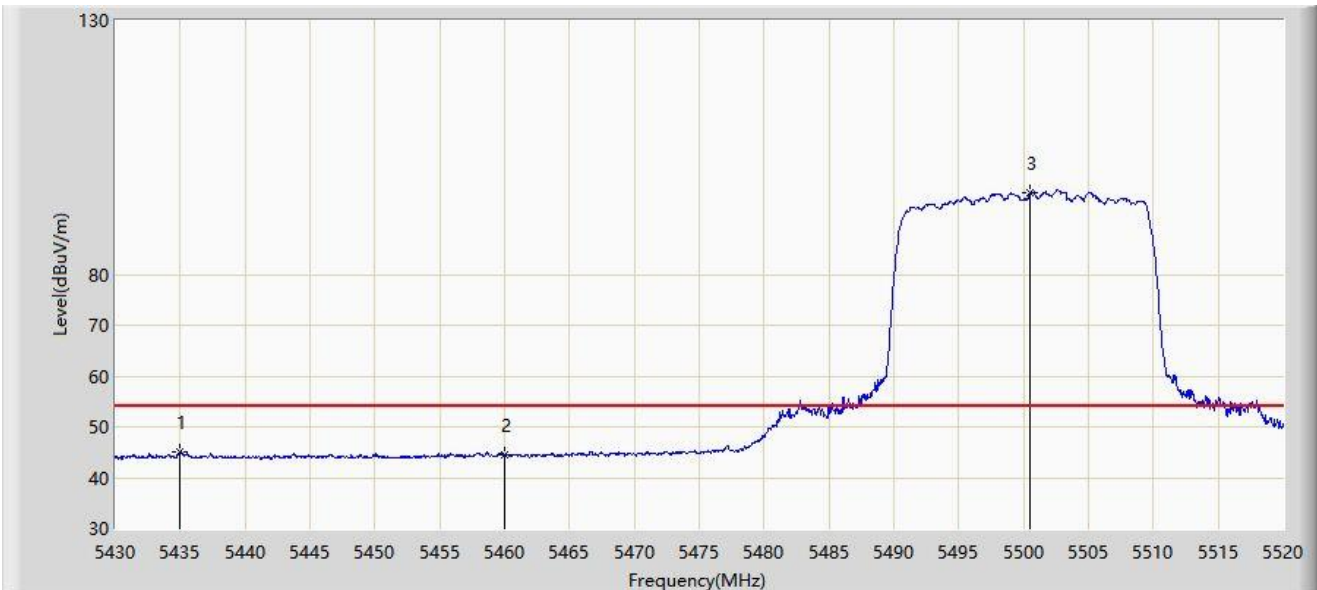


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5434.995	45.033	40.636	-8.967	54.000	4.397	AV
2			5460.000	44.355	40.147	-9.645	54.000	4.208	AV
3		*	5500.515	96.000	91.639	N/A	N/A	4.361	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 01:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ax-HE20 at Channel 5700MHz	

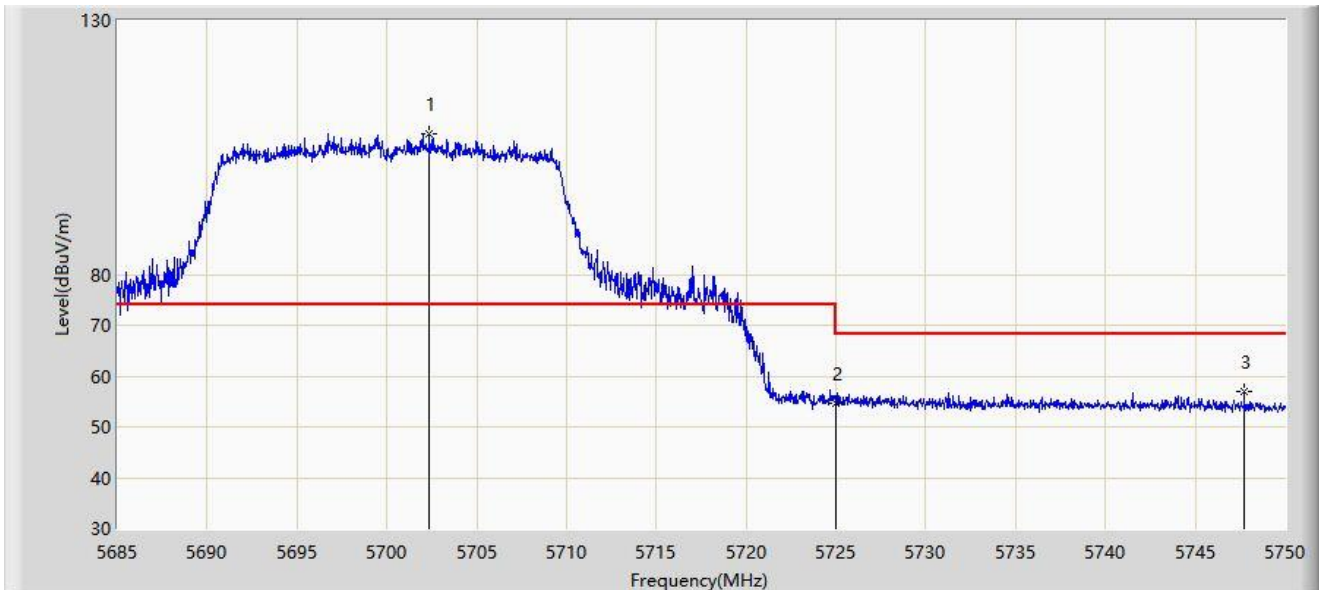


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5702.388	107.565	102.571	N/A	N/A	4.994	PK
2			5725.000	54.661	49.295	-13.539	68.200	5.366	PK
3			5747.725	56.911	51.450	-11.289	68.200	5.461	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 01:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ax-HE20 at Channel 5700MHz	

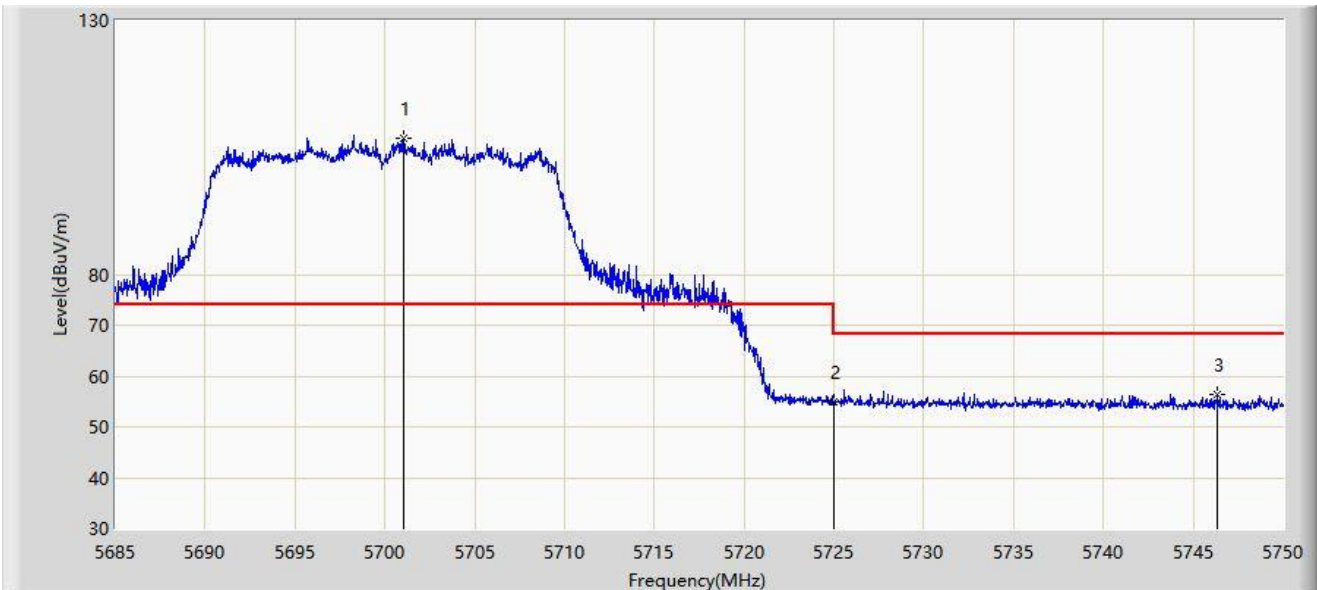


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5701.055	106.893	101.899	N/A	N/A	4.994	PK
2			5725.000	54.917	49.551	-13.283	68.200	5.366	PK
3			5746.328	56.386	50.908	-11.814	68.200	5.478	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 01:05
Limit: FCC_Part15.407_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ax-HE20 at Channel 5745MHz	

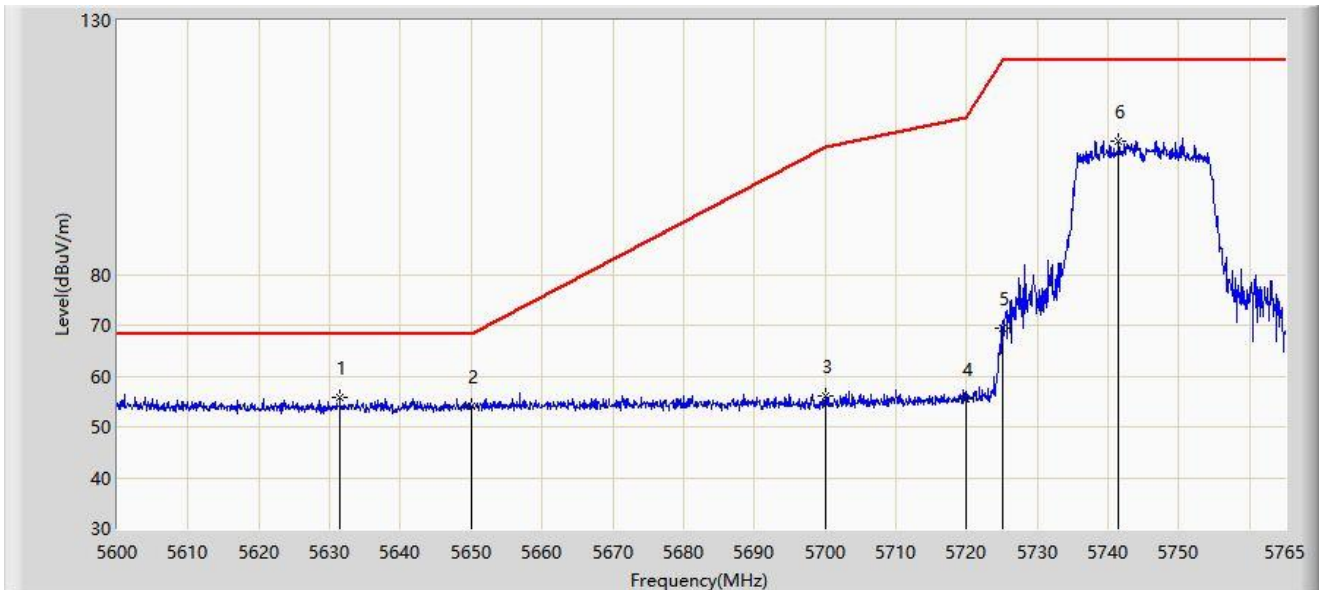


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		*	5631.433	55.713	51.120	-12.487	68.200	4.593	PK
2			5650.000	54.038	49.227	-14.162	68.200	4.810	PK
3			5700.000	55.986	50.992	-49.214	105.200	4.993	PK
4			5720.000	55.470	50.218	-55.330	110.800	5.252	PK
5			5725.000	69.488	64.122	-52.712	122.200	5.366	PK
6			5741.487	106.313	100.817	N/A	N/A	5.495	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 01:07
Limit: FCC_Part15.407_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ax-HE20 at Channel 5745MHz	

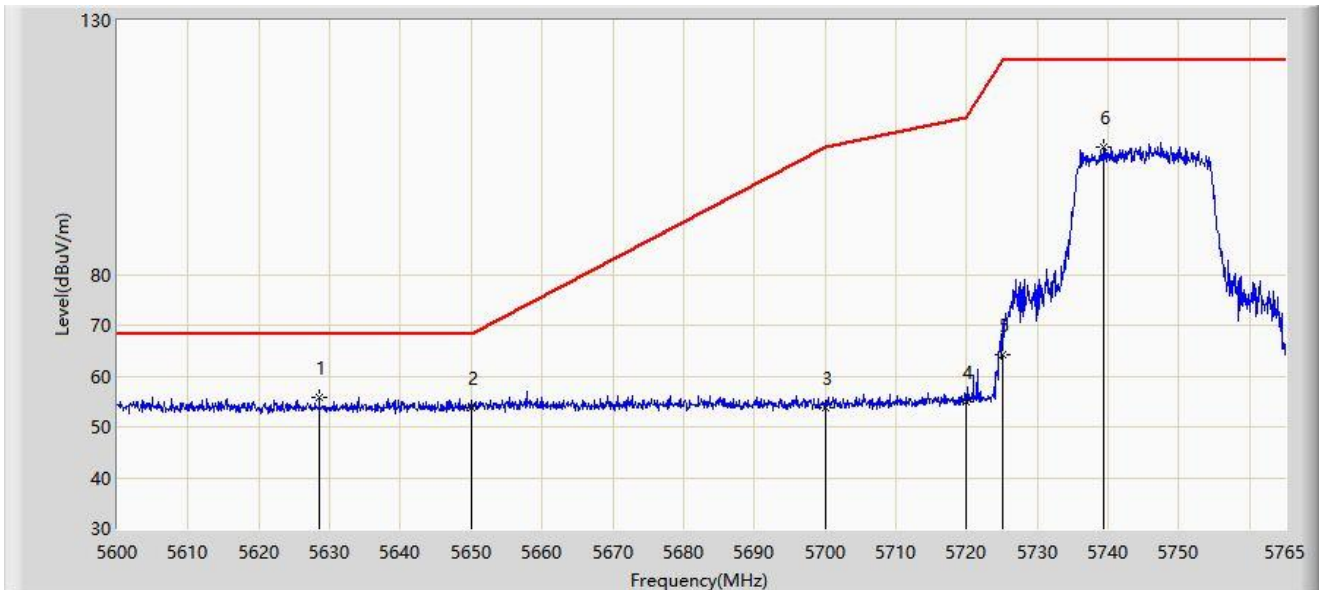


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		*	5628.545	55.658	51.102	-12.542	68.200	4.556	PK
2			5650.000	53.649	48.838	-14.551	68.200	4.810	PK
3			5700.000	53.732	48.738	-51.468	105.200	4.993	PK
4			5720.000	54.936	49.684	-55.864	110.800	5.252	PK
5			5725.000	64.065	58.699	-58.135	122.200	5.366	PK
6			5739.425	105.074	99.592	N/A	N/A	5.482	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 01:07
Limit: FCC_Part15.407_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ax-HE20 at Channel 5825MHz	

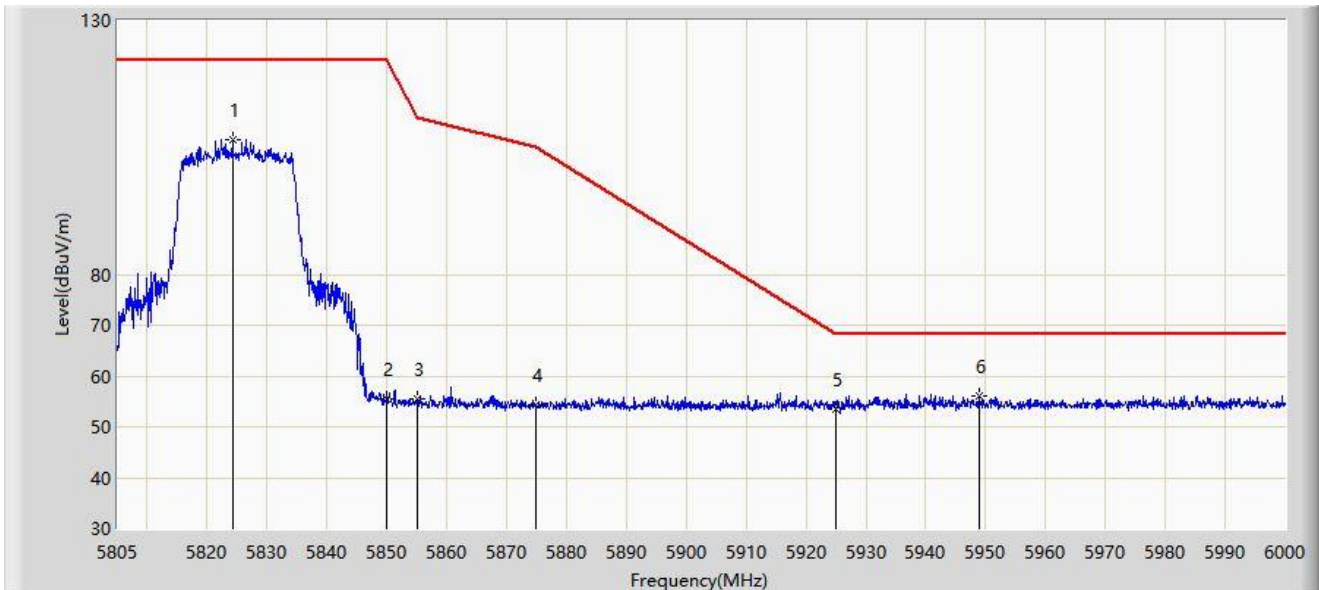


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1			5824.208	106.571	100.863	N/A	N/A	5.707	PK
2			5850.000	55.470	49.712	-66.730	122.200	5.758	PK
3			5855.000	55.425	49.639	-55.375	110.800	5.787	PK
4			5875.000	54.332	48.428	-50.868	105.200	5.904	PK
5			5925.000	53.614	47.594	-14.586	68.200	6.020	PK
6		*	5948.812	56.010	49.695	-12.190	68.200	6.314	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 01:09
Limit: FCC_Part15.407_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ax-HE20 at Channel 5825MHz	

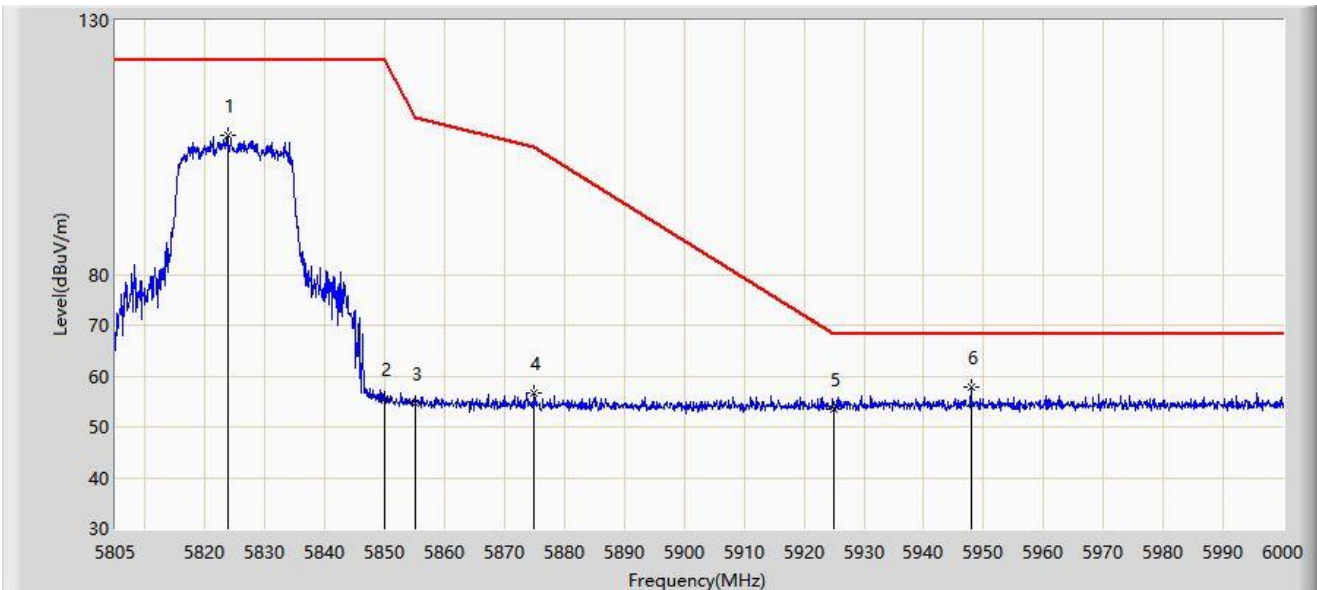


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5823.720	107.512	101.803	N/A	N/A	5.709	PK
2			5850.000	55.533	49.775	-66.667	122.200	5.758	PK
3			5855.000	54.608	48.822	-56.192	110.800	5.787	PK
4			5875.000	56.593	50.689	-48.607	105.200	5.904	PK
5			5925.000	53.564	47.544	-14.636	68.200	6.020	PK
6		*	5947.837	57.734	51.412	-10.466	68.200	6.322	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 21:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ax-HE40 at Channel 5190MHz	

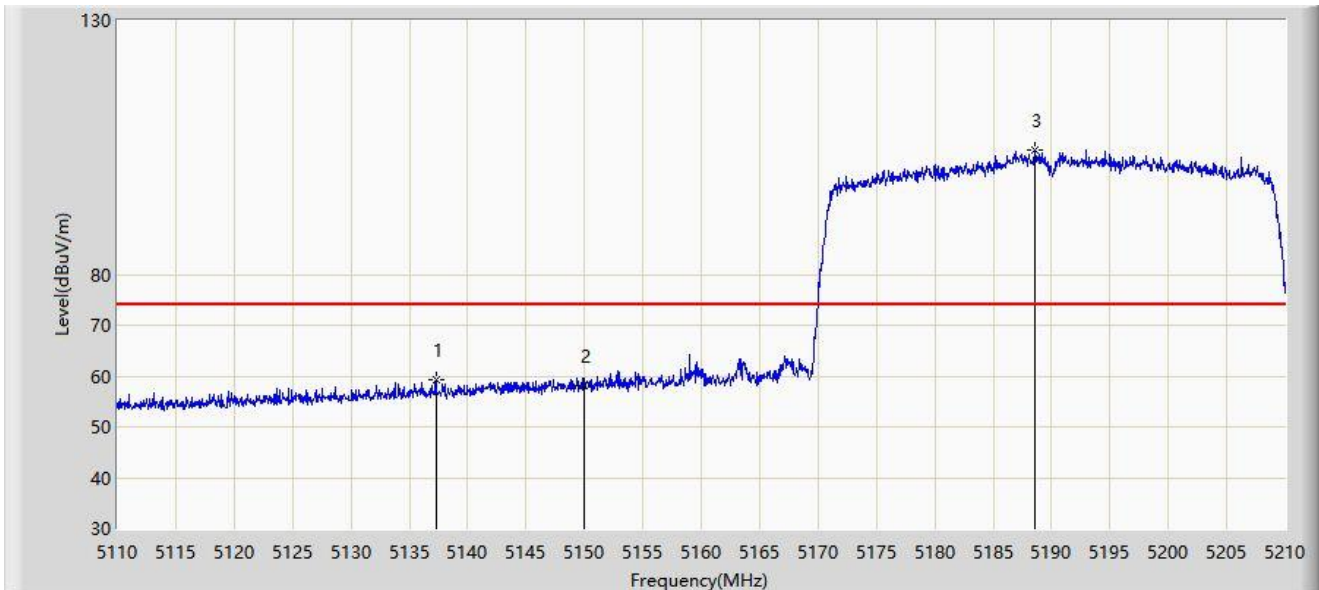


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5137.300	59.185	55.042	-14.815	74.000	4.143	PK
2			5150.000	58.082	53.910	-15.918	74.000	4.173	PK
3		*	5188.600	104.507	100.883	N/A	N/A	3.624	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 20:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ax-HE40 at Channel 5190MHz	

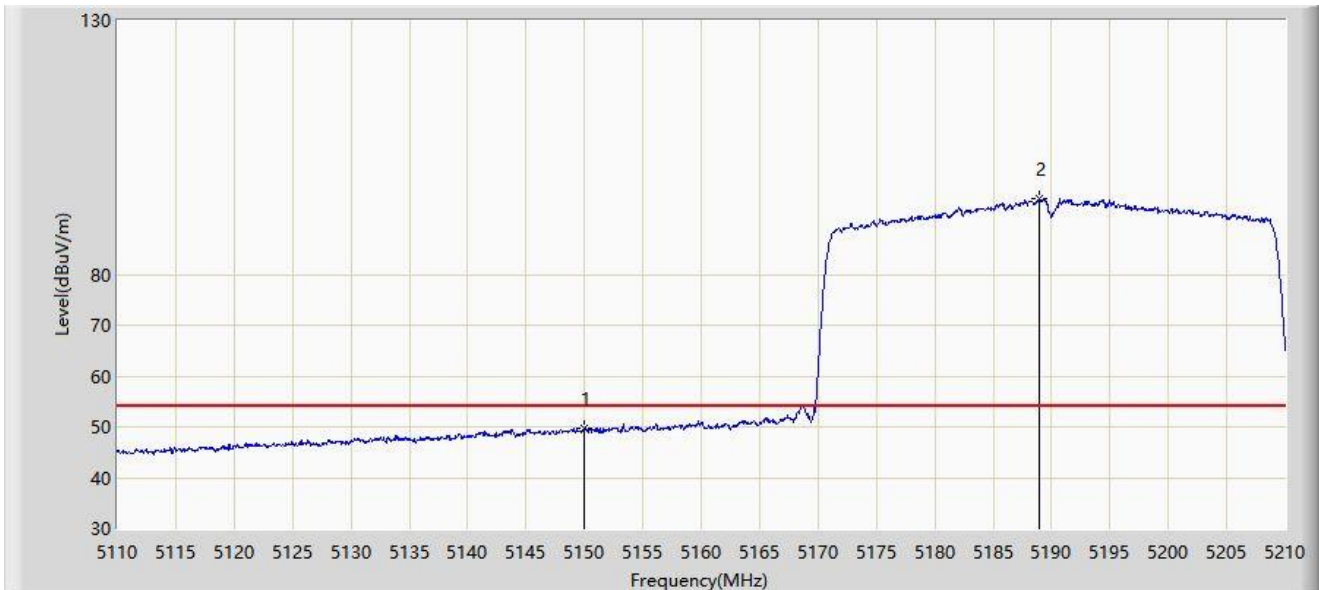


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5150.000	49.744	45.572	-4.256	54.000	4.173	AV
2		*	5189.000	94.990	91.365	N/A	N/A	3.625	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 21:04
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ax-HE40 at Channel 5190MHz	

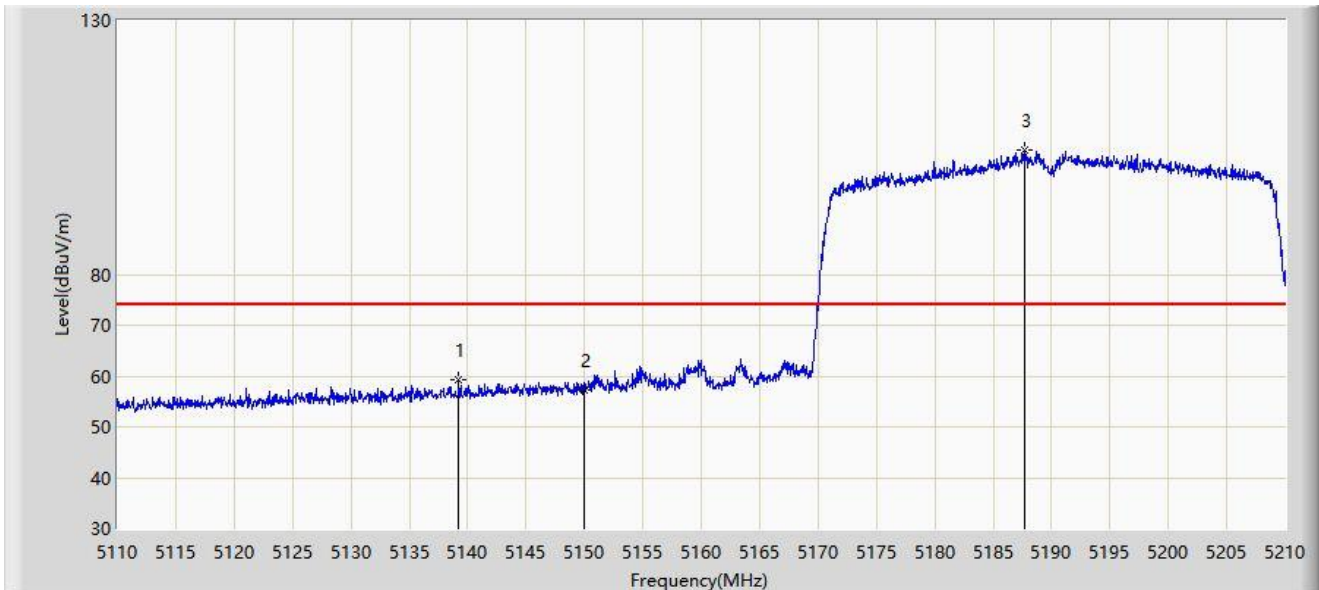


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5139.250	59.296	55.141	-14.704	74.000	4.154	PK
2			5150.000	57.210	53.038	-16.790	74.000	4.173	PK
3		*	5187.650	104.467	100.845	N/A	N/A	3.622	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 21:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ax-HE40 at Channel 5190MHz	

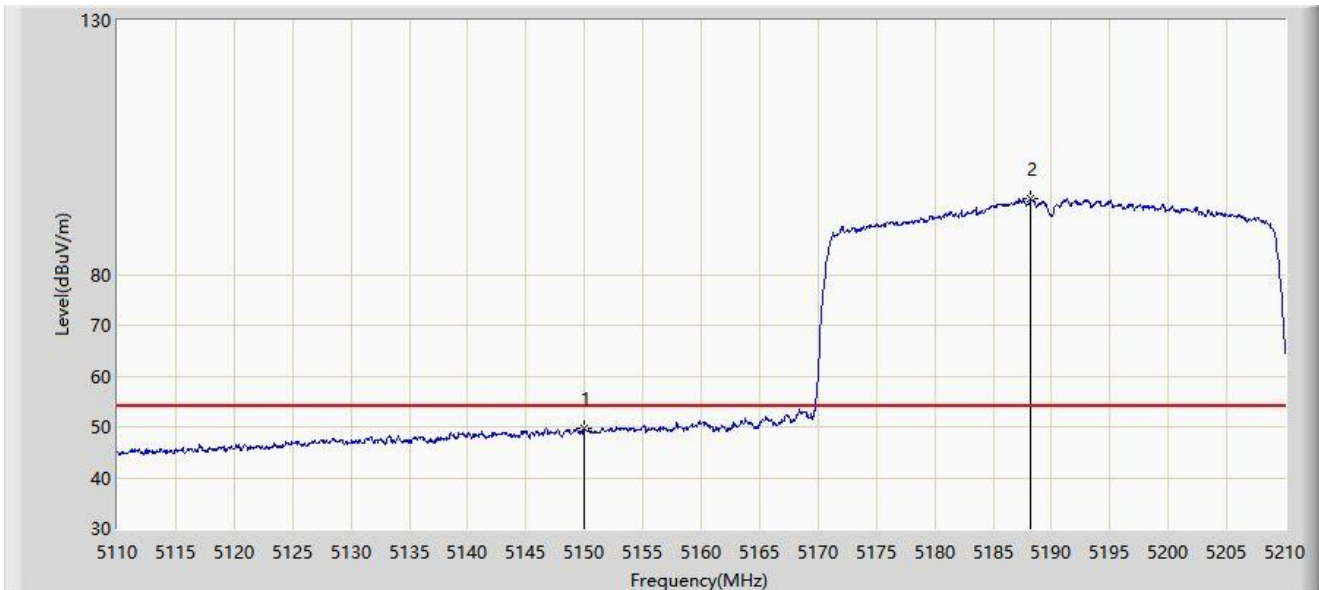


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5150.000	49.655	45.483	-4.345	54.000	4.173	AV
2		*	5188.250	94.804	91.181	N/A	N/A	3.623	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 21:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ax-HE40 at Channel 5310MHz	

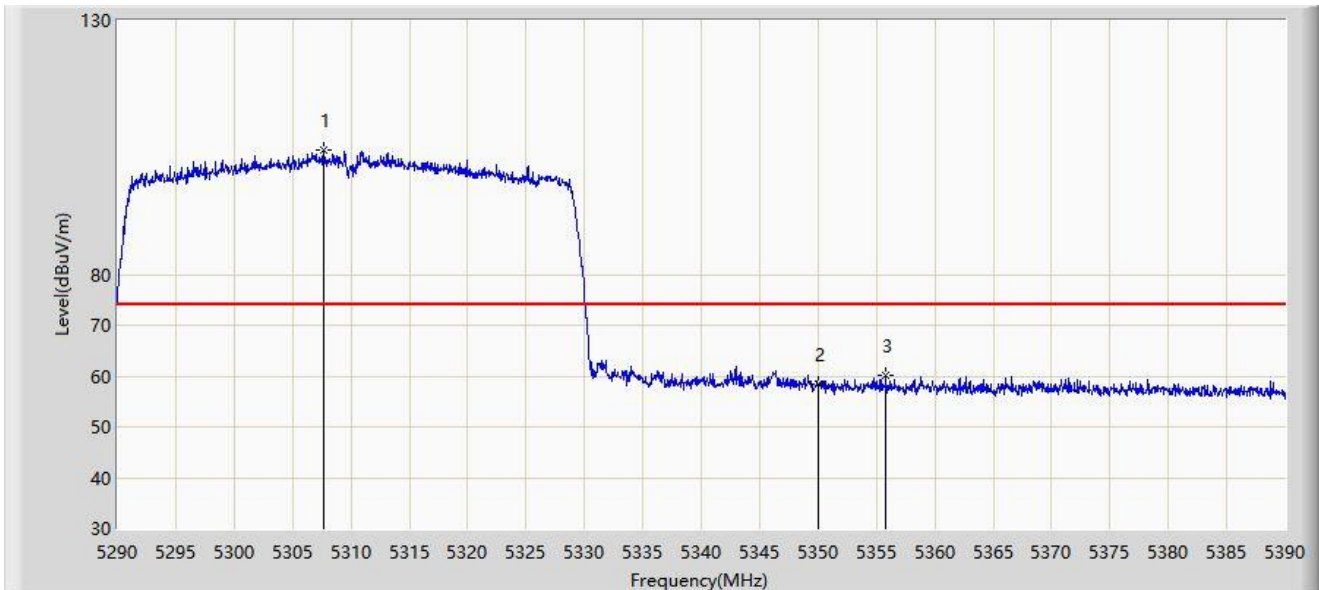


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		*	5307.700	104.562	100.950	N/A	N/A	3.613	PK
2			5350.000	58.361	54.475	-15.639	74.000	3.886	PK
3			5355.800	60.067	56.075	-13.933	74.000	3.992	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 21:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ax-HE40 at Channel 5310MHz	

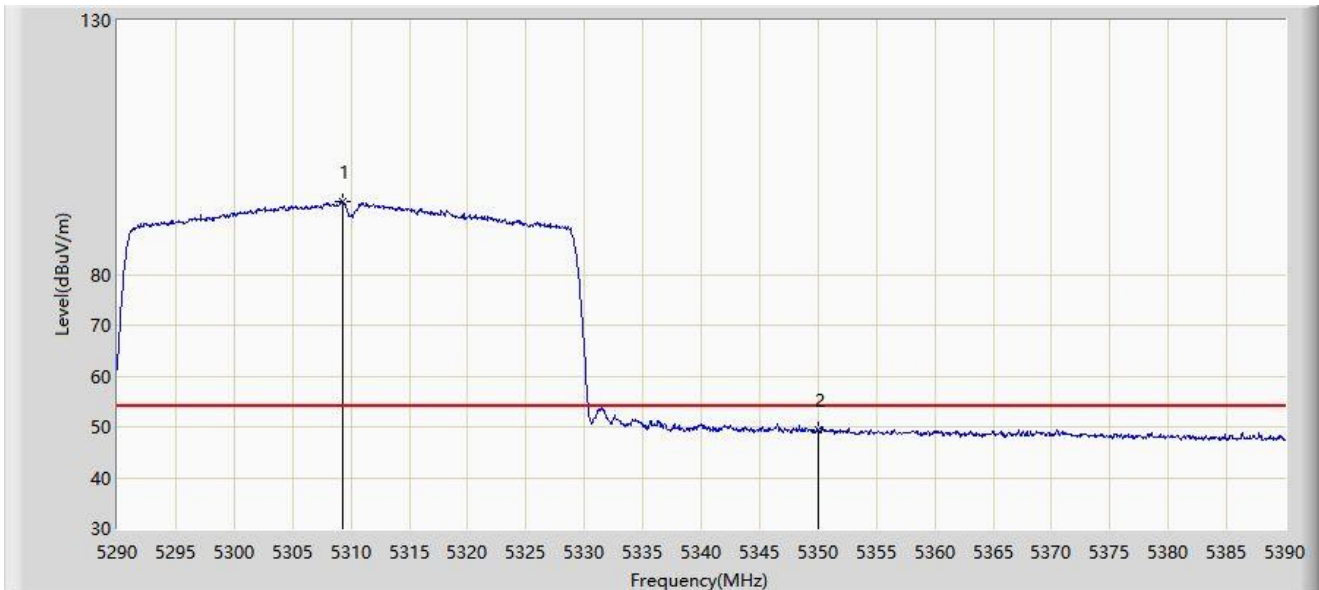


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5309.250	94.452	90.859	N/A	N/A	3.593	AV
2			5350.000	49.305	45.419	-4.695	54.000	3.886	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 21:13
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ax-HE40 at Channel 5310MHz	

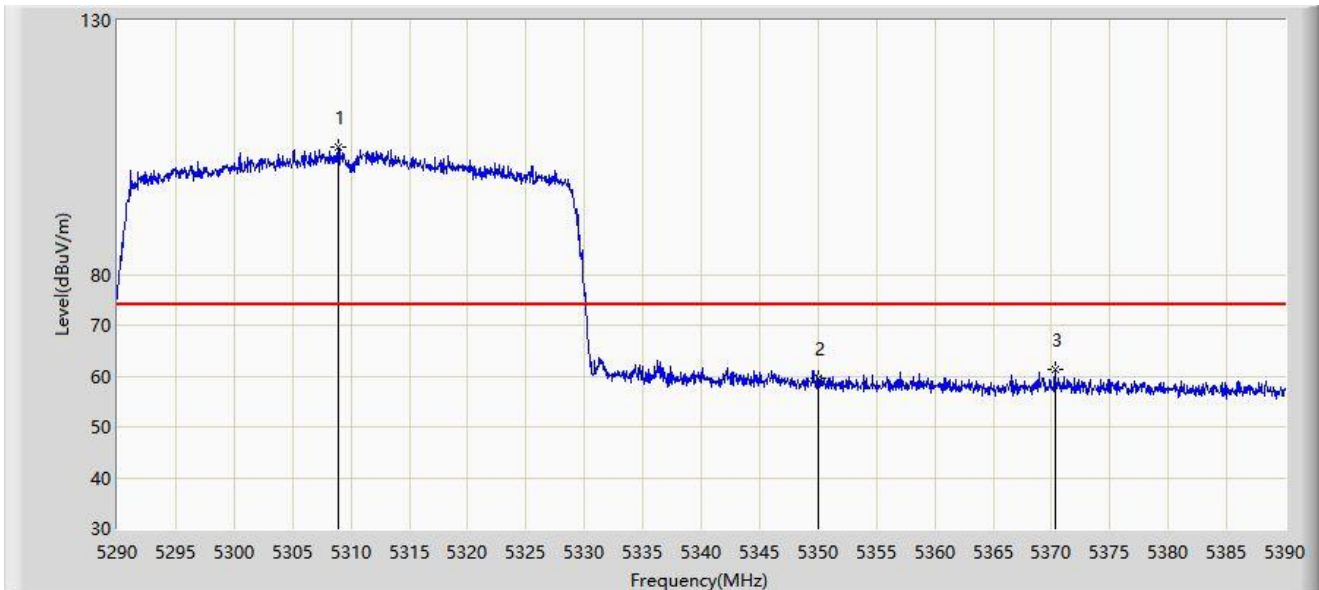


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5308.950	105.064	101.467	N/A	N/A	3.598	PK
2			5350.000	59.548	55.662	-14.452	74.000	3.886	PK
3			5370.300	61.205	56.980	-12.795	74.000	4.226	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 21:13
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ax-HE40 at Channel 5310MHz	

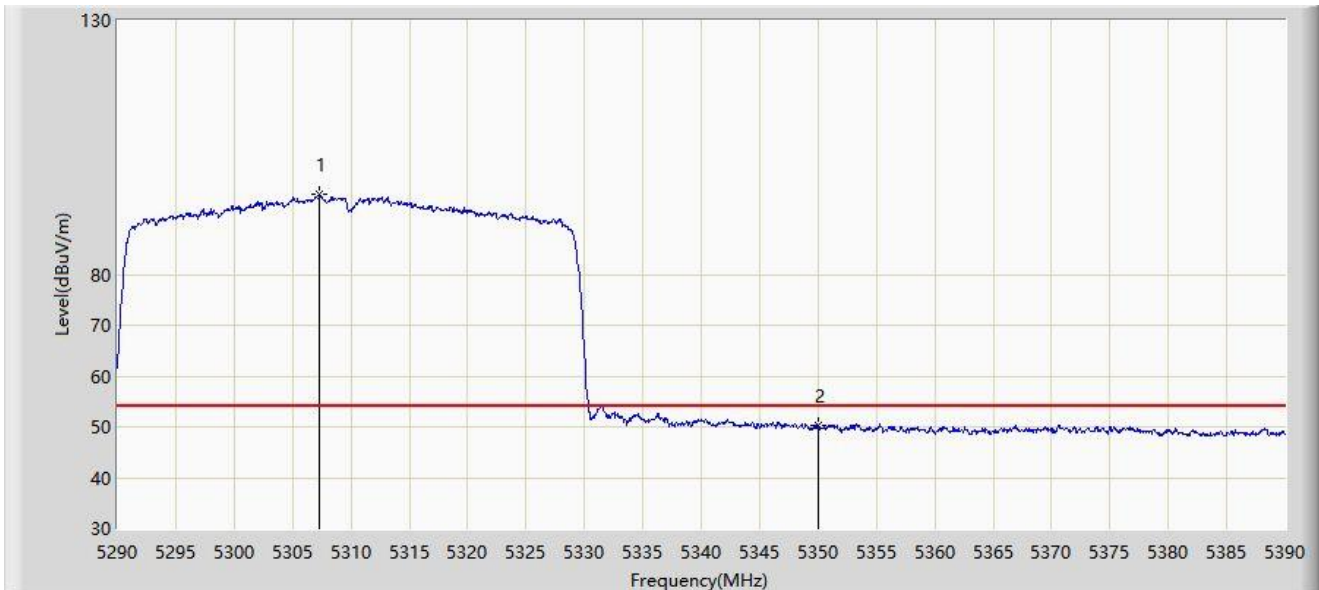


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		*	5307.300	95.852	92.235	N/A	N/A	3.617	AV
2			5350.000	50.215	46.329	-3.785	54.000	3.886	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 21:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ax-HE40 at Channel 5510MHz	

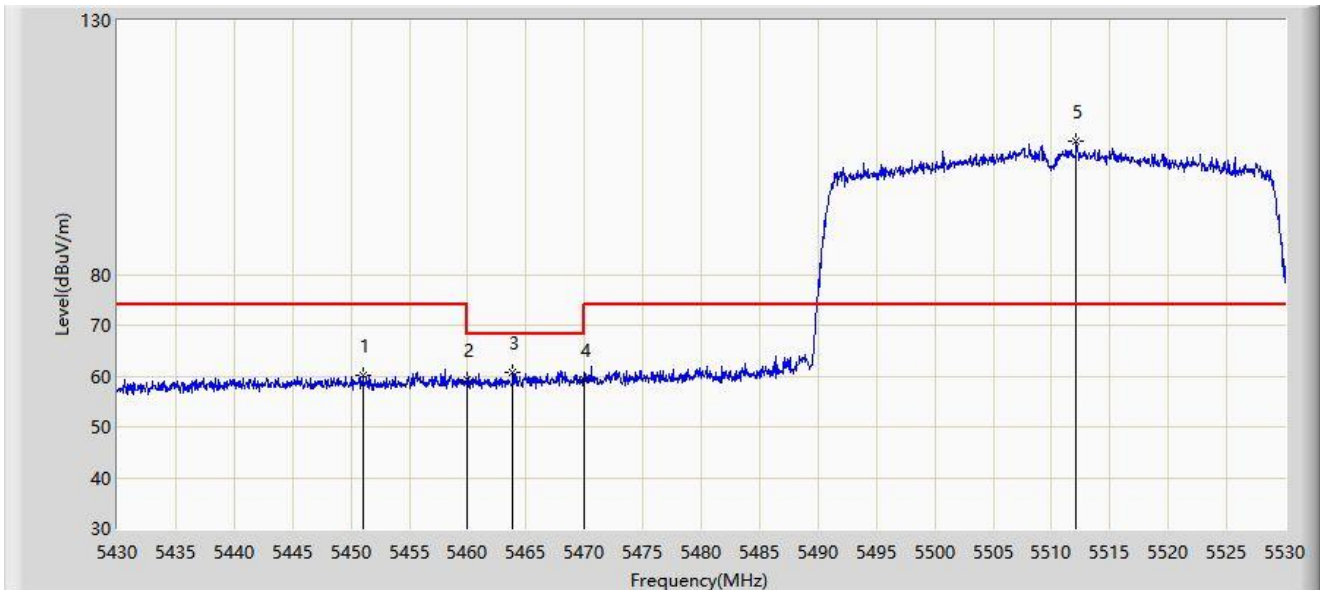


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5451.050	60.241	55.932	-13.759	74.000	4.309	PK
2			5460.000	59.157	54.949	-14.843	74.000	4.208	PK
3			5463.850	60.625	56.465	-7.575	68.200	4.160	PK
4			5470.000	59.356	55.272	-8.844	68.200	4.084	PK
5		*	5512.100	106.294	101.880	N/A	N/A	4.414	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 21:15
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ax-HE40 at Channel 5510MHz	

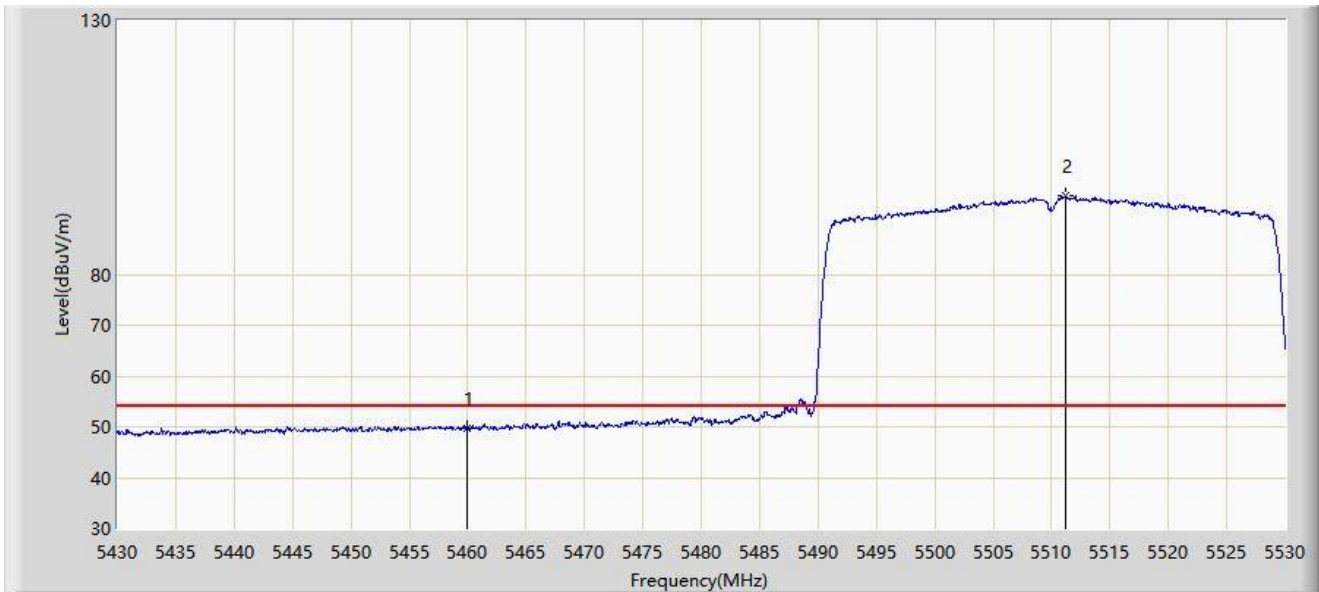


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5460.000	49.630	45.422	-4.370	54.000	4.208	AV
2		*	5511.150	95.447	91.036	N/A	N/A	4.411	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 21:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ax-HE40 at Channel 5510MHz	

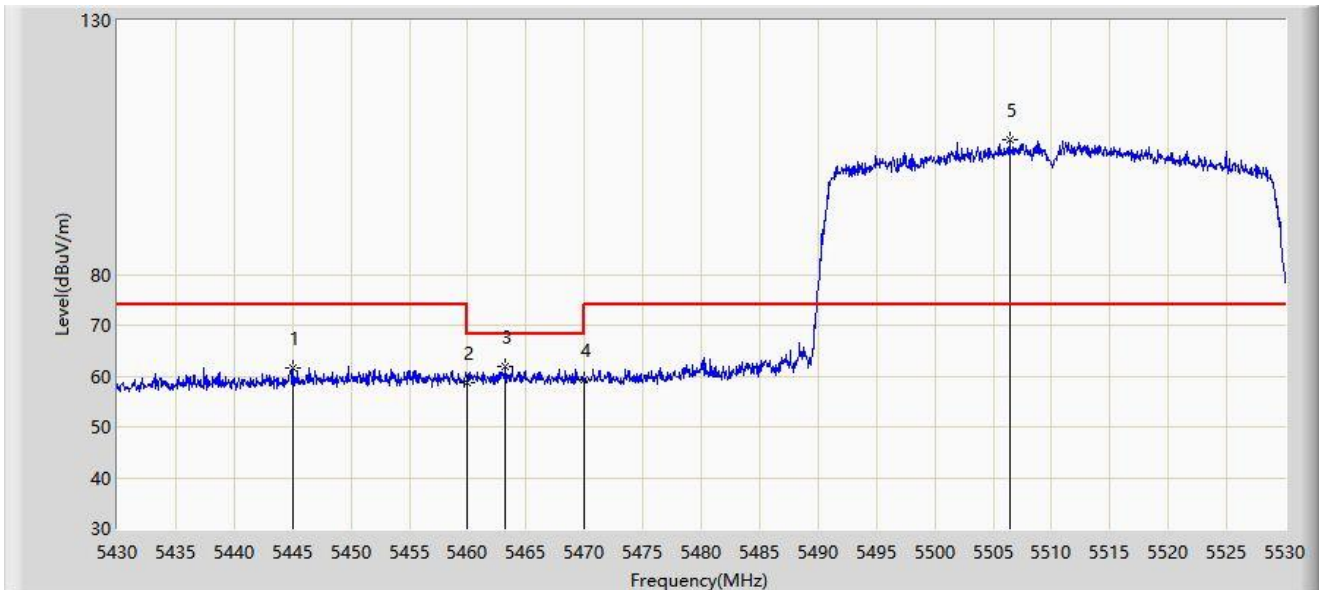


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1			5445.050	61.542	57.188	-12.458	74.000	4.354	PK
2			5460.000	58.815	54.607	-15.185	74.000	4.208	PK
3			5463.250	61.838	57.670	-6.362	68.200	4.168	PK
4			5470.000	59.178	55.094	-9.022	68.200	4.084	PK
5		*	5506.400	106.601	102.180	N/A	N/A	4.421	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 21:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ax-HE40 at Channel 5510MHz	

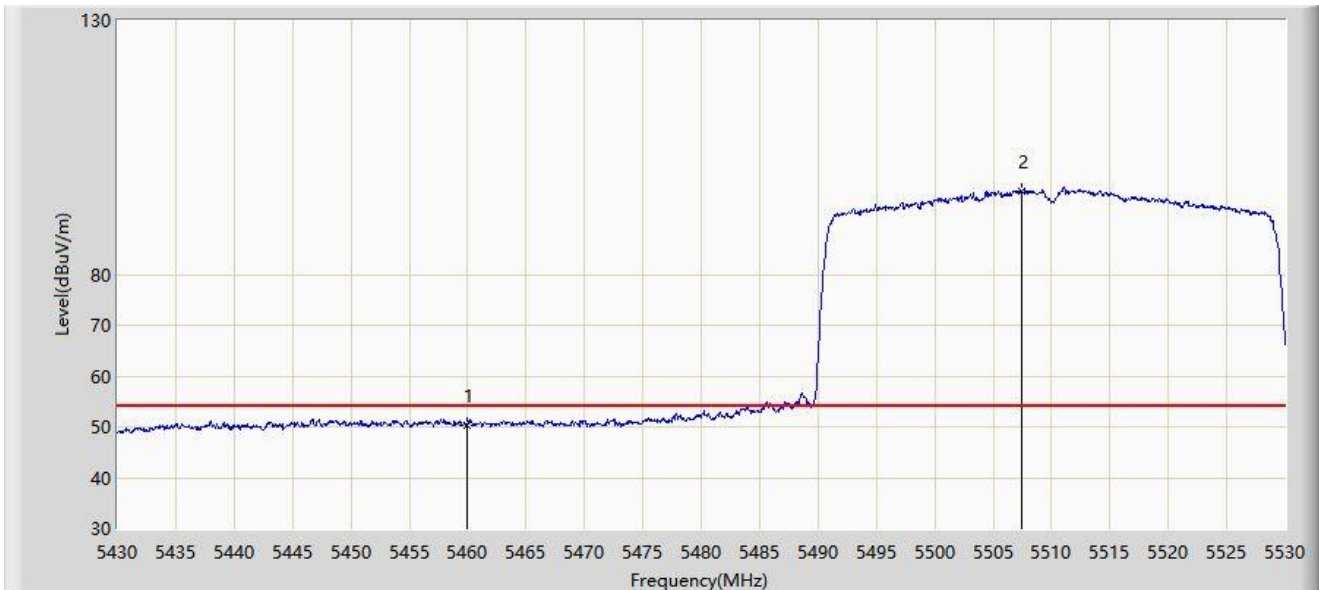


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1			5460.000	50.377	46.169	-3.623	54.000	4.208	AV
2		*	5507.400	96.308	91.890	N/A	N/A	4.419	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 21:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ax-HE40 at Channel 5670MHz	

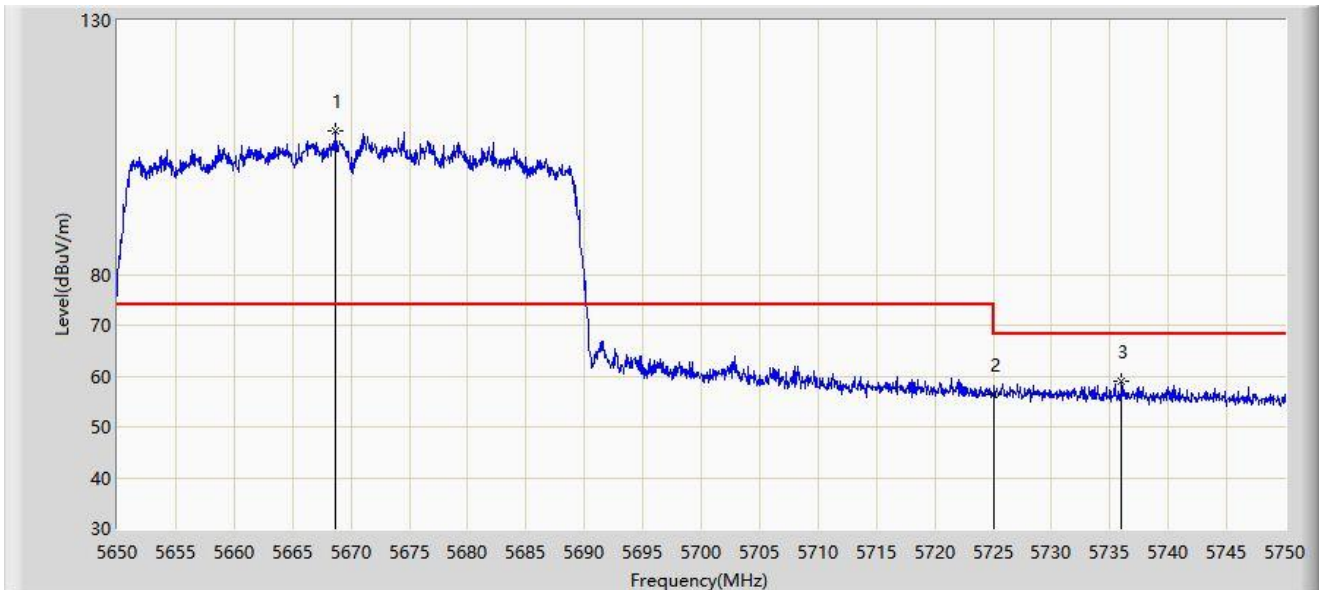


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5668.700	108.190	103.200	N/A	N/A	4.991	PK
2			5725.000	56.284	50.918	-11.916	68.200	5.366	PK
3			5736.000	59.059	53.601	-9.141	68.200	5.459	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 21:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ax-HE40 at Channel 5670MHz	

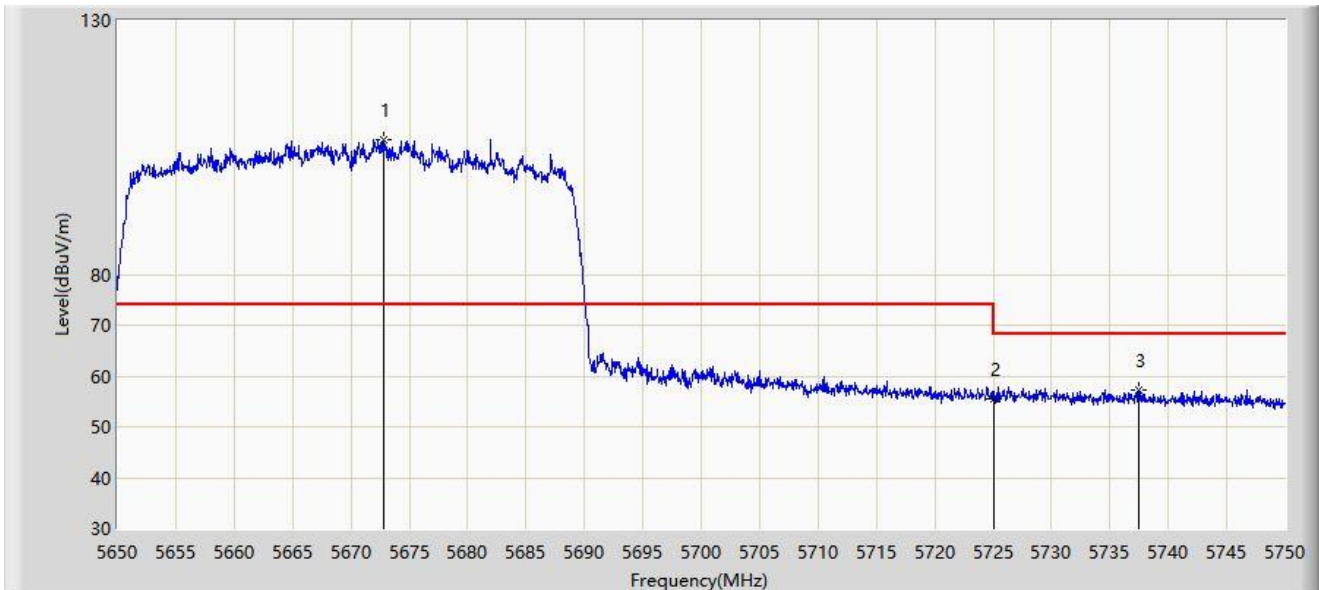


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	5672.850	106.507	101.498	N/A	N/A	5.009	PK
2			5725.000	55.392	50.026	-12.808	68.200	5.366	PK
3			5737.450	57.314	51.846	-10.886	68.200	5.468	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 21:25
Limit: FCC_Part15.407_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ax-HE40 at Channel 5755MHz	

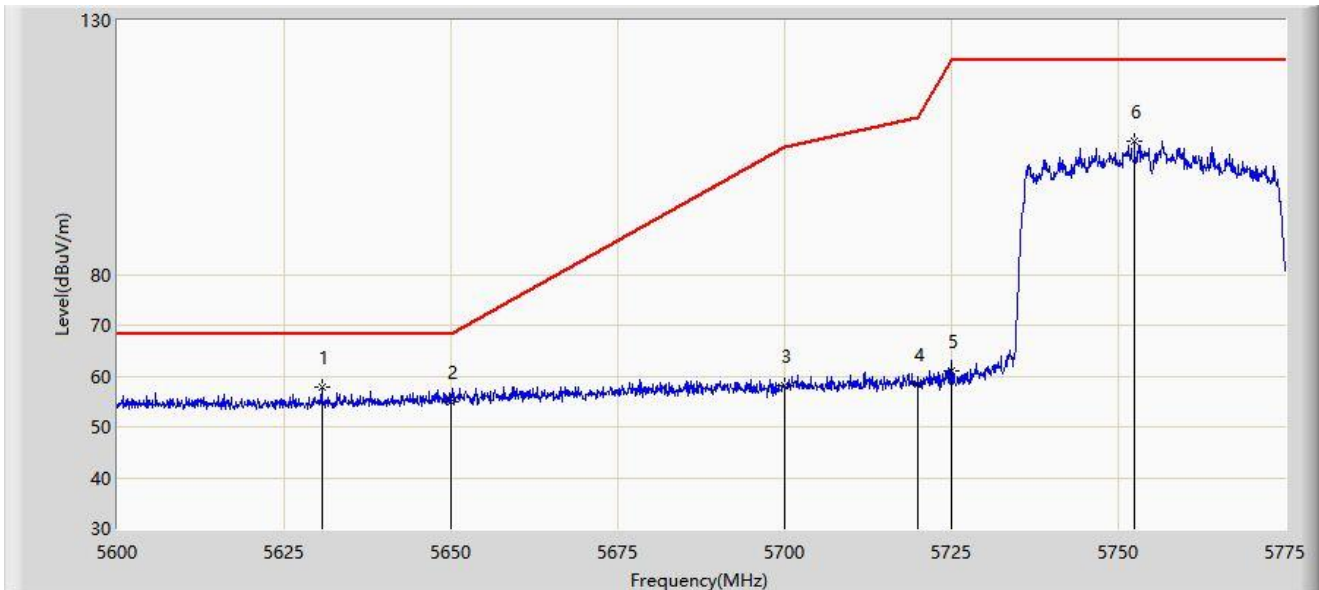


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		*	5630.625	57.691	53.108	-10.509	68.200	4.582	PK
2			5650.000	54.864	50.053	-13.336	68.200	4.810	PK
3			5700.000	58.169	53.175	-47.031	105.200	4.993	PK
4			5720.000	58.373	53.121	-52.427	110.800	5.252	PK
5			5725.000	60.899	55.533	-61.301	122.200	5.366	PK
6			5752.425	106.270	100.865	N/A	N/A	5.404	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 21:27
Limit: FCC_Part15.407_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ax-HE40 at Channel 5755MHz	

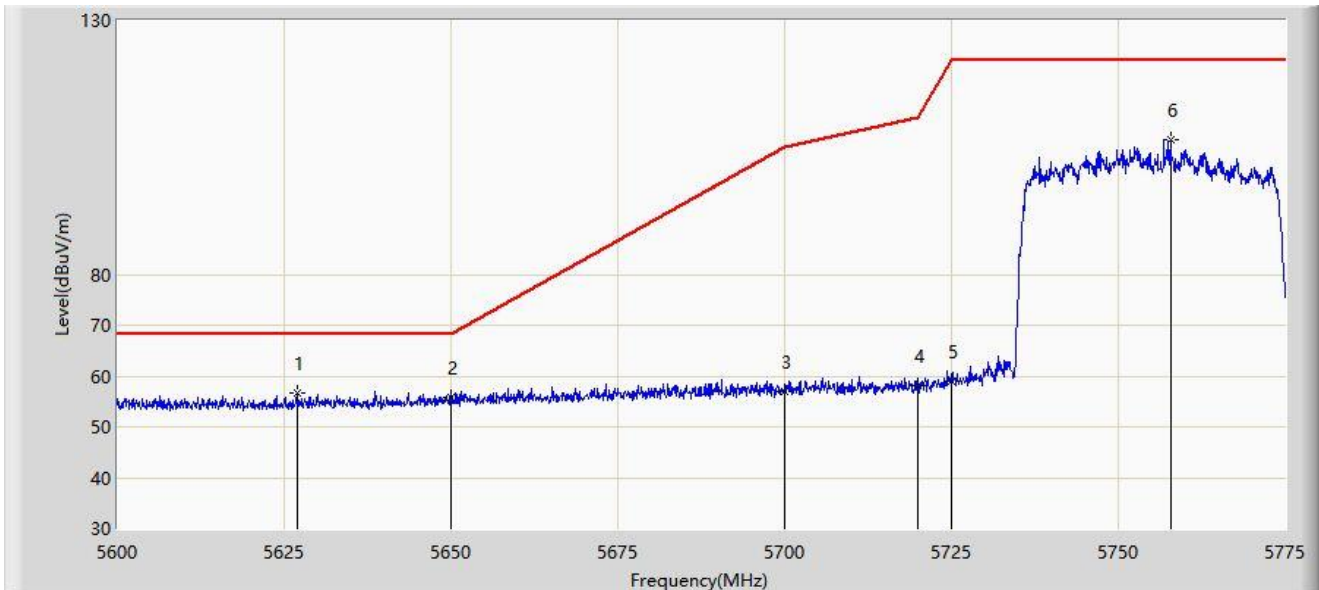


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5626.950	56.695	52.160	-11.505	68.200	4.535	PK
2			5650.000	55.751	50.940	-12.449	68.200	4.810	PK
3			5700.000	57.029	52.035	-48.171	105.200	4.993	PK
4			5720.000	58.063	52.811	-52.737	110.800	5.252	PK
5			5725.000	59.113	53.747	-63.087	122.200	5.366	PK
6			5757.850	106.535	101.195	N/A	N/A	5.339	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 21:28
Limit: FCC_Part15.407_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ax-HE40 at Channel 5795MHz	

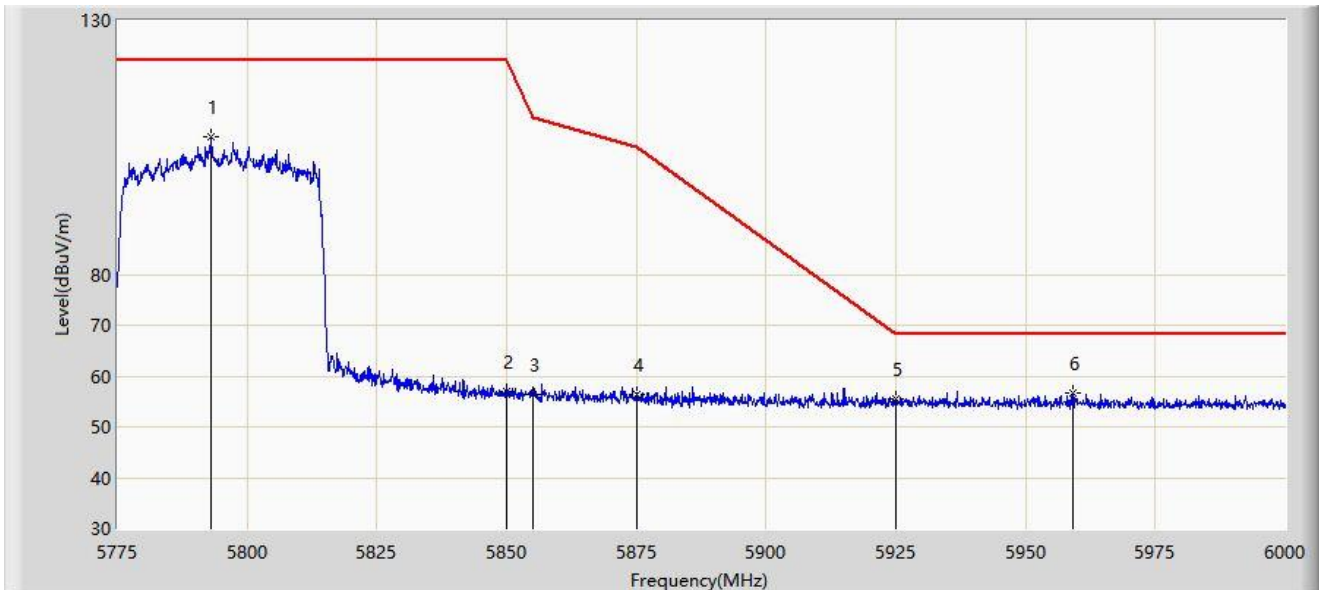


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1			5793.000	107.136	101.594	N/A	N/A	5.542	PK
2			5850.000	57.094	51.336	-65.106	122.200	5.758	PK
3			5855.000	56.255	50.469	-54.545	110.800	5.787	PK
4			5875.000	56.486	50.582	-48.714	105.200	5.904	PK
5			5925.000	55.390	49.370	-12.810	68.200	6.020	PK
6		*	5959.163	56.625	50.382	-11.575	68.200	6.243	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 21:30
Limit: FCC_Part15.407_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ax-HE40 at Channel 5795MHz	

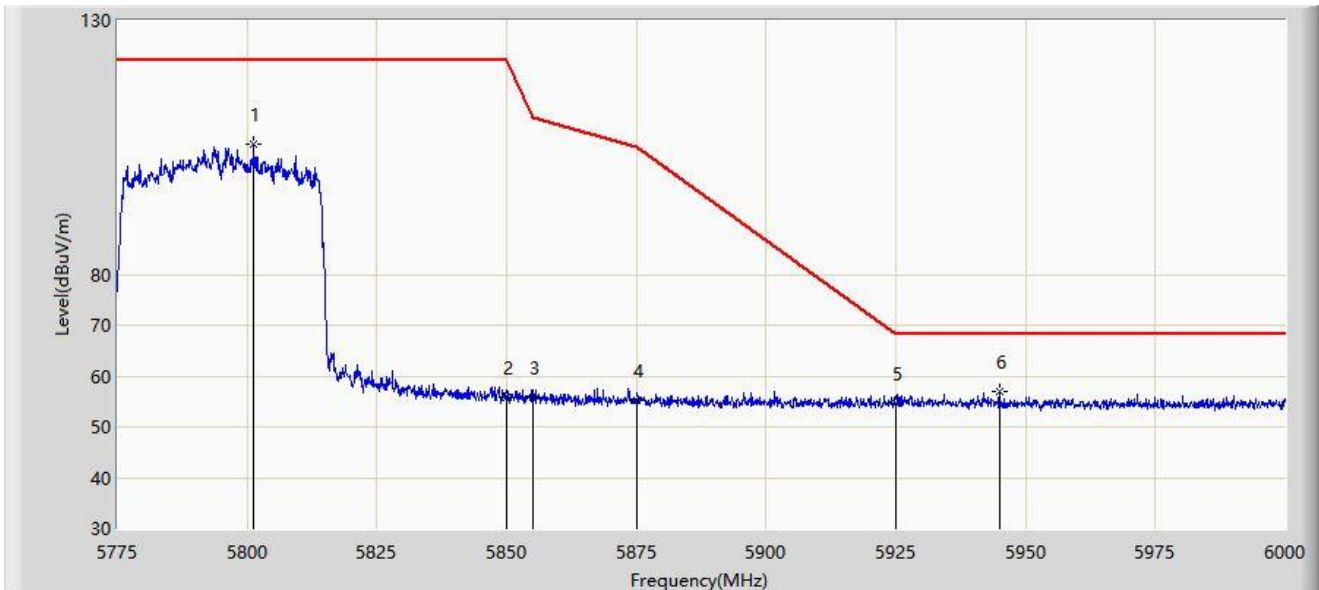


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1			5801.212	105.523	99.871	N/A	N/A	5.652	PK
2			5850.000	55.724	49.966	-66.476	122.200	5.758	PK
3			5855.000	55.766	49.980	-55.034	110.800	5.787	PK
4			5875.000	55.251	49.347	-49.949	105.200	5.904	PK
5			5925.000	54.578	48.558	-13.622	68.200	6.020	PK
6		*	5944.987	56.911	50.596	-11.289	68.200	6.315	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 21:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz	

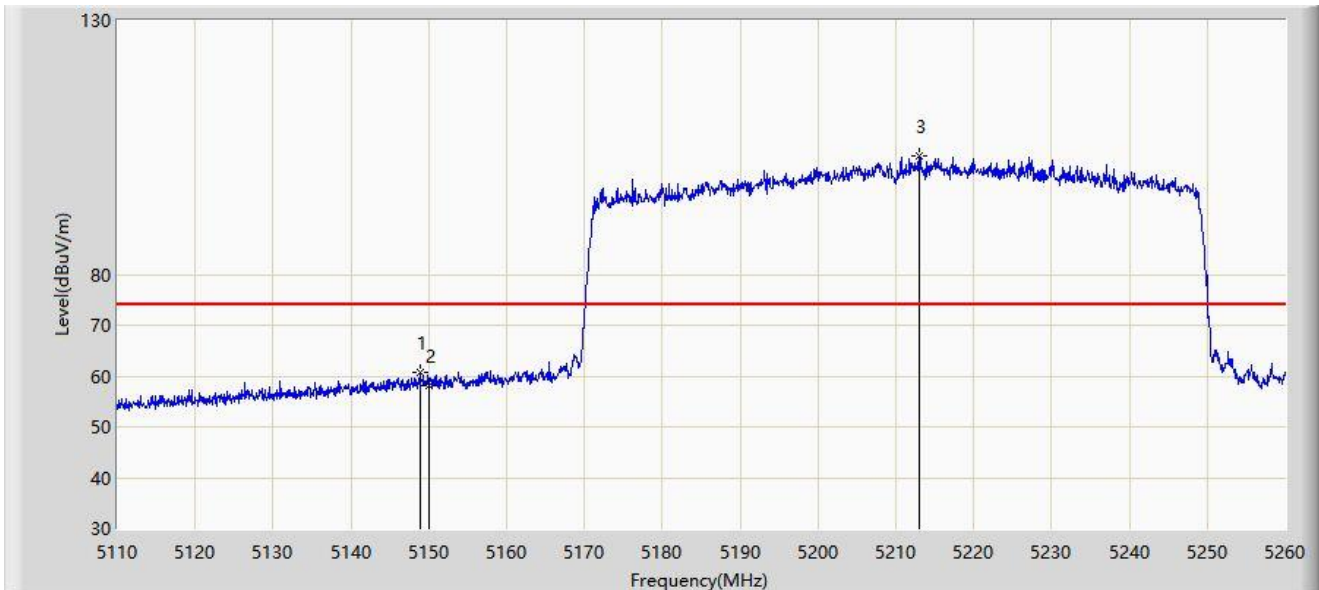


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5148.925	60.733	56.541	-13.267	74.000	4.192	PK
2			5150.000	58.192	54.020	-15.808	74.000	4.173	PK
3		*	5212.975	103.318	99.488	N/A	N/A	3.830	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 21:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz	

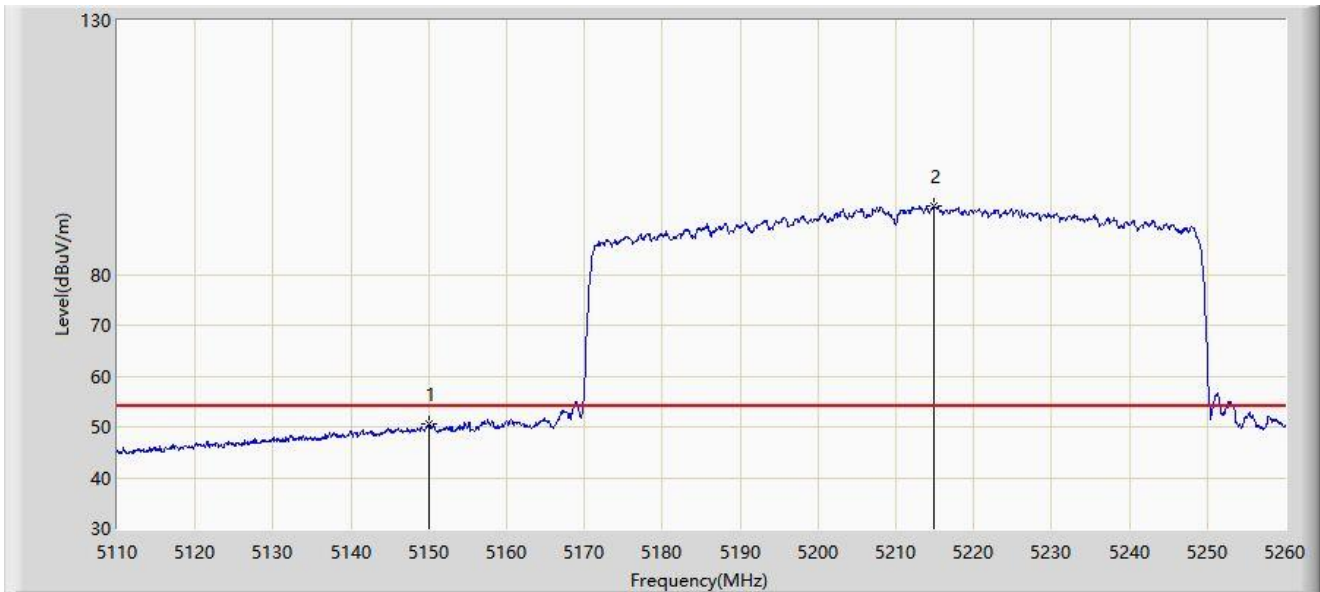


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5150.000	50.534	46.362	-3.466	54.000	4.173	AV
2		*	5214.850	93.598	89.738	N/A	N/A	3.860	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 21:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz	

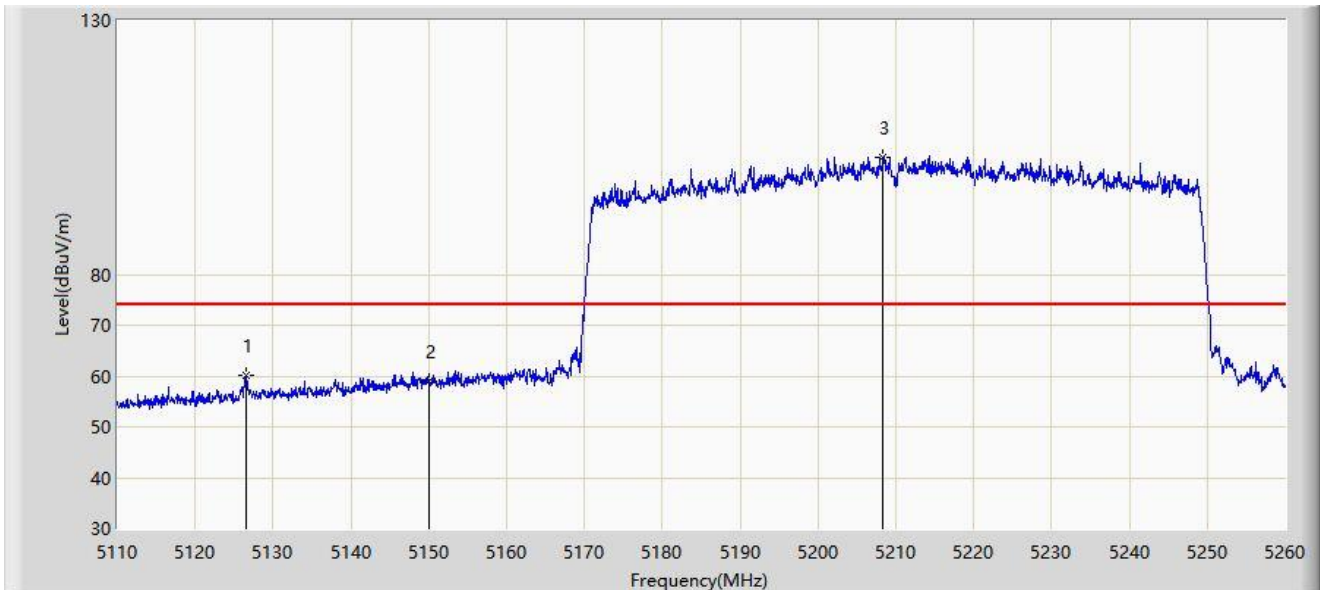


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5126.500	60.141	56.083	-13.859	74.000	4.057	PK
2			5150.000	58.999	54.827	-15.001	74.000	4.173	PK
3		*	5208.400	102.959	99.202	N/A	N/A	3.757	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 21:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz	

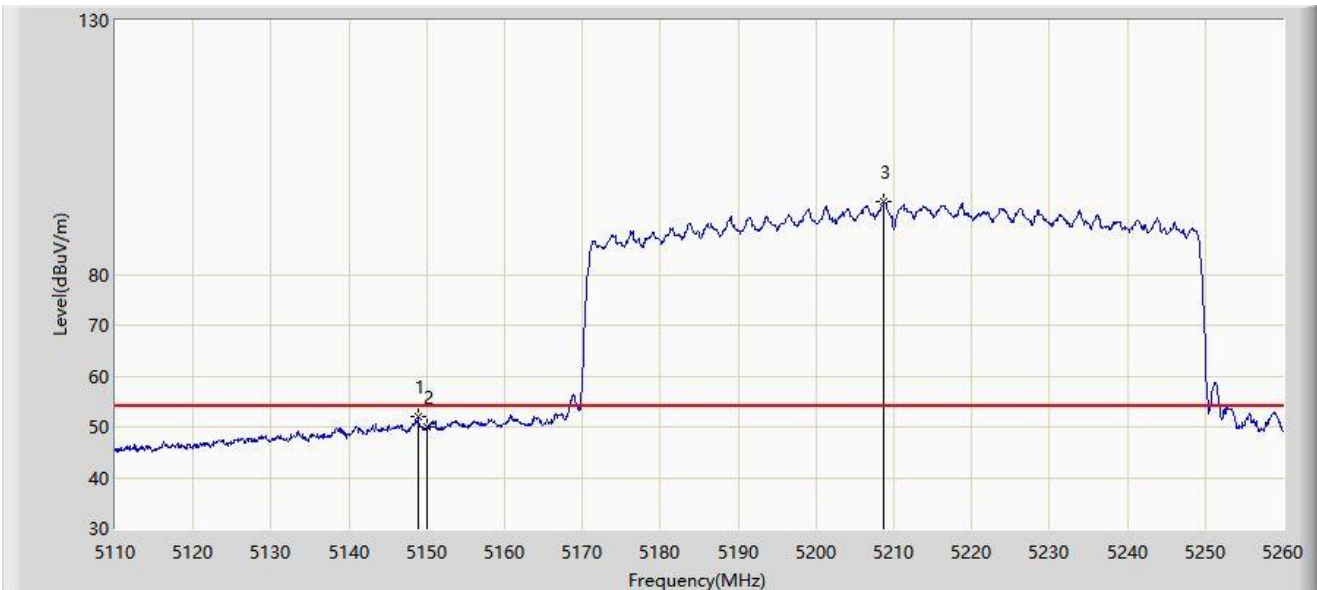


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5148.925	51.929	47.737	-2.071	54.000	4.192	AV
2			5150.000	49.900	45.728	-4.100	54.000	4.173	AV
3		*	5208.700	94.363	90.601	N/A	N/A	3.761	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 21:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ax-HE80 at Channel 5290MHz	

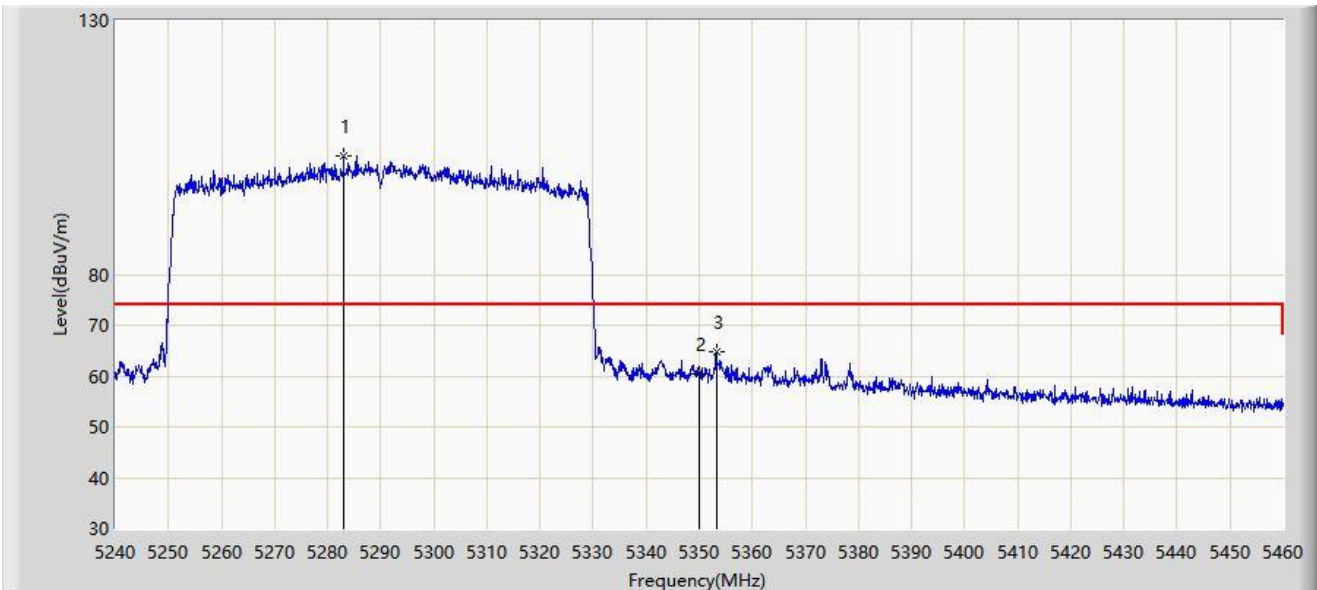


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5283.010	103.318	99.584	N/A	N/A	3.735	PK
2			5350.000	60.456	56.570	-13.544	74.000	3.886	PK
3			5353.300	64.752	60.803	-9.248	74.000	3.950	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 21:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ax-HE80 at Channel 5290MHz	

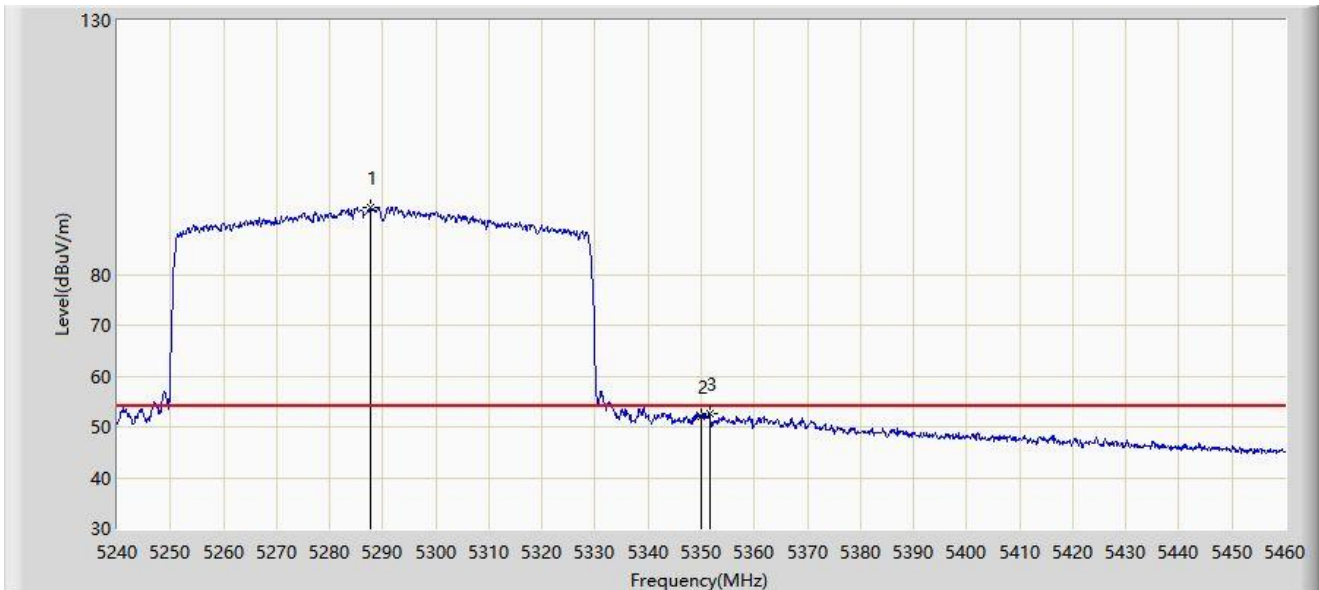


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5287.630	93.064	89.328	N/A	N/A	3.737	AV
2			5350.000	51.913	48.027	-2.087	54.000	3.886	AV
3			5351.540	52.470	48.552	-1.530	54.000	3.918	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 21:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ax-HE80 at Channel 5290MHz	

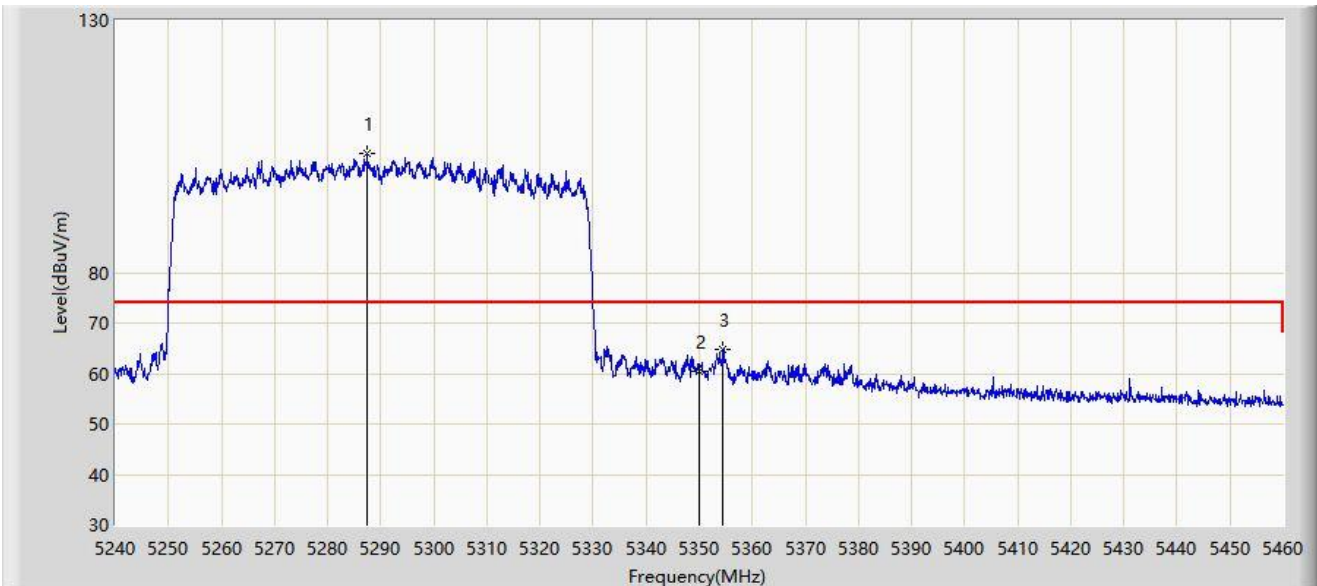


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5287.520	103.488	99.751	N/A	N/A	3.737	PK
2			5350.000	60.497	56.611	-13.503	74.000	3.886	PK
3			5354.510	64.766	60.796	-9.234	74.000	3.969	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 21:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ax-HE80 at Channel 5290MHz P=15	

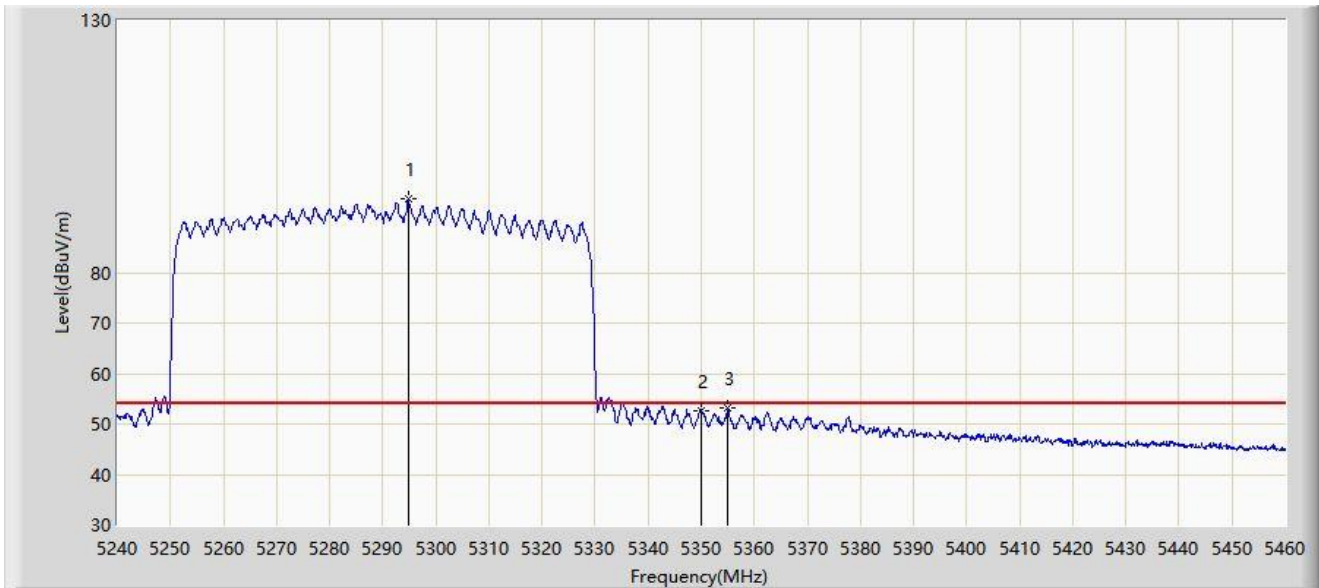


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5294.780	94.622	90.903	N/A	N/A	3.720	AV
2			5350.000	52.539	48.653	-1.461	54.000	3.886	AV
3			5355.060	53.187	49.208	-0.813	54.000	3.980	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 21:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ax-HE80 at Channel 5530MHz	

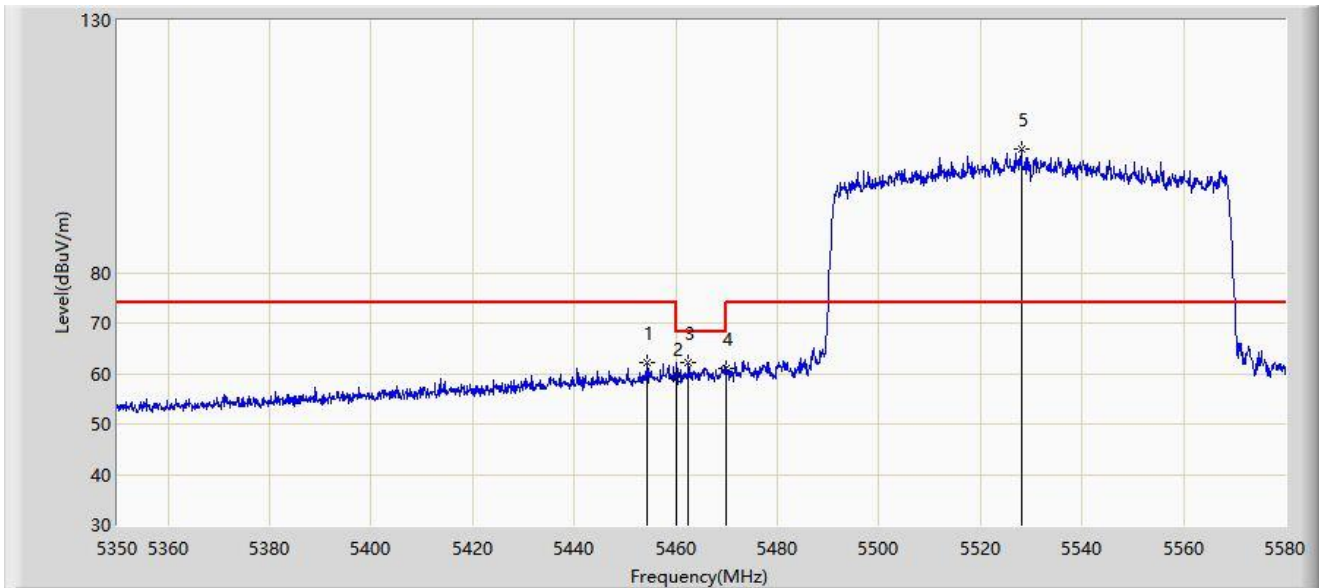


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5454.305	62.060	57.777	-11.940	74.000	4.283	PK
2			5460.000	58.931	54.723	-15.069	74.000	4.208	PK
3			5462.470	62.036	57.858	-6.164	68.200	4.177	PK
4			5470.000	60.909	56.825	-7.291	68.200	4.084	PK
5		*	5528.020	104.591	100.182	N/A	N/A	4.409	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 21:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ax-HE80 at Channel 5530MHz	

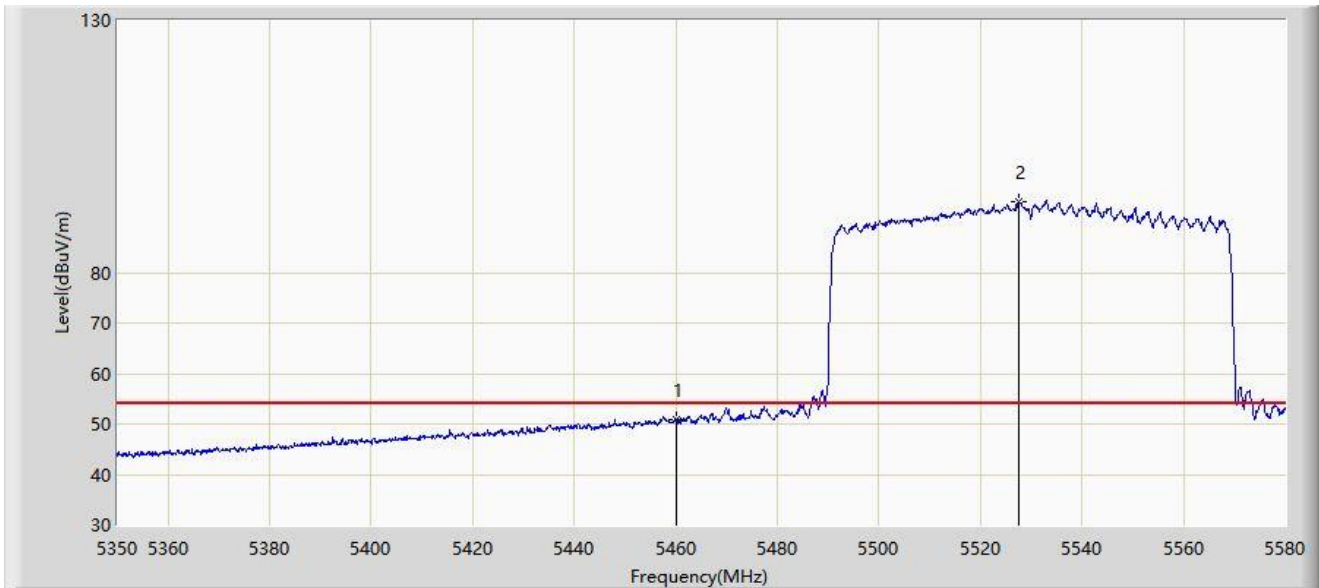


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5460.000	50.874	46.666	-3.126	54.000	4.208	AV
2		*	5527.560	93.952	89.540	N/A	N/A	4.412	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 21:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ax-HE80 at Channel 5530MHz	

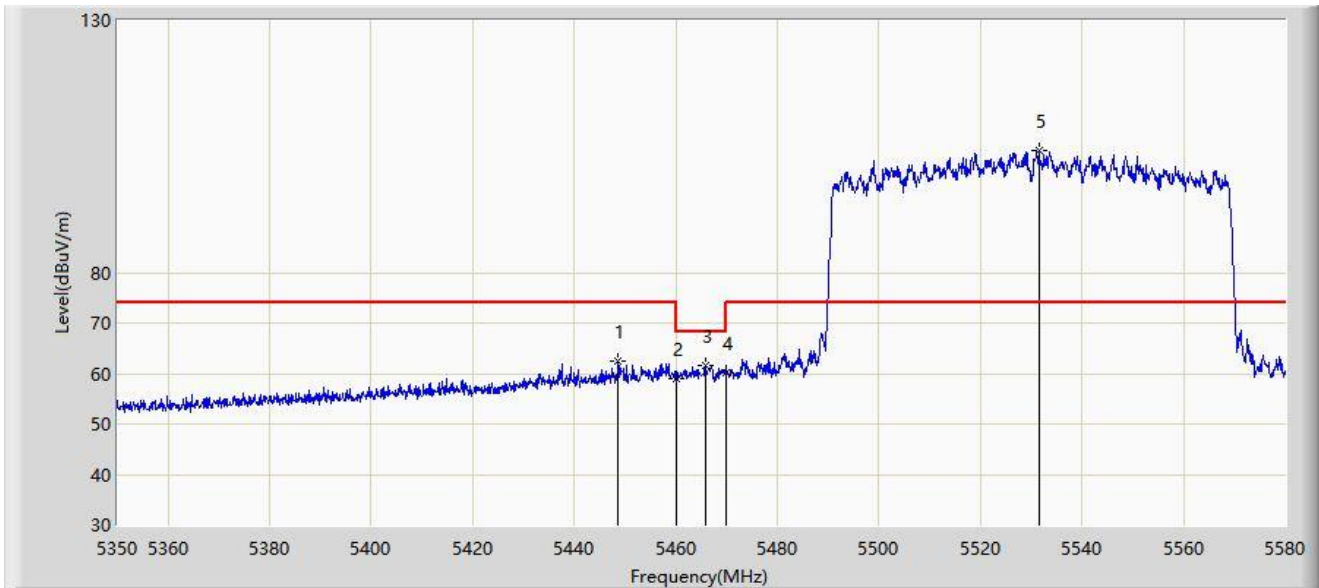


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5448.670	62.531	58.204	-11.469	74.000	4.326	PK
2			5460.000	58.948	54.740	-15.052	74.000	4.208	PK
3			5465.920	61.683	57.548	-6.517	68.200	4.135	PK
4			5470.000	60.230	56.146	-7.970	68.200	4.084	PK
5		*	5531.585	104.096	99.739	N/A	N/A	4.357	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 21:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ax-HE80 at Channel 5530MHz	

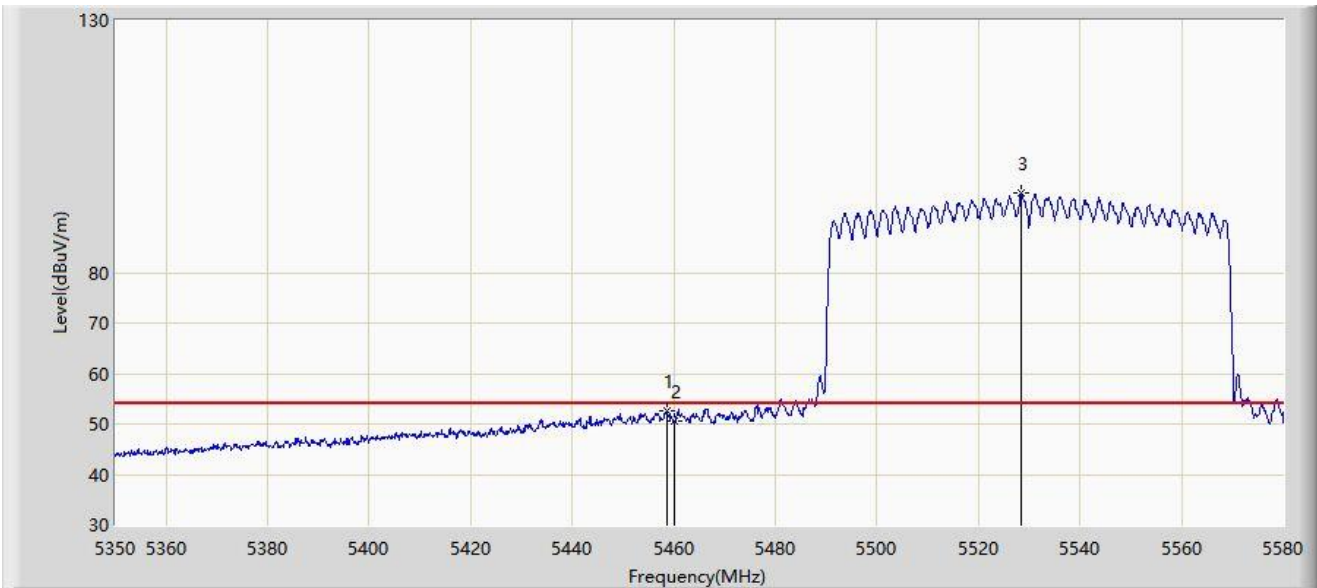


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			5458.560	52.638	48.412	-1.362	54.000	4.226	AV
2			5460.000	50.517	46.309	-3.483	54.000	4.208	AV
3		*	5528.365	95.793	91.386	N/A	N/A	4.407	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 21:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ax-HE80 at Channel 5610MHz	

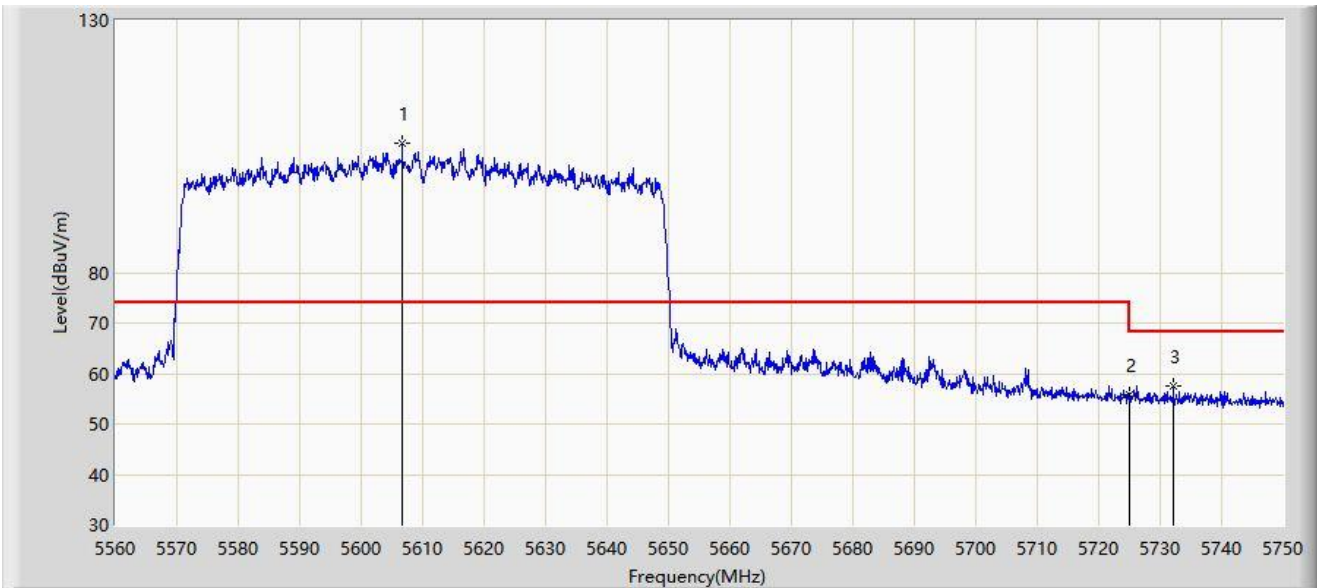


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5606.645	105.650	101.007	N/A	N/A	4.643	PK
2			5725.000	55.790	50.424	-12.410	68.200	5.366	PK
3			5732.140	57.554	52.123	-10.646	68.200	5.432	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 21:50
Limit: FCC_Part15.209_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ax-HE80 at Channel 5610MHz	

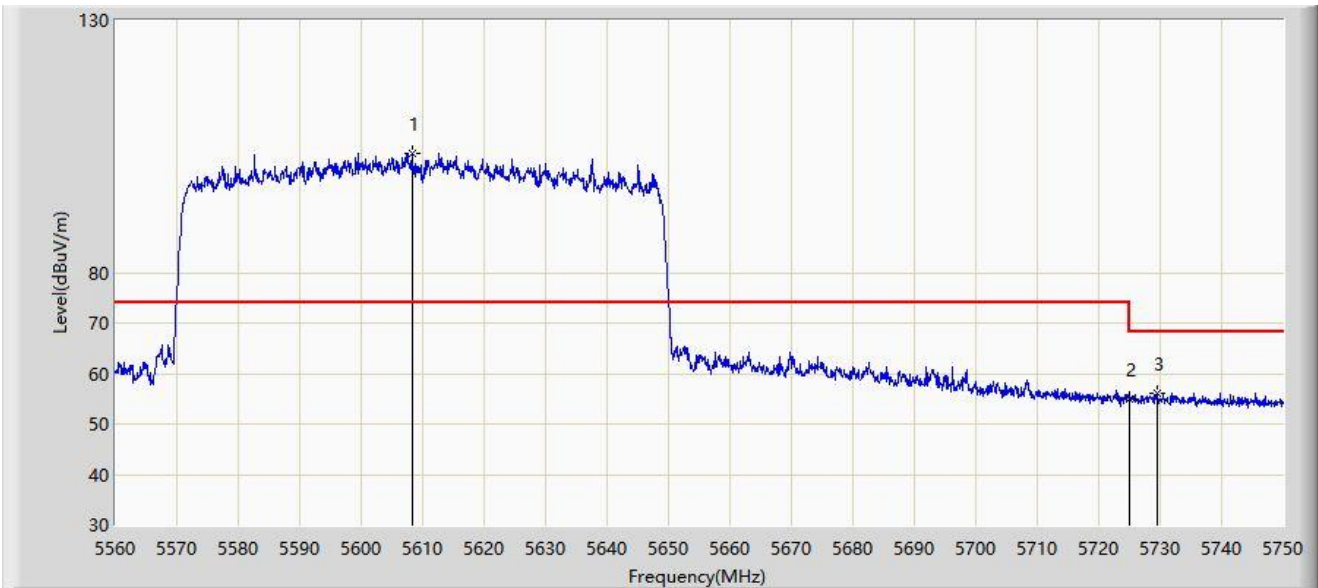


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5608.355	103.764	99.135	N/A	N/A	4.629	PK
2			5725.000	55.071	49.705	-13.129	68.200	5.366	PK
3			5729.480	56.090	50.677	-12.110	68.200	5.413	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 21:52
Limit: FCC_Part15.407_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ax-HE80 at Channel 5775MHz	

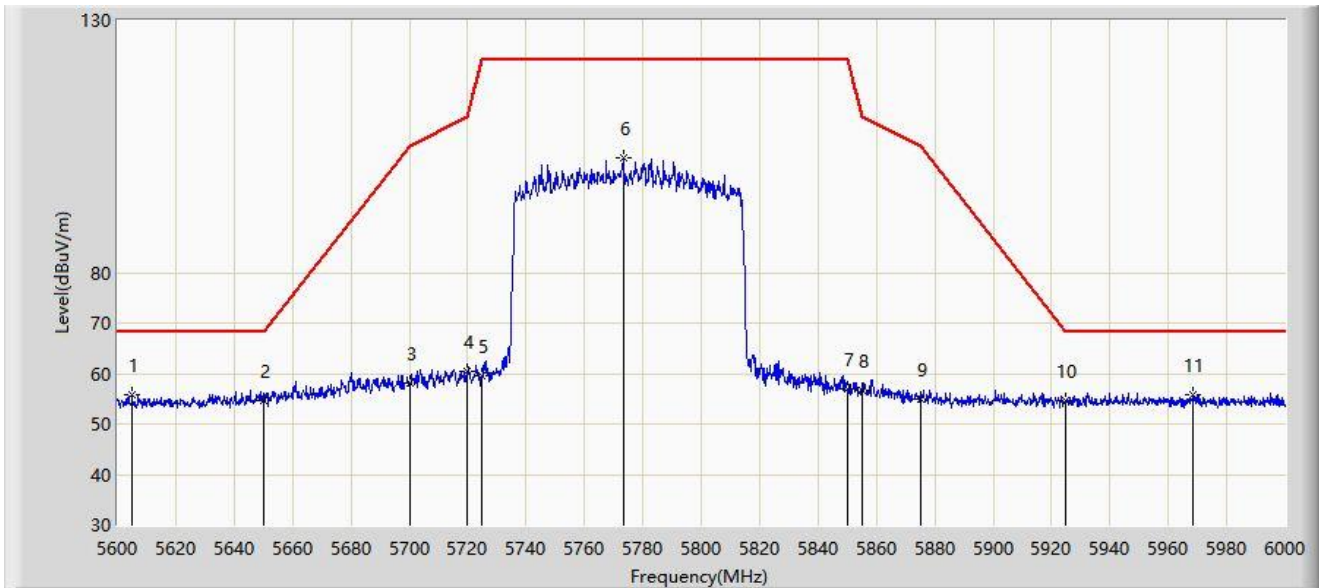


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1			5605.000	55.693	51.036	-12.507	68.200	4.657	PK
2			5650.000	54.685	49.874	-13.515	68.200	4.810	PK
3			5700.000	58.180	53.186	-47.020	105.200	4.993	PK
4			5720.000	60.290	55.038	-50.510	110.800	5.252	PK
5			5725.000	59.610	54.244	-62.590	122.200	5.366	PK
6			5773.200	102.699	97.403	N/A	N/A	5.296	PK
7			5850.000	56.812	51.054	-65.388	122.200	5.758	PK
8			5855.000	56.582	50.796	-54.218	110.800	5.787	PK
9			5875.000	54.824	48.920	-50.376	105.200	5.904	PK
10			5925.000	54.556	48.536	-13.644	68.200	6.020	PK
11		*	5968.400	55.698	49.479	-12.502	68.200	6.219	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Test Date: 2022/02/15 - 21:56
Limit: FCC_Part15.407_RE(3m)	Engineer: Bob Zhang
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by 802.11ax-HE80 at Channel 5775MHz	

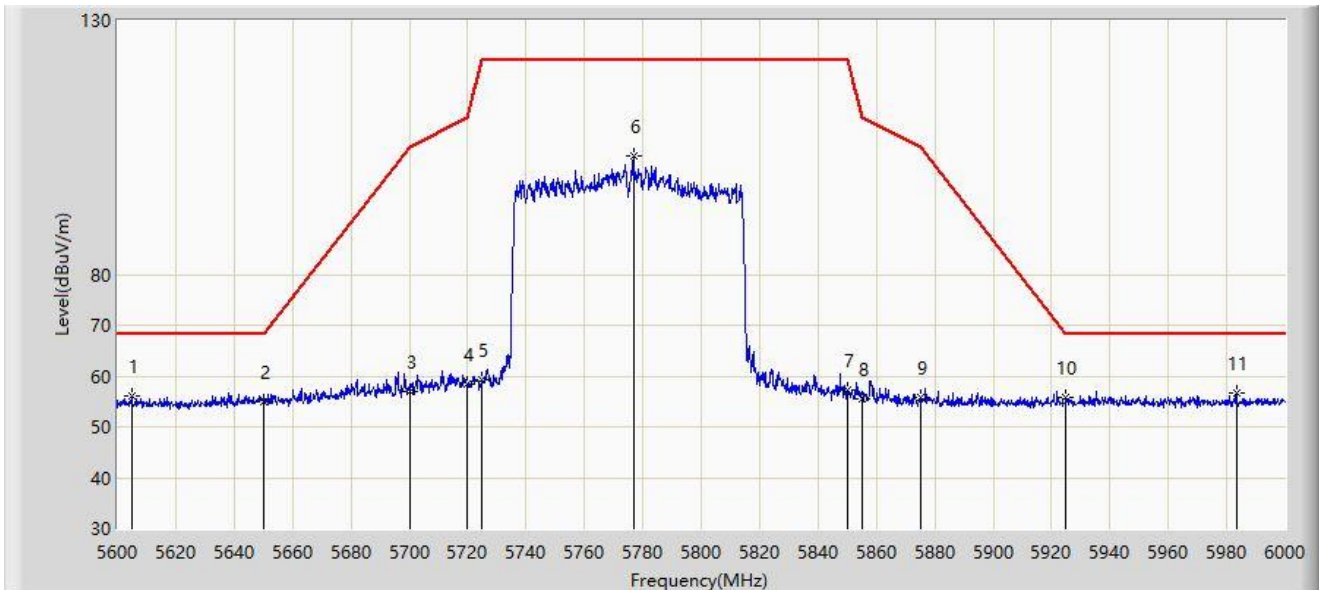


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1			5604.800	56.208	51.549	-11.992	68.200	4.659	PK
2			5650.000	54.973	50.162	-13.227	68.200	4.810	PK
3			5700.000	56.911	51.917	-48.289	105.200	4.993	PK
4			5720.000	58.316	53.064	-52.484	110.800	5.252	PK
5			5725.000	59.187	53.821	-63.013	122.200	5.366	PK
6			5776.800	103.344	98.052	N/A	N/A	5.292	PK
7			5850.000	57.310	51.552	-64.890	122.200	5.758	PK
8			5855.000	55.615	49.829	-55.185	110.800	5.787	PK
9			5875.000	55.673	49.769	-49.527	105.200	5.904	PK
10			5925.000	55.657	49.637	-12.543	68.200	6.020	PK
11		*	5983.400	56.781	50.599	-11.419	68.200	6.182	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

A.8 AC Conducted Emissions Test Result

Site: WZ-SR2	Test Date: 2022/02/22
Temperature: 16.9°C	Humidity: 34.8%
Limit: FCC_Part15.207_CE_AC Power	Engineer: Helen Han
Probe: ENV216_101683_Filter Off_E	Polarity: Line
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by ac-VHT20 at channel 5500MHz	

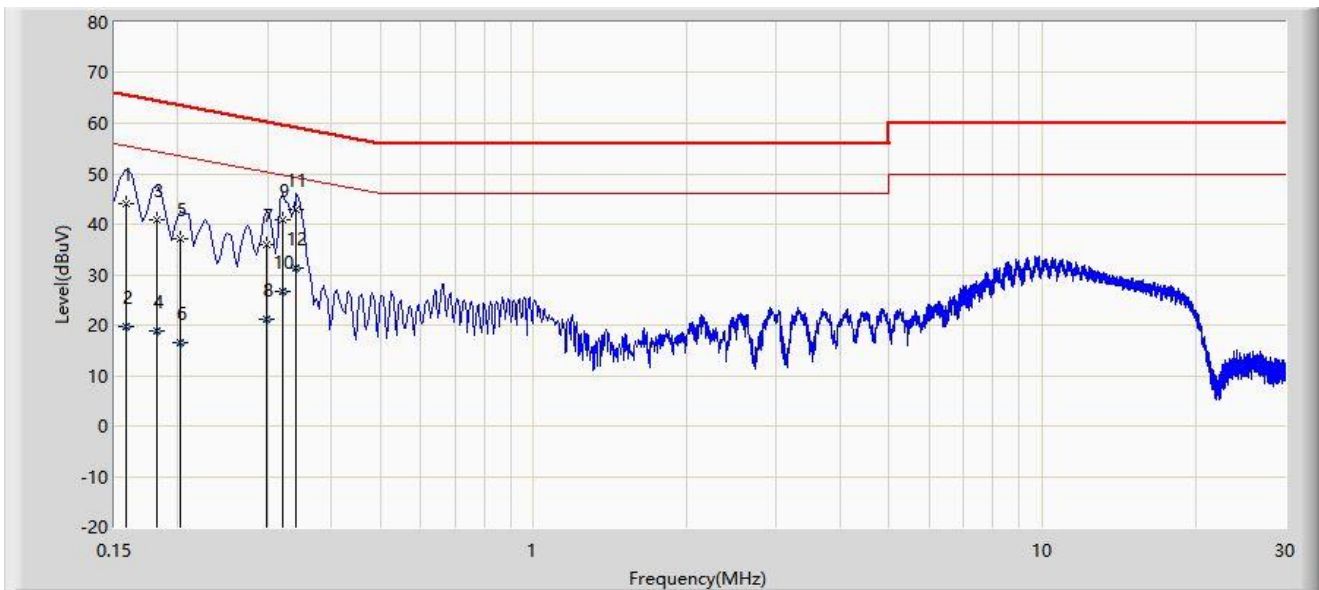


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1			0.158	43.953	34.053	-21.616	65.568	9.900	QP
2			0.158	19.603	9.703	-35.965	55.568	9.900	AV
3			0.182	40.738	30.838	-23.655	64.394	9.900	QP
4			0.182	18.744	8.844	-35.650	54.394	9.900	AV
5			0.202	37.187	27.286	-26.341	63.528	9.900	QP
6			0.202	16.660	6.760	-36.868	53.528	9.900	AV
7			0.298	35.849	25.942	-24.450	60.298	9.906	QP
8			0.298	21.172	11.266	-29.126	50.298	9.906	AV
9			0.322	40.969	31.062	-18.686	59.655	9.908	QP
10			0.322	26.567	16.659	-23.088	49.655	9.908	AV
11		*	0.342	42.887	32.978	-16.268	59.155	9.909	QP
12			0.342	31.188	21.279	-17.967	49.155	9.909	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Site: WZ-SR2	Test Date: 2022/02/22
Temperature: 16.9°C	Humidity: 34.8%
Limit: FCC_Part15.207_CE_AC Power	Engineer: Helen Han
Probe: ENV216_101683_Filter Off_E	Polarity: Neutral
EUT: IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2	Power: AC 120V/60Hz (Host), DC 3.3V (EUT)
Test Mode: Transmit by ac-VHT20 at channel 5500MHz	

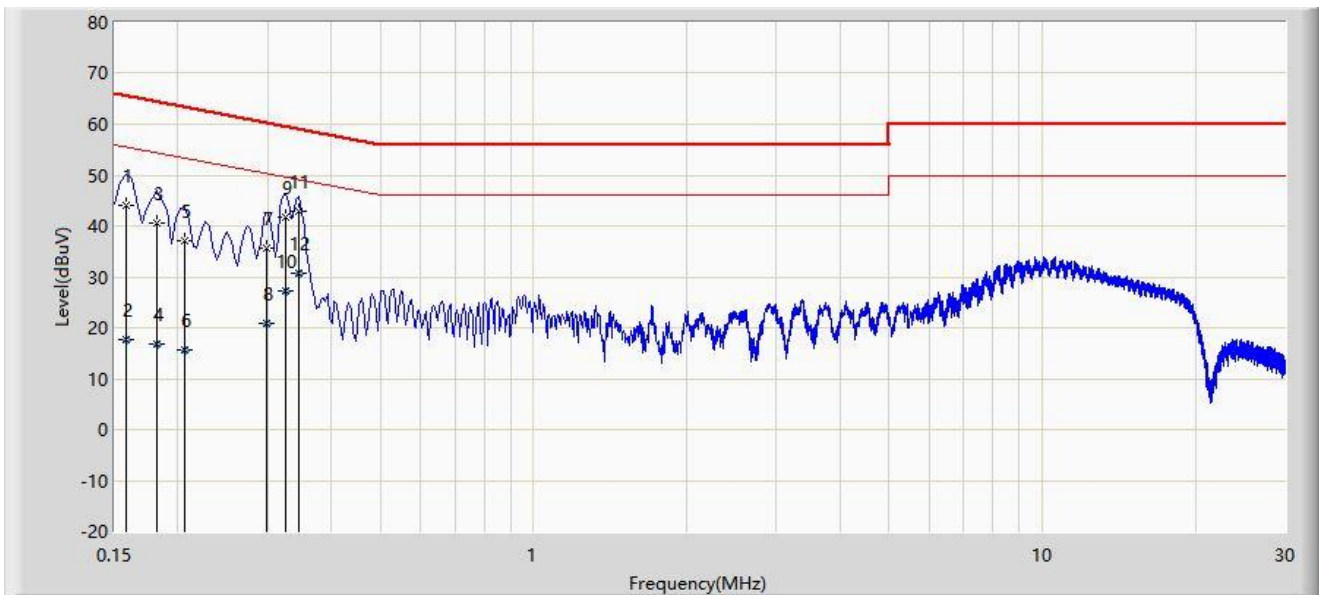

No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1			0.158	44.074	34.155	-21.495	65.568	9.918	QP
2			0.158	17.763	7.845	-37.805	55.568	9.918	AV
3			0.182	40.676	30.763	-23.718	64.394	9.913	QP
4			0.182	16.726	6.812	-37.668	54.394	9.913	AV
5			0.206	37.008	27.096	-26.357	63.365	9.912	QP
6			0.206	15.516	5.605	-37.849	53.365	9.912	AV
7			0.298	35.739	25.823	-24.559	60.298	9.916	QP
8			0.298	20.851	10.935	-29.448	50.298	9.916	AV
9			0.326	41.652	31.734	-17.901	59.552	9.918	QP
10			0.326	27.250	17.332	-22.302	49.552	9.918	AV
11		*	0.346	42.980	33.060	-16.078	59.058	9.919	QP
12			0.346	30.769	20.849	-18.289	49.058	9.919	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Appendix B - Test Setup Photograph

Refer to "21112RSU080-UT" file.

Appendix C - EUT Photograph

Refer to "2112RSU080-UE" file.