



**CFR 47 FCC PART 15 SUBPART C  
ISED RSS-247 ISSUE 2**

**CERTIFICATION TEST REPORT**

*For*

**IEEE 802.11a/b/g/n 2T2R USB Wi-Fi Module Integrated BT 2.1+EDR/4.2/5.0**

**MODEL NUMBER: SKO.W618U.1\_638BUE**

**FCC ID: 2AR82- SKOW638U101**

**IC: 24728-SKOW638U101**

**REPORT NUMBER: 4789755222-2**

**ISSUE DATE: January 11, 2021**

*Prepared for*

**Guangzhou Shikun Electronics Co., Ltd  
NO.6 Liankun Road,Huangpu District,Guangzhou,China**

*Prepared by*

**UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch**

**Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China**

**Tel: +86 769 22038881**

**Fax: +86 769 33244054**

**Website: [www.ul.com](http://www.ul.com)**



Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V0	01/11/2021	Initial Issue	



Summary of Test Results			
Clause	Test Items	FCC/ISED Rules	Test Results
1	20dB Bandwidth and 99% Occupied Bandwidth	FCC 15.247 (a) (1) RSS-247 Clause 5.1 (a) RSS-Gen Clause 6.7	Pass
2	Conducted Output Power	FCC 15.247 (b) (1) RSS-247 Clause 5.1 (b)	Pass
3	Carrier Hopping Channel Separation	FCC 15.247 (a) (1) RSS-247 Clause 5.1 (b)	Pass
4	Number of Hopping Frequency	15.247 (a) (1) III RSS-247 Clause 5.1 (d)	Pass
5	Time of Occupancy (Dwell Time)	15.247 (a) (1) III RSS-247 Clause 5.1 (d)	Pass
6	Conducted Bandedge	FCC 15.247 (d) RSS-247 Clause 5.5	Pass
7	Radiated Bandedge and Spurious	FCC 15.247 (d) FCC 15.209 FCC 15.205 RSS-247 Clause 5.5 RSS-GEN Clause 8.9 RSS-GEN Clause 8.10	Pass
8	Conducted Emission Test for AC Power Port	FCC 15.207 RSS-GEN Clause 8.8	Pass
9	Antenna Requirement	FCC 15.203 RSS-GEN Clause 6.8	Pass
<p>Note:</p> <p>1. This test report is only published to and used by the applicant, and it is not for evidence purpose in China.</p> <p>2. The measurement result for the sample received is &lt;Pass&gt; according to &lt; CFR 47 FCC PART 15 SUBPART C &gt;&gt; ISED RSS-247 &gt; when &lt;Accuracy Method&gt; decision rule is applied.</p>			



## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS .....</b>	<b>6</b>
<b>2. TEST METHODOLOGY .....</b>	<b>7</b>
<b>3. FACILITIES AND ACCREDITATION .....</b>	<b>7</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>8</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION .....</i>	<i>8</i>
4.2. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>8</i>
<b>5. EQUIPMENT UNDER TEST .....</b>	<b>9</b>
5.1. <i>DESCRIPTION OF EUT .....</i>	<i>9</i>
5.2. <i>MAXIMUM PEAK OUTPUT POWER .....</i>	<i>9</i>
5.3. <i>PACKET TYPE CONFIGURATION .....</i>	<i>9</i>
5.4. <i>CHANNEL LIST.....</i>	<i>10</i>
5.5. <i>TEST CHANNEL CONFIGURATION.....</i>	<i>10</i>
5.6. <i>WORST-CASE CONFIGURATIONS.....</i>	<i>10</i>
5.7. <i>THE WORSE CASE POWER SETTING PARAMETER.....</i>	<i>11</i>
5.8. <i>DESCRIPTION OF AVAILABLE ANTENNAS .....</i>	<i>11</i>
5.9. <i>DESCRIPTION OF TEST SETUP.....</i>	<i>12</i>
<b>6. MEASURING INSTRUMENT AND SOFTWARE USED .....</b>	<b>13</b>
<b>7. ANTENNA PORT TEST RESULTS .....</b>	<b>15</b>
7.1. <i>ON TIME AND DUTY CYCLE.....</i>	<i>15</i>
7.2. <i>20 dB BANDWIDTH AND 99 % OCCUPIED BANDWIDTH .....</i>	<i>16</i>
7.3. <i>CONDUCTED OUTPUT POWER.....</i>	<i>18</i>
7.4. <i>CARRIER FREQUENCY SEPARATION.....</i>	<i>19</i>
7.5. <i>NUMBER OF HOPPING FREQUENCIES .....</i>	<i>21</i>
7.6. <i>TIME OF OCCUPANCY (DWELL TIME).....</i>	<i>23</i>
7.7. <i>CONDUCTED BANDEDGE AND SPURIOUS EMISSION.....</i>	<i>25</i>
<b>8. RADIATED TEST RESULTS.....</b>	<b>27</b>
8.1. <i>RESTRICTED BANDEDGE.....</i>	<i>33</i>
8.1.1. <i>GFSK MODE .....</i>	<i>33</i>
8.1.2. <i>8DPSK MODE .....</i>	<i>42</i>
8.2. <i>SPURIOUS EMISSIONS (1 GHz ~ 3 GHz).....</i>	<i>51</i>
8.2.1. <i>GFSK MODE .....</i>	<i>51</i>
8.3. <i>SPURIOUS EMISSIONS (3 GHz ~ 18 GHz).....</i>	<i>69</i>
8.3.1. <i>GFSK MODE .....</i>	<i>69</i>



8.3.2. 8DPSK MODE .....87

8.4. SPURIOUS EMISSIONS (18 GHz ~ 26 GHz)..... 105

8.4.1. 8DPSK MODE ..... 105

8.5. SPURIOUS EMISSIONS (30 MHz ~ 1 GHz)..... 107

8.5.1. 8DPSK MODE ..... 107

8.6. SPURIOUS EMISSIONS BELOW 30 MHz ..... 109

8.6.1. 8DPSK MODE ..... 109

**9. AC POWER LINE CONDUCTED EMISSIONS .....112**

9.1. 8DPSK MODE ..... 113

**10. ANTENNA REQUIREMENTS .....115**

**Appendix .....116**

*Appendix A: 20dB Emission Bandwidth ..... 116*

Test Result..... 116

Test Graphs ..... 117

*Appendix B: Occupied Channel Bandwidth ..... 119*

Test Result..... 119

Test Graphs ..... 120

*Appendix C: Maximum PEAK conducted output power ..... 122*

Test Result..... 122

*Appendix D: Carrier frequency separation ..... 123*

Test Result..... 123

Test Graphs ..... 124

*Appendix E: Time of occupancy ..... 125*

Test Result..... 125

Test Graphs ..... 126

*Appendix F: Number of hopping channels ..... 128*

Test Result..... 128

Test Graphs ..... 129

*Appendix G: Band edge measurements ..... 130*

Test Result..... 130

Test Graphs ..... 131

*Appendix H: Conducted Spurious Emission ..... 134*

Test Result..... 134

Test Graphs ..... 135

*Appendix I: Duty Cycle ..... 141*

Test Result..... 141

Test Graphs ..... 142



# 1. ATTESTATION OF TEST RESULTS

## Applicant Information

Company Name: Guangzhou Shikun Electronics Co., Ltd  
Address: NO.6 Liankun Road, Huangpu District, Guangzhou, China

## Manufacturer Information

Company Name: Guangzhou Shikun Electronics Co., Ltd  
Address: NO.6 Liankun Road, Huangpu District, Guangzhou, China

## EUT Information

EUT Name: IEEE 802.11a/b/g/n 2T2R USB Wi-Fi Module Integrated BT 2.1+EDR/4.2/5.0  
Model: SKO.W618U.1\_638BUE  
Sample Received Date: December 14, 2020  
Sample Status: Normal  
Sample ID: 3538000  
Date of Tested: December 15, 2020~ January 07, 2021

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C	PASS
ISED RSS-247 Issue 2	PASS
ISED RSS-GEN Issue 5	PASS

Prepared By:

Mick Zhang  
Project Engineer

Checked By:

Shawn Wen  
Laboratory Leader

Approved By:

Stephen Guo  
Laboratory Manager



## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with KDB 558074 D01 15.247 Meas Guidance v05r02, 414788 D01 Radiated Test Site v01r01, CFR 47 FCC Part 2, CFR 47 FCC Part 15, ANSI C63.10-2013, ISED RSS-247 Issue 2 and ISED RSS-GEN Issue 5.

## 3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p><b>A2LA (Certificate No.: 4102.01)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p><b>FCC (FCC Designation No.: CN1187)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules</p> <p><b>ISED (Company No.: 21320)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046.</p> <p><b>VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20019 and R-20004 Shielding Room B, the VCCI registration No. is C-20012 and T-20011</p>
---------------------------	--

Note 1: All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China

Note 2: The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3: For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.



## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

### 4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 26 GHz)	5.78 dB (1 GHz ~ 18 GHz)
	5.23 dB (18 GHz ~ 26 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of k=2.	





## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

EUT Name	IEEE 802.11a/b/g/n 2T2R USB Wi-Fi Module Integrated BT 2.1+EDR/4.2/5.0		
Model	SKO.W618U.1_638BUE		
Technology	Bluetooth – BR & EDR		
Transmit Frequency Range	2402 MHz ~ 2480 MHz		
Mode	Basic Rate	Enhanced Data Rate	
Modulation	GFSK	π/4-DQPSK	8DPSK
Packet Type (Maximum Payload):	DH5	2DH5	3DH5
Data Rate	1 Mbps	2 Mbps	3M bps
Supply Voltage	Rate Input:	DC 5 V	

### 5.2. MAXIMUM PEAK OUTPUT POWER

Test Mode	Frequency (MHz)	Channel Number	Maximum Peak Output Power (dBm)	Maximum EIRP (dBm)
GFSK	2402 ~ 2480	0-78[79]	7.21	12.14
8DPSK	2402 ~ 2480	0-78[79]	9.91	14.84

### 5.3. PACKET TYPE CONFIGURATION

Test Mode	Packet Type	Setting (Packet Length)
GFSK	DH1	27
	DH3	183
	DH5	339
π/4-DQPSK	2-DH1	54
	2-DH3	367
	2-DH5	679
8DPSK	3-DH1	83
	3-DH3	552
	3-DH5	1021



### 5.4. CHANNEL LIST

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	20	2422	40	2442	60	2462
01	2403	21	2423	41	2443	61	2463
02	2404	22	2424	42	2444	62	2464
03	2405	23	2425	43	2445	63	2465
04	2406	24	2426	44	2446	64	2466
05	2407	25	2427	45	2447	65	2467
06	2408	26	2428	46	2448	66	2468
07	2409	27	2429	47	2449	67	2469
08	2410	28	2430	48	2450	68	2470
09	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461	/	/

### 5.5. TEST CHANNEL CONFIGURATION

Test Mode	Test Channel	Frequency
GFSK	CH 0(Low Channel), CH 39(MID Channel), CH 78(High Channel)	2402 MHz, 2441 MHz, 2480 MHz
8DPSK	CH 0(Low Channel), CH 39(MID Channel), CH 78(High Channel)	2402 MHz, 2441 MHz, 2480 MHz
GFSK	Hop	2402 MHz ~ 2480 MHz
8DPSK	Hop	2402 MHz ~ 2480 MHz

Note: The hop is hopping mode.

### 5.6. WORST-CASE CONFIGURATIONS

Test Mode	Modulation Technology	Modulation Type	Data Rate	Packet Type
BR	FHSS	GFSK	1Mbit/s	DH5
EDR	FHSS	8DPSK	3Mbit/s	3-DH5

Note: Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates. Only GFSK and 8DPSK test data were report in this report.

### 5.7. THE WORSE CASE POWER SETTING PARAMETER

The Worse Case Power Setting Parameter under 2400 ~ 2483.5 MHz Band				
Test Software		WCN_Combio_Tool		
Test Mode	Transmit Antenna Number	Test Software Setting Value		
		CH 00	CH 39	CH 78
GFSK	1	Default	Default	Default
8DPSK	1	Default	Default	Default

### 5.8. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna kind	Antenna model	Frequency (MHz)	Antenna Cable Length(mm)	Antenna Type	Antenna Gain (dBi)
1	2.00004829	2402-2480	230	PIFA Antenna	4.93
	2.00004838	2402-2480	405	PIFA Antenna	4.73
2	AG-041533-2120	2402-2480	255	PIFA Antenna	0.91
	AG-041533-2119	2402-2480	390	PIFA Antenna	0.71
3	W-M-D-B-N-0-0230	2402-2480	230	PIFA Antenna	4.70
	W-M-D-B-N-0-0390	2402-2480	390	PIFA Antenna	4.50

Note: The EUT has 3 kinds of antennas. For every kind antenna, they differ only in line length. We had Pre-Scan the EUT with all the antennas. For the Radiated Bandedge and Spurious Emission, the worst kind 2.00004829, AG-041533-2120 and W-M-D-B-N-0-0230 test data were report in this report. Other test items we use the worst kind 2.00004829 to test.

Test Mode	Transmit and Receive Mode	Description
GFSK	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.
8DPSK	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.

Note: 1. The value of the antenna gain was declared by customer.

2. The customer declared that BT&WLAN 2.4 GHz, BT& WLAN 5 GHz can't transmit simultaneously.

## 5.9. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Remarks
1	Laptop	ThinkPad	E480	/
2	USB TO UART	/	/	/

### I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB	/	/	1.0	/


### ACCESSORIES

Item	Accessory	Brand Name	Model Name	Description
1	AC Adapter	/	HKA02412020-3K	Input: AC 100~240V, 50/60Hz, 0.8A Output: DC 12V, 2A

### TEST SETUP

The EUT can work in engineering mode with a software through a Laptop.

### SETUP DIAGRAM FOR TESTS

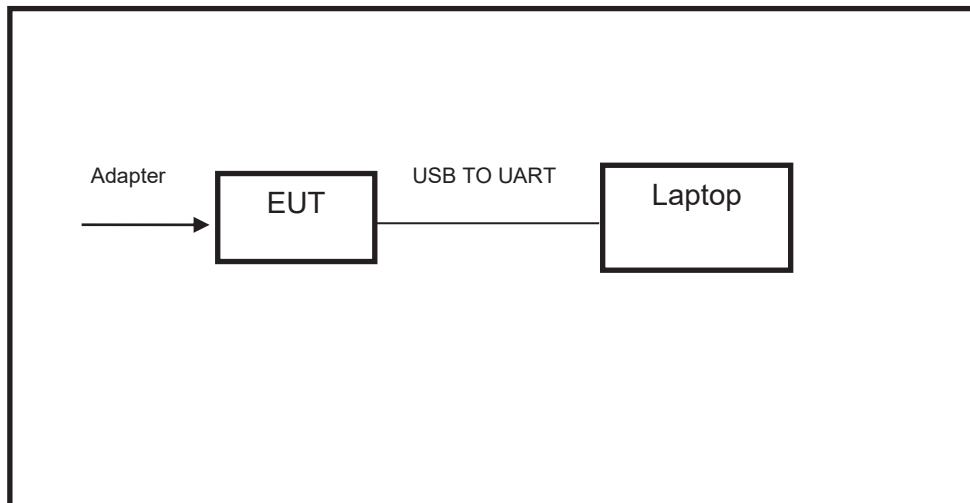

**6. MEASURING INSTRUMENT AND SOFTWARE USED**

Conducted Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
EMI Test Receiver	R&S	ESR3	101961	Nov. 12, 2020	Nov. 11, 2021
Two-Line V-Network	R&S	ENV216	101983	Nov. 12, 2020	Nov. 11, 2021
Artificial Mains Networks	Schwarzbeck	NSLK 8126	8126465	Nov. 12, 2020	Nov. 11, 2021
Software					
Description			Manufacturer	Name	Version
Test Software for Conducted Emissions			Farad	EZ-EMC	Ver. UL-3A1

Radiated Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Nov. 12, 2020	Nov. 11, 2021
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130960	Aug. 11, 2018	Aug. 10, 2021
Preamplifier	HP	8447D	2944A09099	Nov. 12, 2020	Nov. 11, 2021
EMI Measurement Receiver	R&S	ESR26	101377	Nov. 12, 2020	Nov. 11, 2021
Horn Antenna	TDK	HRN-0118	130939	Sept. 17, 2018	Sept. 17, 2021
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Nov. 20, 2020	Nov. 19, 2021
Horn Antenna	Schwarzbeck	BBHA9170	#691	Aug. 11, 2018	Aug. 11, 2021
Preamplifier	TDK	PA-02-2	TRS-307-00003	Nov. 12, 2020	Nov. 11, 2021
Preamplifier	TDK	PA-02-3	TRS-308-00002	Nov. 12, 2020	Nov. 11, 2021
Loop antenna	Schwarzbeck	1519B	00008	Jan.17, 2019	Jan.17,2022
Preamplifier	TDK	PA-02-001-3000	TRS-302-00050	Nov. 12, 2020	Nov. 11, 2021
Preamplifier	Mini-Circuits	ZX60-83LN-S+	SUP01201941	Nov. 20, 2020	Nov. 19, 2021
High Pass Filter	Wi	WHKX10-2700-3000-18000-40SS	23	Nov. 12, 2020	Nov. 11, 2021
Software					
Description			Manufacturer	Name	Version
Test Software for Radiated Emissions			Farad	EZ-EMC	Ver. UL-3A1



Other instruments					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Spectrum Analyzer	Keysight	N9030A	MY55410512	Nov. 20, 2020	Nov. 19, 2021
Dual Channel Power Meter	Keysight	N1912A	MY55416024	Nov. 20, 2020	Nov. 19, 2021
Power Sensor	Keysight	USB Wideband Power Sensor	MY5100022	Nov. 20, 2020	Nov. 19, 2021



## 7. ANTENNA PORT TEST RESULTS

### 7.1. ON TIME AND DUTY CYCLE


#### LIMITS

None; for reporting purposes only.

#### PROCEDURE

Refer to ANSI C63.10-2013 Zero – Span Spectrum Analyzer method.

#### TEST SETUP



#### TEST ENVIRONMENT

Temperature	22.8 °C	Relative Humidity	67.3 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 5 V

#### RESULTS

Please refer to appendix I.

## 7.2. 20 dB BANDWIDTH AND 99 % OCCUPIED BANDWIDTH

### LIMITS

CFR 47FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247 (a) (1) RSS-247 Clause 5.1 (a)	20 dB Bandwidth	None; for reporting purposes only.	2400-2483.5
ISED RSS-Gen Clause 6.7	99 % Occupied Bandwidth	None; for reporting purposes only.	2400-2483.5

### TEST PROCEDURE


Refer to ANSI C63.10-2013 clause 6.9.2.

Connect the EUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	For 20 dB Bandwidth: 1 % to 5 % of the 20 dB bandwidth For 99 % Occupied Bandwidth: 1 % to 5 % of the occupied bandwidth
VBW	For 20 dB Bandwidth: approximately 3×RBW For 99 % Occupied Bandwidth: ≥ 3×RBW
Span	Approximately 2 to 3 times the 20dB bandwidth
Trace	Max hold
Sweep	Auto couple

a) Use the occupied bandwidth function of the instrument, allow the trace to stabilize and report the measured 99 % occupied bandwidth and 20 dB Bandwidth.

### TEST SETUP







**TEST ENVIRONMENT**

Temperature	22.8 °C	Relative Humidity	67.3 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 5 V

**RESULTS**

Please refer to appendix A and B.

### 7.3. CONDUCTED OUTPUT POWER

#### LIMITS


CFR 47 FCC Part15 (15.247), Subpart C ISED RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247 (b) (1) ISED RSS-247 Clause 5.4 (b)	Peak Conducted Output Power	Hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel: 1 watt or 30 dBm; Hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel: 125 mW or 21 dBm	2400-2483.5

#### TEST PROCEDURE

Connect the EUT to a low loss RF cable from the antenna port to the power sensor (video bandwidth is greater than the occupied bandwidth).

Measure peak emission level, the indicated level is the peak output power, after any corrections for external attenuators and cables.

#### TEST SETUP



#### TEST ENVIRONMENT

Temperature	22.8 °C	Relative Humidity	67.3 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 5 V

#### RESULTS

Please refer to appendix C.

## 7.4. CARRIER FREQUENCY SEPARATION

### LIMITS

CFR 47 FCC Part15 (15.247), Subpart C ISSED RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247 (a) (1) ISED RSS-247 Clause 5.1 (b)	Carrier Frequency Separation	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel.	2400-2483.5

### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 7.8.2.


Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Span	wide enough to capture the peaks of two adjacent channels
Detector	Peak
RBW	Start with the RBW set to approximately 30 % of the channel spacing; adjust as necessary to best identify the center of each individual channel.
VBW	≥RBW
Trace	Max hold
Sweep time	Auto couple

Allow the trace to stabilize and use the marker-delta function to determine the separation between the peaks of the adjacent channels.

Compliance of an EUT with the appropriate regulatory limit shall be determined.

### TEST SETUP





**TEST ENVIRONMENT**

Temperature	22.8 °C	Relative Humidity	67.3 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 5 V

**RESULTS**

Please refer to Appendix D.

## 7.5. NUMBER OF HOPPING FREQUENCIES

### LIMITS

CFR 47 FCC Part15 (15.247), Subpart C ISED RSS-247 ISSUE 2		
Section	Test Item	Limit
CFR 47 15.247 (a) (1) III ISED RSS-247 Clause 5.1 (d)	Number of Hopping Frequency	at least 15 hopping channels

### TEST PROCEDURE


Refer to ANSI C63.10-2013 clause 7.8.3.

Connect the EUT to the spectrum Analyzer and use the following settings:

Detector	Peak
RBW	To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
VBW	$\geq$ RBW
Span	The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
Trace	Max hold
Sweep time	Auto couple

Set EUT to transmit maximum output power and switch on frequency hopping function. then set enough count time (larger than 5000 times) to get all the hopping frequency channel displayed on the screen of spectrum analyzer, count the quantity of peaks to get the number of hopping channels.

### TEST SETUP





**TEST ENVIRONMENT**

Temperature	22.8 °C	Relative Humidity	67.3 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 5 V

**RESULTS**

Please refer to appendix F.

## 7.6. TIME OF OCCUPANCY (DWELL TIME)

### LIMITS

CFR 47 FCC Part15 (15.247), Subpart C ISED RSS-247 ISSUE 2		
Section	Test Item	Limit
CFR 47 15.247 (a) (1) III ISED RSS-247 Clause 5.1 (d)	Time of Occupancy (Dwell Time)	The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed.

### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 7.8.4.

Connect the EUT to the spectrum Analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	1 MHz
VBW	≥RBW
Span	Zero span, centered on a hopping channel
Trace	Max hold
Sweep time	As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel

Use the marker-delta function to determine the transmit time per hop (Burst Width). If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

For FHSS Mode (79 Channel):

DH1/3DH1 Dwell Time:  $\text{Burst Width} * (1600/2) * 31.6 / (\text{channel number})$

DH3/3DH3 Dwell Time:  $\text{Burst Width} * (1600/4) * 31.6 / (\text{channel number})$

DH5/3DH5 Dwell Time:  $\text{Burst Width} * (1600/6) * 31.6 / (\text{channel number})$

For AFHSS Mode (20 Channel):


DH1/3DH1 Dwell Time:  $\text{Burst Width} * (1600/2) * 8 / (\text{channel number})$

DH3/3DH3 Dwell Time:  $\text{Burst Width} * (1600/4) * 8 / (\text{channel number})$

DH5/3DH5 Dwell Time:  $\text{Burst Width} * (1600/6) * 8 / (\text{channel number})$



**TEST SETUP**

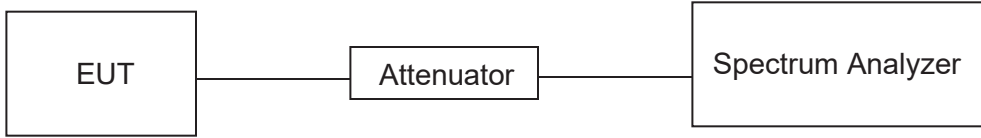

**TEST ENVIRONMENT**

Temperature	22.8 °C	Relative Humidity	67.3 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 5 V

**RESULTS**

Please refer to appendix E.





## 7.7. CONDUCTED BANDEGE AND SPURIOUS EMISSION

### LIMITS

CFR 47 FCC Part15 (15.247), Subpart C ISED RSS-247 ISSUE 2		
Section	Test Item	Limit
CFR 47 FCC §15.247 (d) ISED RSS-247 5.5	Conducted Spurious Emission	at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 7.8.6 and 7.8.8.

Connect the EUT to the spectrum analyser and use the following settings for reference level measurement:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level.


Change the settings for emission level measurement:

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
measurement points	$\geq \text{span}/\text{RBW}$
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements.



**TEST SETUP**



**TEST ENVIRONMENT**

Temperature	22.8 °C	Relative Humidity	67.3 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 5 V

**RESULTS**

Please refer to appendix G & H.



## 8. RADIATED TEST RESULTS

### LIMITS

Please refer to CFR 47 FCC §15.205 and §15.209.

Please refer to ISED RSS-GEN Clause 8.9 and Clause 8.10.

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz-1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz		
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
		Quasi-Peak
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54
Above 1000	500	Peak
		Average
		74
		54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

ISED General field strength limits at frequencies below 30 MHz

Table 6 – General field strength limits at frequencies below 30 MHz		
Frequency	Magnetic field strength (H-Field) (µA/m)	Measurement distance (m)
9 - 490 kHz <sup>Note 1</sup>	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

**Note 1:** The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.



ISED Restricted bands please refer to ISED RSS-GEN Clause 8.10

**Table 7 – Restricted frequency bands<sup>Note 1</sup>**

MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.6
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 - 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138		

**Note 1:** Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

FCC Restricted bands of operation refer to FCC §15.205 (a):


MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
<sup>1</sup> 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.6
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
13.36-13.41			

Note: <sup>1</sup>Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup>Above 38.6c

**TEST SETUP AND PROCEDURE**

Below 30 MHz

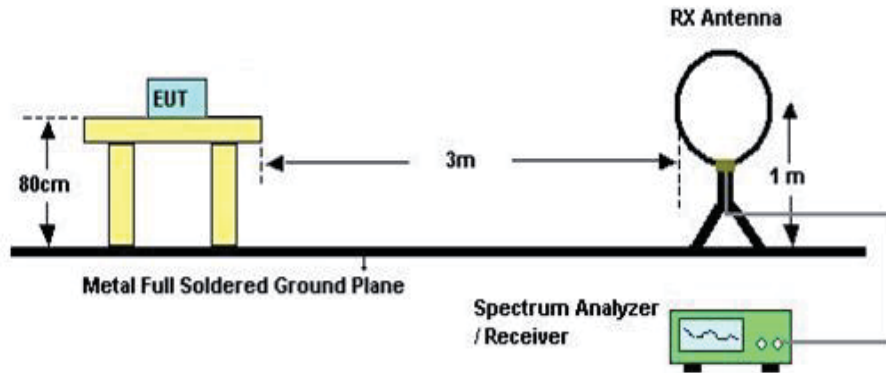


The setting of the spectrum analyser

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.

Below 1 GHz and above 30 MHz

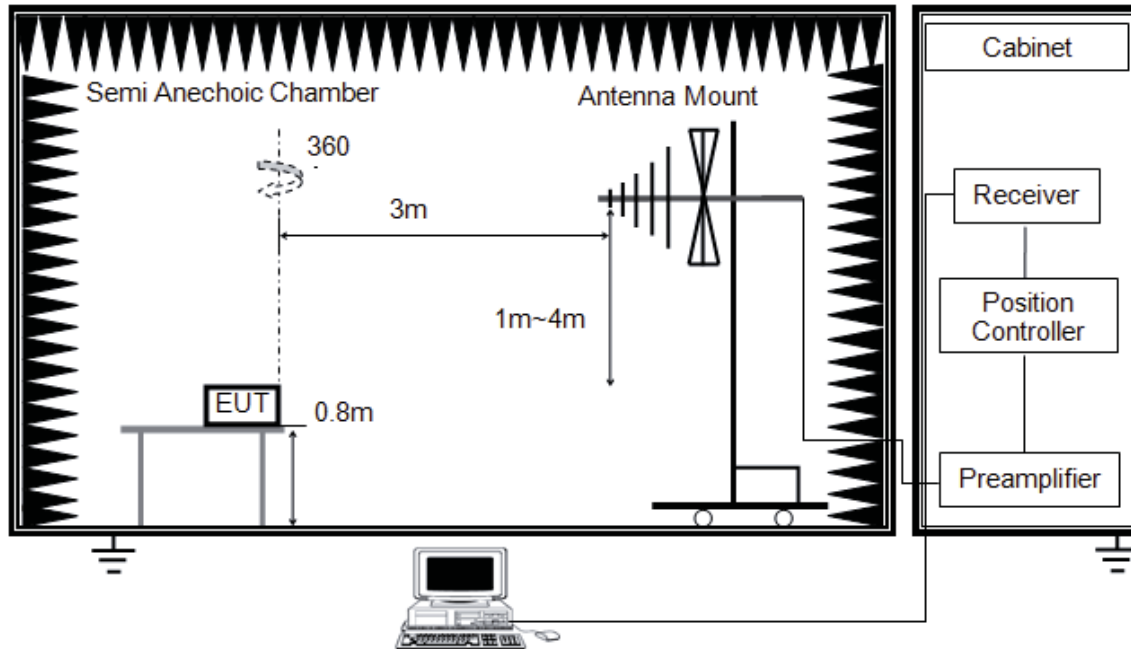


The setting of the spectrum analyser

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

Above 1 GHz

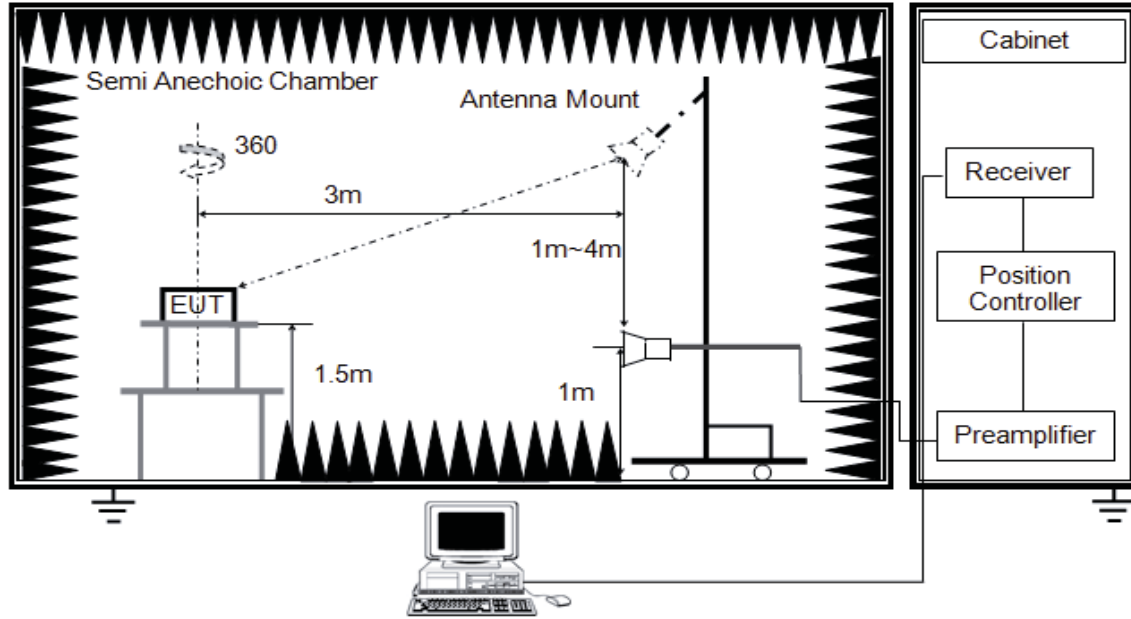


The setting of the spectrum analyser

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (1.5 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.1.ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

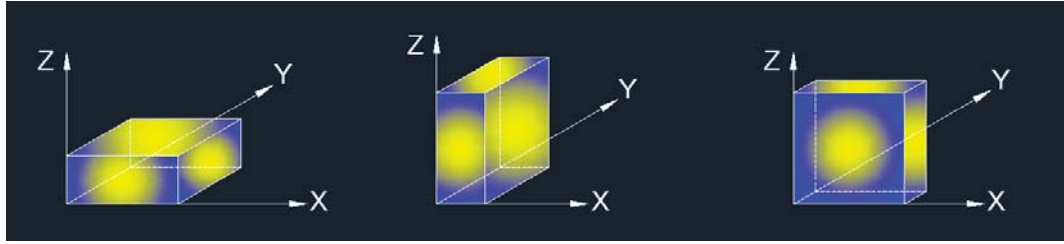

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

Note 2: The EUT was fully exercised with external accessories during the test. In the case of multiple accessory external ports, an external accessory shall be connected to one of each type of port.

### **TEST ENVIRONMENT**

Temperature	22.3°C	Relative Humidity	62.3 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 5 V

### **RESULTS**




## 8.1. RESTRICTED BANDEDGE

### 8.1.1. GFSK MODE

ANT 1-2.00004829

#### RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

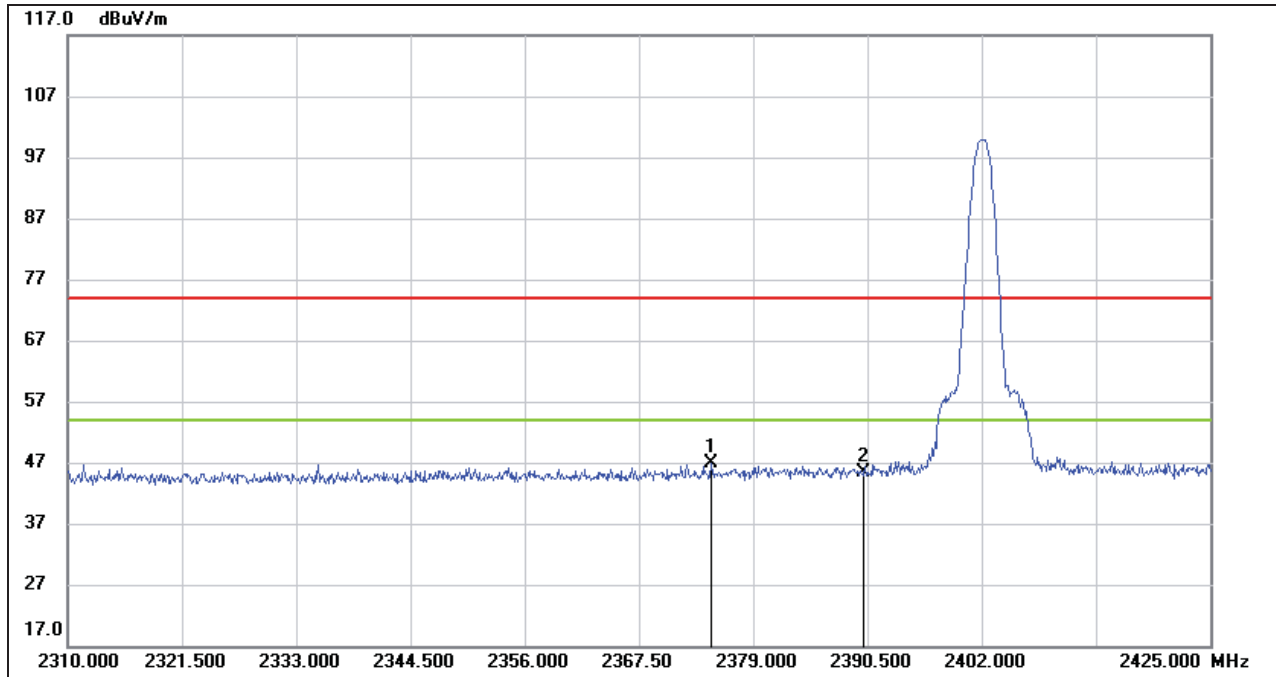


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2374.745	35.29	11.48	46.77	74.00	-27.23	peak
2	2390.000	33.73	11.59	45.32	74.00	-28.68	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)**


**PEAK**

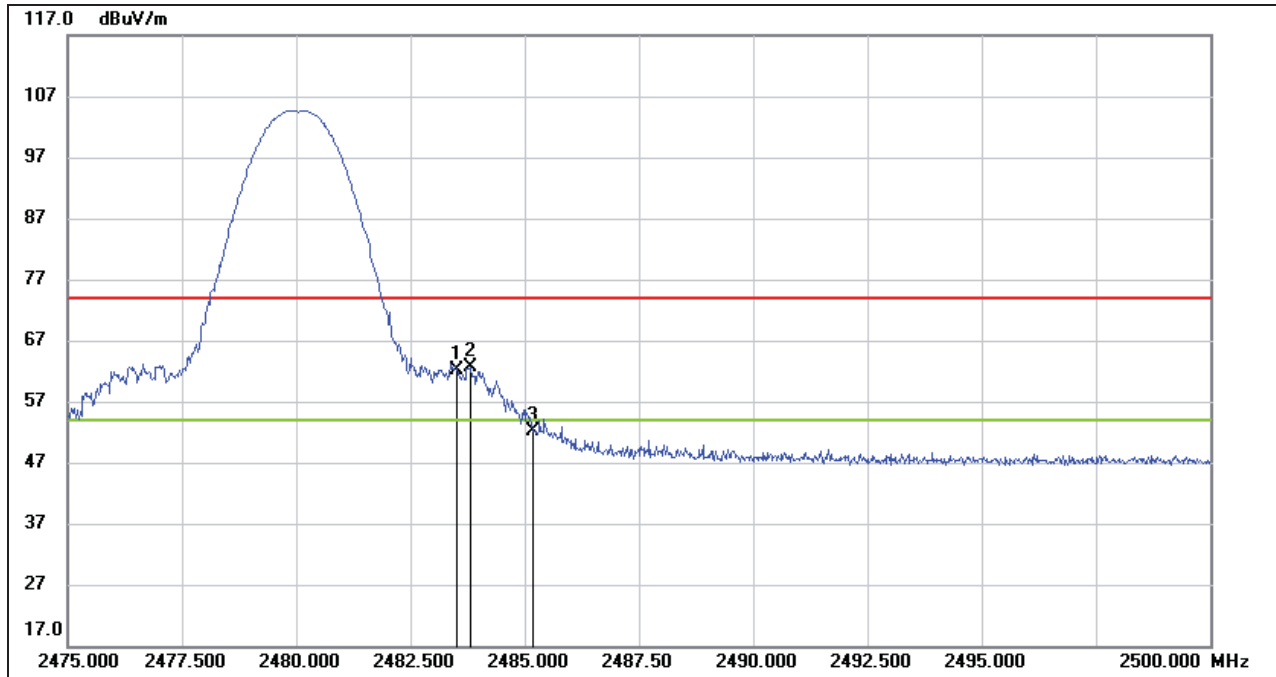

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	50.24	11.97	62.21	74.00	-11.79	peak
2	2483.800	50.60	11.97	62.57	74.00	-11.43	peak
3	2485.175	40.24	11.98	52.22	74.00	-21.78	peak

Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)  
AVG**

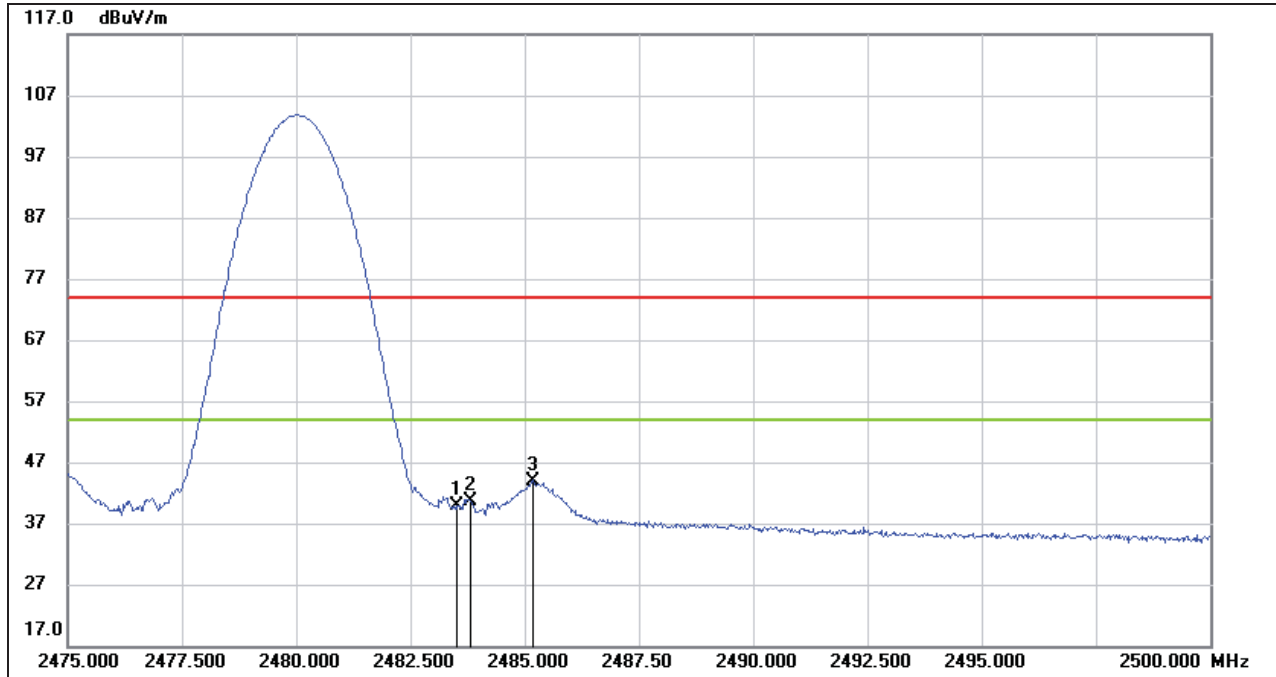


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	27.85	11.97	39.82	54.00	-14.18	AVG
2	2483.800	28.73	11.97	40.70	54.00	-13.30	AVG
3	2485.175	32.02	11.98	44.00	54.00	-10.00	AVG

Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.  
 5. For the transmitting duration, please refer to clause 7.1.  
 6. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

ANT 2-AG-041533-2120

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

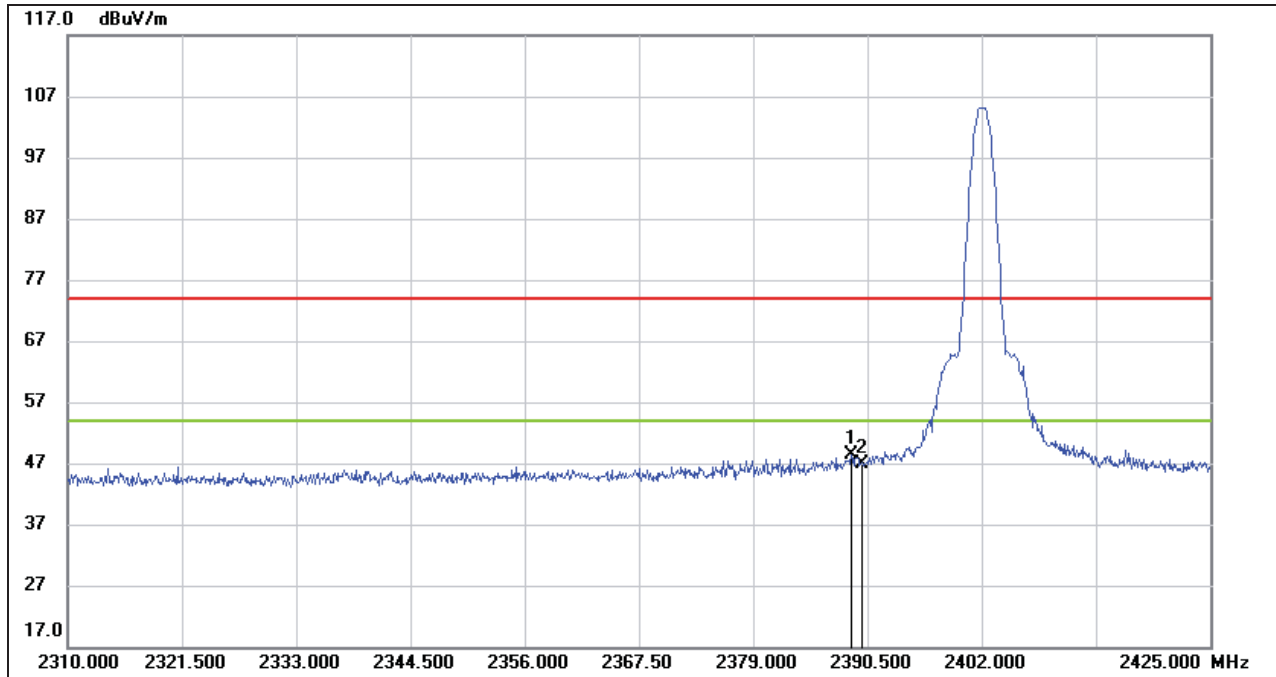


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.890	36.68	11.58	48.26	74.00	-25.74	peak
2	2390.000	35.29	11.59	46.88	74.00	-27.12	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)**


**PEAK**

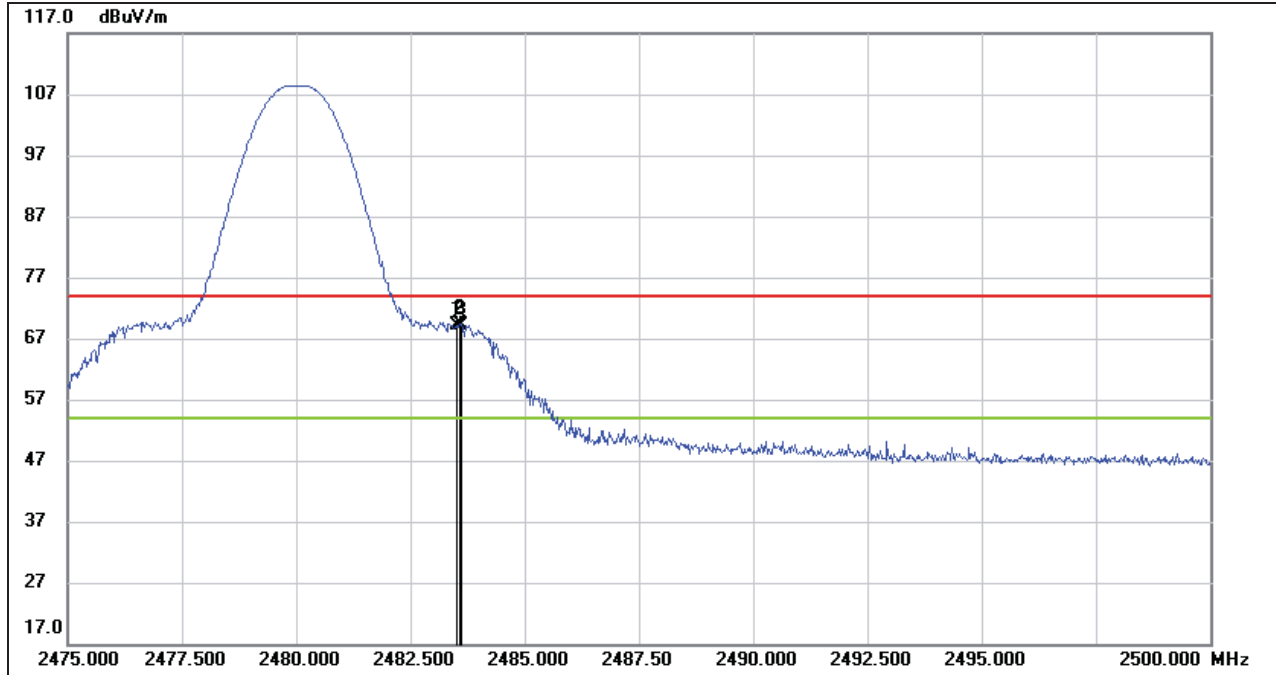

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	57.07	11.97	69.04	74.00	-4.96	peak
2	2483.575	57.47	11.97	69.44	74.00	-4.56	peak
3	2483.625	57.04	11.97	69.01	74.00	-4.99	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)**  
**AVG**

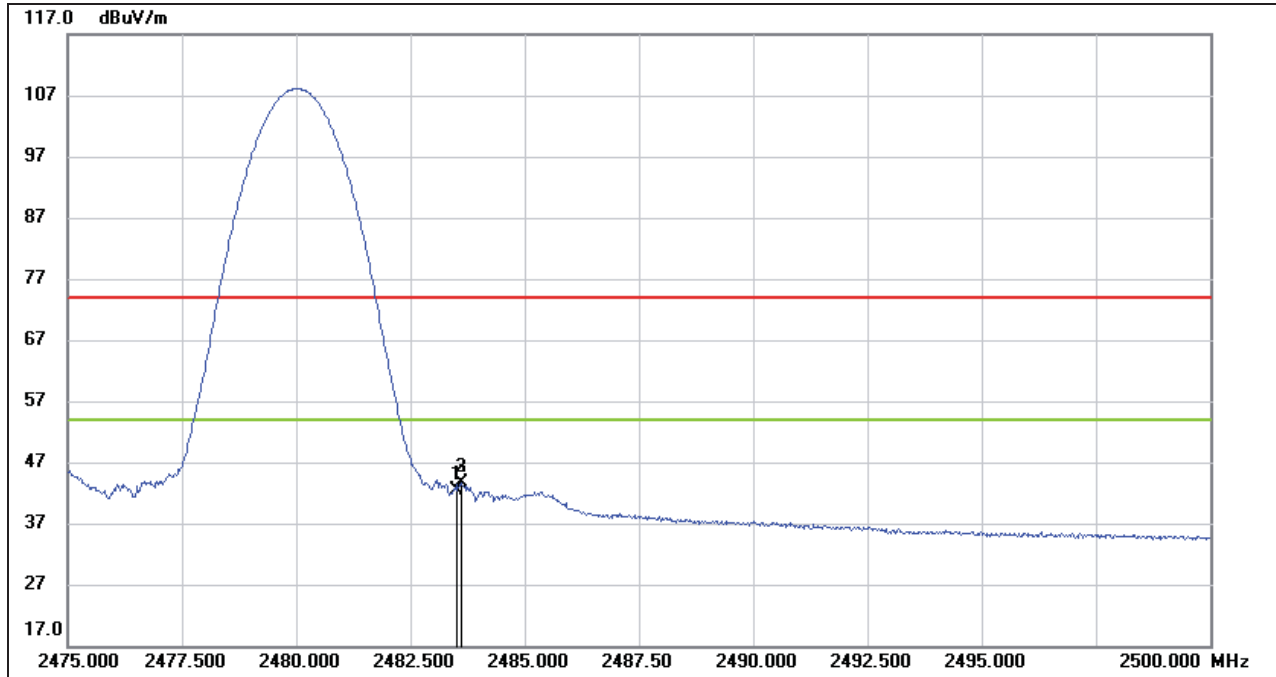


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	30.38	11.97	42.35	54.00	-11.65	AVG
2	2483.575	31.55	11.97	43.52	54.00	-10.48	AVG
3	2483.625	31.64	11.97	43.61	54.00	-10.39	AVG

- Note:
1. Measurement = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.
  5. For the transmitting duration, please refer to clause 7.1.
  6. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.




ANT 3-W-M-D-B-N-0-0230

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

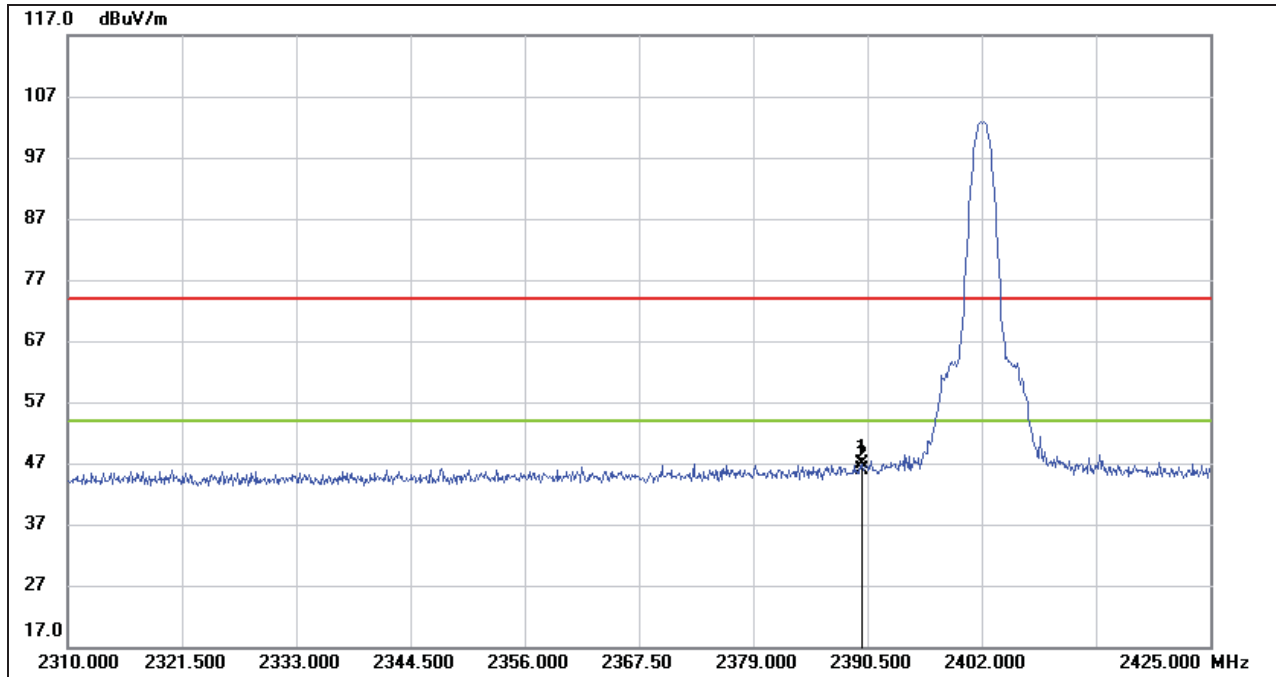

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.925	35.26	11.59	46.85	74.00	-27.15	peak
2	2390.000	34.32	11.59	45.91	74.00	-28.09	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

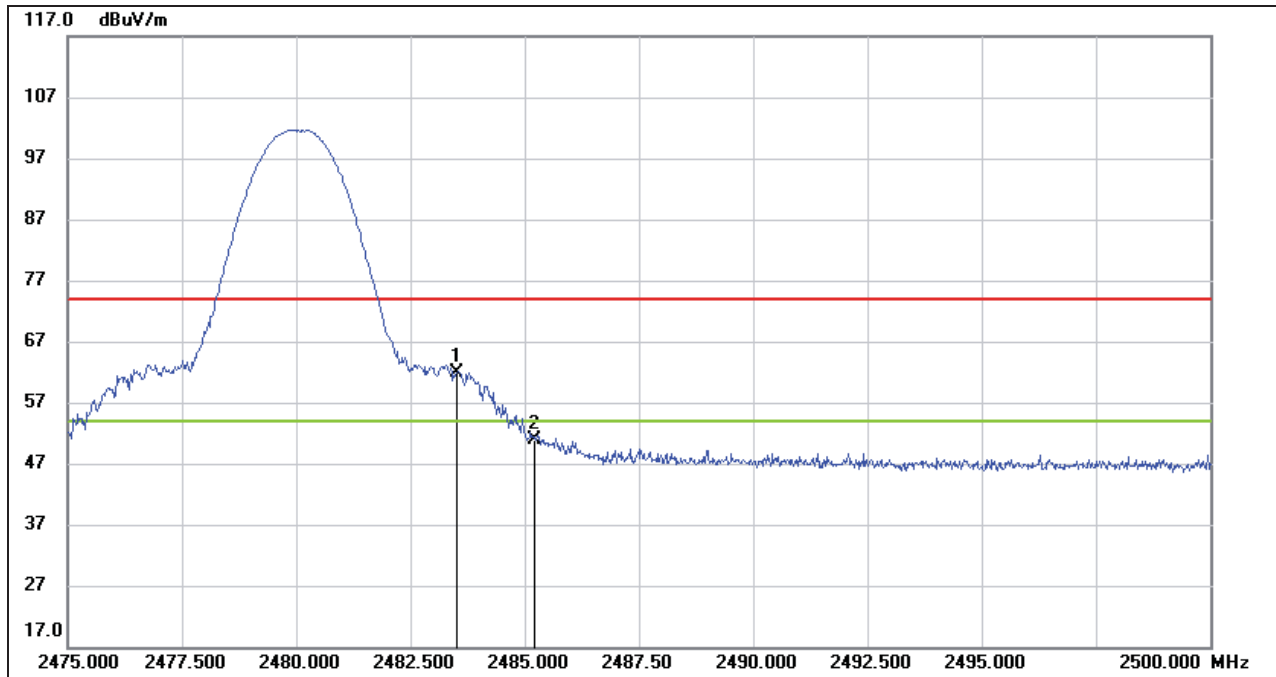**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)****PEAK**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	49.79	11.97	61.76	74.00	-12.24	peak
2	2485.225	39.01	11.98	50.99	74.00	-23.01	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)**

**AVG**

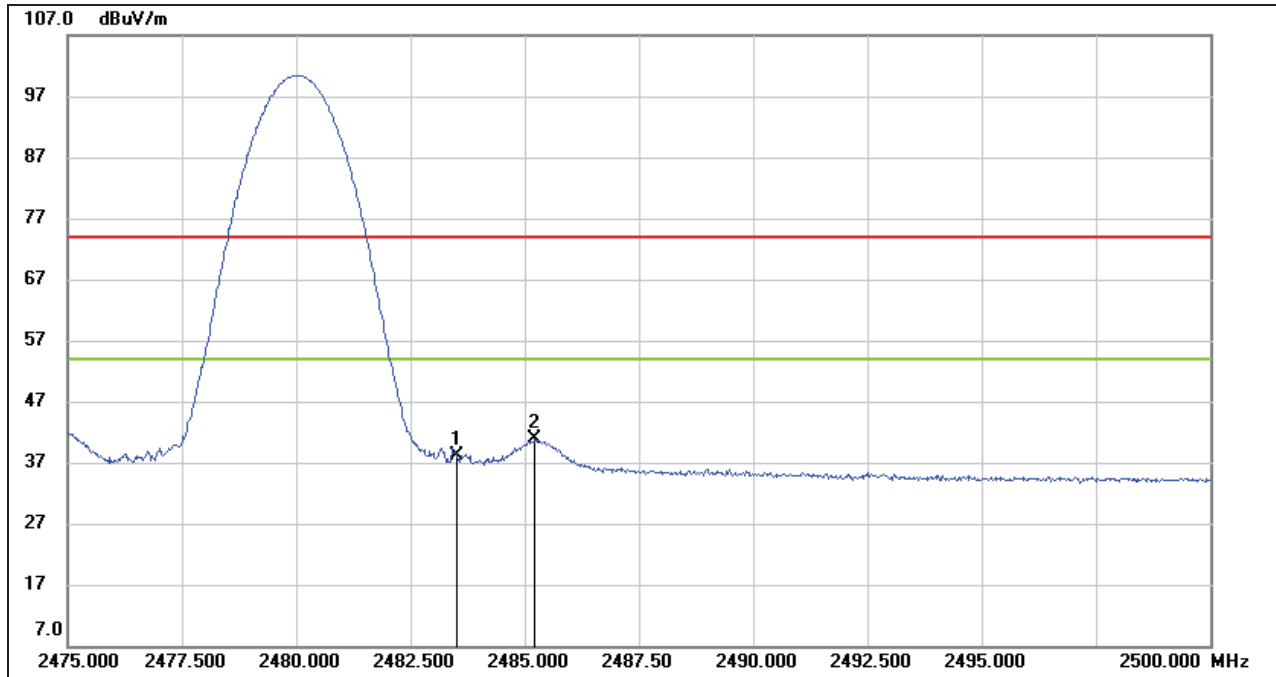

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	26.25	11.97	38.22	54.00	-15.78	AVG
2	2485.225	28.84	11.98	40.82	54.00	-13.18	AVG


- Note:
1. Measurement = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.
  5. For the transmitting duration, please refer to clause 7.1.
  6. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Note: All the polarities (Vertical & Horizontal) had been tested, only the worst data was recorded in the report.

**8.1.2. 8DPSK MODE**

**ANT 1-2.00004829**

**RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)**

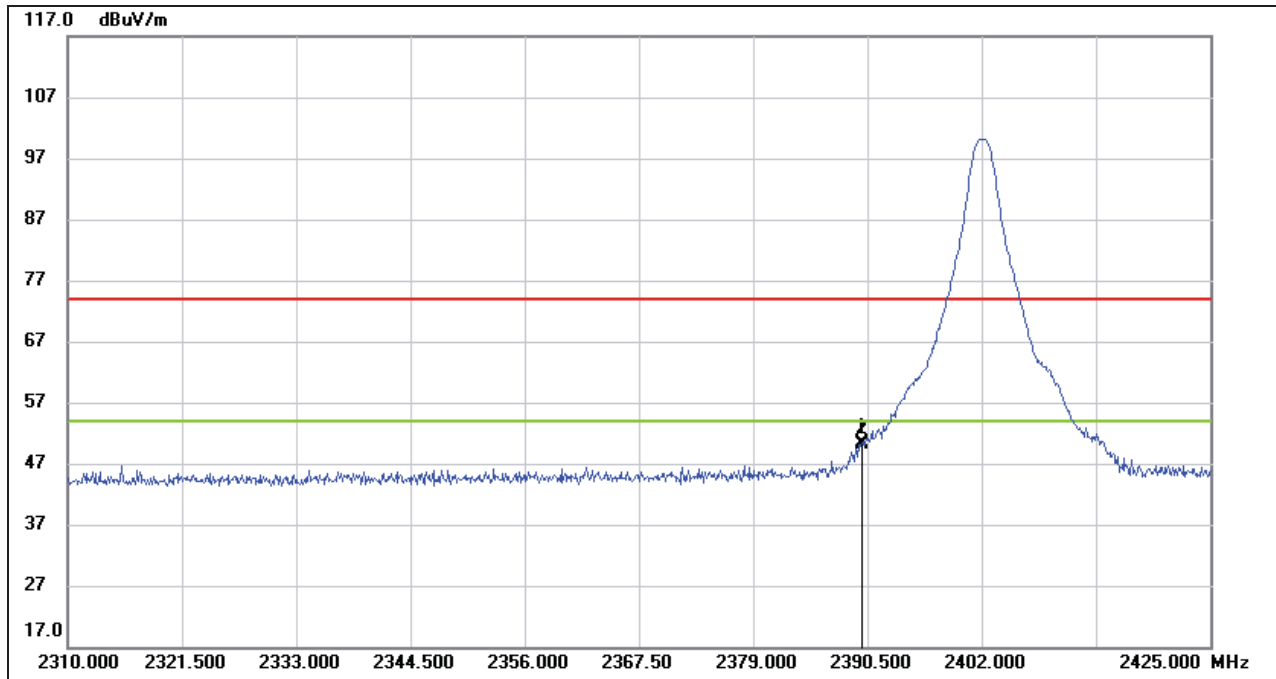


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.925	38.86	11.59	50.45	74.00	-23.55	peak
2	2390.000	38.43	11.59	50.02	74.00	-23.98	peak

Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)**


**PEAK**

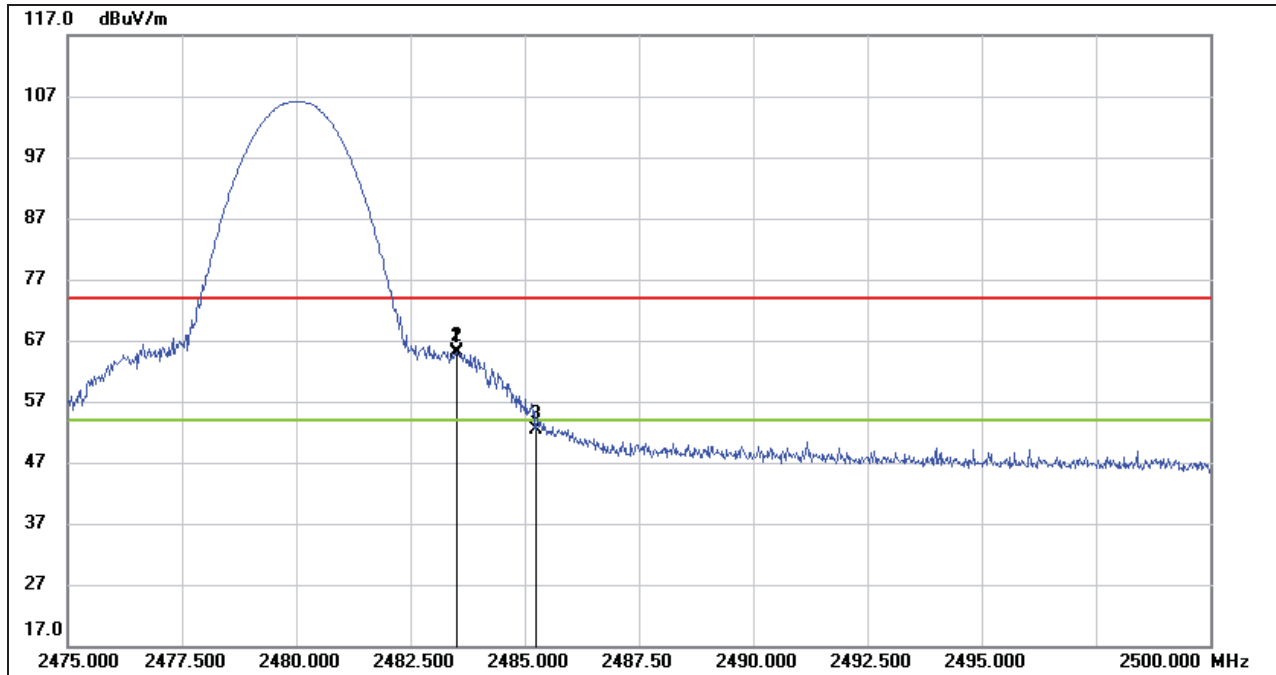

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	52.97	11.97	64.94	74.00	-9.06	peak
2	2483.525	53.11	11.97	65.08	74.00	-8.92	peak
3	2485.250	40.41	11.98	52.39	74.00	-21.61	peak

- Note:
1. Measurement = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)**  
**AVG**

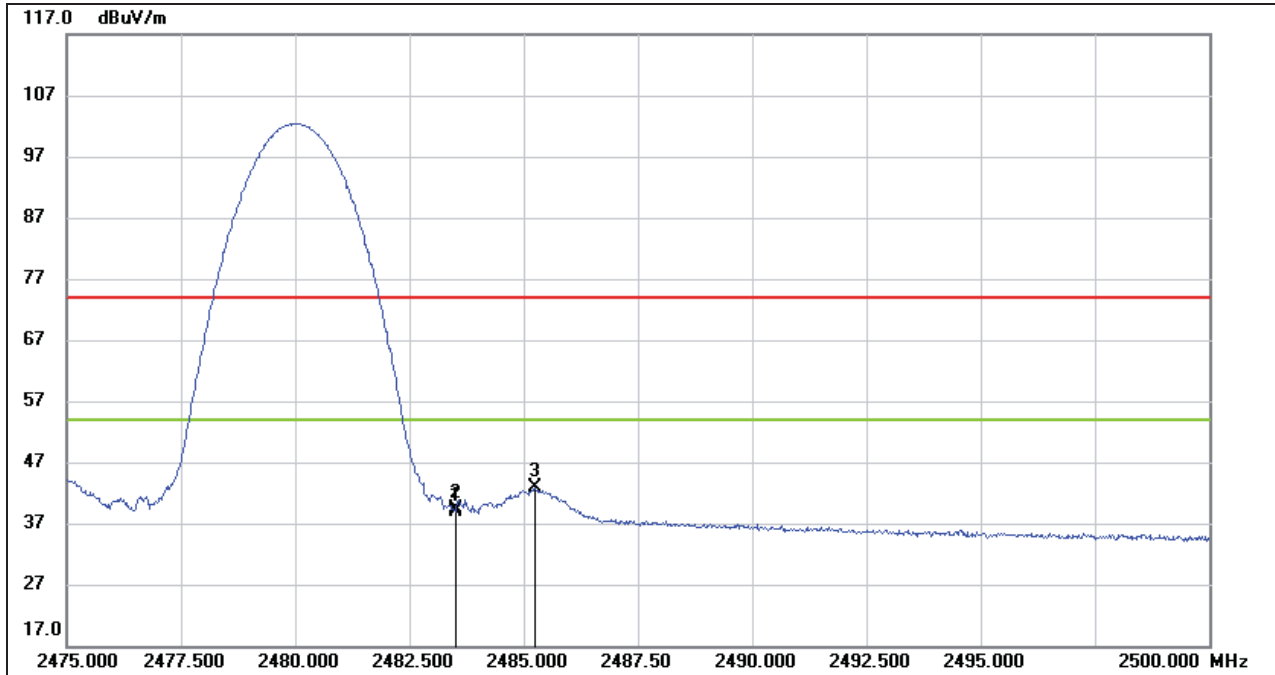


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	26.86	11.97	38.83	54.00	-15.17	AVG
2	2483.525	27.35	11.97	39.32	54.00	-14.68	AVG
3	2485.250	30.82	11.98	42.80	54.00	-11.20	AVG

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.  
 5. For the transmitting duration, please refer to clause 7.1.  
 6. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

ANT 2-AG-041533-2120

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

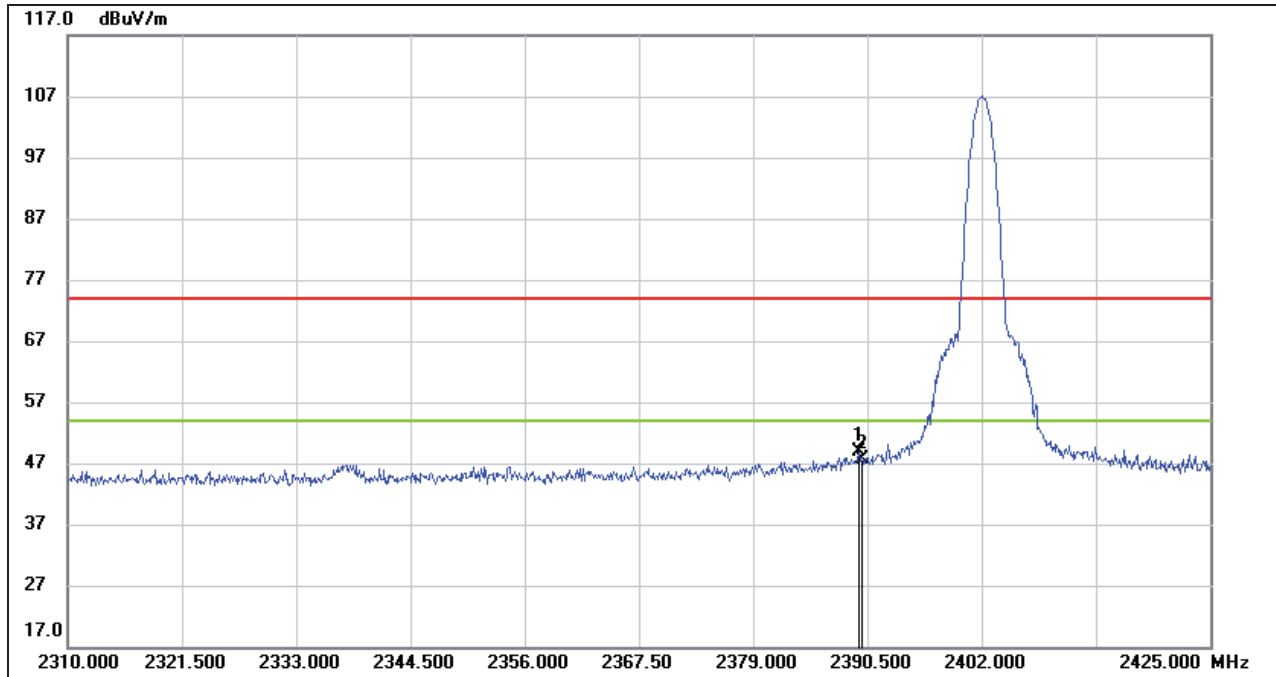


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.580	37.35	11.59	48.94	74.00	-25.06	peak
2	2390.000	35.99	11.59	47.58	74.00	-26.42	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)**

**PEAK**

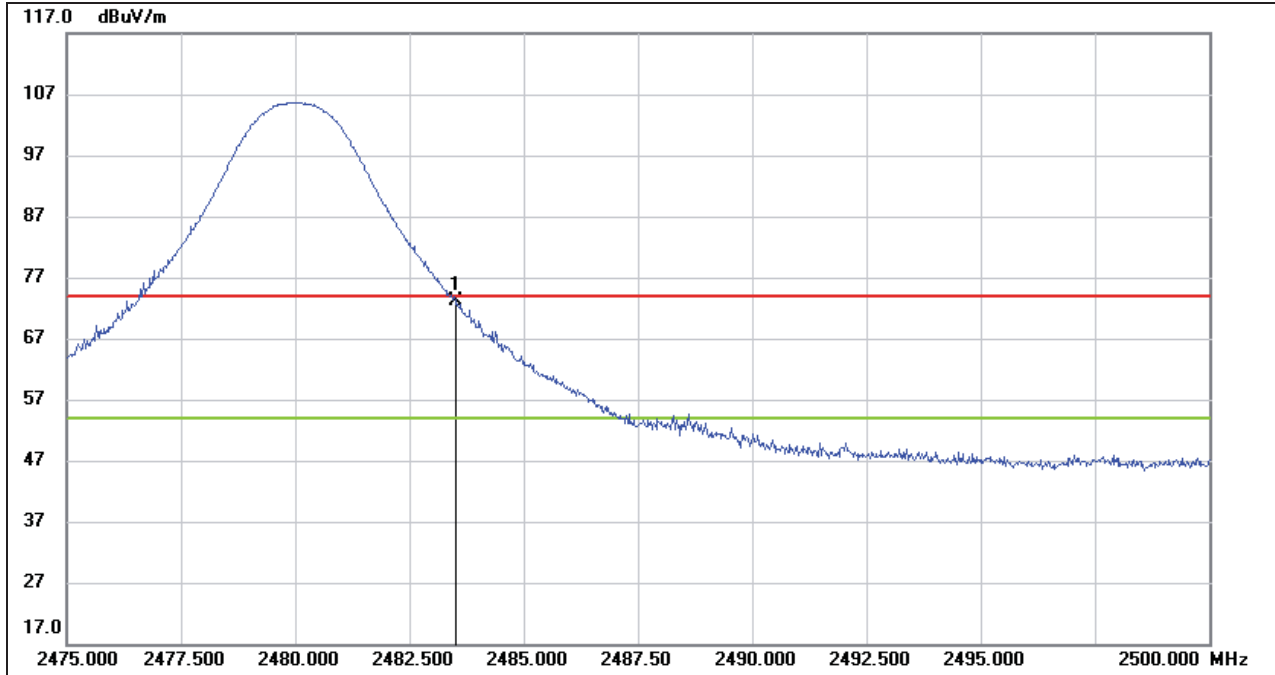


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	61.05	11.97	73.02	74.00	-0.98	peak

- Note:
1. Measurement = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)**  
**AVG**

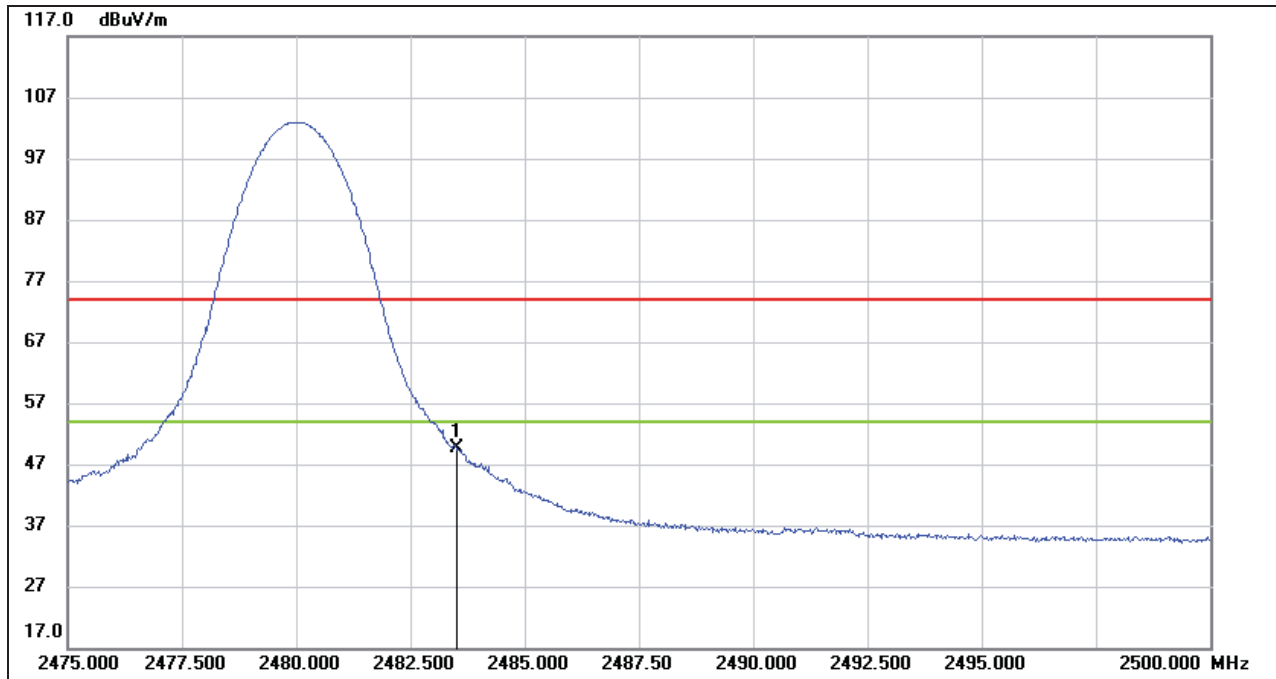


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	37.55	11.97	49.52	54.00	-4.48	AVG

- Note:
1. Measurement = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.
  5. For the transmitting duration, please refer to clause 7.1.
  6. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

ANT 3-W-M-D-B-N-0-0230

**RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)**

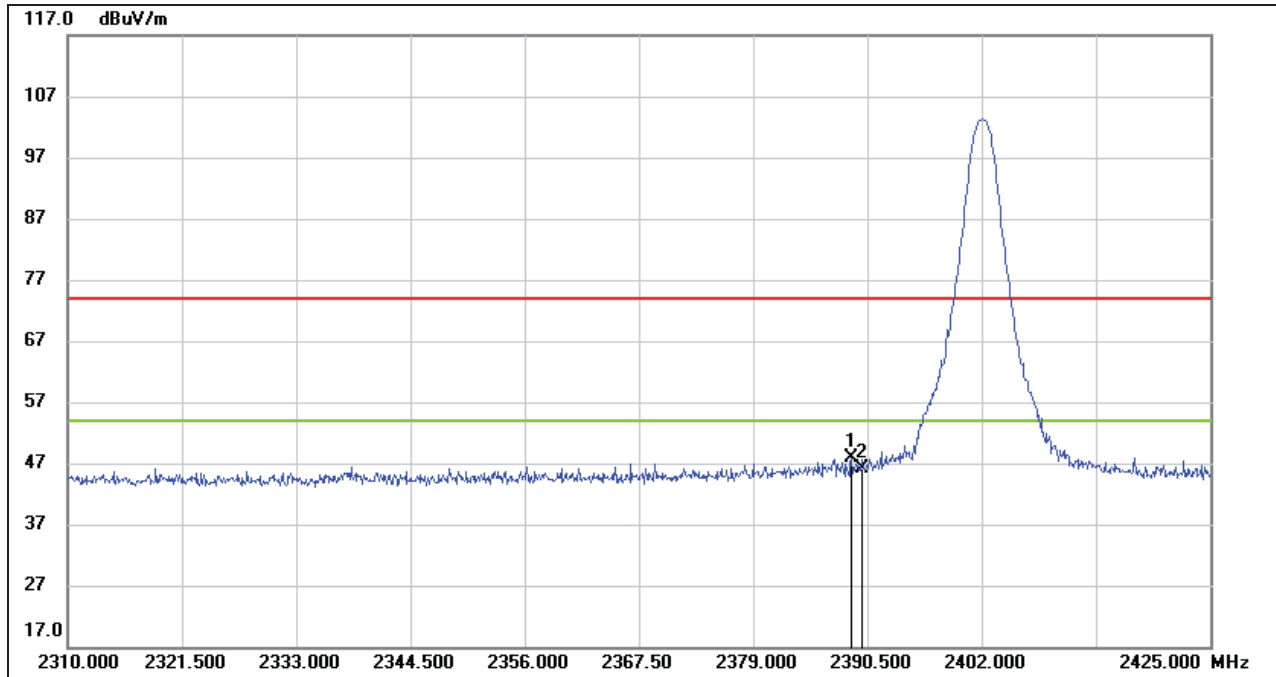

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.890	36.40	11.58	47.98	74.00	-26.02	peak
2	2390.000	34.46	11.59	46.05	74.00	-27.95	peak

Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.





**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)**

**PEAK**




No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	48.98	11.97	60.95	74.00	-13.05	peak
2	2483.550	50.86	11.97	62.83	74.00	-11.17	peak
3	2485.100	38.59	11.98	50.57	74.00	-23.43	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)**

**AVG**

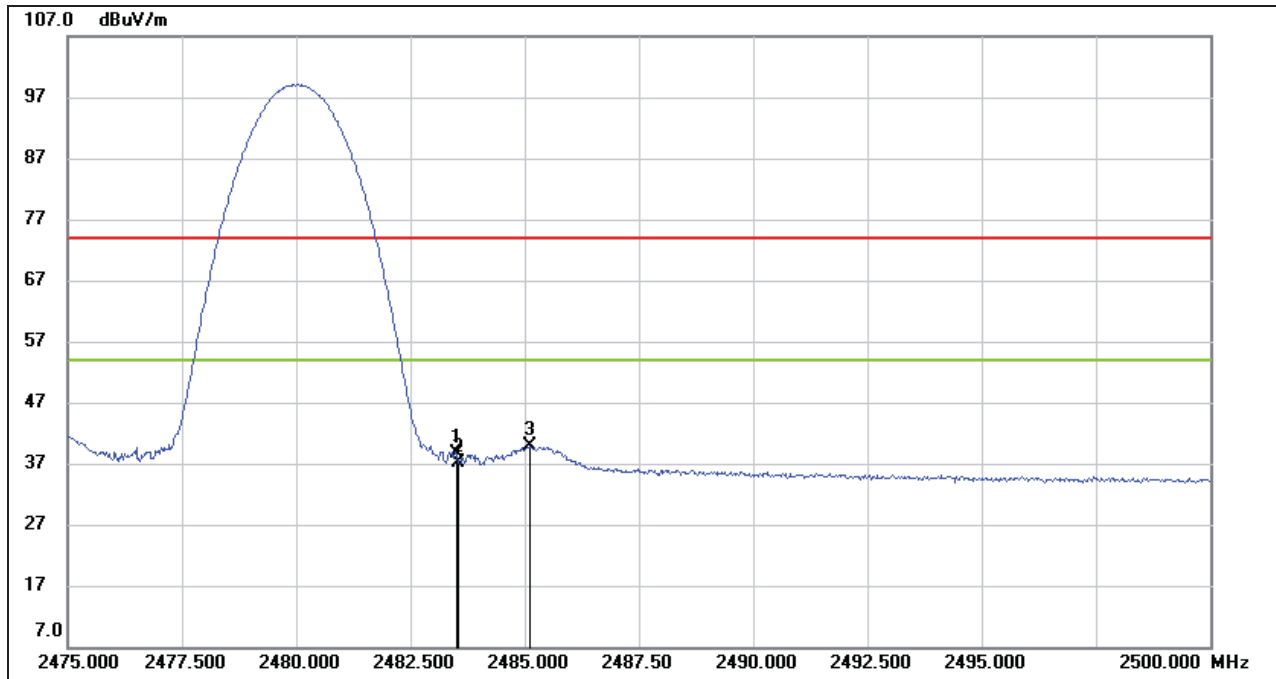

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	26.78	11.97	38.75	54.00	-15.25	AVG
2	2483.550	25.27	11.97	37.24	54.00	-16.76	AVG
3	2485.100	27.92	11.98	39.90	54.00	-14.10	AVG

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.  
 5. For the transmitting duration, please refer to clause 7.1.  
 6. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


Note: All the polarities (Vertical & Horizontal) had been tested, only the worst data was recorded in the report.

## 8.2. SPURIOUS EMISSIONS (1 GHz ~ 3 GHz)

### 8.2.1. GFSK MODE

ANT 1-2.00004829


#### HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

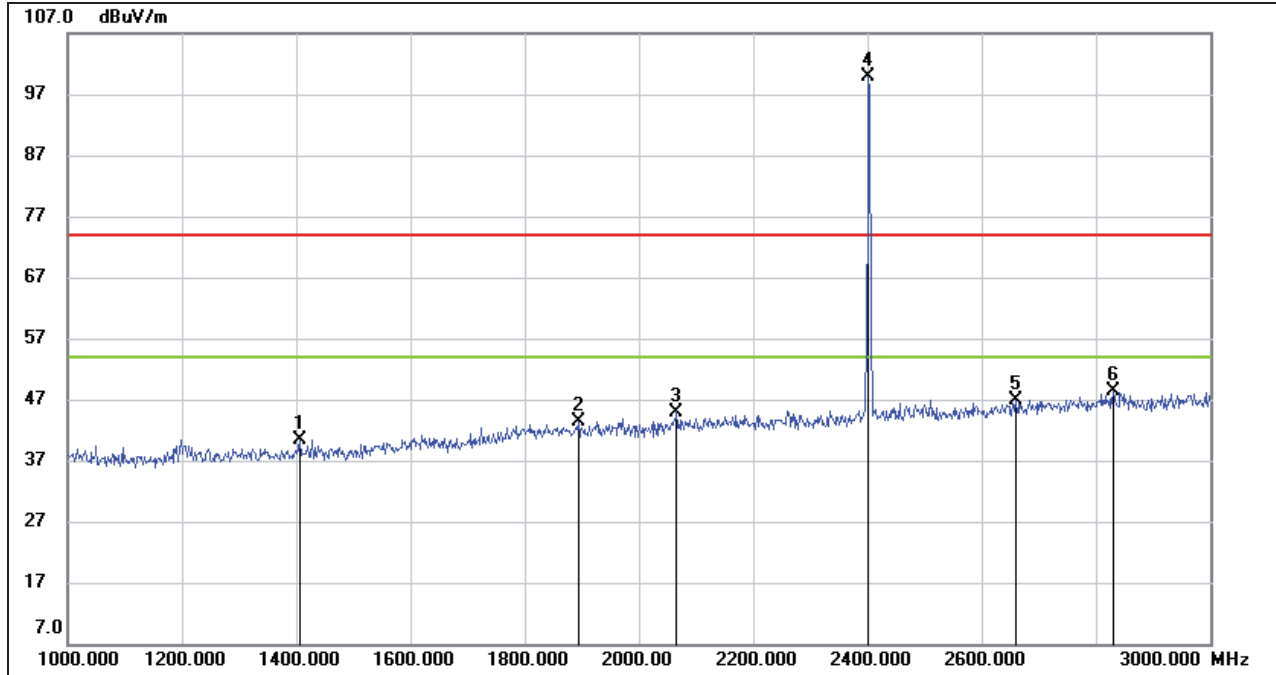

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1406.000	33.75	6.72	40.47	74.00	-33.53	peak
2	1894.000	33.47	9.79	43.26	74.00	-30.74	peak
3	2066.000	34.48	10.52	45.00	74.00	-29.00	peak
4	2402.000	88.12	11.66	99.78	/	/	fundamental
5	2660.000	34.59	12.29	46.88	74.00	-27.12	peak
6	2830.000	34.95	13.31	48.26	74.00	-25.74	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.


**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**

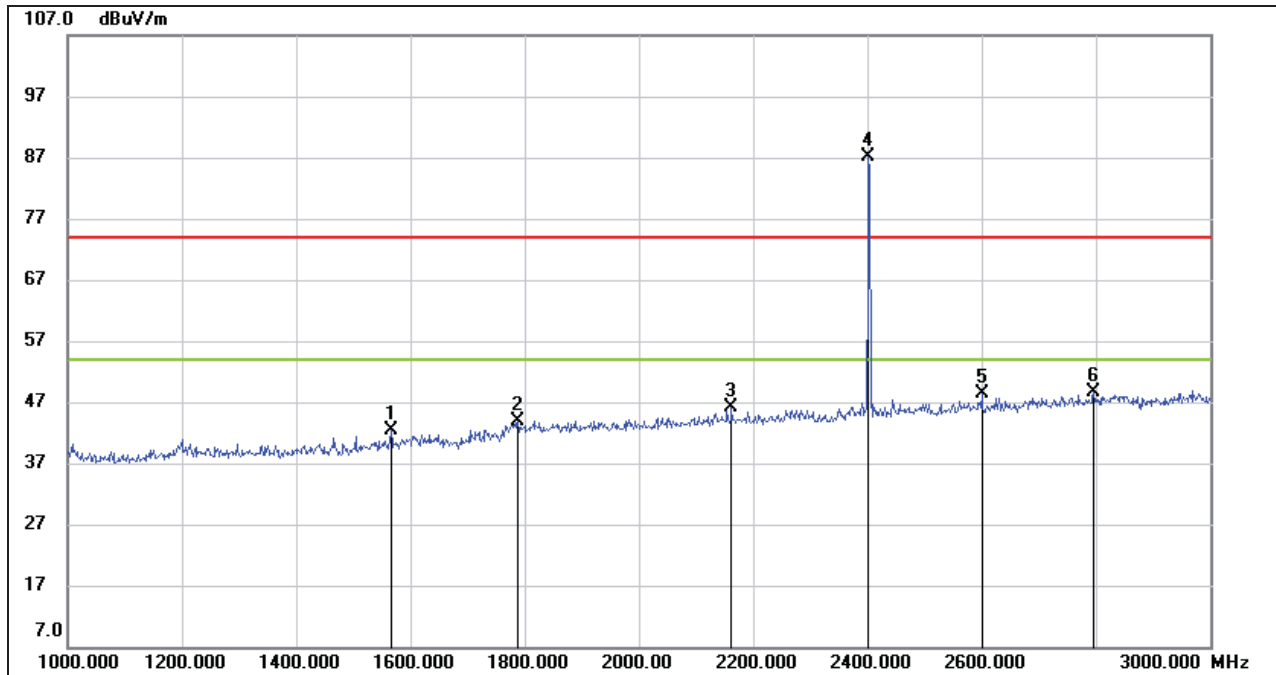

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1566.000	34.79	7.58	42.37	74.00	-31.63	peak
2	1788.000	34.41	9.46	43.87	74.00	-30.13	peak
3	2162.000	35.16	10.93	46.09	74.00	-27.91	peak
4	2402.000	75.57	11.66	87.23	/	/	fundamental
5	2600.000	36.34	11.96	48.30	74.00	-25.70	peak
6	2796.000	35.38	13.21	48.59	74.00	-25.41	peak


Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.

**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**

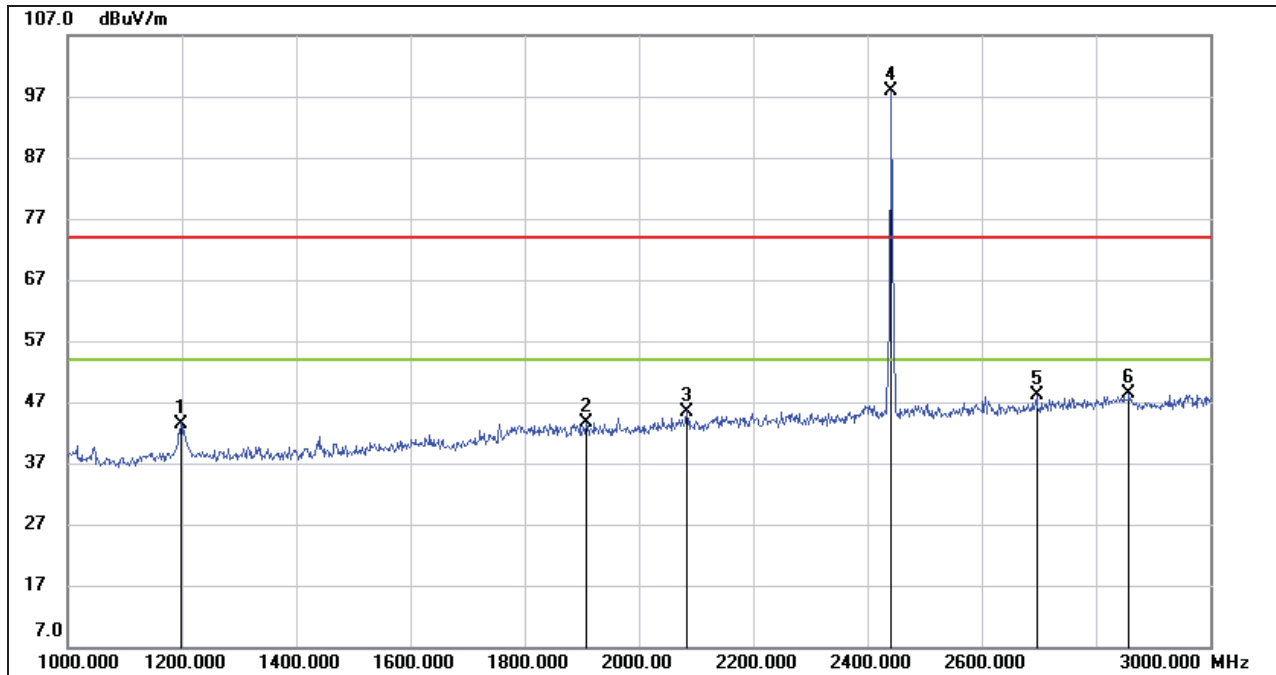


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1198.000	37.02	6.48	43.50	74.00	-30.50	peak
2	1908.000	33.83	9.81	43.64	74.00	-30.36	peak
3	2084.000	34.84	10.66	45.50	74.00	-28.50	peak
4	2441.000	86.03	11.81	97.84	/	/	fundamental
5	2696.000	35.53	12.50	48.03	74.00	-25.97	peak
6	2858.000	35.01	13.37	48.38	74.00	-25.62	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.

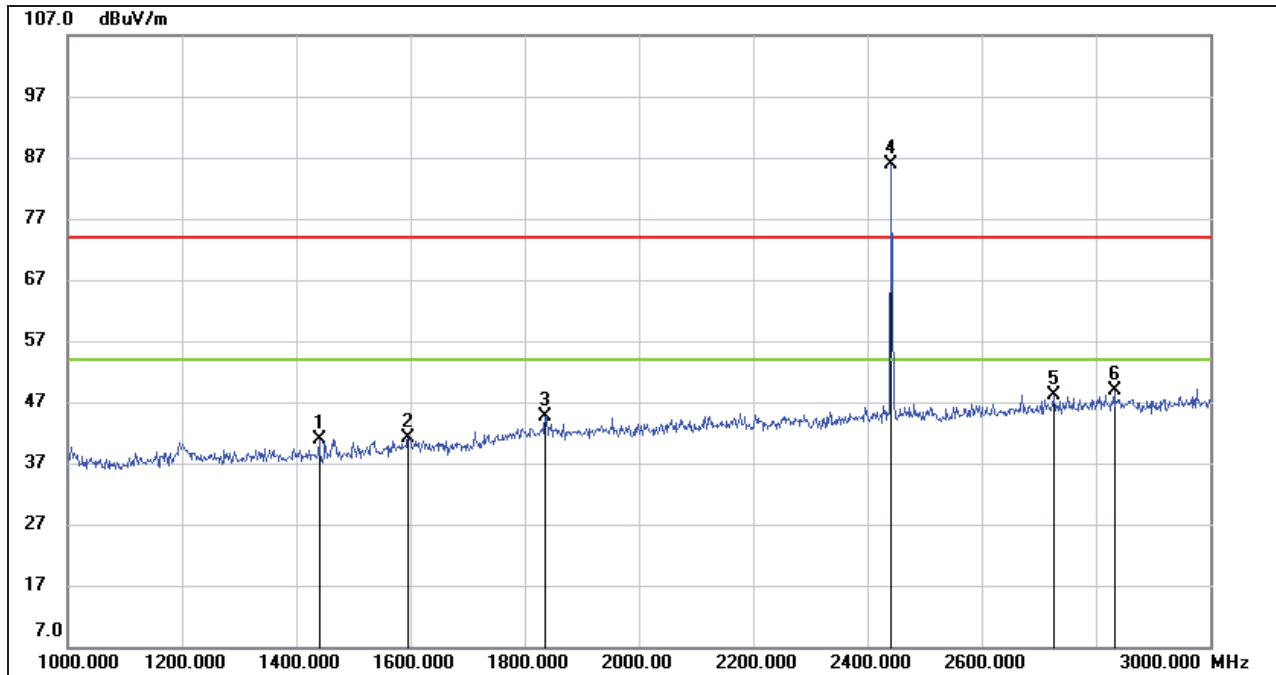**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**


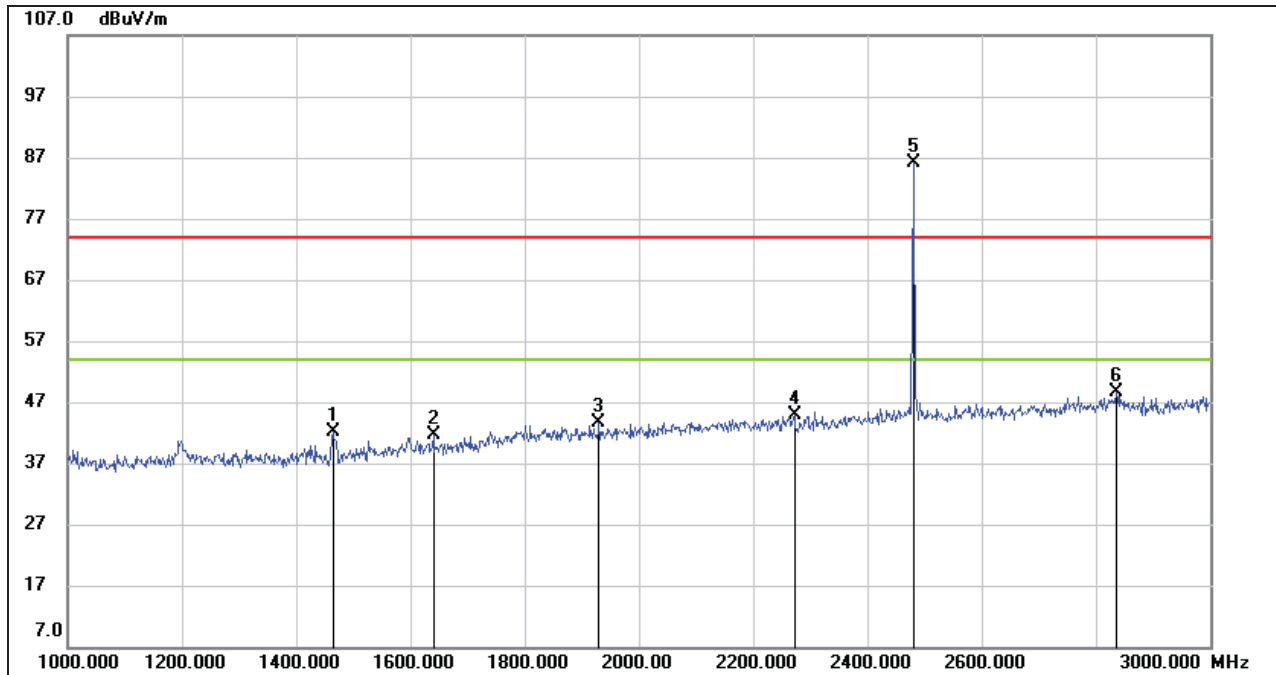
No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1440.000	34.16	6.79	40.95	74.00	-33.05	peak
2	1596.000	33.35	7.87	41.22	74.00	-32.78	peak
3	1836.000	34.85	9.70	44.55	74.00	-29.45	peak
4	2441.000	74.05	11.81	85.86	/	/	fundamental
5	2726.000	35.35	12.70	48.05	74.00	-25.95	peak
6	2832.000	35.49	13.32	48.81	74.00	-25.19	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.

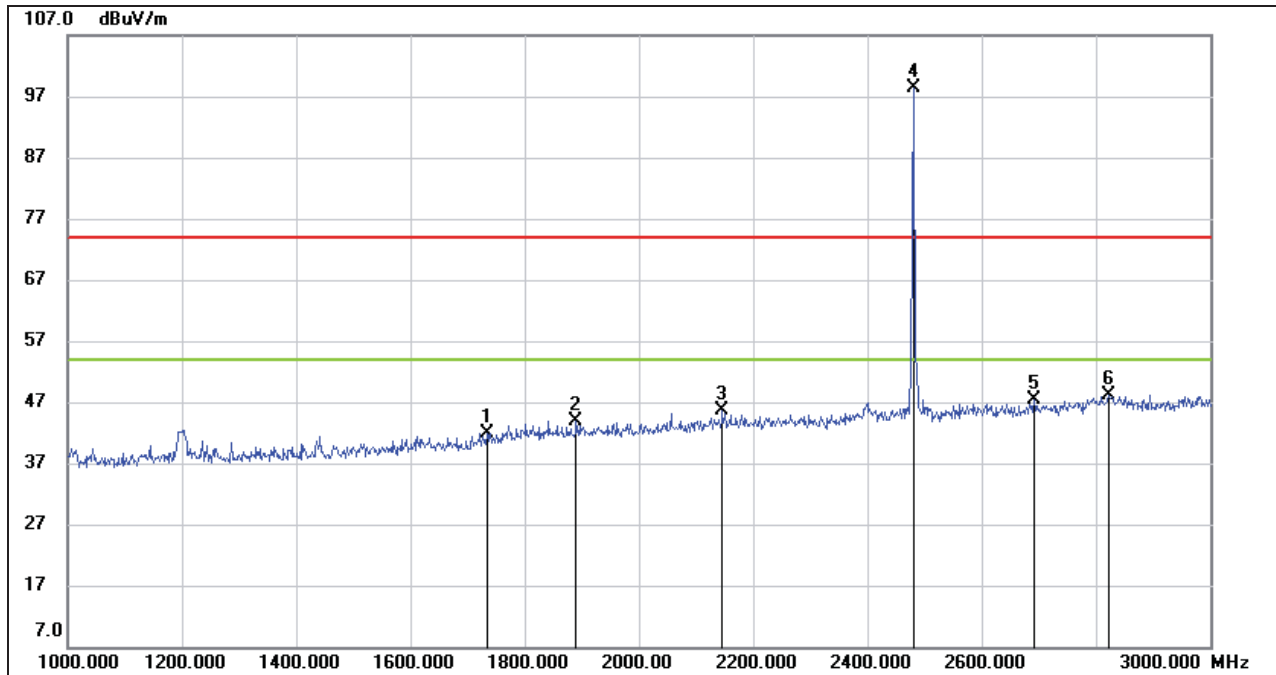**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1734.000	33.32	8.63	41.95	74.00	-32.05	peak
2	1890.000	34.15	9.77	43.92	74.00	-30.08	peak
3	2146.000	34.68	10.89	45.57	74.00	-28.43	peak
4	2480.000	86.41	11.95	98.36	/	/	fundamental
5	2692.000	34.88	12.46	47.34	74.00	-26.66	peak
6	2822.000	34.84	13.29	48.13	74.00	-25.87	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.

**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**


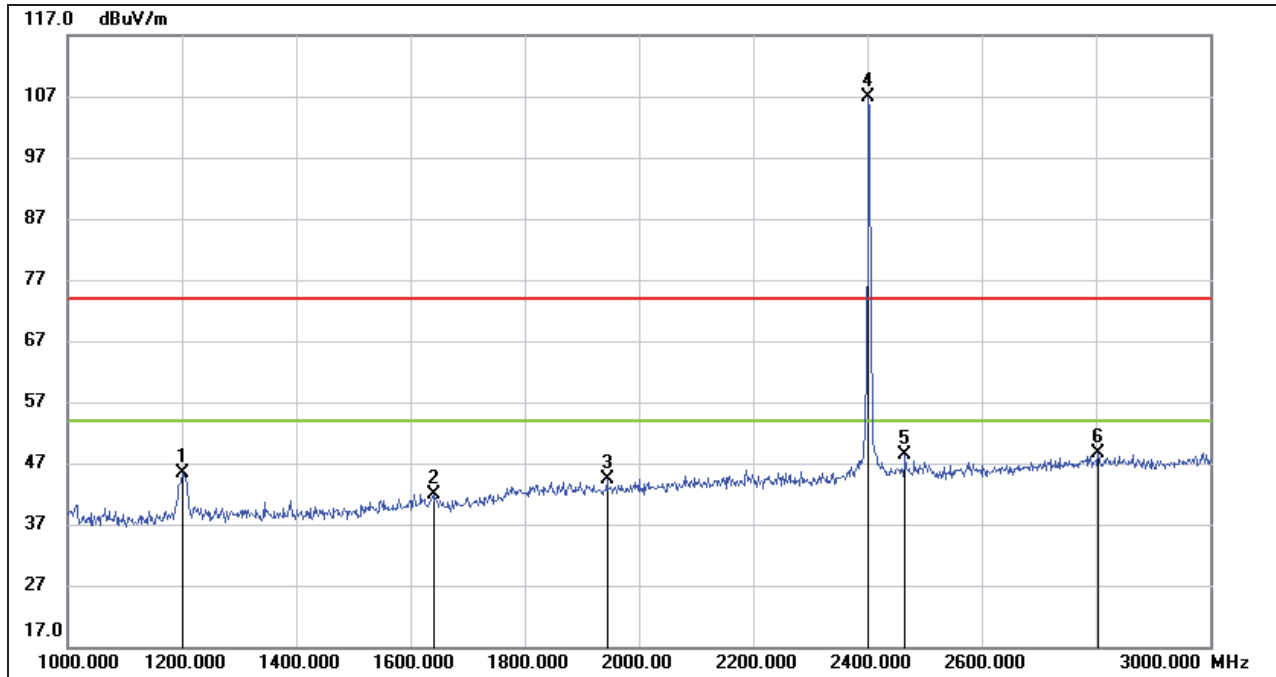
No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1464.000	35.29	6.86	42.15	74.00	-31.85	peak
2	1640.000	33.67	7.99	41.66	74.00	-32.34	peak
3	1930.000	33.65	9.86	43.51	74.00	-30.49	peak
4	2272.000	33.91	11.00	44.91	74.00	-29.09	peak
5	2480.000	74.27	11.95	86.22	/	/	fundamental
6	2836.000	35.28	13.32	48.60	74.00	-25.40	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.




ANT 2-AG-041533-2120

**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)**



No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1200.000	38.85	6.50	45.35	74.00	-28.65	peak
2	1642.000	33.81	7.99	41.80	74.00	-32.20	peak
3	1944.000	34.47	9.90	44.37	74.00	-29.63	peak
4	2402.000	95.33	11.66	106.99	/	/	fundamental
5	2466.000	36.42	11.91	48.33	74.00	-25.67	peak
6	2804.000	35.43	13.24	48.67	74.00	-25.33	peak


- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.

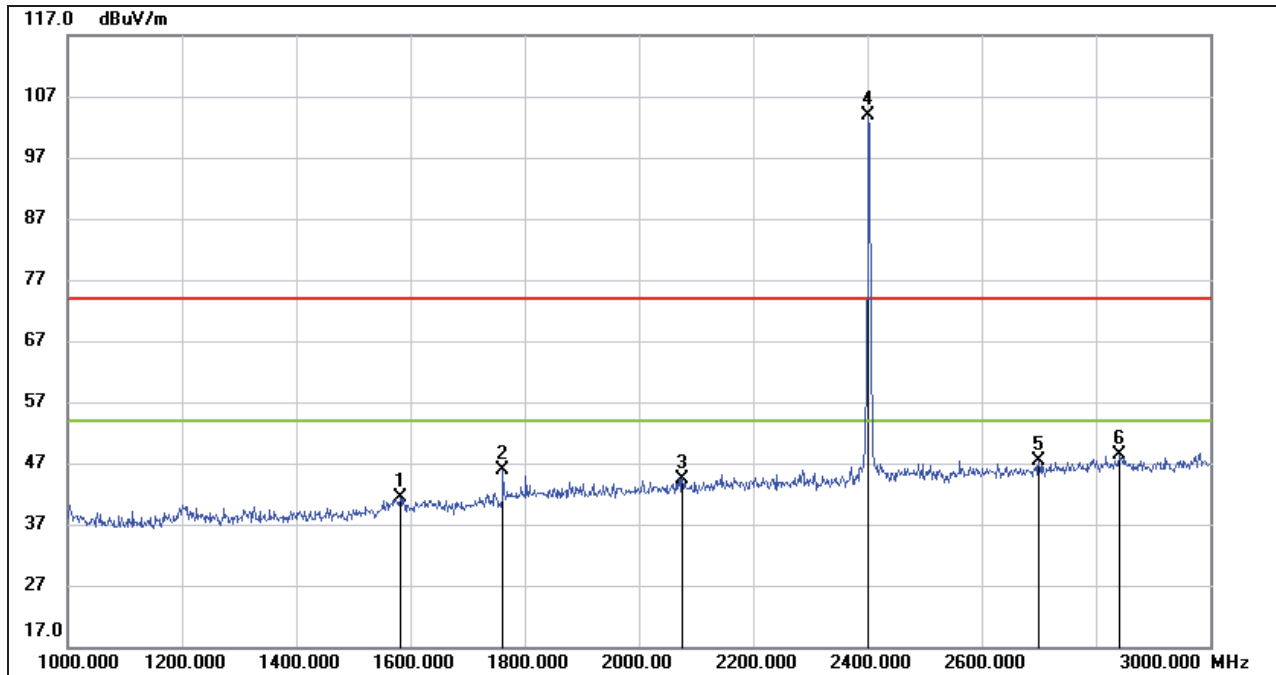**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1582.000	33.54	7.73	41.27	74.00	-32.73	peak
2	1762.000	36.75	9.06	45.81	74.00	-28.19	peak
3	2076.000	33.90	10.60	44.50	74.00	-29.50	peak
4	2402.000	92.22	11.66	103.88	/	/	fundamental
5	2700.000	34.89	12.51	47.40	74.00	-26.60	peak
6	2840.000	35.17	13.32	48.49	74.00	-25.51	peak


- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.

**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**

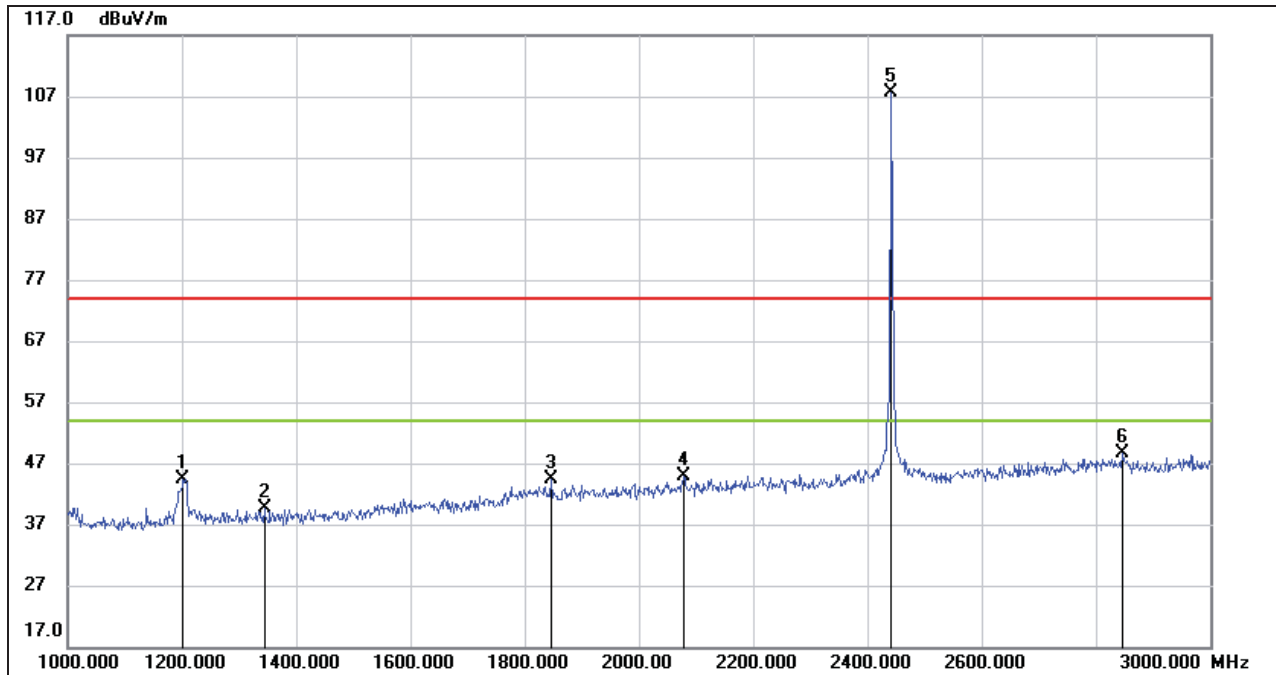

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1202.000	37.87	6.50	44.37	74.00	-29.63	peak
2	1344.000	32.89	6.68	39.57	74.00	-34.43	peak
3	1846.000	34.71	9.71	44.42	74.00	-29.58	peak
4	2078.000	34.32	10.61	44.93	74.00	-29.07	peak
5	2441.000	95.74	11.81	107.55	/	/	fundamental
6	2846.000	35.31	13.35	48.66	74.00	-25.34	peak


- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.

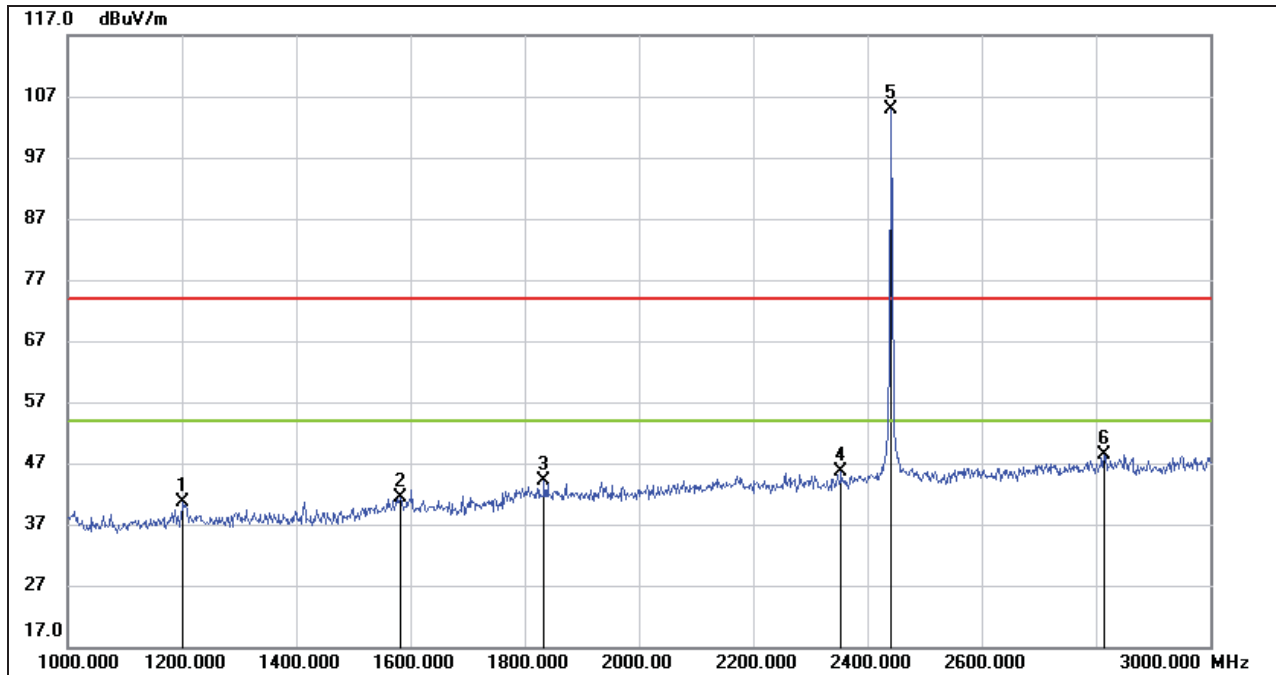**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1202.000	34.08	6.50	40.58	74.00	-33.42	peak
2	1582.000	33.69	7.73	41.42	74.00	-32.58	peak
3	1834.000	34.46	9.69	44.15	74.00	-29.85	peak
4	2354.000	34.17	11.36	45.53	74.00	-28.47	peak
5	2441.000	93.10	11.81	104.91	/	/	fundamental
6	2814.000	35.10	13.27	48.37	74.00	-25.63	peak


- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.

**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**

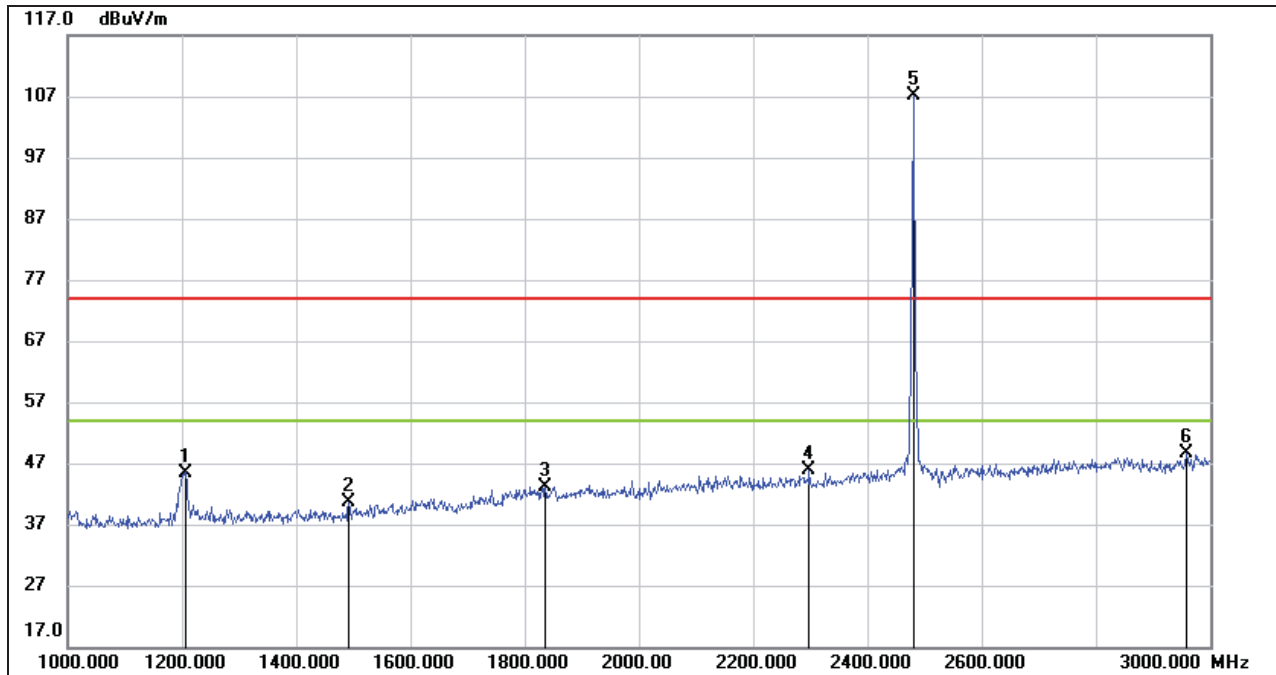


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1206.000	38.98	6.52	45.50	74.00	-28.50	peak
2	1492.000	33.62	6.93	40.55	74.00	-33.45	peak
3	1836.000	33.53	9.70	43.23	74.00	-30.77	peak
4	2298.000	34.89	11.00	45.89	74.00	-28.11	peak
5	2480.000	95.20	11.95	107.15	/	/	fundamental
6	2958.000	34.78	13.83	48.61	74.00	-25.39	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.

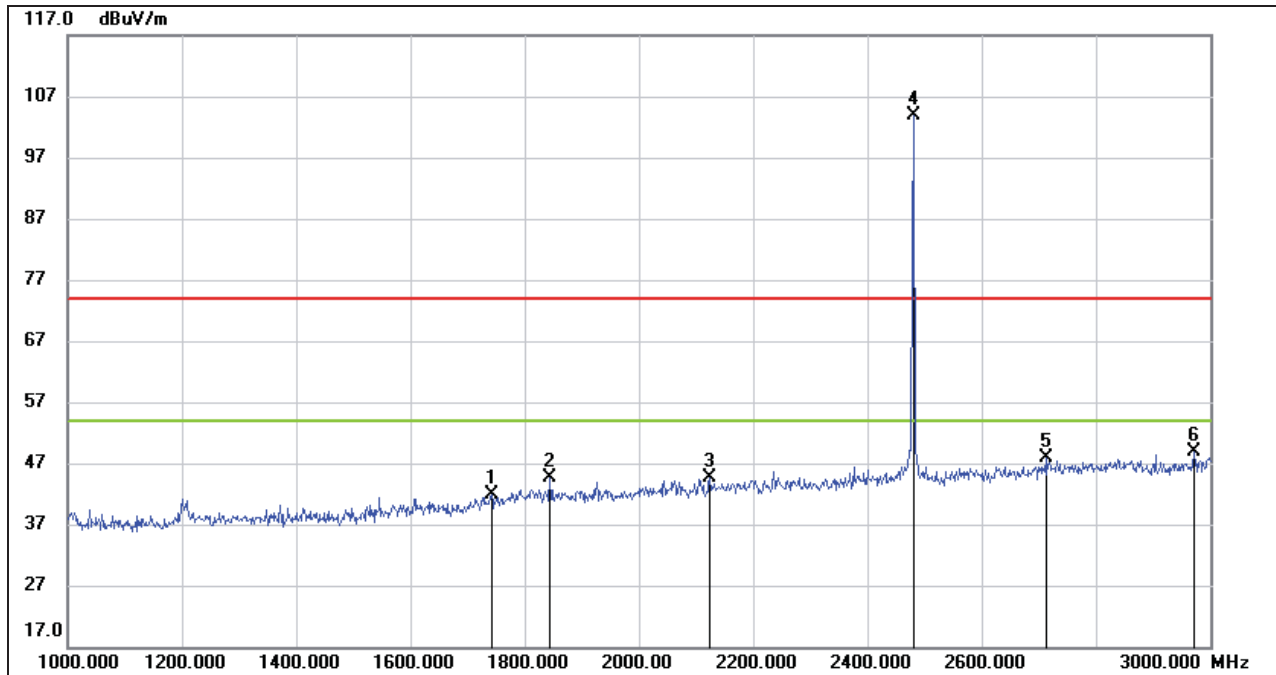**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**


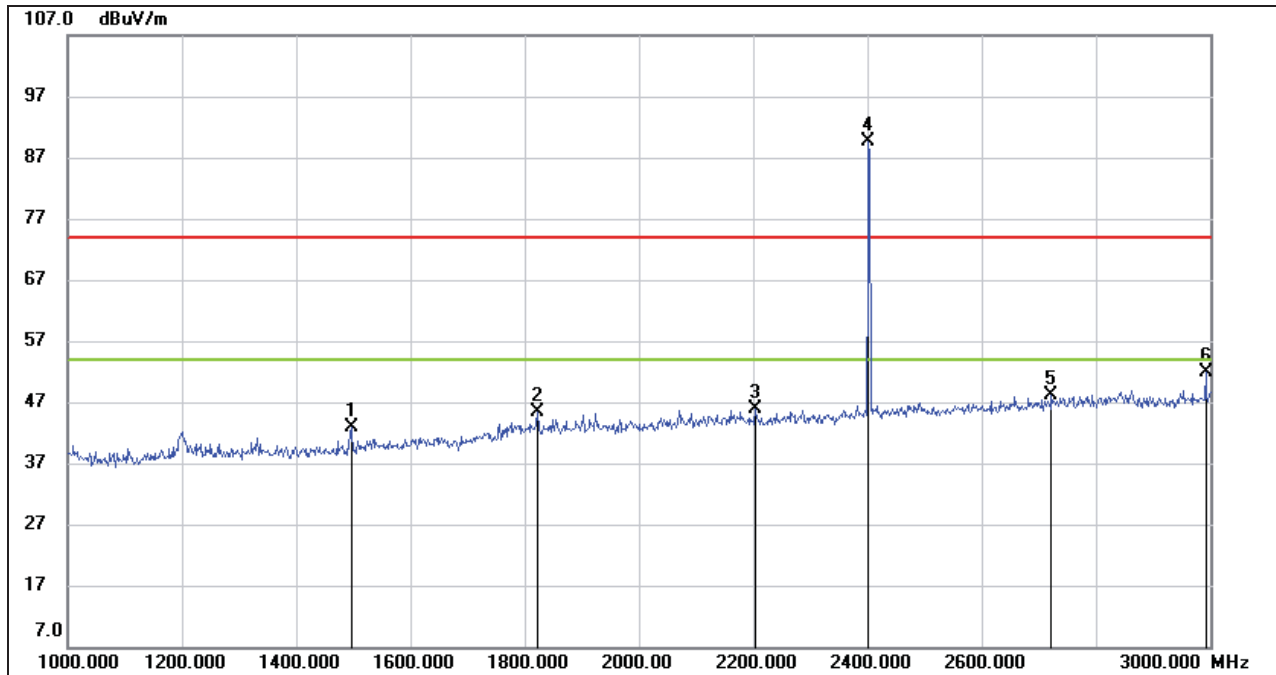
No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1742.000	33.07	8.75	41.82	74.00	-32.18	peak
2	1844.000	34.96	9.71	44.67	74.00	-29.33	peak
3	2124.000	33.89	10.83	44.72	74.00	-29.28	peak
4	2480.000	91.98	11.95	103.93	/	/	fundamental
5	2712.000	35.19	12.60	47.79	74.00	-26.21	peak
6	2972.000	34.99	13.92	48.91	74.00	-25.09	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.

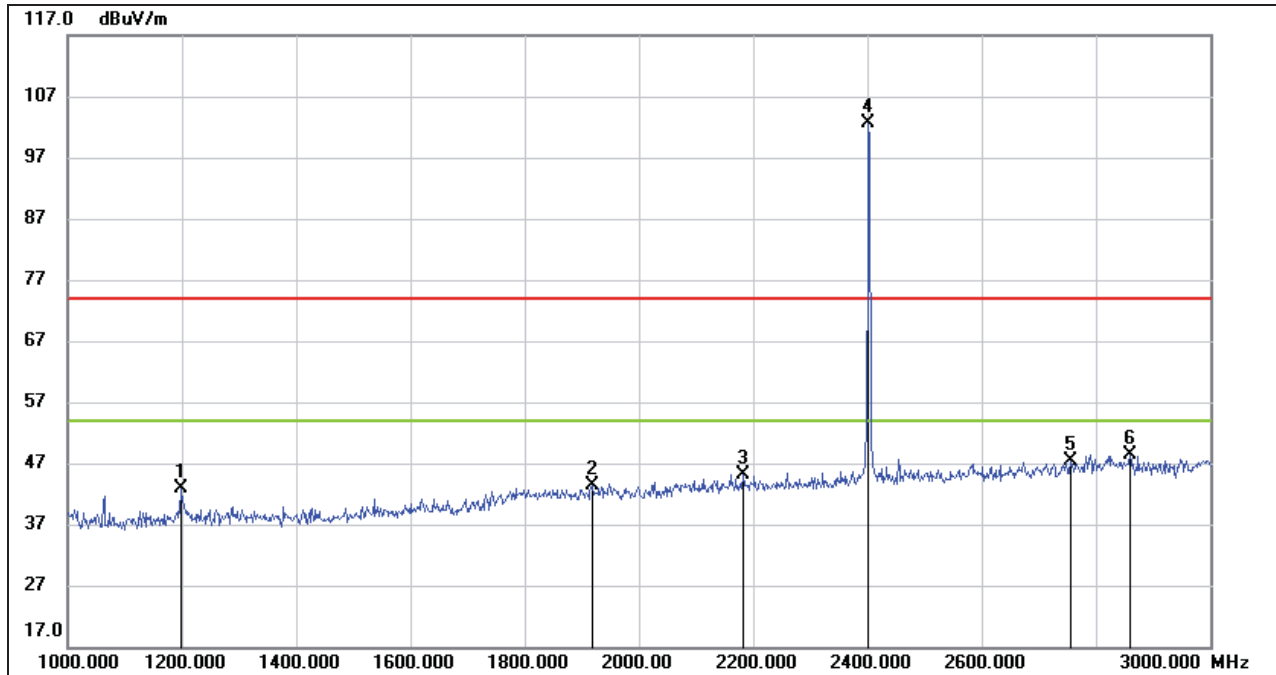**ANT 3-W-M-D-B-N-0-0230**
**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1198.000	36.35	6.48	42.83	74.00	-31.17	peak
2	1918.000	33.46	9.84	43.30	74.00	-30.70	peak
3	2182.000	34.25	10.98	45.23	74.00	-28.77	peak
4	2402.000	90.98	11.66	102.64	/	/	fundamental
5	2756.000	34.42	12.92	47.34	74.00	-26.66	peak
6	2860.000	35.05	13.39	48.44	74.00	-25.56	peak


- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.

**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1496.000	35.87	6.93	42.80	74.00	-31.20	peak
2	1822.000	35.58	9.68	45.26	74.00	-28.74	peak
3	2204.000	34.76	11.03	45.79	74.00	-28.21	peak
4	2402.000	77.86	11.66	89.52	/	/	fundamental
5	2722.000	35.47	12.67	48.14	74.00	-25.86	peak
6	2992.000	37.74	14.03	51.77	74.00	-22.23	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.

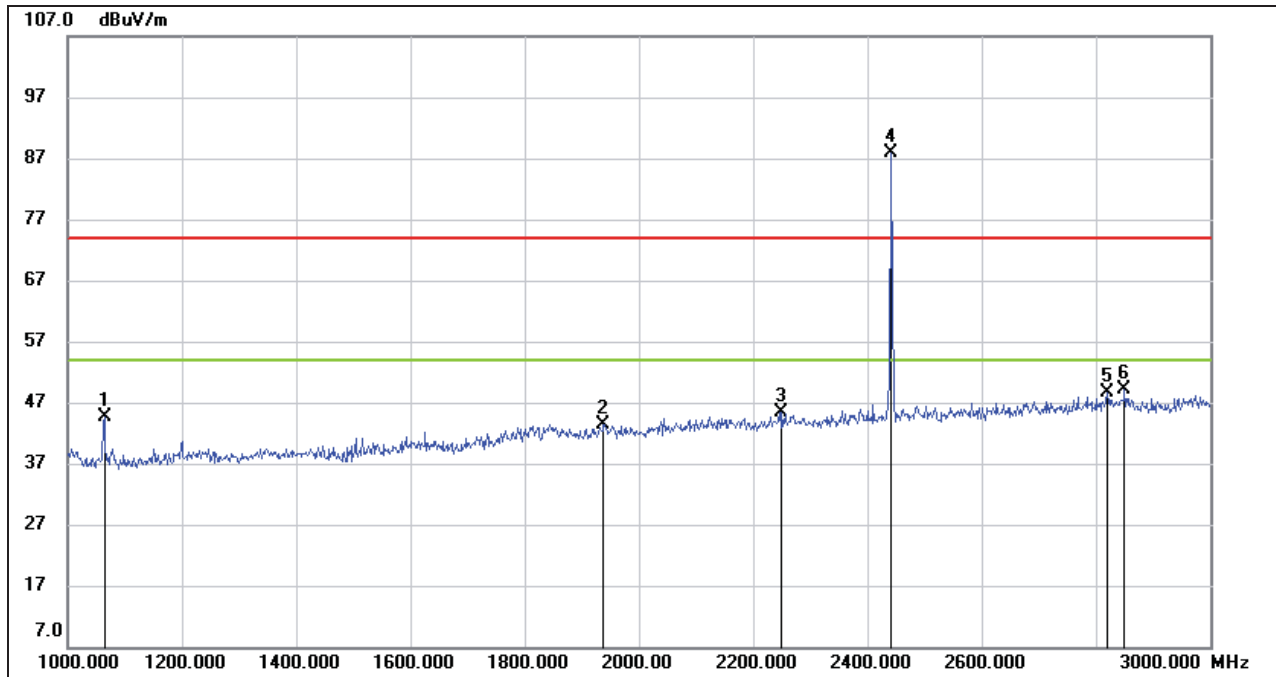


**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1064.000	39.25	5.30	44.55	74.00	-29.45	peak
2	1938.000	33.61	9.87	43.48	74.00	-30.52	peak
3	2250.000	34.29	11.01	45.30	74.00	-28.70	peak
4	2441.000	76.04	11.81	87.85	/	/	fundamental
5	2820.000	35.45	13.28	48.73	74.00	-25.27	peak
6	2850.000	35.83	13.35	49.18	74.00	-24.82	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.


**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**

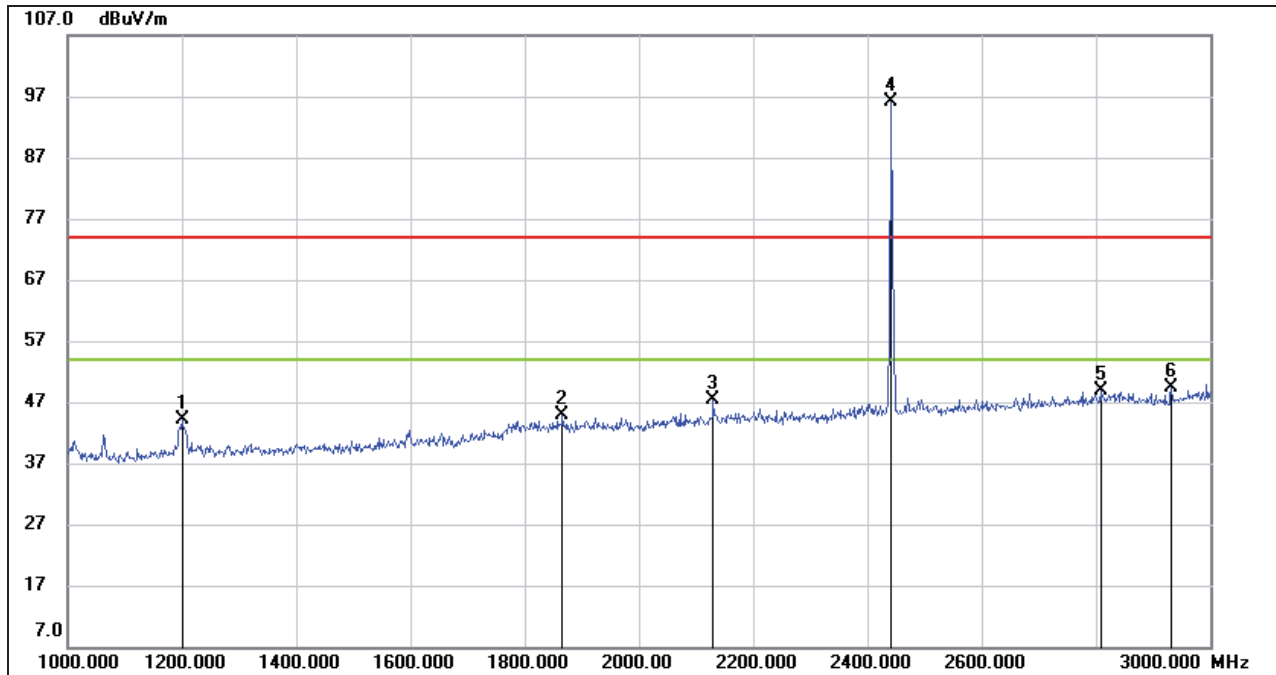

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1200.000	37.57	6.50	44.07	74.00	-29.93	peak
2	1866.000	35.04	9.74	44.78	74.00	-29.22	peak
3	2130.000	36.41	10.85	47.26	74.00	-26.74	peak
4	2441.000	84.29	11.81	96.10	/	/	fundamental
5	2808.000	35.62	13.25	48.87	74.00	-25.13	peak
6	2932.000	35.61	13.67	49.28	74.00	-24.72	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.


**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**

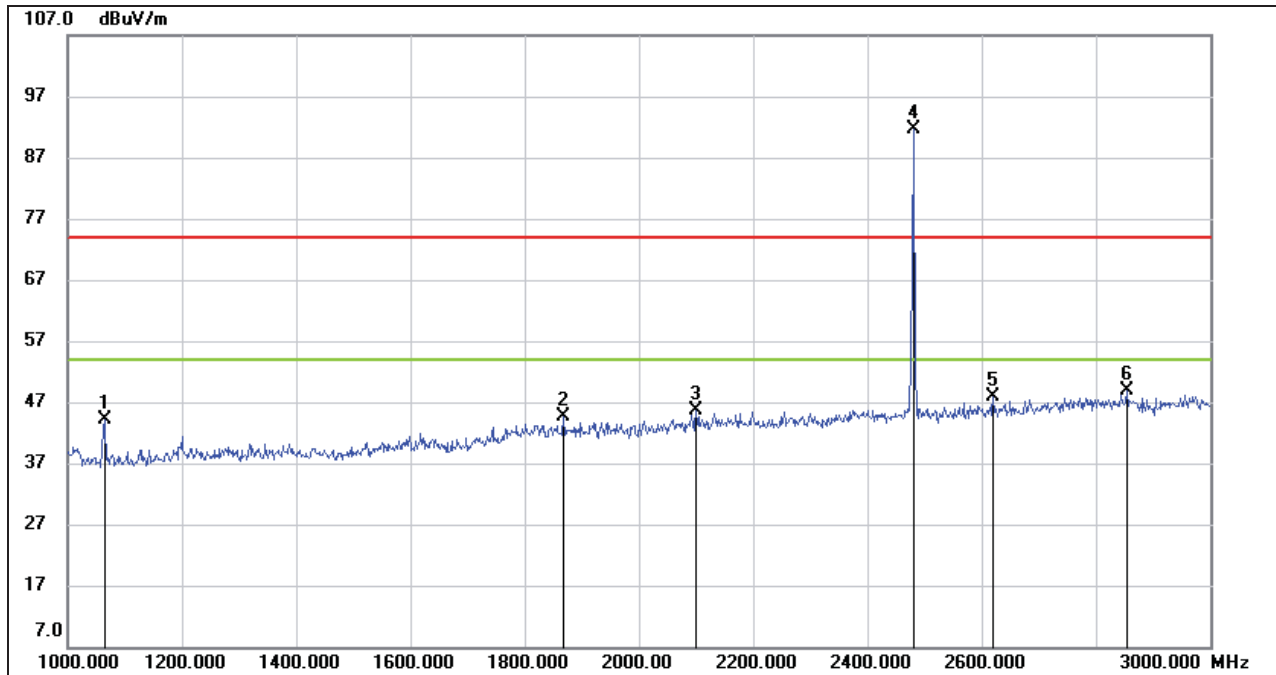

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1064.000	38.75	5.30	44.05	74.00	-29.95	peak
2	1868.000	34.80	9.74	44.54	74.00	-29.46	peak
3	2100.000	34.89	10.78	45.67	74.00	-28.33	peak
4	2480.000	79.58	11.95	91.53	/	/	fundamental
5	2620.000	35.74	12.07	47.81	74.00	-26.19	peak
6	2854.000	35.43	13.36	48.79	74.00	-25.21	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.

**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**

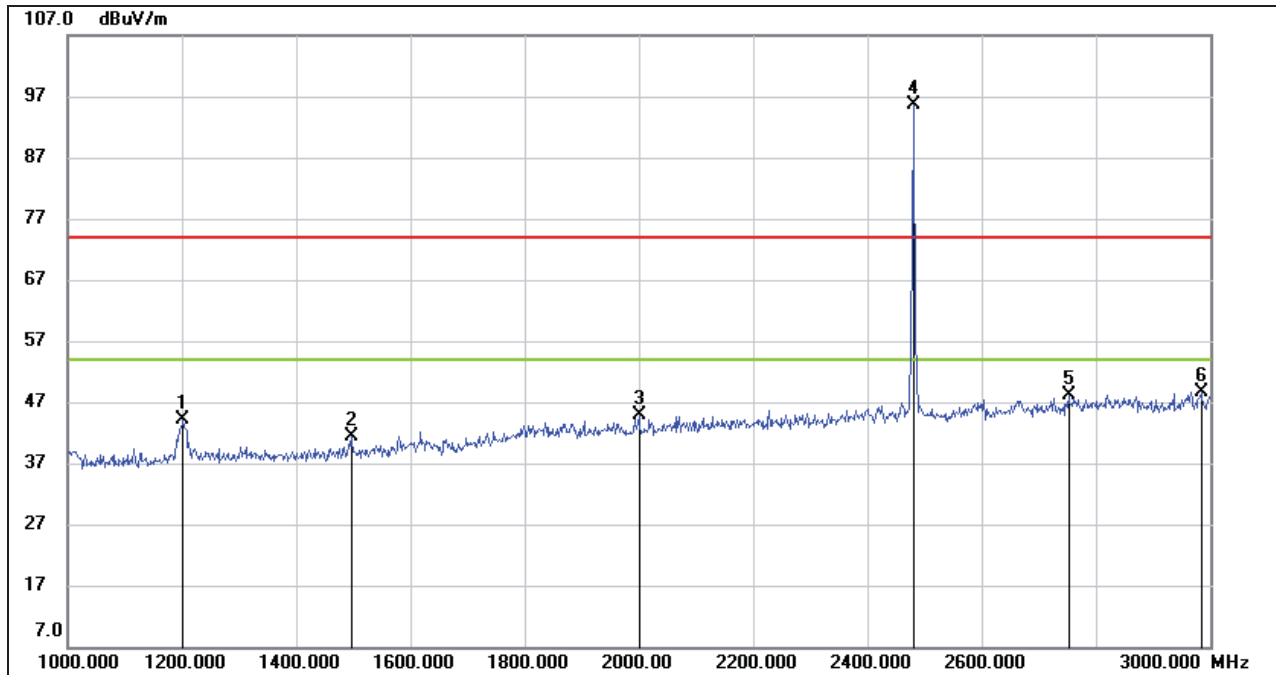

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1202.000	37.62	6.50	44.12	74.00	-29.88	peak
2	1496.000	34.52	6.93	41.45	74.00	-32.55	peak
3	2000.000	34.80	10.03	44.83	74.00	-29.17	peak
4	2480.000	83.67	11.95	95.62	/	/	fundamental
5	2752.000	35.29	12.89	48.18	74.00	-25.82	peak
6	2984.000	34.70	13.99	48.69	74.00	-25.31	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.


Note: All the modes and channels had been tested, but only the worst data was recorded in the report.

### 8.3. SPURIOUS EMISSIONS (3 GHz ~ 18 GHz)

#### 8.3.1. GFSK MODE

ANT 1-2.00004829


#### HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

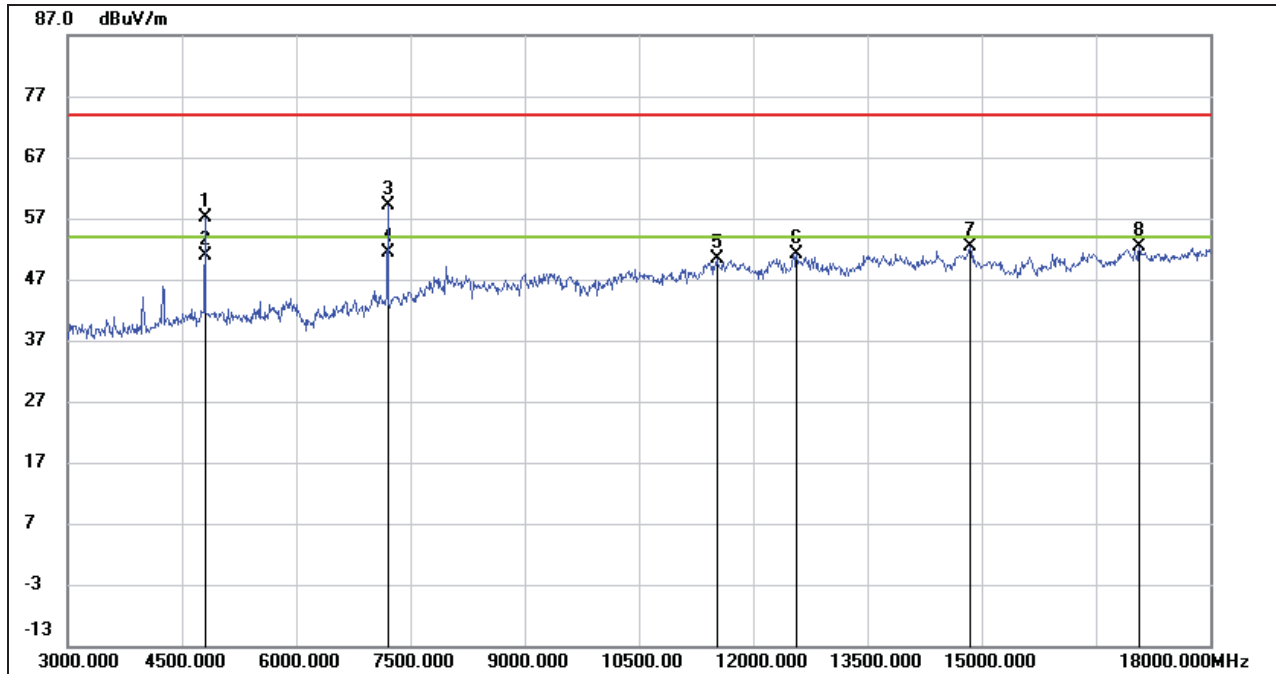

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4800.000	55.81	1.40	57.21	74.00	-16.79	peak
2	4800.000	49.38	1.40	50.78	54.00	-3.22	AVG
3	7200.000	51.82	7.36	59.18	74.00	-14.82	peak
4	7200.000	43.94	7.36	51.30	54.00	-2.70	AVG
5	11520.000	35.76	14.66	50.42	74.00	-23.58	peak
6	12570.000	35.33	15.75	51.08	74.00	-22.92	peak
7	14850.000	34.60	17.71	52.31	74.00	-21.69	peak
8	17775.000	28.64	23.91	52.55	74.00	-21.45	peak

- Note:
1. Peak Result = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
  5. For the transmitting duration, please refer to clause 7.1.
  6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
  7. Proper operation of the transmitter prior to adding the filter to the measurement chain.


**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**

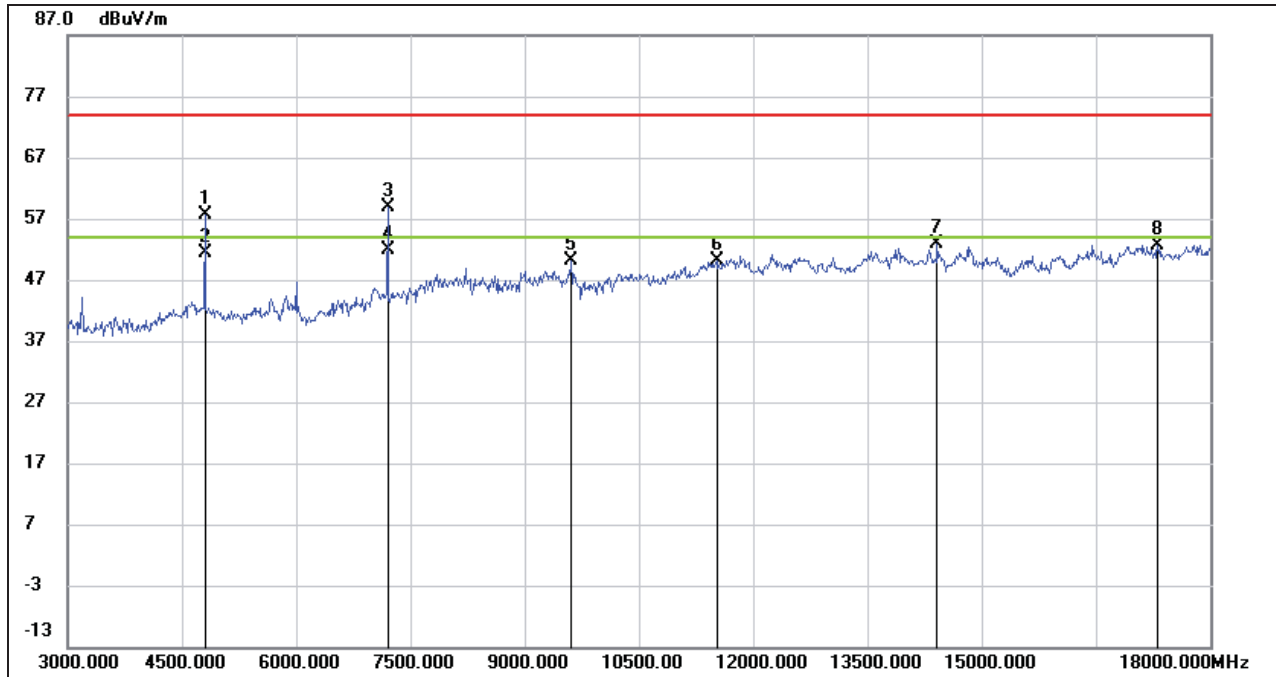

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4800.000	56.19	1.40	57.59	74.00	-16.41	peak
2	4800.000	50.06	1.40	51.46	54.00	-2.54	AVG
3	7200.000	51.51	7.36	58.87	74.00	-15.13	peak
4	7200.000	44.40	7.36	51.76	54.00	-2.24	AVG
5	9615.000	39.12	10.95	50.07	74.00	-23.93	peak
6	11520.000	35.42	14.66	50.08	74.00	-23.92	peak
7	14415.000	35.60	17.36	52.96	74.00	-21.04	peak
8	17310.000	30.14	22.54	52.68	74.00	-21.32	peak


- Note:
1. Peak Result = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.
  5. For the transmitting duration, please refer to clause 7.1.
  6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
  7. Proper operation of the transmitter prior to adding the filter to the measurement chain.

**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**

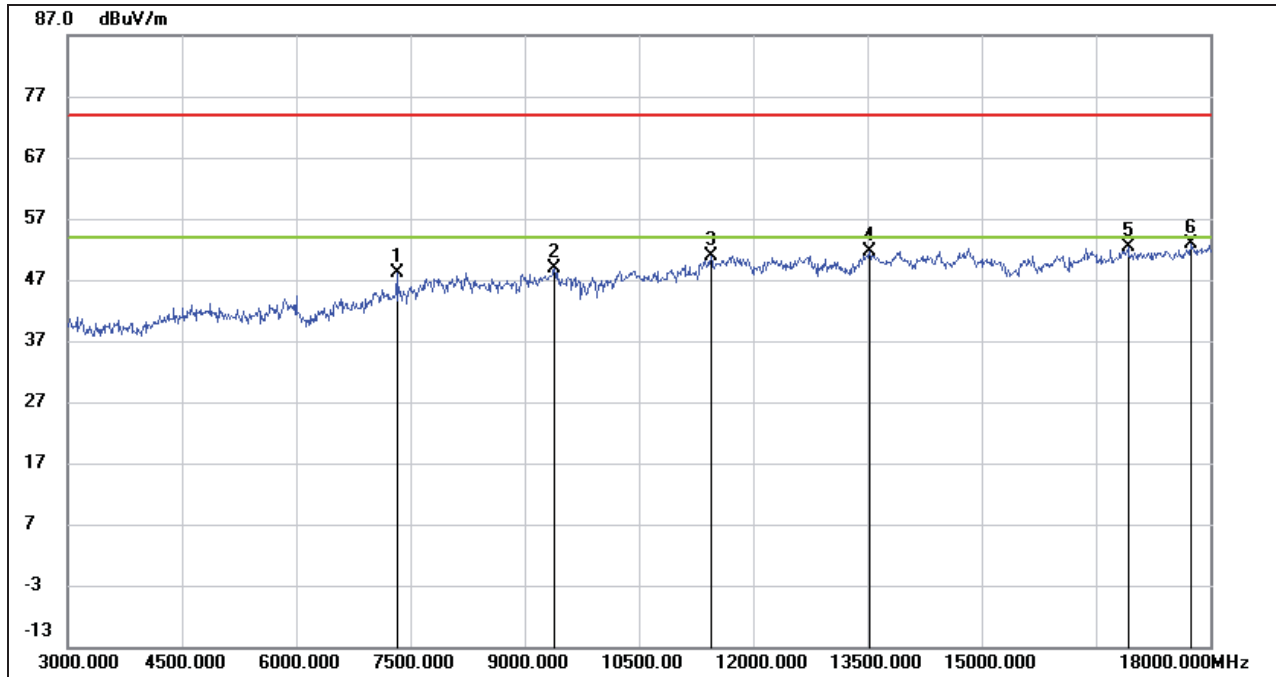

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7320.000	40.80	7.28	48.08	74.00	-25.92	peak
2	9390.000	37.92	10.92	48.84	74.00	-25.16	peak
3	11445.000	36.24	14.71	50.95	74.00	-23.05	peak
4	13530.000	34.51	17.19	51.70	74.00	-22.30	peak
5	16920.000	30.79	21.51	52.30	74.00	-21.70	peak
6	17745.000	29.15	23.72	52.87	74.00	-21.13	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

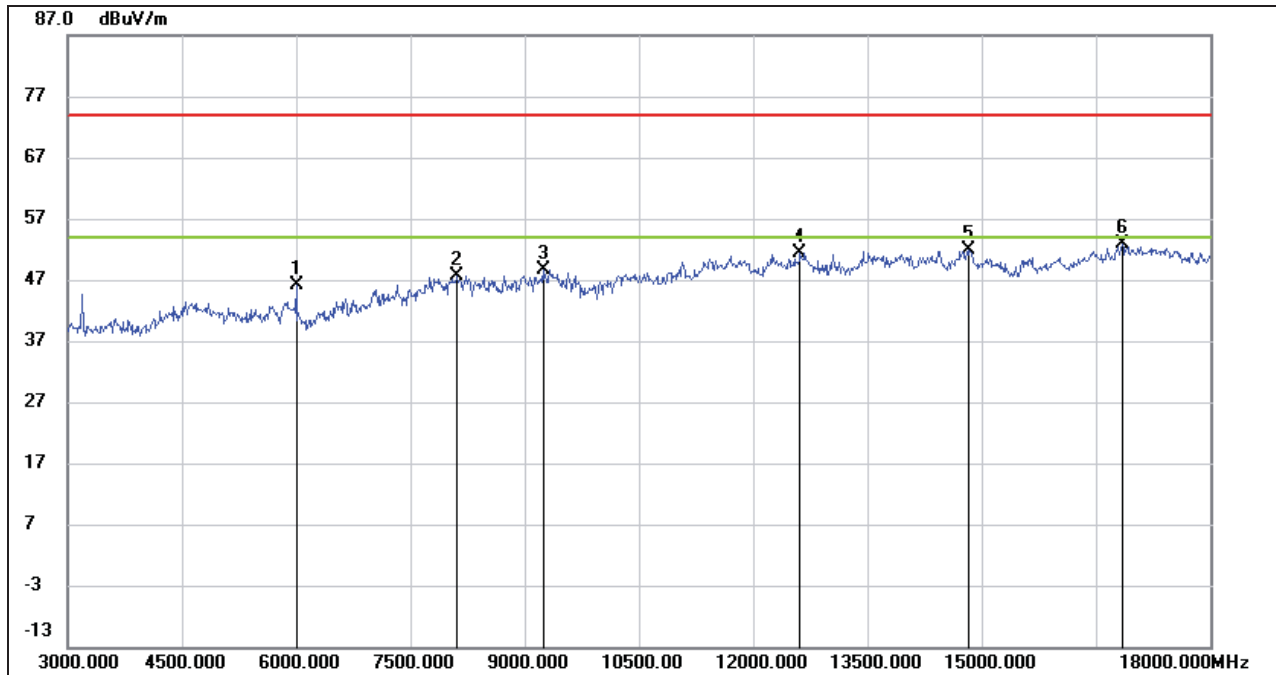**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6000.000	42.23	4.00	46.23	74.00	-27.77	peak
2	8115.000	37.59	10.13	47.72	74.00	-26.28	peak
3	9240.000	38.54	10.10	48.64	74.00	-25.36	peak
4	12615.000	35.61	15.75	51.36	74.00	-22.64	peak
5	14820.000	33.94	17.91	51.85	74.00	-22.15	peak
6	16845.000	31.72	21.10	52.82	74.00	-21.18	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.




**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**

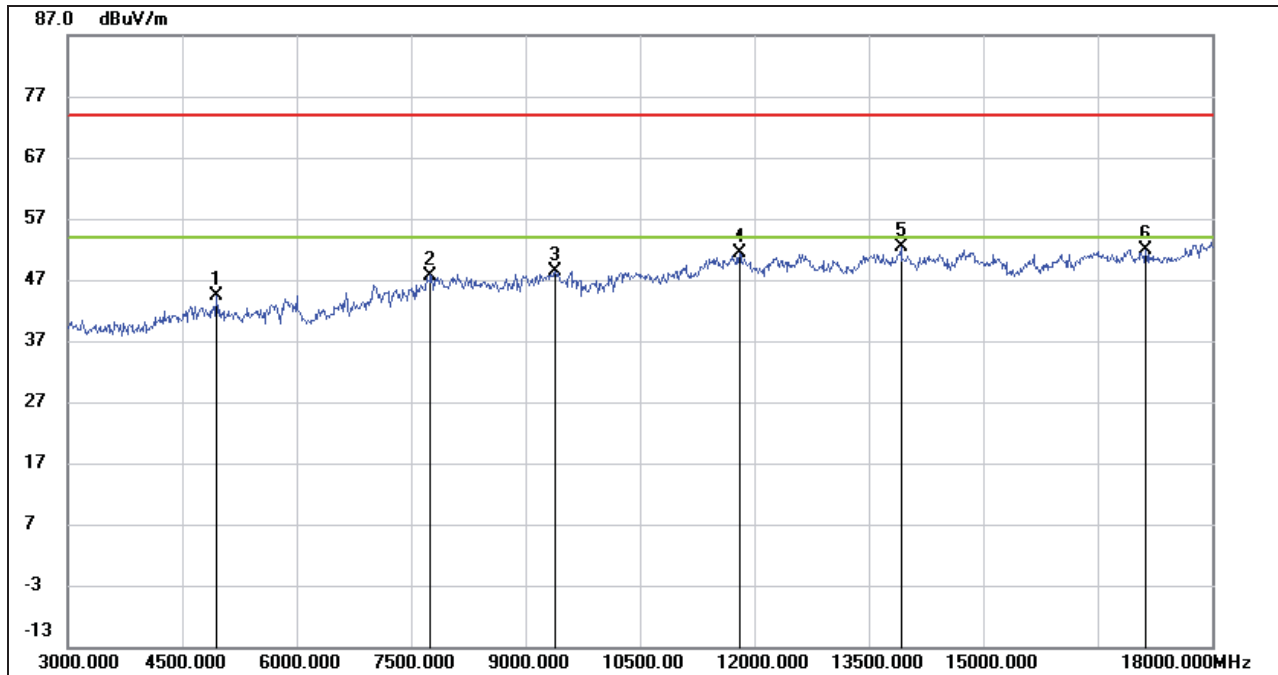

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4950.000	42.74	1.71	44.45	74.00	-29.55	peak
2	7755.000	38.81	8.94	47.75	74.00	-26.25	peak
3	9390.000	37.52	10.92	48.44	74.00	-25.56	peak
4	11805.000	36.05	15.26	51.31	74.00	-22.69	peak
5	13920.000	34.92	17.55	52.47	74.00	-21.53	peak
6	17130.000	29.92	21.92	51.84	74.00	-22.16	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**

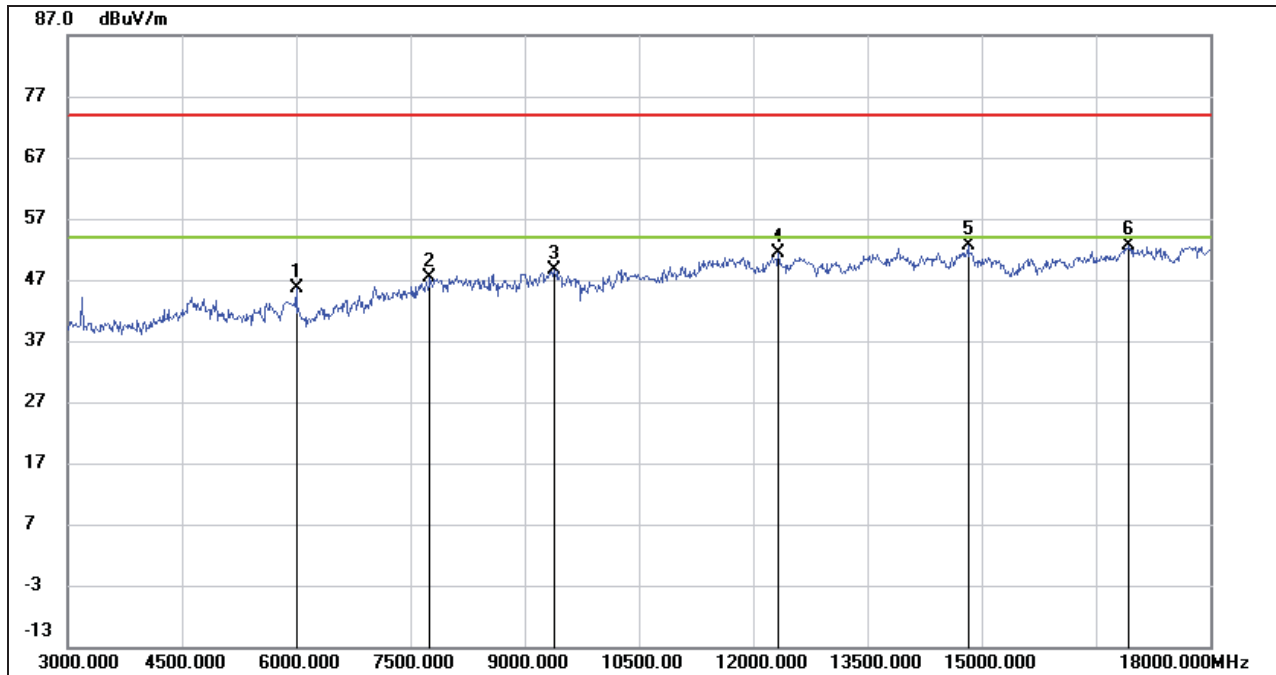


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6000.000	41.51	4.00	45.51	74.00	-28.49	peak
2	7755.000	38.44	8.94	47.38	74.00	-26.62	peak
3	9390.000	37.83	10.92	48.75	74.00	-25.25	peak
4	12330.000	35.36	16.05	51.41	74.00	-22.59	peak
5	14820.000	34.65	17.91	52.56	74.00	-21.44	peak
6	16935.000	31.11	21.45	52.56	74.00	-21.44	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

ANT 2-AG-041533-2120


**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)**

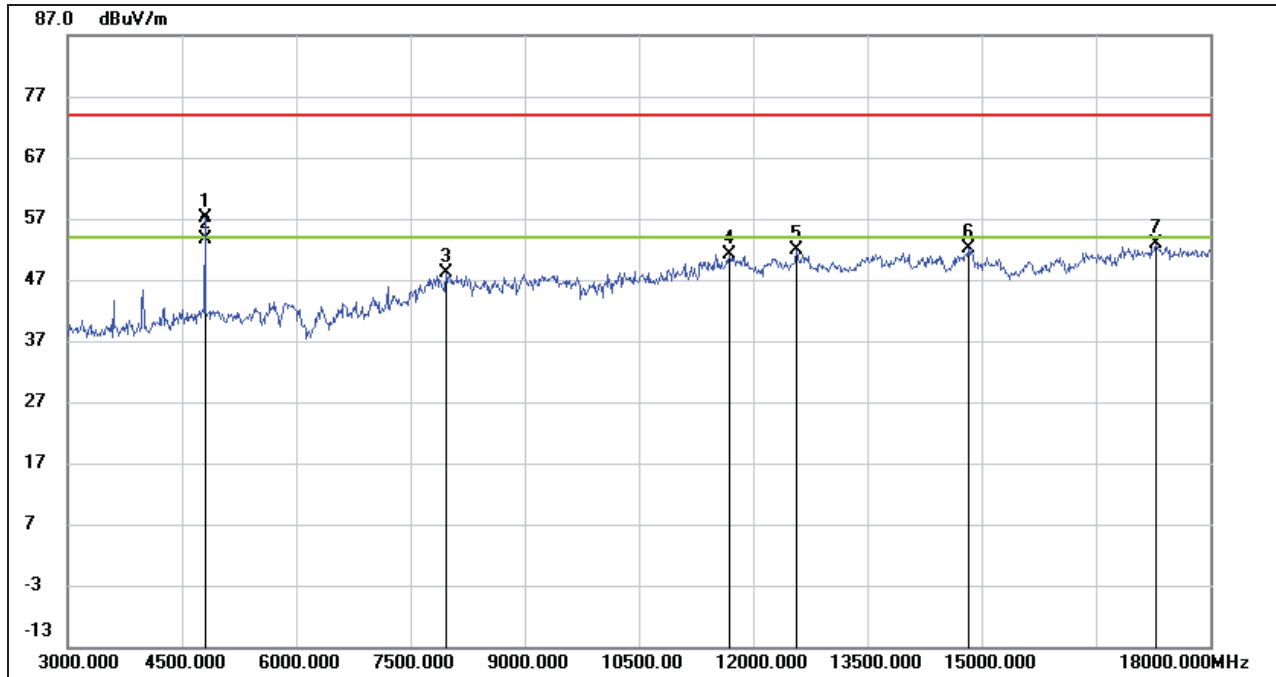

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4800.000	55.61	1.40	57.01	74.00	-16.99	peak
2	4800.000	52.28	1.40	53.68	54.00	-0.32	AVG
3	7965.000	39.49	8.71	48.20	74.00	-25.80	peak
4	11685.000	35.97	15.26	51.23	74.00	-22.77	peak
5	12570.000	36.05	15.75	51.80	74.00	-22.20	peak
6	14820.000	34.30	17.91	52.21	74.00	-21.79	peak
7	17280.000	30.33	22.48	52.81	74.00	-21.19	peak

- Note:
1. Peak Result = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
  5. For the transmitting duration, please refer to clause 7.1.
  6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
  7. Proper operation of the transmitter prior to adding the filter to the measurement chain.


**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**

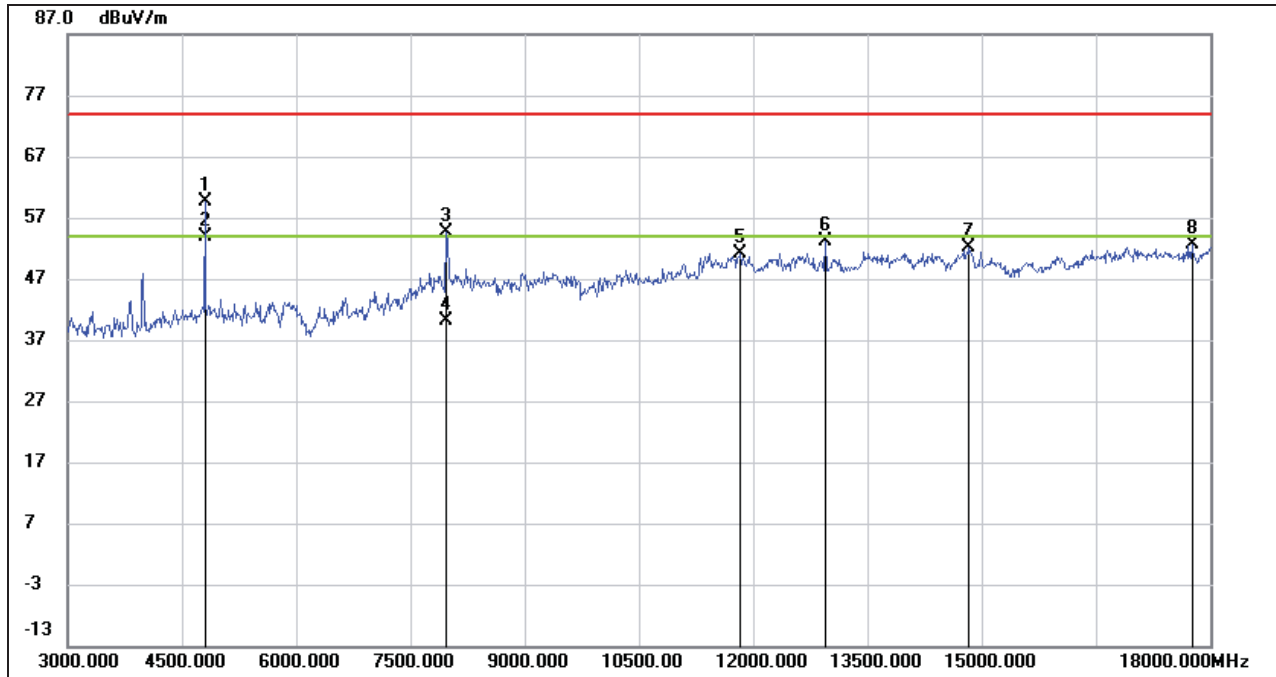

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4800.000	58.26	1.40	59.66	74.00	-14.34	peak
2	4800.000	52.36	1.40	53.76	54.00	-0.24	AVG
3	7965.000	45.87	8.71	54.58	74.00	-19.42	peak
4	7965.000	31.39	8.71	40.10	54.00	-13.90	AVG
5	11835.000	35.91	15.34	51.25	74.00	-22.75	peak
6	12945.000	36.96	16.24	53.20	74.00	-20.80	peak
7	14835.000	34.25	17.80	52.05	74.00	-21.95	peak
8	17760.000	28.82	23.82	52.64	74.00	-21.36	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.  
 5. For the transmitting duration, please refer to clause 7.1.  
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.


**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**

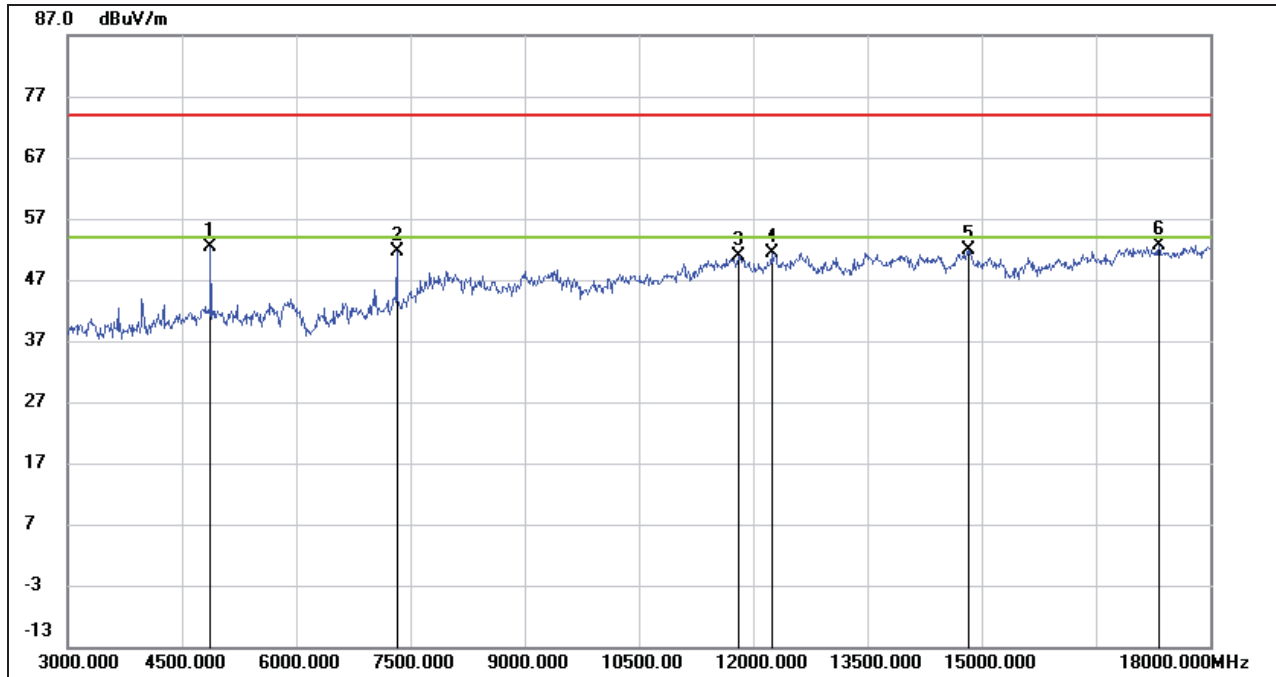

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	50.97	1.32	52.29	74.00	-21.71	peak
2	7320.000	44.44	7.28	51.72	74.00	-22.28	peak
3	11805.000	35.71	15.26	50.97	74.00	-23.03	peak
4	12240.000	35.33	16.01	51.34	74.00	-22.66	peak
5	14835.000	34.08	17.80	51.88	74.00	-22.12	peak
6	17325.000	30.13	22.42	52.55	74.00	-21.45	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.


**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**

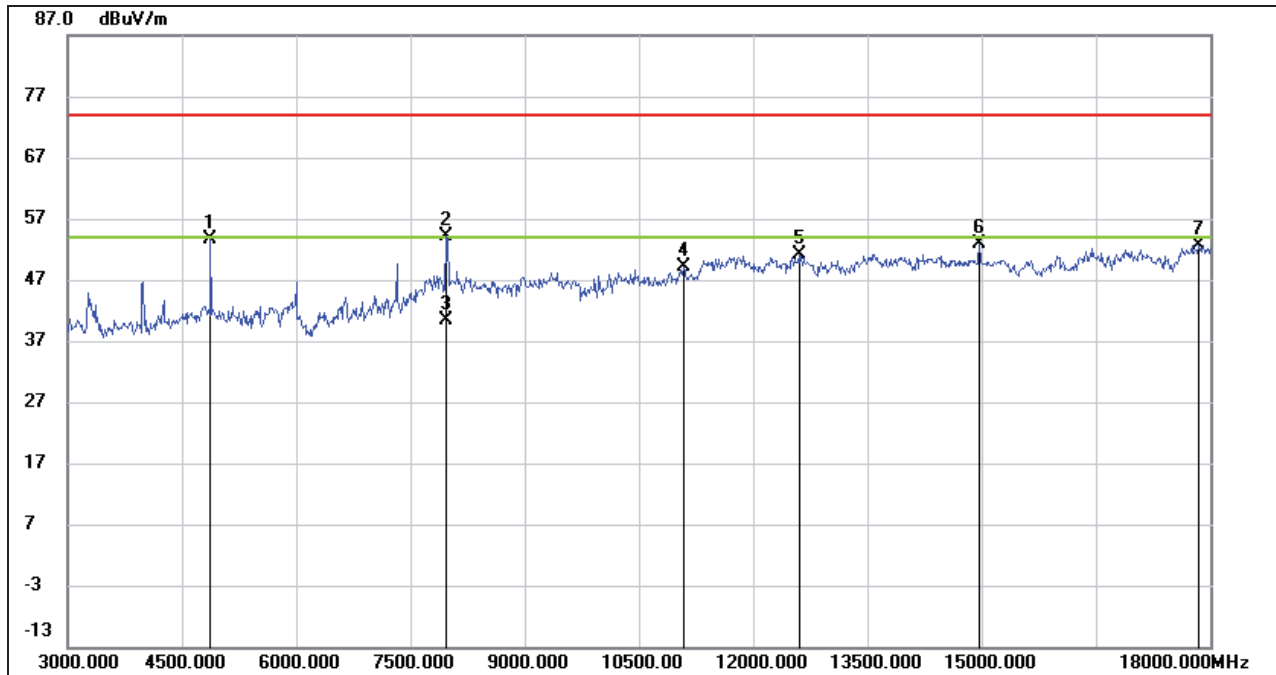

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	52.32	1.32	53.64	74.00	-20.36	peak
2	7965.000	45.46	8.71	54.17	74.00	-19.83	peak
3	7965.000	31.66	8.71	40.37	54.00	-13.63	AVG
4	11085.000	35.42	13.72	49.14	74.00	-24.86	peak
5	12600.000	35.41	15.78	51.19	74.00	-22.81	peak
6	14970.000	35.26	17.59	52.85	74.00	-21.15	peak
7	17850.000	28.62	23.97	52.59	74.00	-21.41	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.  
 5. For the transmitting duration, please refer to clause 7.1.  
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.


**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**

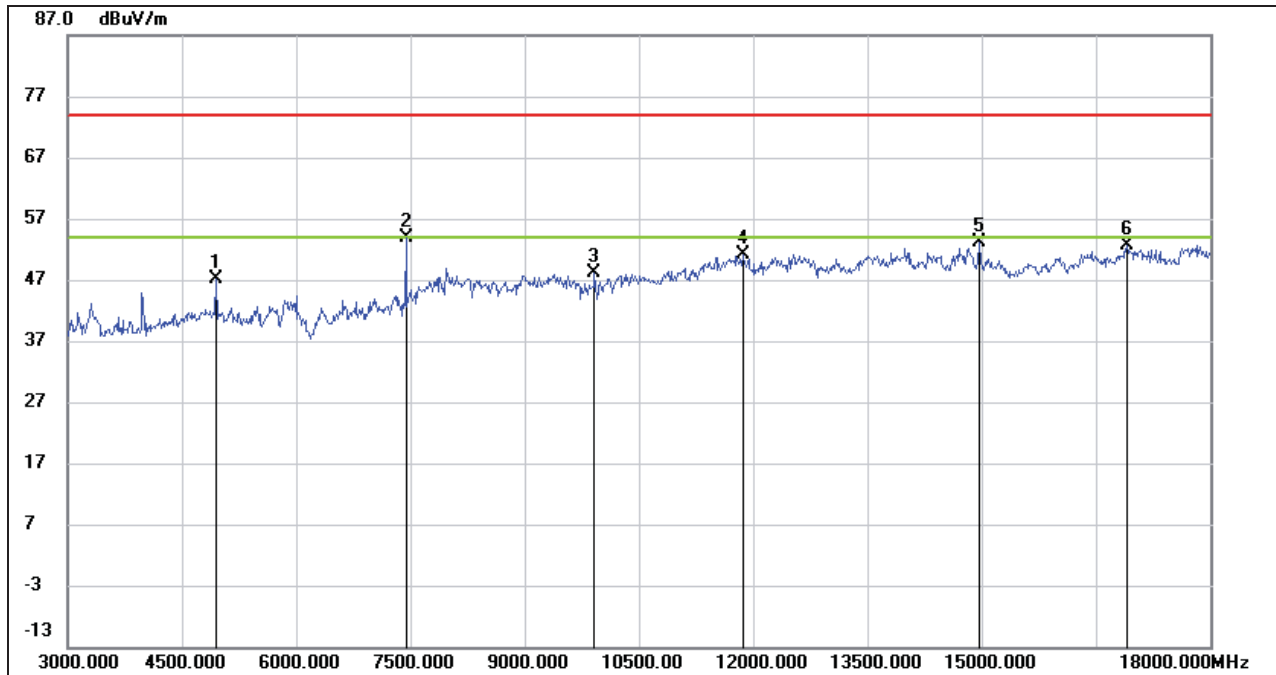

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4950.000	45.54	1.71	47.25	74.00	-26.75	peak
2	7440.000	45.72	8.13	53.85	74.00	-20.15	peak
3	9915.000	37.03	11.08	48.11	74.00	-25.89	peak
4	11865.000	35.77	15.42	51.19	74.00	-22.81	peak
5	14970.000	35.45	17.59	53.04	74.00	-20.96	peak
6	16905.000	31.13	21.55	52.68	74.00	-21.32	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**

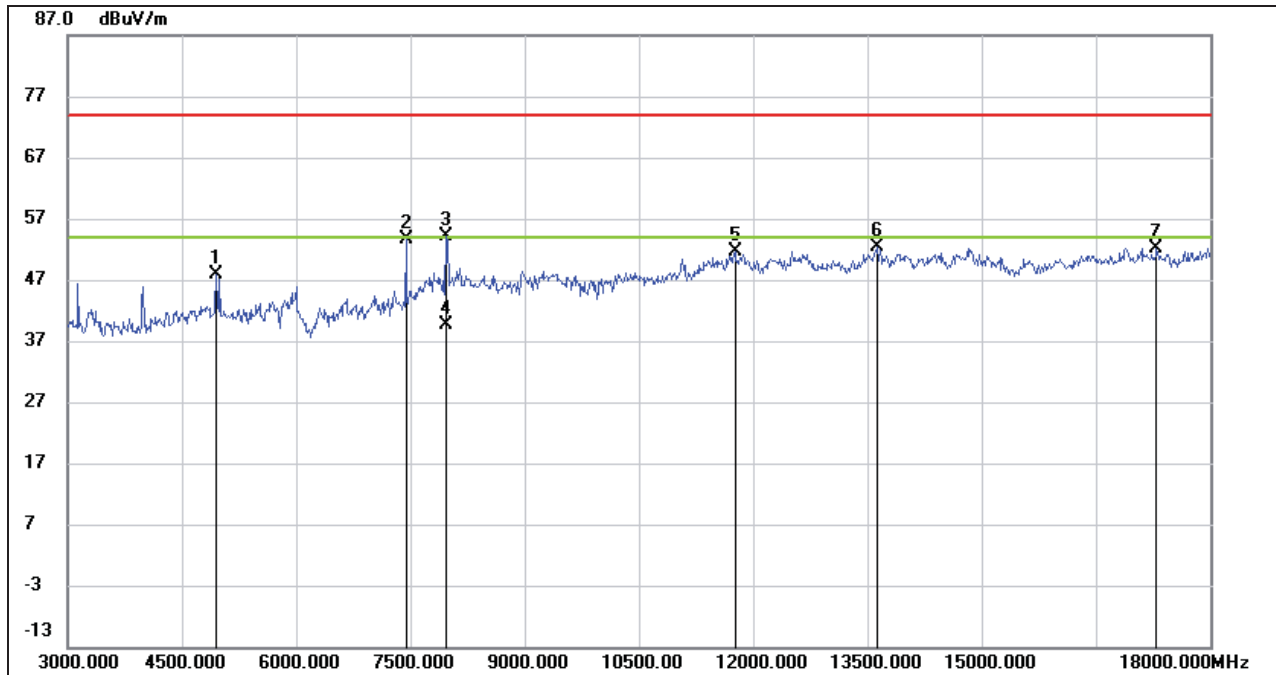


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4950.000	46.28	1.71	47.99	74.00	-26.01	peak
2	7440.000	45.51	8.13	53.64	74.00	-20.36	peak
3	7965.000	45.34	8.71	54.05	74.00	-19.95	peak
4	7965.000	30.92	8.71	39.63	54.00	-14.37	AVG
5	11760.000	36.32	15.29	51.61	74.00	-22.39	peak
6	13635.000	34.98	17.28	52.26	74.00	-21.74	peak
7	17295.000	29.65	22.58	52.23	74.00	-21.77	peak

- Note:
1. Peak Result = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.
  5. For the transmitting duration, please refer to clause 7.1.
  6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
  7. Proper operation of the transmitter prior to adding the filter to the measurement chain.




**ANT 3-W-M-D-B-N-0-0230**

**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)**

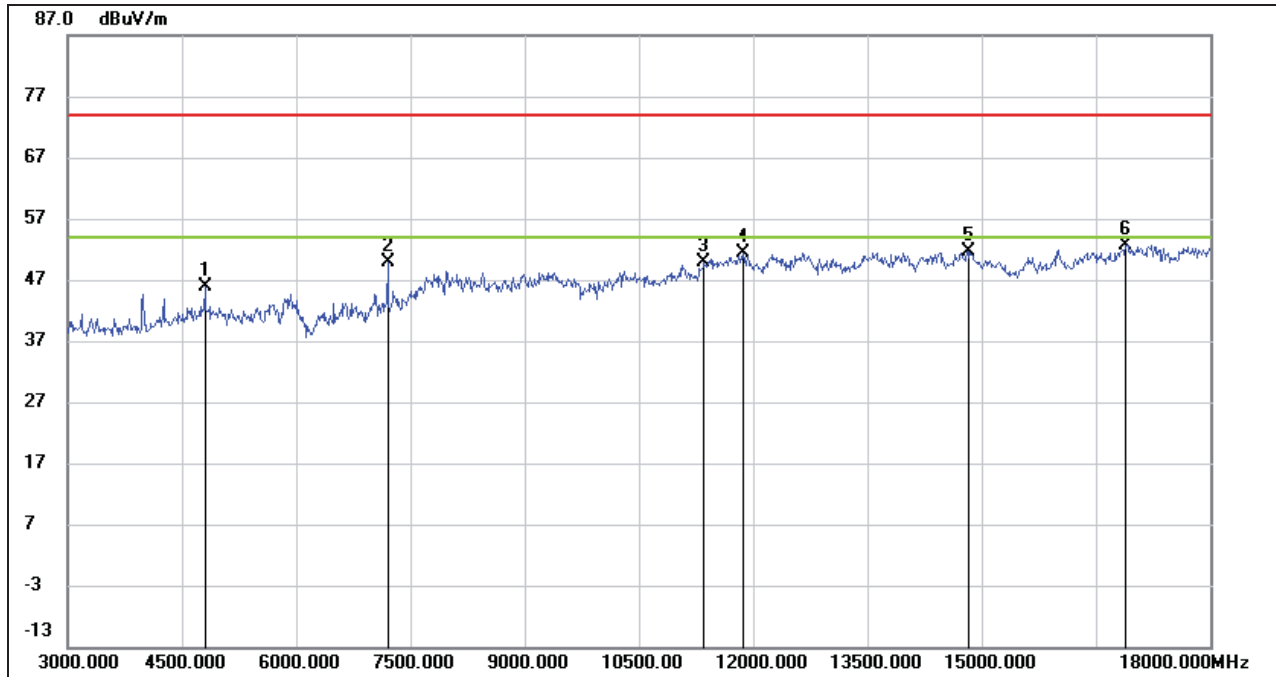

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4800.000	44.37	1.40	45.77	74.00	-28.23	peak
2	7200.000	42.62	7.36	49.98	74.00	-24.02	peak
3	11355.000	35.48	14.34	49.82	74.00	-24.18	peak
4	11865.000	35.93	15.42	51.35	74.00	-22.65	peak
5	14820.000	33.73	17.91	51.64	74.00	-22.36	peak
6	16890.000	31.12	21.49	52.61	74.00	-21.39	peak


- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

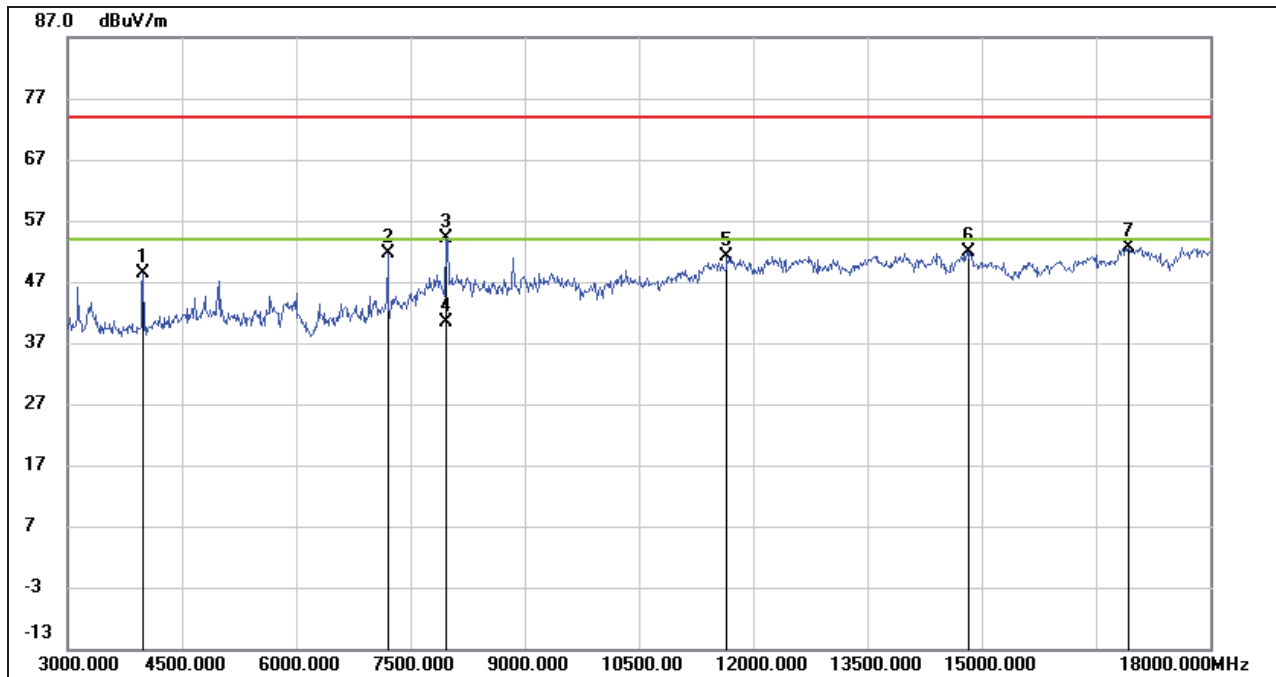**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3990.000	50.87	-2.51	48.36	74.00	-25.64	peak
2	7200.000	44.15	7.36	51.51	74.00	-22.49	peak
3	7965.000	45.37	8.71	54.08	74.00	-19.92	peak
4	7965.000	31.62	8.71	40.33	54.00	-13.67	AVG
5	11655.000	36.14	15.07	51.21	74.00	-22.79	peak
6	14820.000	34.09	17.91	52.00	74.00	-22.00	peak
7	16920.000	31.19	21.51	52.70	74.00	-21.30	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.  
 5. For the transmitting duration, please refer to clause 7.1.  
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.

**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**

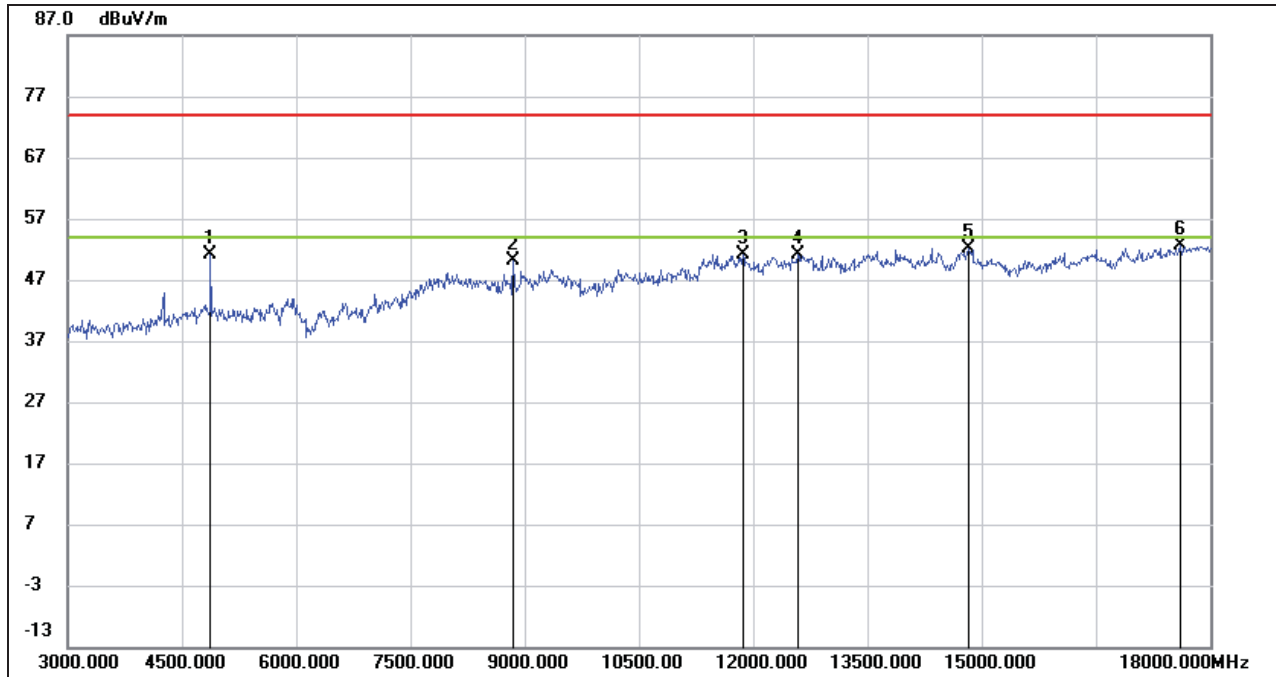


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	49.83	1.32	51.15	74.00	-22.85	peak
2	8850.000	40.81	9.31	50.12	74.00	-23.88	peak
3	11865.000	35.63	15.42	51.05	74.00	-22.95	peak
4	12585.000	35.32	15.77	51.09	74.00	-22.91	peak
5	14835.000	34.42	17.80	52.22	74.00	-21.78	peak
6	17610.000	29.85	22.80	52.65	74.00	-21.35	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.




**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**

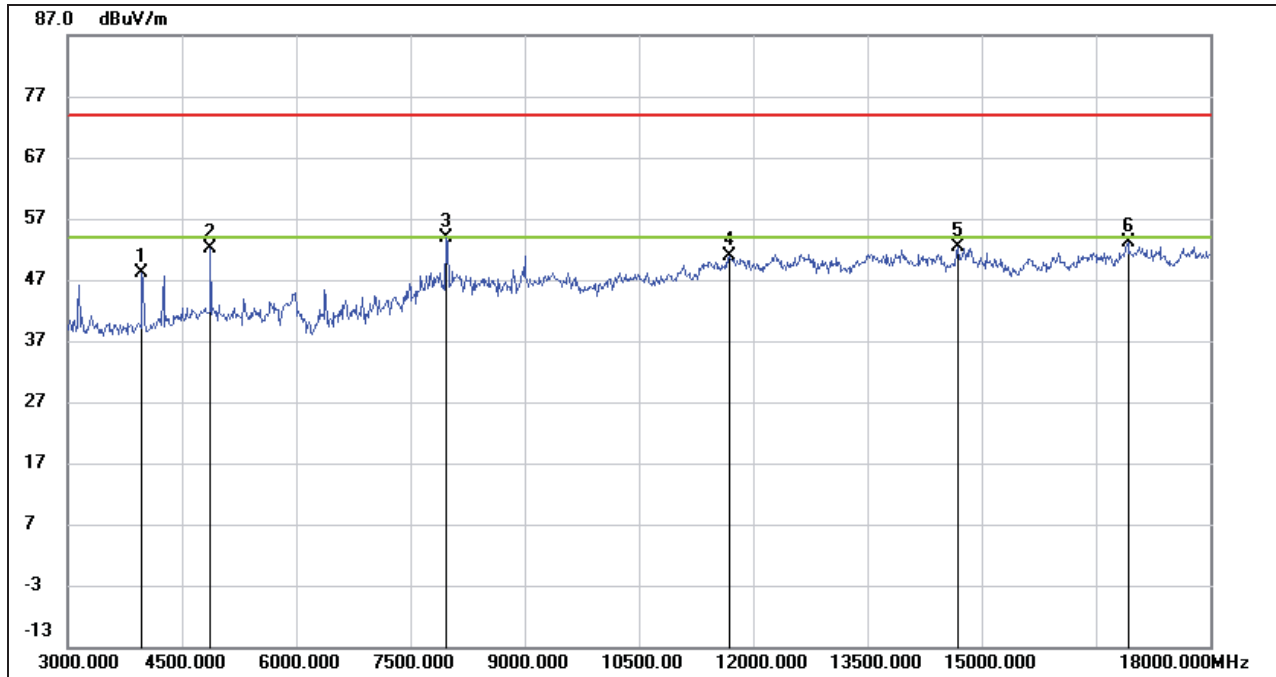

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3975.000	50.74	-2.57	48.17	74.00	-25.83	peak
2	4875.000	50.69	1.32	52.01	74.00	-21.99	peak
3	7965.000	45.27	8.71	53.98	74.00	-20.02	peak
4	11685.000	35.57	15.26	50.83	74.00	-23.17	peak
5	14685.000	34.69	17.64	52.33	74.00	-21.67	peak
6	16920.000	31.69	21.51	53.20	74.00	-20.80	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.


**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**

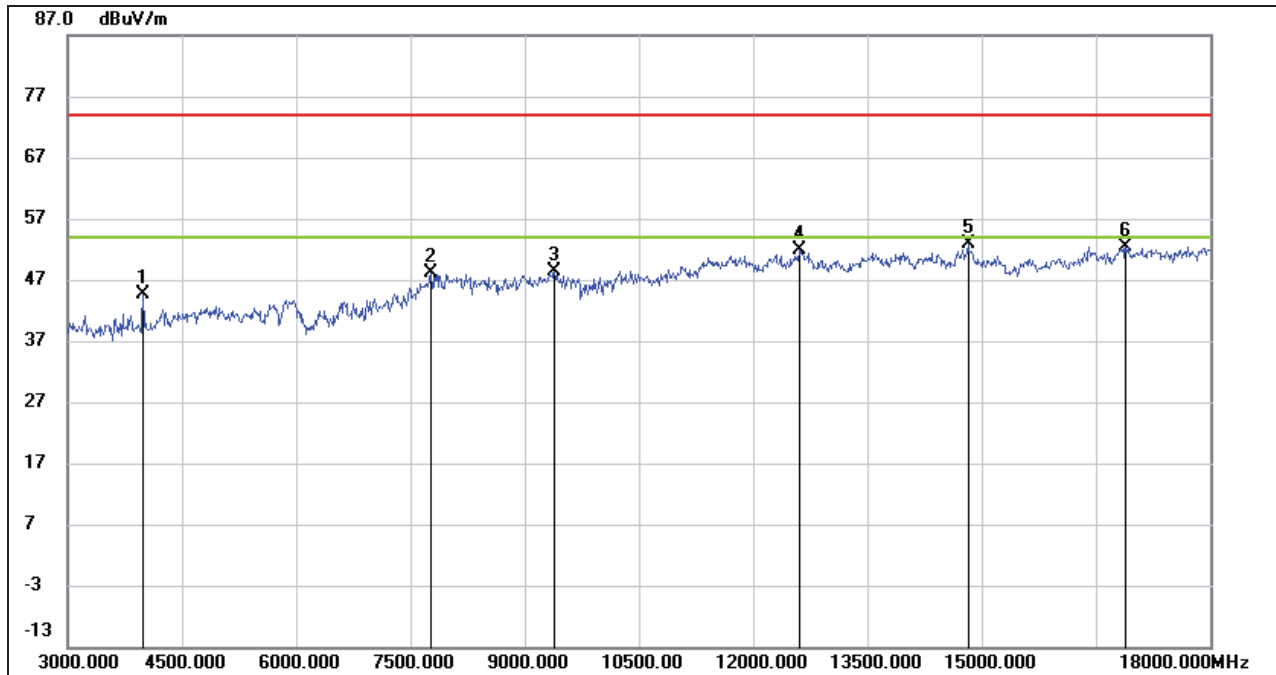

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3990.000	47.23	-2.51	44.72	74.00	-29.28	peak
2	7770.000	38.97	9.09	48.06	74.00	-25.94	peak
3	9390.000	37.46	10.92	48.38	74.00	-25.62	peak
4	12600.000	35.99	15.78	51.77	74.00	-22.23	peak
5	14820.000	34.88	17.91	52.79	74.00	-21.21	peak
6	16890.000	30.94	21.49	52.43	74.00	-21.57	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**

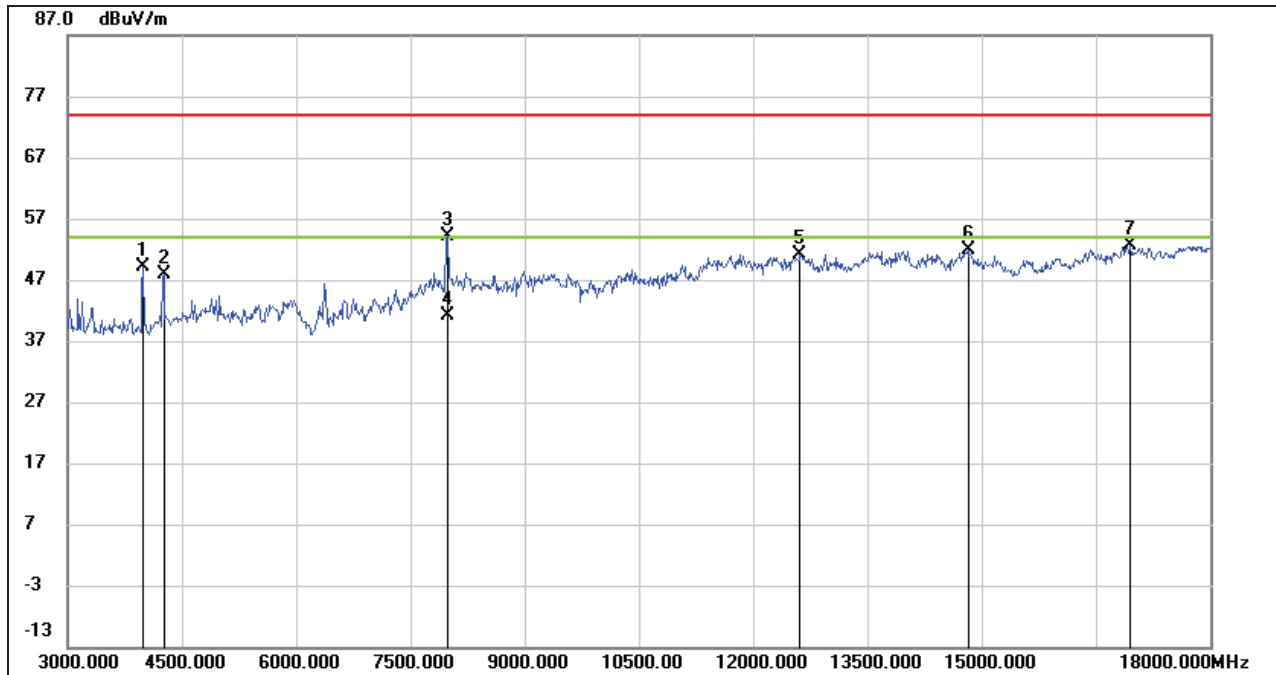


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3990.000	51.75	-2.51	49.24	74.00	-24.76	peak
2	4260.000	49.26	-1.36	47.90	74.00	-26.10	peak
3	7995.000	45.45	8.65	54.10	74.00	-19.90	peak
4	7995.000	32.48	8.65	41.13	54.00	-12.87	AVG
5	12615.000	35.44	15.75	51.19	74.00	-22.81	peak
6	14820.000	34.01	17.91	51.92	74.00	-22.08	peak
7	16950.000	31.15	21.41	52.56	74.00	-21.44	peak

- Note:
1. Peak Result = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.
  5. For the transmitting duration, please refer to clause 7.1.
  6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
  7. Proper operation of the transmitter prior to adding the filter to the measurement chain.

### 8.3.2. 8DPSK MODE

ANT 1-2.00004829

#### HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

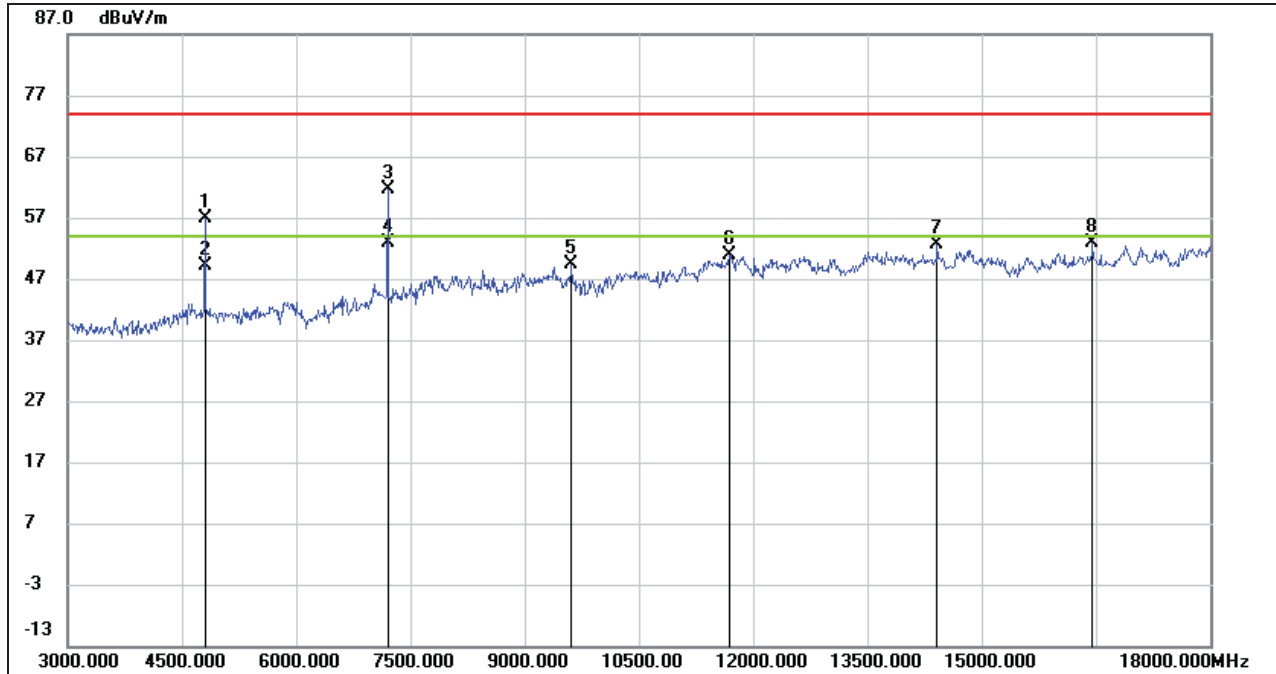


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4800.000	55.44	1.40	56.84	74.00	-17.16	peak
2	4800.000	47.64	1.40	49.04	54.00	-4.96	AVG
3	7200.000	54.37	7.36	61.73	74.00	-12.27	peak
4	7200.000	45.43	7.36	52.79	54.00	-1.21	AVG
5	9615.000	38.36	10.95	49.31	74.00	-24.69	peak
6	11685.000	35.62	15.26	50.88	74.00	-23.12	peak
7	14415.000	35.26	17.36	52.62	74.00	-21.38	peak
8	16455.000	33.13	19.68	52.81	74.00	-21.19	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.  
 5. For the transmitting duration, please refer to clause 7.1.  
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.



**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**

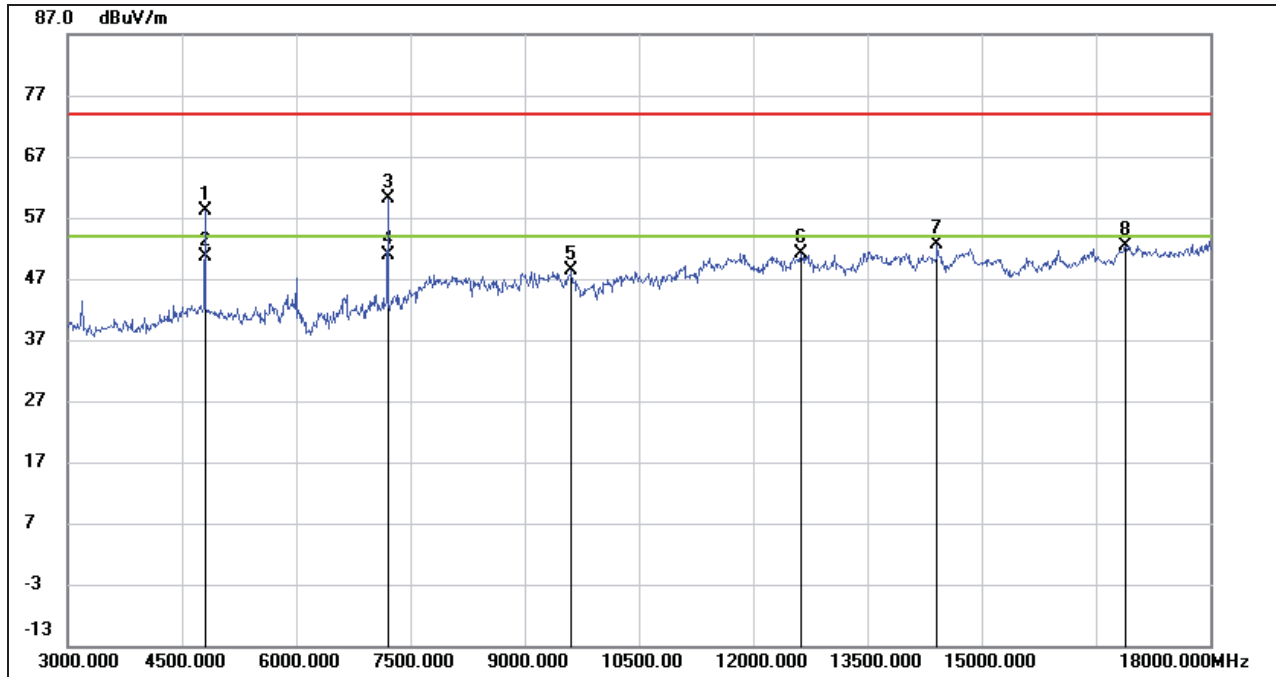


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4800.000	56.83	1.40	58.23	74.00	-15.77	peak
2	4800.000	49.30	1.40	50.70	54.00	-3.30	AVG
3	7200.000	52.70	7.36	60.06	74.00	-13.94	peak
4	7200.000	43.63	7.36	50.99	54.00	-3.01	AVG
5	9615.000	37.38	10.95	48.33	74.00	-25.67	peak
6	12630.000	35.32	15.72	51.04	74.00	-22.96	peak
7	14415.000	35.23	17.36	52.59	74.00	-21.41	peak
8	16890.000	31.00	21.49	52.49	74.00	-21.51	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.  
 5. For the transmitting duration, please refer to clause 7.1.  
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.




**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**

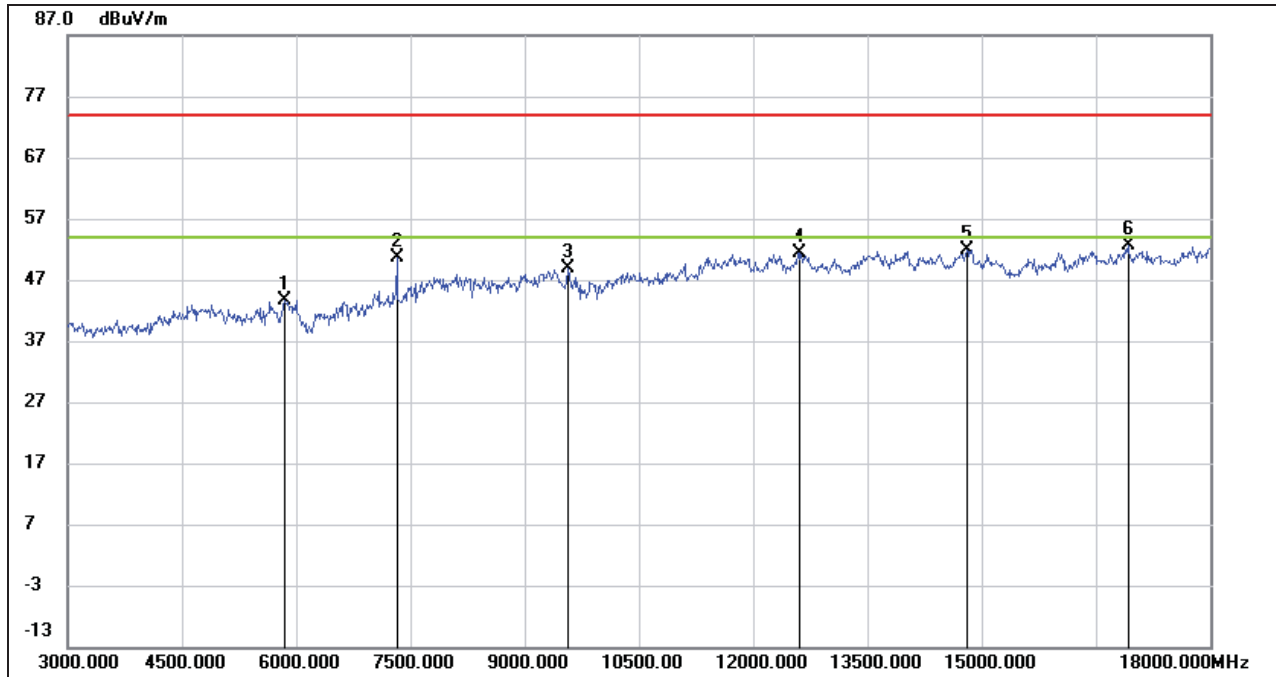

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	39.73	4.00	43.73	74.00	-30.27	peak
2	7320.000	43.26	7.28	50.54	74.00	-23.46	peak
3	9570.000	37.92	10.88	48.80	74.00	-25.20	peak
4	12600.000	35.59	15.78	51.37	74.00	-22.63	peak
5	14805.000	33.94	18.00	51.94	74.00	-22.06	peak
6	16920.000	31.05	21.51	52.56	74.00	-21.44	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.


**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**

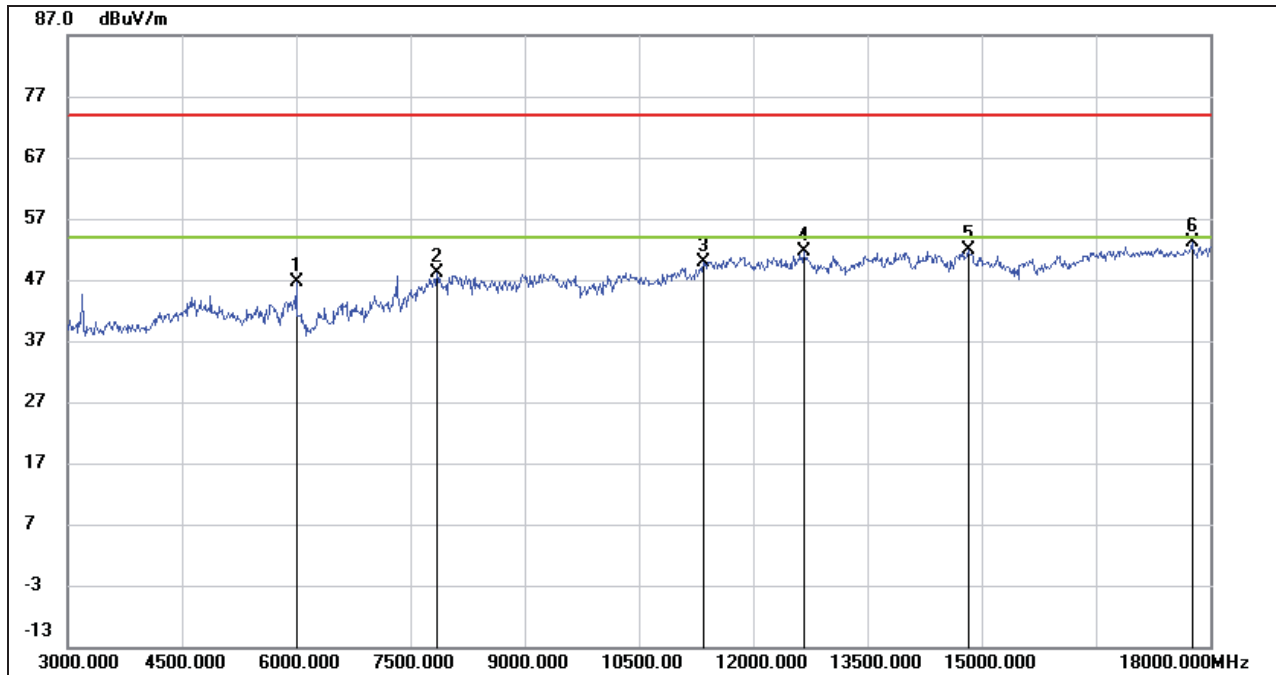

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6000.000	42.59	4.00	46.59	74.00	-27.41	peak
2	7845.000	38.98	9.14	48.12	74.00	-25.88	peak
3	11340.000	35.57	14.21	49.78	74.00	-24.22	peak
4	12660.000	35.91	15.69	51.60	74.00	-22.40	peak
5	14820.000	34.07	17.91	51.98	74.00	-22.02	peak
6	17760.000	29.33	23.82	53.15	74.00	-20.85	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.


**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**

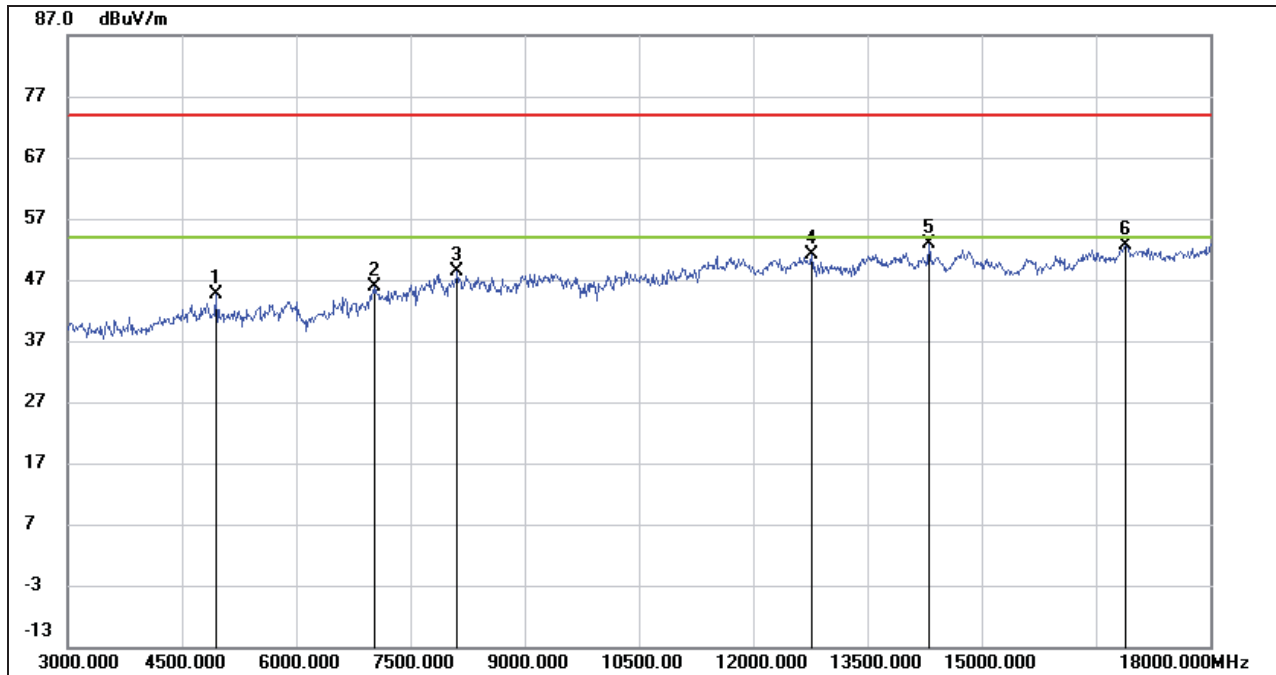

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4950.000	42.94	1.71	44.65	74.00	-29.35	peak
2	7035.000	38.24	7.62	45.86	74.00	-28.14	peak
3	8115.000	38.27	10.13	48.40	74.00	-25.60	peak
4	12765.000	35.33	15.87	51.20	74.00	-22.80	peak
5	14310.000	34.72	18.05	52.77	74.00	-21.23	peak
6	16890.000	31.18	21.49	52.67	74.00	-21.33	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**

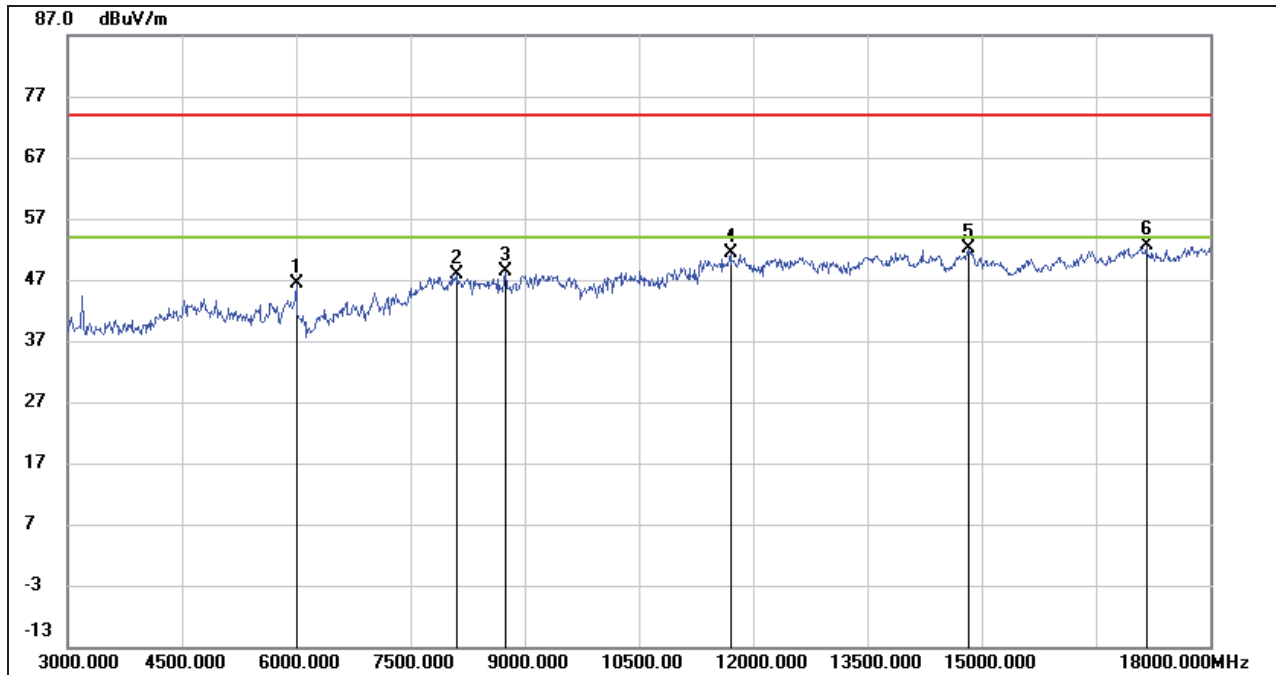


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6000.000	42.30	4.00	46.30	74.00	-27.70	peak
2	8115.000	37.83	10.13	47.96	74.00	-26.04	peak
3	8745.000	39.19	9.13	48.32	74.00	-25.68	peak
4	11700.000	36.15	15.35	51.50	74.00	-22.50	peak
5	14835.000	34.26	17.80	52.06	74.00	-21.94	peak
6	17160.000	30.63	21.96	52.59	74.00	-21.41	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



ANT 2-AG-041533-2120

**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)**

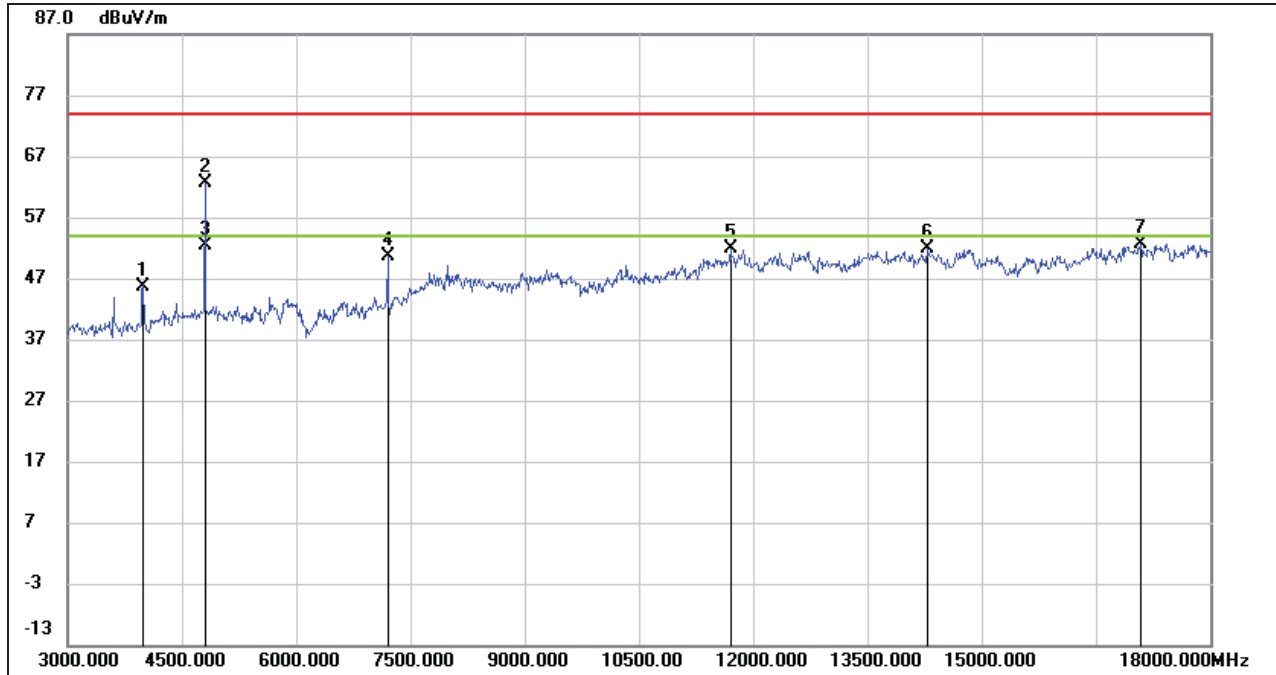


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3990.000	48.26	-2.51	45.75	74.00	-28.25	peak
2	4800.000	61.25	1.40	62.65	74.00	-11.35	peak
3	4800.000	50.89	1.40	52.29	54.00	-1.71	AVG
4	7200.000	43.26	7.36	50.62	74.00	-23.38	peak
5	11700.000	36.42	15.35	51.77	74.00	-22.23	peak
6	14280.000	33.79	18.06	51.85	74.00	-22.15	peak
7	17085.000	30.81	21.80	52.61	74.00	-21.39	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.  
 5. For the transmitting duration, please refer to clause 7.1.  
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.




**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**

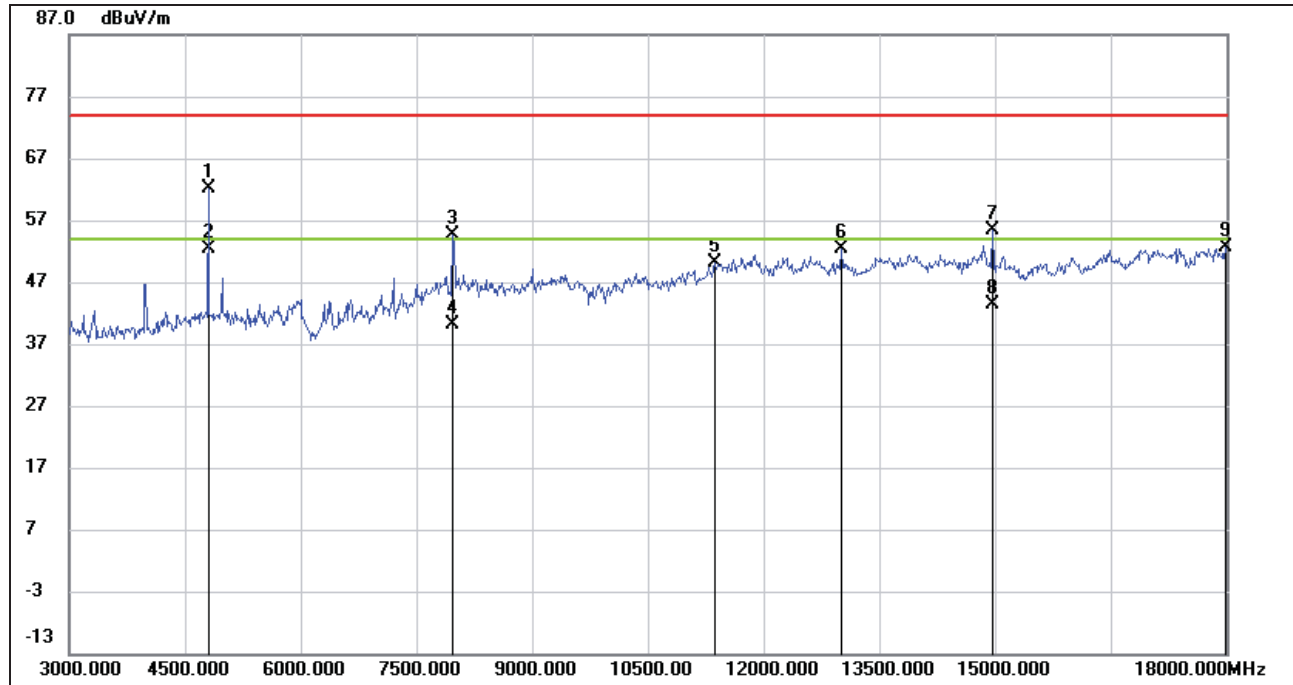

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4800.000	60.80	1.40	62.20	74.00	-11.80	peak
2	4800.000	51.10	1.40	52.50	54.00	-1.50	AVG
3	7965.000	45.85	8.71	54.56	74.00	-19.44	peak
4	7965.000	31.52	8.71	40.23	54.00	-13.77	AVG
5	11370.000	35.63	14.49	50.12	74.00	-23.88	peak
6	13005.000	36.42	16.02	52.44	74.00	-21.56	peak
7	14970.000	37.74	17.59	55.33	74.00	-18.67	peak
8	14970.000	25.83	17.59	43.42	54.00	-10.58	AVG
9	17985.000	28.46	24.21	52.67	74.00	-21.33	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.  
 5. For the transmitting duration, please refer to clause 7.1.  
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.

**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**

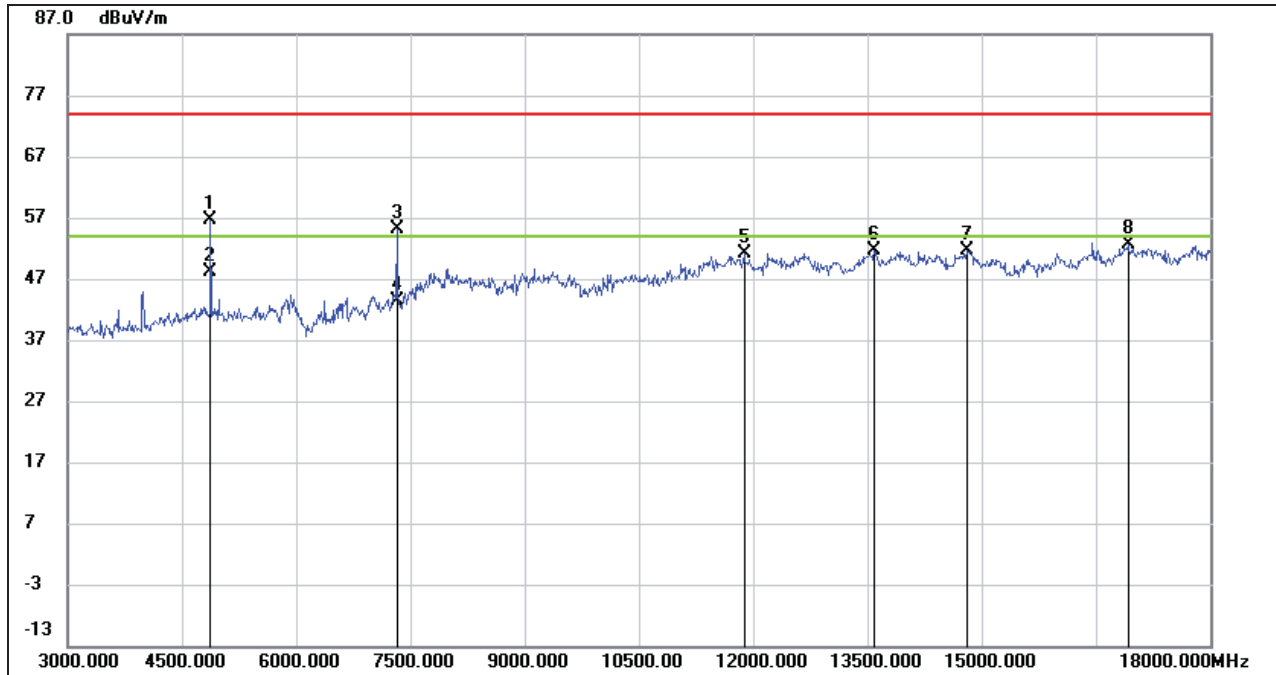


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	55.23	1.32	56.55	74.00	-17.45	peak
2	4875.000	46.84	1.32	48.16	54.00	-5.84	AVG
3	7320.000	47.90	7.28	55.18	74.00	-18.82	peak
4	7320.000	35.98	7.28	43.26	54.00	-10.74	AVG
5	11880.000	35.66	15.46	51.12	74.00	-22.88	peak
6	13590.000	34.53	17.11	51.64	74.00	-22.36	peak
7	14805.000	33.64	18.00	51.64	74.00	-22.36	peak
8	16920.000	31.08	21.51	52.59	74.00	-21.41	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.  
 5. For the transmitting duration, please refer to clause 7.1.  
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.



**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**

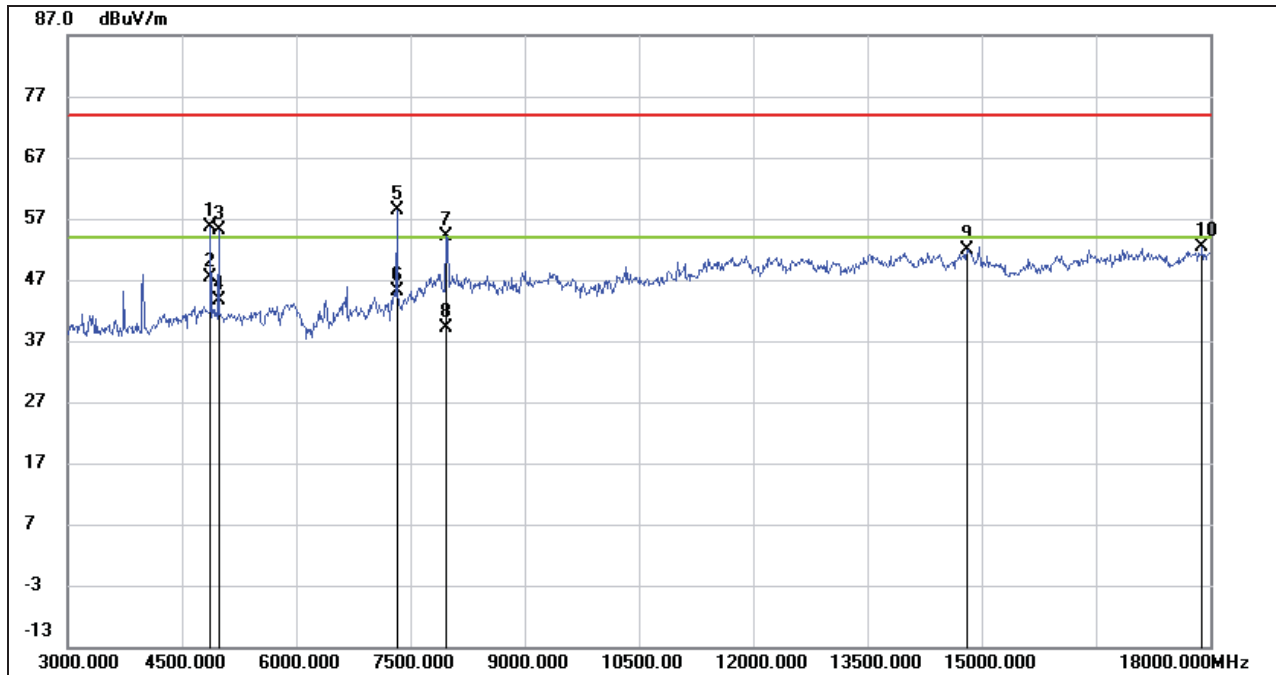


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	54.37	1.32	55.69	74.00	-18.31	peak
2	4875.000	45.96	1.32	47.28	54.00	-6.72	AVG
3	4980.000	53.09	1.98	55.07	74.00	-18.93	peak
4	4980.000	41.71	1.98	43.69	54.00	-10.31	AVG
5	7320.000	51.06	7.28	58.34	74.00	-15.66	peak
6	7320.000	37.81	7.28	45.09	54.00	-8.91	AVG
7	7965.000	45.48	8.71	54.19	74.00	-19.81	peak
8	7965.000	30.45	8.71	39.16	54.00	-14.84	AVG
9	14805.000	33.99	18.00	51.99	74.00	-22.01	peak
10	17895.000	28.49	23.89	52.38	74.00	-21.62	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.  
 5. For the transmitting duration, please refer to clause 7.1.  
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.




**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**

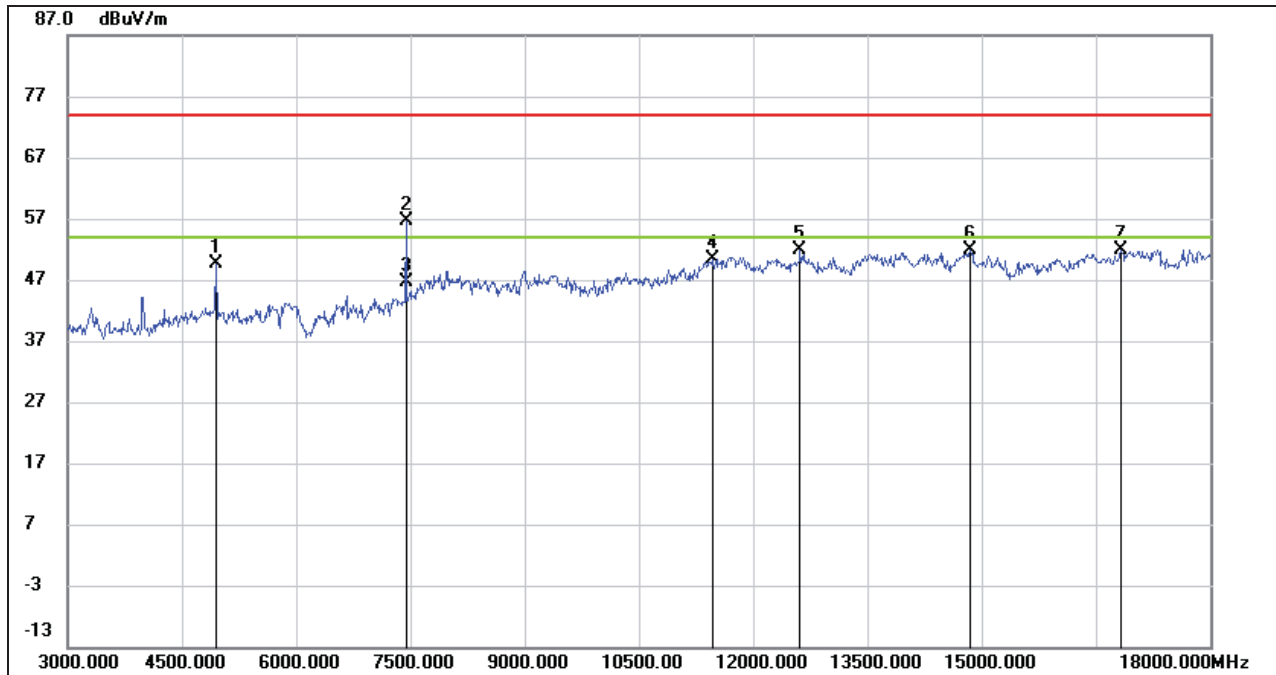

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4950.000	47.81	1.71	49.52	74.00	-24.48	peak
2	7440.000	48.59	8.13	56.72	74.00	-17.28	peak
3	7440.000	38.45	8.13	46.58	54.00	-7.42	AVG
4	11460.000	35.65	14.69	50.34	74.00	-23.66	peak
5	12615.000	36.05	15.75	51.80	74.00	-22.20	peak
6	14850.000	34.11	17.71	51.82	74.00	-22.18	peak
7	16830.000	31.02	20.97	51.99	74.00	-22.01	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.  
 5. For the transmitting duration, please refer to clause 7.1.  
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.

**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**

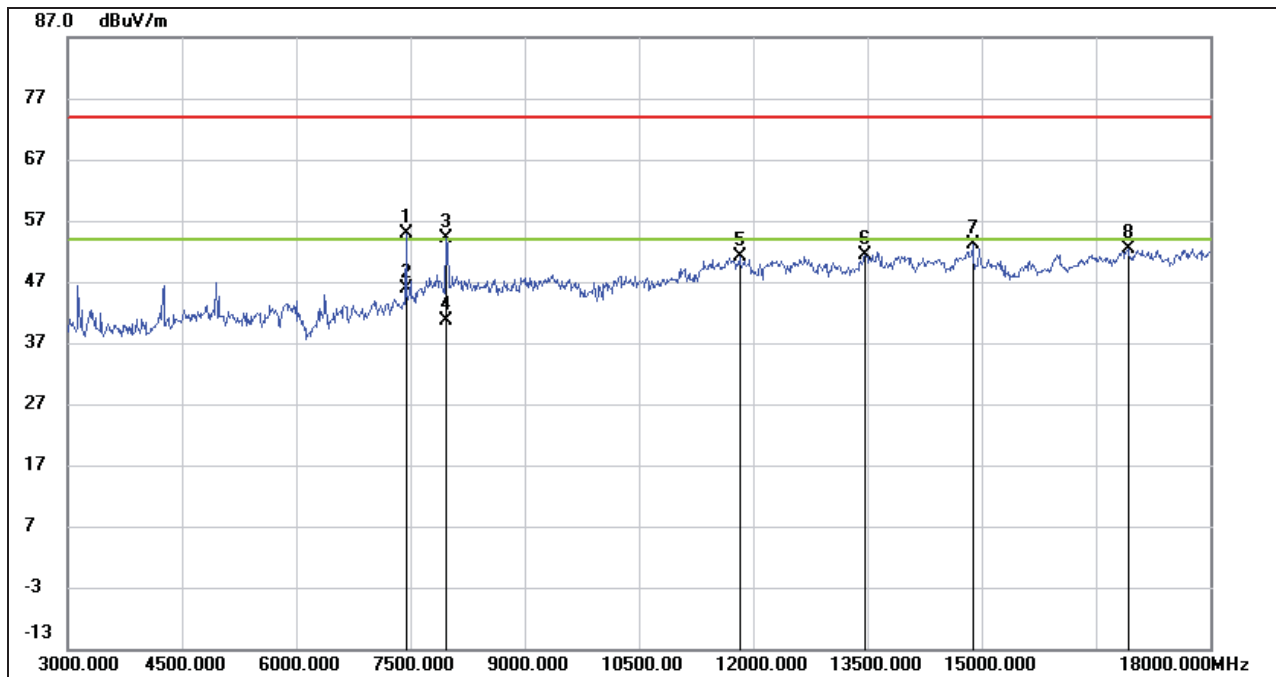


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7440.000	46.71	8.13	54.84	74.00	-19.16	peak
2	7440.000	37.81	8.13	45.94	54.00	-8.06	AVG
3	7965.000	45.38	8.71	54.09	74.00	-19.91	peak
4	7965.000	31.92	8.71	40.63	54.00	-13.37	AVG
5	11820.000	35.90	15.29	51.19	74.00	-22.81	peak
6	13470.000	34.12	17.15	51.27	74.00	-22.73	peak
7	14880.000	35.73	17.51	53.24	74.00	-20.76	peak
8	16920.000	30.75	21.51	52.26	74.00	-21.74	peak

- Note:
1. Peak Result = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.
  5. For the transmitting duration, please refer to clause 7.1.
  6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
  7. Proper operation of the transmitter prior to adding the filter to the measurement chain.



ANT 3-W-M-D-B-N-0-0230

**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)**

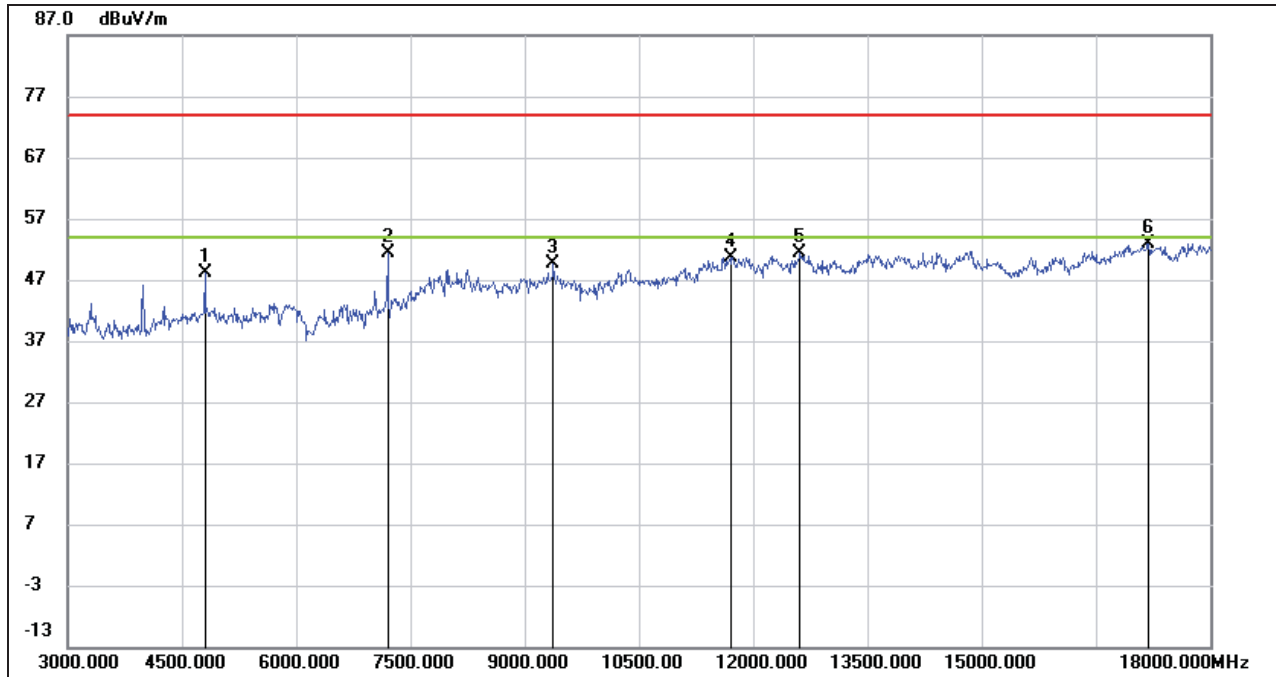


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4800.000	46.63	1.40	48.03	74.00	-25.97	peak
2	7200.000	43.93	7.36	51.29	74.00	-22.71	peak
3	9375.000	38.84	10.83	49.67	74.00	-24.33	peak
4	11700.000	35.38	15.35	50.73	74.00	-23.27	peak
5	12615.000	35.53	15.75	51.28	74.00	-22.72	peak
6	17190.000	30.93	21.98	52.91	74.00	-21.09	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.




**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**

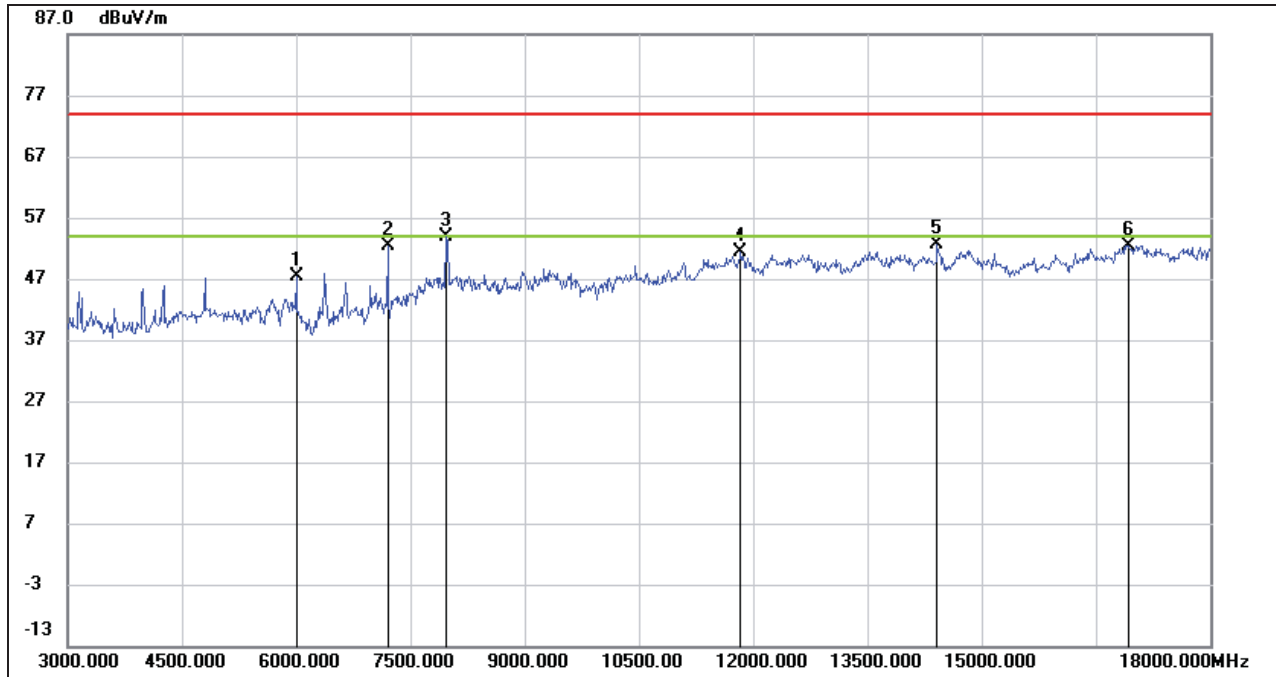

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6000.000	43.35	4.00	47.35	74.00	-26.65	peak
2	7200.000	45.14	7.36	52.50	74.00	-21.50	peak
3	7965.000	45.23	8.71	53.94	74.00	-20.06	peak
4	11835.000	35.92	15.34	51.26	74.00	-22.74	peak
5	14415.000	35.31	17.36	52.67	74.00	-21.33	peak
6	16935.000	30.93	21.45	52.38	74.00	-21.62	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.


**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**

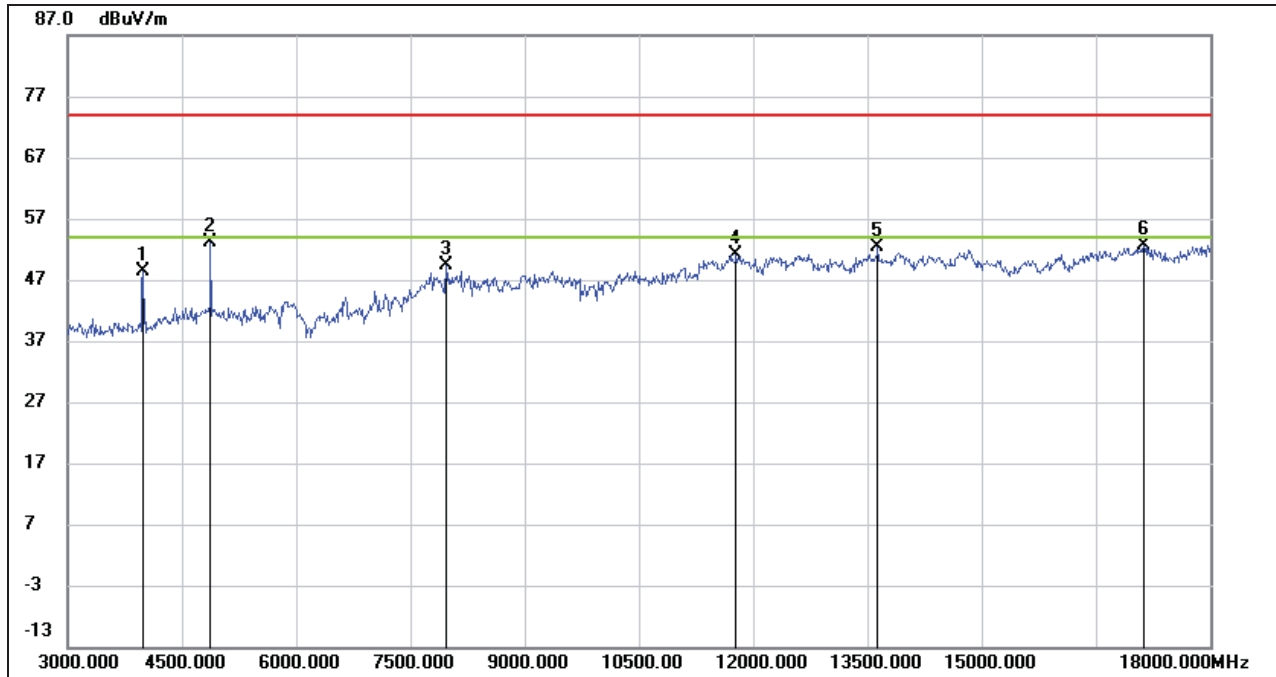

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3990.000	50.86	-2.51	48.35	74.00	-25.65	peak
2	4875.000	51.86	1.32	53.18	74.00	-20.82	peak
3	7965.000	40.76	8.71	49.47	74.00	-24.53	peak
4	11775.000	35.75	15.27	51.02	74.00	-22.98	peak
5	13635.000	35.09	17.28	52.37	74.00	-21.63	peak
6	17130.000	30.67	21.92	52.59	74.00	-21.41	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.


**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**

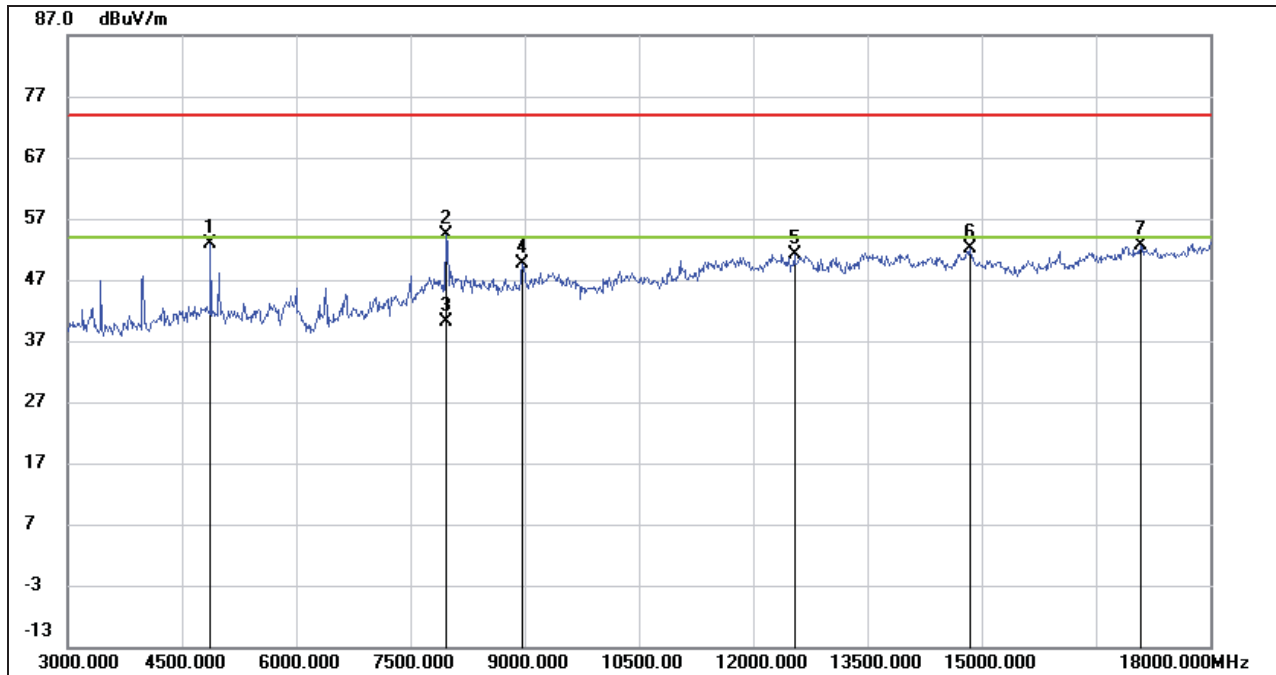

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	51.60	1.32	52.92	74.00	-21.08	peak
2	7965.000	45.71	8.71	54.42	74.00	-19.58	peak
3	7965.000	31.45	8.71	40.16	54.00	-13.84	AVG
4	8970.000	38.94	10.70	49.64	74.00	-24.36	peak
5	12540.000	35.44	15.72	51.16	74.00	-22.84	peak
6	14850.000	34.41	17.71	52.12	74.00	-21.88	peak
7	17085.000	30.78	21.80	52.58	74.00	-21.42	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.  
 5. For the transmitting duration, please refer to clause 7.1.  
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.


**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**

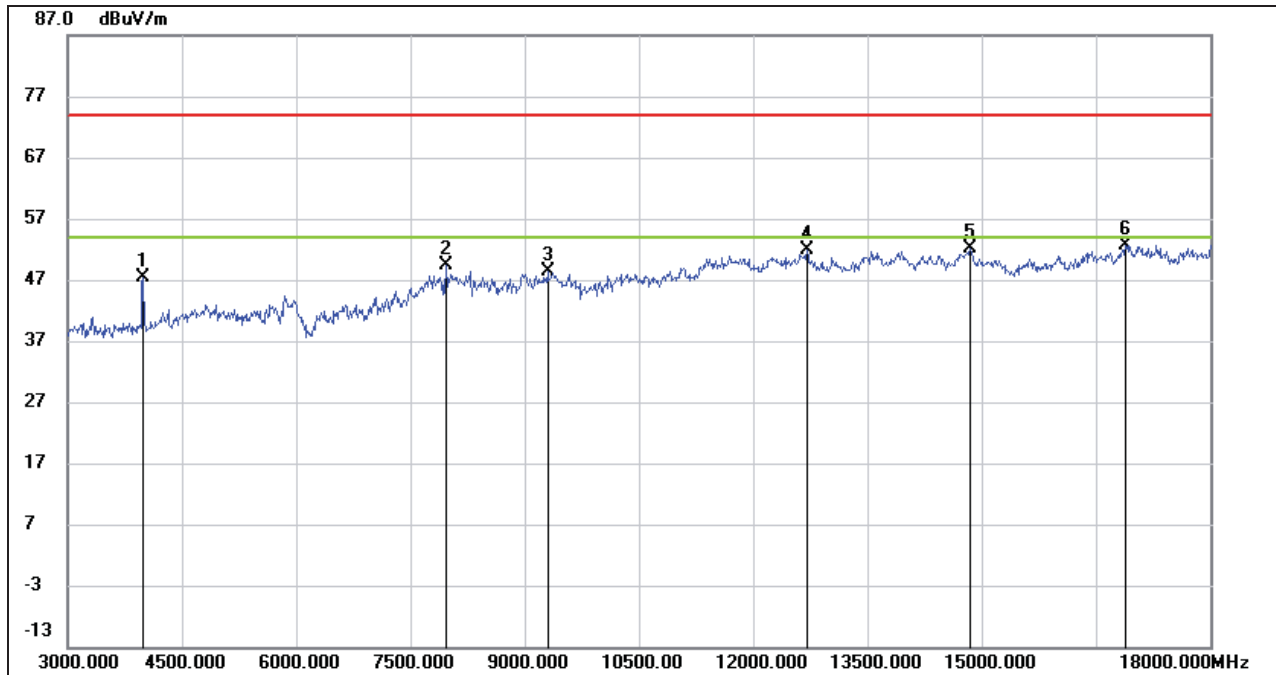

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3990.000	50.01	-2.51	47.50	74.00	-26.50	peak
2	7965.000	40.70	8.71	49.41	74.00	-24.59	peak
3	9300.000	38.05	10.40	48.45	74.00	-25.55	peak
4	12705.000	36.13	15.64	51.77	74.00	-22.23	peak
5	14850.000	34.34	17.71	52.05	74.00	-21.95	peak
6	16890.000	31.05	21.49	52.54	74.00	-21.46	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**

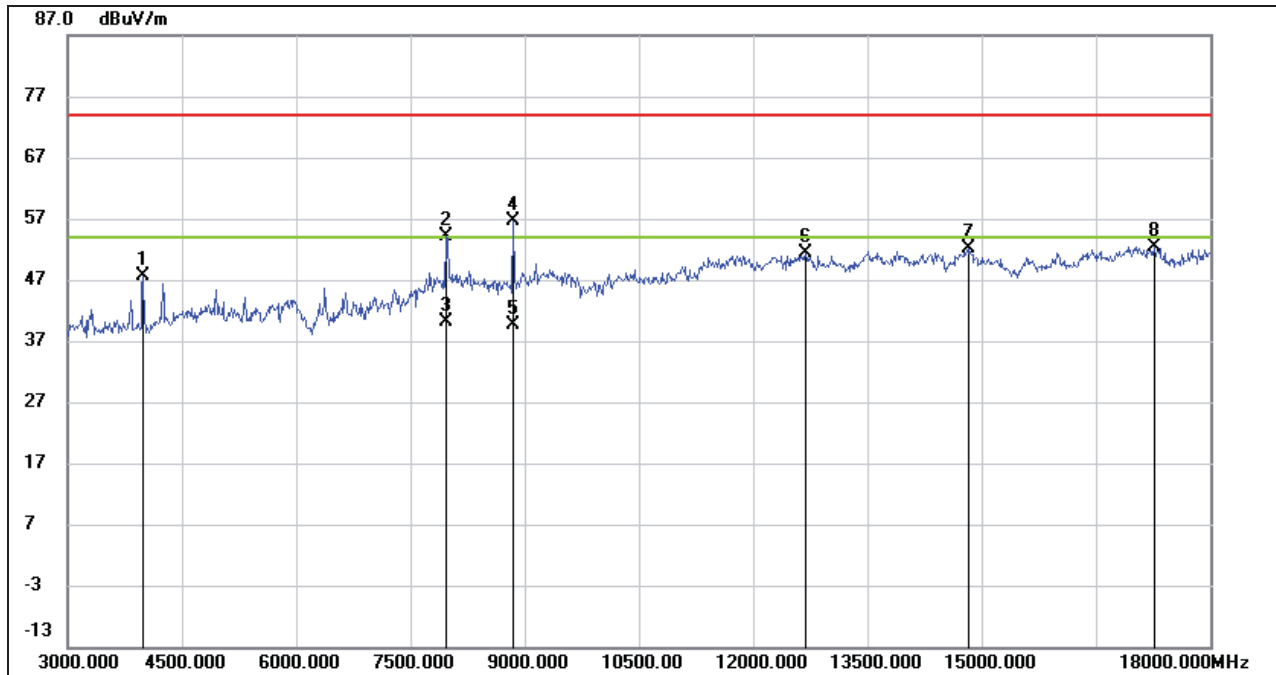

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3990.000	50.14	-2.51	47.63	74.00	-26.37	peak
2	7965.000	45.36	8.71	54.07	74.00	-19.93	peak
3	7965.000	31.32	8.71	40.03	54.00	-13.97	AVG
4	8850.000	47.33	9.31	56.64	74.00	-17.36	peak
5	8850.000	30.32	9.31	39.63	54.00	-14.37	AVG
6	12690.000	35.85	15.64	51.49	74.00	-22.51	peak
7	14835.000	34.43	17.80	52.23	74.00	-21.77	peak
8	17265.000	30.07	22.39	52.46	74.00	-21.54	peak


- Note:
1. Peak Result = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.
  5. For the transmitting duration, please refer to clause 7.1.
  6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
  7. Proper operation of the transmitter prior to adding the filter to the measurement chain.



### 8.4. SPURIOUS EMISSIONS (18 GHz ~ 26 GHz)

#### 8.4.1. 8DPSK MODE

#### SPURIOUS EMISSIONS (HIGH CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

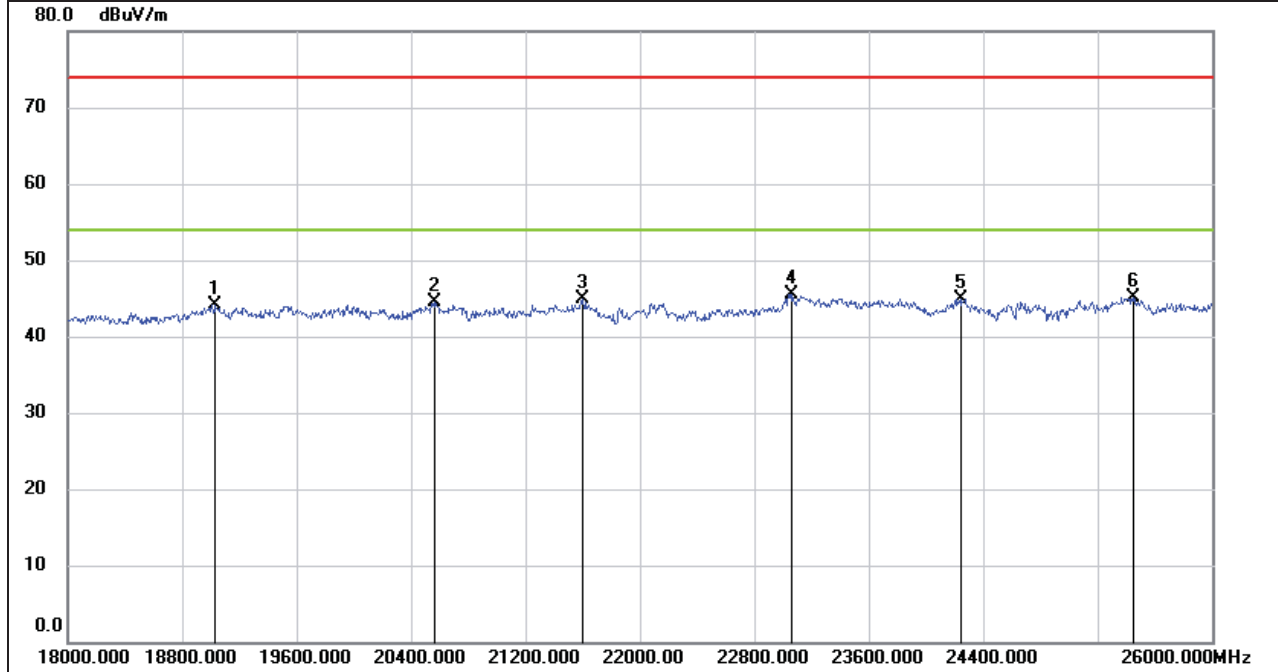

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	19032.000	49.31	-5.27	44.04	74.00	-29.96	peak
2	20560.000	49.73	-5.30	44.43	74.00	-29.57	peak
3	21600.000	49.52	-4.54	44.98	74.00	-29.02	peak
4	23064.000	48.99	-3.42	45.57	74.00	-28.43	peak
5	24248.000	47.82	-2.83	44.99	74.00	-29.01	peak
6	25448.000	46.83	-1.76	45.07	74.00	-28.93	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. The preamplifier only effect to the above 18GHz signal and no filter added to the measurement chain.

**SPURIOUS EMISSIONS (HIGH CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)**

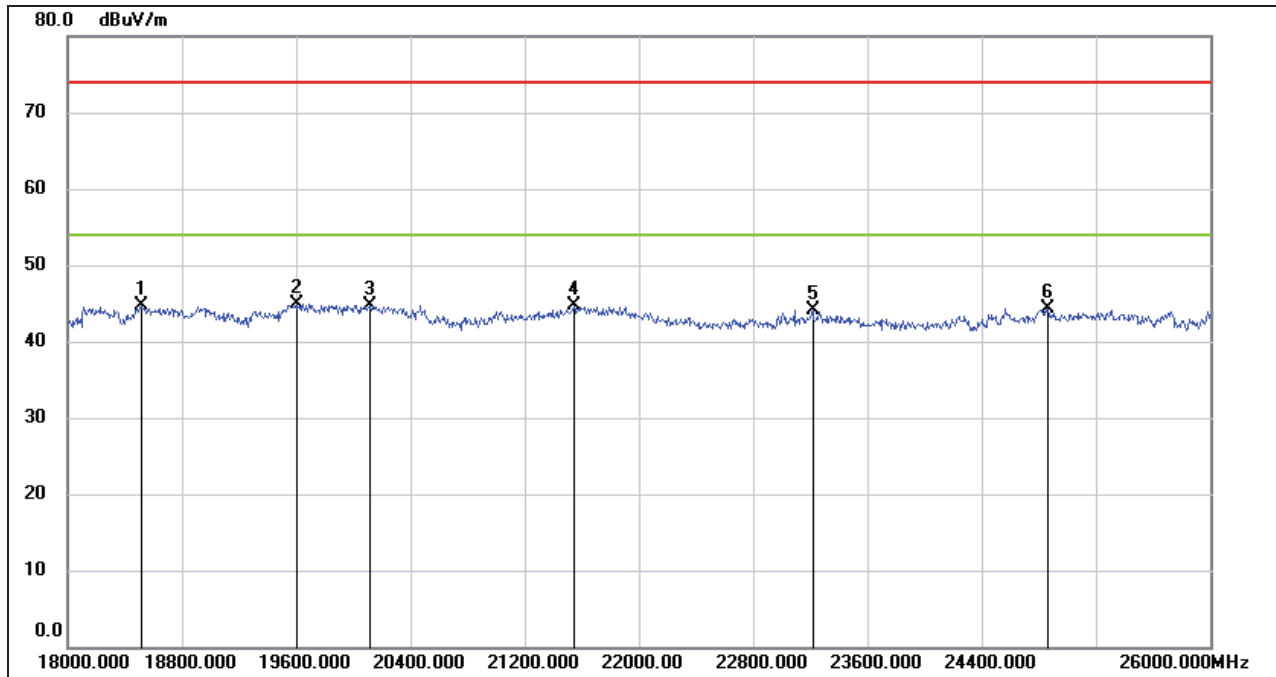

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18520.000	49.94	-5.26	44.68	74.00	-29.32	peak
2	19600.000	50.29	-5.43	44.86	74.00	-29.14	peak
3	20120.000	50.22	-5.53	44.69	74.00	-29.31	peak
4	21544.000	49.26	-4.63	44.63	74.00	-29.37	peak
5	23216.000	47.51	-3.38	44.13	74.00	-29.87	peak
6	24864.000	46.53	-2.23	44.30	74.00	-29.70	peak


- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. The preamplifier only effect to the above 18GHz signal and no filter added to the measurement chain.

Note: All the modes have been tested, only the worst data was recorded in the report.

## 8.5. SPURIOUS EMISSIONS (30 MHz ~ 1 GHz)

### 8.5.1. 8DPSK MODE


#### SPURIOUS EMISSIONS (HIGH CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

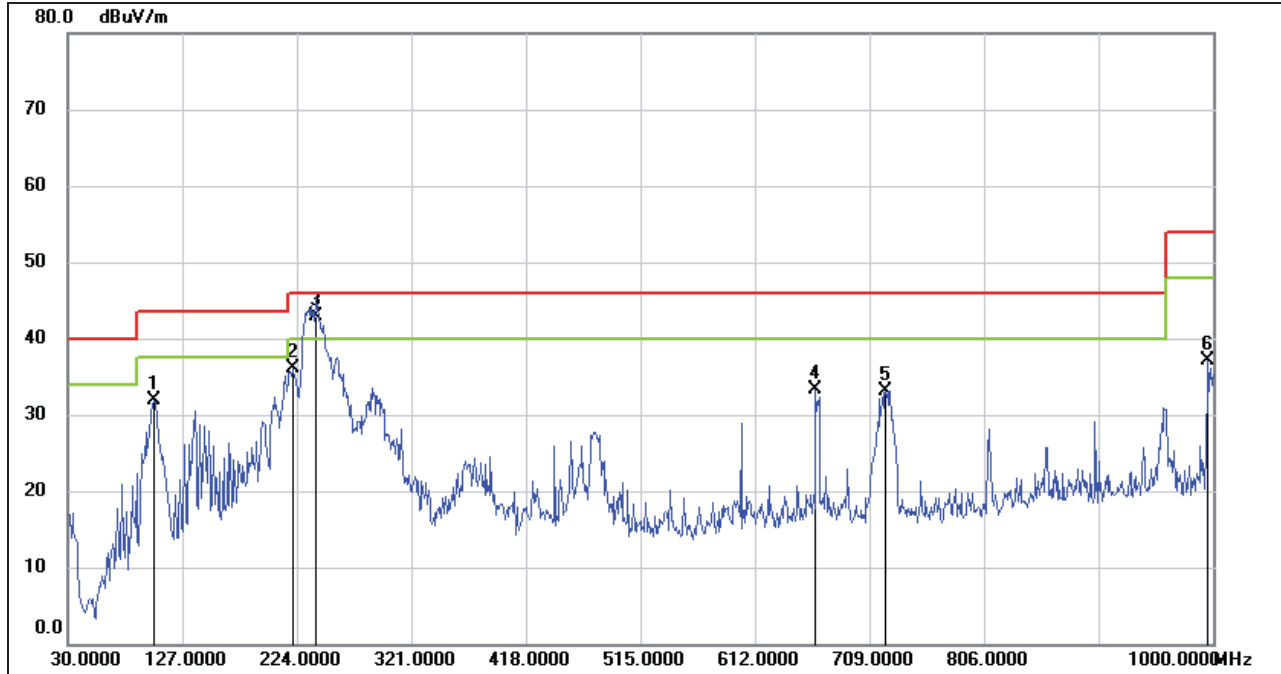

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	102.7500	52.82	-20.91	31.91	43.50	-11.59	QP
2	220.1200	54.24	-18.19	36.05	46.00	-9.95	QP
3	240.4900	62.14	-19.17	42.97	46.00	-3.03	QP
4	663.4099	41.90	-8.66	33.24	46.00	-12.76	QP
5	722.5800	41.26	-8.08	33.18	46.00	-12.82	QP
6	995.1500	41.35	-4.20	37.15	54.00	-16.85	QP

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.  
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.  
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

**SPURIOUS EMISSIONS (HIGH CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)**

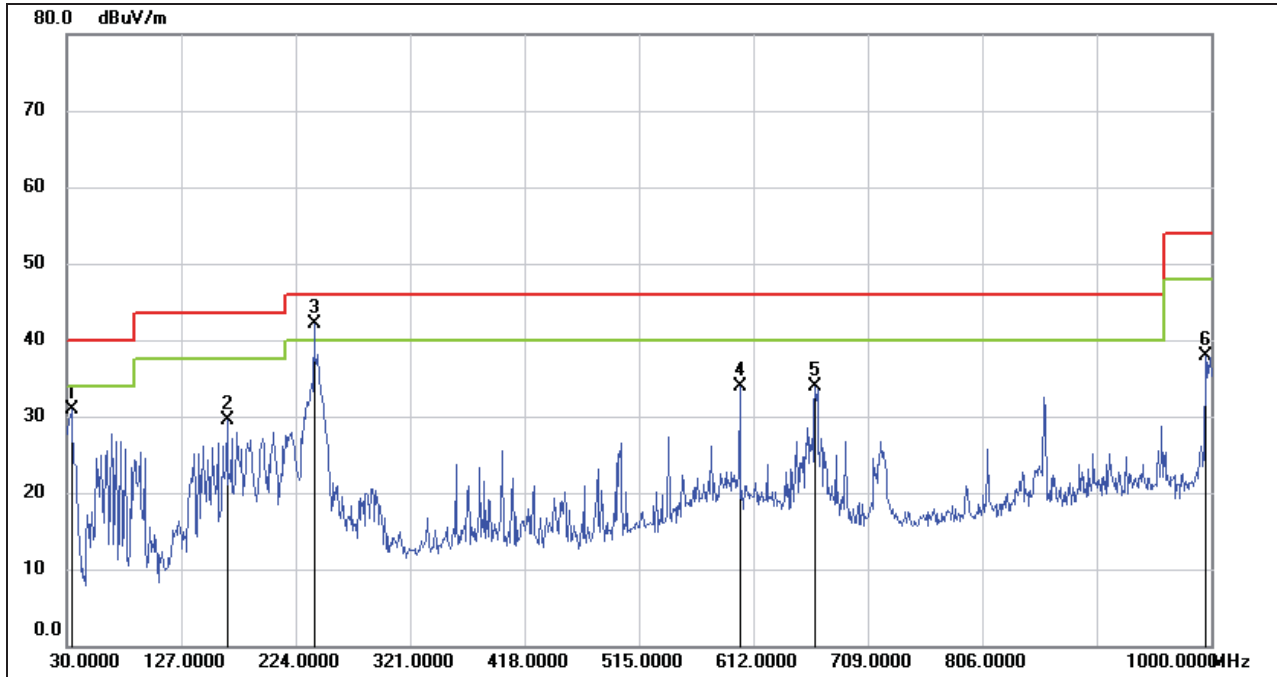

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	33.8800	50.13	-19.31	30.82	40.00	-9.18	QP
2	165.8000	46.92	-17.51	29.41	43.50	-14.09	QP
3	239.5200	61.25	-19.16	42.09	46.00	-3.91	QP
4	600.3600	43.35	-9.54	33.81	46.00	-12.19	QP
5	664.3800	42.53	-8.66	33.87	46.00	-12.13	QP
6	995.1500	42.03	-4.20	37.83	54.00	-16.17	QP

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.  
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.  
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto


Note: All the modes have been tested, only the worst data was recorded in the report.

## 8.6. SPURIOUS EMISSIONS BELOW 30 MHz

### 8.6.1. 8DPSK MODE

(HIGH CHANNEL, LOOP ANTENNA FACE ON TO THE EUT, WORST-CASE CONFIGURATION)

9 kHz~ 150 kHz

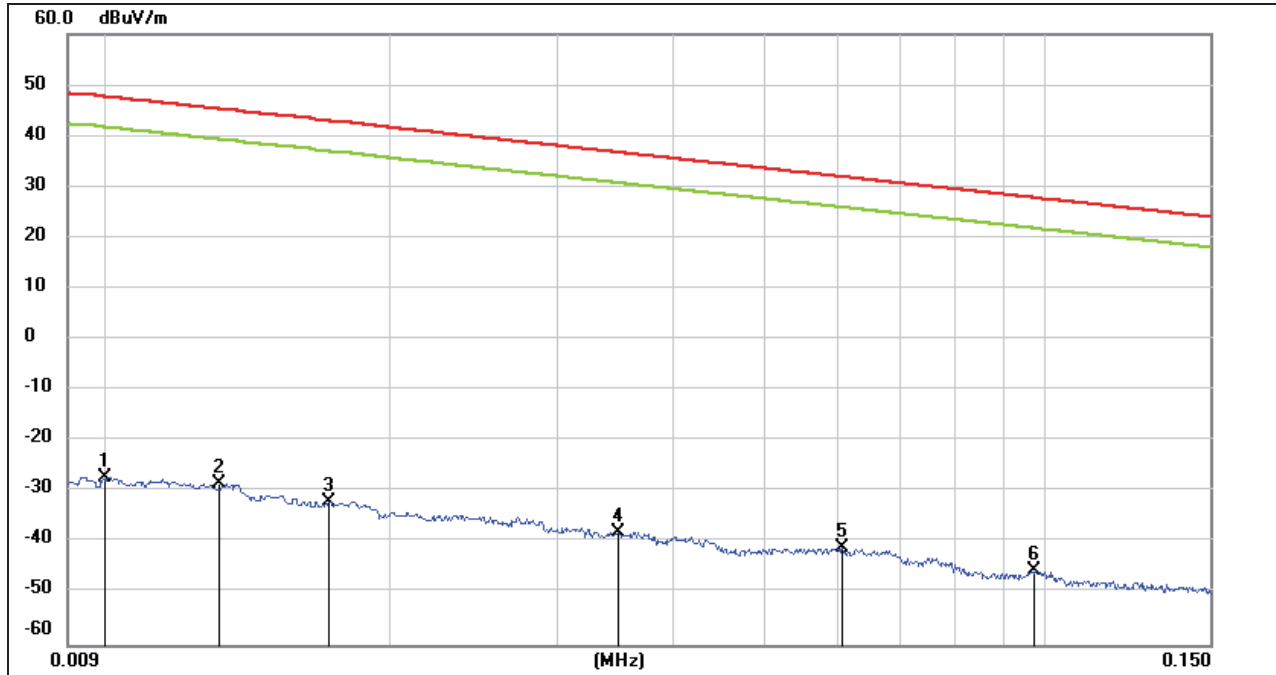


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.0100	74.22	-101.40	-27.18	47.6	-78.68	-3.90	-74.78	peak
2	0.0131	72.95	-101.38	-28.43	45.25	-79.93	-6.25	-73.68	peak
3	0.0171	69.38	-101.36	-31.98	42.94	-83.48	-8.56	-74.92	peak
4	0.0349	63.53	-101.41	-37.88	36.75	-89.38	-14.75	-74.63	peak
5	0.0606	60.45	-101.52	-41.07	31.95	-92.57	-19.55	-73.02	peak
6	0.0974	56.27	-101.78	-45.51	27.83	-97.01	-23.67	-73.34	peak

Note: 1. Measurement = Reading Level + Correct Factor (dBuA/m= dBuV/m- 20Log10[120π] = dBuV/m- 51.5).

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

**150 kHz ~ 490 kHz**

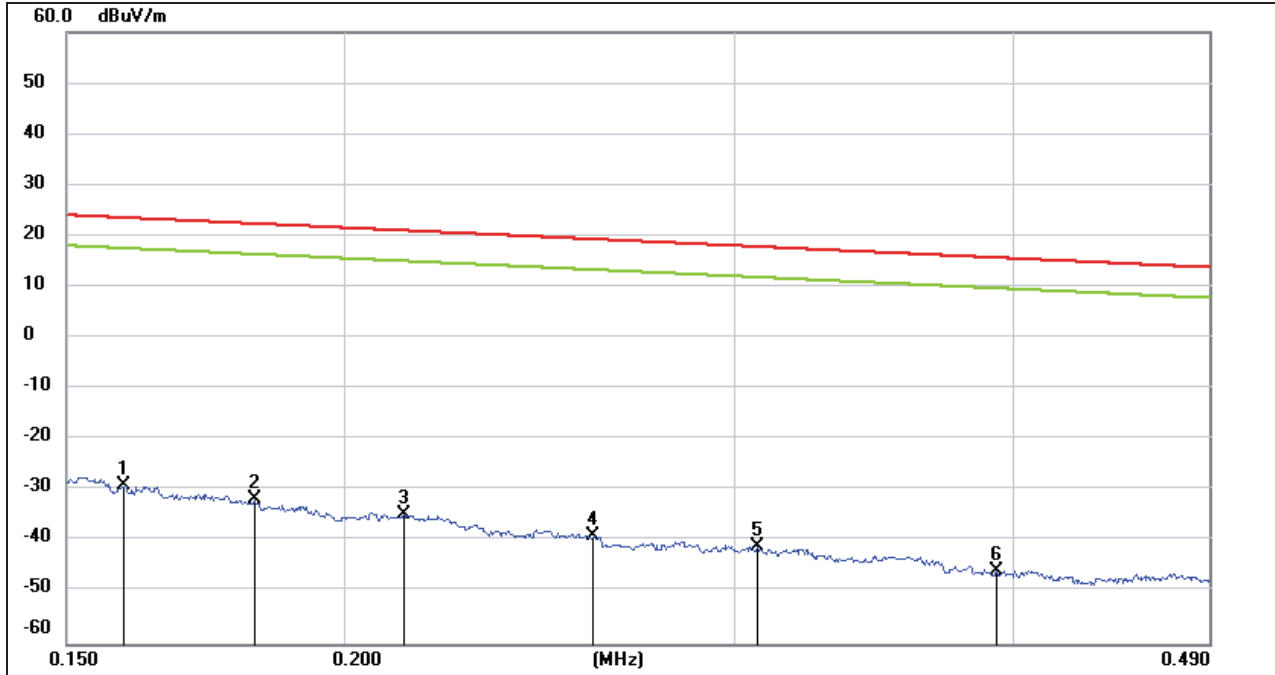


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.1592	72.85	-101.65	-28.8	23.56	-80.30	-27.94	-52.36	peak
2	0.1822	69.89	-101.68	-31.79	22.39	-83.29	-29.11	-54.18	peak
3	0.2127	66.95	-101.74	-34.79	21.04	-86.29	-30.46	-55.83	peak
4	0.2590	62.95	-101.81	-38.86	19.34	-90.36	-32.16	-58.20	peak
5	0.3069	60.93	-101.86	-40.93	17.86	-92.43	-33.64	-58.79	peak
6	0.3933	56.22	-101.96	-45.74	15.71	-97.24	-35.79	-61.45	peak

Note: 1. Measurement = Reading Level + Correct Factor (dBuA/m= dBuV/m- 20Log10[120π] = dBuV/m- 51.5).

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

**490 kHz ~ 30 MHz**

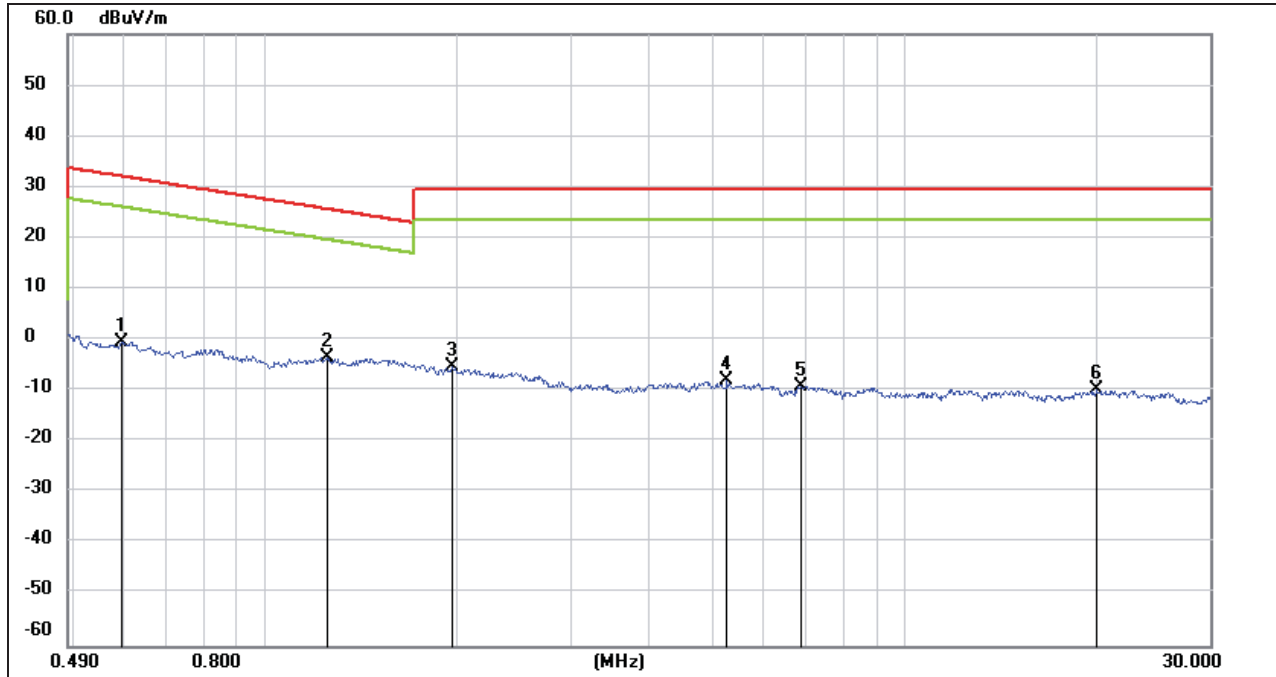

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.5945	61.62	-62.08	-0.46	32.12	-51.96	-19.38	-32.58	peak
2	1.2459	58.75	-62.16	-3.41	25.7	-54.91	-25.80	-29.11	peak
3	1.9516	56.61	-61.84	-5.23	29.54	-56.73	-21.96	-34.77	peak
4	5.2705	53.54	-61.45	-7.91	29.54	-59.41	-21.96	-37.45	peak
5	6.8936	52.09	-61.22	-9.13	29.54	-60.63	-21.96	-38.67	peak
6	19.9954	50.94	-60.83	-9.89	29.54	-61.39	-21.96	-39.43	peak

Note: 1. Measurement = Reading Level + Correct Factor (dBuA/m= dBuV/m- 20Log10[120π] = dBuV/m- 51.5).

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

Note: All the modes have been tested, only the worst data was recorded in the report.

## 9. AC POWER LINE CONDUCTED EMISSIONS


### LIMITS

Please refer to CFR 47 FCC §15.207 (a) and ISED RSS-Gen Clause 8.8

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

### TEST SETUP AND PROCEDURE

Refer to ANSI C63.10-2013 clause 6.2.

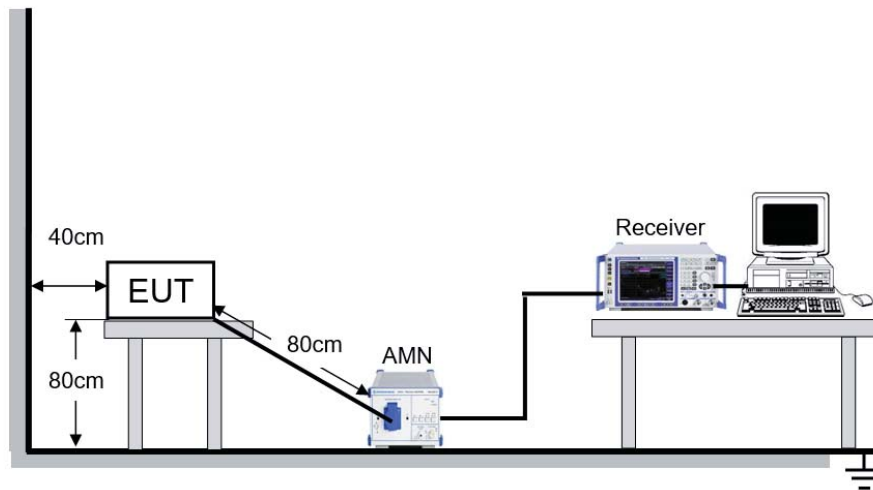

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

### TEST ENVIRONMENT


Temperature	21.5 °C	Relative Humidity	48.1 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 5 V



**TEST RESULTS**

**9.1. 8DPSK MODE**


**LINE L RESULTS (HIGH CHANNEL, WORST-CASE CONFIGURATION)**

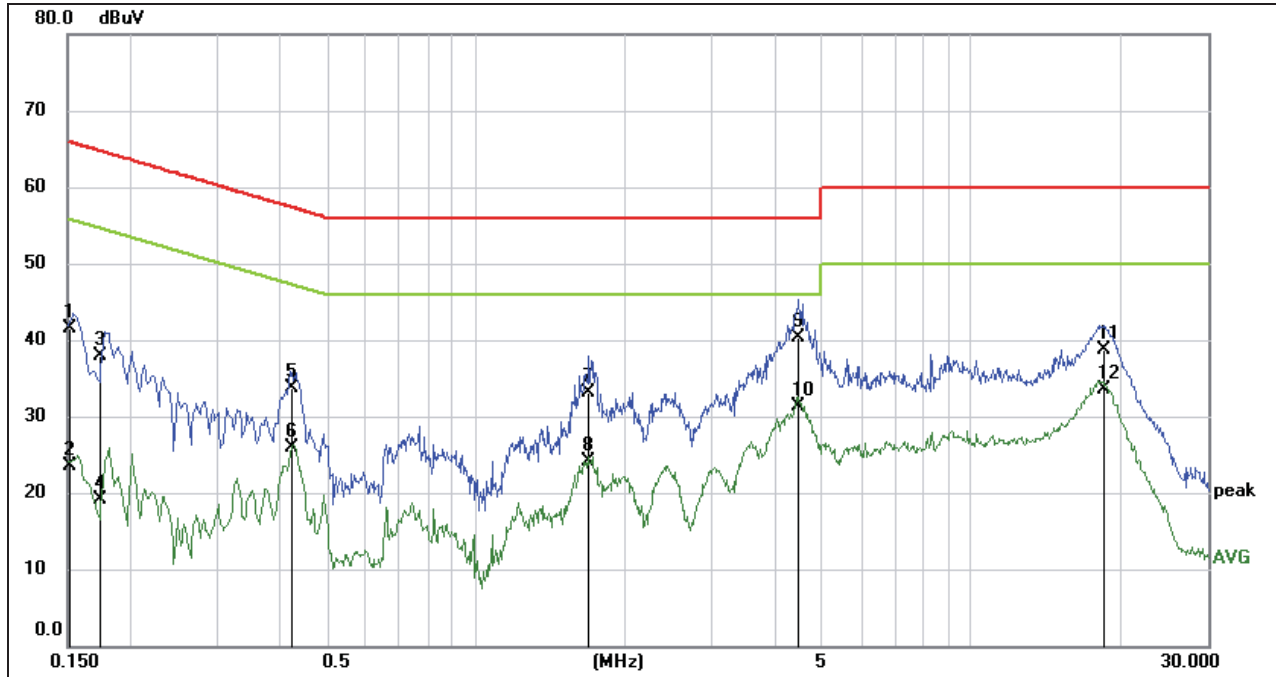

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1511	31.83	9.59	41.42	65.94	-24.52	QP
2	0.1511	13.96	9.59	23.55	55.94	-32.39	AVG
3	0.1743	28.41	9.59	38.00	64.75	-26.75	QP
4	0.1743	9.59	9.59	19.18	54.75	-35.57	AVG
5	0.4247	24.05	9.60	33.65	57.36	-23.71	QP
6	0.4247	16.38	9.60	25.98	47.36	-21.38	AVG
7	1.7033	23.41	9.62	33.03	56.00	-22.97	QP
8	1.7033	14.52	9.62	24.14	46.00	-21.86	AVG
9	4.4799	30.70	9.61	40.31	56.00	-15.69	QP
10	4.4799	21.61	9.61	31.22	46.00	-14.78	AVG
11	18.5788	28.90	9.79	38.69	60.00	-21.31	QP
12	18.5788	23.76	9.79	33.55	50.00	-16.45	AVG

- Note: 1. Result = Reading + Correct Factor.  
 2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).  
 4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

**LINE N RESULTS (HIGH CHANNEL, WORST-CASE CONFIGURATION)**

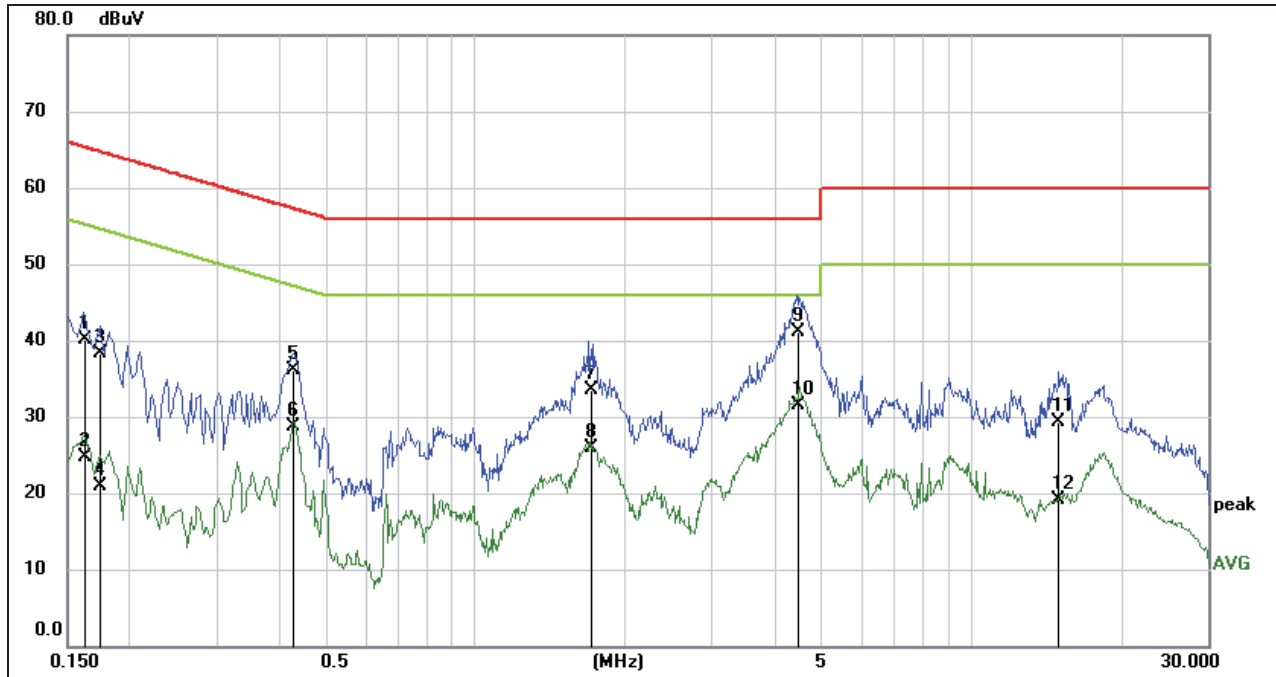

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1630	30.46	9.59	40.05	65.31	-25.26	QP
2	0.1630	15.15	9.59	24.74	55.31	-30.57	AVG
3	0.1750	28.74	9.59	38.33	64.72	-26.39	QP
4	0.1750	11.32	9.59	20.91	54.72	-33.81	AVG
5	0.4301	26.42	9.60	36.02	57.25	-21.23	QP
6	0.4301	19.05	9.60	28.65	47.25	-18.60	AVG
7	1.7146	23.83	9.62	33.45	56.00	-22.55	QP
8	1.7146	16.29	9.62	25.91	46.00	-20.09	AVG
9	4.5121	31.59	9.61	41.20	56.00	-14.80	QP
10	4.5121	21.97	9.61	31.58	46.00	-14.42	AVG
11	15.0227	19.56	9.66	29.22	60.00	-30.78	QP
12	15.0227	9.50	9.66	19.16	50.00	-30.84	AVG

Note: 1. Result = Reading + Correct Factor.  
 2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).  
 4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.



## 10. ANTENNA REQUIREMENTS

### APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### RESULTS

Complies



## Appendix

### Appendix A: 20dB Emission Bandwidth Test Result

Test Packet Type	Antenna	Channel	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.942	2401.559	2402.501	---	PASS
		2441	0.939	2440.556	2441.495	---	PASS
		2480	0.918	2479.568	2480.486	---	PASS
3DH5	Ant1	2402	1.296	2401.367	2402.663	---	PASS
		2441	1.329	2440.346	2441.675	---	PASS
		2480	1.323	2479.346	2480.669	---	PASS



Test Graphs



DH5 Ant1 2402




DH5 Ant1 2441




DH5 Ant1 2480



3DH5 Ant1 2402

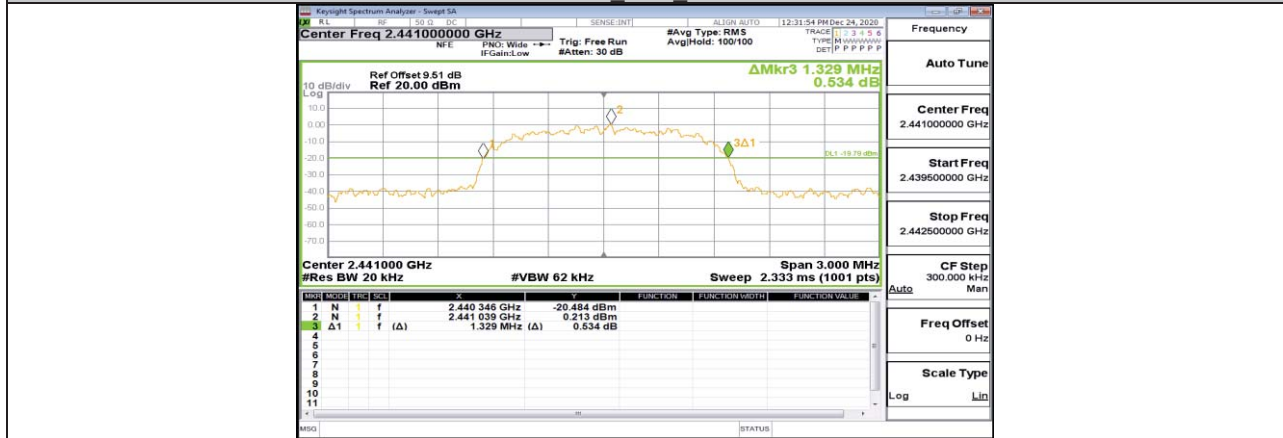

3DH5 Ant1 2441

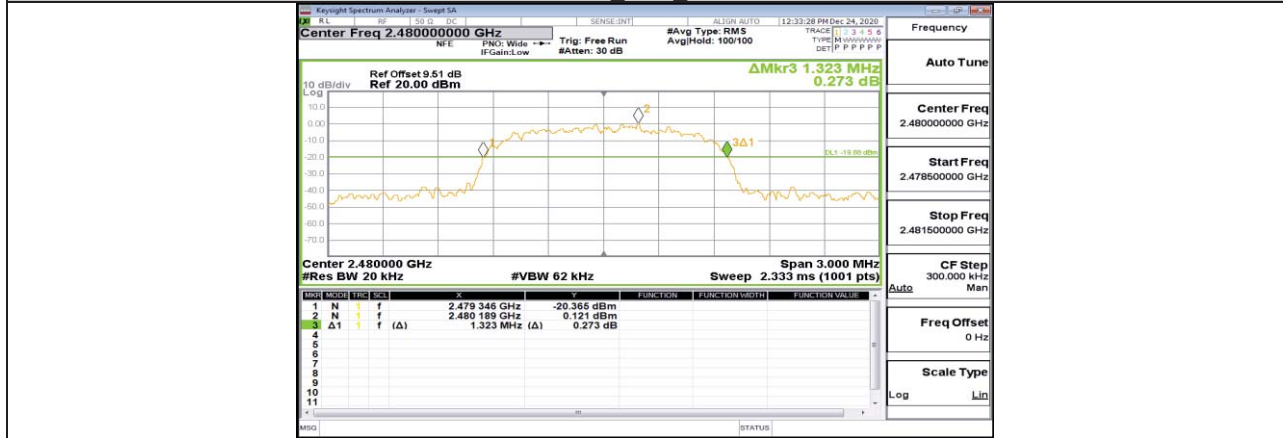

3DH5 Ant1 2480



### Appendix B: Occupied Channel Bandwidth Test Result


Test Packet Type	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.87400	2401.574	2402.448	---	PASS
		2441	0.87062	2440.576	2441.446	---	PASS
		2480	0.88485	2479.573	2480.458	---	PASS
3DH5	Ant1	2402	1.1875	2401.418	2402.606	---	PASS
		2441	1.1945	2440.412	2441.606	---	PASS
		2480	1.1899	2479.415	2480.605	---	PASS




### Test Graphs






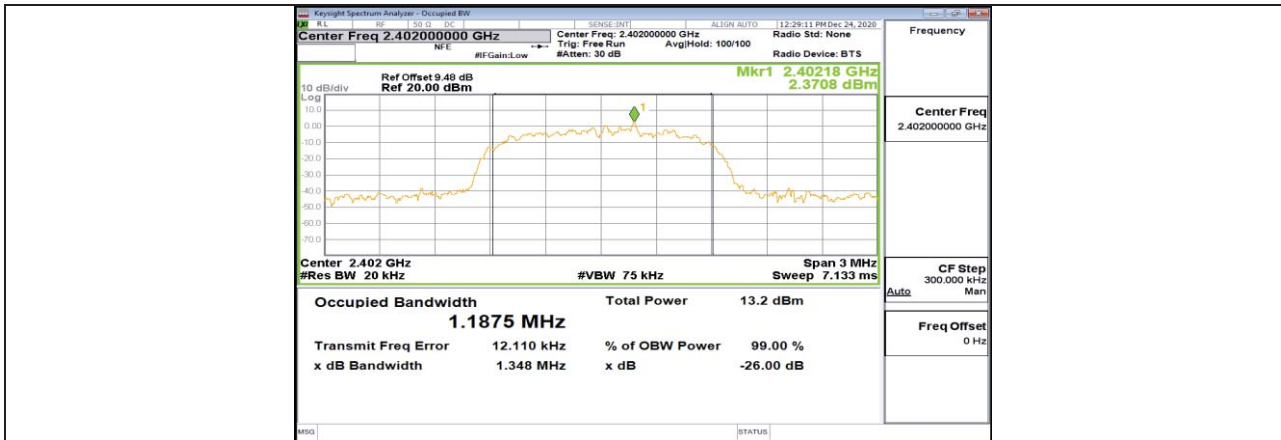

3DH5 Ant1 2402

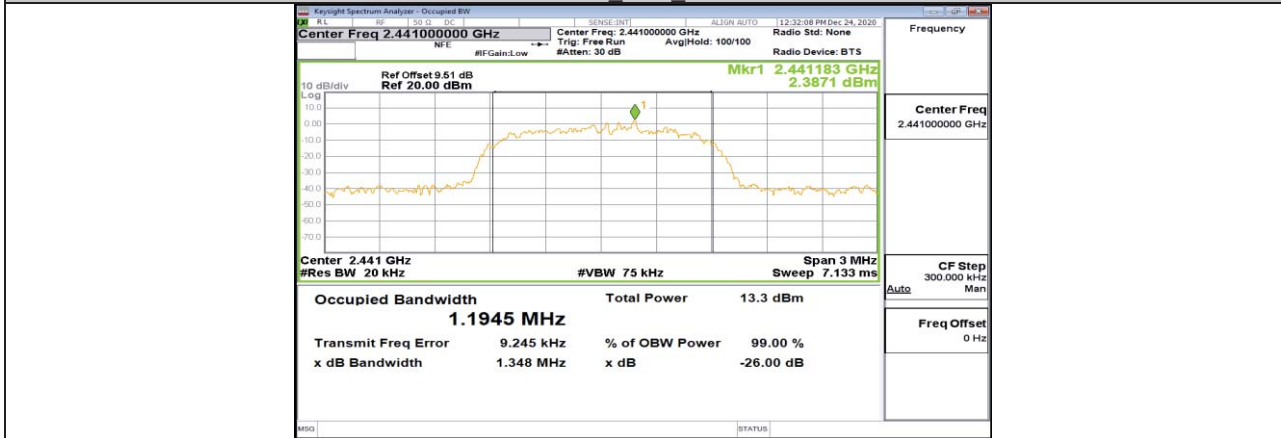

3DH5 Ant1 2441

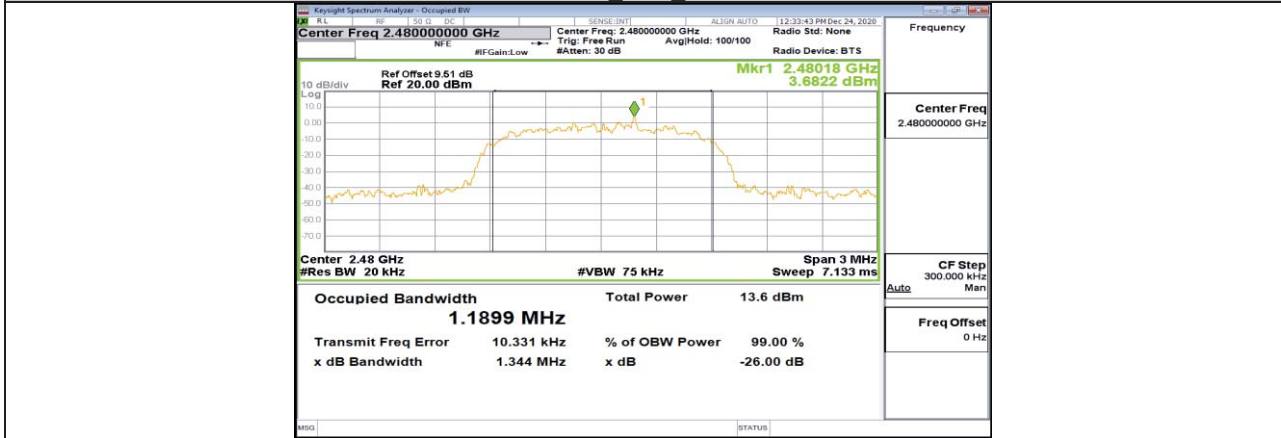

3DH5 Ant1 2480



**Appendix C: Maximum PEAK conducted output power  
Test Result**

Test Packet Type	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
DH5	Ant1	2402	6.75	<=30	PASS
		2441	6.99	<=30	PASS
		2480	7.21	<=30	PASS
3DH5	Ant1	2402	9.65	<=21	PASS
		2441	9.60	<=21	PASS
		2480	9.91	<=21	PASS



### Appendix D: Carrier frequency separation Test Result

Test Packet Type	Antenna	Channel	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	1.34	$\geq 0.942$	PASS
3DH5	Ant1	Hop	1.296	$\geq 0.886$	PASS



### Test Graphs




**Appendix E: Time of occupancy  
Test Result**

FHSS Mode						
Test Packet Type	Antenna	Channel	BurstWidth [ms]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.37	0.118	<=0.4	PASS
DH3	Ant1	Hop	1.63	0.261	<=0.4	PASS
DH5	Ant1	Hop	2.87	0.306	<=0.4	PASS
3DH1	Ant1	Hop	0.38	0.122	<=0.4	PASS
3DH3	Ant1	Hop	1.63	0.261	<=0.4	PASS
3DH5	Ant1	Hop	2.88	0.307	<=0.4	PASS


AFHSS Mode						
Test Packet Type	Antenna	Channel	BurstWidth [ms]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.37	0.059	<=0.4	PASS
DH3	Ant1	Hop	1.63	0.130	<=0.4	PASS
DH5	Ant1	Hop	2.87	0.153	<=0.4	PASS
3DH1	Ant1	Hop	0.38	0.061	<=0.4	PASS
3DH3	Ant1	Hop	1.63	0.130	<=0.4	PASS
3DH5	Ant1	Hop	2.88	0.154	<=0.4	PASS




### Test Graphs

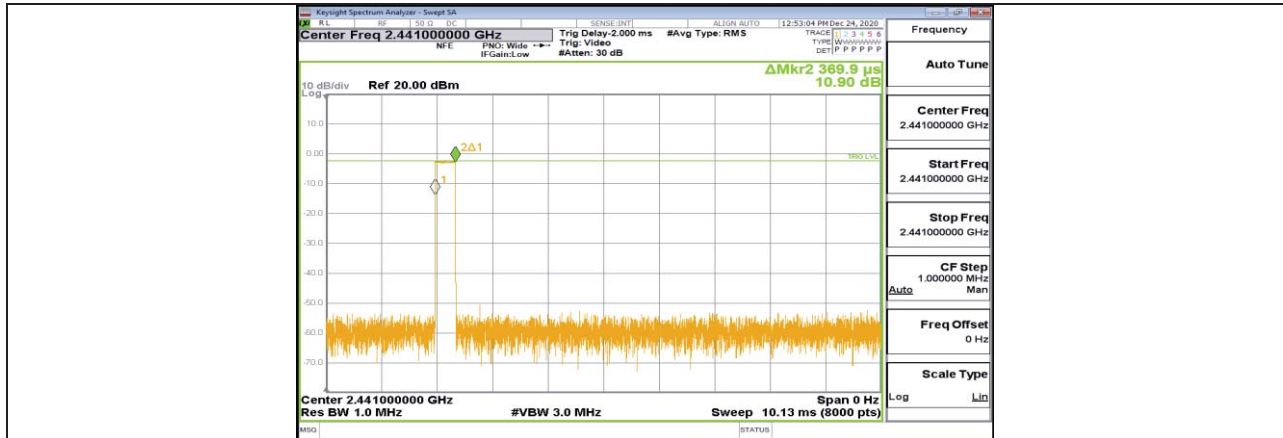

DH1 Ant1 Hop

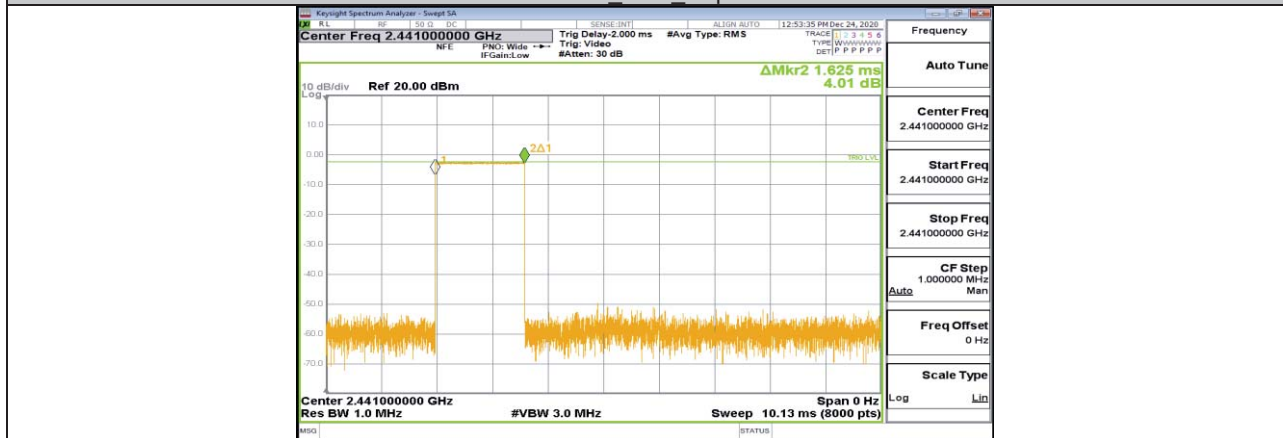

DH3 Ant1 Hop

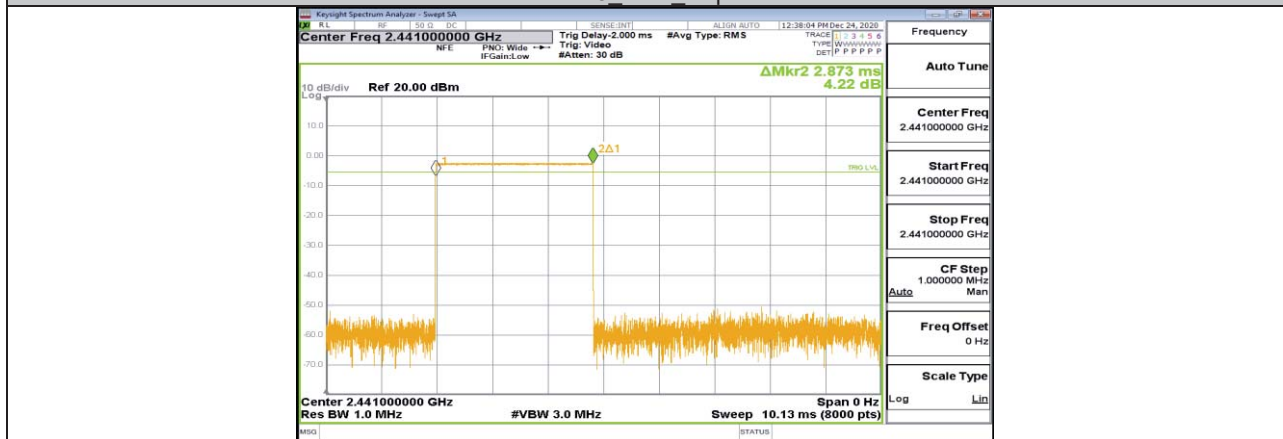

DH5 Ant1 Hop



3DH1 Ant1 Hop



3DH3 Ant1 Hop



3DH5 Ant1 Hop




### Appendix F: Number of hopping channels Test Result

Test Packet Type	Antenna	Channel	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	$\geq 15$	PASS
3DH5	Ant1	Hop	79	$\geq 15$	PASS





### Test Graphs

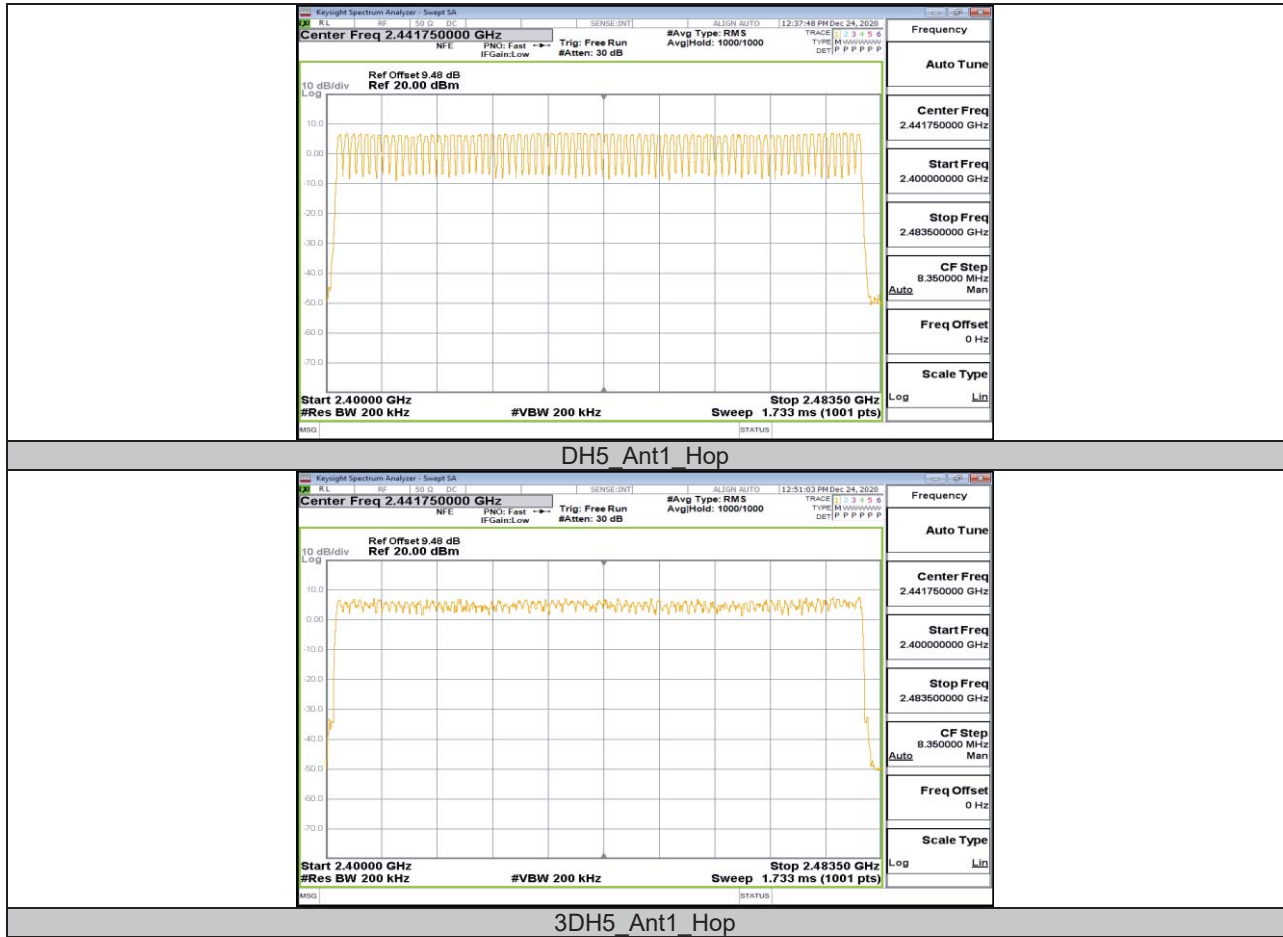




### Appendix G: Band edge measurements Test Result


Test Packet Type	Antenna	ChName	Channel	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	6.01	-50.31	<=-13.99	PASS
		High	2480	6.56	-50.43	<=-13.45	PASS
		Low	Hop_2402	5.85	-50.66	<=-14.15	PASS
		High	Hop_2480	6.30	-50.25	<=-13.71	PASS
3DH5	Ant1	Low	2402	7.01	-49.22	<=-12.99	PASS
		High	2480	6.43	-50.17	<=-13.57	PASS
		Low	Hop_2402	6.80	-51.18	<=-13.2	PASS
		High	Hop_2480	7.48	-50.1	<=-12.52	PASS




### Test Graphs

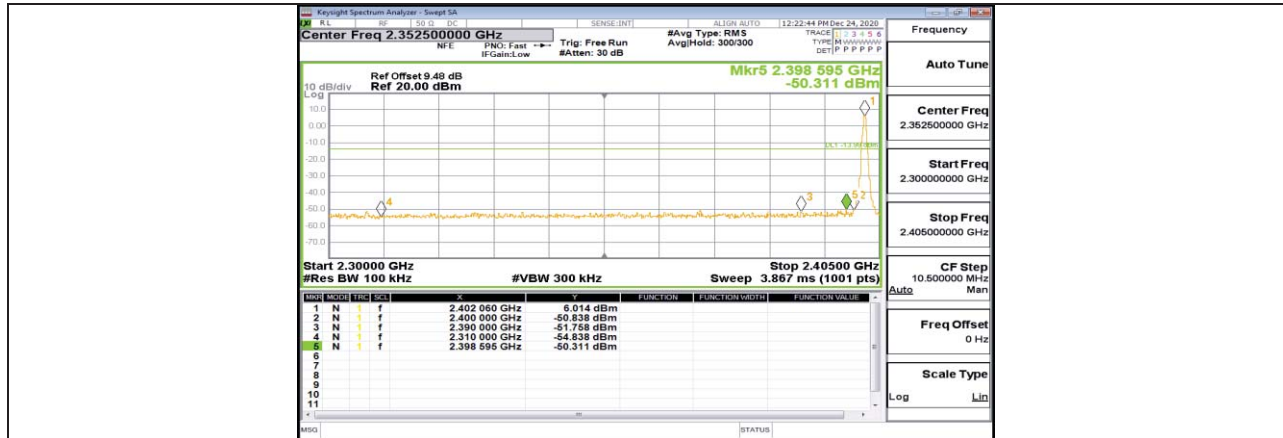


DH5 Ant1 Low 2402

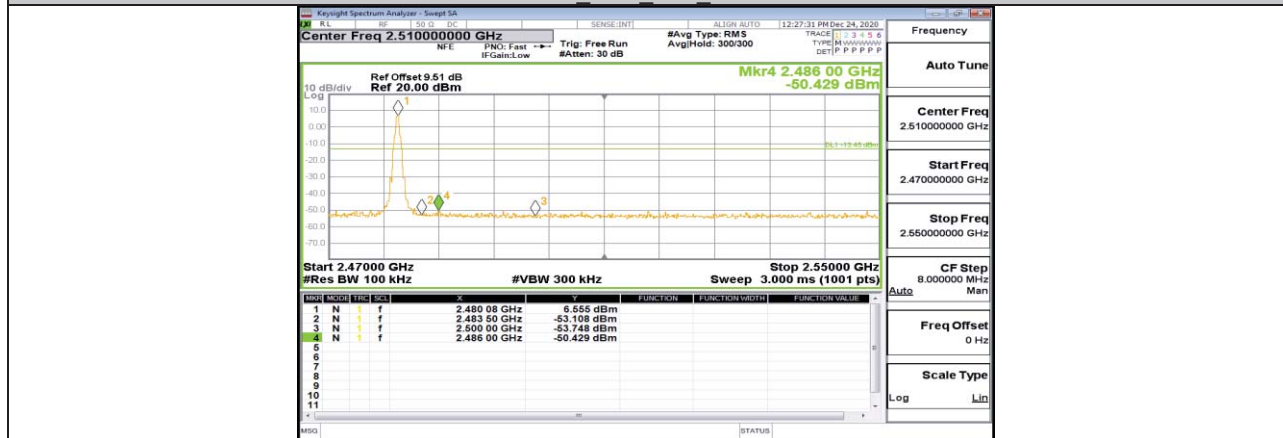

DH5 Ant1 High 2480

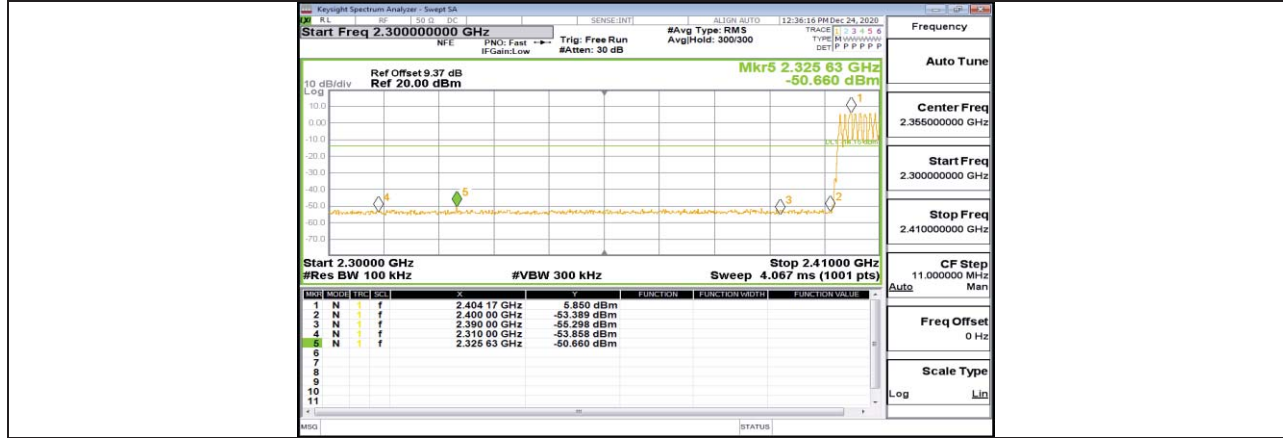


DH5 Ant1 Low Hop 2402

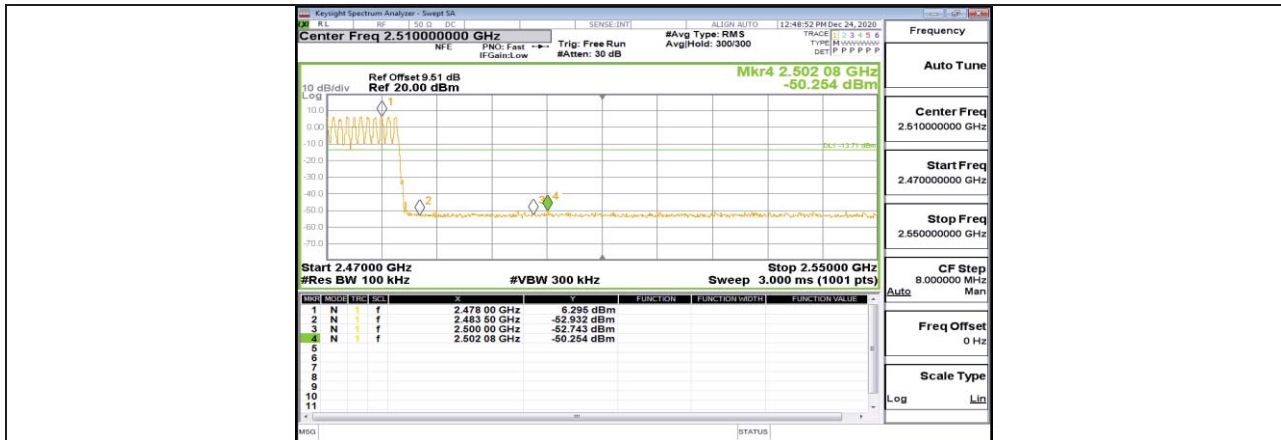


DH5 Ant1 High Hop 2480




3DH5 Ant1 Low 2402

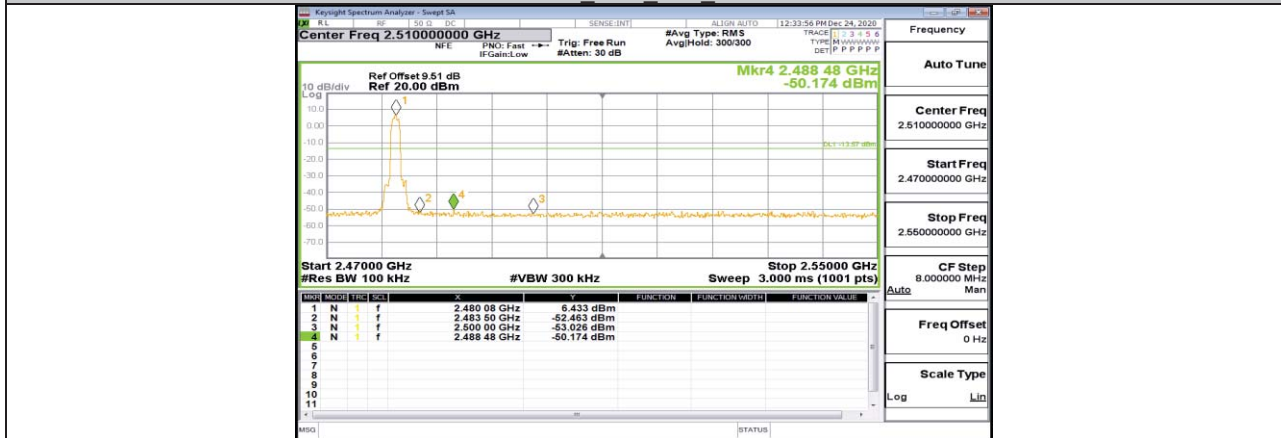

3DH5 Ant1 High 2480

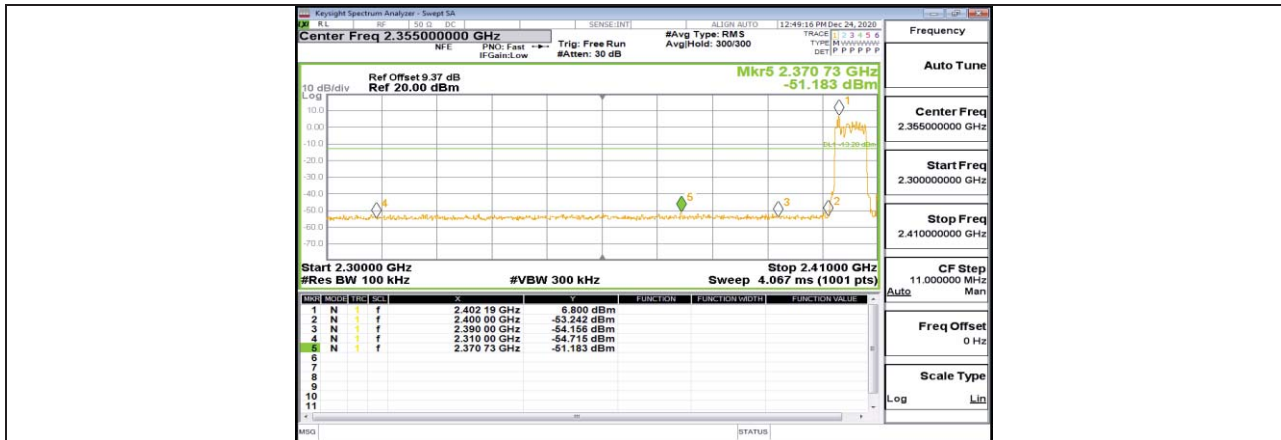

3DH5 Ant1 Low Hop 2402

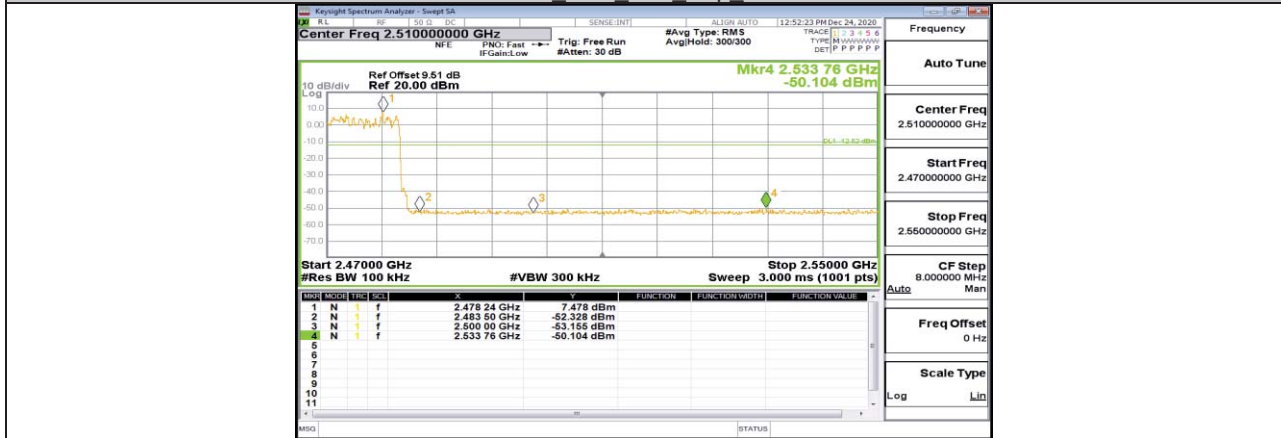


3DH5 Ant1 High Hop 2480

### Appendix H: Conducted Spurious Emission Test Result


Test Packet Type	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	Reference	6.04	6.04	---	PASS
			30~1000	---	-63.48	<=-13.96	PASS
			1000~26500	---	-41.77	<=-13.96	PASS
		2441	Reference	6.71	6.71	---	PASS
			30~1000	---	-63.13	<=-13.29	PASS
			1000~26500	---	-43.19	<=-13.29	PASS
		2480	Reference	6.97	6.97	---	PASS
			30~1000	---	-62.88	<=-13.03	PASS
			1000~26500	---	-42.63	<=-13.03	PASS
3DH5	Ant1	2402	Reference	5.74	5.74	---	PASS
			30~1000	---	-63.2	<=-14.27	PASS
			1000~26500	---	-45.66	<=-14.27	PASS
		2441	Reference	7.10	7.10	---	PASS
			30~1000	---	-63.28	<=-12.9	PASS
			1000~26500	---	-44.57	<=-12.9	PASS
		2480	Reference	7.50	7.50	---	PASS
			30~1000	---	-63.44	<=-12.5	PASS
			1000~26500	---	-46.37	<=-12.5	PASS

### Test Graphs




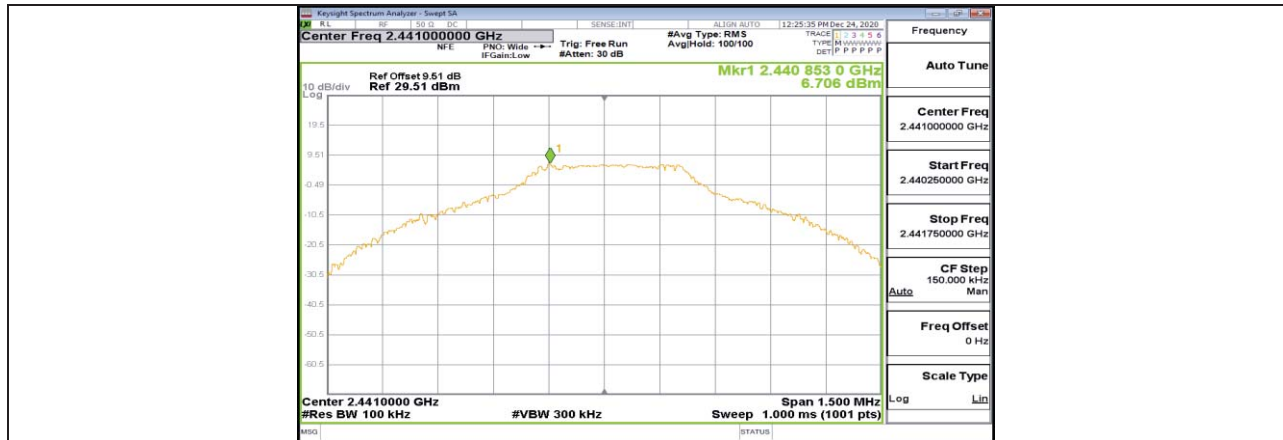

DH5 Ant1 2441 0~Reference

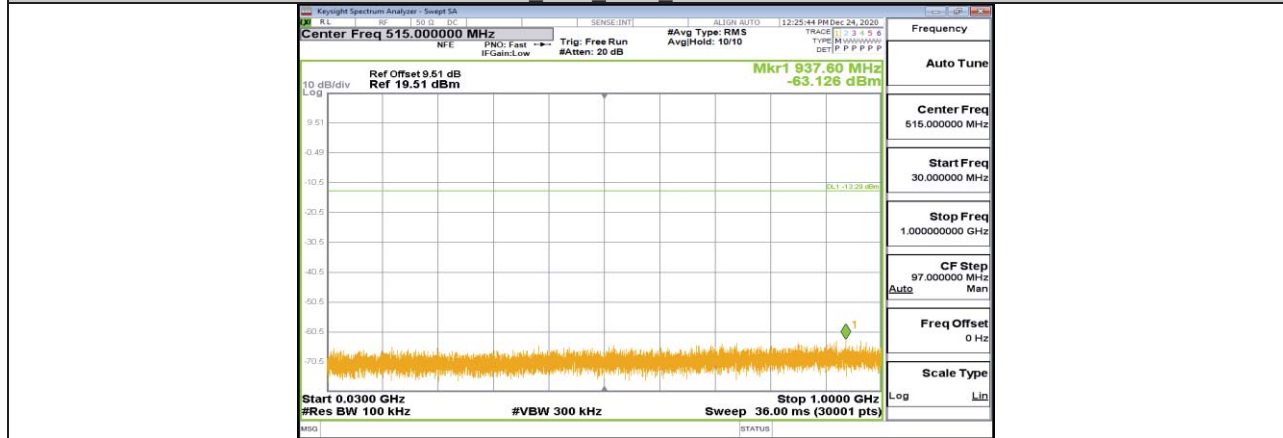

DH5 Ant1 2441 30~1000

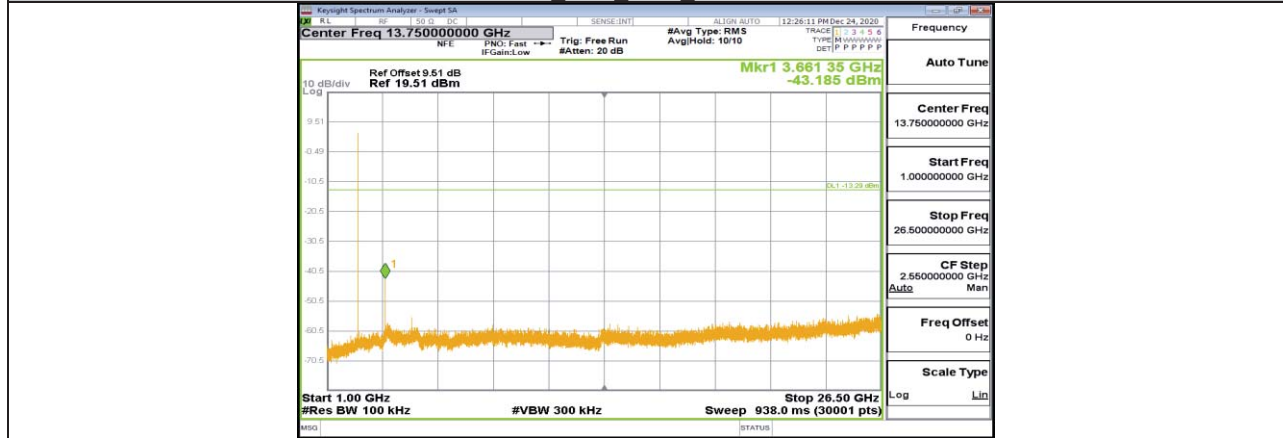


DH5 Ant1 2441 1000~26500






DH5 Ant1 2480 0~Reference

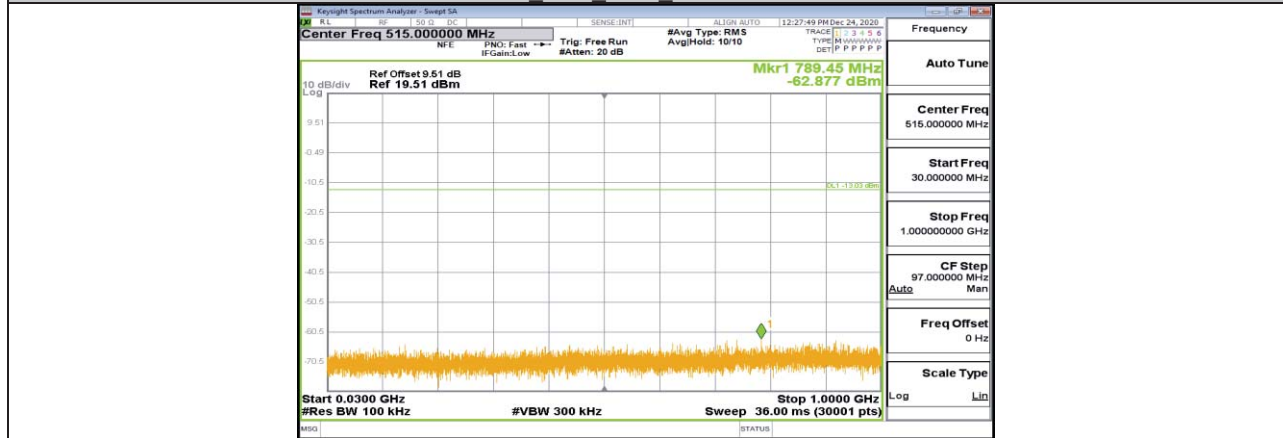


DH5 Ant1 2480 30~1000

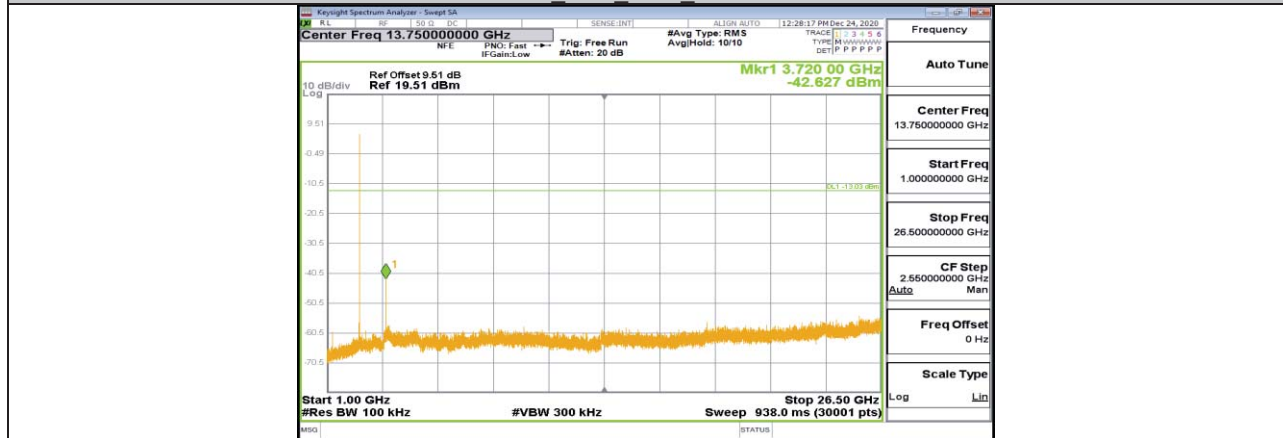


DH5 Ant1 2480 1000~26500



3DH5 Ant1 2402 0~Reference

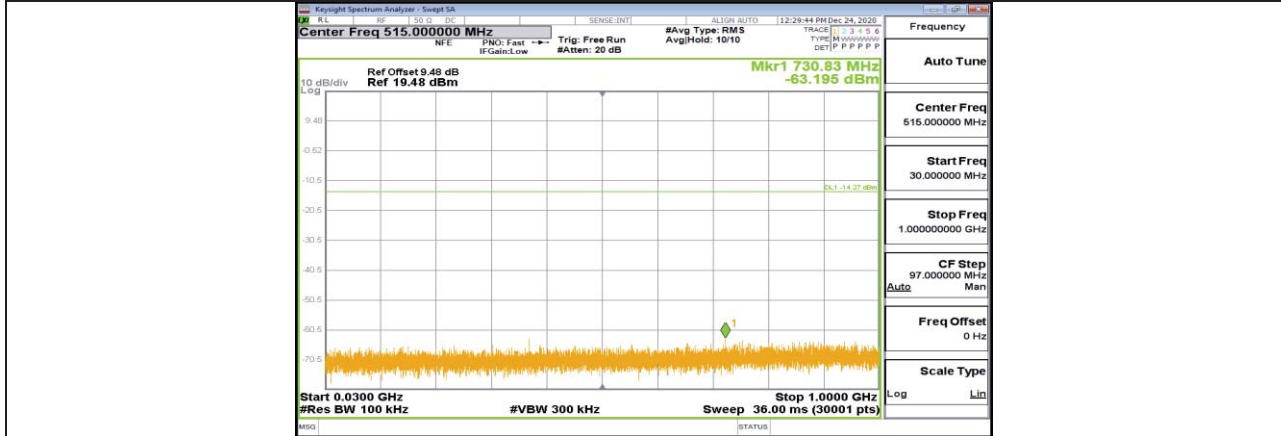


3DH5 Ant1 2402 30~1000

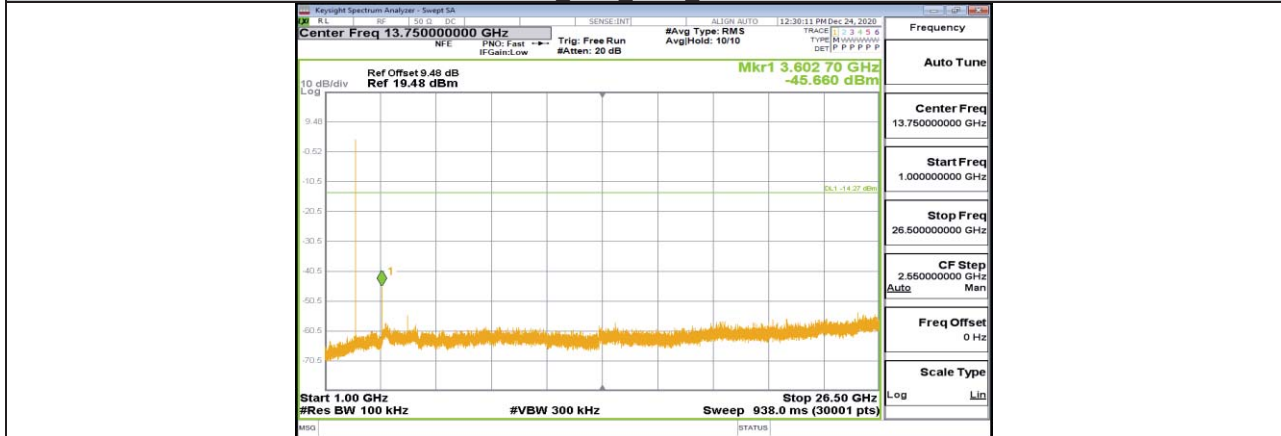


3DH5 Ant1 2402 1000~26500



3DH5 Ant1 2441 0~Reference

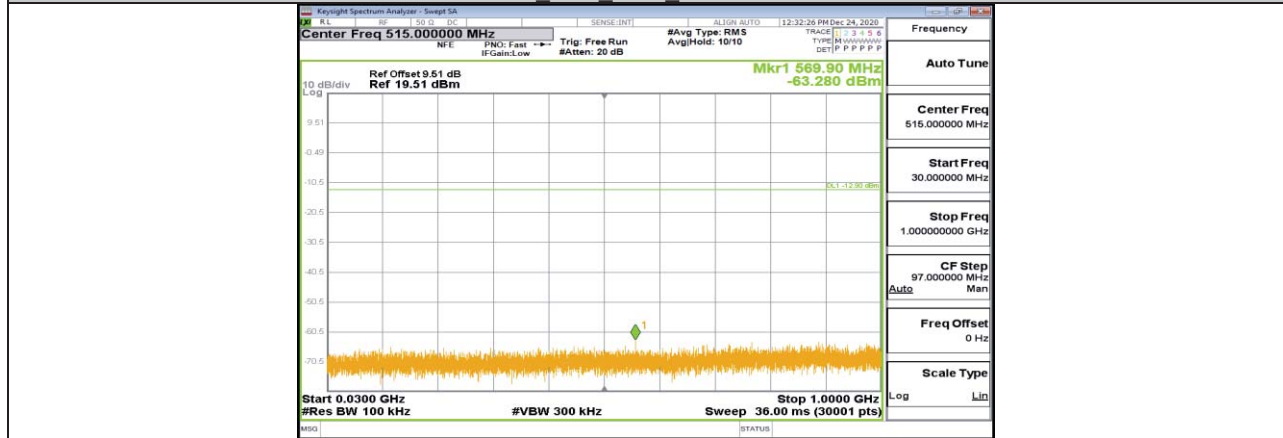


3DH5 Ant1 2441 30~1000

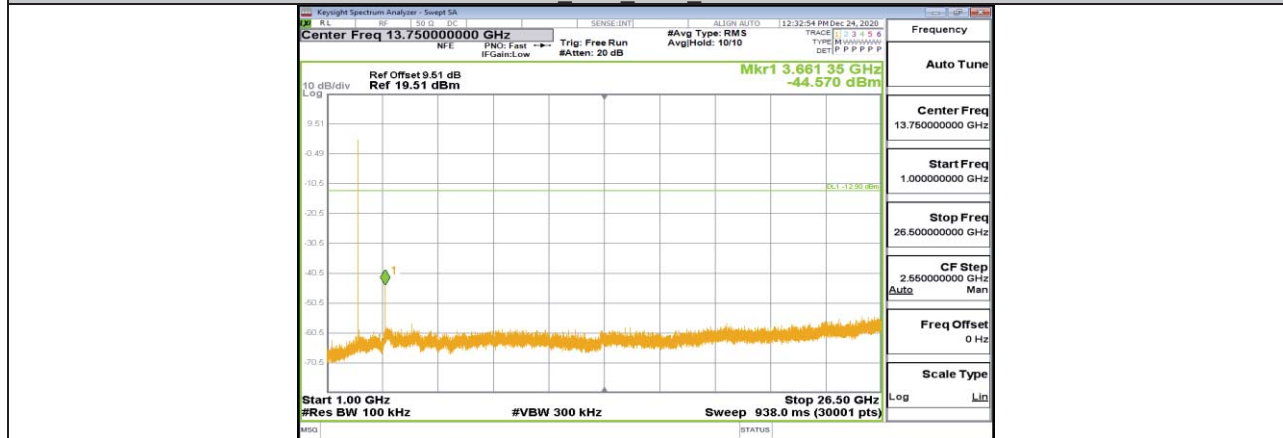


3DH5 Ant1 2441 1000~26500



3DH5 Ant1 2480 0~Reference

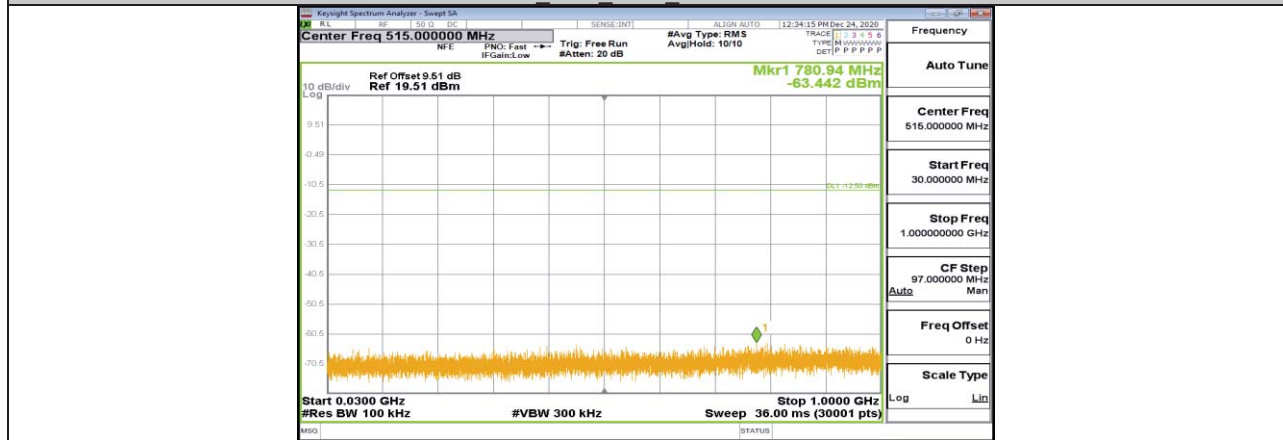

3DH5 Ant1 2480 30~1000

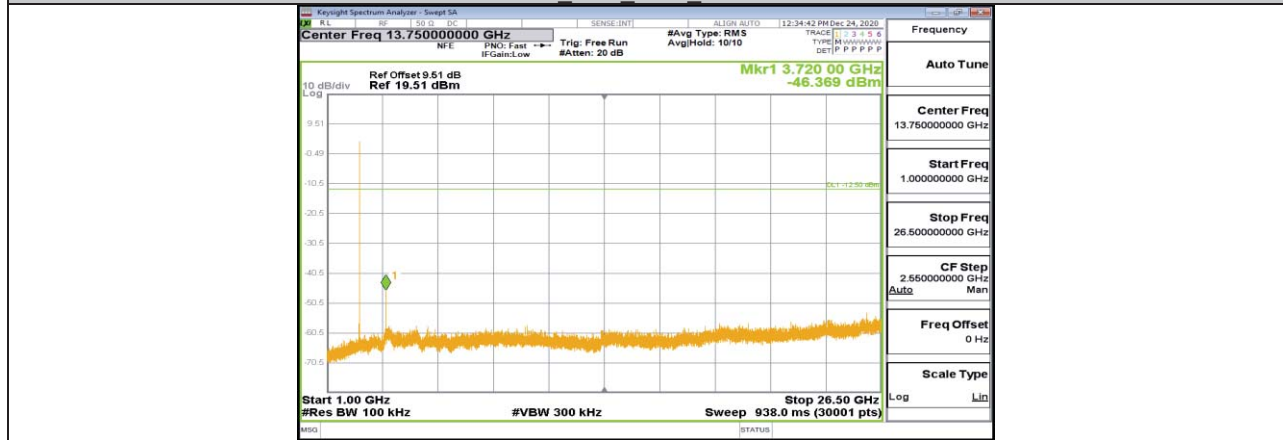

3DH5 Ant1 2480 1000~26500



## Appendix I: Duty Cycle Test Result

Test Packet Type	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
DH5	2.87	5.00	0.5740	57.40	2.41	0.35	0.5
3DH5	2.88	5.00	0.5760	57.60	2.40	0.35	0.5

Note:

Duty Cycle Correction Factor=10log (1/x).

Where: x is Duty Cycle (Linear)

Where: T is On Time

If that calculated VBW is not available on the analyzer then the next higher value should be used.

### Test Graphs



DH5 Ant1 2441



3DH5 Ant1 2441

**END OF REPORT**