






## FCC AND ISED CERTIFICATION TEST REPORT

<b>Applicant:</b>	Guangzhou Shikun Electronics Co., Ltd
<b>Address:</b>	NO.6 Liankun Road, Huangpu District, Guangzhou, China
<b>Manufacturer:</b>	Guangzhou Shikun Electronics Co., Ltd
<b>Address:</b>	NO.6 Liankun Road, Huangpu District, Guangzhou, China
<b>Product Description:</b>	IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2
<b>Brand Name:</b>	NA
<b>Tested Model:</b>	SKO.WB920TU.3
<b>FCC ID:</b>	2AR82-SKOWB920TU3
<b>IC:</b>	24728-SKOWB920TU3
<b>Report No.:</b>	JCF231017201-001
<b>Received Date:</b>	Oct. 17, 2023
<b>Tested Date:</b>	Oct. 17, 2023 ~ Nov. 07, 2023
<b>Issued Date:</b>	Nov. 07, 2023
<b>Test Standards:</b>	FCC Rules and Regulations Part 15 Subpart C, RSS-247 Issue 3 August 2023
<b>Test Procedure:</b>	ANSI C63.10:2013, RSS-Gen Issue 5 A2, Feb. 2021
<b>Test Result:</b>	Pass
<b>Prepared By:</b>	
 <u>Roger Li/Engineer</u>	
<b>Date:</b> Nov. 07, 2023 	
<b>Reviewed By:</b>	
 <u>Kennys Zhang/Engineer</u>	
<b>Date:</b> Nov. 07, 2023 	
<b>Approved By:</b>	
 <u>Talent Zhang/Engineer</u>	
<b>Date:</b> Nov. 07, 2023 	

Note: The test results in this report apply exclusively to the tested model / sample. Without written approval of Guangzhou Jingce Testing Technology Co., Ltd. the test report shall not be reproduced except in full.

**Report Revise Record**

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Nov. 07, 2023	Original Report	/

## Table of Contents

<b>1. Test Report Declare</b> .....	<b>5</b>
<b>2. Summary of Test Results</b> .....	<b>6</b>
<b>3. Test Laboratory</b> .....	<b>6</b>
<b>4. Equipment Under Test</b> .....	<b>7</b>
4.1. Description of EUT .....	7
4.2. Channel List .....	7
4.3. Packet Type Configuration .....	8
4.4. Test Channel Configuration .....	8
4.5. Test environment conditions .....	8
4.6. The Worse Case Power Setting Parameter .....	8
4.7. Description of Available Antennas .....	9
<b>5. Description of Test Setup</b> .....	<b>9</b>
5.1. Accessory .....	9
5.2. Support Equipment .....	9
5.3. Test Setup .....	9
5.4. Setup Diagram for Tests .....	9
<b>6. Measurement Uncertainty</b> .....	<b>10</b>
<b>7. Measuring Instrument and Software Used</b> .....	<b>10</b>
<b>8. On Time and Duty Cycle</b> .....	<b>12</b>
8.1. Block diagram of test setup .....	12
8.2. Limits .....	12
8.3. Results .....	12
8.4. Original test data .....	13
<b>9. 20 dB Occupied Bandwidth and 99 % Occupied Bandwidth</b> .....	<b>16</b>
9.1. Block diagram of test setup .....	16
9.2. Limit .....	16
9.3. Test Procedure .....	16
9.4. Results .....	16
9.5. Original test data .....	18
<b>10. Conducted Output Power</b> .....	<b>24</b>
10.1. Block diagram of test setup .....	24
10.2. Limits .....	24
10.3. Test Procedure .....	24
10.4. Results .....	24
10.5. Original test data .....	25
<b>11. Carrier Hopping Channel Separation</b> .....	<b>28</b>
11.1. Block diagram of test setup .....	28
11.2. Limits .....	28
11.3. Test Procedure .....	28
11.4. Results .....	28
11.5. Original test data .....	29
<b>12. Number of Hopping Frequency</b> .....	<b>30</b>
12.1. Block diagram of test setup .....	30
12.2. Limits .....	30
12.3. Test Procedure .....	30
12.4. Results .....	30
12.5. Original test data .....	31
<b>13. Time of Occupancy (Dwell Time)</b> .....	<b>32</b>
13.1. Block diagram of test setup .....	32
13.2. Limits .....	32
13.3. Test Procedure .....	32
13.4. Results .....	33

13.5. Original test data .....	34
<b>14. Conducted Spurious Emission .....</b>	<b>37</b>
14.1. Block diagram of test setup .....	37
14.2. Limits .....	37
14.3. Test Procedure .....	37
14.4. Results .....	38
14.5. Original test data .....	40
<b>15. Radiated Emission .....</b>	<b>50</b>
15.1. Block diagram of test setup .....	50
15.2. Limit .....	51
15.3. Test Procedure .....	53
15.4. Results .....	56
15.5. Original test data .....	56
<b>16. AC Power Line Conducted Emissions .....</b>	<b>57</b>
16.1. Block diagram of test setup .....	57
16.2. Limits .....	57
16.3. Test procedure .....	57
16.4. Test result .....	58
<b>17. Antenna Requirements .....</b>	<b>59</b>
17.1. Limits .....	59
17.2. Result .....	59
<b>APPENDIX A – Radiated Emission Below 1GHz Test Data .....</b>	<b>60</b>
<b>APPENDIX B – Radiated Emission Above 1GHz Test Data .....</b>	<b>62</b>

## 1. Test Report Declare

<b>Applicant:</b>	Guangzhou Shikun Electronics Co., Ltd
<b>Address:</b>	NO.6 Liankun Road, Huangpu District, Guangzhou, China
<b>Manufacturer:</b>	Guangzhou Shikun Electronics Co., Ltd
<b>Address:</b>	NO.6 Liankun Road, Huangpu District, Guangzhou, China
<b>Product Name:</b>	IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2
<b>Brand Name:</b>	NA
<b>Model Name:</b>	SKO.WB920TU.3
<b>Difference Description:</b>	NA

### We Declare:

The equipment described above is tested by Guangzhou Jingce Testing Technology Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained this test report and Guangzhou Jingce Testing Technology Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

## 2. Summary of Test Results

Summary of Test Results			
Clause	Test Items	FCC/ISED Rules	Test Result
1	20 dB Bandwidth and 99 % Occupied Bandwidth	FCC 15.247 (a) (1) RSS-247 Clause 5.1 (a) RSS-Gen Clause 6.7	Pass
2	Conducted Output Power	FCC 15.247 (b) (1) RSS-247 Clause 5.1 (b)	Pass
3	Carrier Hopping Channel Separation	FCC 15.247 (a) (1) RSS-247 Clause 5.1 (b)	Pass
4	Number of Hopping Frequency	15.247 (a) (1) III RSS-247 Clause 5.1 (d)	Pass
5	Time of Occupancy (Dwell Time)	15.247 (a) (1) III RSS-247 Clause 5.1 (d)	Pass
6	Conducted Band edge	FCC 15.247 (d) RSS-247 Clause 5.5	Pass
7	Radiated Band edge and Spurious	FCC 15.247 (d) FCC 15.209 FCC 15.205 RSS-247 Clause 5.5 RSS-GEN Clause 8.9 RSS-GEN Clause 8.10	Pass
8	Conducted Emission Test For AC Power Port	FCC 15.207 RSS-GEN Clause 8.8	NA
9	Antenna Requirement	FCC 15.203 RSS-GEN Clause 6.8	Pass

## 3. Test Laboratory

Guangzhou Jingce Testing Technology Co., Ltd.

Add.: No.192, Kezhu Road, Huangpu District, Guangzhou, Guangdong, China

Association for Laboratory Accreditation(A2LA). Certificate Number: 6594.01

FCC Designation Number: CN1331. Test Firm Registration Number: 360543

IC Test Firm Registration Number: 28796

Conformity Assessment Body identifier: CN0138

## 4. Equipment Under Test

### 4.1. Description of EUT

<b>EUT Name:</b>	IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2
<b>Model Number:</b>	SKO.WB920TU.3
<b>EUT Function Description:</b>	Please refer to user manual of this device
<b>Power Supply:</b>	DC 5V+/-0.3
<b>Hardware Version:</b>	NA
<b>Software Version:</b>	NA
<b>Radio Specification:</b>	Bluetooth V5.2
<b>Operation Frequency:</b>	2402 MHz - 2480 MHz
<b>Modulation:</b>	GFSK, $\pi/4$ -DQPSK, 8DPSK
<b>Data Rate:</b>	1Mbps, 2Mbps, 3Mbps
<b>Antenna Type:</b>	PCB Antenna, MAX. Gain: 1.81 dBi

Note 1: EUT is the ab. of equipment under test.

Note 2: The antenna gain is declared by the customer and the laboratory is not responsible for the accuracy of the antenna gain.

### 4.2. Channel List

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461	/	/

### 4.3. Packet Type Configuration

Test Mode	Packet Type	Setting(Packet Length)
GFSK	DH1	27
	DH3	183
	DH5	339
$\pi/4$ -DQPSK	2-DH1	54
	2-DH3	367
	2-DH5	679
8DPSK	3-DH1	83
	3-DH3	552
	3-DH5	1021

### 4.4. Test Channel Configuration

Tested mode, channel, information		
Mode	Channel	Frequency (MHz)
GFSK hopping on Tx mode	CH0 to CH78	2402 to 2480
$\pi/4$ -DQPSK hopping on Tx mode	CH0 to CH78	2402 to 2480
8DPSK hopping on Tx mode	CH0 to CH78	2402 to 2480
GFSK hopping off Tx mode	LCH: CH0	2402
	MCH: CH39	2441
	HCH: CH78	2480
$\pi/4$ -DQPSK hopping off Tx mode	LCH: CH0	2402
	MCH: CH39	2441
	HCH: CH78	2480
8DPSK hopping off Tx mode	LCH: CH0	2402
	MCH: CH39	2441
	HCH: CH78	2480

### 4.5. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	21-25 °C
Humidity range:	40-75%
Pressure range:	86-106 kPa

### 4.6. The Worst Case Power Setting Parameter

The Worst Case Power Setting Parameter under 2400 ~ 2483.5MHz Band				
Test Software		WCN_Combo_Tool		
Modulation Type	Transmit Antenna Number	Test Software Setting Value		
		CH 0	CH 39	CH 78
GFSK	1	Default	Default	Default
$\pi/4$ -DQPSK	1	Default	Default	Default
8DPSK	1	Default	Default	Default



#### 4.7. Description of Available Antennas

Test Mode	Transmit and Receive Mode	Description
GFSK	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.
$\pi/4$ -DQPSK	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.
8DPSK	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.

### 5. Description of Test Setup

#### 5.1. Accessory

Description of Accessories	Manufacturer	Model Number	Description	Remark
/	/	/	/	/

#### 5.2. Support Equipment

Equipment	Brand Name	Model Name	P/N
PC	Lenovo	T480	/

#### 5.3. Test Setup

The EUT can work in Fixed Frequency mode.

#### 5.4. Setup Diagram for Tests



## 6. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
AC Power Conduction emission	1.37 dB
All Radiated emissions	5.4dB
Conducted emissions	3.09 dB
Occupied Channel Bandwidth	1.1%
Conducted Output power	0.82dB
Power Spectral Density	0.82dB

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of  $k = 2$ .


## 7. Measuring Instrument and Software Used

TS Test System						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
<input checked="" type="checkbox"/>	Spectrum Analyzer	Keysight	N9030B	MY56320512	Sep. 12, 2023	Sep. 11, 2024
<input checked="" type="checkbox"/>	Vector Signal Generator	Keysight	N5182B	MY57300334	Sep. 12, 2023	Sep. 11, 2024
<input checked="" type="checkbox"/>	Signal Generator	Keysight	N5171B	MY57280639	Sep. 12, 2023	Sep. 11, 2024
<input checked="" type="checkbox"/>	DC POWER	Keysight	E342A	MY59020356	Jul. 14, 2023	Jul. 13, 2024
<input checked="" type="checkbox"/>	Incubator thermometer	GWS	EL-02JA	21107288	Sep. 12, 2023	Sep. 11, 2024
<input checked="" type="checkbox"/>	Control unit(Power sensor)	Tonscend	JS0806-2	/	Sep. 12, 2023	Sep. 11, 2024
<input checked="" type="checkbox"/>	Wideband radio communication tester	R&S	CMW500	163478	Jul. 11, 2023	Jul. 10, 2024
Software						
Used	Description	Manufacturer	Name		Version	
<input checked="" type="checkbox"/>	Test software	TS+	JS1120-3		V3.3.10	
RSE Test System						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
<input checked="" type="checkbox"/>	EMI Receiver	R&S	ESW	101685	Jul. 12, 2023	Jul. 11, 2024
<input checked="" type="checkbox"/>	Bilog Antenna	Schwarzbeck	VULB 9163	01416	Mar. 21, 2023	Mar. 20, 2024
<input checked="" type="checkbox"/>	Horn Antenna 1	Schwarzbeck	BBHA 9120 D	02411	May. 25, 2023	May. 24, 2024
<input checked="" type="checkbox"/>	Horn Antenna 2	ETS	BBHA 9170	1090	Sep. 04, 2023	Sep. 03, 2024
<input checked="" type="checkbox"/>	loop-antenna	Schwarzbeck	FMZB 1513-60	00030	Jan.14,2023	Jan.13,2024
<input checked="" type="checkbox"/>	Signal Pre-Amplifier	Tonscend	TAP01018050	AP21C806122	Jul. 10, 2023	Jul. 09, 2024
<input checked="" type="checkbox"/>	Signal Pre-	Tonscend	TAP9K3G32	AP20K806104	Jul. 10, 2023	Jul. 09, 2024

	Amplifier					
<input checked="" type="checkbox"/>	Signal Pre-Amplifier	ETS	3116C-PA	00217677	Aug. 24, 2023	Aug. 23, 2024
<input checked="" type="checkbox"/>	3m Fully-anechoic Chamber	ETS	RFD-100	/	Apr. 24, 2021	Apr. 23, 2024
<input checked="" type="checkbox"/>	Temperature & Humidity	Temperature	HTC-1	/	Nov. 25, 2022	Nov. 24, 2023
Software						
Used	Description	Manufacturer	Name		Version	
<input checked="" type="checkbox"/>	Test software	TS+	TS+		V3.0.0.4	

## 8. On Time and Duty Cycle

### 8.1. Block diagram of test setup

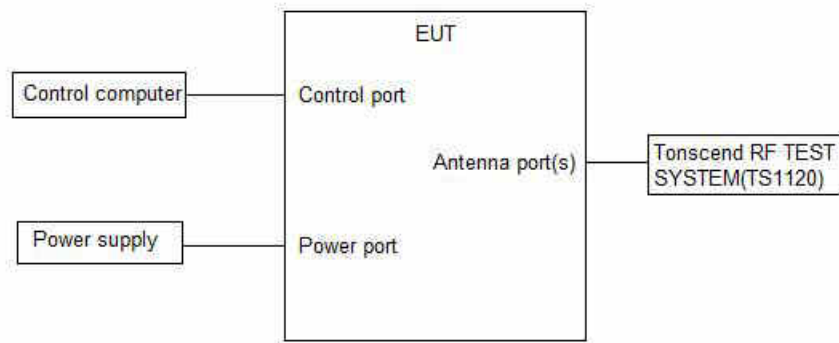

### 8.2. Limits

None; for reporting purposes only

### 8.3. Results

Test Mode	Ant.	Freq. (MHz)	ON Time (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Factor(dB)
DH5	Ant1	2402	2.88	3.75	76.80	1.15
		2441	2.88	3.75	76.80	1.15
		2480	2.88	3.75	76.80	1.15
2DH5	Ant1	2402	2.89	3.75	77.07	1.13
		2441	2.89	3.76	76.86	1.14
		2480	2.88	3.75	76.80	1.15
3DH5	Ant1	2402	2.89	3.75	77.07	1.13
		2441	2.88	3.75	76.80	1.15
		2480	2.89	3.75	77.07	1.13

Note: Duty Cycle Correction Factor= $10\log(1/x)$ .

Where: x is Duty Cycle (Linear)

Where: T is On Time

If that calculated VBW is not available on the analyzer then the next higher value should be used.

### 8.4. Original test data





2DH5\_Ant1\_2441



2DH5\_Ant1\_2480



3DH5\_Ant1\_2402



3DH5\_Ant1\_2441



3DH5\_Ant1\_2480



## 9. 20 dB Occupied Bandwidth and 99 % Occupied Bandwidth

### 9.1. Block diagram of test setup

Same as section 8.1

### 9.2. Limit

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 3			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247 (a) (1) RSS-247 Clause 5.1 (a)	20 dB Occupied Bandwidth	N/A	2400-2483.5
ISED RSS-Gen Clause 6.7	99 % Occupied Bandwidth	N/A	2400-2483.5

### 9.3. Test Procedure

Connect the UUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	For 20 dB Occupied Bandwidth: 1 % to 5 % of the 20 dB bandwidth For 99 % Occupied Bandwidth: 1 % to 5 % of the occupied bandwidth
VBW	For 20 dB Occupied Bandwidth: approximately 3×RBW For 99 % Occupied Bandwidth: ≥ 3×RBW
Span	approximately 2 to 3 times the 20 dB bandwidth
Trace	Max hold
Sweep	Auto couple

Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB and 99 % relative to the maximum level measured in the fundamental emission.

### 9.4. Results

20 dB Occupied Bandwidth:

Test Mode	Ant.	Freq. (MHz)	20db EBW (MHz)	FL (MHz)	FH (MHz)
DH5	Ant1	2402	0.804	2401.616	2402.420
		2441	0.879	2440.550	2441.429
		2480	0.801	2479.613	2480.414
2DH5	Ant1	2402	1.341	2401.337	2402.678
		2441	1.293	2440.355	2441.648
		2480	1.341	2479.343	2480.684
3DH5	Ant1	2402	1.284	2401.370	2402.654
		2441	1.314	2440.346	2441.660
		2480	1.347	2479.337	2480.684




## 99 % Occupied Bandwidth

Test Mode	Ant.	Freq. (MHz)	OCB (MHz)	FL (MHz)	FH (MHz)
DH5	Ant1	2402	0.76817	2401.6300	2402.3982
		2441	0.74121	2440.6333	2441.3745
		2480	0.75475	2479.6349	2480.3897
2DH5	Ant1	2402	1.2003	2401.4065	2402.6068
		2441	1.2046	2440.4065	2441.6111
		2480	1.1826	2479.4100	2480.5926
3DH5	Ant1	2402	1.1942	2401.4165	2402.6107
		2441	1.1923	2440.4038	2441.5961
		2480	1.1738	2479.4273	2480.6011

### 9.5. Original test data

20 dB Occupied Bandwidth:

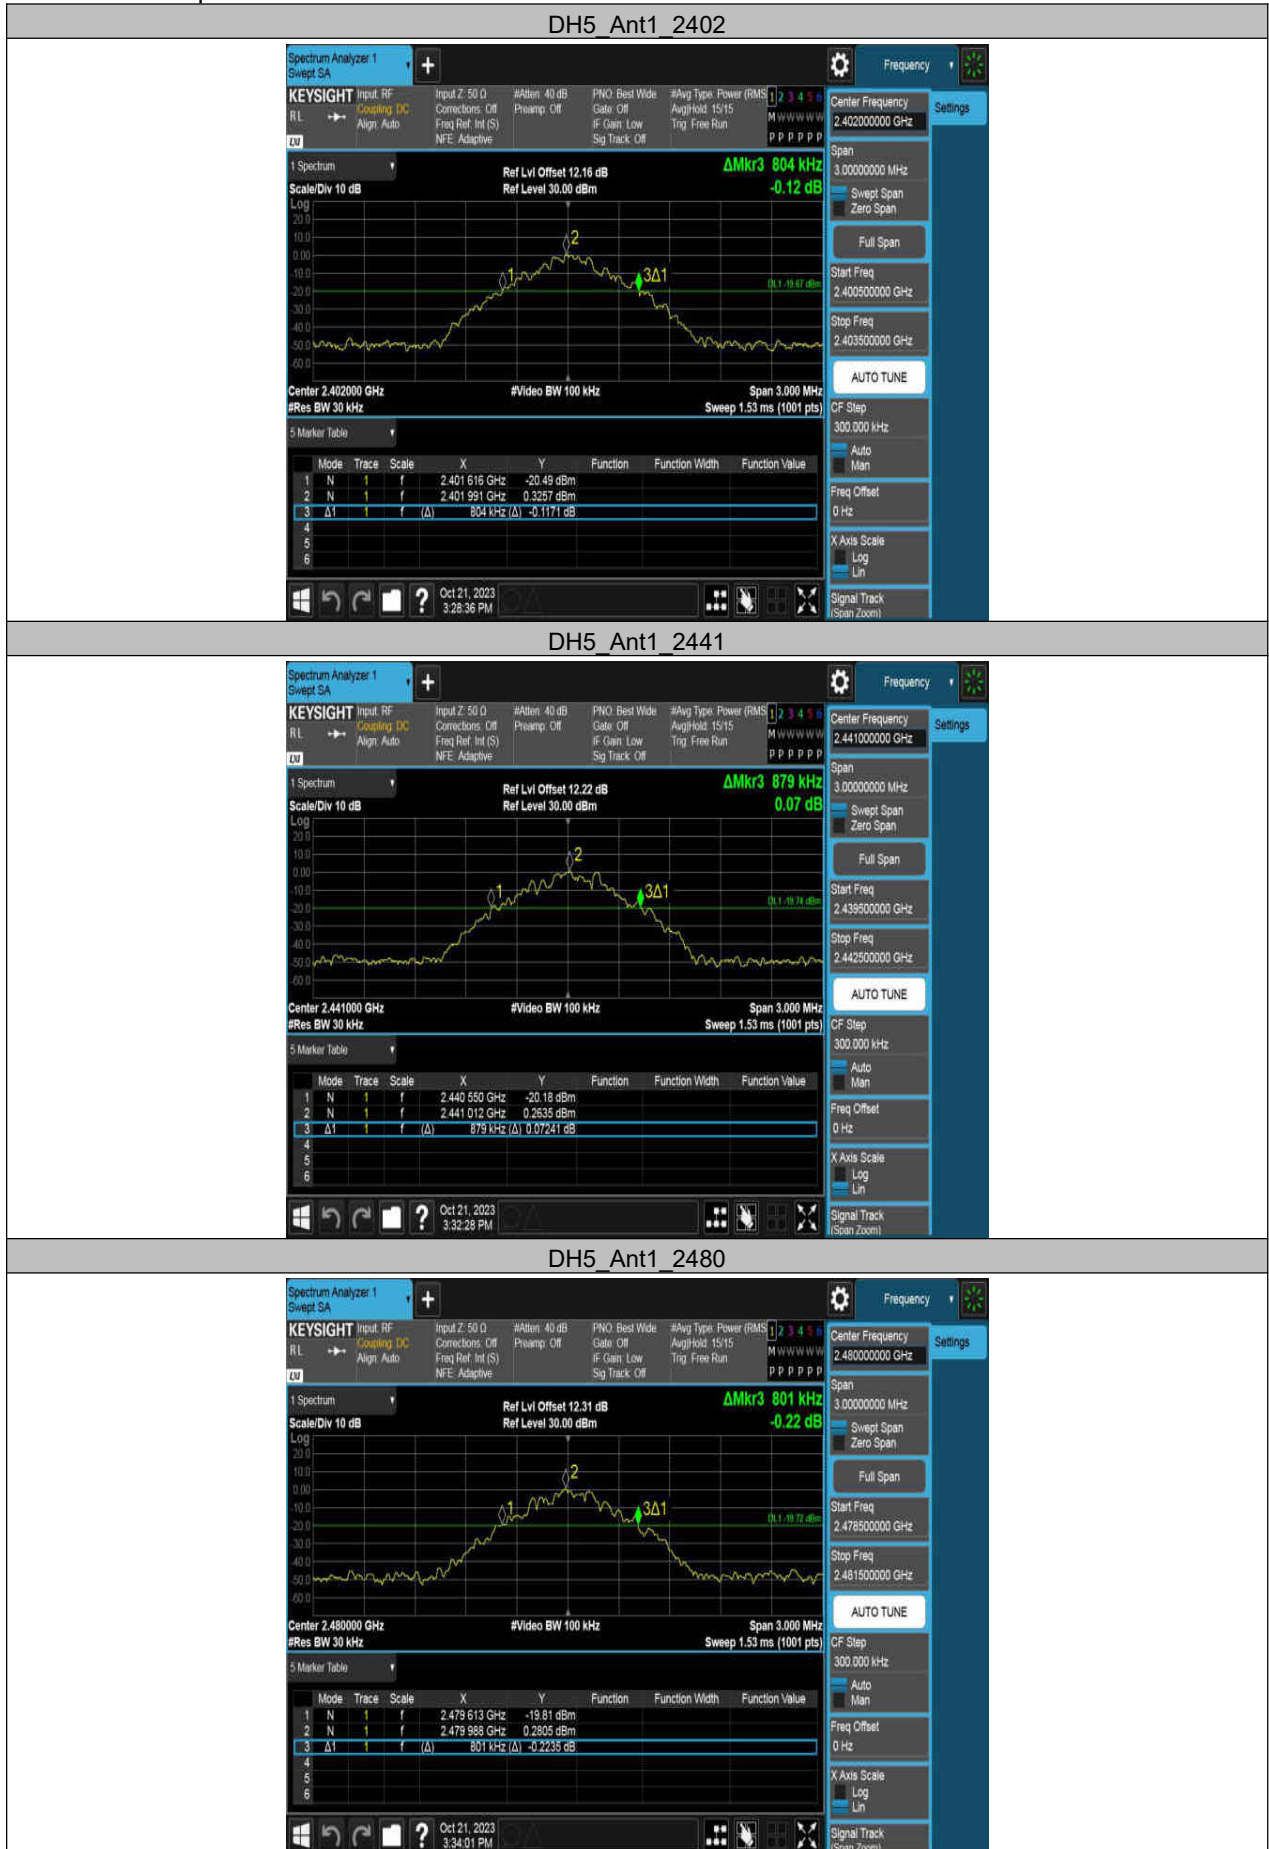

2DH5\_Ant1\_2402



2DH5\_Ant1\_2441



2DH5\_Ant1\_2480



3DH5\_Ant1\_2402




99 % Occupied bandwidth:



2DH5\_Ant1\_2402



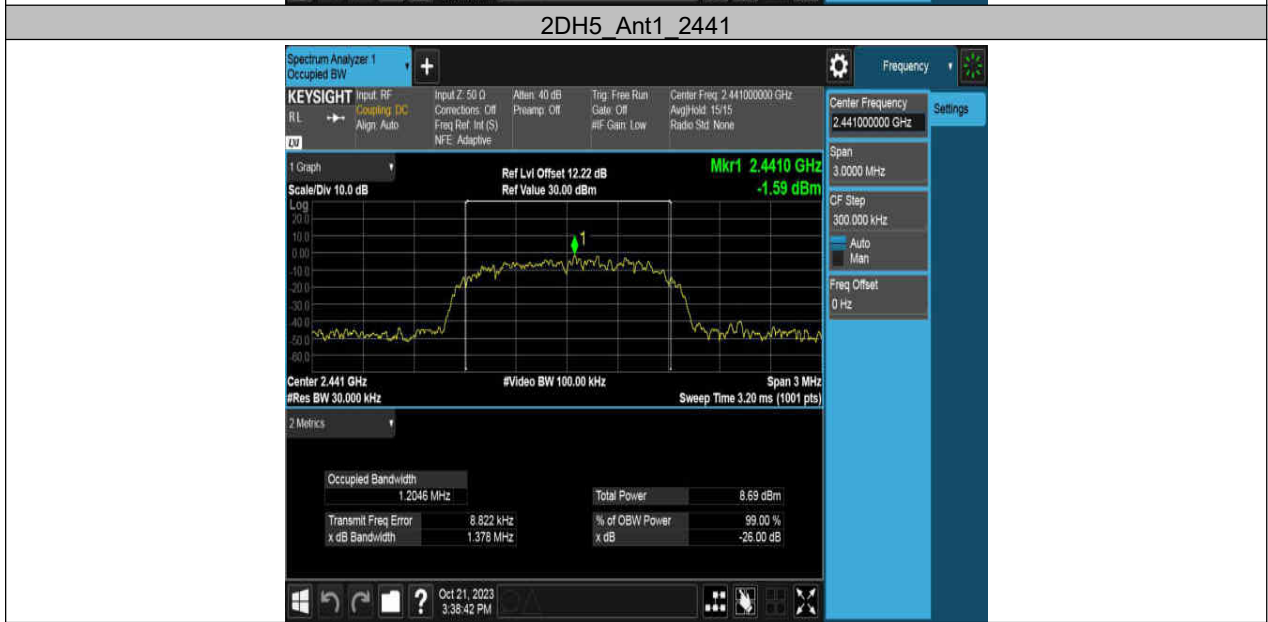



3DH5\_Ant1\_2441



3DH5\_Ant1\_2480



## 10. Conducted Output Power

### 10.1. Block diagram of test setup

Same as section 8.1

### 10.2. Limits

CFR 47 FCC Part15 (15.247) , Subpart C ISED RSS-247 ISSUE 3			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247 (b) (1) ISED RSS-247 Clause 5.4 (b)	Peak Conducted Output Power	Hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel: 1 watt or 30dBm; Hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel : 125 mW or 21dBm	2400-2483.5

### 10.3. Test Procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Measure the maximum output power of EUT by spectrum analyzer with PK detector and RBW=3 MHz (above 20 dB bandwidth of measured signal), VBW=8 MHz


Note: The attenuator loss was inputted into spectrum analyzer as amplitude offset.

### 10.4. Results

Test Mode	Ant.	Freq. (MHz)	Conducted Peak Power (dBm)	Conducted Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)	Verdict
DH5	Ant1	2402	4.56	≤20.97	6.37	36	PASS
		2441	4.63	≤20.97	6.44	36	PASS
		2480	4.58	≤20.97	6.39	36	PASS
2DH5	Ant1	2402	6.79	≤20.97	8.6	36	PASS
		2441	6.84	≤20.97	8.65	36	PASS
		2480	6.87	≤20.97	8.68	36	PASS
3DH5	Ant1	2402	7.08	≤20.97	8.89	36	PASS
		2441	7.38	≤20.97	9.19	36	PASS
		2480	7.27	≤20.97	9.08	36	PASS



### 10.5. Original test data

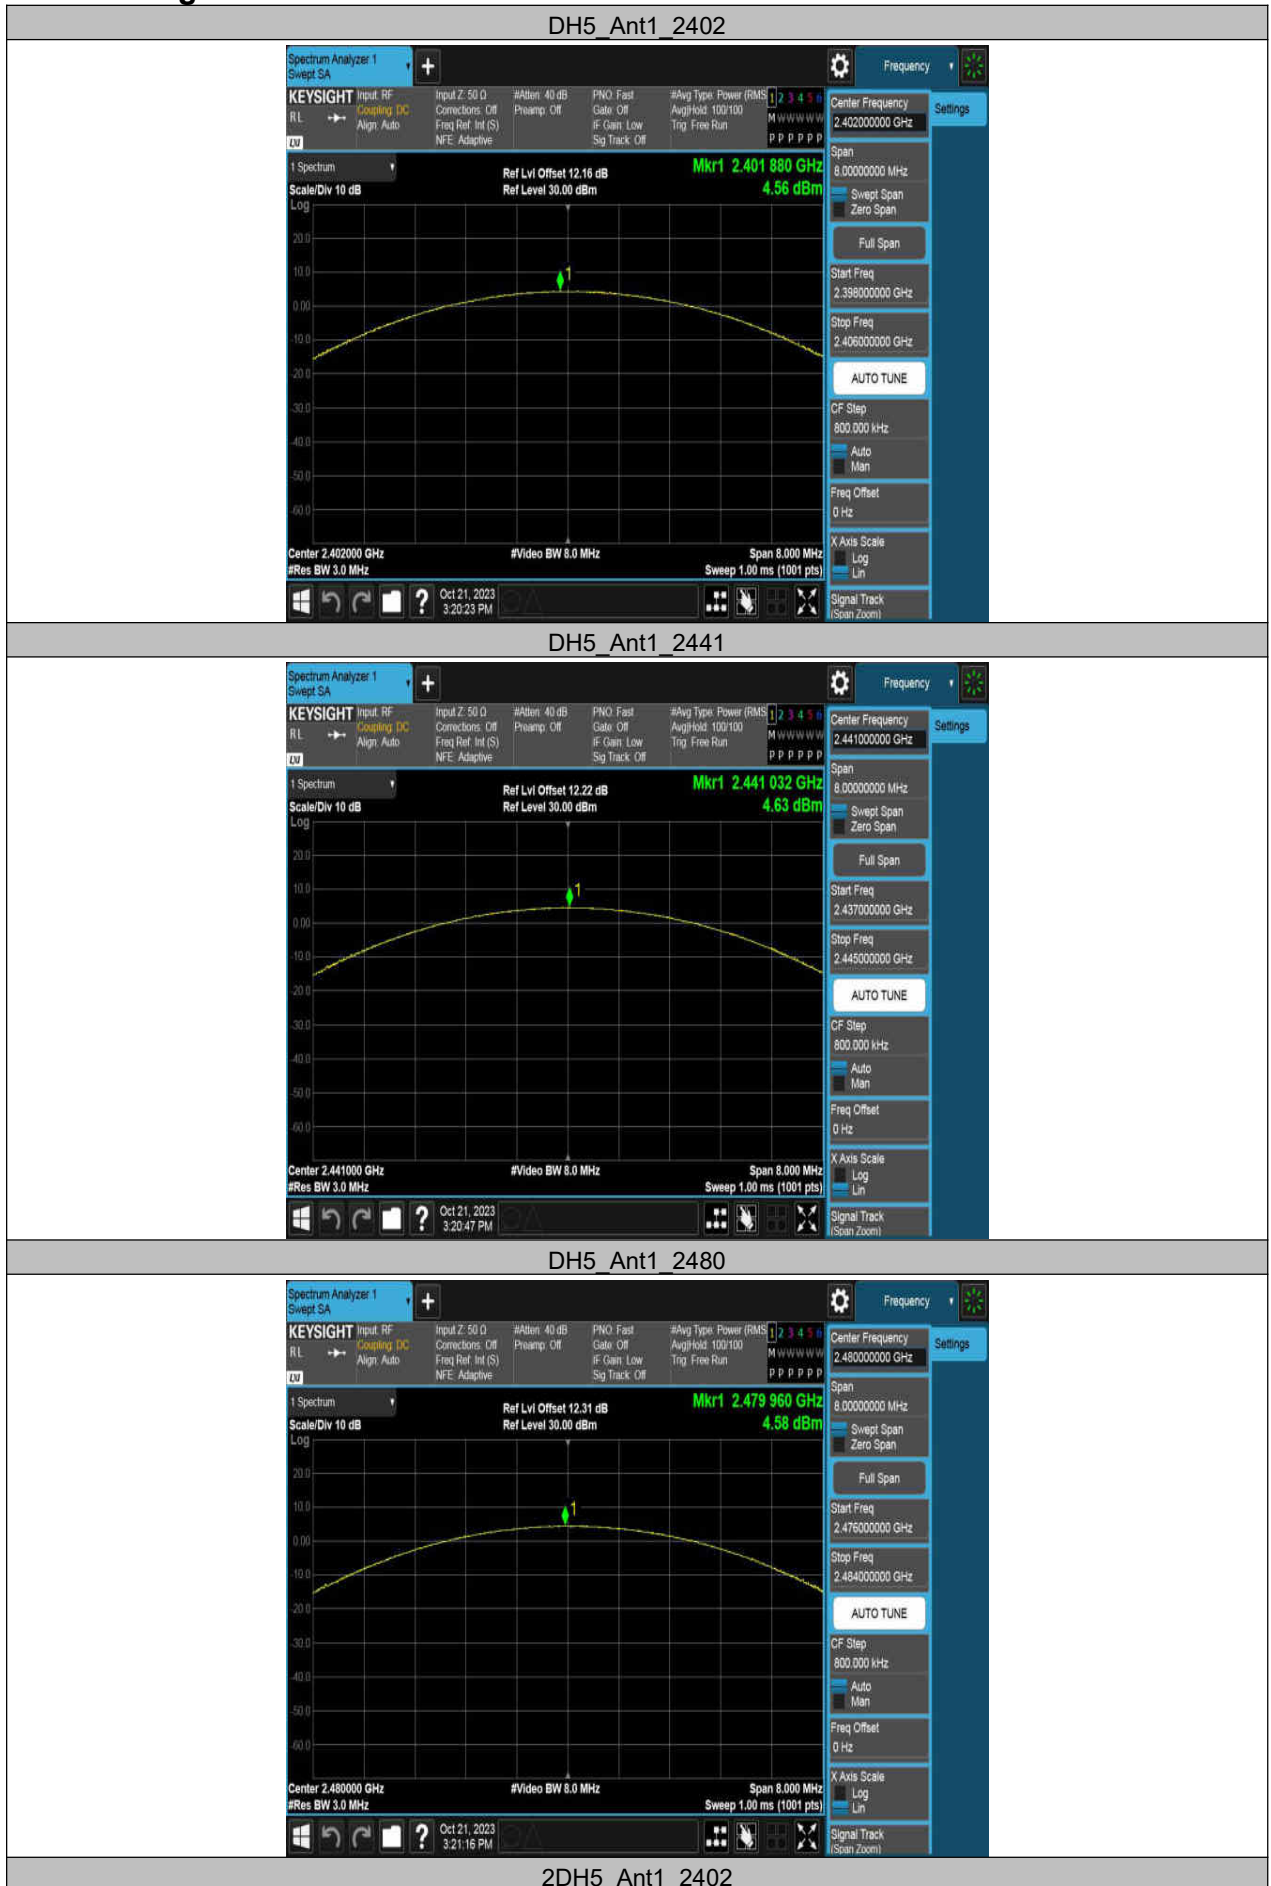



2DH5\_Ant1\_2441



2DH5\_Ant1\_2480



3DH5\_Ant1\_2402



3DH5\_Ant1\_2441



3DH5\_Ant1\_2480



## 11. Carrier Hopping Channel Separation

### 11.1. Block diagram of test setup

Same as section 8.1

### 11.2. Limits

CFR 47 FCC Part15 (15.247) , Subpart C ISED RSS-247 ISSUE 3			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247 (a) (1) ISED RSS-247 Clause 5.1 (b)	Carrier Hopping Channel Separation	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.  Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel.	2400-2483.5

### 11.3. Test Procedure

Connect the UUT to the spectrum Analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Span	wide enough to capture the peaks of two adjacent channels
Detector	Peak
RBW	Start with the RBW set to approximately 30 % of the channel spacing; adjust as necessary to best identify the center of each individual channel.
VBW	$\geq$ RBW
Trace	Max hold
Sweep time	Auto couple

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

Compliance of an EUT with the appropriate regulatory limit shall be determined.

A plot of the data shall be included in the test report.

### 11.4. Results

Test Mode	Ant.	Freq. (MHz)	Result (MHz)	Limit (MHz)	Verdict
DH5	Ant1	Hop	0.97	$\geq 0.879$	PASS
2DH5	Ant1	Hop	1.274	$\geq 0.894$	PASS
3DH5	Ant1	Hop	1.012	$\geq 0.898$	PASS

### 11.5. Original test data



## 12. Number of Hopping Frequency

### 12.1. Block diagram of test setup

Same as section 8.1

### 12.2. Limits

CFR 47 FCC Part15 (15.247), Subpart C ISED RSS-247 ISSUE 3		
Section	Test Item	Limit
CFR 47 15.247 (a) (1) III ISED RSS-247 Clause 5.1 (d)	Number of Hopping Frequency	at least 15 hopping channels

### 12.3. Test Procedure

Connect the EUT to the spectrum Analyzer and use the following settings:

Detector	Peak
RBW	To identify clearly the individual channels, set the RBW to less than 30 % of the channel spacing or the 20 dB bandwidth, whichever is smaller.
VBW	$\geq$ RBW
Span	The frequency band of operation
Trace	Max hold
Sweep time	Auto couple

Set EUT to transmit maximum output power and switch on frequency hopping function. then set enough count time (larger than 5000 times) to get all the hopping frequency channel displayed on the screen of spectrum analyzer.

Count the quantity of peaks to get the number of hopping channels.

FHSS Mode: 79 Channels observed.


AFHSS Mode: 20 Channels declared.

### 12.4. Results

Test Mode	Ant.	Freq. (MHz)	Result (Num)	Limit (Num)	Verdict
DH5	Ant1	Hop	79	$\geq$ 15	PASS
2DH5	Ant1	Hop	79	$\geq$ 15	PASS
3DH5	Ant1	Hop	79	$\geq$ 15	PASS



### 12.5. Original test data

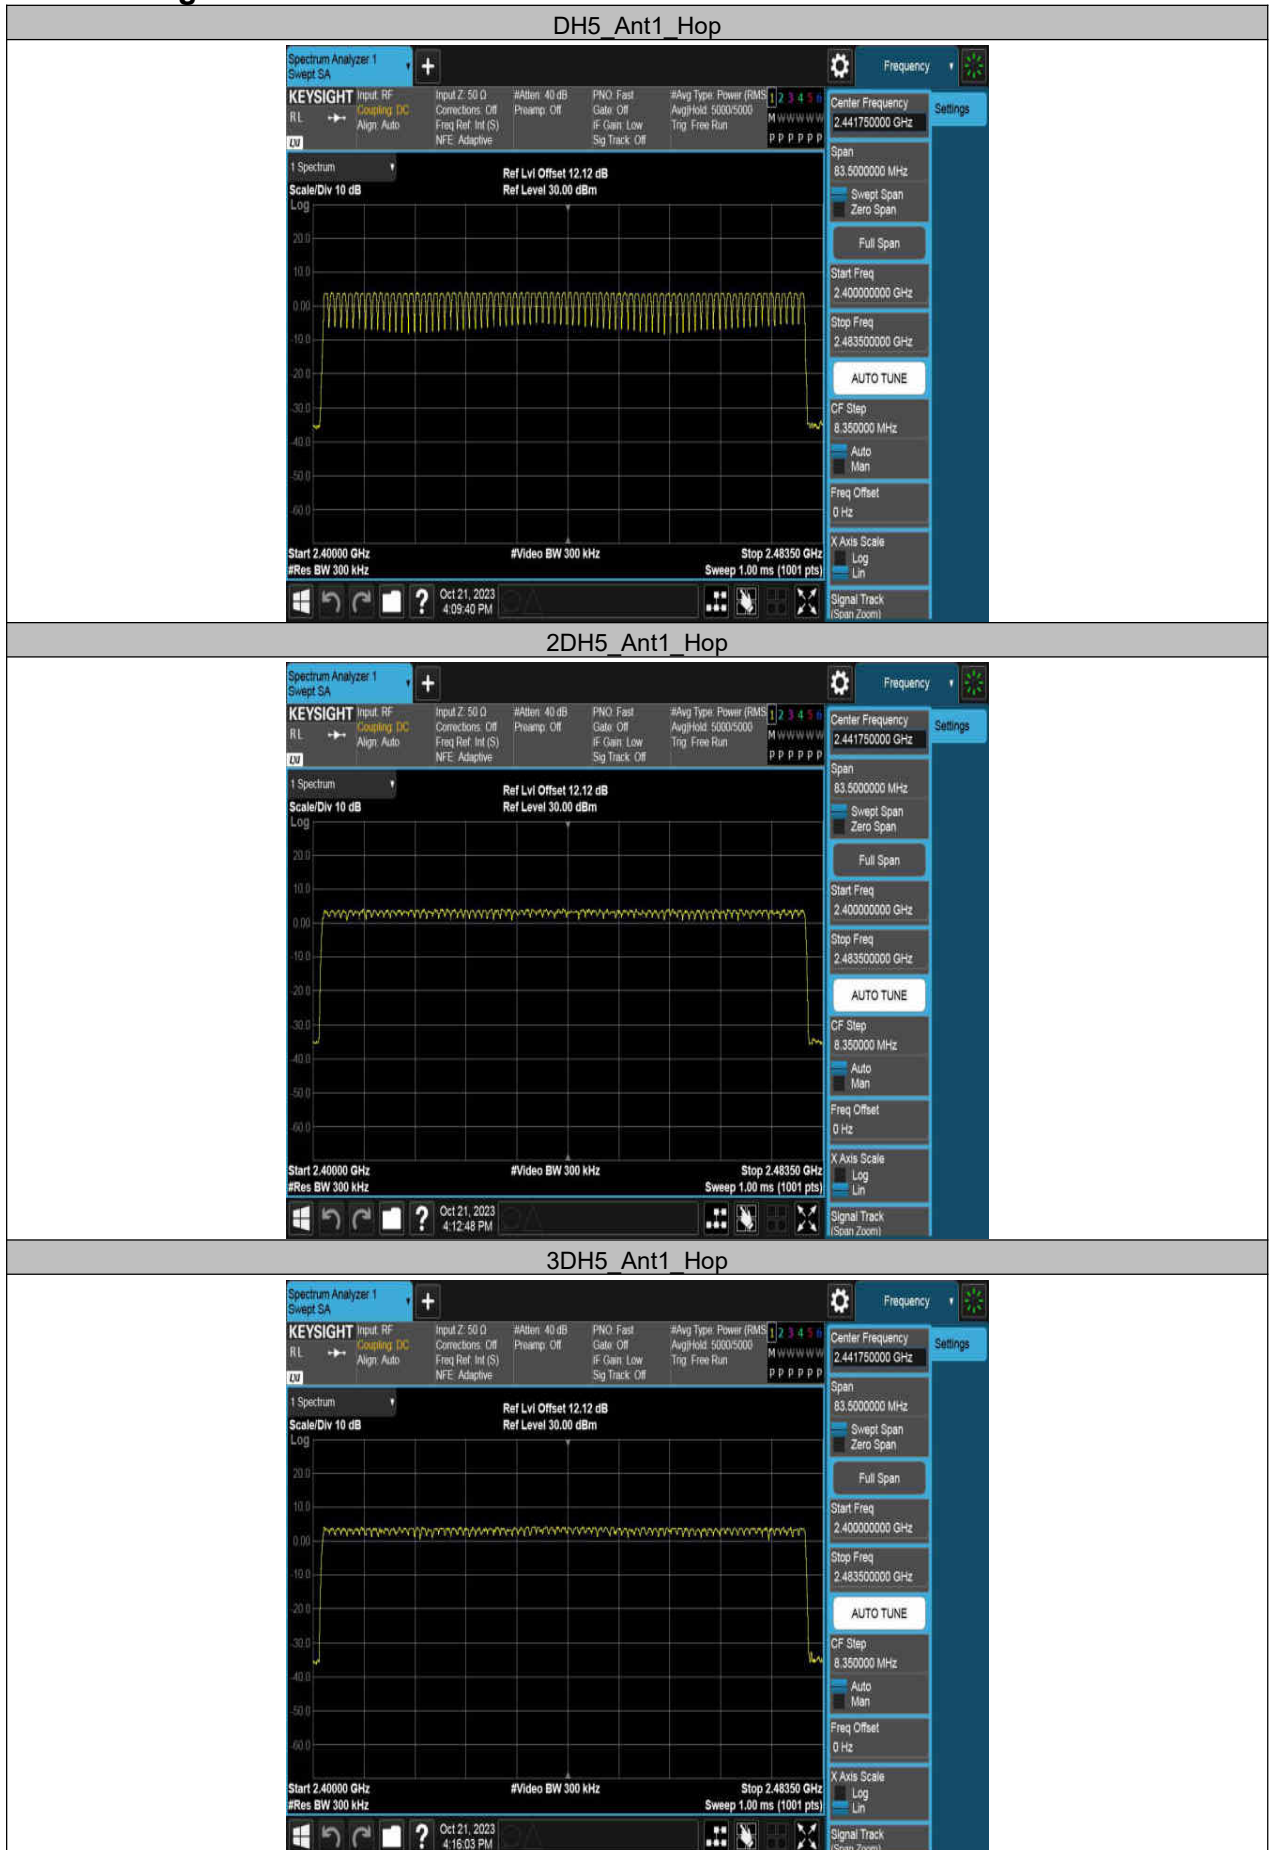

## 13. Time of Occupancy (Dwell Time)

### 13.1. Block diagram of test setup

Same as section 8.1

### 13.2. Limits

CFR 47 FCC Part15 (15.247), Subpart C ISED RSS-247 ISSUE 3		
Section	Test Item	Limit
CFR 47 15.247 (a) (1) III ISED RSS-247 Clause 5.1 (d)	Time of Occupancy (Dwell Time)	The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed.

### 13.3. Test Procedure

Connect the UUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Average
RBW	1 MHz
VBW	≥ RBW
Span	zero span
Trace	Clear Write
Sweep time	As necessary to capture the entire dwell time per hopping channel

Connect the UUT to the spectrum Analyzer and use the following settings:

- The transmitter output (antenna port) was connected to the spectrum analyzer
- Set RBW of spectrum analyzer to 1 MHz and VBW to 3 MHz.
- Use a video trigger with the trigger level set to enable triggering only on full pulses.
- Sweep Time is more than once pulse time.
- Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- Measure the maximum time duration of one single pulse.
- Set the EUT for DH5, DH3 and DH1 packet transmitting.
- Measure the maximum time duration of one single pulse.

A Period Time = (channel number)\*0.4

For FHSS Mode (79 Channel):

DH1 Time Slot: Reading \* (1600/2)\*31.6/(channel number)

DH3 Time Slot: Reading \* (1600/4)\*31.6/(channel number)


DH5 Time Slot: Reading \* (1600/6)\*31.6/(channel number)



**13.4. Results**

Test Mode	Ant.	Freq. (MHz)	Burst Width (ms)	Total Hops (Num)	Result (s)	Limit (s)	Verdict
DH1	Ant1	Hop	0.374	320	0.12	≤0.4	PASS
DH3	Ant1	Hop	1.629	160	0.261	≤0.4	PASS
DH5	Ant1	Hop	2.877	106.67	0.307	≤0.4	PASS
2DH1	Ant1	Hop	0.381	320	0.122	≤0.4	PASS
2DH3	Ant1	Hop	1.633	160	0.261	≤0.4	PASS
2DH5	Ant1	Hop	2.882	106.67	0.307	≤0.4	PASS
3DH1	Ant1	Hop	0.383	320	0.123	≤0.4	PASS
3DH3	Ant1	Hop	1.633	160	0.261	≤0.4	PASS
3DH5	Ant1	Hop	2.884	106.67	0.308	≤0.4	PASS

### 13.5. Original test data

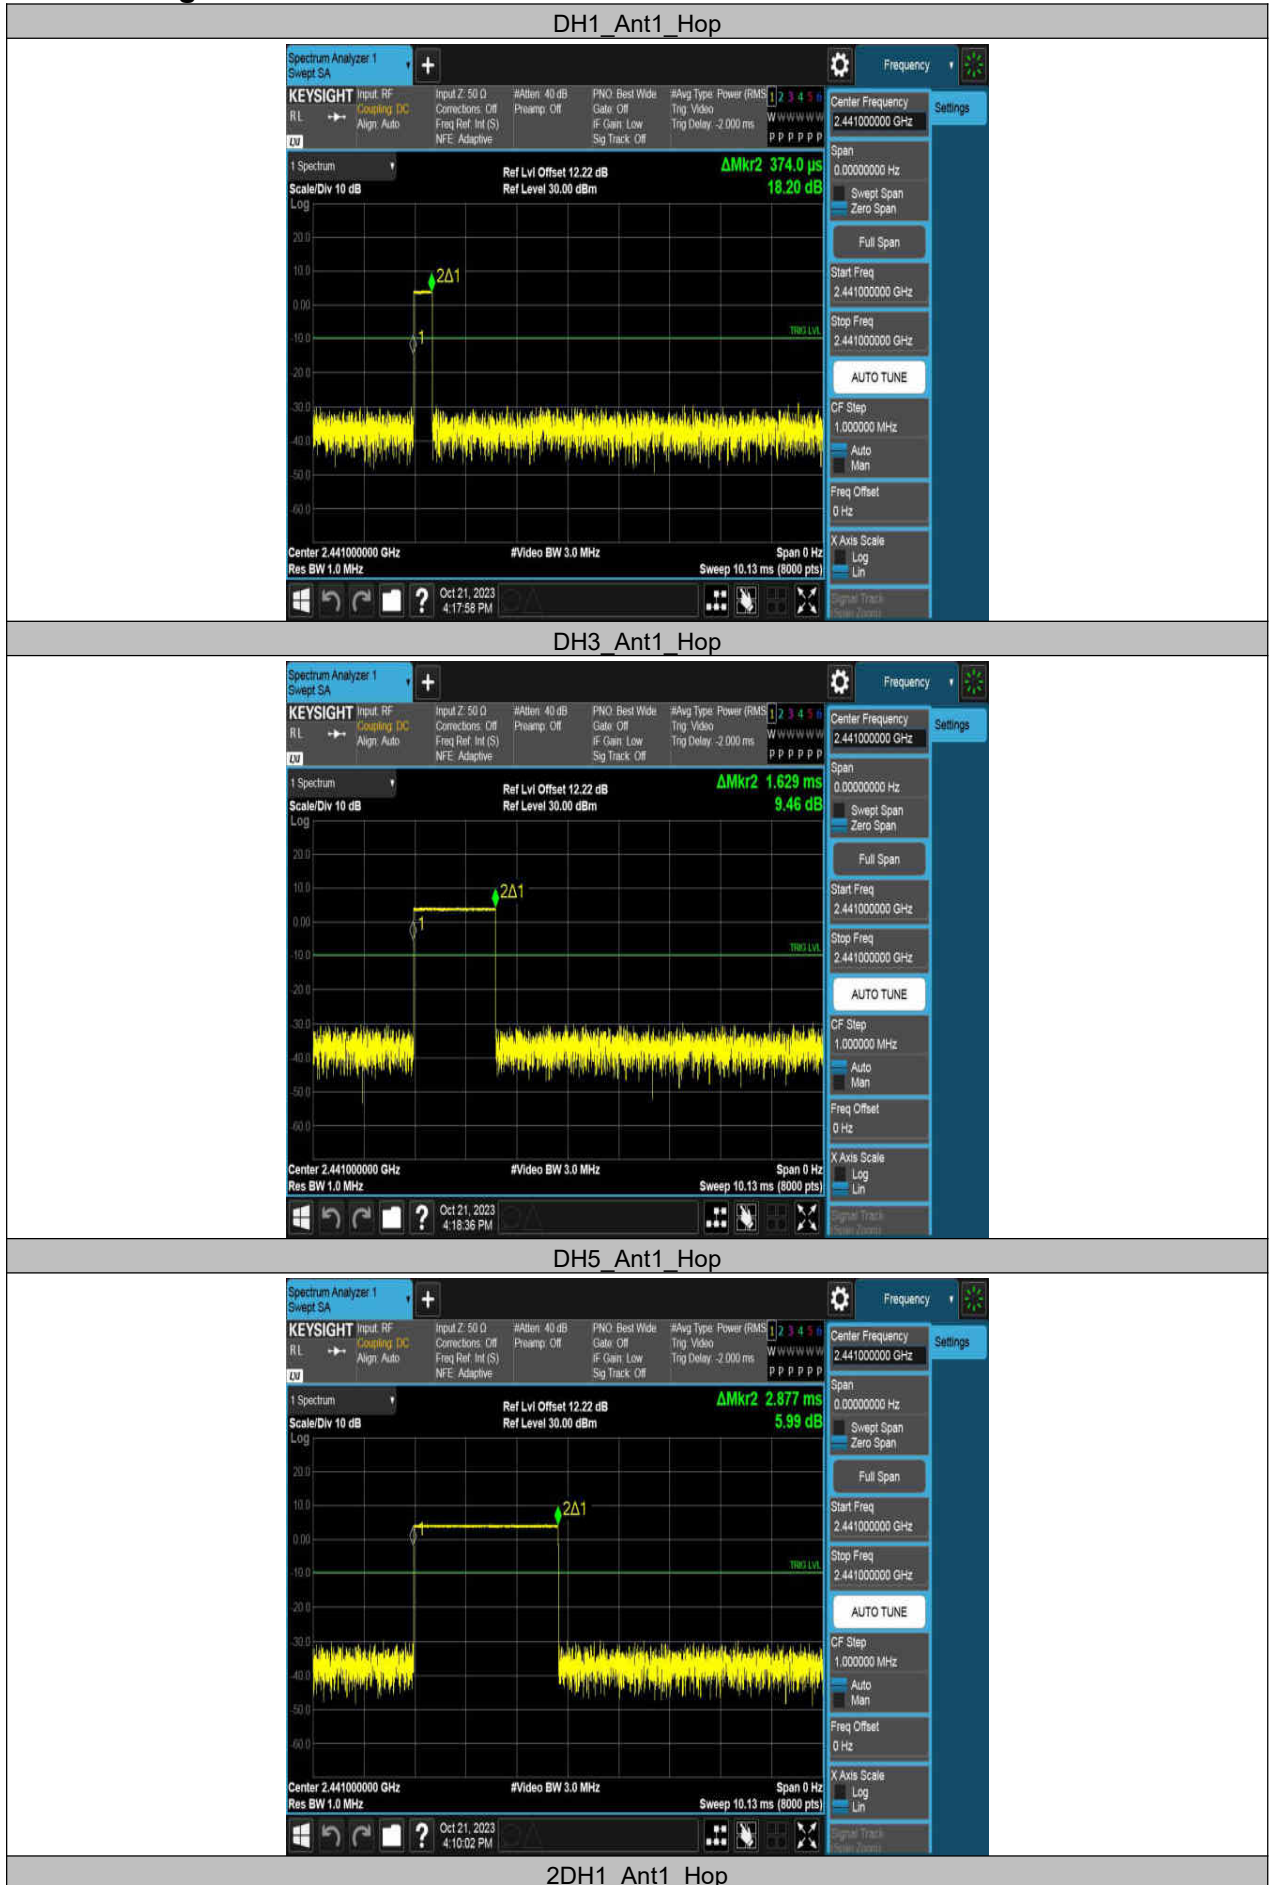




2DH3 Ant1 Hop




2DH5 Ant1 Hop




3DH1 Ant1 Hop

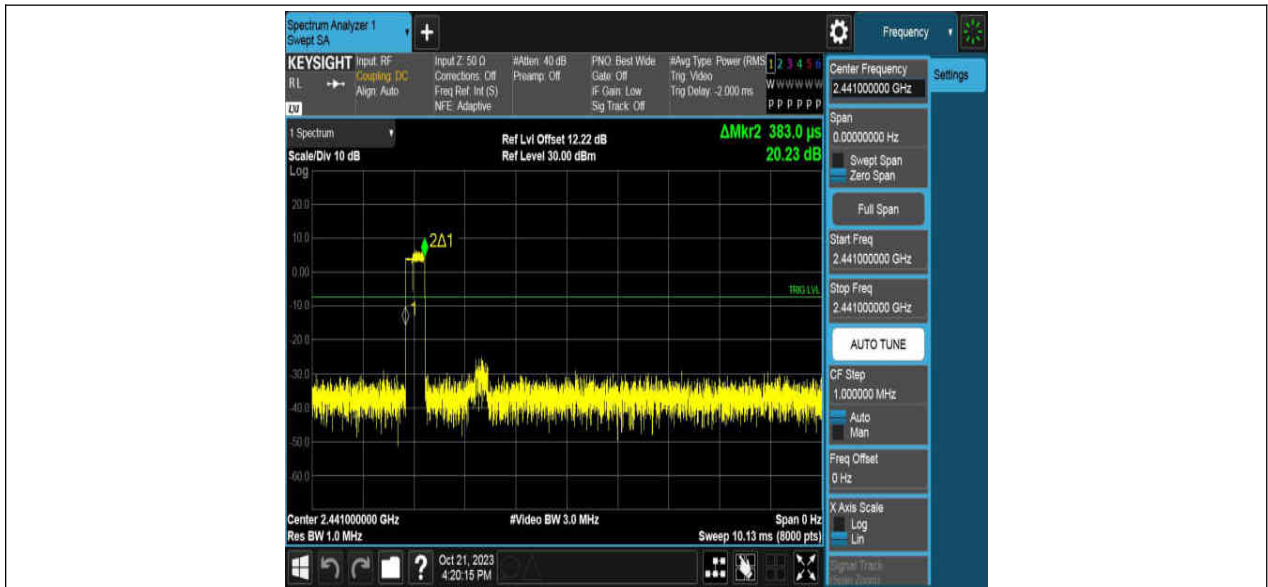

3DH3 Ant1 Hop

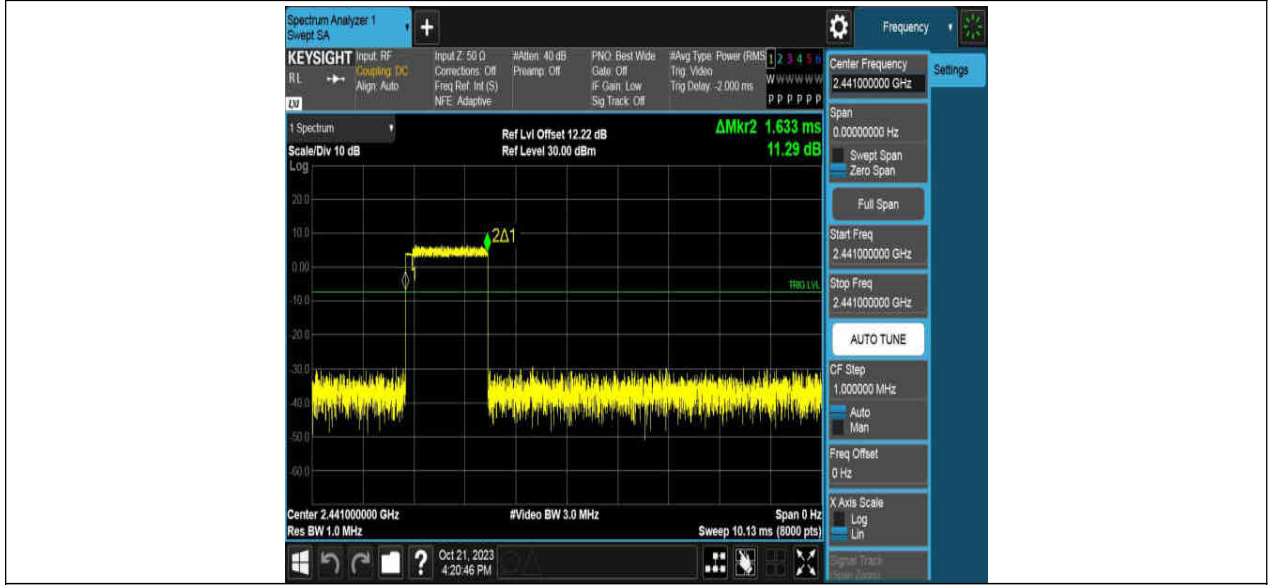

3DH5 Ant1 Hop

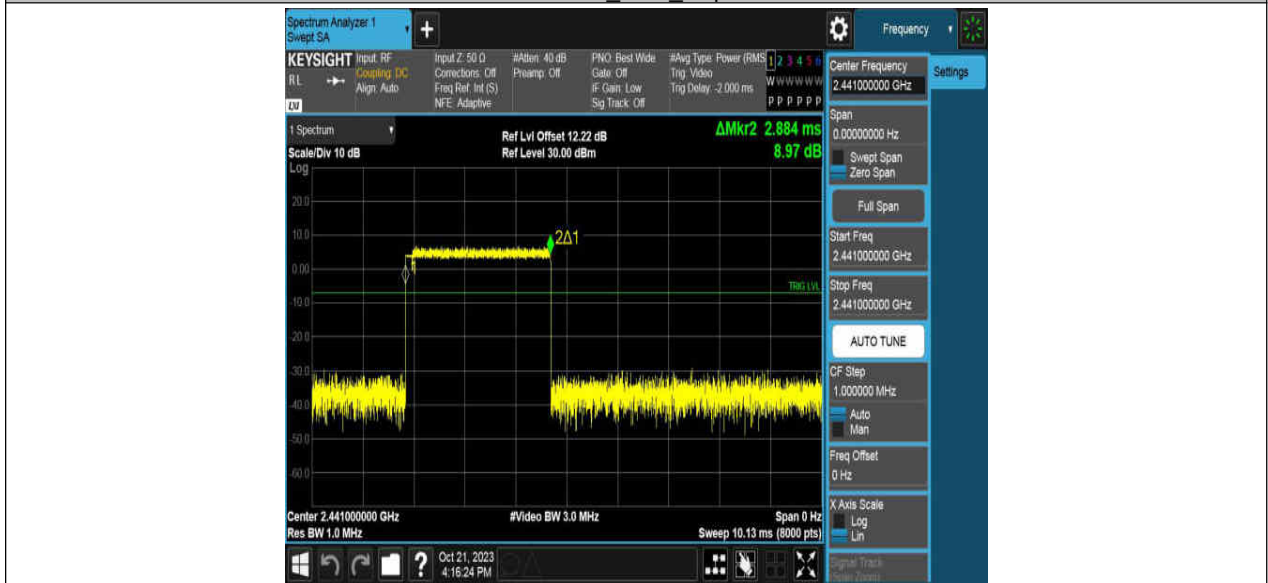

## 14. Conducted Spurious Emission

### 14.1. Block diagram of test setup

Same as section 8.1

### 14.2. Limits

CFR 47 FCC Part15 (15.247), Subpart C ISED RSS-247 ISSUE 3		
Section	Test Item	Limit
CFR 47 FCC §15.247 (d) ISED RSS-247 5.5	Conducted Spurious Emission	at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

### 14.3. Test Procedure

Please refer to the ANSI C63.10 section 6.10.

For Band edge use the following settings:

Detector	Peak
RBW	100 kHz
VBW	300 kHz
Span	wide enough to fully capture the emission being measured
Trace	Max hold
Sweep time	Auto couple.

For Spurious Emission use the following settings:

Detector	Peak
RBW	100 kHz
VBW	300 kHz
Span	wide enough to fully capture the emission being measured
Trace	Max hold
Sweep time	Auto couple.

Use the peak marker function to determine the maximum amplitude level.

**14.4. Results**

Band edge:

Test Mode	Ant.	Ch Name	Freq. (MHz)	Ref Level (dBm)	Result (dBm)	Limit (dBm)	Verdict
DH5	Ant1	Low	2402	3.57	-47.8	≤-16.43	PASS
		High	2480	3.76	-48.53	≤-16.24	PASS
		Low	Hop_2402	3.13	-48.67	≤-16.87	PASS
		High	Hop_2480	3.35	-48.38	≤-16.65	PASS
2DH5	Ant1	Low	2402	3.55	-48.65	≤-16.45	PASS
		High	2480	3.84	-47.82	≤-16.16	PASS
		Low	Hop_2402	0.58	-48.45	≤-19.43	PASS
		High	Hop_2480	2.79	-47.48	≤-17.21	PASS
3DH5	Ant1	Low	2402	3.99	-48.88	≤-16.01	PASS
		High	2480	3.73	-47.96	≤-16.27	PASS
		Low	Hop_2402	-0.46	-48.83	≤-20.46	PASS
		High	Hop_2480	2.09	-47.82	≤-17.92	PASS

## Spurious Emission:

Test Mode	Ant.	Freq. (MHz)	Freq. Range (MHz)	Ref Level (dBm)	Result (dBm)	Limit (dBm)	Verdict
DH5	Ant1	2402	30~1000	3.57	-60.21	≤-16.43	PASS
			1000~26500	3.57	-51.75	≤-16.43	PASS
		2441	30~1000	4.05	-59.93	≤-15.95	PASS
			1000~26500	4.05	-51.3	≤-15.95	PASS
		2480	30~1000	3.76	-60.39	≤-16.24	PASS
			1000~26500	3.76	-51.43	≤-16.24	PASS
2DH5	Ant1	2402	30~1000	3.55	-60.84	≤-16.45	PASS
			1000~26500	3.55	-50.27	≤-16.45	PASS
		2441	30~1000	3.98	-59.44	≤-16.02	PASS
			1000~26500	3.98	-51.47	≤-16.02	PASS
		2480	30~1000	3.84	-59.65	≤-16.16	PASS
			1000~26500	3.84	-50.1	≤-16.16	PASS
3DH5	Ant1	2402	30~1000	3.99	-60.34	≤-16.01	PASS
			1000~26500	3.99	-51.43	≤-16.01	PASS
		2441	30~1000	3.81	-59.84	≤-16.19	PASS
			1000~26500	3.81	-51.3	≤-16.19	PASS
		2480	30~1000	3.73	-59.23	≤-16.27	PASS
			1000~26500	3.73	-51.18	≤-16.27	PASS



### 14.5. Original test data

Band edge:





DH5 Ant1 High Hop 2480




2DH5 Ant1 Low 2402






2DH5 Ant1 High 2480






2DH5 Ant1 Low Hop 2402

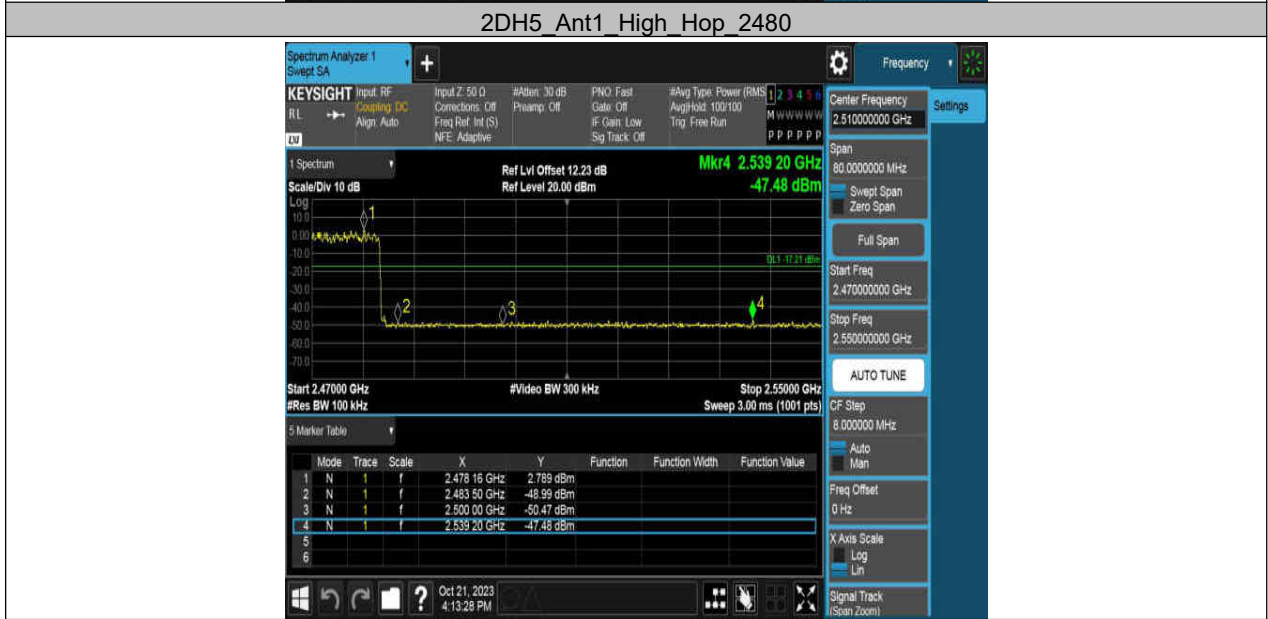

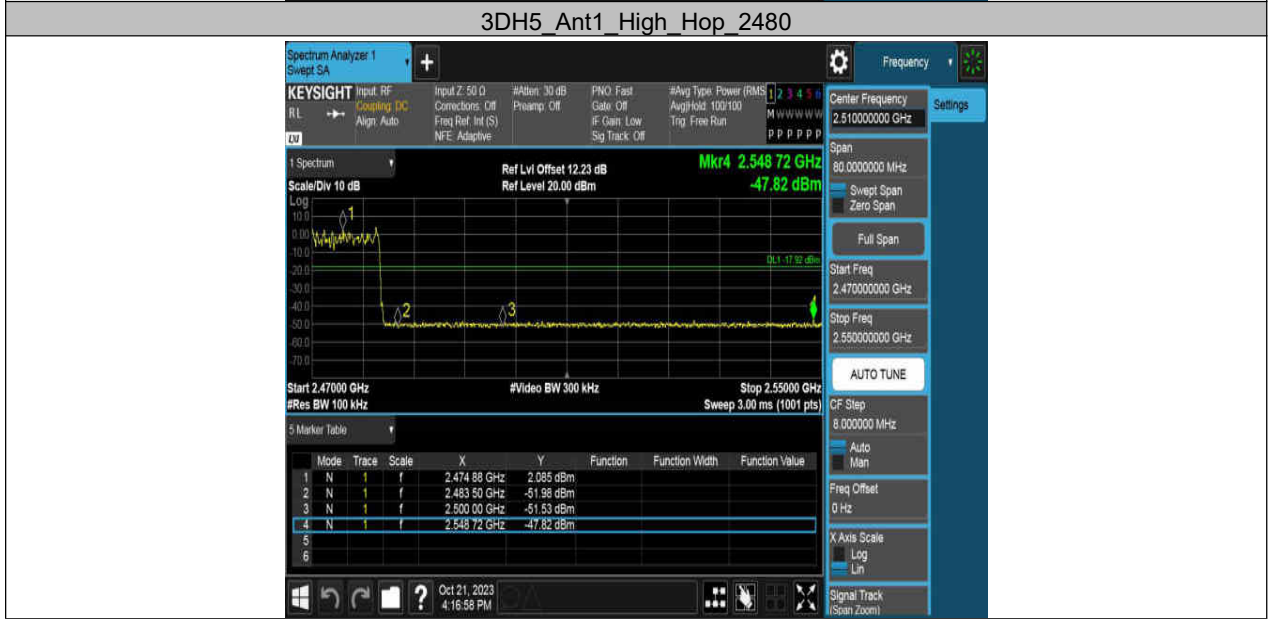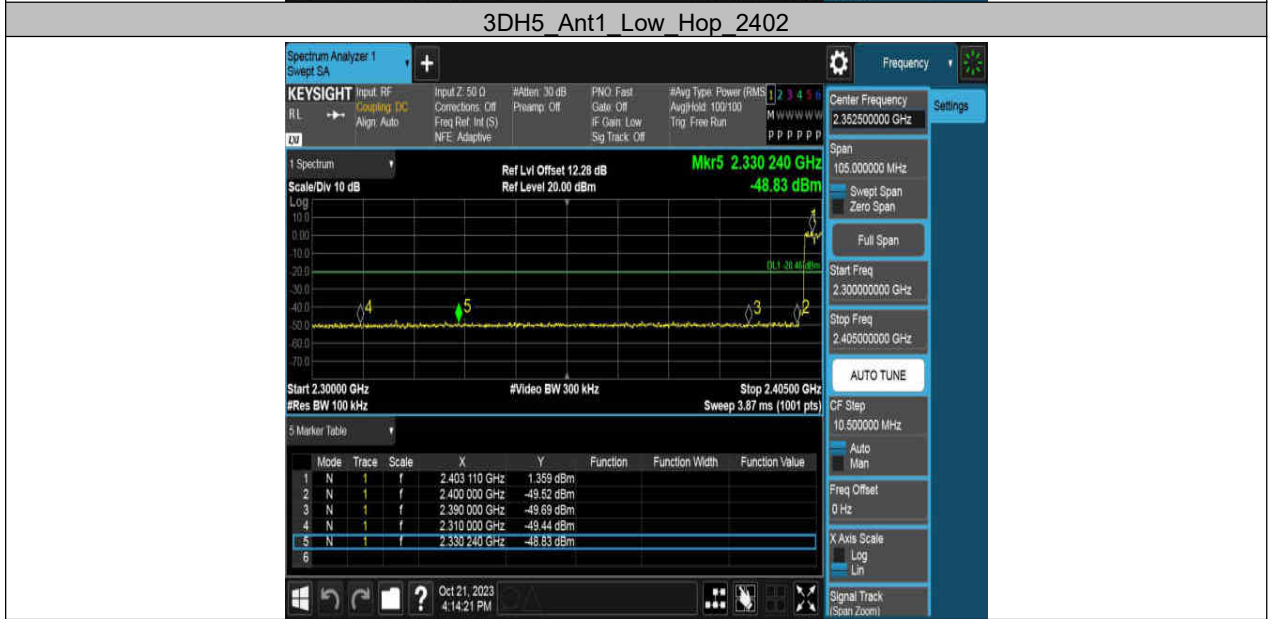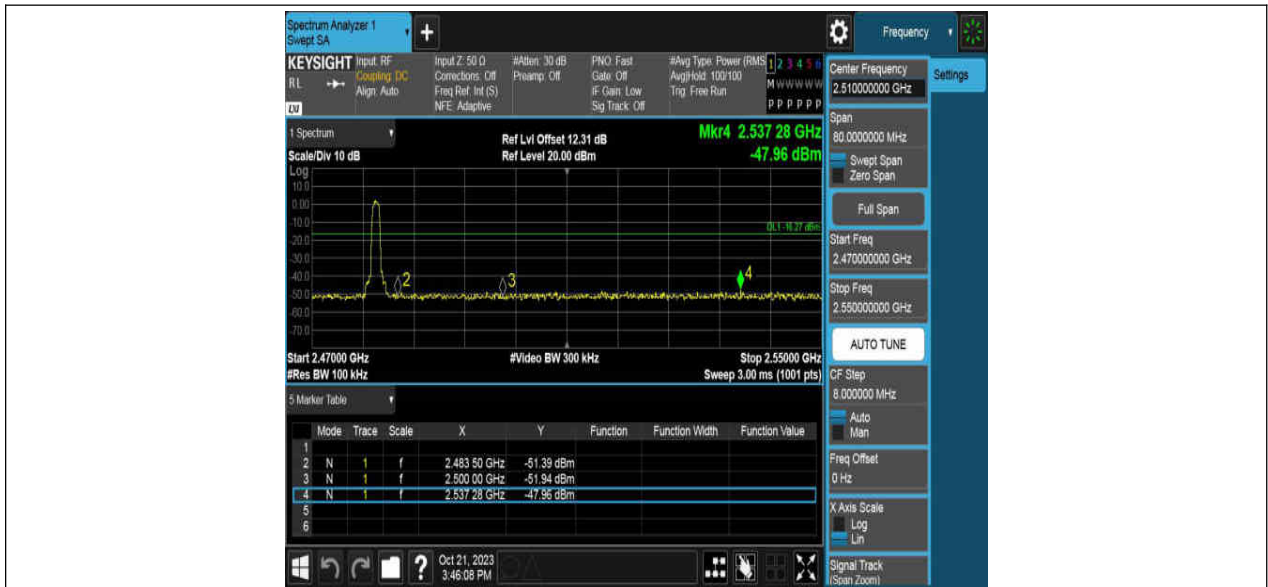

Spurious Emission:

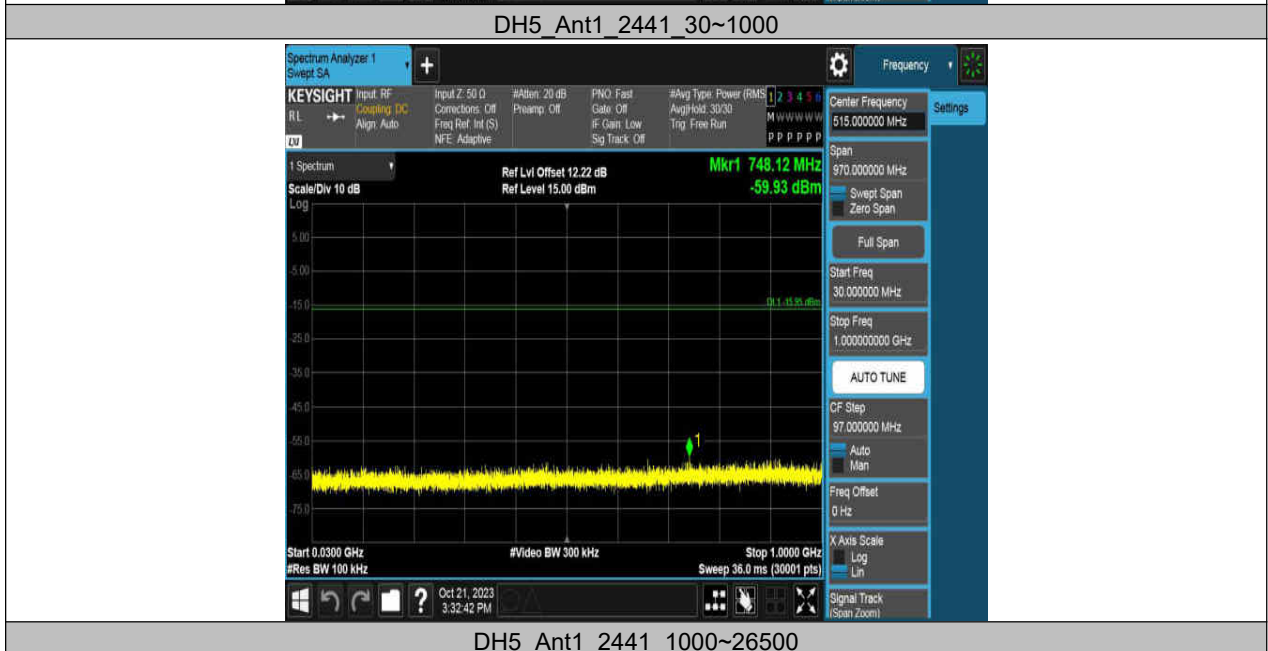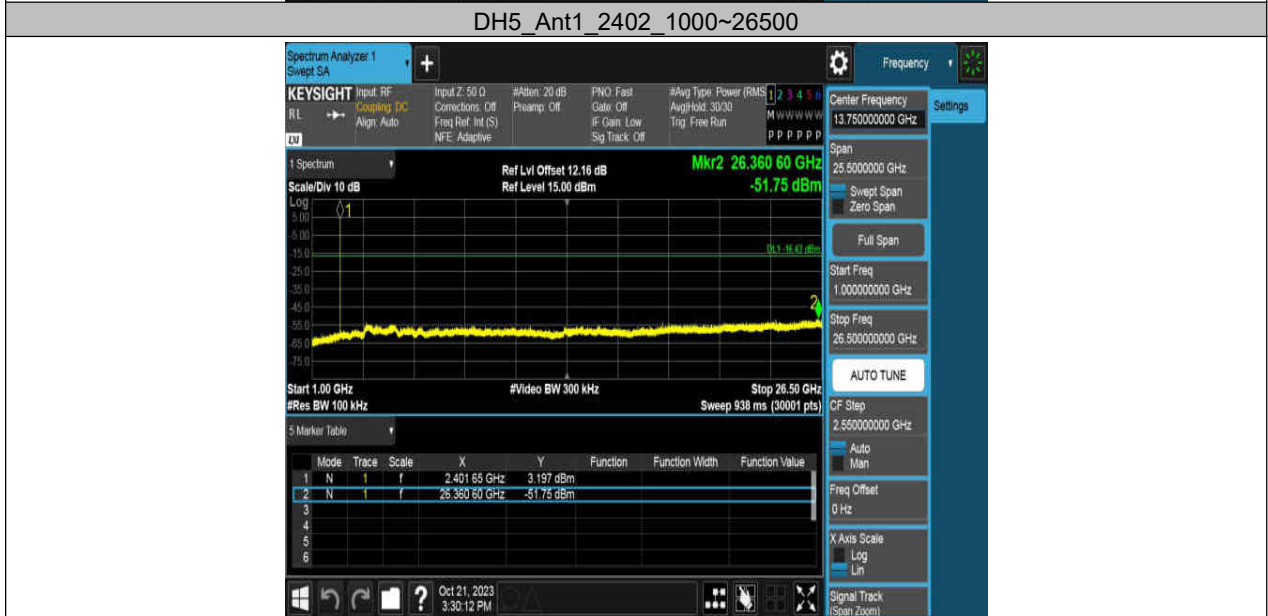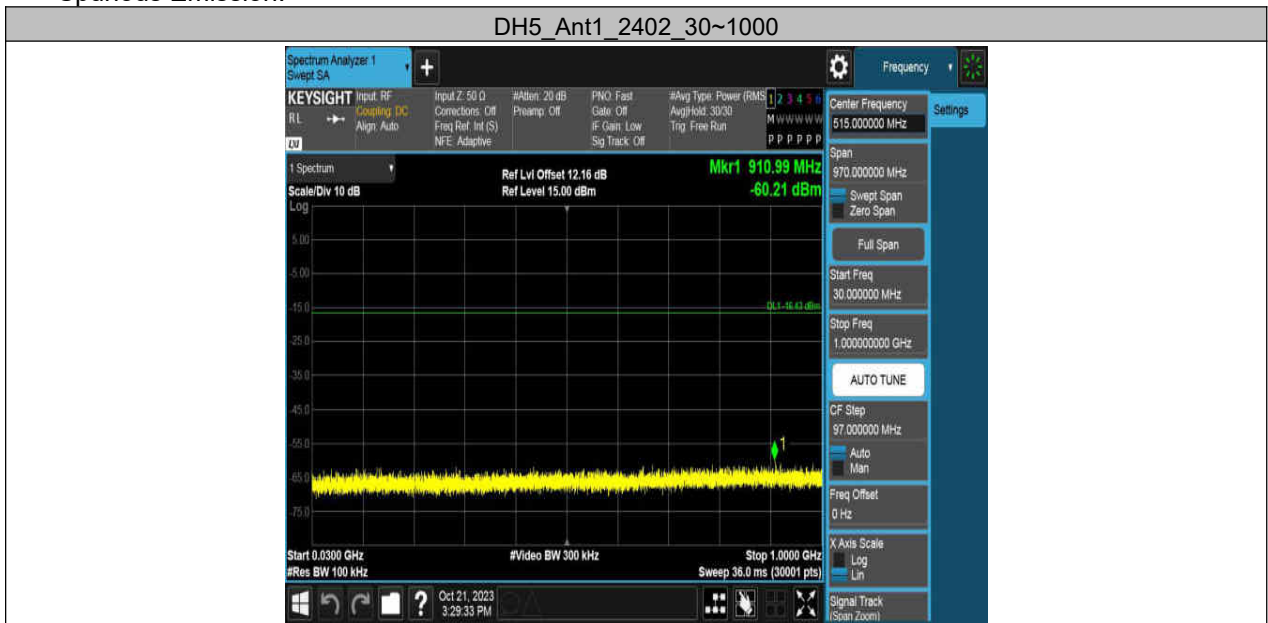






DH5 Ant1\_2480\_30~1000



DH5 Ant1\_2480\_1000~26500



2DH5 Ant1\_2402\_30~1000

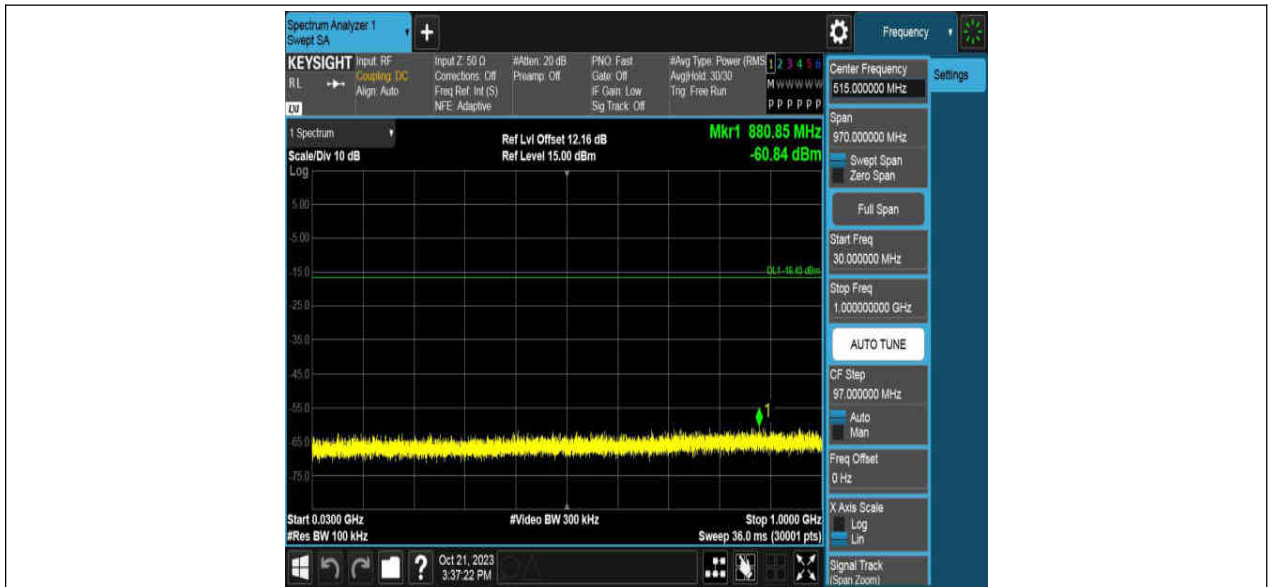



2DH5\_Ant1\_2402\_1000~26500




2DH5\_Ant1\_2441\_30~1000



2DH5\_Ant1\_2441\_1000~26500

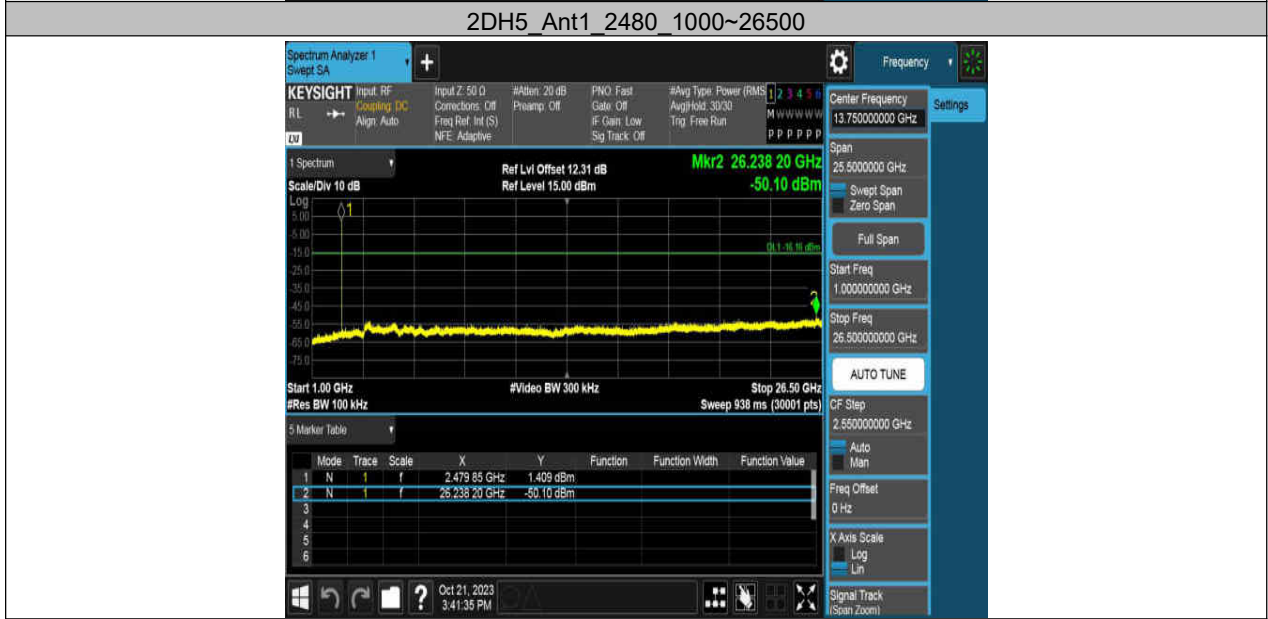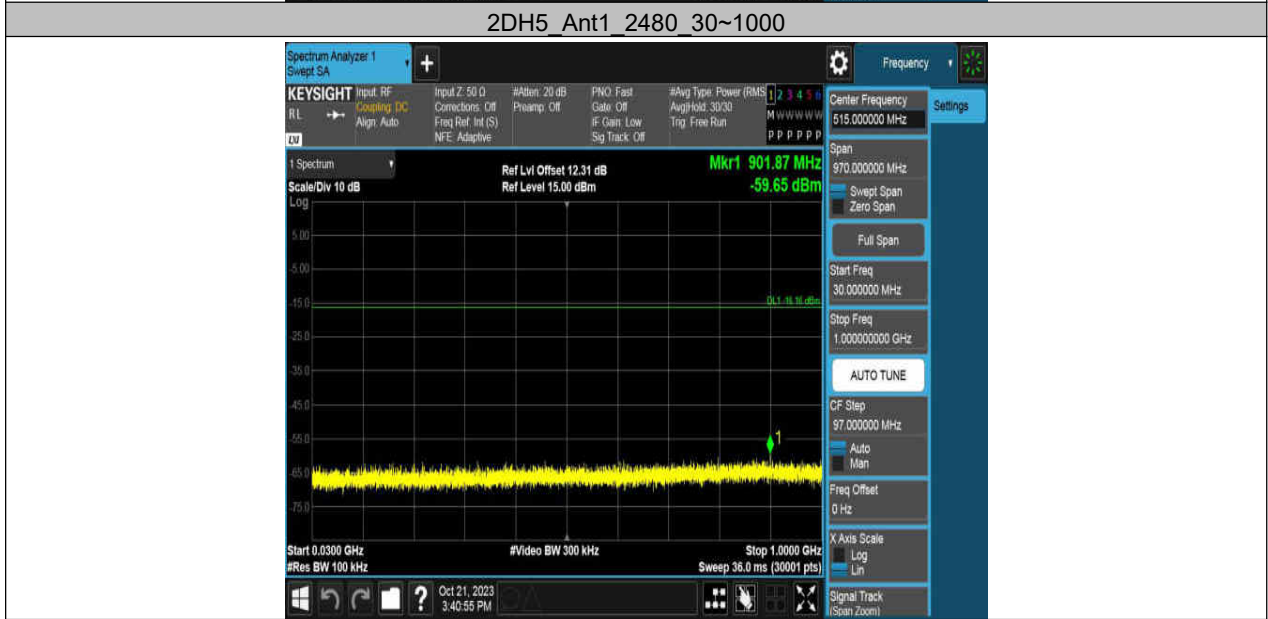


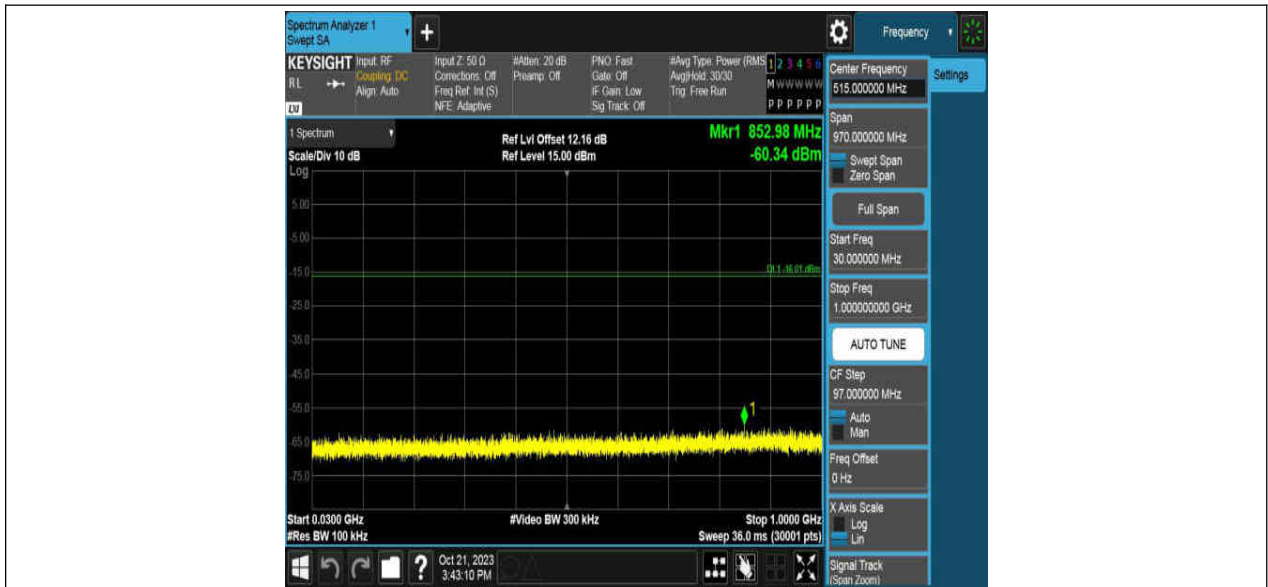

3DH5\_Ant1\_2402\_1000~26500




3DH5\_Ant1\_2441\_30~1000

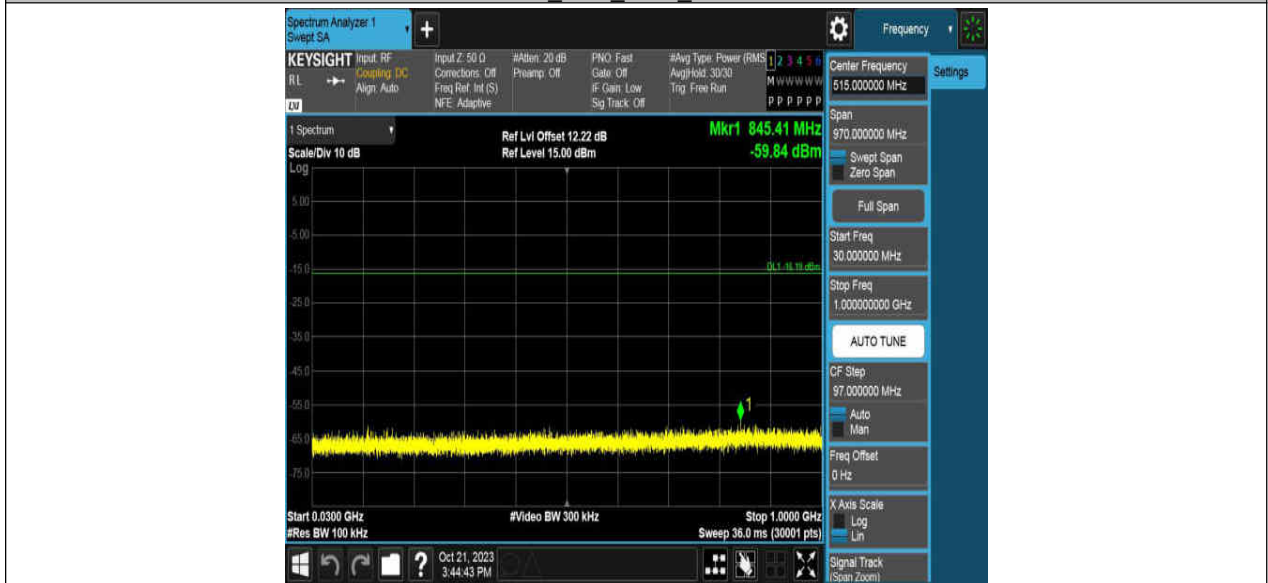

3DH5\_Ant1\_2441\_1000~26500




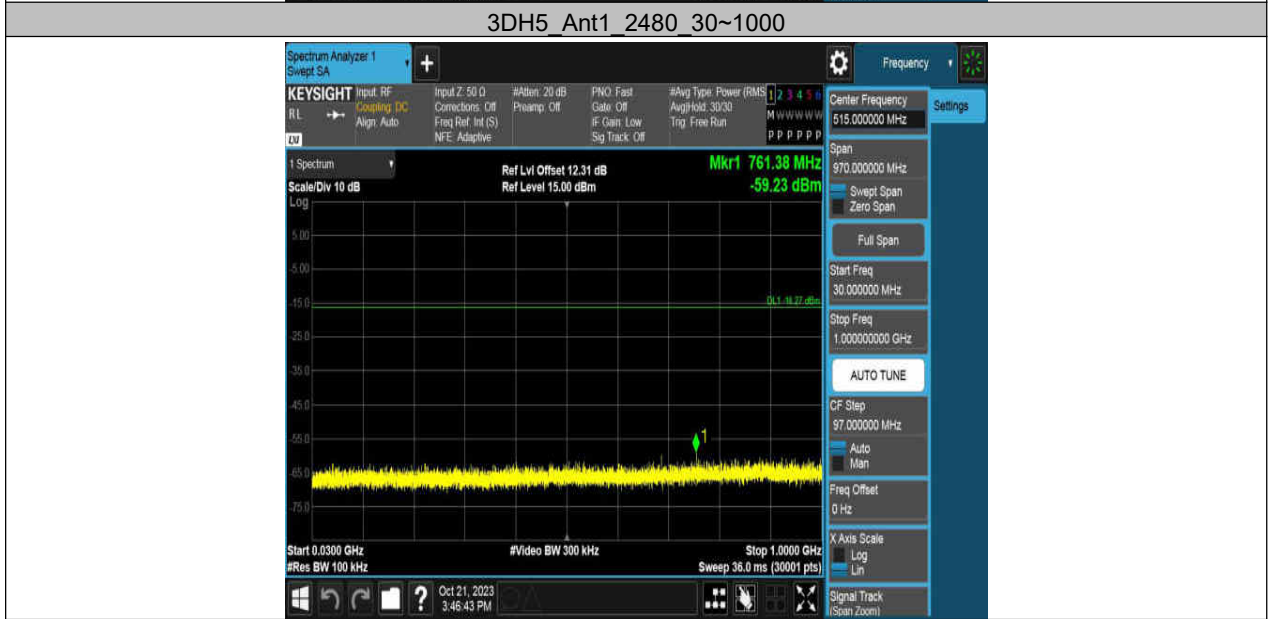


### 15. Radiated Emission

#### 15.1. Block diagram of test setup


In 3m Anechoic Chamber, test setup diagram for 9kHz - 30MHz:

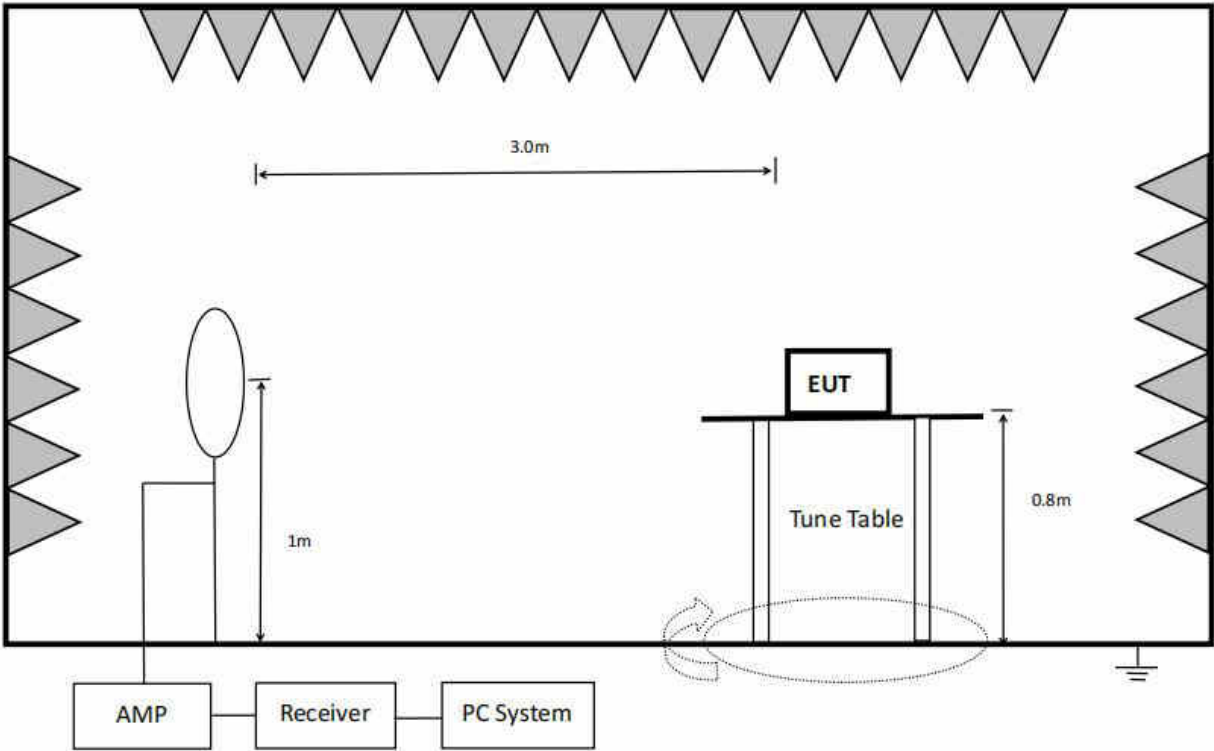

In 3m Anechoic Chamber, test setup diagram for 30 MHz - 1 GHz:

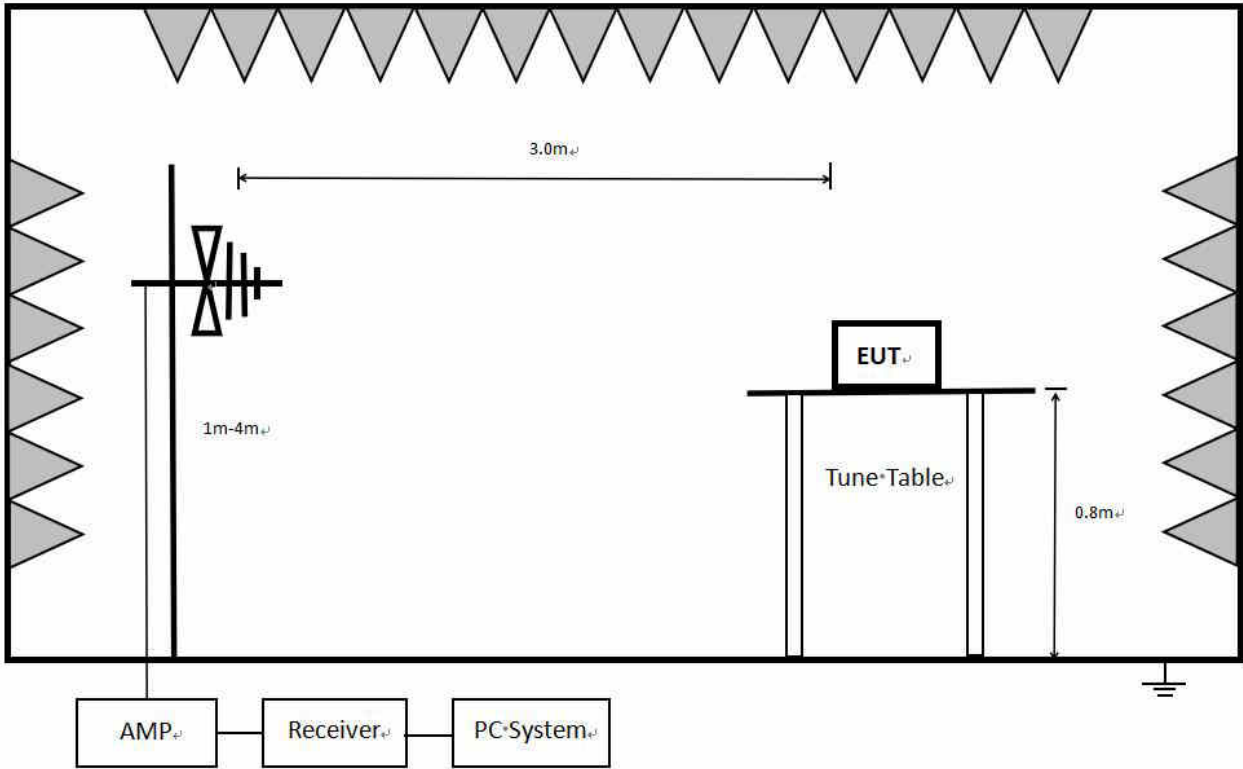

In 3m Anechoic Chamber, test setup diagram for frequency above 1 GHz:

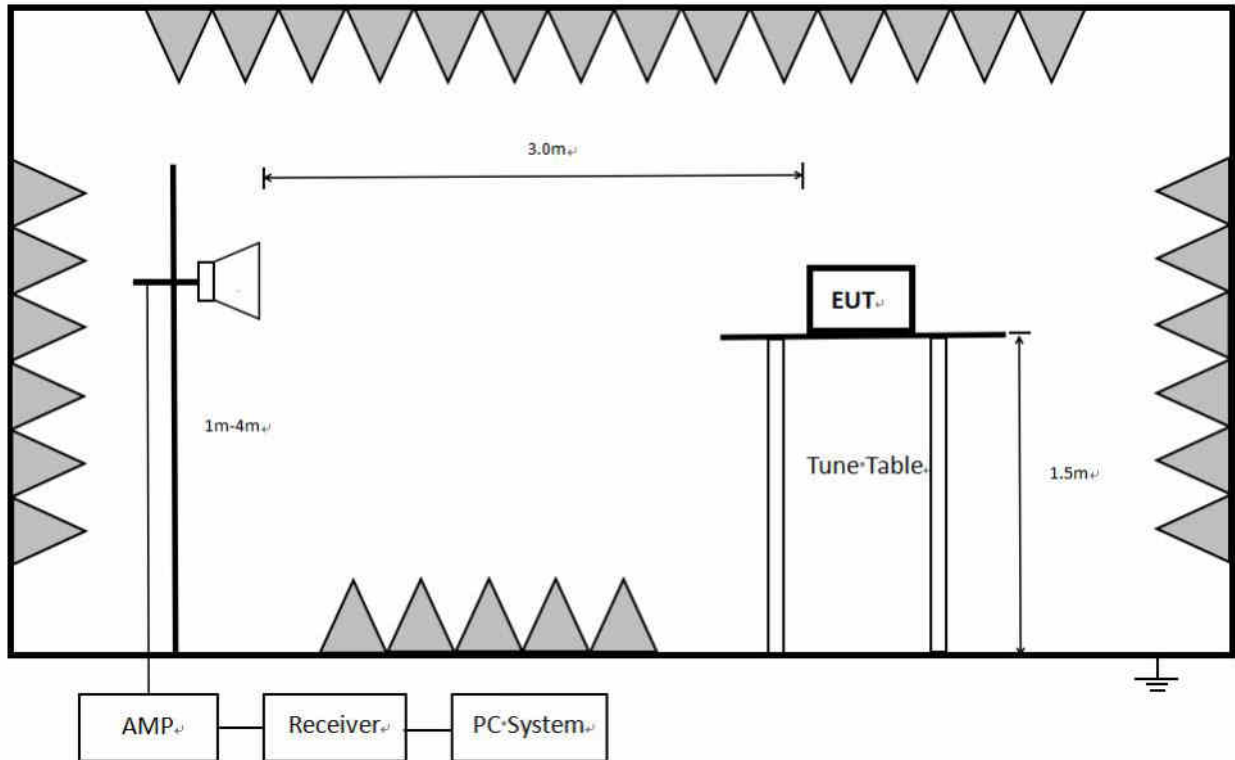

Note: For harmonic emissions test an appropriate high pass filter was inserted in the input port of AMP.

### 15.2. Limit

(1) FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
<sup>1</sup> 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
13.36-13.41			

<sup>1</sup>Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup>Above 38.6

## (2) FCC 15.209 Limit.

Frequency MHz	Distance Meters	Field Strengths Limit	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009 ~ 0.490	300	$2400/\text{F}(\text{kHz})$	$67.6-20\log(\text{F})$
0.490 ~ 1.705	30	$24000/\text{F}(\text{kHz})$	$87.6-20\log(\text{F})$
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216~960	3	200	46.0
960~1000	3	500	54.0
Above 1000	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

Note: 1) At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

(2) At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). This paragraph (f) shall not apply to Access BPL devices operating below 30 MHz.

About Restricted bands of operation please refer to RSS-Gen section 8.10 and FCC § 15.205 (a),

### 15.3. Test Procedure

Below 30 MHz:

The setting of the spectrum Analyzer

RBW	300 Hz (From 9 kHz to 0.15 MHz)/ 10 kHz (From 0.15 MHz to 30 MHz)
VBW	1 kHz (From 9 kHz to 0.15 MHz)/ 30 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of 1 meter height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore, sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.

Below 1 GHz and above 30 MHz:

The setting of the spectrum Analyzer

RBW	100 kHz
VBW	300 kHz
Sweep	Auto
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

## Above 1 GHz:

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.

2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

3. The EUT was placed on a turntable with 1.5m above ground.

4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.

5. For measurement above 1GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.

6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for AVG measurements. For the Duty Cycle please refer to clause 7.1.On Time And Duty Cycle.

7. Restriction band: Investigated frequency range from 2310 MHz to 2410 MHz and 2470MHz to 2500 MHz.

All restriction band should comply with 15.209, other emission should be at least 20 dB below the fundamental.

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

Note 2: The EUT does not support simultaneous transmission.

Note 3: The EUT was fully exercised with external accessories during the test. In the case of multiple accessory external ports, an external accessory shall be connected to one of each type of port.

## 15.4. Results

Pass. (See below detailed test result)

All the emissions except fundamental emission from 9 kHz to 25 GHz were comply with 15.209 limits.

Note1: According exploratory test, the emission levels are 20 dB below the limit detected from 9 kHz to 30 MHz, so the final test was performed with frequency range from 30 MHz to 26 GHz and recorded in below.

Note2: For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with EUT working in 8DPSK, TX 2402 MHz mode.

Note3: For emissions above 1 GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit.

## 15.5. Original test data


Below 1 GHz and above 30 MHz test data Refer to appendix A

Above 1 GHz test data Refer to appendix B



## 16. AC Power Line Conducted Emissions

### 16.1. Block diagram of test setup

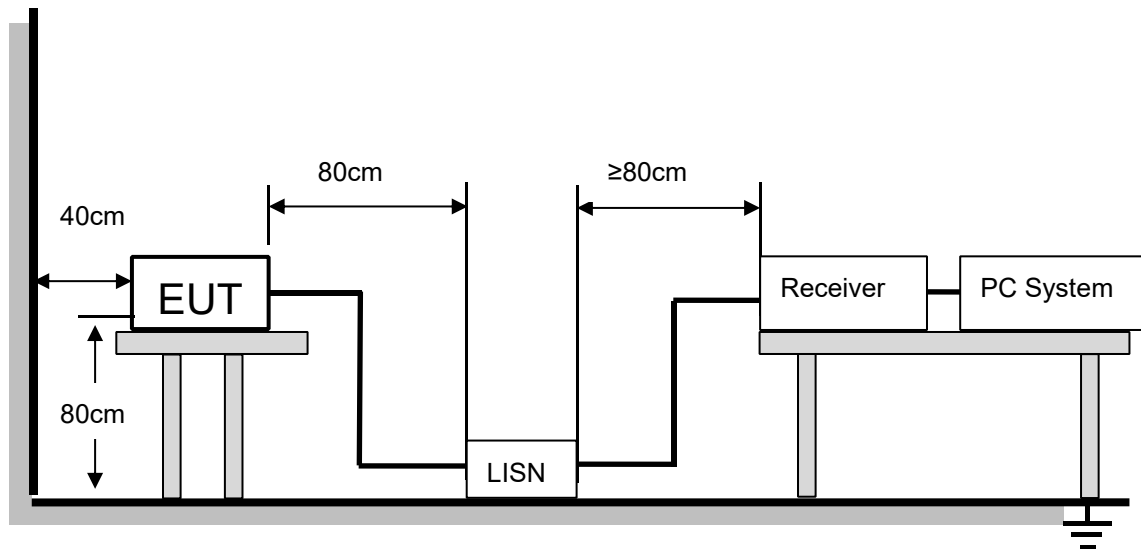

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through an Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

### 16.2. Limits

Please refer to CFR 47 FCC § 15.207 (a) and ISED RSS-Gen Clause 8.8.

Frequency (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note 1: \* Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

### 16.3. Test procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

Configuration EUT to simulate typical usage as described in clause 2.4 and test equipment as described in clause 10.2 of this report.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

#### **16.4. Test result**

According to 15.207, power Line Conducted Emission is not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.

## 17. Antenna Requirements

### 17.1. Limits

Please refer to FCC § 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC § 15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 17.2. Result

The antenna used for this product is PCB antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 1.81 dBi


## APPENDIX A – Radiated Emission Below 1GHz Test Data

### Test Report

Project Information			
EUT:	WiFi Module	Environment:	23.6°C 52%
Model:	SKO.WB920TU.3	SN:	
Mode:	3DH5_2402	Voltage:	DC 5V+/-0.3
Customer:		Engineer:	Soho Liu
Remark:			

Start of Test: 2023-11-01 09:55:22

#### Test Graph

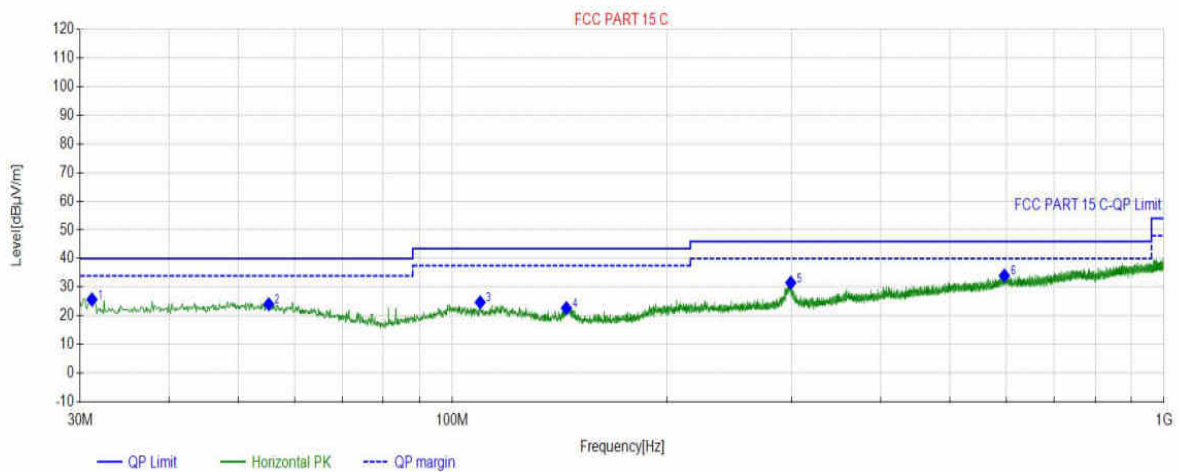


Final Data List								
NO.	Freq. (MHz)	Factor (dB)	QP Value (dBµV/m)	QP Limit (dBµV/m)	QP Margin (dB)	Height (cm)	Angle (°)	Polarity
1	31.1641	19.10	25.71	40.00	14.29	100	86	Horizontal
2	55.2225	21.86	24.06	40.00	15.94	100	292	Horizontal
3	109.4509	20.22	24.72	43.50	18.78	100	126	Horizontal
4	144.6655	17.06	22.70	43.50	20.80	100	73	Horizontal
5	298.9109	21.83	31.55	46.00	14.45	100	360	Horizontal
6	596.6337	30.10	34.07	46.00	11.93	100	251	Horizontal

# Test Report

Project Information			
EUT:	WiFi Module	Environment:	23.6°C 52%
Model:	SKO.WB920TU.3	SN:	
Mode:	3DH5_2402	Voltage:	DC 5V+/-0.3
Customer:		Engineer:	Soho Liu
Remark:			

Start of Test: 2023-11-01 09:56:06

## Test Graph

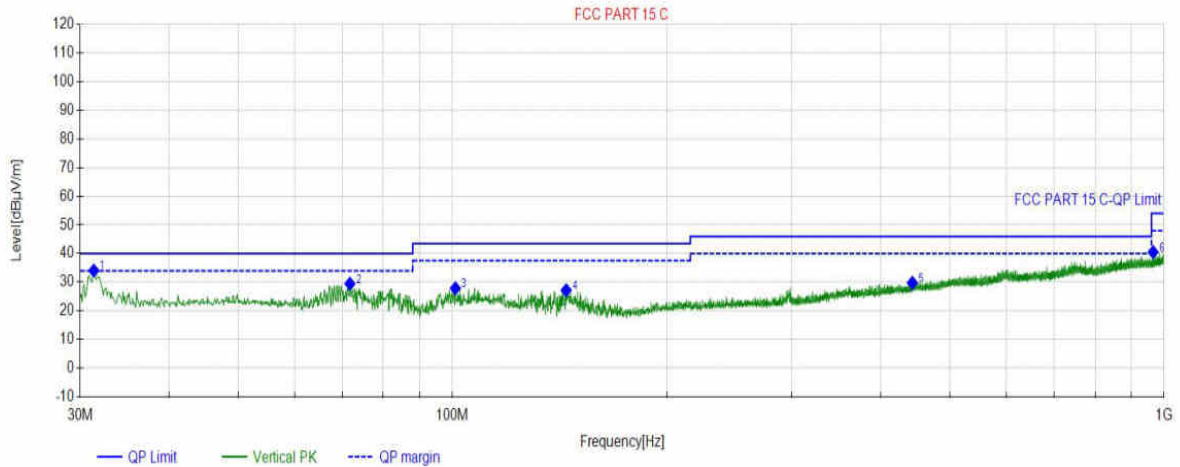

Final Data List								
NO.	Freq. (MHz)	Factor (dB)	QP Value (dBµV/m)	QP Limit (dBµV/m)	QP Margin (dB)	Height (cm)	Angle (°)	Polarity
1	31.3581	19.15	34.06	40.00	5.94	100	124	Vertical
2	71.8112	17.80	29.46	40.00	10.54	100	37	Vertical
3	101.0111	20.72	27.89	43.50	15.61	100	141	Vertical
4	144.5685	17.06	27.19	43.50	16.31	100	163	Vertical
5	442.9703	26.44	29.77	46.00	16.23	100	124	Vertical
6	965.3675	35.18	40.51	54.00	13.49	100	2	Vertical


## APPENDIX B – Radiated Emission Above 1GHz Test Data

### Test Report

Project Information			
EUT:	WiFi Module	Environment:	23.6°C 52%
Model:	SKO.WB920TU.3	SN:	
Mode:	3DH5_2402	Voltage:	DC 5V+/-0.3
Customer:		Engineer:	Soho Liu
Remark:			

Start of Test: 2023-11-01 10:36:45

#### Test Graph

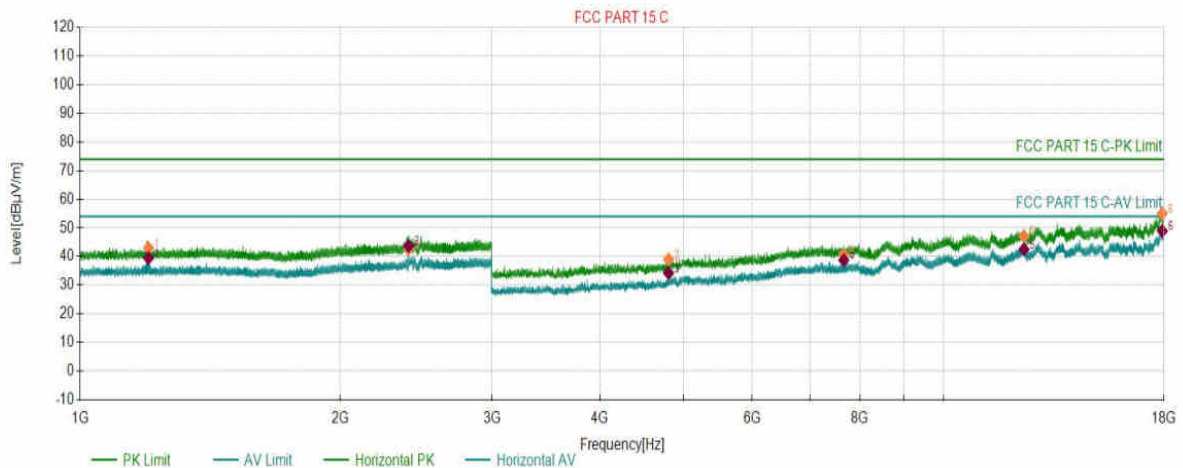

#### PK Final Data List

NO.	Freq. (MHz)	Factor (dB)	PK Value (dBµV/m)	PK Limit (dBµV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1199.8100	2.28	42.98	74.00	31.02	150	141	Horizontal
2	2401.2701	7.43	42.65	74.00	31.35	150	347	Horizontal
3	4803.0902	-9.85	39.01	74.00	34.99	150	318	Horizontal
4	7661.4831	-1.14	40.69	74.00	33.31	150	285	Horizontal
5	12391.2196	6.97	47.20	74.00	26.80	150	131	Horizontal
6	17916.7458	17.31	55.06	74.00	18.94	150	272	Horizontal

#### AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1199.8100	2.28	39.48	54.00	14.52	150	141	Horizontal
2	2401.2701	7.43	43.70	54.00	10.30	150	347	Horizontal
3	4803.0902	-9.85	34.22	54.00	19.78	150	318	Horizontal
4	7661.4831	-1.14	38.73	54.00	15.27	150	285	Horizontal
5	12391.2196	6.97	42.55	54.00	11.45	150	131	Horizontal
6	17916.7458	17.31	48.95	54.00	5.05	150	272	Horizontal

# Test Report

Project Information			
EUT:	WiFi Module	Environment:	23.6°C 52%
Model:	SKO.WB920TU.3	SN:	
Mode:	3DH5_2402	Voltage:	DC 5V+/-0.3
Customer:		Engineer:	Soho Liu
Remark:			

Start of Test: 2023-11-01 10:38:18

## Test Graph

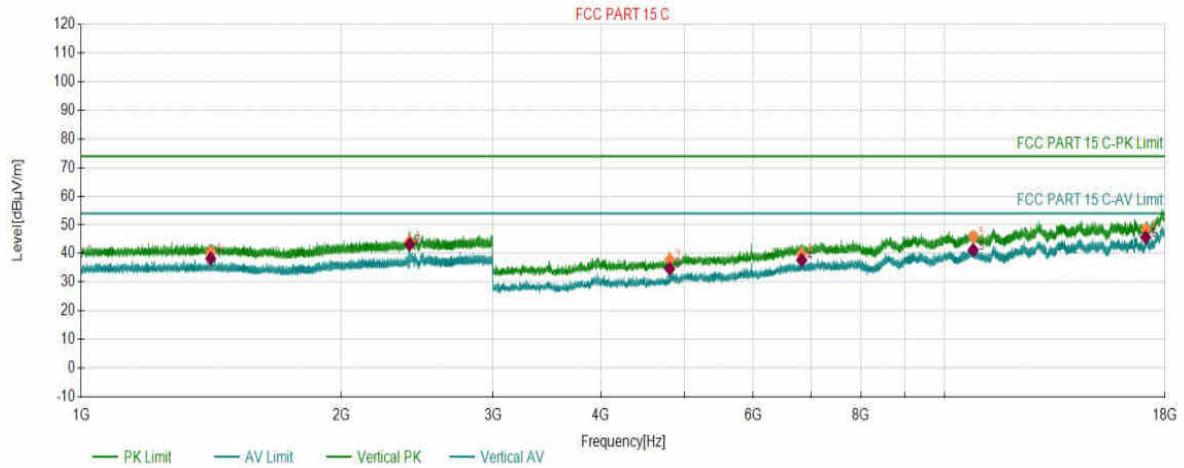

### PK Final Data List

NO.	Freq. (MHz)	Factor (dB)	PK Value (dBµV/m)	PK Limit (dBµV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1412.7206	3.37	40.57	74.00	33.43	150	358	Vertical
2	2401.8701	7.43	44.17	74.00	29.83	150	81	Vertical
3	4803.8402	-9.85	37.90	74.00	36.10	150	55	Vertical
4	6831.1916	-3.02	39.90	74.00	34.10	150	206	Vertical
5	10792.1396	5.19	45.82	74.00	28.18	150	272	Vertical
6	17097.7049	12.50	48.46	74.00	25.54	150	163	Vertical

### AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1412.7206	3.37	38.29	54.00	15.71	150	358	Vertical
2	2401.8701	7.43	43.21	54.00	10.79	150	81	Vertical
3	4803.8402	-9.85	34.72	54.00	19.28	150	55	Vertical
4	6831.1916	-3.02	37.72	54.00	16.28	150	206	Vertical
5	10792.1396	5.19	41.25	54.00	12.75	150	272	Vertical
6	17097.7049	12.50	45.63	54.00	8.37	150	163	Vertical

# Test Report

Project Information			
EUT:	WiFi Module	Environment:	23.6°C 52%
Model:	SKO.WB920TU.3	SN:	
Mode:	3DH5_2441	Voltage:	DC 5V+/-0.3
Customer:		Engineer:	Soho Liu
Remark:			

Start of Test: 2023-11-01 10:41:39

## Test Graph

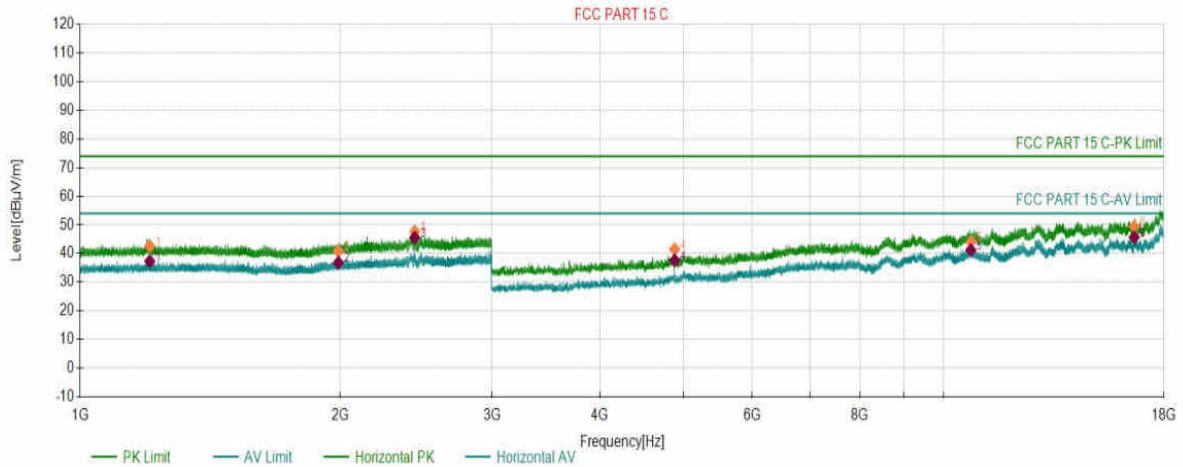

## PK Final Data List

NO.	Freq. (MHz)	Factor (dB)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1204.0102	2.30	42.58	74.00	31.42	150	131	Horizontal
2	1991.0496	5.02	40.86	74.00	33.14	150	165	Horizontal
3	2440.9720	7.64	47.68	74.00	26.32	150	141	Horizontal
4	4881.0941	-9.43	41.55	74.00	32.45	150	80	Horizontal
5	10753.1377	5.18	44.13	74.00	29.87	150	140	Horizontal
6	16624.4312	12.24	49.40	74.00	24.60	150	58	Horizontal

## AV Final Data List

NO.	Freq. (MHz)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1204.0102	2.30	37.37	54.00	16.63	150	131	Horizontal
2	1991.0496	5.02	36.84	54.00	17.16	150	165	Horizontal
3	2440.9720	7.64	45.51	54.00	8.49	150	141	Horizontal
4	4881.0941	-9.43	37.68	54.00	16.32	150	80	Horizontal
5	10753.1377	5.18	41.24	54.00	12.76	150	140	Horizontal
6	16624.4312	12.24	45.67	54.00	8.33	150	58	Horizontal




# Test Report

Project Information			
EUT:	WiFi Module	Environment:	23.6°C 52%
Model:	SKO.WB920TU.3	SN:	
Mode:	3DH5_2441	Voltage:	DC 5V+/-0.3
Customer:		Engineer:	Soho Liu
Remark:			

Start of Test: 2023-11-01 10:43:12

## Test Graph

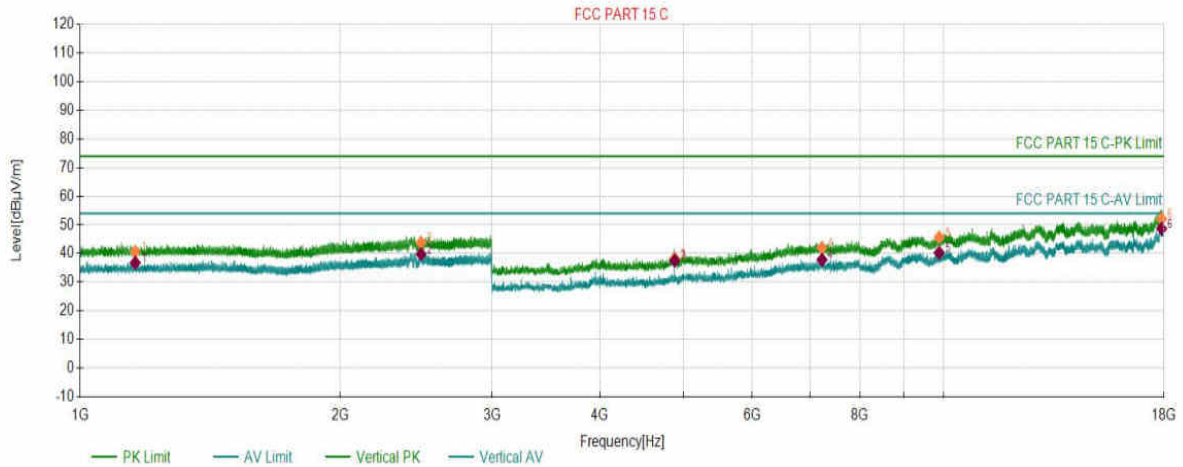

## PK Final Data List

NO.	Freq. (MHz)	Factor (dB)	PK Value (dBµV/m)	PK Limit (dBµV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1158.3079	1.94	40.66	74.00	33.34	150	90	Vertical
2	2482.5741	7.87	43.81	74.00	30.19	150	253	Vertical
3	4881.8441	-9.43	38.24	74.00	35.76	150	67	Vertical
4	7230.2115	-1.60	42.03	74.00	31.97	150	254	Vertical
5	9882.3441	3.73	45.65	74.00	28.35	150	349	Vertical
6	17883.7442	17.31	52.10	74.00	21.90	150	331	Vertical

## AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1158.3079	1.94	36.77	54.00	17.23	150	90	Vertical
2	2482.5741	7.87	39.79	54.00	14.21	150	253	Vertical
3	4881.8441	-9.43	37.53	54.00	16.47	150	67	Vertical
4	7230.2115	-1.60	37.87	54.00	16.13	150	254	Vertical
5	9882.3441	3.73	40.29	54.00	13.71	150	349	Vertical
6	17883.7442	17.31	48.72	54.00	5.28	150	331	Vertical

# Test Report

Project Information			
EUT:	WiFi Module	Environment:	23.6°C 52%
Model:	SKO.WB920TU.3	SN:	
Mode:	3DH5_2441	Voltage:	DC 5V+/-0.3
Customer:		Engineer:	Soho Liu
Remark:			

Start of Test: 2023-11-01 10:46:17

## Test Graph

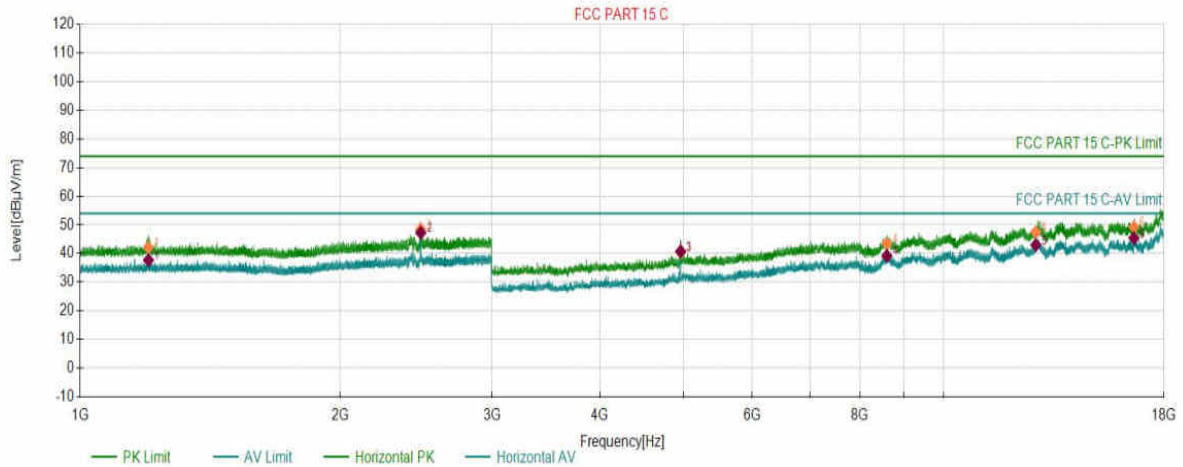

## PK Final Data List

NO.	Freq. (MHz)	Factor (dB)	PK Value (dBµV/m)	PK Limit (dBµV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1199.7100	2.28	42.14	74.00	31.86	150	140	Horizontal
2	2480.0740	7.86	48.42	74.00	25.58	150	52	Horizontal
3	4959.8480	-8.95	40.50	74.00	33.50	150	123	Horizontal
4	8596.0298	1.90	43.39	74.00	30.61	150	43	Horizontal
5	12787.9894	8.98	47.45	74.00	26.55	150	279	Horizontal
6	16613.1807	12.21	49.24	74.00	24.76	150	246	Horizontal

## AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1199.7100	2.28	37.71	54.00	16.29	150	140	Horizontal
2	2480.0740	7.86	47.24	54.00	6.76	150	52	Horizontal
3	4959.8480	-8.95	40.75	54.00	13.25	150	123	Horizontal
4	8596.0298	1.90	39.20	54.00	14.80	150	43	Horizontal
5	12787.9894	8.98	43.00	54.00	11.00	150	279	Horizontal
6	16613.1807	12.21	45.41	54.00	8.59	150	246	Horizontal

# Test Report

Project Information			
EUT:	WiFi Module	Environment:	23.6°C 52%
Model:	SKO.WB920TU.3	SN:	
Mode:	3DH5_2480	Voltage:	DC 5V+/-0.3
Customer:		Engineer:	Soho Liu
Remark:			

Start of Test: 2023-11-01 10:47:49

## Test Graph

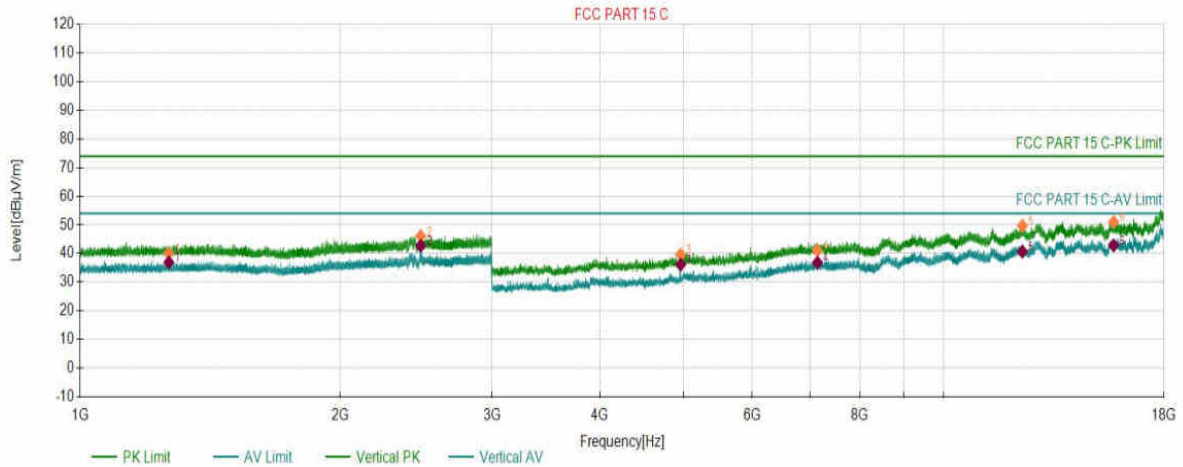

### PK Final Data List

NO.	Freq. (MHz)	Factor (dB)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1266.9133	2.56	40.10	74.00	33.90	150	75	Vertical
2	2480.0740	7.86	46.07	74.00	27.93	150	0	Vertical
3	4959.8480	-8.95	39.60	74.00	34.40	150	74	Vertical
4	7143.2072	-1.78	41.06	74.00	32.94	150	106	Vertical
5	12337.9669	6.91	49.70	74.00	24.30	150	213	Vertical
6	15737.8869	11.44	51.00	74.00	23.00	150	321	Vertical

### AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1266.9133	2.56	36.92	54.00	17.08	150	75	Vertical
2	2480.0740	7.86	42.73	54.00	11.27	150	0	Vertical
3	4959.8480	-8.95	36.17	54.00	17.83	150	74	Vertical
4	7143.2072	-1.78	36.83	54.00	17.17	150	106	Vertical
5	12337.9669	6.91	40.70	54.00	13.30	150	213	Vertical
6	15737.8869	11.44	42.85	54.00	11.15	150	321	Vertical

# Test Report

Project Information			
EUT:	WiFi Module	Environment:	23.6°C 52%
Model:	SKO.WB920TU.3	SN:	
Mode:	DH5_2402	Voltage:	DC 5V+/-0.3
Customer:		Engineer:	Soho Liu
Remark:			

Start of Test: 2023-10-31 14:07:05

## Test Graph

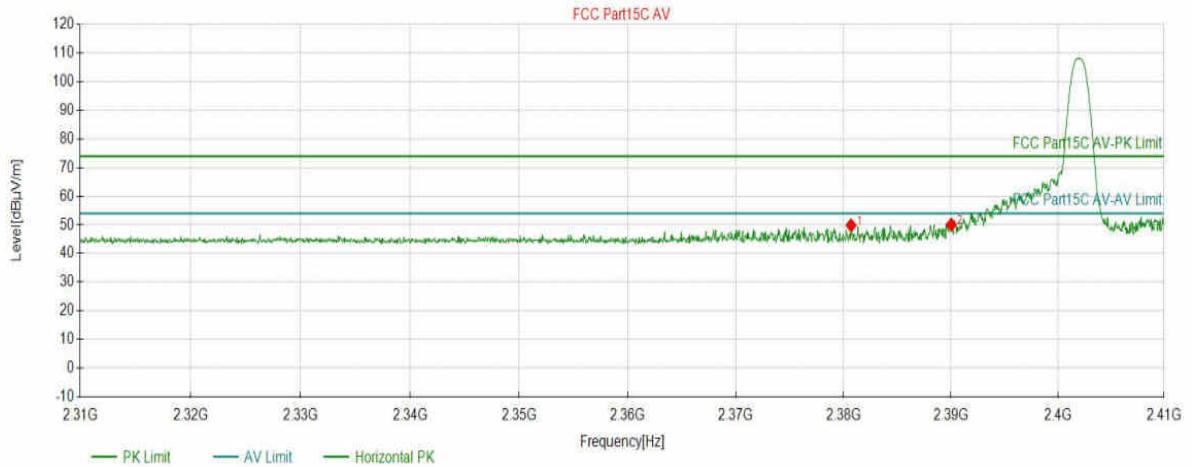

## Suspected Data List


NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2380.6853	49.84	5.96	74.00	24.16	150	189	PK	Horizontal
2	2390.0400	50.10	5.95	74.00	23.90	150	298	PK	Horizontal

# Test Report

Project Information			
EUT:	WiFi Module	Environment:	23.6°C 52%
Model:	SKO.WB920TU.3	SN:	
Mode:	DH5_2402	Voltage:	DC 5V+/-0.3
Customer:		Engineer:	Soho Liu
Remark:			

Start of Test: 2023-10-31 14:07:54

## Test Graph

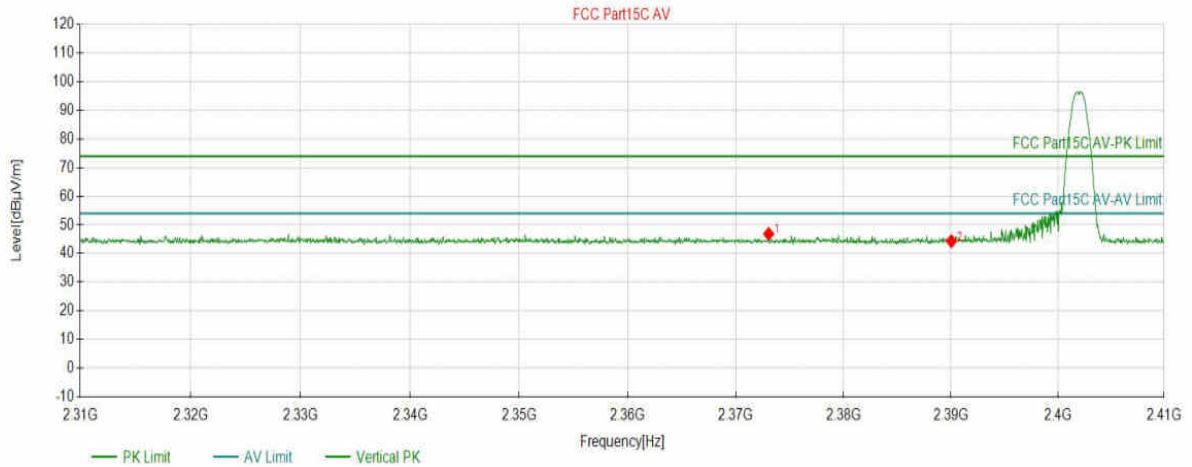

## Suspected Data List


NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2373.0315	46.85	5.97	74.00	27.15	150	54	PK	Vertical
2	2390.0400	44.31	5.95	74.00	29.69	150	342	PK	Vertical

# Test Report

Project Information			
EUT:	WiFi Module	Environment:	23.6°C 52%
Model:	SKO.WB920TU.3	SN:	
Mode:	DH5_2480	Voltage:	DC 5V+/-0.3
Customer:		Engineer:	Soho Liu
Remark:			

Start of Test: 2023-10-31 14:13:58

## Test Graph

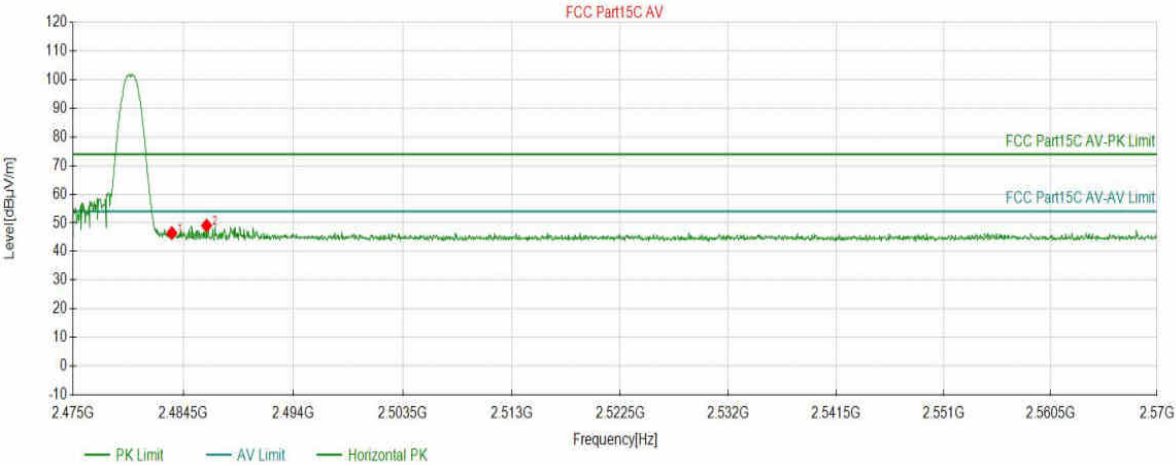


Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2483.5068	46.43	6.50	74.00	27.57	150	202	PK	Horizontal
2	2486.5008	49.05	6.52	74.00	24.95	150	185	PK	Horizontal

# Test Report

Project Information			
EUT:	WiFi Module	Environment:	23.6°C 52%
Model:	SKO.WB920TU.3	SN:	
Mode:	DH5_2480	Voltage:	DC 5V+/-0.3
Customer:		Engineer:	Soho Liu
Remark:			

Start of Test: 2023-10-31 14:14:46

## Test Graph

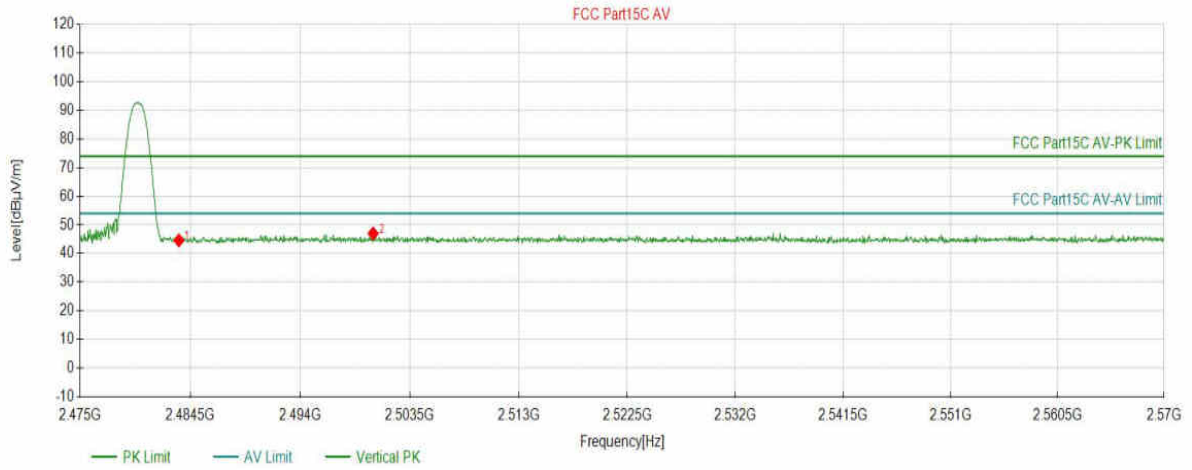

## Suspected Data List


NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2483.5068	44.60	6.50	74.00	29.40	150	357	PK	Vertical
2	2500.3302	46.99	6.61	74.00	27.01	150	100	PK	Vertical

# Test Report

Project Information			
EUT:	WiFi Module	Environment:	23.6°C 52%
Model:	SKO.WB920TU.3	SN:	
Mode:	2DH5_2402	Voltage:	DC 5V+/-0.3
Customer:		Engineer:	Soho Liu
Remark:			

Start of Test: 2023-10-31 14:19:54

## Test Graph

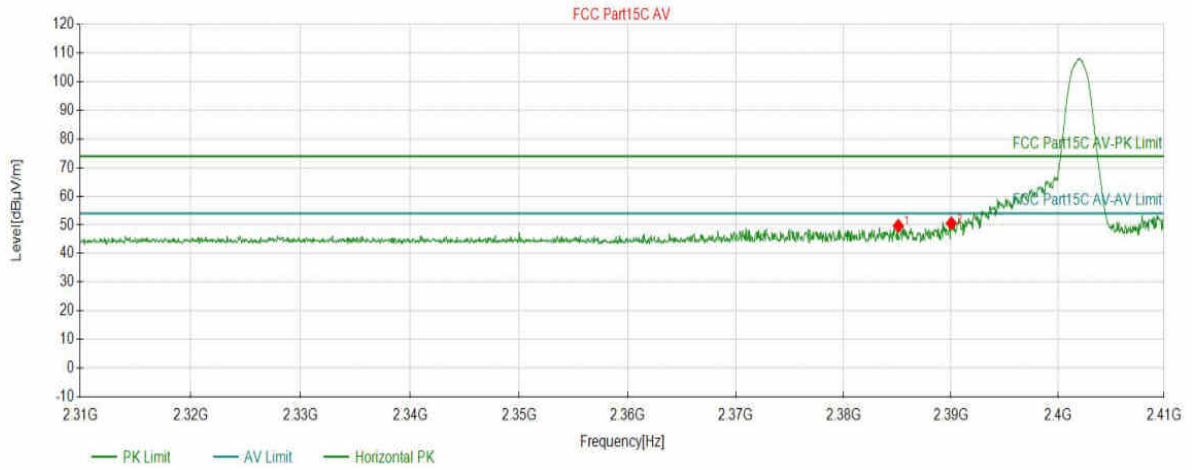

## Suspected Data List

NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2385.0875	49.65	5.95	74.00	24.35	150	306	PK	Horizontal
2	2390.0400	50.55	5.95	74.00	23.45	150	326	PK	Horizontal




# Test Report

Project Information			
EUT:	WiFi Module	Environment:	23.6°C 52%
Model:	SKO.WB920TU.3	SN:	
Mode:	2DH5_2402	Voltage:	DC 5V+/-0.3
Customer:		Engineer:	Soho Liu
Remark:			

Start of Test: 2023-10-31 14:20:42

## Test Graph

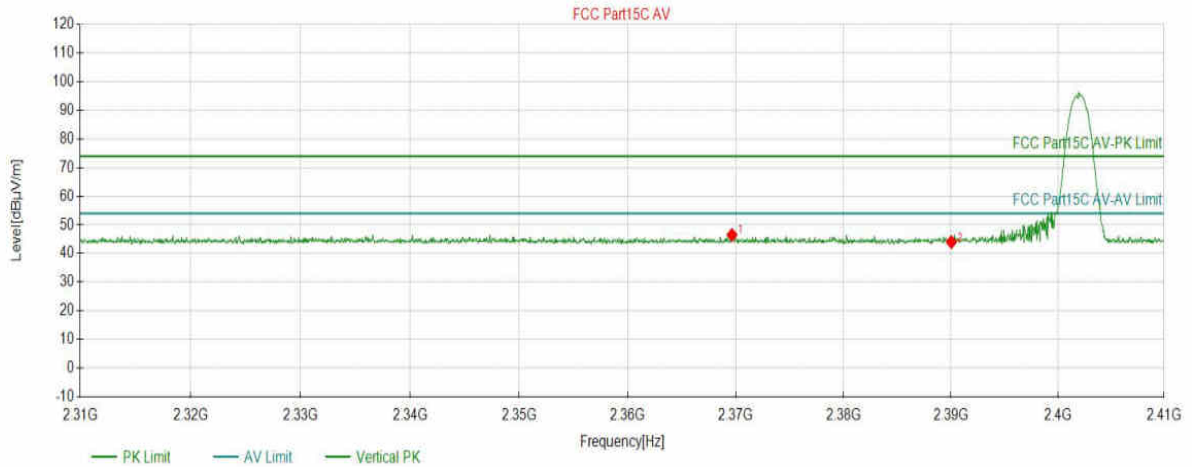


Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2369.6298	46.51	5.97	74.00	27.49	150	359	PK	Vertical
2	2390.0400	44.00	5.95	74.00	30.00	150	295	PK	Vertical

# Test Report

Project Information			
EUT:	WiFi Module	Environment:	23.6°C 52%
Model:	SKO.WB920TU.3	SN:	
Mode:	2DH5_2480	Voltage:	DC 5V+/-0.3
Customer:		Engineer:	Soho Liu
Remark:			

Start of Test: 2023-10-31 14:23:57

## Test Graph

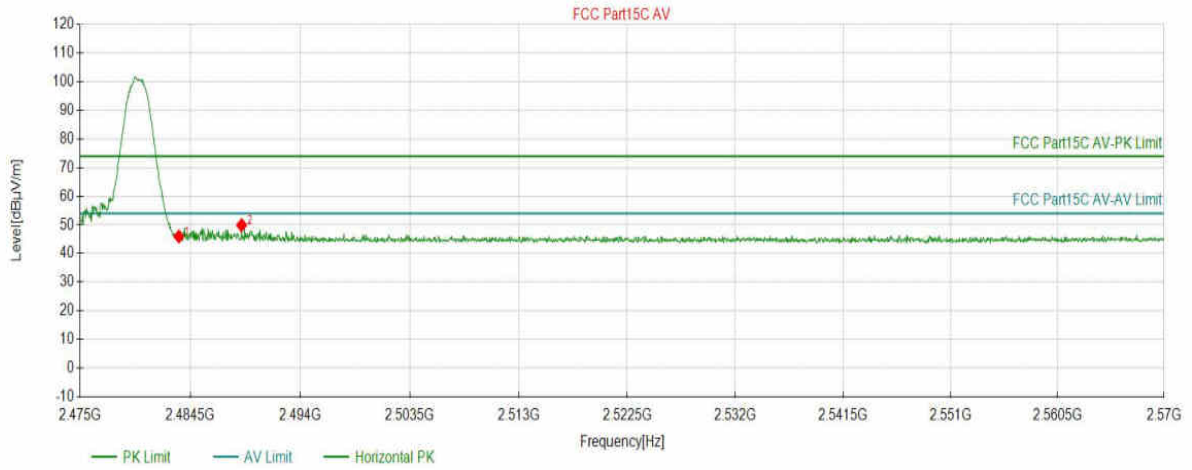


Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2483.5068	45.95	6.50	74.00	28.05	150	71	PK	Horizontal
2	2488.9245	49.93	6.54	74.00	24.07	150	199	PK	Horizontal

# Test Report

Project Information			
EUT:	WiFi Module	Environment:	23.6°C 52%
Model:	SKO.WB920TU.3	SN:	
Mode:	2DH5_2480	Voltage:	DC 5V+/-0.3
Customer:		Engineer:	Soho Liu
Remark:			

Start of Test: 2023-10-31 14:24:45

## Test Graph

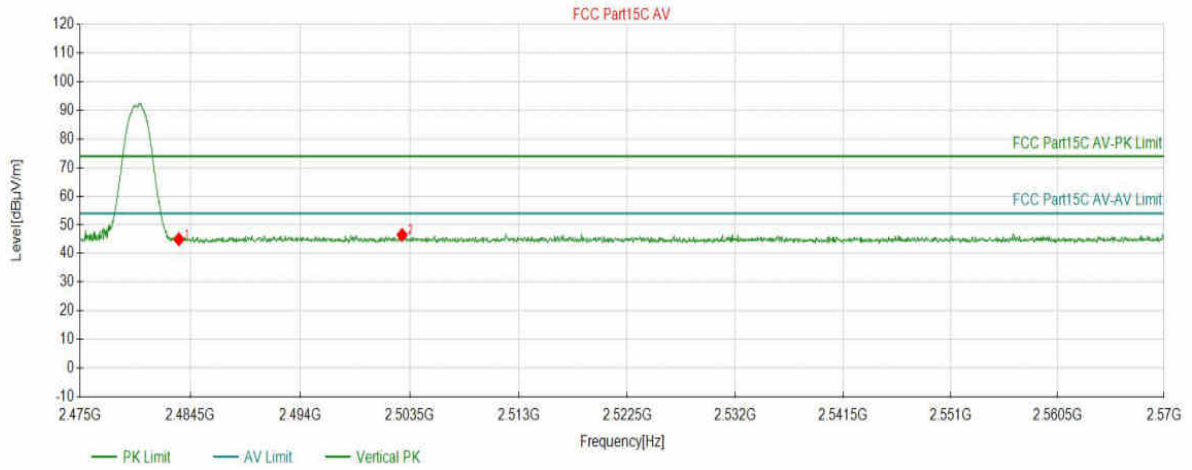


Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2483.5068	44.99	6.50	74.00	29.01	150	211	PK	Vertical
2	2502.8489	46.52	6.62	74.00	27.48	150	235	PK	Vertical

# Test Report

Project Information			
EUT:	WiFi Module	Environment:	23.6°C 52%
Model:	SKO.WB920TU.3	SN:	
Mode:	3DH5_2402	Voltage:	DC 5V+/-0.3
Customer:		Engineer:	Soho Liu
Remark:			

Start of Test: 2023-10-31 14:27:22

## Test Graph

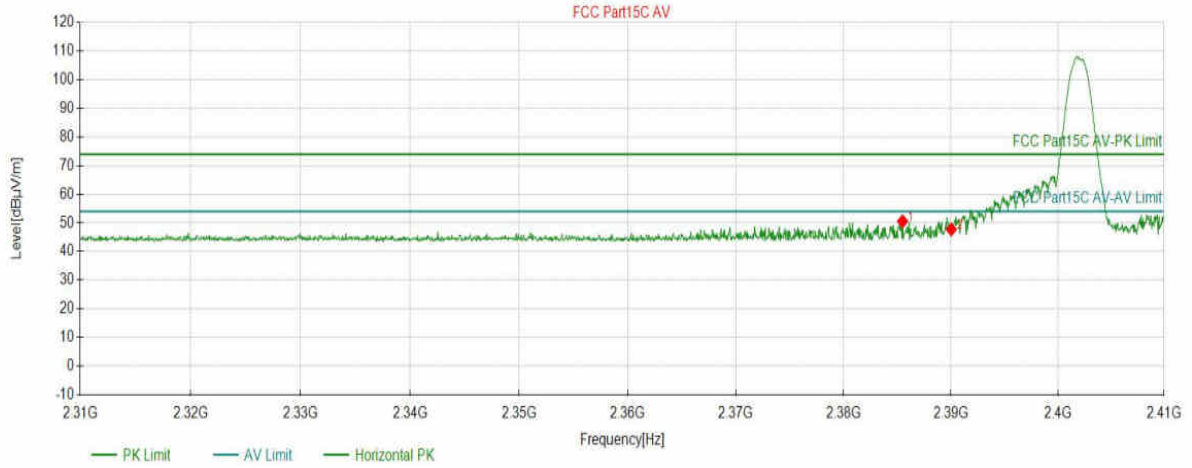

## Suspected Data List


NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2385.4877	50.56	5.95	74.00	23.44	150	303	PK	Horizontal
2	2390.0400	47.76	5.95	74.00	26.24	150	298	PK	Horizontal

# Test Report

Project Information			
EUT:	WiFi Module	Environment:	23.6°C 52%
Model:	SKO.WB920TU.3	SN:	
Mode:	3DH5_2402	Voltage:	DC 5V+/-0.3
Customer:		Engineer:	Soho Liu
Remark:			

Start of Test: 2023-10-31 14:28:10

## Test Graph

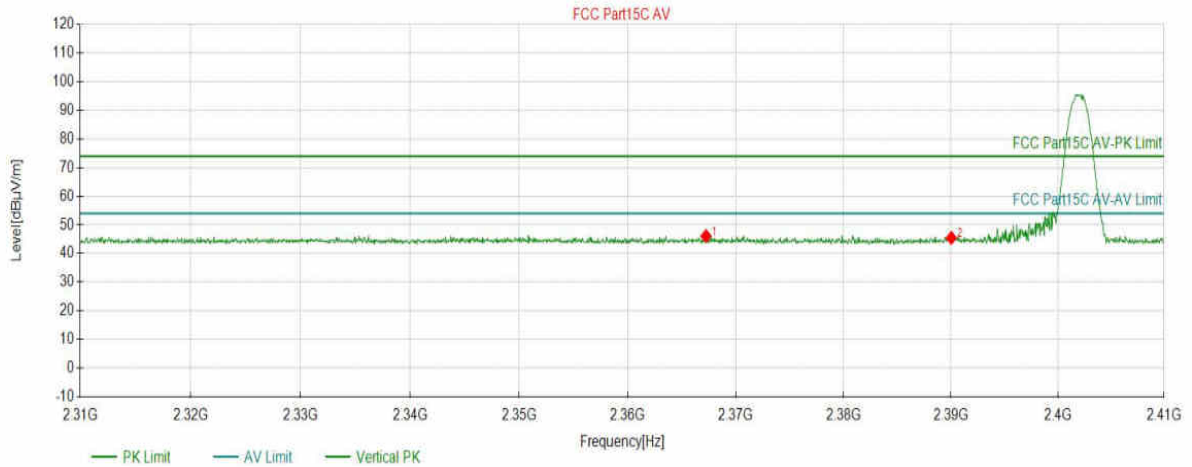


Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2367.2286	46.10	5.97	74.00	27.90	150	258	PK	Vertical
2	2390.0400	45.46	5.95	74.00	28.54	150	39	PK	Vertical

# Test Report

Project Information			
EUT:	WiFi Module	Environment:	23.6°C 52%
Model:	SKO.WB920TU.3	SN:	
Mode:	3DH5_2480	Voltage:	DC 5V+/-0.3
Customer:		Engineer:	Soho Liu
Remark:			

Start of Test: 2023-10-31 14:33:48

## Test Graph

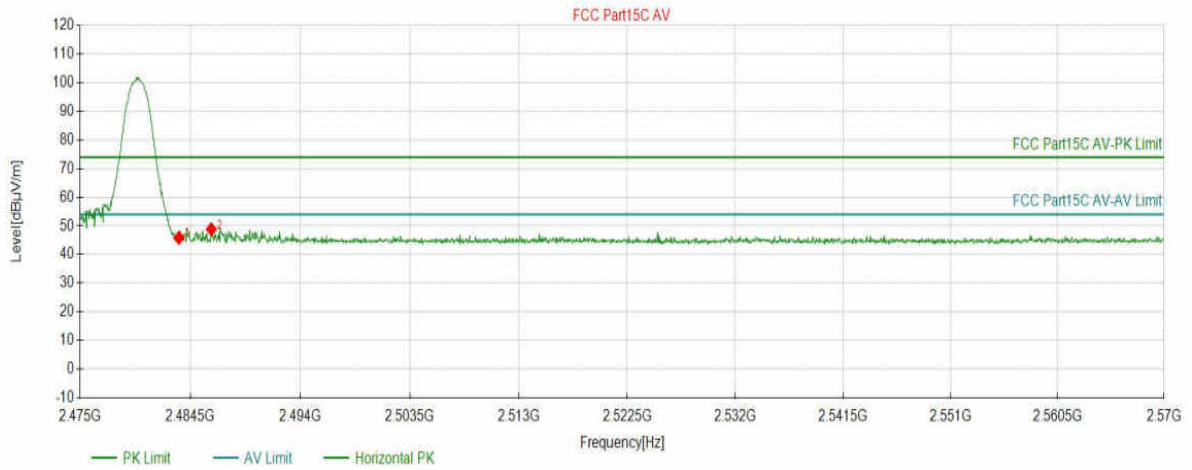


Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2483.5068	45.83	6.50	74.00	28.17	150	127	PK	Horizontal
2	2486.3107	48.83	6.52	74.00	25.17	150	198	PK	Horizontal

# Test Report

Project Information			
EUT:	WiFi Module	Environment:	23.6°C 52%
Model:	SKO.WB920TU.3	SN:	
Mode:	3DH5_2480	Voltage:	DC 5V+/-0.3
Customer:		Engineer:	Soho Liu
Remark:			

Start of Test: 2023-10-31 14:34:37

## Test Graph

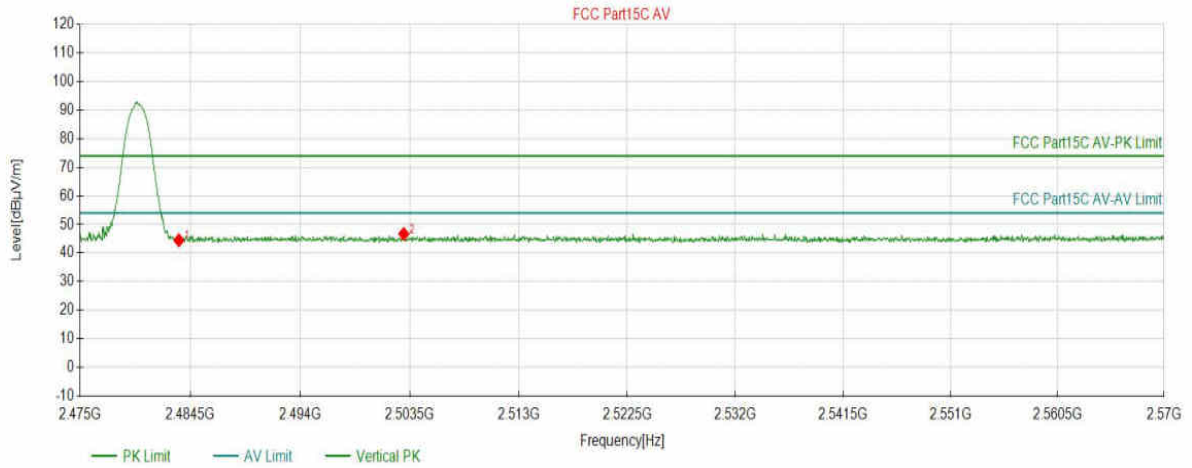

Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2483.5068	44.48	6.50	74.00	29.52	150	99	PK	Vertical
2	2502.9915	46.70	6.62	74.00	27.30	150	28	PK	Vertical

**END OF REPORT**