

TEST REPORT

Report No.: BCTC2209116707-2E

Applicant: Gigastone Corporation

Product Name: Power Bank

Model/Type Ref.: MP-10000

Tested Date: 2022-09-14 to 2022-09-28

Issued Date: 2022-09-28

Shenzhen BCTC Testing Co., Ltd.



SHENZHEN

FCC ID: 2AR89-MP-10000

Product Name: Power Bank
Trademark: N/A
Model/Type Ref.: MP-10000
UG10BW
Prepared For: Gigastone Corporation
Address: 12F, No, 480, Rueiguang Road Neihu District, Taipei 114, Taiwan
Manufacturer: Shenzhen usbangel Technology Limited
Address: 402,502,602, No.28 Hongyuan Road, Pingdong Community, Pingdi Sub-District, Longgang District, Shenzhen, PRC.
Prepared By: Shenzhen BCTC Testing Co., Ltd.
Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China.
Sample Received Date: 2022-09-14
Sample tested Date: 2022-09-14 to 2022-09-28
Issue Date: 2022-09-28
Report No.: BCTC2209116707-2E
Test Standards: FCC CFR 47 part1, 1.1307(b), 1.1310
Test Results: PASS

Tested by:



Brave Zeng/ Project Handler

Approved by:



Zero Zhou/Reviewer

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

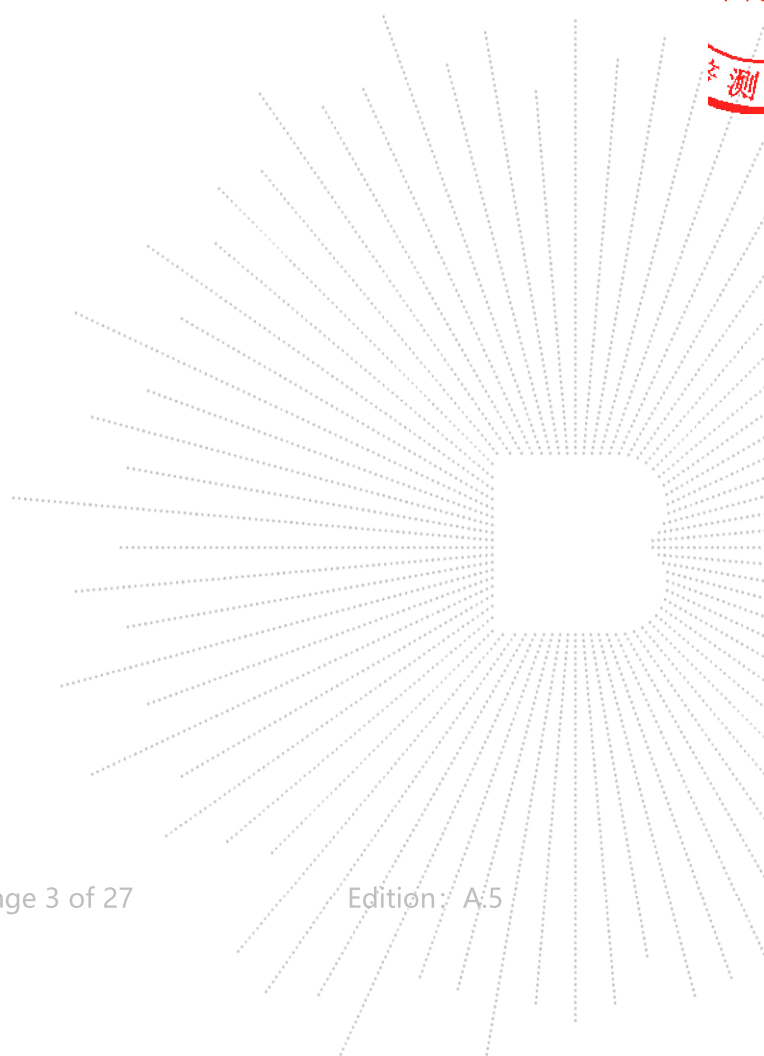


Table Of Content

Test Report Declaration	Page
1. Version	4
2. Product Information	5
2.1 Product Information	5
2.2 Support Equipment	5
2.3 Test Mode	6
3. Test Facility And Test Instrument Used	7
3.1 Test Facility	7
3.2 Test Instrument Used	7
4. Method Of Measurement	8
4.1 Applicable Standard	8
4.2 Block Diagram Of Test Setup	8
4.3 Limit	9
4.4 Test Procedure	9
4.5 Equipment Approval Considerations	10
4.6 E And H Field Strength	11
5. Photographs Of Test Set-Up	18

(Note: N/A Means Not Applicable)


TC
3C
PPR
測



1. Version

Report No.	Issue Date	Description	Approved
BCTC2209116707-2E	2022-09-28	Original	Valid

TEC
TC
OVER
检

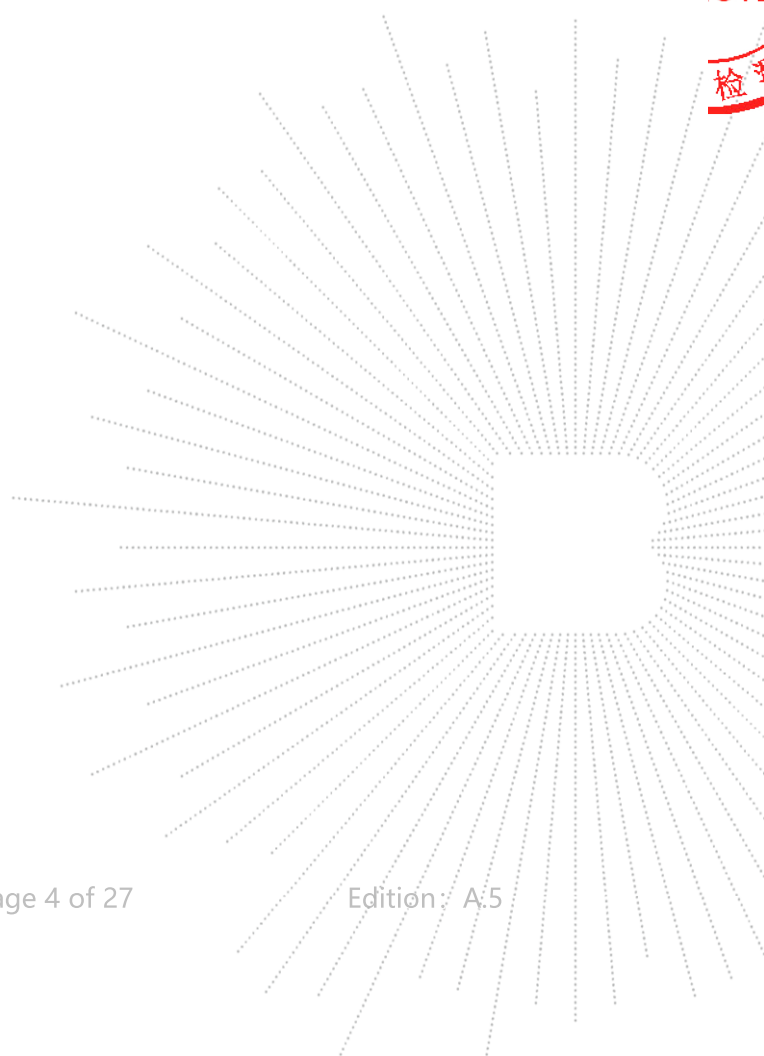

2. Product Information

2.1 Product Information


Model/Type reference:	MP-10000 UG10BW
Model differences:	All the model are the same circuit and RF module, except model names.
Hardware Version:	N/A
Software Version:	N/A
Product Description:	Power Bank
Operation Frequency:	115kHz-205kHz
Antenna installation:	loop coil antenna
Ratings:	Input:Type-C:5V3A,9V2A
	Lightning:5V2A,9V2A
	Output:Type-C:5V3A,9V2.22A,12V1.5A
	USB A:5V3A,9V2A,12V1.5A
	Total output power:5V3A Wireless Output:5W/7.5W/10W/15W

2.2 Support Equipment

No.	Device Type	Brand	Model	Series No.	Note
1.	Power Bank	N/A	MP-10000	UG10BW	EUT
	Dummy load	N/A	DL01	N/A	Auxiliary

Notes:

- All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

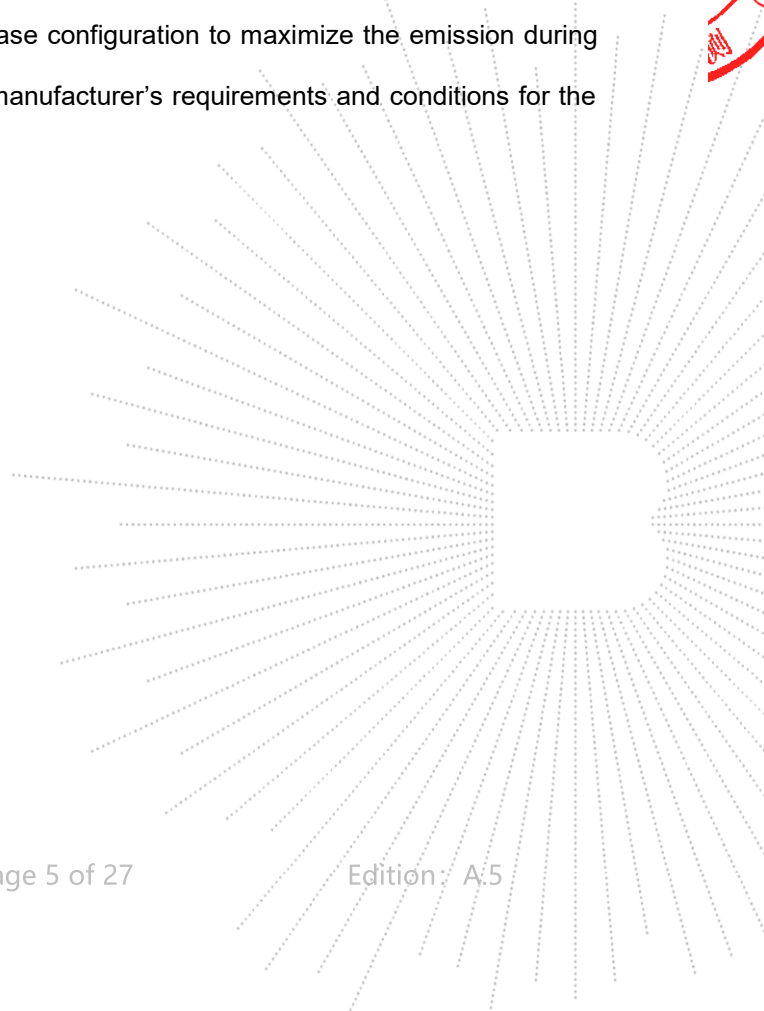

2.3 Test Mode

Test Modes 1	Charging +Wireless 5W
Test Modes 2	Charging +Wireless 7.5W
Test Modes 3	Charging+Wireless 10W
Test Modes 4	Charging +Wireless 15W
Test Modes 5	Wireless 5W
Test Modes 6	Wireless 7.5W
Test Modes 7	Wireless 10W
Test Modes 8	Wireless 15W
Test Modes 9	Type-C Output DC 5V 1.4A+ Wireless 5W

CO., LTD

3. Test Facility And Test Instrument Used


3.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850
 A2LA certificate registration number is: CN1212
 ISED Registered No.: 23583
 ISED CAB identifier: CN0017

3.2 Test Instrument Used

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Electromagnet-ic radiation tester	Wavecontrol	SMP160	19SN0980	May 26, 2022	May 25, 2023
Electromagne-tic field probe	Wavecontrol	WP400-3	20WP120082	Sept. 08, 2022	Sept. 07, 2023
843 Chamber	ETS	843	84301	Aug. 27, 2020	Aug. 26, 2023
Software	Frad	EZ-EMC	EMC-CON 3A1	\	\

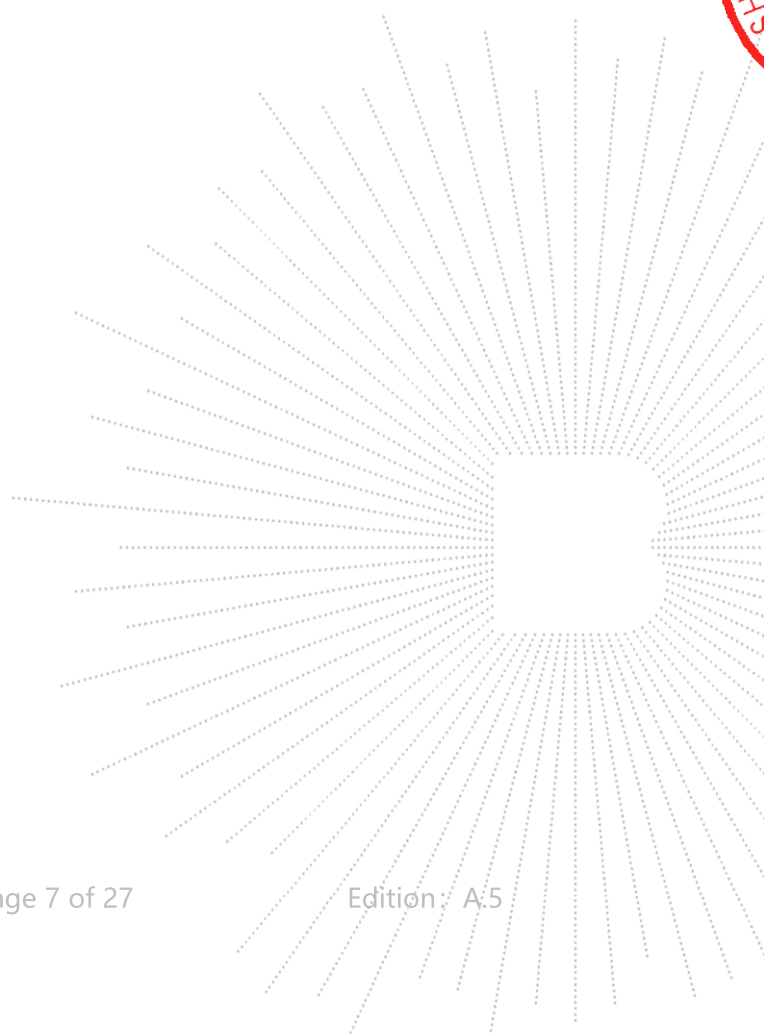


4. Method Of Measurement

4.1 Applicable Standard


According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines. According to §1.1310 and §2.1093 RF exposure is calculated. According KDB680106 D01v03: RF Exposure Wireless Charging Apps v02.


4.2 Block Diagram Of Test Setup

A:

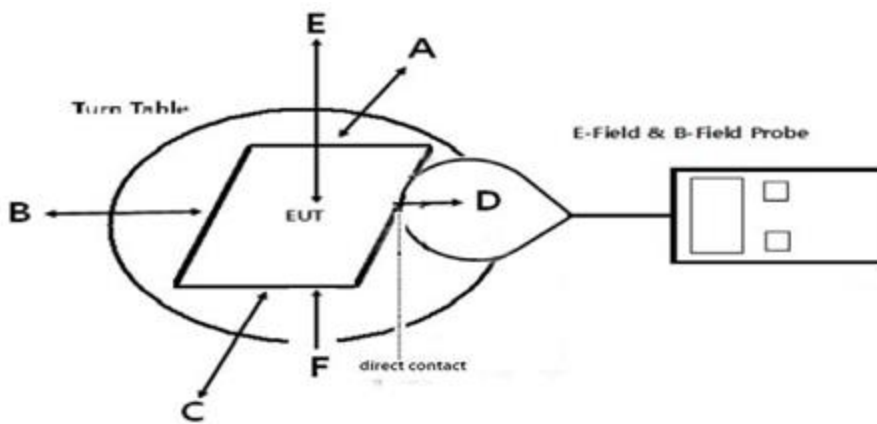

B:

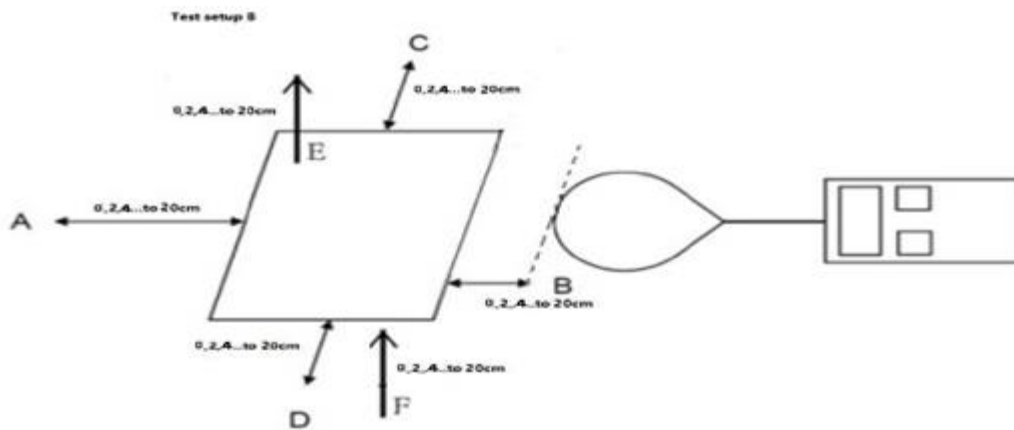

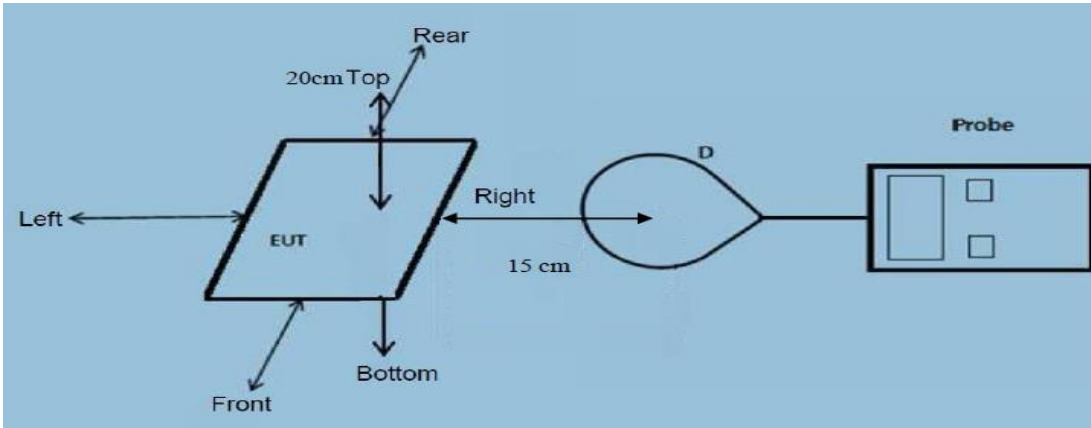

4.3 Limit

Limits for Occupational / Controlled Exposure				
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

Limits for General Population / Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180 / f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1	30

4.4 Test Procedure

a) he RF exposure test was performed in anechoic chamber.

b) The measurement probe was placed at 0 cm surrounding the device for test setup A; and the measurement Probe was placed from 0 cm to 20 cm, in 2 cm maximum increment measured from the edge of the device For the test setup B.

c)The highest emission level was recorded and compared with limit as soon as measurement of eachd) The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E) were completed.

d)The EUT was measured according to the dictates of KDB680106 D01v03r01

f)Remark:

The EUT's test position A, B, C, D , E and F is valid for the E and H field measurements.

4.5 Equipment Approval Considerations

The EUT does comply with item 5(b) of KDB 680106 D01v03

1) Power transfer frequency is less than 1MHz

Yes, the device operate in the frequency range from 115-205KHz

2) Output power from each primary coil is less than or equal to 15 watts.

Yes, the maximum output power of the primary coil is 15W.

3) The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that able to detect and allow coupling onlybetween individual pair of coils.

No, the prototype has only a single coil.

4) Client device is inserted in or placed directly in contact with the transmitter.

Yes, client device is placed directly in contact with the transmitter.

5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).

No,The product is portable

6) The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

Yes, the EUT field strength levels are 10% x MPE limit.

4.6 E And H Field Strength

For setup A:
Worst Case Operating Mode: Mode 7

H-Filed Strength at 0 cm from edges surrounding the EUT (A/m)


Frequency Range (KHz)	Operation condition	Test Position A (A/m)	Test Position B (A/m)	Test Position C (A/m)	Test Position D (A/m)	Test Position E (A/m)	Test Position F (A/m)	Limits (A/m)
115kHz-205kHz	1% battery	0.072	0.078	0.084	0.107	0.038	0.062	1.63
115kHz-205kHz	50% battery	0.063	0.081	0.093	0.106	0.031	0.072	1.63
115kHz-205kHz	99% battery	0.069	0.078	0.074	0.100	0.034	0.071	1.63

Frequency Range (KHz)	Operation condition	Test Position A (uT)	Test Position B (uT)	Test Position C (uT)	Test Position D (uT)	Test Position E (uT)	Test Position F (uT)
115kHz-205kHz	1% battery	0.087	0.102	0.110	0.136	0.050	0.088
115kHz-205kHz	50% battery	0.087	0.094	0.104	0.120	0.045	0.111
115kHz-205kHz	99% battery	0.092	0.099	0.106	0.134	0.057	0.103

Note: A/m=uT/1.25

E-Filed Strength at 0 cm from edges surrounding the EUT (V/m)

Frequency Range (KHz)	Operation condition	Test Position A (V/m)	Test Position B (V/m)	Test Position C (V/m)	Test Position D (V/m)	Test Position E (V/m)	Test Position F (V/m)	Limits (V/m)
115kHz-205kHz	1% battery	0.070	0.081	0.088	0.109	0.040	0.070	614
115kHz-205kHz	50% battery	0.069	0.075	0.084	0.096	0.036	0.089	614
115kHz-205kHz	99% battery	0.073	0.079	0.085	0.107	0.046	0.082	614

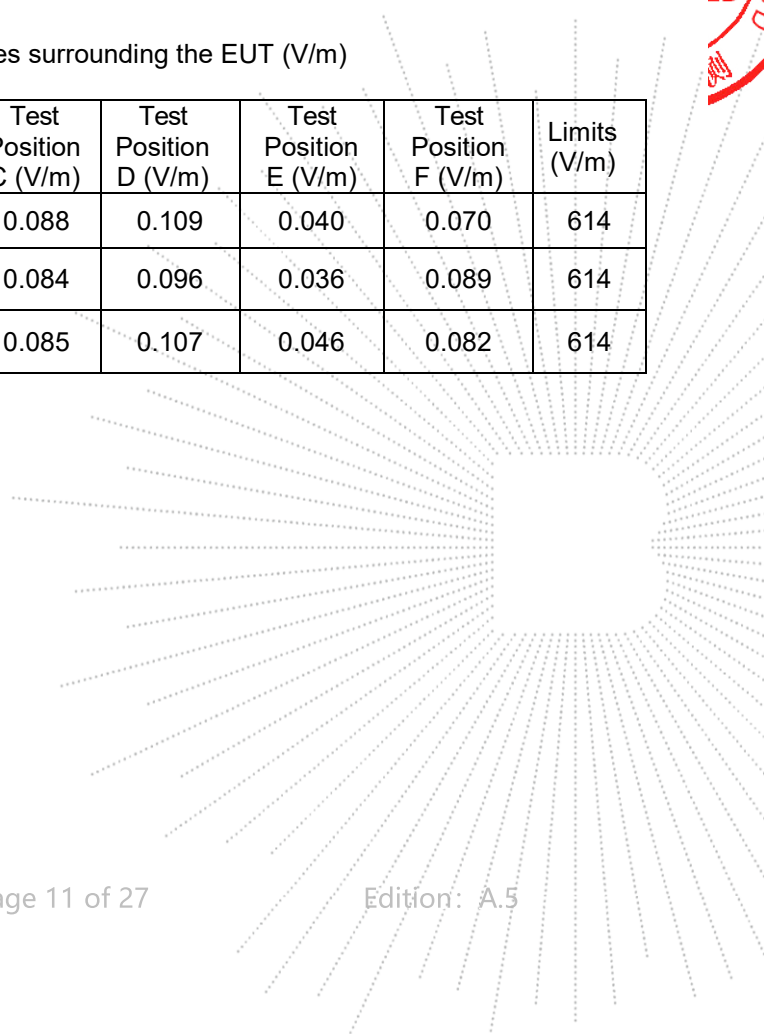

For setup B:
Worst Case Operating Mode: Mode 8

1% battery

H-Filed Strength at (Distance from 0cm to 20cm and with 2-cm increments) surrounding the EUT (A/m)

Test distance (cm)	Test Position A(A/m)	Test Position B(A/m)	Test Position C(A/m)	Test Position D(A/m)	Test Position E(A/m)	Test Position F(A/m)	Limits (A/m)
2	0.069	0.073	0.073	0.103	0.032	0.068	1.63
4	0.076	0.060	0.073	0.107	0.037	0.060	1.63
6	0.068	0.070	0.071	0.100	0.032	0.082	1.63
8	0.069	0.077	0.089	0.105	0.043	0.076	1.63
10	0.074	0.077	0.075	0.100	0.044	0.088	1.63
12	0.061	0.062	0.086	0.106	0.046	0.079	1.63
14	0.072	0.072	0.073	0.091	0.033	0.099	1.63
16	0.071	0.061	0.063	0.096	0.048	0.065	1.63
18	0.071	0.080	0.091	0.107	0.030	0.069	1.63
20	0.069	0.085	0.075	0.091	0.038	0.070	1.63

Test distance (cm)	Test Position A(uT)	Test Position B(uT)	Test Position C(uT)	Test Position D(uT)	Test Position E(uT)	Test Position F(uT)
2	0.086	0.091	0.091	0.129	0.040	0.085
4	0.095	0.075	0.092	0.134	0.047	0.075
6	0.084	0.087	0.088	0.126	0.040	0.102
8	0.086	0.097	0.111	0.132	0.054	0.095
10	0.092	0.096	0.093	0.125	0.055	0.110
12	0.077	0.077	0.108	0.132	0.057	0.099
14	0.090	0.090	0.091	0.114	0.041	0.124
16	0.089	0.076	0.079	0.119	0.060	0.081
18	0.089	0.101	0.113	0.133	0.038	0.086
20	0.086	0.107	0.093	0.114	0.047	0.088

Note: A/m=uT/1.25

E-Filed Strength at (Distance from 0cm to 20cm and with 2-cm increments) surrounding the EUT (V/m)

Test distance (cm)	Test Position A(V/m)	Test Position B(V/m)	Test Position C(V/m)	Test Position D(V/m)	Test Position E(V/m)	Test Position F(V/m)	Limits (V/m)
2	0.074	0.088	0.080	0.109	0.047	0.074	614
4	0.067	0.086	0.082	0.102	0.037	0.066	614
6	0.071	0.081	0.082	0.102	0.048	0.064	614
8	0.063	0.069	0.074	0.102	0.034	0.082	614
10	0.078	0.081	0.097	0.090	0.032	0.097	614
12	0.077	0.078	0.091	0.099	0.046	0.078	1.63
14	0.072	0.085	0.061	0.106	0.050	0.091	614
16	0.070	0.084	0.086	0.099	0.035	0.076	614
18	0.069	0.067	0.089	0.104	0.050	0.083	614
20	0.062	0.066	0.086	0.100	0.046	0.073	614

50% battery

H-Filed Strength at (Distance from 0cm to 20cm and with 2-cm increments) surrounding the EUT (A/m)


Test distance (cm)	Test Position A(A/m)	Test Position B(A/m)	Test Position C(A/m)	Test Position D(A/m)	Test Position E(A/m)	Test Position F(A/m)	Limits (A/m)
2	0.062	0.089	0.087	0.098	0.041	0.099	1.63
4	0.071	0.064	0.086	0.092	0.038	0.065	1.63
6	0.068	0.078	0.091	0.096	0.047	0.071	1.63
8	0.078	0.087	0.095	0.107	0.032	0.069	1.63
10	0.078	0.076	0.079	0.094	0.047	0.075	1.63
12	0.078	0.088	0.068	0.097	0.046	0.100	1.63
14	0.073	0.069	0.069	0.094	0.049	0.080	1.63
16	0.077	0.079	0.085	0.109	0.038	0.068	1.63
18	0.071	0.072	0.099	0.097	0.047	0.082	1.63
20	0.070	0.083	0.064	0.092	0.050	0.064	1.63

Test distance (cm)	Test Position A(μ T)	Test Position B(μ T)	Test Position C(μ T)	Test Position D(μ T)	Test Position E(μ T)	Test Position F(μ T)
2	0.078	0.111	0.109	0.123	0.052	0.123
4	0.088	0.080	0.108	0.115	0.047	0.081
6	0.085	0.098	0.114	0.120	0.059	0.089
8	0.097	0.108	0.118	0.134	0.040	0.086
10	0.098	0.095	0.098	0.118	0.059	0.093
12	0.097	0.110	0.085	0.121	0.057	0.125
14	0.091	0.087	0.086	0.117	0.061	0.099
16	0.096	0.098	0.106	0.137	0.047	0.084
18	0.089	0.090	0.124	0.122	0.059	0.103
20	0.087	0.103	0.079	0.115	0.062	0.080

Note: $A/m = \mu T / 1.25$

E-Filed Strength at (Distance from 0cm to 20cm and with 2-cm increments) surrounding the EUT (V/m)

Test distance (cm)	Test Position A(V/m)	Test Position B(V/m)	Test Position C(V/m)	Test Position D(V/m)	Test Position E(V/m)	Test Position F(V/m)	Limits (V/m)
2	0.078	0.073	0.078	0.102	0.043	0.097	614
4	0.075	0.080	0.067	0.097	0.042	0.066	614
6	0.064	0.070	0.064	0.092	0.032	0.082	614
8	0.077	0.068	0.085	0.094	0.042	0.076	614
10	0.073	0.079	0.087	0.093	0.045	0.089	614
12	0.078	0.081	0.073	0.096	0.046	0.070	614
14	0.078	0.065	0.090	0.106	0.048	0.066	614
16	0.071	0.062	0.083	0.094	0.046	0.065	614
18	0.078	0.072	0.076	0.099	0.032	0.090	614
20	0.076	0.077	0.068	0.109	0.043	0.075	614

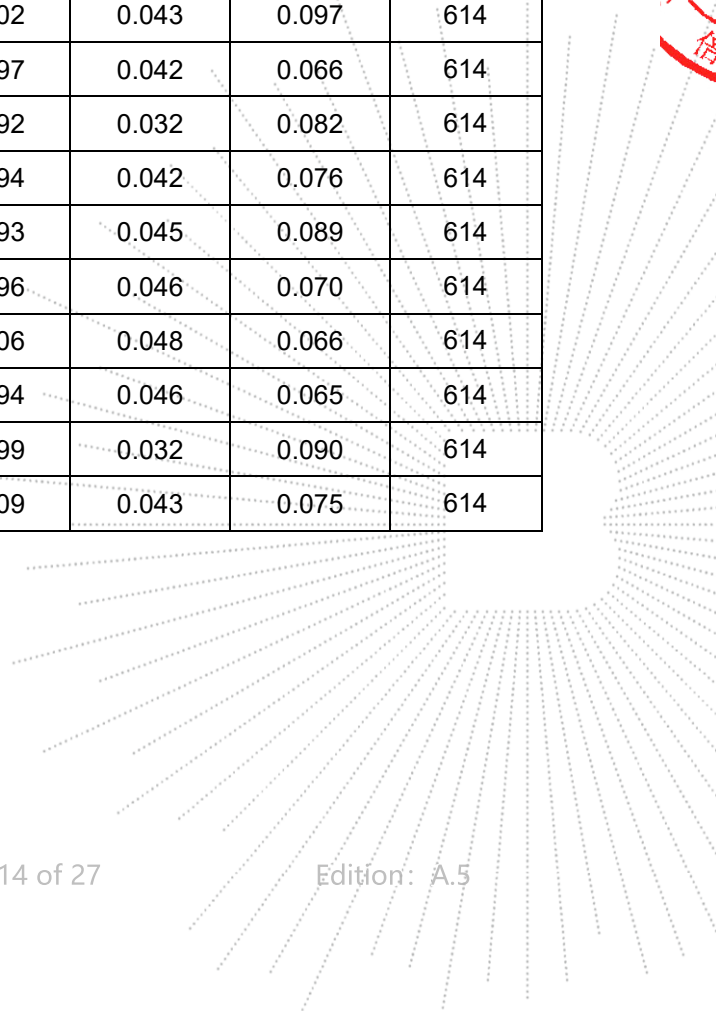

99% battery

H-Filed Strength at (Distance from 0cm to 20cm and with 2-cm increments) surrounding the EUT (A/m)

Test distance (cm)	Test Position A(A/m)	Test Position B(A/m)	Test Position C(A/m)	Test Position D(A/m)	Test Position E(A/m)	Test Position F(A/m)	Limits (A/m)
2	0.076	0.062	0.092	0.091	0.045	0.091	1.63
4	0.069	0.087	0.067	0.104	0.037	0.064	1.63
6	0.079	0.073	0.077	0.103	0.045	0.062	1.63
8	0.065	0.085	0.071	0.099	0.034	0.061	1.63
10	0.061	0.067	0.091	0.109	0.047	0.064	1.63
12	0.076	0.064	0.091	0.098	0.046	0.087	1.63
14	0.072	0.075	0.070	0.099	0.044	0.099	1.63
16	0.070	0.088	0.063	0.096	0.039	0.082	1.63
18	0.076	0.061	0.071	0.090	0.045	0.068	1.63
20	0.076	0.085	0.061	0.108	0.034	0.070	1.63

Test distance (cm)	Test Position A(uT)	Test Position B(uT)	Test Position C(uT)	Test Position D(uT)	Test Position E(uT)	Test Position F(uT)
2	0.095	0.077	0.115	0.114	0.056	0.113
4	0.086	0.109	0.083	0.130	0.047	0.080
6	0.098	0.091	0.096	0.129	0.056	0.078
8	0.082	0.106	0.089	0.124	0.042	0.077
10	0.077	0.084	0.114	0.136	0.059	0.080
12	0.095	0.081	0.114	0.122	0.057	0.109
14	0.089	0.094	0.088	0.124	0.055	0.124
16	0.087	0.109	0.079	0.120	0.048	0.103
18	0.095	0.077	0.089	0.113	0.056	0.084
20	0.095	0.107	0.076	0.135	0.042	0.087


 Note: $A/m = uT/1.25$



E-Filed Strength at (Distance from 0cm to 20cm and with 2-cm increments) surrounding the EUT (V/m)

Test distance (cm)	Test Position A(V/m)	Test Position B(V/m)	Test Position C(V/m)	Test Position D(V/m)	Test Position E(V/m)	Test Position F(V/m)	Limits (V/m)
2	0.080	0.085	0.074	0.096	0.031	0.083	614
4	0.075	0.070	0.062	0.109	0.047	0.073	614
6	0.072	0.074	0.094	0.097	0.045	0.070	614
8	0.060	0.070	0.089	0.096	0.036	0.065	614
10	0.061	0.087	0.099	0.097	0.049	0.092	614
12	0.068	0.088	0.092	0.096	0.046	0.090	614
14	0.064	0.066	0.091	0.097	0.033	0.087	614
16	0.065	0.071	0.069	0.101	0.034	0.064	614
18	0.077	0.074	0.060	0.094	0.035	0.073	614
20	0.079	0.083	0.092	0.107	0.042	0.097	614

TE
 TC
 OVE
 検

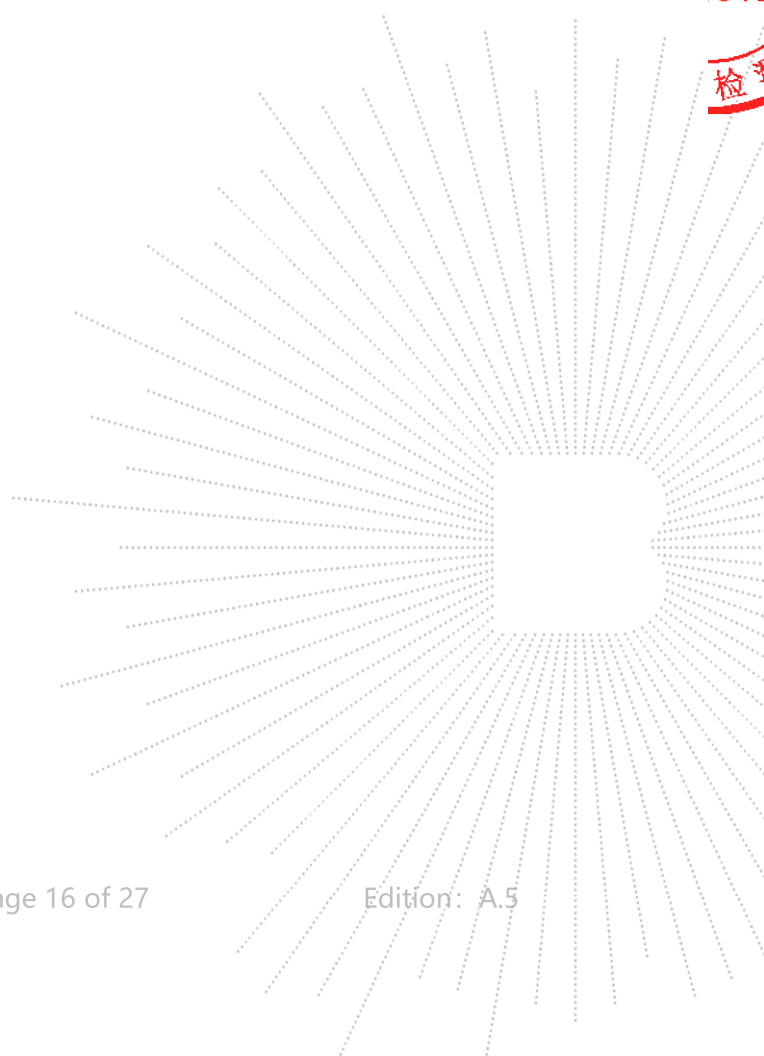

AC Mode
 Worst Case Operating Mode: Mode 4

E-Field Strength at 15 cm surrounding the EUT and 20cm above the top surface of the EUT


Battery level	Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Test Position Top	10% Limits Test (V/m)	Limits Test (V/m)
1%	0.115-0.205	0.076	0.108	0.022	0.092	0.038	0.142	61.4	614
50%	0.115-0.205	0.015	0.004	0.002	0.090	0.033	0.053	61.4	614
99%	0.115-0.205	0.046	0.001	0.013	0.181	0.084	0.029	61.4	614

H-Field Strength at 15 cm surrounding the EUT and 20cm above the top surface of the EUT

Battery level	Frequency Range (MHz)	Test Position A(uT)	Test Position B(uT)	Test Position C(uT)	Test Position D(uT)	Test Position E(uT)	Test Position Top(uT)
1%	0.115-0.205	0.025	0.056	0.037	0.088	0.010	0.004
50%	0.115-0.205	0.071	0.121	0.029	0.161	0.016	0.001
99%	0.115-0.205	0.081	0.075	0.018	0.108	0.004	0.034


Battery level	Frequency Range (MHz)	Test Position A(A/m)	Test Position B(A/m)	Test Position C(A/m)	Test Position D(A/m)	Test Position E(A/m)	Test Position Top(A/m)	10% Limits Test (A/m)	Limits Test (A/m)
1%	0.115-0.205	0.020	0.045	0.030	0.070	0.008	0.003	0.163	1.63
50%	0.115-0.205	0.056	0.097	0.023	0.129	0.013	0.001	0.163	1.63
99%	0.115-0.205	0.065	0.060	0.014	0.087	0.003	0.027	0.163	1.63


Note: A/m = uT ÷ 1.25


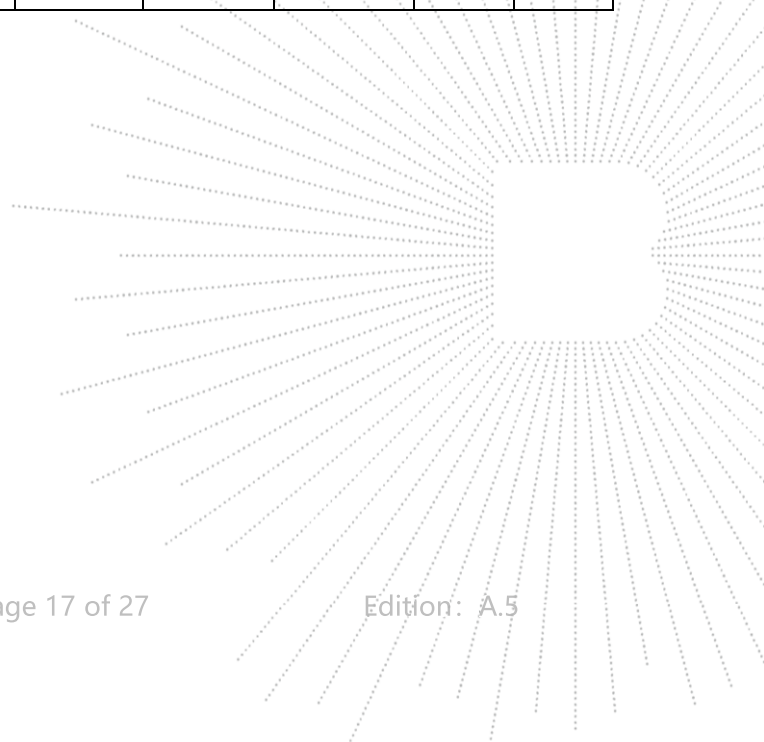


5. Photographs Of Test Set-Up


0CM

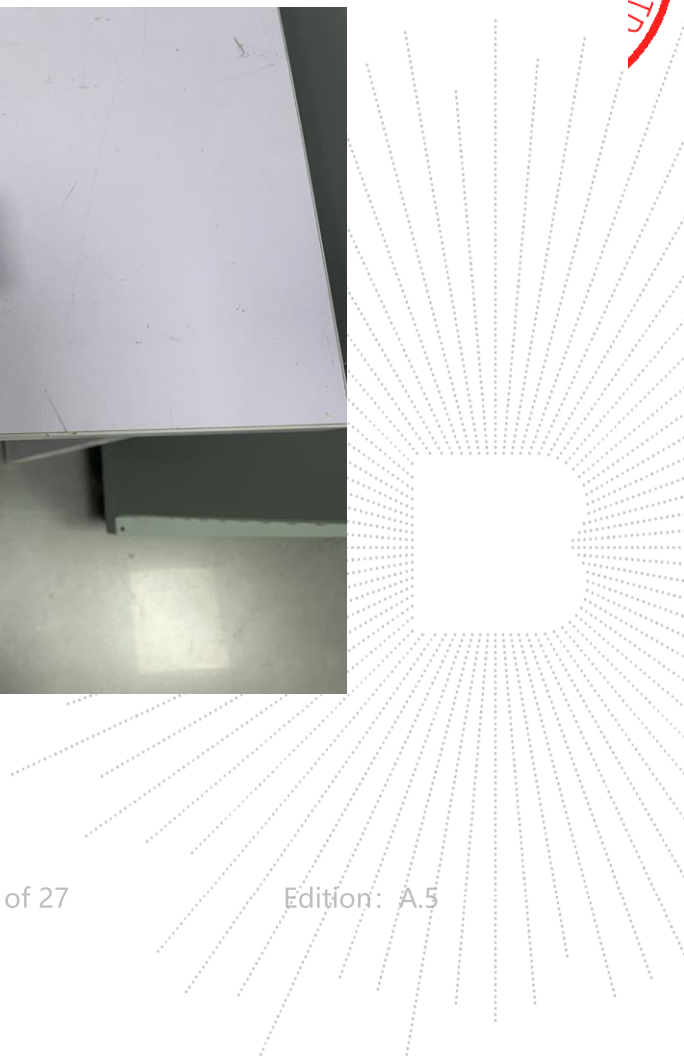

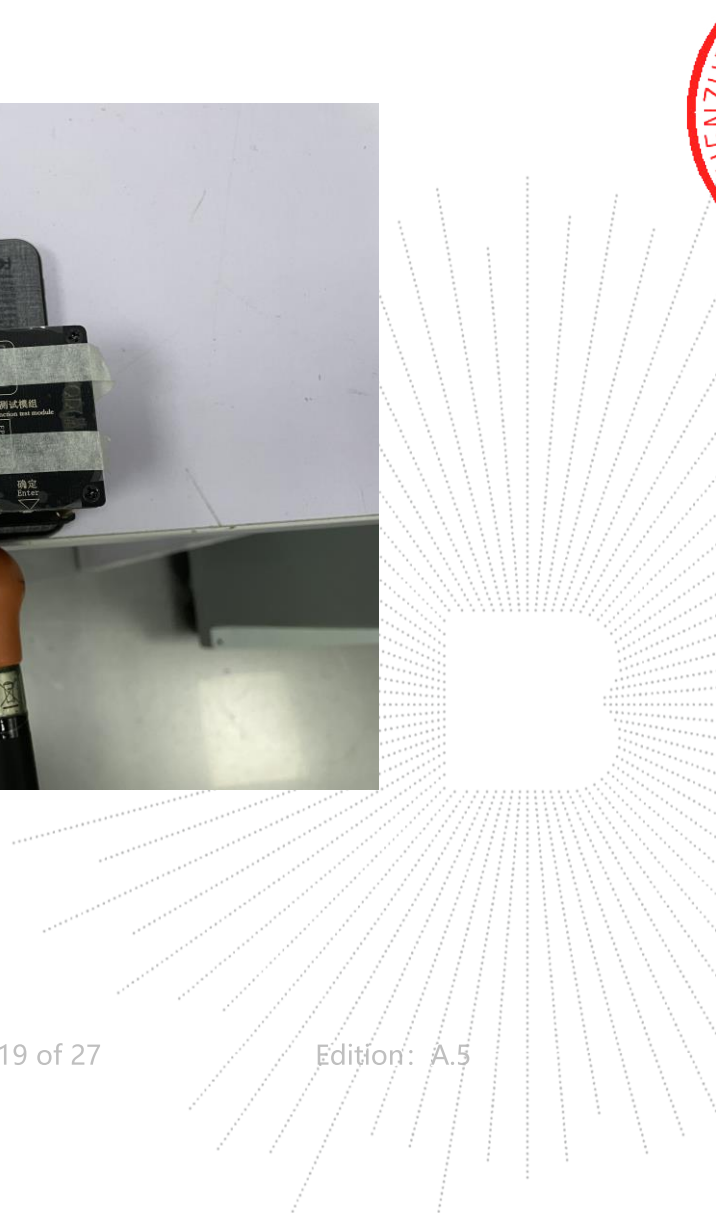

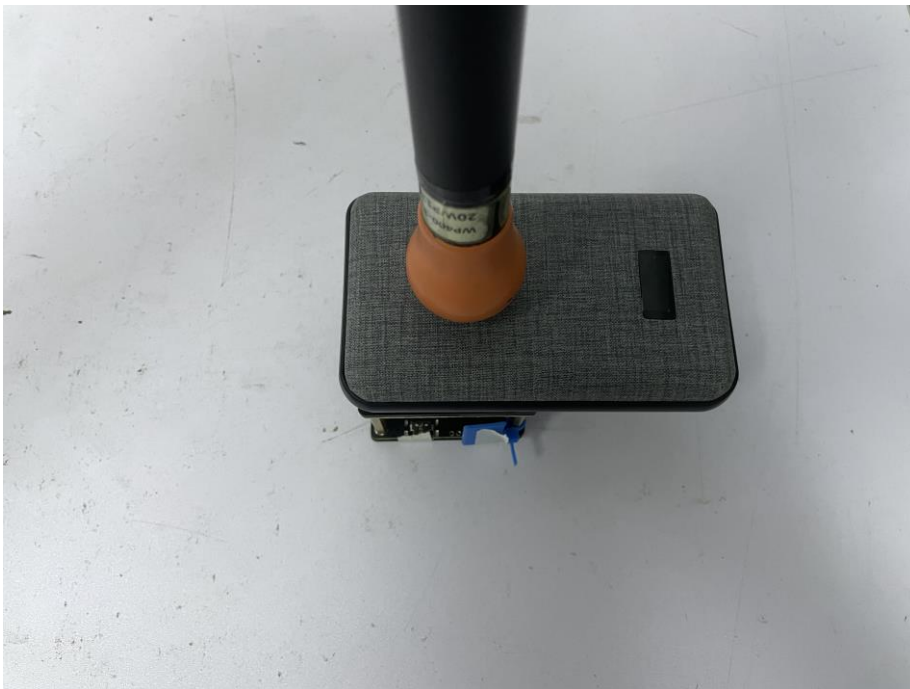
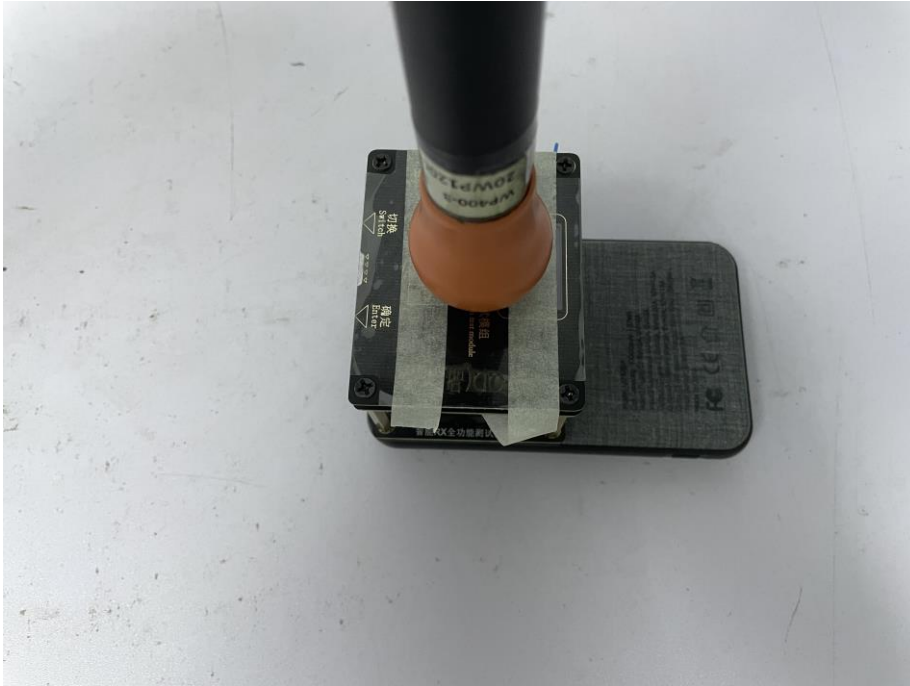




SHEINZHEN

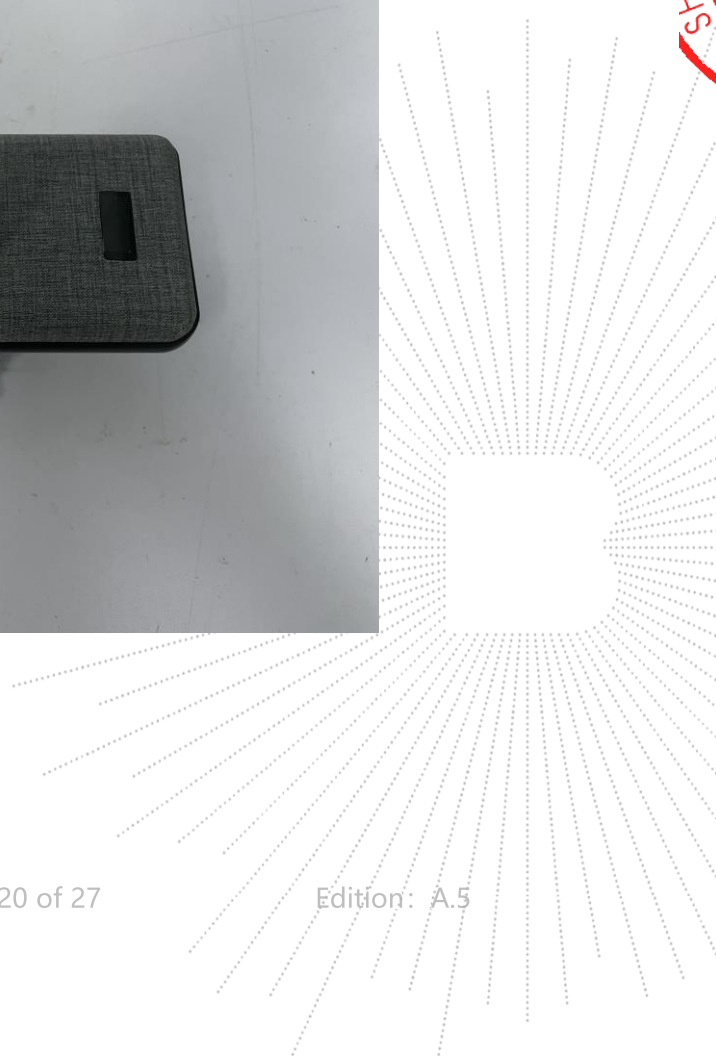





20CM

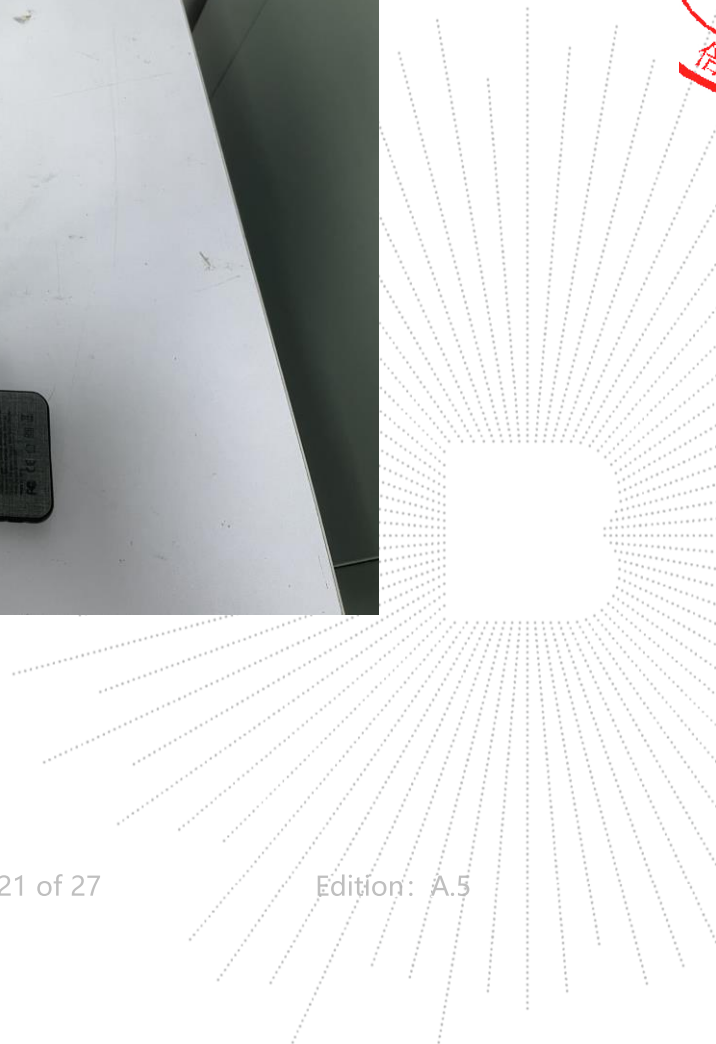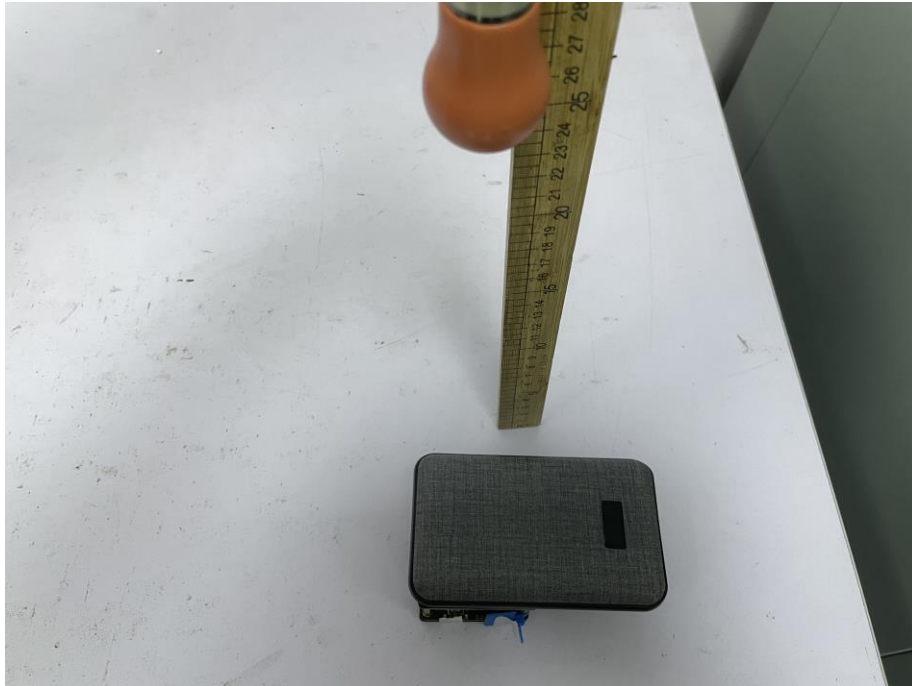

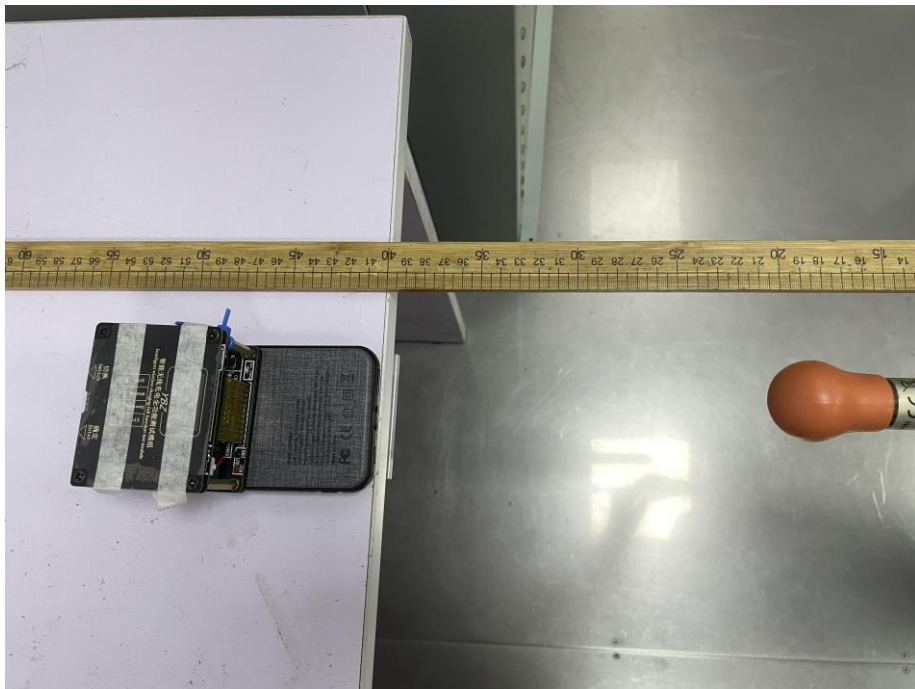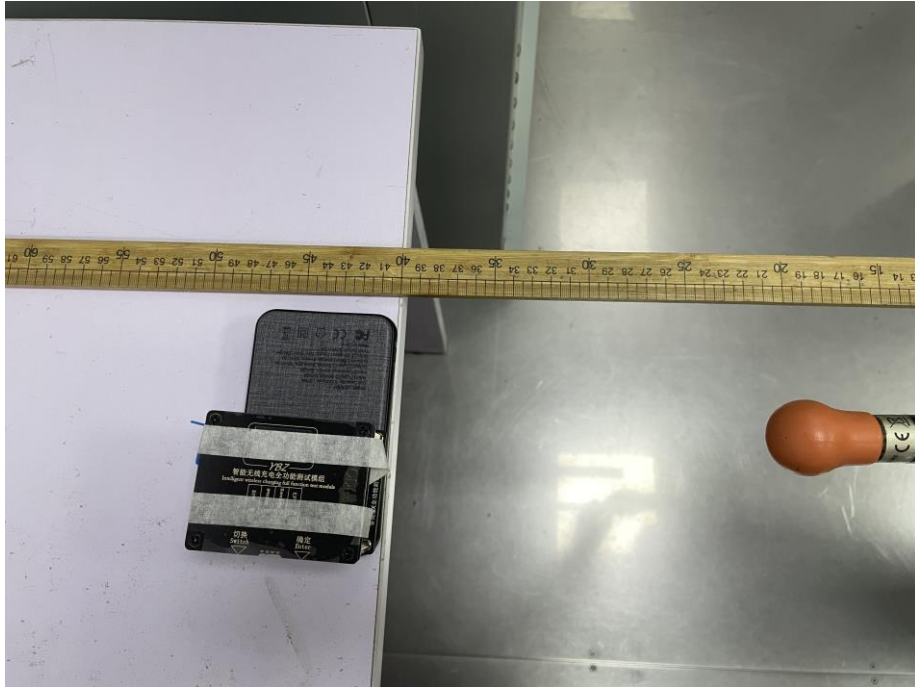


STC
30
PC
武汉

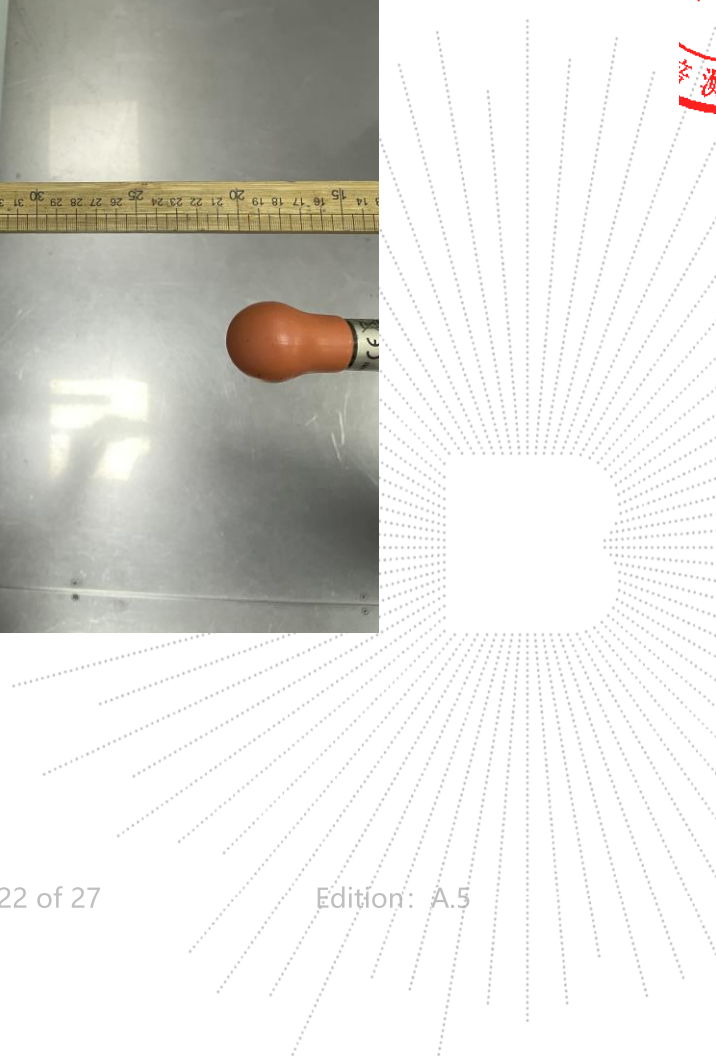



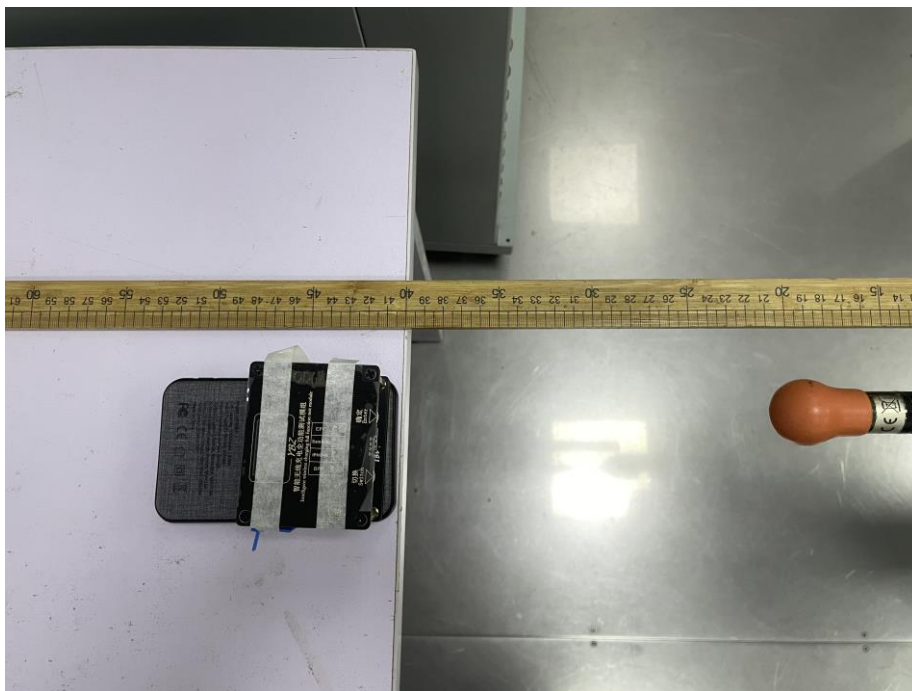




RC
加

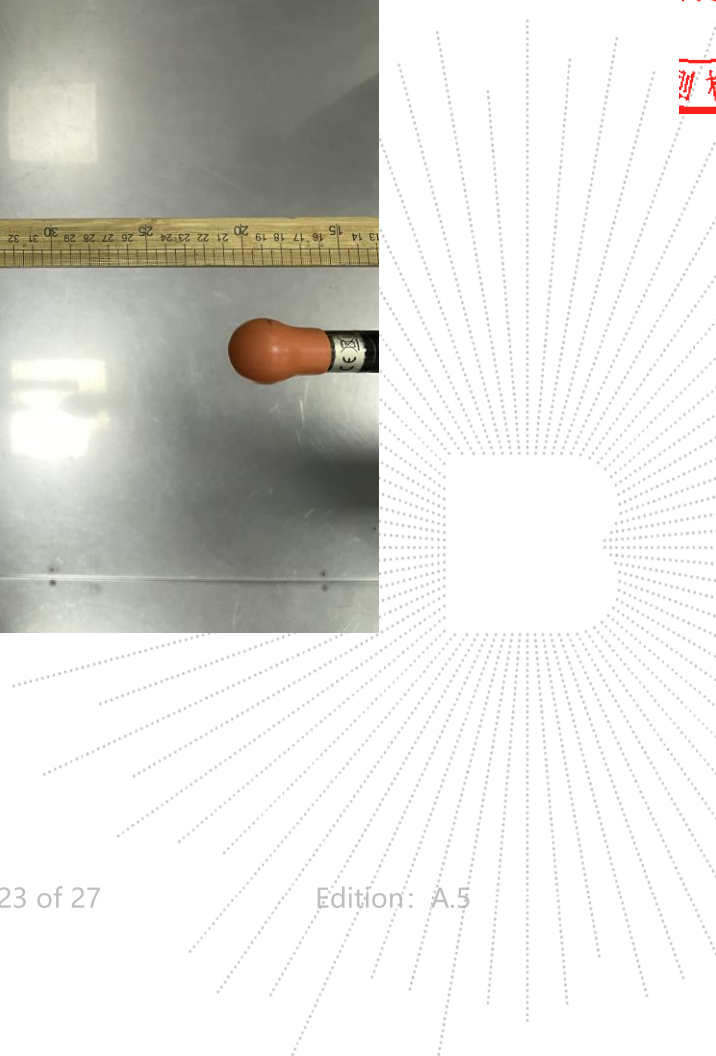


mobile

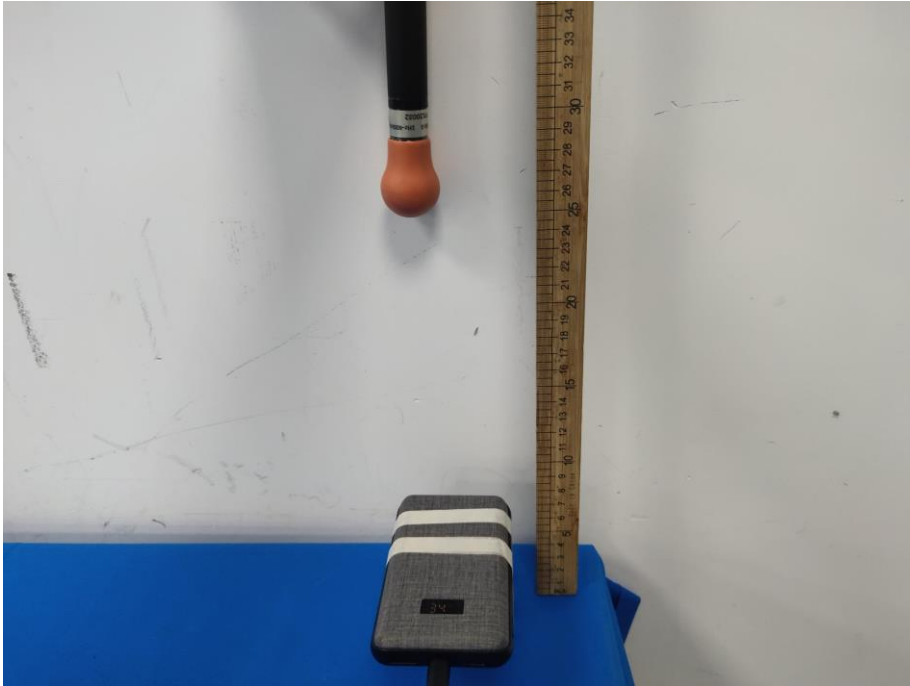

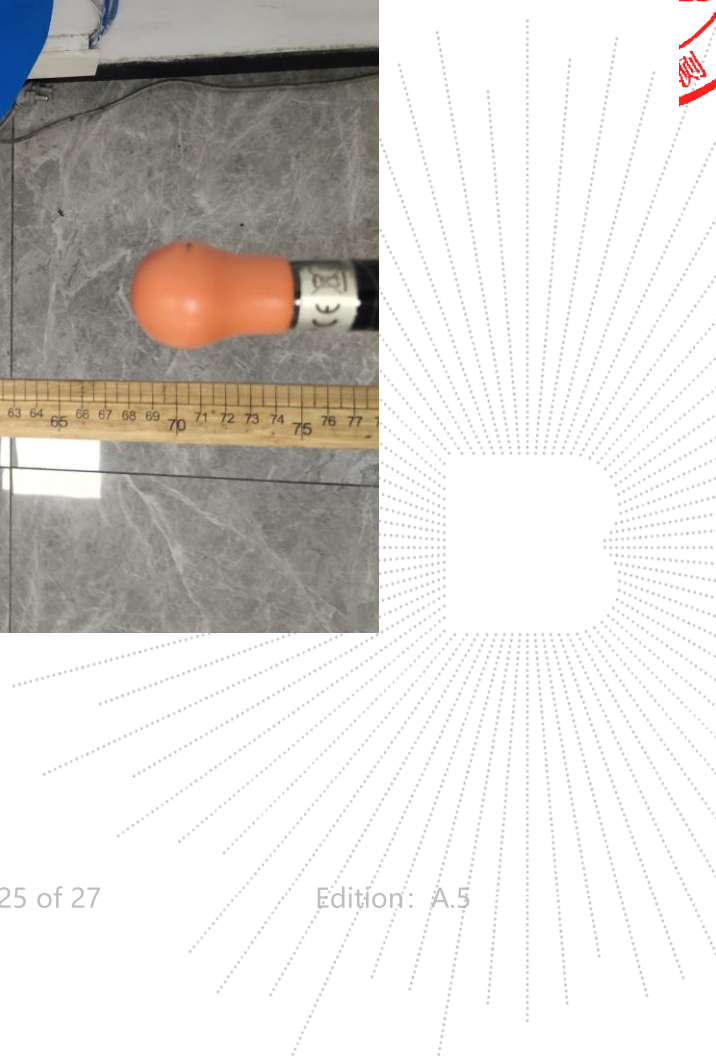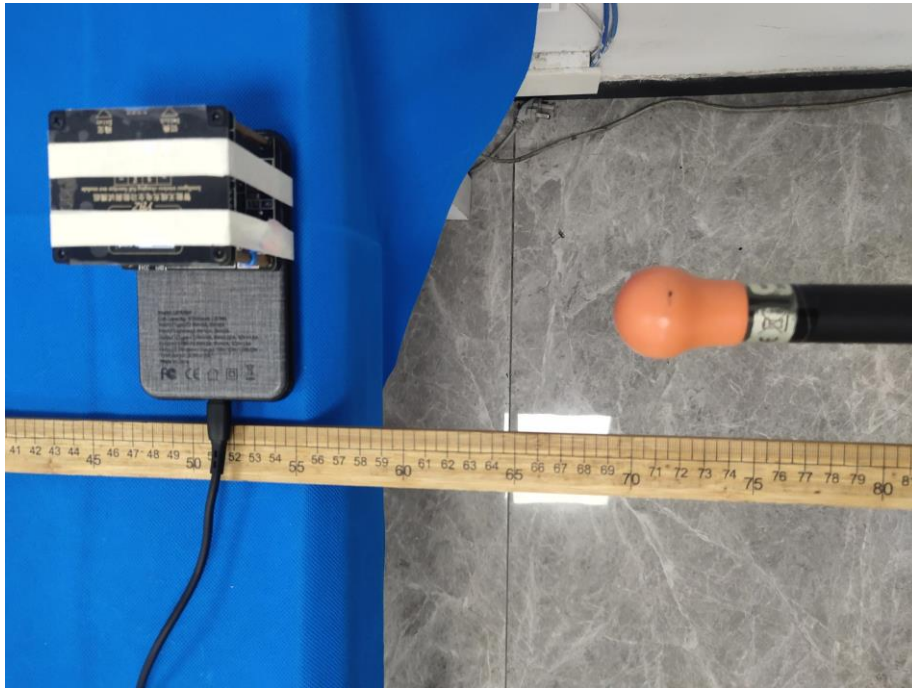

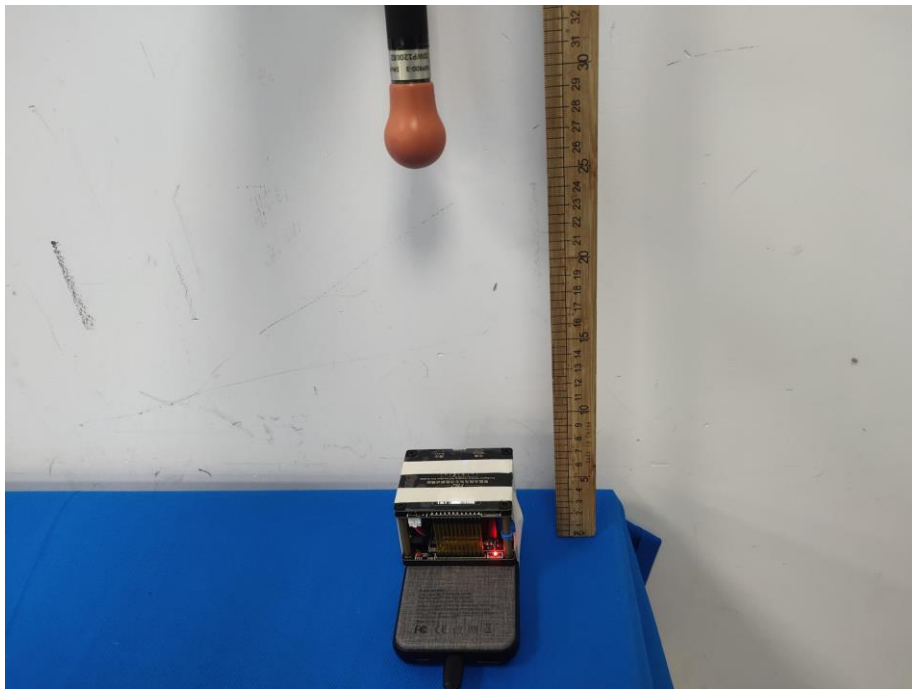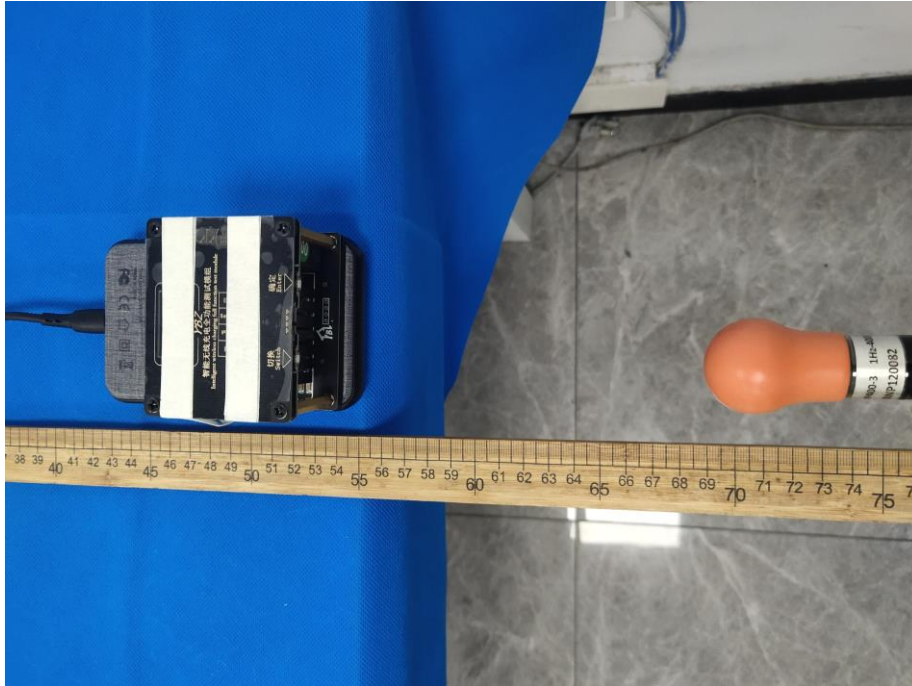

ING CO., LTD.

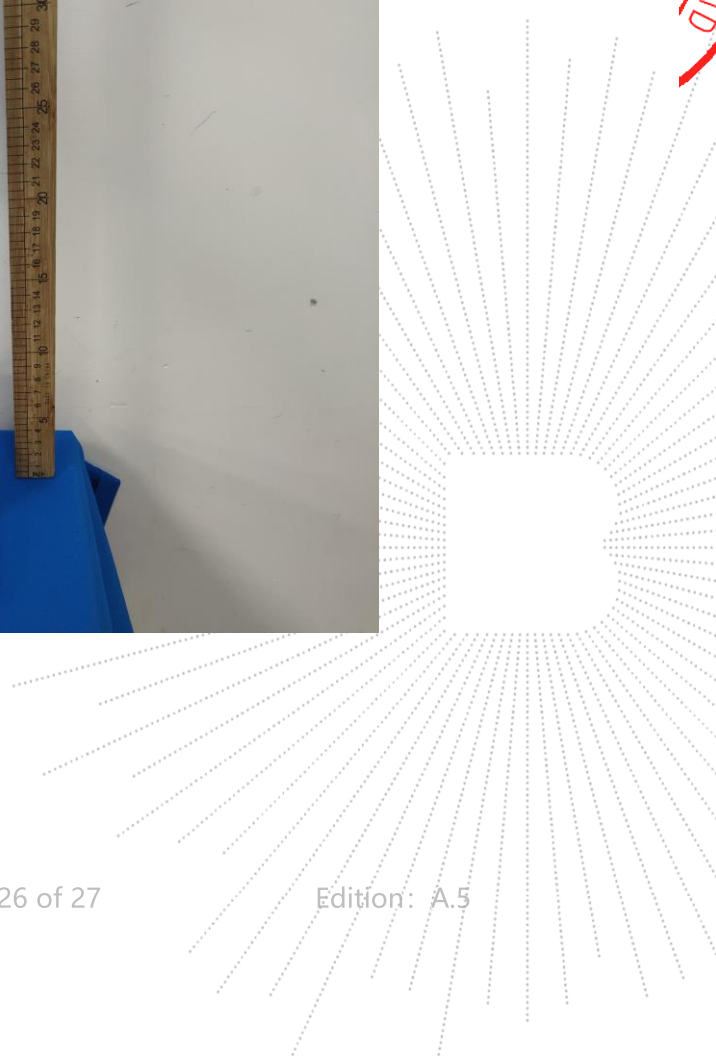

STATEMENT

1. The equipment lists are traceable to the national reference standards.
2. The test report can not be partially copied unless prior written approval is issued from our lab.
3. The test report is invalid without the "special seal for inspection and testing".
4. The test report is invalid without the signature of the approver.
5. The test process and test result is only related to the Unit Under Test.
6. Sample information is provided by the client and the laboratory is not responsible for its authenticity.
7. The quality system of our laboratory is in accordance with ISO/IEC17025.
8. If there is any objection to this test report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL: 400-788-9558

P.C.: 518103

FAX: 0755-33229357

Website: <http://www.chnbctc.com>

E-Mail: bctc@bctc-lab.com.cn

******* END *******