

## FCC - TEST REPORT

Report Number	: <b>68.950.19.2658.01</b>	Date of Issue: <u>Oct 25, 2019</u>
Model	: <b>NFC7YWW01161024, NFC5YWW018512</b>	
Product Type	: Notebook	
Applicant	: Zhangzhou Wanlida Technology Co., Ltd.	
Address	: Nanjing Wanlida Industrial Zone, Zhang Zhou, Fujian, China	
Production Facility	: Zhangzhou Wanlida Technology Co., Ltd.	
Address	: Nanjing Wanlida Industrial Zone, Zhang Zhou, Fujian, China	
Test Result	: <b><input checked="" type="checkbox"/> Positive <input type="checkbox"/> Negative</b>	
Total pages including Appendices	: <u>33</u>	

TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch is a subcontractor to TÜV SÜD Product Service GmbH according to the principles outlined in ISO 17025.

TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch reports apply only to the specific samples tested under stated test conditions. Construction of the actual test samples has been documented. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. The manufacturer/importer is responsible to the Competent Authorities in Europe for any modifications made to the production units which result in non-compliance to the relevant regulations. TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval.

## 1 Table of Contents

1	Table of Contents.....	2
2	Details about the Test Laboratory .....	3
3	Description of the Equipment under Test.....	4
4	Summary of Test Standards .....	5
5	Summary of Test Results.....	6
6	General Remarks.....	7
7	Test Setups .....	8
8	Systems test configuration .....	9
9	Technical Requirement.....	10
9.1	Conducted Emission .....	10
9.2	Conducted peak output power.....	13
9.3	6dB bandwidth.....	15
9.4	99% bandwidth .....	17
9.5	Power spectral density .....	19
9.6	Spurious RF conducted emissions.....	21
9.7	Band edge.....	26
9.8	Spurious radiated emissions for transmitter .....	28
10	Test Equipment List.....	32
11	System Measurement Uncertainty .....	33

## 2 Details about the Test Laboratory

### Details about the Test Laboratory

#### Test Site 1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch  
Building 12&13, Zhiheng Wisdomland Business Park,  
Nantou Checkpoint Road 2, Nanshan District,  
Shenzhen City, 518052,  
P. R. China

FCC Designation Number: CN5009

FCC Registration No.: 514049

Telephone: 86 755 8828 6998  
Fax: 86 755 8828 5299

### 3 Description of the Equipment under Test

Product:	Notebook
Model no.:	NFC7YWW01161024, NFC5YWW018512
FCC ID:	2ARB5-ULTRAONE
Rating:	7.6VDC, 6000mAh, (Supplied by Rechargeable Lithium-ion Battery) or 20VDC (Supplied by external adapter for Charging rechargeable battery) Adapter Model: FSP060-A1UR Input:100-240VAC 50/60Hz, 1.5A, Output:5VDC,2A or 9V 2A or 12V 2A or 15V 3A or 20V 3A Manufacturer: FSP GROUP INC
RF Transmission Frequency:	2402MHz-2480MHz
No. of Operated Channel:	40
Modulation:	GFSK
Antenna Type:	Integrated antenna
Antenna Gain:	0.9dBi max for 2.4GHz
Description of the EUT:	The Equipment Under Test (EUT) is a Notebook supports 2.4GHz Bluetooth/WIFI, 5GHz WIFI functions.

## 4 Summary of Test Standards

Test Standards	
FCC Part 15 Subpart C 10-1-2018 Edition	PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators

All the test methods were according to KDB 558074 D01 15.247 Meas Guidance v05r02 and ANSI C63.10 (2013).

## 5 Summary of Test Results

Technical Requirements			
FCC Part 15 Subpart C			
Test Condition		Test Result	Test Site
§15.207	Conducted emission AC power port	Pass	Site 1
§15.247(b)(1)	Conducted AV output power for FHSS	N/A	--
§15.247(b)(3)	Conducted peak output power & EIRP	Pass	Site 1
§15.247(e)	Power spectral density	Pass	Site 1
§15.247(a)(2)	6dB bandwidth	Pass	Site 1
§15.247(a)(1)	20dB Occupied bandwidth	N/A	--
--	99% Occupied Bandwidth	Pass	Site 1
§15.247(a)(1)	Carrier frequency separation	N/A	--
§15.247(a)(1)(i ii)	Number of hopping frequencies	N/A	--
§15.247(a)(1)(i ii)	Dwell Time	N/A	--
§15.247(d)	Spurious RF conducted emissions	Pass	Site 1
§15.247(d)	Band edge	Pass	Site 1
§15.247(d) & §15.209 & §15.205	Spurious radiated emissions for transmitter	Pass	Site 1
§15.203	Antenna requirement	See note 2	

Remark:

Note 1: N/A=Not Applicable.

Note 2: The EUT uses an Integrated antenna, which gain is 0.9dBi. In accordance to §15.203, it is considered sufficiently to comply with the provisions of this section.

## 6 General Remarks

### Remarks

This submittal(s) (test report) is intended for FCC ID: 2ARB5-ULTRAONE, complies with Section 15.207, 15.209, 15.205, 15.247 of the FCC Part 15, Subpart C.

The Model: NFC7YWW01161024 supports 2.4GHz Bluetooth/WIFI, 5GHz WIFI function. The TX and RX range is 2402MHz-2480MHz for Bluetooth, 2412MHz – 2462MHz for 2.4GHzWIFI, 5180MHz – 5320MHz, 5500MHz – 5700MHz, 5745MHz – 5825MHz for 5GHzWIFI.

NFC5YWW018512 is identical with model: NFC7YWW01161024 except model name, CPU, internal storage and SSD, unless otherwise Specification the model NFC7YWW01161024 was choose as representative model to perform all test items, and model: NFC5YWW018512 was deemed to fulfil relevant requirements without further testing.

Model	CPU	internal storage	SSD
NFC5YWW018512	i5-8200Y	8G	512GB
NFC7YWW01161024	i7-8500Y	16G	1024GB

This report is for the Bluetooth Low Energy part.

### SUMMARY:

All tests according to the regulations cited on page 6 were

- Performed

- Not Performed

The Equipment under Test

- Fulfils the general approval requirements.

- Does not fulfill the general approval requirements.

Sample Received Date: June 26, 2019

Testing Start Date: June 26, 2019

Testing End Date: Oct 22, 2019

- TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch -

Reviewed by: 



Prepared by:

Tested by:




John Zhi  
EMC Project Manager


Joe Gu  
EMC Project Engineer

Tree Zhan  
EMC Test Engineer


## 7 Test Setups

### 7.1 Radiated test setups


Below 1GHz

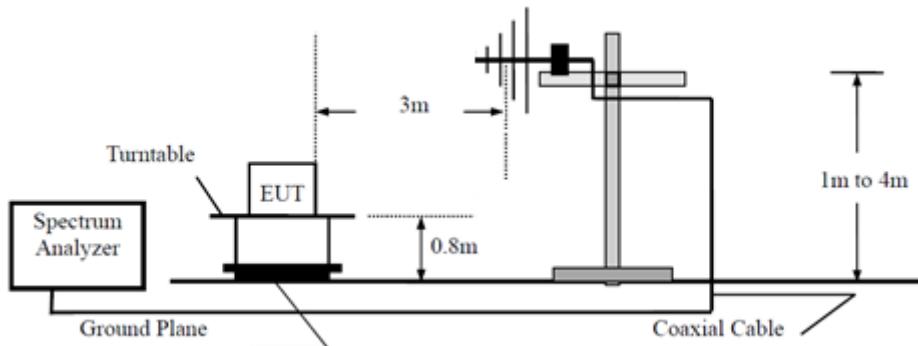


Above 1GHz

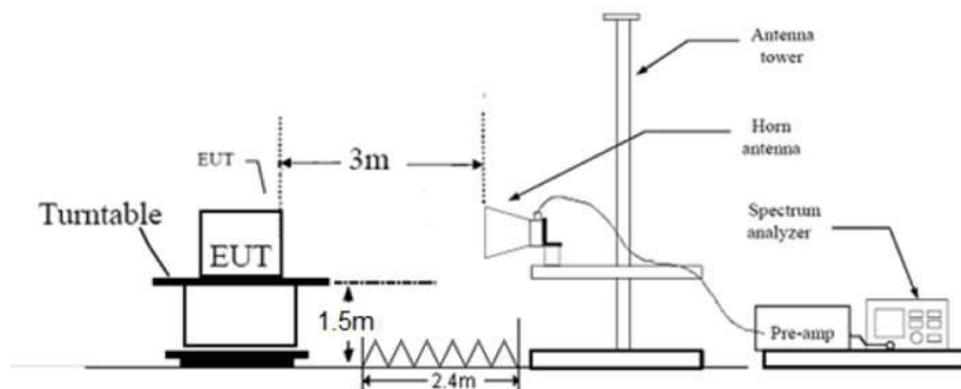

### 7.2 Conducted RF test setups



### 7.3 AC Power Line Conducted Emission test setups

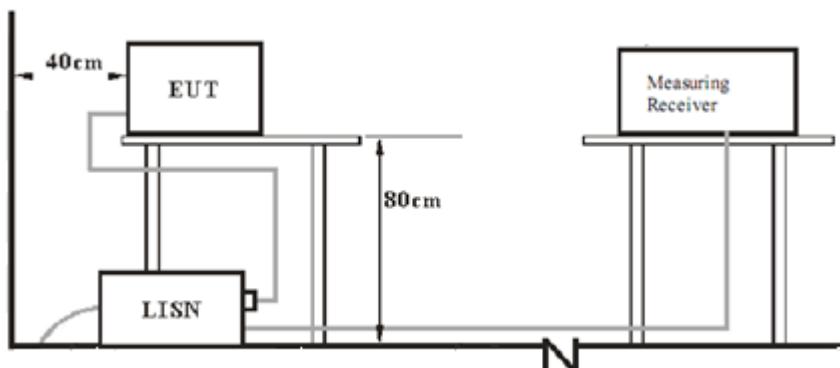

## 8 Systems test configuration

Auxiliary Equipment Used during Test:

DESCRIPTION	MANUFACTURER	MODEL NO.	S/N
---	---	---	---

Test software information:

Test Software Version	Windows 10 Home 64-bit	
Modulation	Setting TX Power	Packet Type
GFSK	/	/

The system was configured to channel 0, 19, and 39 for the test.

## 9 Technical Requirement

### 9.1

#### 9.1 Conducted Emission

##### Test Method

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. Both sides of AC line were checked for maximum conducted interference.
6. The frequency range from 150 kHz to 30 MHz was searched.
7. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

##### Limit


According to §15.207, conducted emissions limit as below:

Frequency MHz	QP Limit dB $\mu$ V	AV Limit dB $\mu$ V
0.150-0.500	66-56*	56-46*
0.500-5	56	46
5-30	60	50

\*Decreasing linearly with logarithm of the frequency

## Conducted Emission

Product Type : Notebook  
 M/N : NFC7YWW01161024  
 Operating Condition : Charging + TX  
 Test Specification : Power Line, Live  
 Comment : AC 120V/60Hz

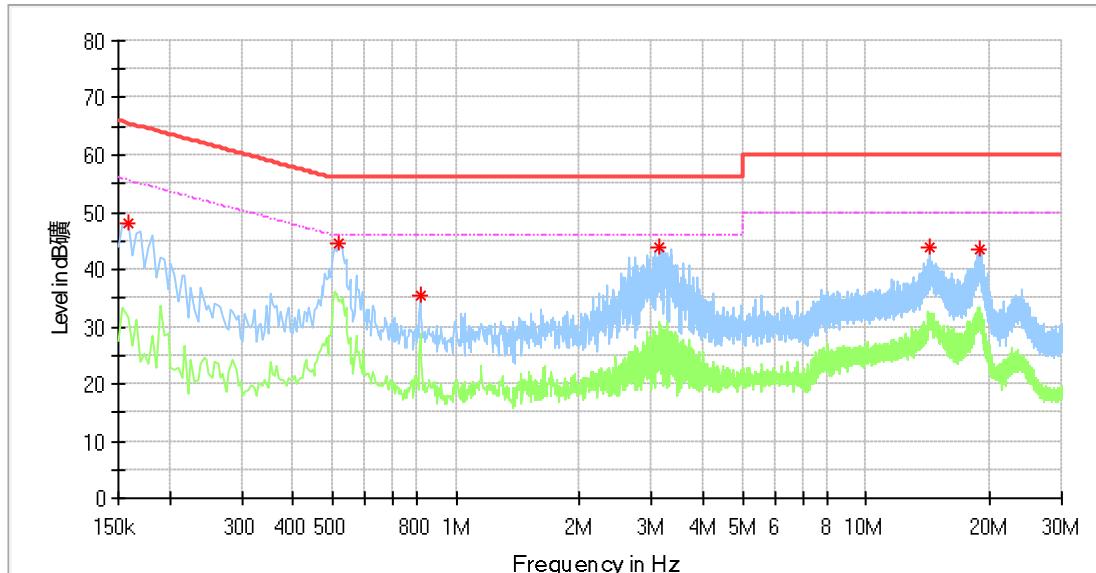

Frequency (MHz)	MaxPeak* (dB $\mu$ V)	Average* (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin	Line	Corr.** (dB)
0.158000	47.92	---	65.57	17.65	L1	10.2
0.518000	44.58	---	56.00	11.42	L1	10.3
0.818000	35.48	---	56.00	20.52	L1	10.3
3.142000	43.99	---	56.00	12.01	L1	10.4
14.226000	43.77	---	60.00	16.23	L1	10.7
18.890000	43.36	---	60.00	16.64	L1	11.0

Remark :


\*Level=Reading Level + Correction Factor

\*\*Correction Factor=Cable Loss + LISN Factor

(The Reading Level is recorded by software which is not shown in the sheet)

## Conducted Emission

Product Type : Notebook  
 M/N : NFC7YWW01161024  
 Operating Condition : Charging + TX  
 Test Specification : Power Line, Neutral  
 Comment : AC 120V/60Hz

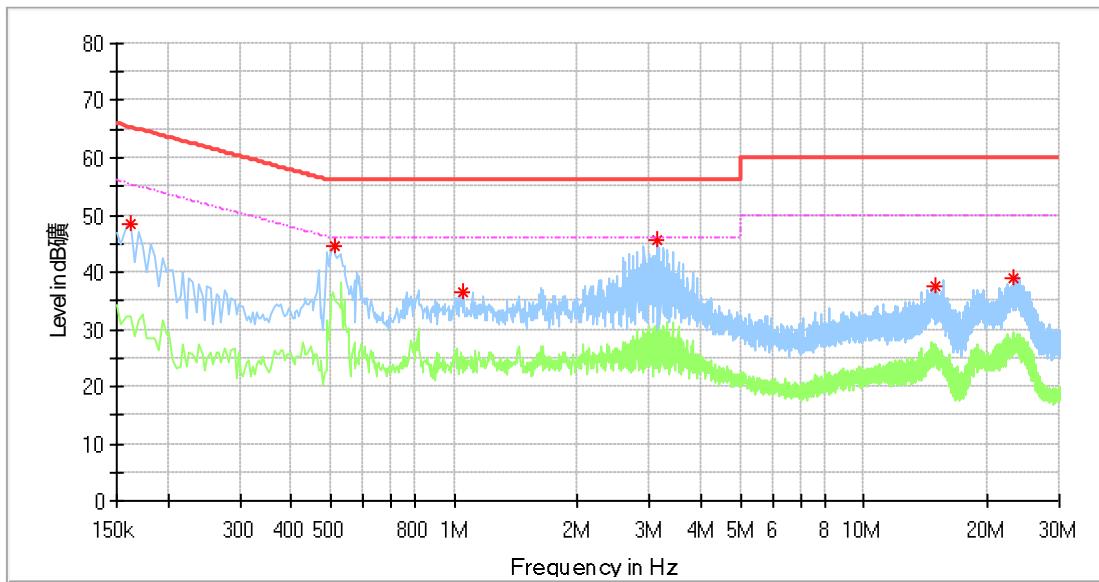

Frequency (MHz)	MaxPeak* (dB $\mu$ V)	Average* (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Line	Corr.** (dB)
0.162000	48.50	---	65.36	16.86	N	10.2
0.510000	44.66	---	56.00	11.34	N	10.3
1.054000	36.37	---	56.00	19.63	N	10.3
3.118000	45.61	---	56.00	10.39	N	10.4
14.930000	37.47	---	60.00	22.53	N	10.8
23.286000	38.91	---	60.00	21.09	N	11.2

Remark :

\*Level=Reading Level + Correction Factor

\*\*Correction Factor=Cable Loss + LISN Factor

(The Reading Level is recorded by software which is not shown in the sheet)

## 9.2 Conducted peak output power

### Test Method

1. The RF output of EUT was connected to the test receiver by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following test receiver settings:  
Span = approximately 5 times the 20dB bandwidth, centered on a hopping channel  
RBW > the 20dB bandwidth of the emission being measured,  $VBW \geq RBW$ ,  
Sweep = auto, Detector function = peak, Trace = max hold
4. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power and record the results in the test report.
5. Repeat above procedures until all frequencies measured were complete.

### Limits


According to §15.247 (b) (1), conducted peak output power limit as below:

Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	≤1	≤30


Test result as below table

Frequency (MHz)	Conducted Peak Output Power (dBm)	Result
Low channel 2402MHz	2.8	Pass
Middle channel 2440MHz	3.7	Pass
High channel 2480MHz	3.1	Pass


## Low channel 2402MHz

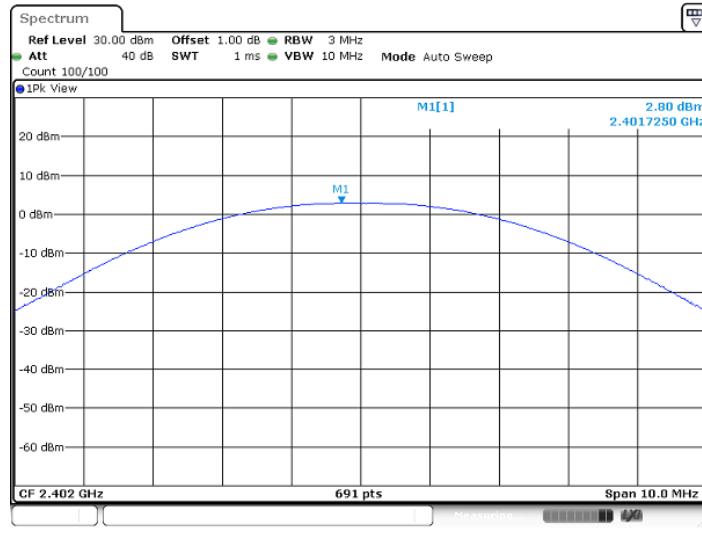

## Middle channel 2440MHz

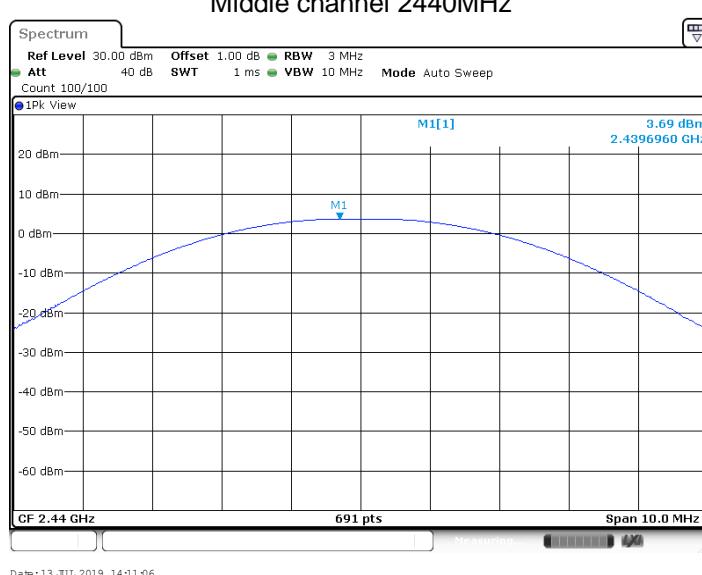

## High channel 2480MHz

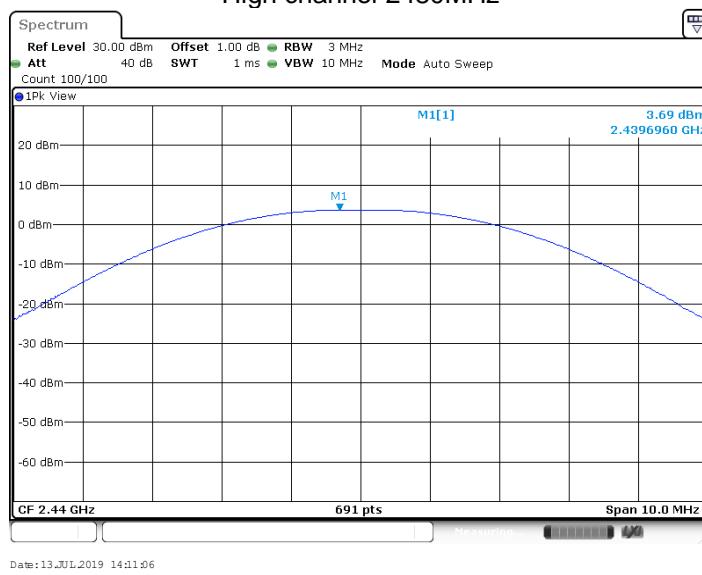

## 9.3 6dB bandwidth

### Test Method

1. Use the following spectrum analyzer settings:  
RBW=100K, VBW $\geq$ 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
2. Use the automatic bandwidth measurement capability of an instrument, may be employed using the X dB bandwidth mode with X set to 6 dB, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be  $\geq$  6 dB.
3. Allow the trace to stabilize, record the X dB Bandwidth value.

### Limit


Limit [kHz]

$\geq 500$

### Test result

Test Mode	Channel (MHz)	Result (MHz)	Limit (KHz)	Verdict
BLE	2402	0.644	$\geq 500$	PASS
BLE	2440	0.648	$\geq 500$	PASS
BLE	2480	0.664	$\geq 500$	PASS

### Test Graphs

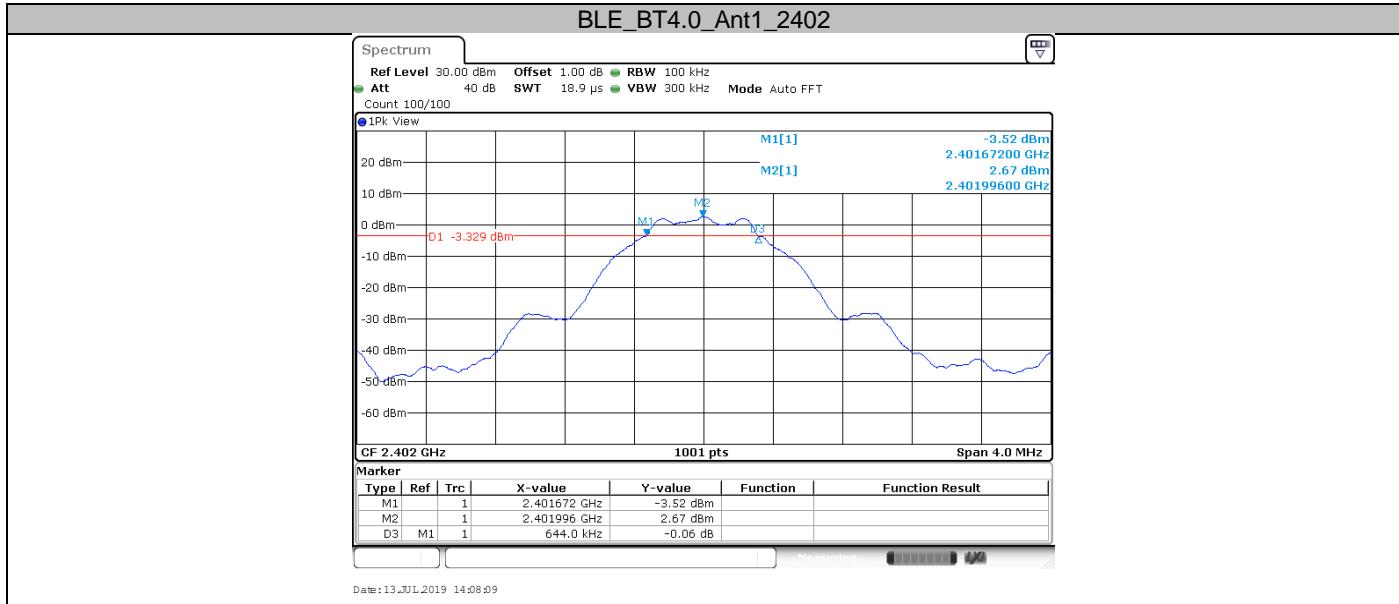



## 9.4 99% bandwidth

### Test Method

1. Use the following spectrum analyzer settings:  
RBW=1% to 5% of the actual occupied, VBW $\geq$ 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
2. Use the automatic bandwidth measurement capability of an instrument, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be  $\geq$  6 dB.
3. Allow the trace to stabilize, record the X dB Bandwidth value.

### Limit


Limit [kHz]


--

### Test result

Test Mode	Channel (MHz)	Result (MHz)	Limit	Verdict
BLE	2402	1.039	---	PASS
BLE	2440	1.043	---	PASS
BLE	2480	1.039	---	PASS

### Test Graphs

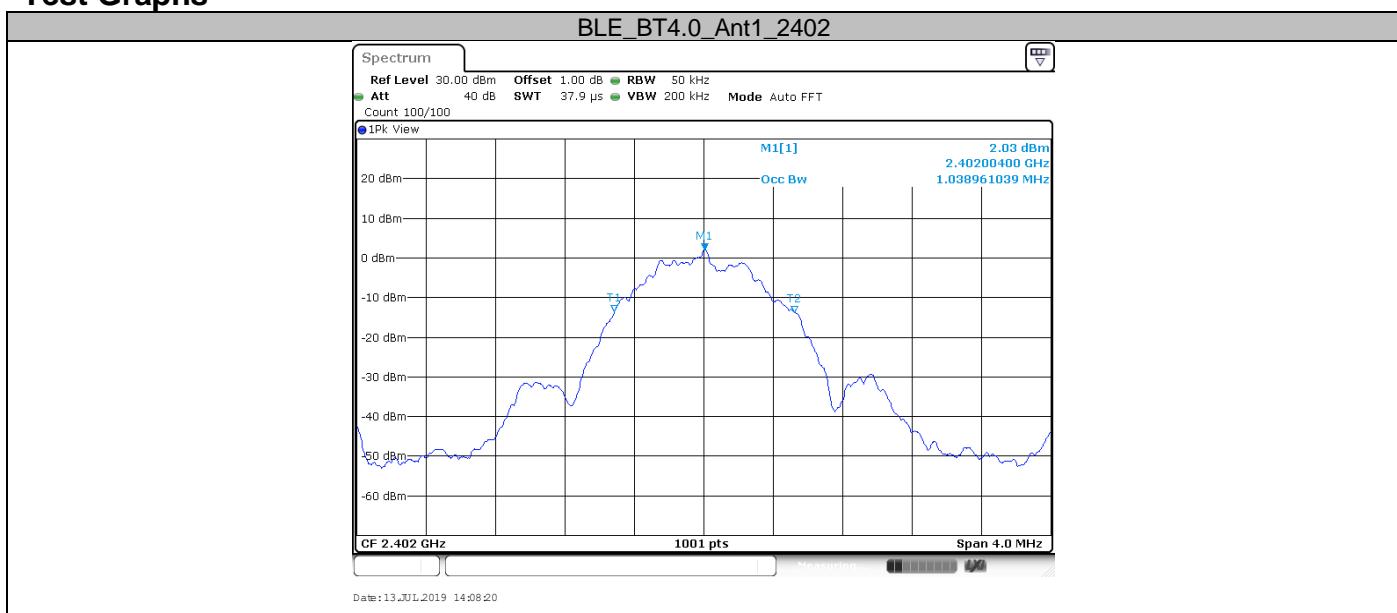

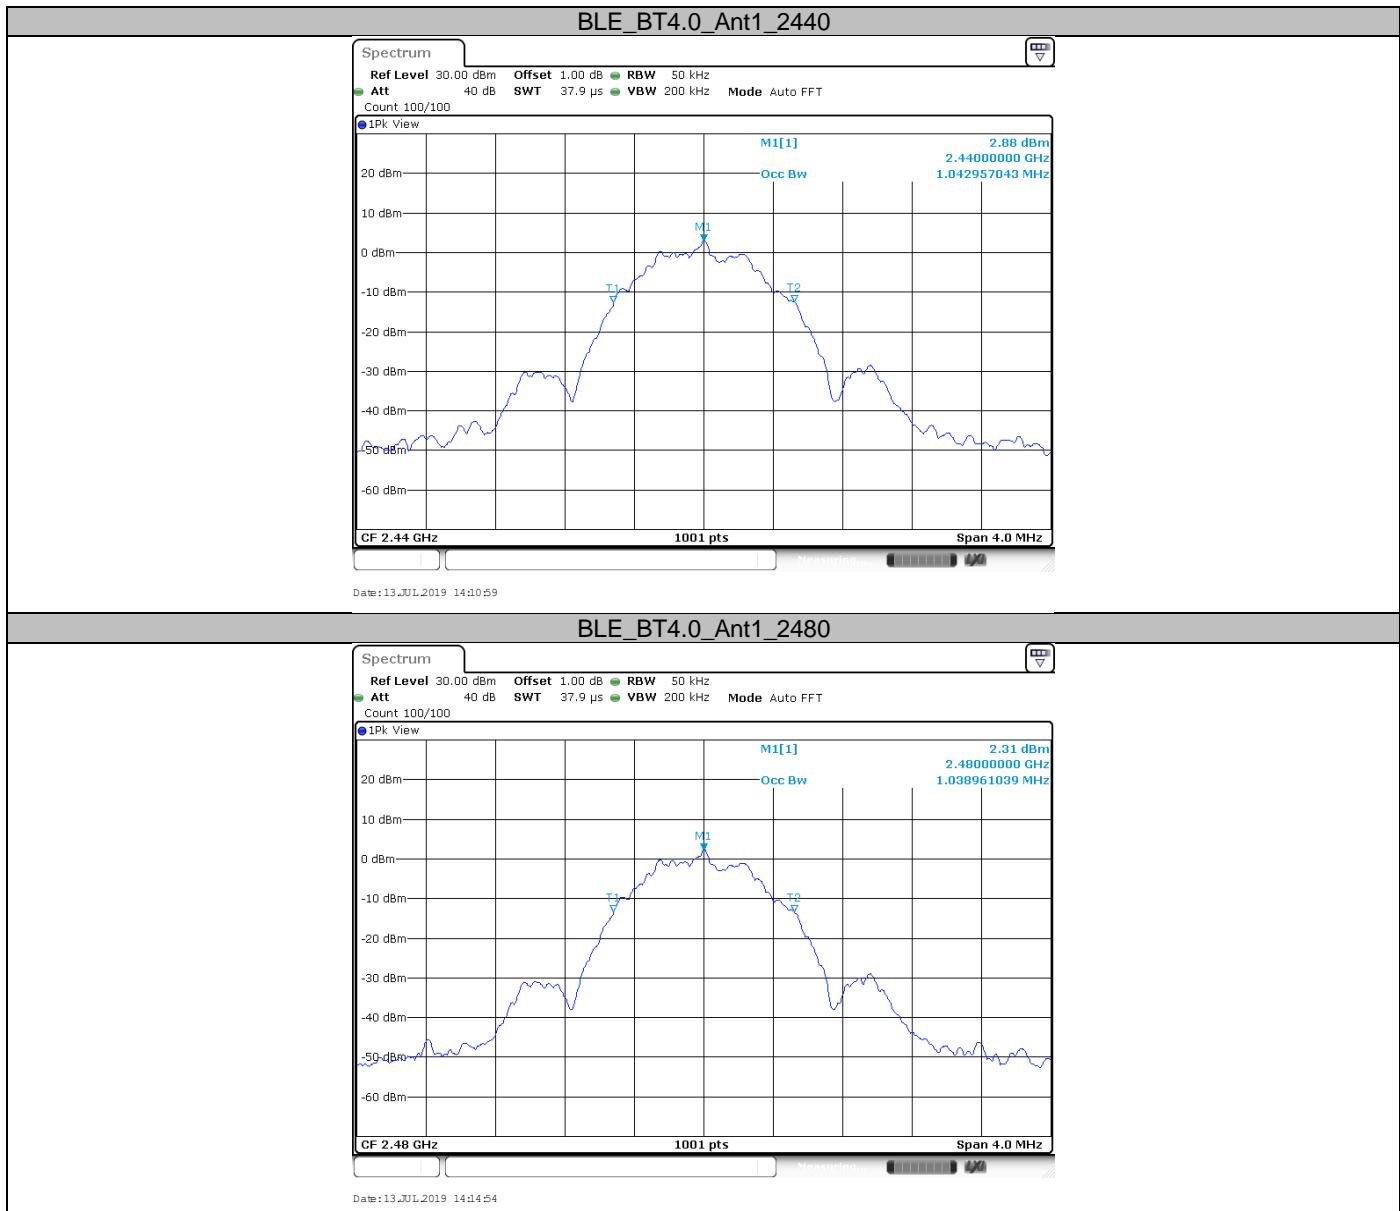

## 9.5 Power spectral density

### Test Method

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance:

1. The RF output of EUT was connected to the test receiver by RF cable. The path loss was compensated to the results for each measurement.
2. Set analyzer center frequency to DTS channel center frequency. RBW=3kHz, VBW $\geq$ 3RBW, Span=1.5 times DTS bandwidth, Detector=Peak, Sweep=auto, Trace= max hold.
3. Allow trace to fully stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.
4. Repeat above procedures until other frequencies measured were completed.

### Limit


Limit [dBm/3KHz]


$\leq 8$

### Test result

Test Mode	Channel (MHz)	Result (dBm/3KHz)	Limit(dBm/3KHz)	Verdict
BLE	2402	-12.41	8	PASS
BLE	2440	-11.18	8	PASS
BLE	2480	-11.74	8	PASS

### Test Graphs

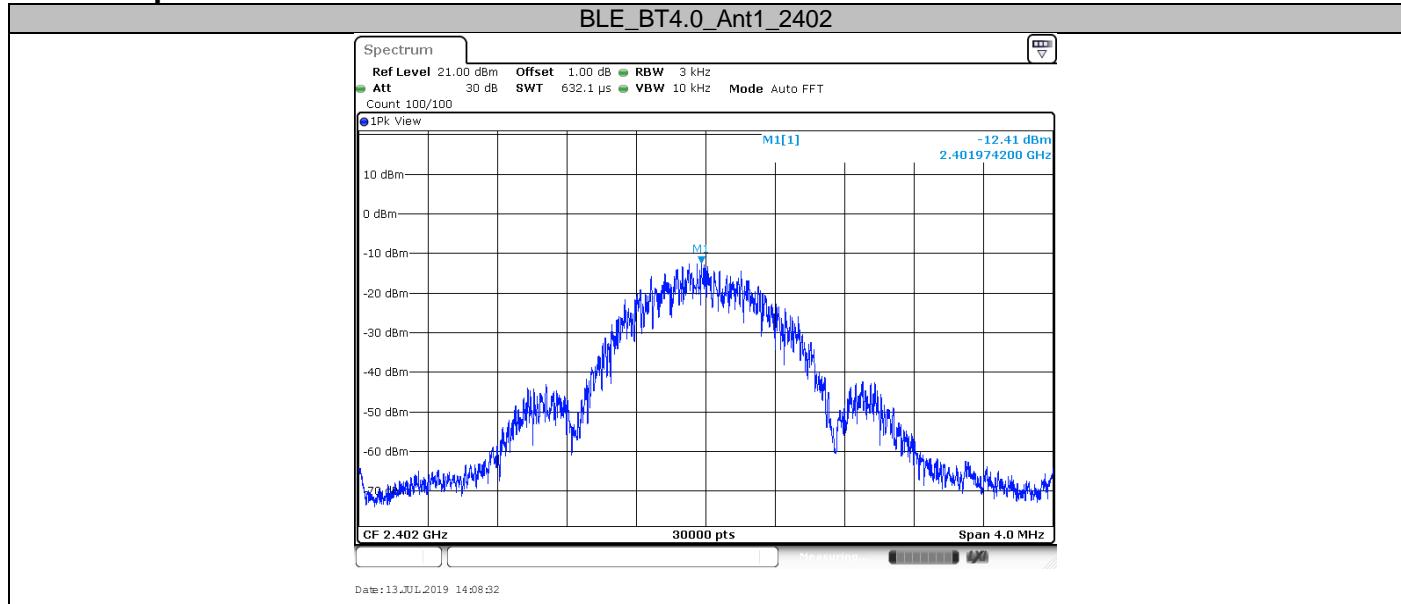

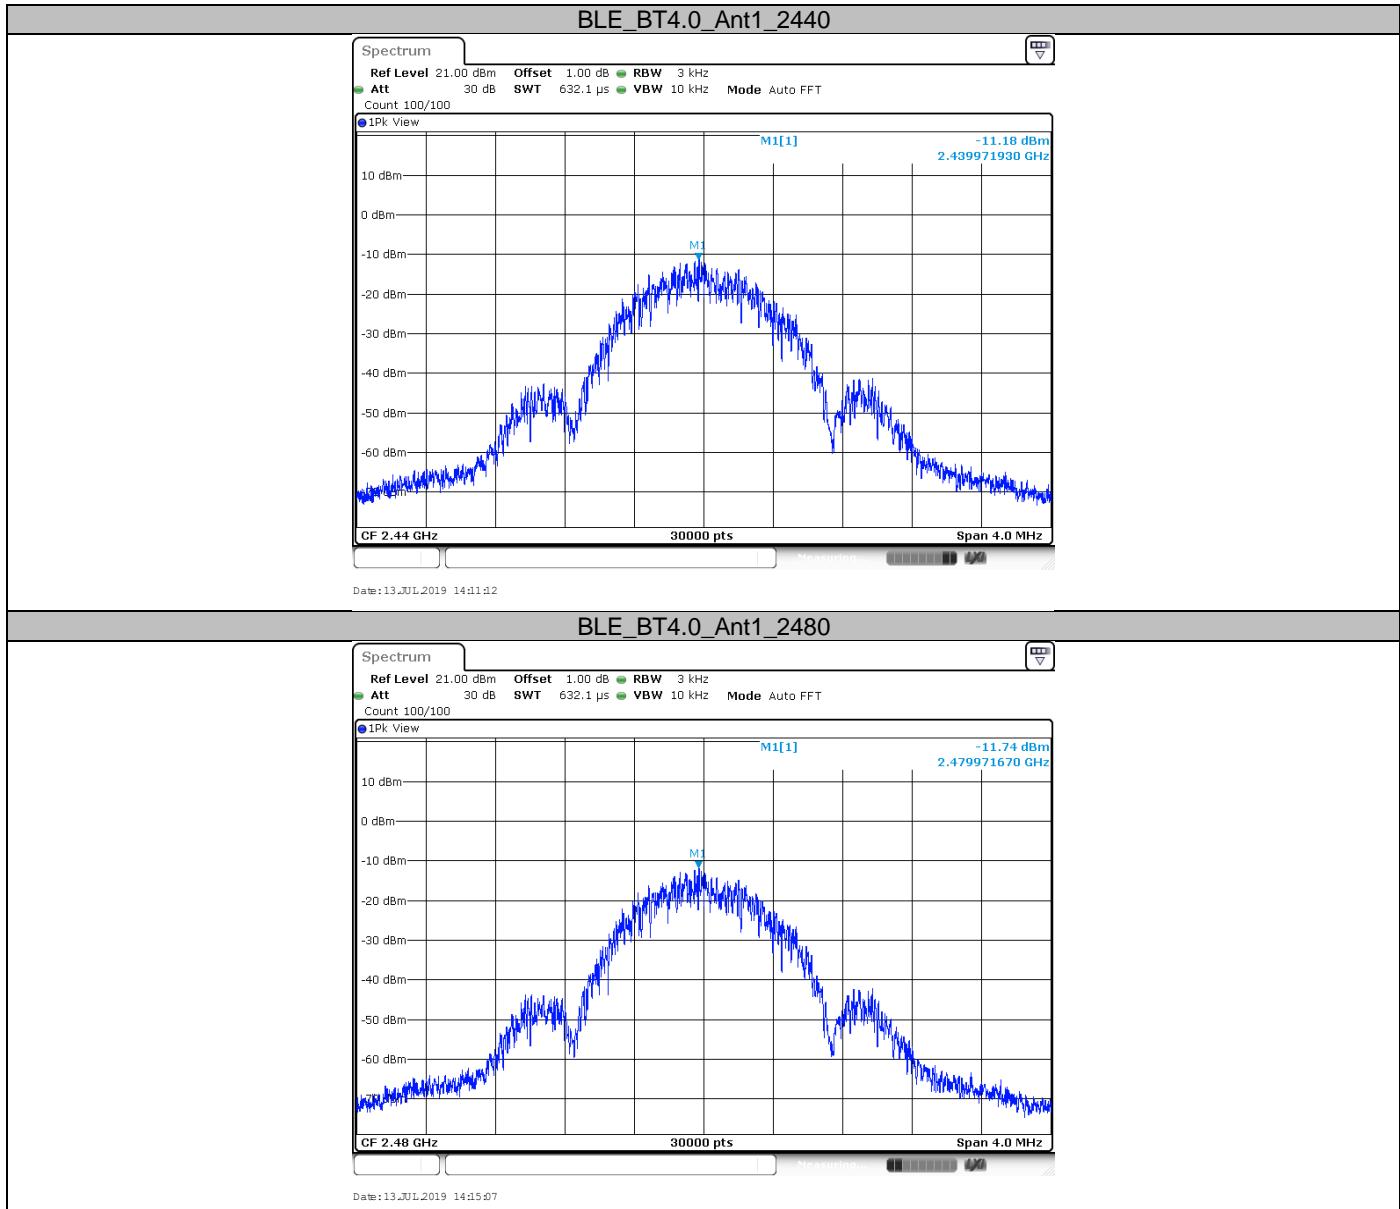

## 9.6 Spurious RF conducted emissions


### Test Method


1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Use the following spectrum analyzer settings:  
Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10<sup>th</sup> harmonic. Typically, several plots are required to cover this entire span.  
RBW = 100 kHz, VBW≥RBW, Sweep = auto, Detector function = peak, Trace = max hold
3. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded.
4. The level displayed must comply with the limit specified in this Section. Submit these plots.
5. Repeat above procedures until all frequencies measured were complete.


### Limit


Frequency Range MHz	Limit (dBc)
30-25000	-20

## Test Result

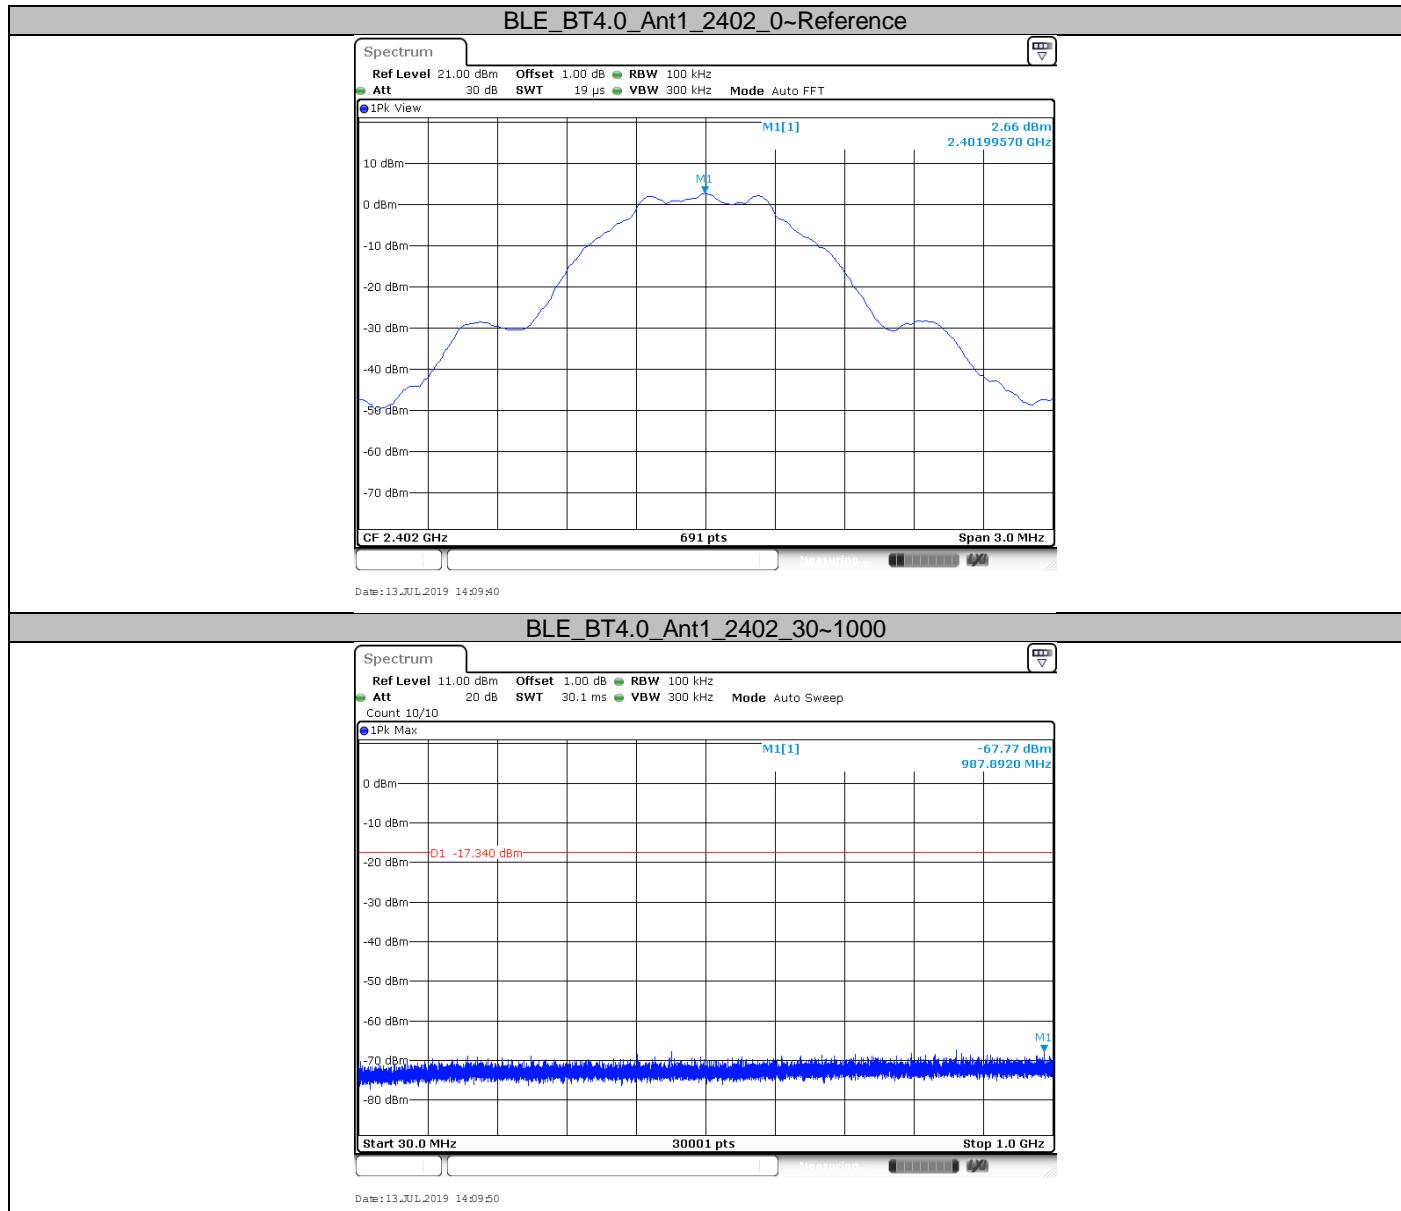

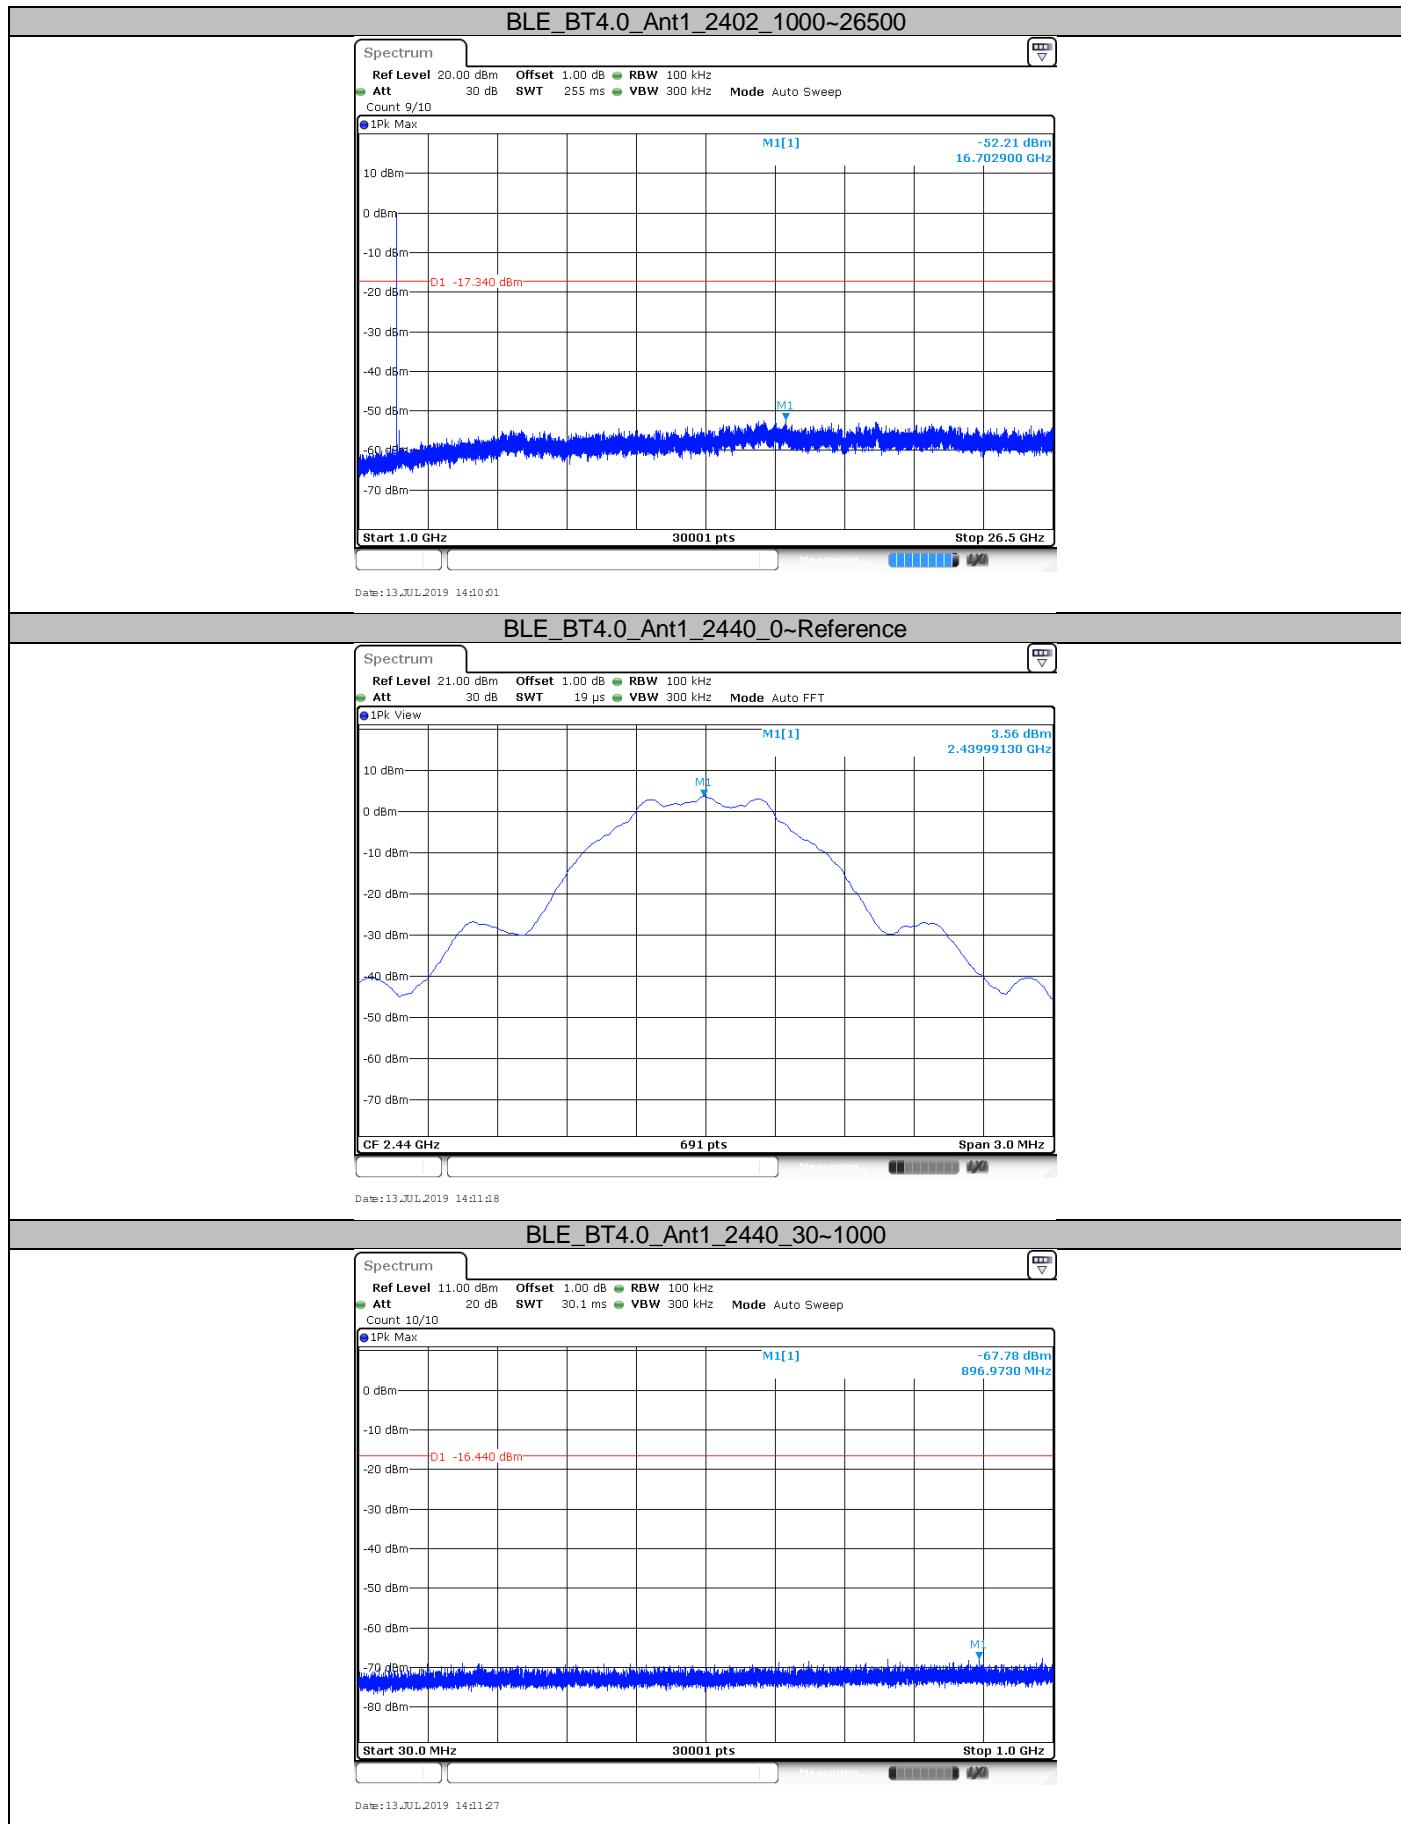

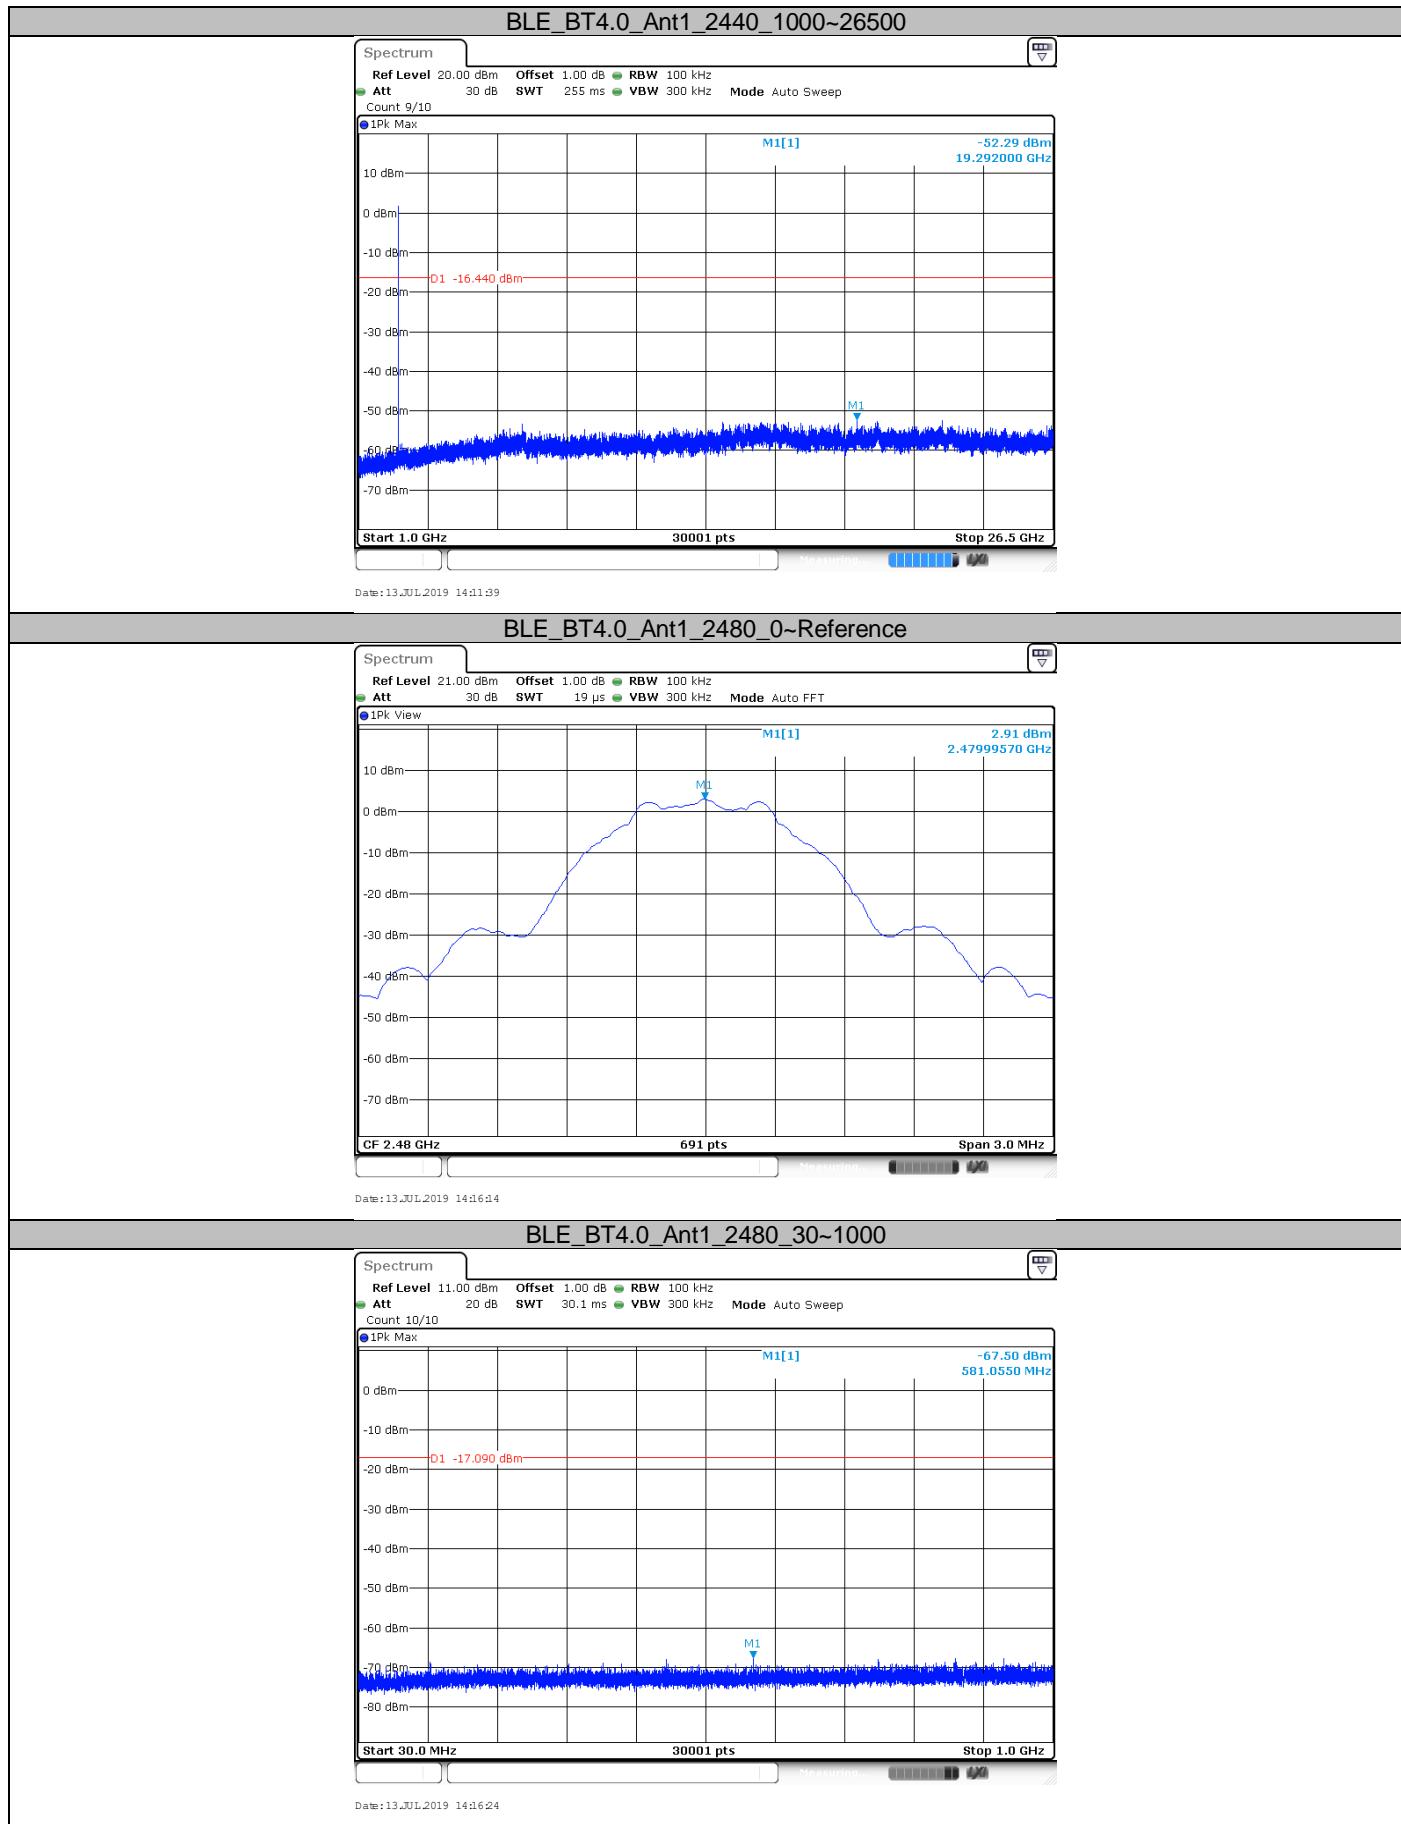

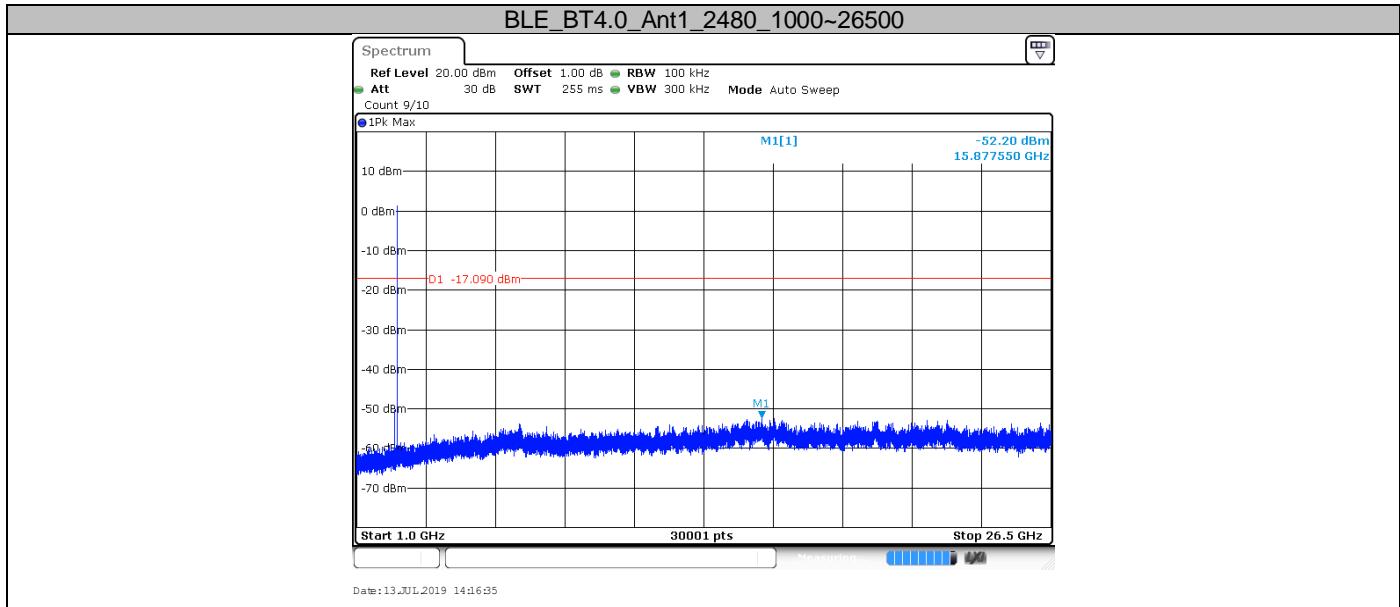

## 9.7 Band edge

### Test Method


1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Use the following spectrum analyzer settings:  
Span = wide enough to capture the peak level of the in-band emission and all spurious  
RBW = 100 kHz, VBW  $\geq$  RBW, Sweep = auto, Detector function = peak, Trace = max hold
3. Allow the trace to stabilize, use the peak and delta measurement to record the result.
4. The level displayed must comply with the limit specified in this Section.
5. Repeat the test at the hopping off and hopping on mode, submit all the plots.

### Limit:

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Frequency Range MHz	Limit (dBc)
30-25000	-20

## Test result

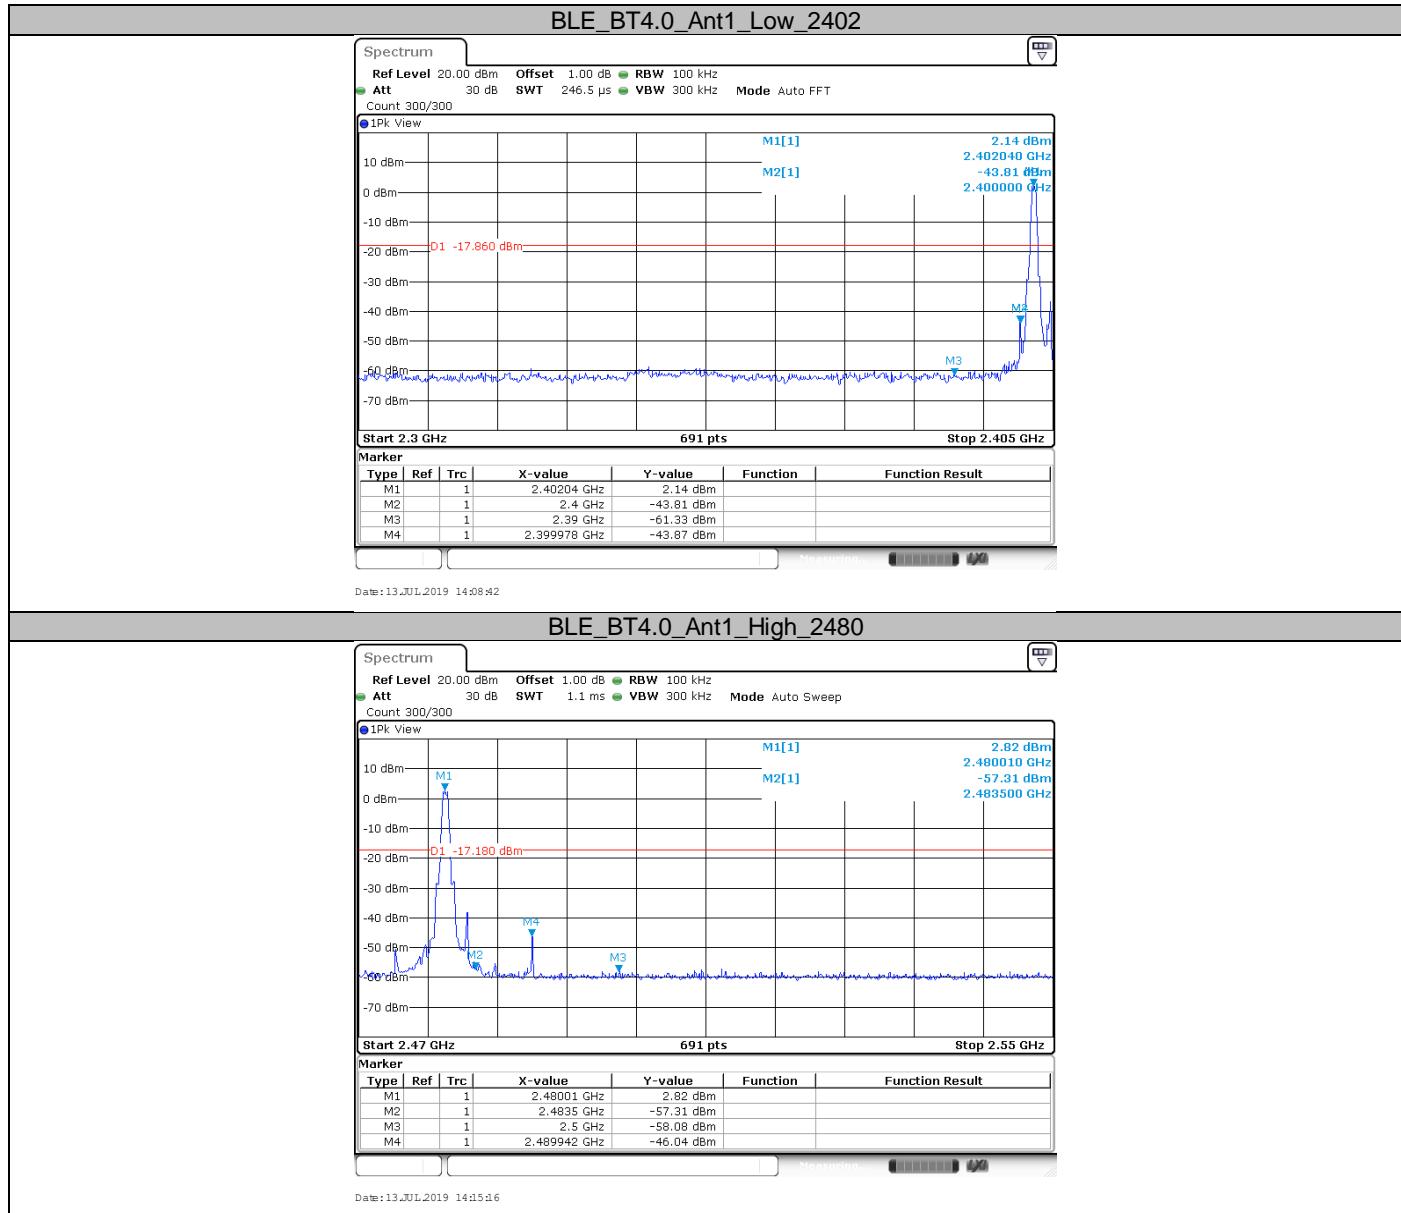

## 9.8 Spurious radiated emissions for transmitter

### Test Method

- 1: The EUT was place on a turn table which is 1.5m above ground plane for above 1GHz and 0.8m above ground for below 1GHz at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2: The EUT was set 3 meters away from the interference – receiving antenna, which was mounted on the top of a variable – height antenna tower.
- 3: The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 4: For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- 5: Use the following spectrum analyzer settings According to C63.10:

For Below 1GHz

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious  
 RBW = 100 KHz to 120KHz, VBW $\geq$ RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.

For Peak unwanted emissions Above 1GHz:

Span = wide enough to capture the peak level of the in-band emission and all spurious  
 RBW = 1MHz, VBW $\geq$ RBW for peak measurement ,Sweep = auto, Detector function = peak, Trace = max hold.

Procedures for average unwanted emissions measurements above 1000 MHz

- a) RBW = 1 MHz.
- b) VBW \ [3 x RBW].
- c) Detector = RMS (power averaging), if [span / (# of points in sweep)] \ RBW / 2. Satisfying this condition can require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, then the detector mode shall be set to peak.
- d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.)
- e) Sweep time = auto.
- f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of 1 / D, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)
- g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:  
 1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is [10 log (1 / D)], where D is the duty cycle. For example, if the transmit duty

cycle was 50%, then 3 dB shall be added to the measured emission levels.

2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is  $[20 \log (1 / D)]$ , where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.

3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.

## Limit

The radio emission outside the operating frequency band shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Radiated emissions which fall in the restricted bands, as defined in section 15.205, must comply with the radiated emission limits specified in section 15.209.

Frequency MHz	Field Strength uV/m	Field Strength dB $\mu$ V/m	Detector
30-88	100	40	QP
88-216	150	43.5	QP
216-960	200	46	QP
960-1000	500	54	QP
Above 1000	500	54	AV
Above 1000	5000	74	PK

## Spurious radiated emissions for transmitter

According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

### Transmitting spurious emission test result as below:

#### 2402MHz (30MHz – 1GHz)

Frequency	Emission Level	Polarization	Limit	Margin	Detector	Corr.	Result
MHz	dB $\mu$ V/m		dB $\mu$ V/m	dB		dB	
869.59	33.43	Horizontal	46.00	12.57	QP	-16.1	Pass
943.26	34.87	Vertical	46.00	11.13	QP	-15.3	Pass

#### 2402MHz (Above 1GHz)

Frequency	Emission Level	Polarization	Limit	Margin	Detector	Corr.	Result
MHz	dB $\mu$ V/m		dB $\mu$ V/m	dB		dB/m	
*11713.13	40.86	Horizontal	74.00	33.14	PK	9.0	Pass
*17822.81	48.44	Vertical	74.00	25.56	PK	21.4	Pass

#### 2440MHz (30MHz – 1GHz)

Frequency	Emission Level	Polarization	Limit	Margin	Detector	Corr.	Result
MHz	dB $\mu$ V/m		dB $\mu$ V/m	dB		dB	
--	--	Horizontal	--	--	QP	--	Pass
--	--	Vertical	--	--	QP	--	Pass

#### 2440MHz (Above 1GHz)

Frequency	Emission Level	Polarization	Limit	Margin	Detector	Corr.	Result
MHz	dB $\mu$ V/m		dB $\mu$ V/m	dB		dB/m	
*12642.19	41.85	Horizontal	74.00	32.15	PK	12.6	Pass
9374.06	40.98	Vertical	74.00	33.02	PK	8.6	Pass

#### 2480MHz (30MHz – 1GHz)

Frequency	Emission Level	Polarization	Limit	Margin	Detector	Corr.	Result
MHz	dB $\mu$ V/m		dB $\mu$ V/m	dB		dB	
--	--	Horizontal	--	--	QP	--	Pass
--	--	Vertical	--	--	QP	--	Pass

#### 2480MHz (Above 1GHz)

Frequency	Emission Level	Polarization	Limit	Margin	Detector	Corr.	Result
MHz	dB $\mu$ V/m		dB $\mu$ V/m	dB		dB/m	
*10696.41	40.69	Horizontal	74.00	33.31	PK	8.5	Pass
*11917.97	41.26	Vertical	74.00	32.74	PK	10.6	Pass

Remark:

- (1) \*\* means the emission(s) appear within the restrict bands shall follow the requirement of section 15.205.
- (2) Data of measurement within this frequency range shown “--” in the table above means the reading of emissions are the noise floor or attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Level=Reading Level + Correction Factor  
Above 1GHz: Corrector factor = Antenna Factor + Cable Loss- Amplifier Gain  
Below 1GHz: Corrector factor = Antenna Factor + Cable Loss  
(The Reading Level is recorded by software which is not shown in the sheet)

## 10 Test Equipment List

### Conducted Emission Test

Description	Manufacturer	Model no.	Serial no.	cal. due date
EMI Test Receiver	Rohde & Schwarz	ESR 3	101782	2020-6-28
LISN	Rohde & Schwarz	ENV4200	100249	2020-6-28
Attenuator	Shanghai Huaxiang	TS2-26-3	080928189	2020-6-28
Test software	Rohde & Schwarz	EMC32	Version9.15.00	N/A

### Radiated Emission Test

DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 26	101269	2020-6-28
Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9163	707	2020-6-29
Horn Antenna	Rohde & Schwarz	HF907	102295	2020-6-22
Wideband Horn Antenna	Q-PAR	QWH-SL-18-40-K-SG	12827	2020-7-12
Pre-amplifier	Rohde & Schwarz	SCU 18	102230	2020-6-28
Attenuator	Agilent	8491A	MY39264334	2020-6-28
3m Semi-anechoic chamber	TDK	9X6X6	----	2020-7-7
Test software	Rohde & Schwarz	EMC32	Version 9.15.00	N/A

### RF conducted test

DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL. DUE DATE
Signal Analyzer	Rohde & Schwarz	FSV40	101030	2020-6-28
RF Switch Module	Rohde & Schwarz	OSP120/OSP-B157	101226/100851	2020-6-28
Power Splitter	Weinschel	1580	SC319	2020-7-7
Test software	Tonscend	System for BT/WIFI	Version 2.6	N/A

## 11 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

System Measurement Uncertainty	
Test Items	Extended Uncertainty
Uncertainty for Conducted Emission 150kHz-30MHz (for test using AMN ENV432 or ENV4200)	3.21dB
Uncertainty for Radiated Spurious Emission 25MHz-3000MHz	Horizontal: 4.81dB; Vertical: 4.89dB;
Uncertainty for Radiated Spurious Emission 3000MHz-18000MHz	Horizontal: 4.69dB; Vertical: 4.68dB;
Uncertainty for Radiated Spurious Emission 18000MHz-40000MHz	Horizontal: 4.89dB; Vertical: 4.87dB;
Uncertainty for Conducted RF test with TS 8997	RF Power Conducted: 1.16dB Frequency test involved: $0.6 \times 10^{-7}$ or 1%

---THE END OF REPORT---