


EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE1 -CH149_Ant A	Test Voltage	AC 120V/60Hz

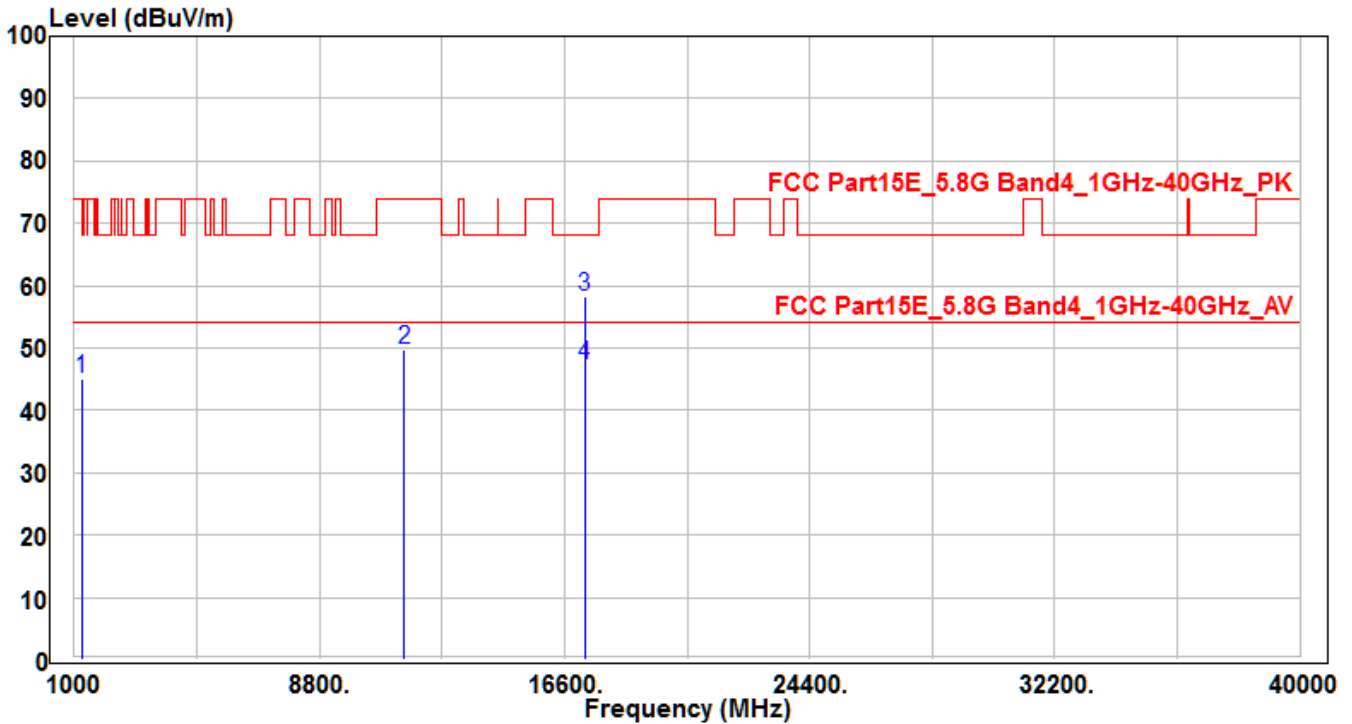


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1241.67	51.85	-6.68	45.17	-23.03	68.2	150	400	Peak
2	11490	30.41	19.24	49.65	-24.35	74	150	400	Peak
3	* 17235	30.39	27.74	58.13	-10.07	68.2	170	380	Peak
4	* 17235	19.5	27.74	47.24	-6.76	54	170	380	Average

Note :

1. " \* " means the worst value in this measurement data °
2. Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) °
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE1 -CH149_Ant A	Test Voltage	AC 120V/60Hz

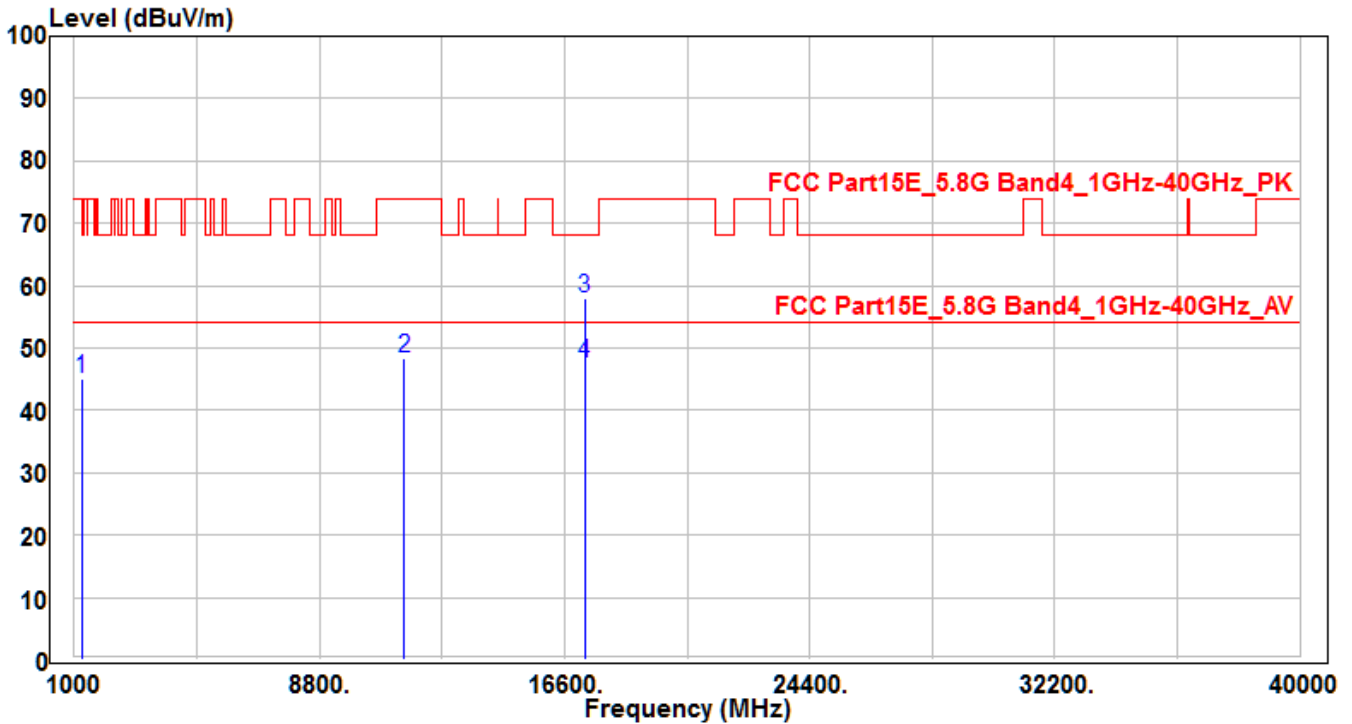


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1245.52	51.85	-6.66	45.19	-23.01	68.2	150	400	Peak
2	11490	29.18	19.24	48.42	-25.58	74	150	400	Peak
3	* 17235	30.31	27.74	58.05	-10.15	68.2	160	395	Peak
4	* 17235	19.73	27.74	47.47	-6.53	54	160	395	Average

Note :

1. " \* " means the worst value in this measurement data °
2. Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) °
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE1 -CH149_Ant B	Test Voltage	AC 120V/60Hz

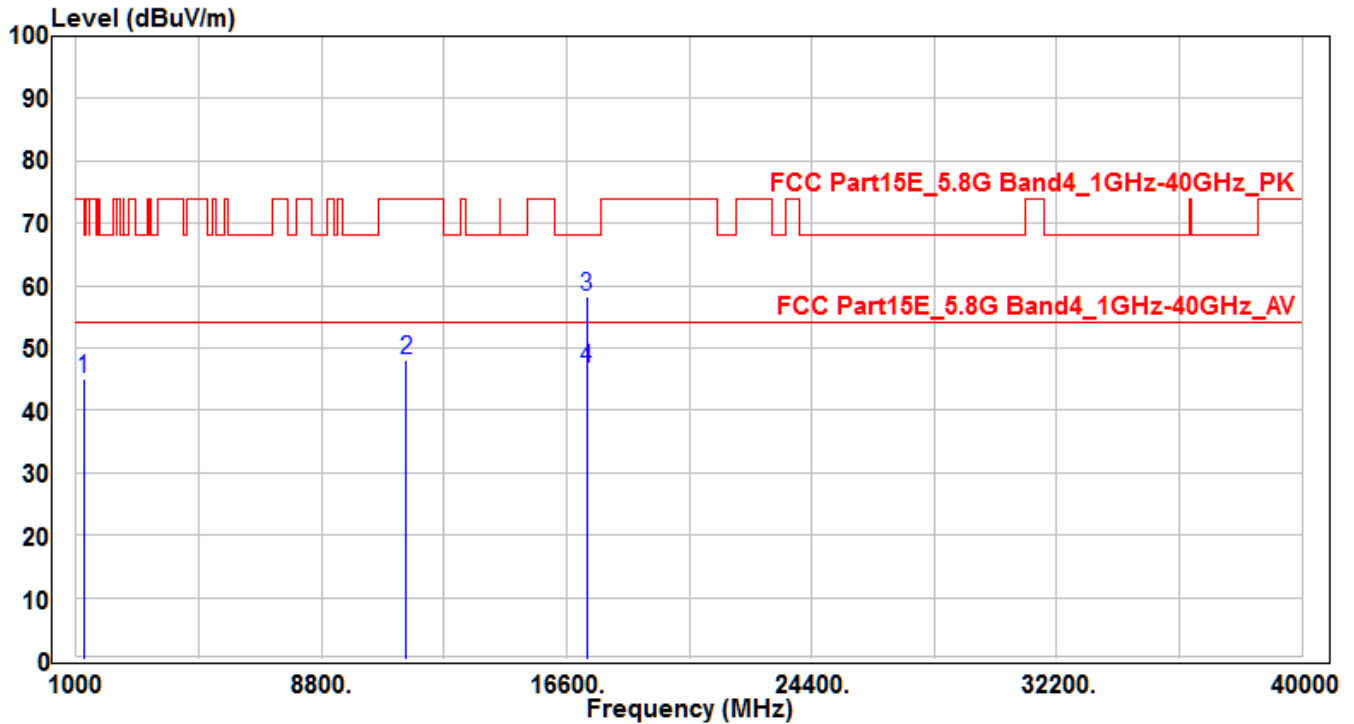


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1242.55	51.76	-6.67	45.09	-23.11	68.2	150	400	Peak
2	11490	28.73	19.24	47.97	-26.03	74	150	400	Peak
3	* 17235	30.49	27.74	58.23	-9.97	68.2	165	400	Peak
4	* 17235	19.02	27.74	46.76	-7.24	54	165	400	Average

Note :

1. " \* " means the worst value in this measurement data ◦
2. Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) ◦
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) ◦
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report ◦

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE1 -CH149_Ant B	Test Voltage	AC 120V/60Hz

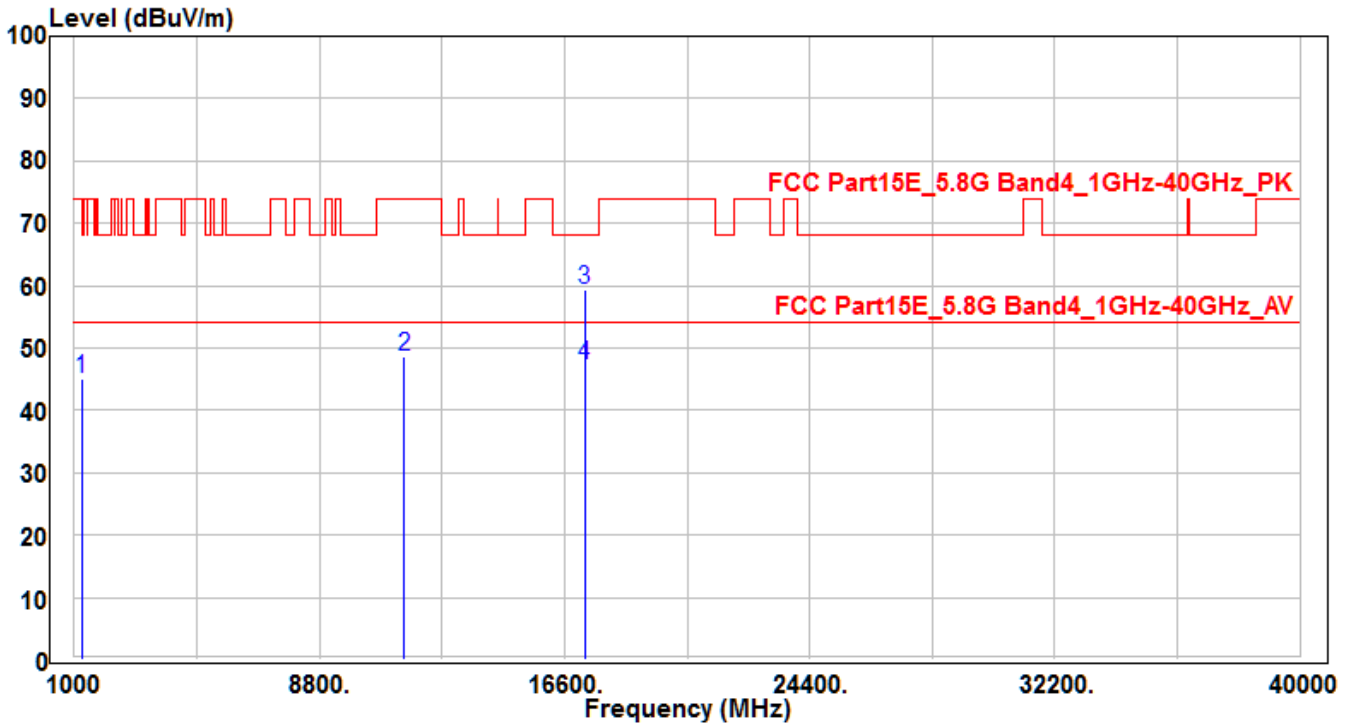


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1244.68	51.67	-6.66	45.01	-23.19	68.2	150	400	Peak
2	11490	29.49	19.24	48.73	-25.27	74	150	400	Peak
3	* 17235	31.49	27.74	59.23	-8.97	68.2	170	390	Peak
4	* 17235	19.63	27.74	47.37	-6.63	54	170	390	Average

Note :

1. " \* " means the worst value in this measurement data °
2. Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) °
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE1 -CH157_Ant A	Test Voltage	AC 120V/60Hz

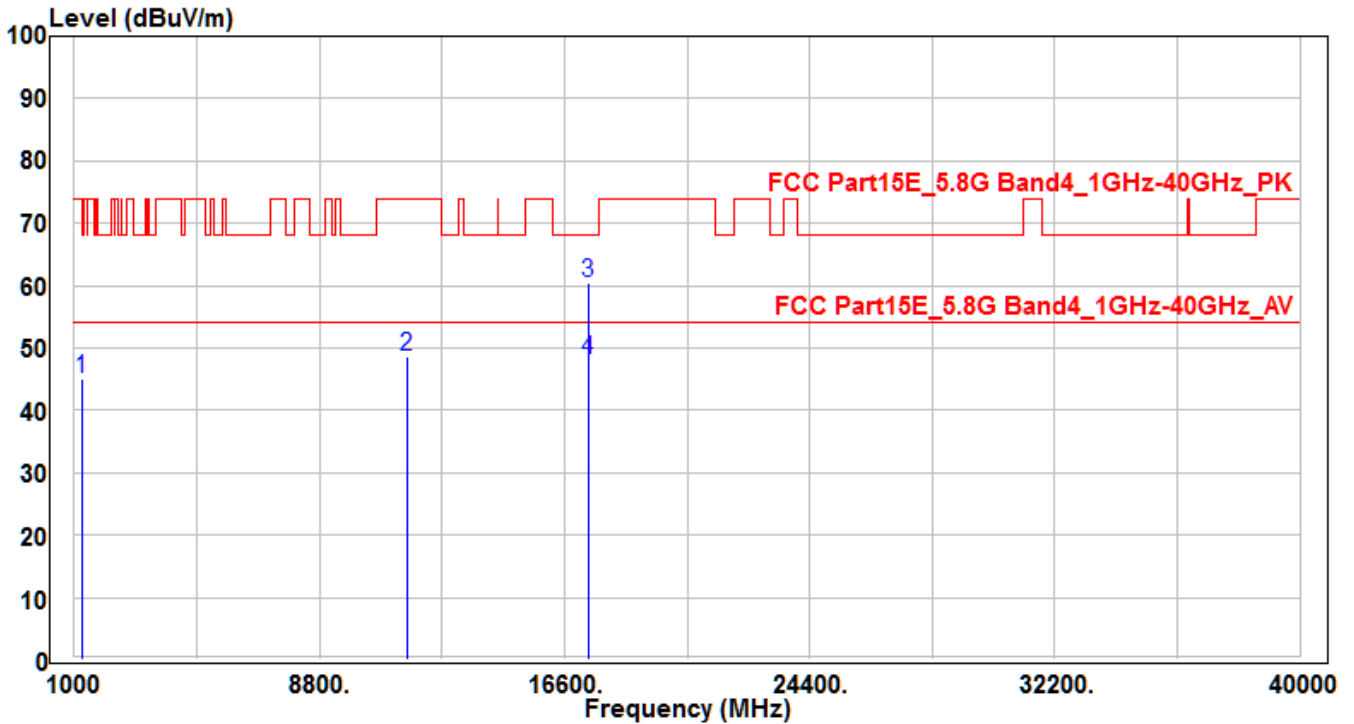


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1246.62	51.67	-6.65	45.02	-23.18	68.2	150	400	Peak
2	11570	29.54	19.19	48.73	-25.27	74	150	400	Peak
3	* 17355	31.78	28.73	60.51	-7.69	68.2	175	395	Peak
4	* 17355	19.48	28.73	48.21	-5.79	54	175	395	Average

Note :

1. " \* " means the worst value in this measurement data ◦
2. Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) ◦
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) ◦
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report ◦

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE1 -CH157_Ant A	Test Voltage	AC 120V/60Hz

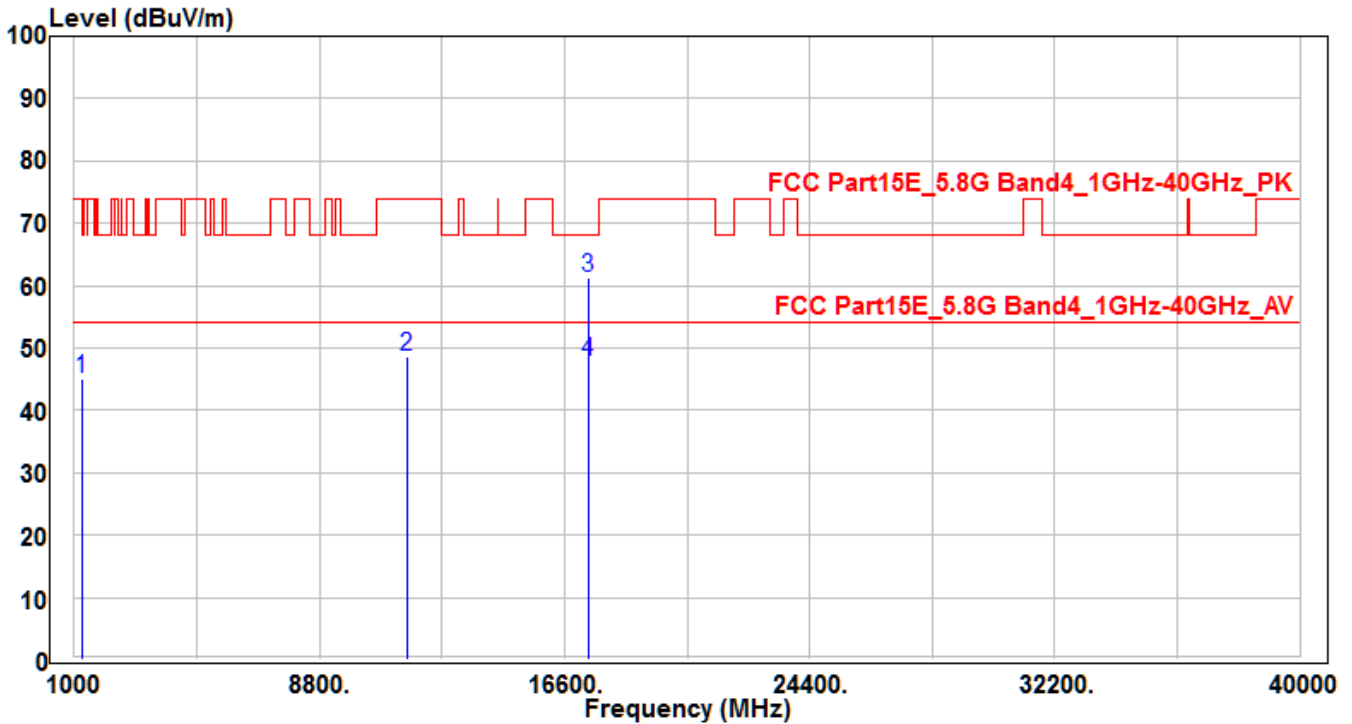


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1242.81	51.7	-6.67	45.03	-23.17	68.2	150	400	Peak
2	11570	29.44	19.19	48.63	-25.37	74	150	400	Peak
3	* 17355	32.47	28.73	61.2	-7	68.2	165	385	Peak
4	* 17355	19.07	28.73	47.8	-6.2	54	165	385	Average

Note :

- "\*" means the worst value in this measurement data °
- Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) °
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
- The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE1 -CH157_Ant B	Test Voltage	AC 120V/60Hz

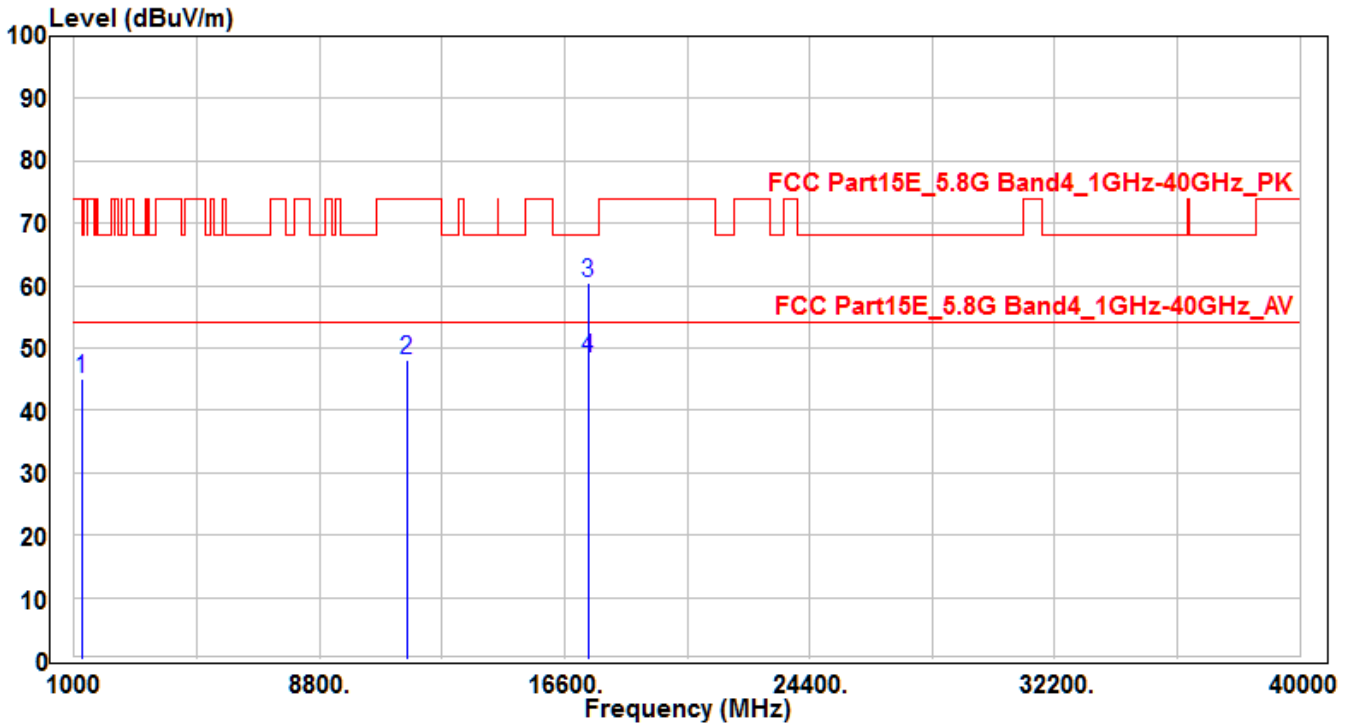


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1241.93	51.61	-6.67	44.94	-23.26	68.2	150	400	Peak
2	11570	28.93	19.19	48.12	-25.88	74	150	400	Peak
3	* 17355	31.81	28.73	60.54	-7.66	68.2	175	380	Peak
4	* 17355	19.69	28.73	48.42	-5.58	54	175	380	Average

Note :

1. " \* " means the worst value in this measurement data °
2. Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) °
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE1 -CH157_Ant B	Test Voltage	AC 120V/60Hz

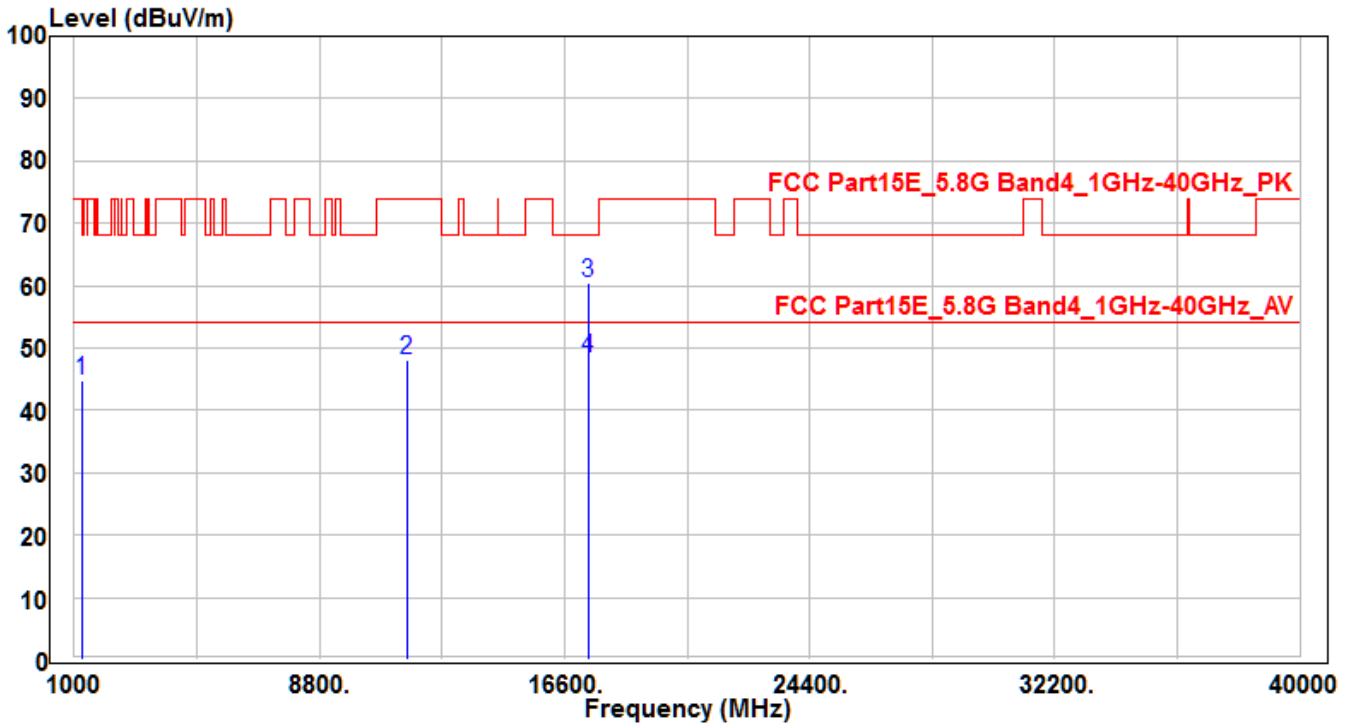


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1248.24	51.33	-6.64	44.69	-23.51	68.2	150	400	Peak
2	11570	28.83	19.19	48.02	-25.98	74	150	400	Peak
3	* 17355	31.8	28.73	60.53	-7.67	68.2	170	380	Peak
4	* 17355	19.76	28.73	48.49	-5.51	54	170	380	Average

Note :

1. " \* " means the worst value in this measurement data ◦
2. Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) ◦
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) ◦
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report ◦



EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE1 -CH165_Ant A	Test Voltage	AC 120V/60Hz

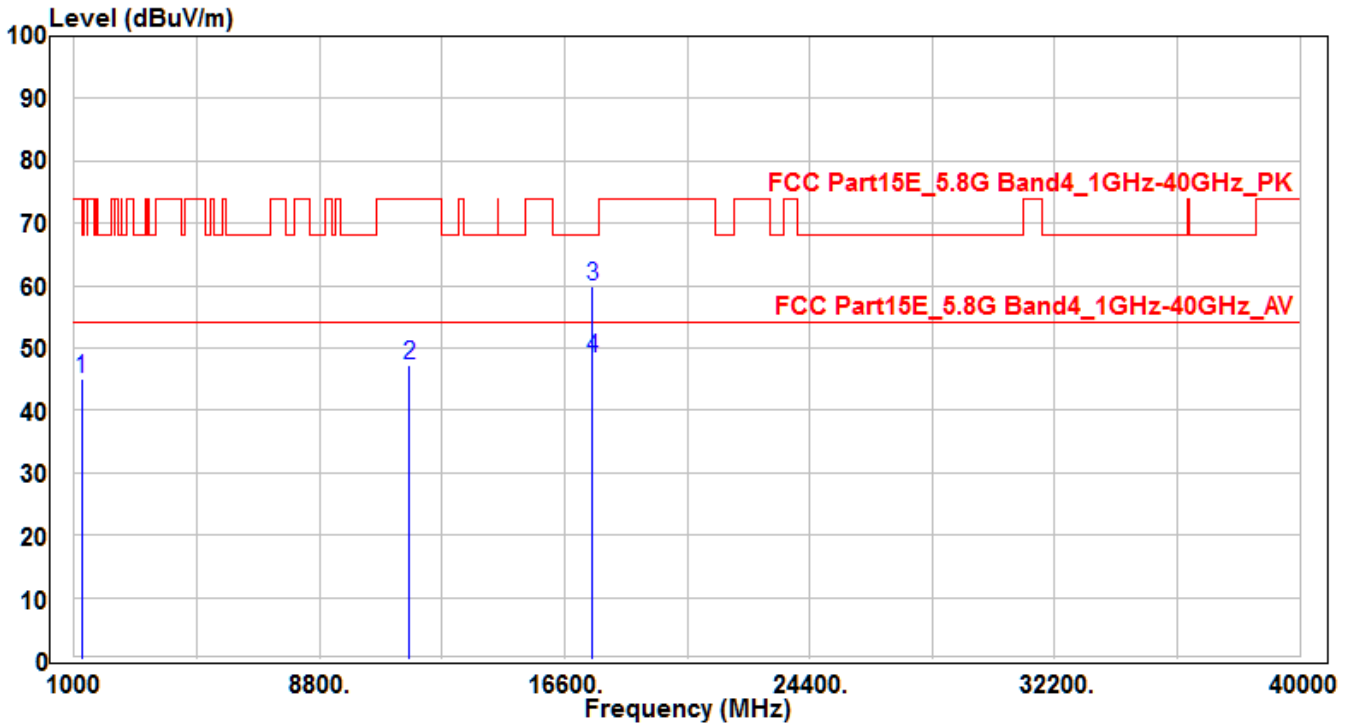


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1248.62	51.73	-6.64	45.09	-23.11	68.2	150	400	Peak
2	11650	28.18	19.12	47.3	-26.7	74	150	400	Peak
3	* 17475	30.3	29.72	60.02	-8.18	68.2	180	390	Peak
4	* 17475	18.69	29.72	48.41	-5.59	54	180	390	Average

Note :

1. " \* " means the worst value in this measurement data ◦
2. Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) ◦
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) ◦
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report ◦

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE1 -CH165_Ant A	Test Voltage	AC 120V/60Hz

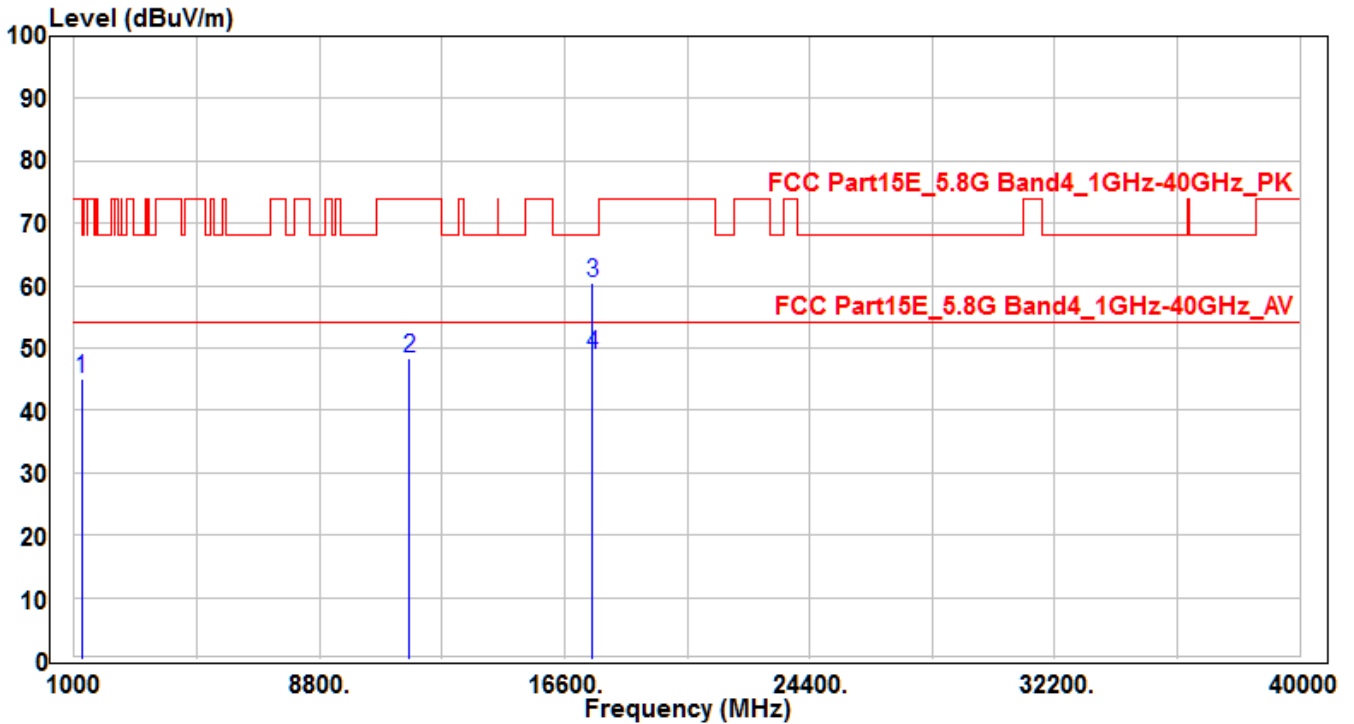


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1242.65	51.63	-6.67	44.96	-23.24	68.2	150	400	Peak
2	11650	29.11	19.12	48.23	-25.77	74	150	400	Peak
3	* 17475	30.75	29.72	60.47	-7.73	68.2	160	365	Peak
4	* 17475	19.13	29.72	48.85	-5.15	54	160	365	Average

Note :

1. " \* " means the worst value in this measurement data °
2. Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) °
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE1 -CH165_Ant B	Test Voltage	AC 120V/60Hz

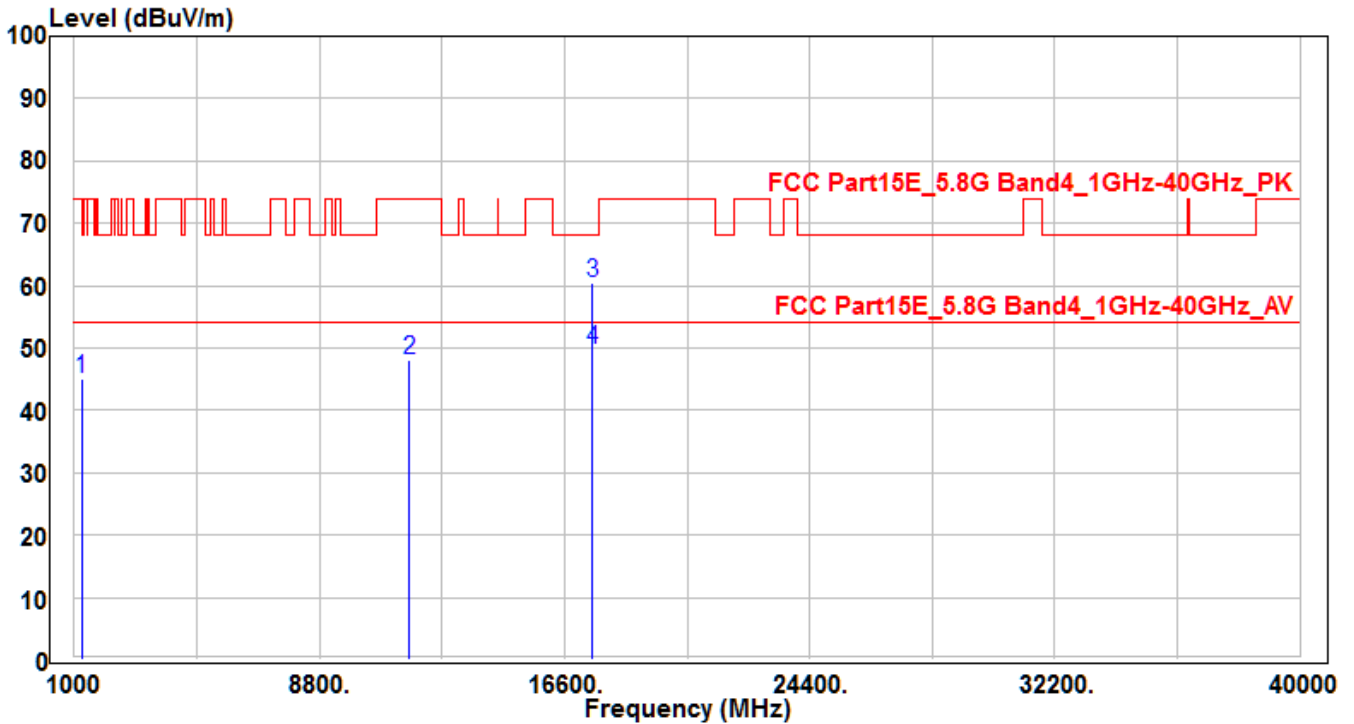


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1241.39	51.68	-6.68	45	-23.2	68.2	150	400	Peak
2	11650	28.98	19.12	48.1	-25.9	74	150	400	Peak
3	* 17475	30.72	29.72	60.44	-7.76	68.2	160	395	Peak
4	* 17475	19.96	29.72	49.68	-4.32	54	160	395	Average

Note :

1. " \* " means the worst value in this measurement data °
2. Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) °
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE1 -CH165_Ant B	Test Voltage	AC 120V/60Hz

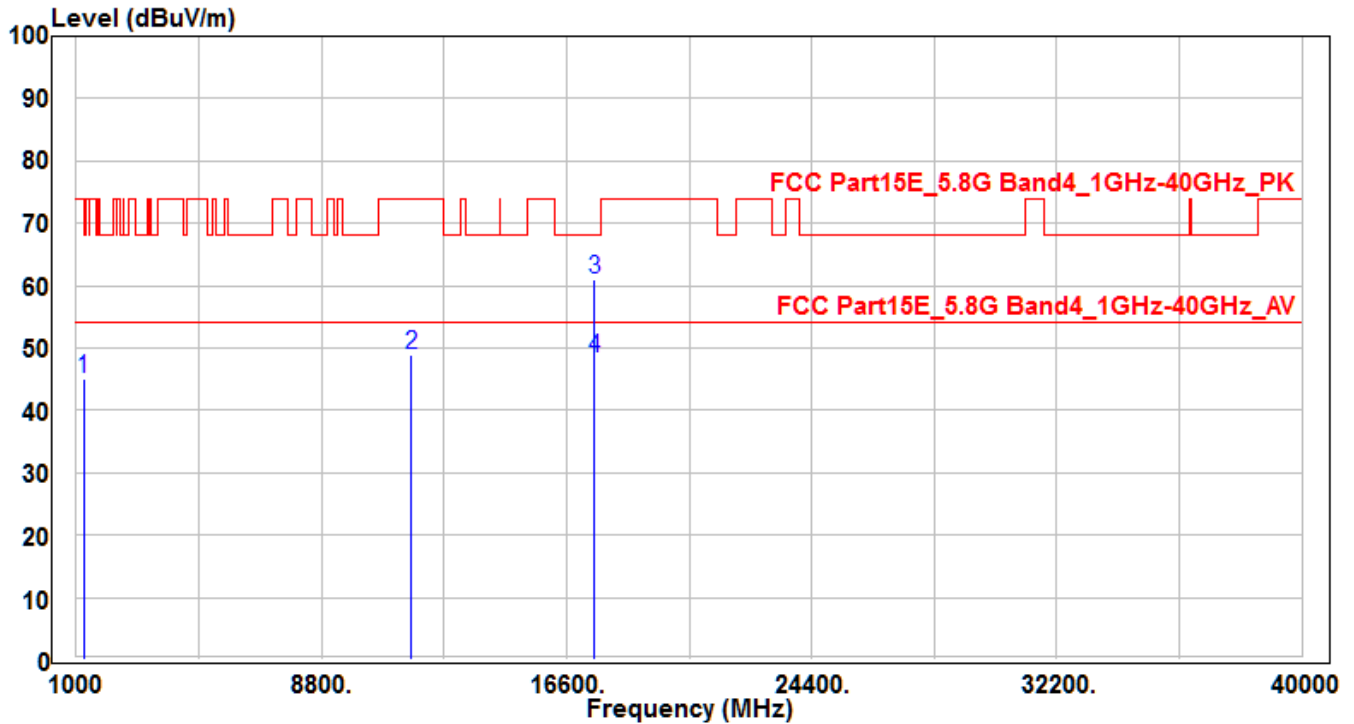


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1245.57	51.67	-6.66	45.01	-23.19	68.2	150	400	Peak
2	11650	29.66	19.12	48.78	-25.22	74	150	400	Peak
3	* 17475	31.16	29.72	60.88	-7.32	68.2	165	395	Peak
4	* 17475	18.54	29.72	48.26	-5.74	54	165	395	Average

Note :

1. " \* " means the worst value in this measurement data °
2. Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) °
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE2 -CH36_Ant A+B	Test Voltage	AC 120V/60Hz

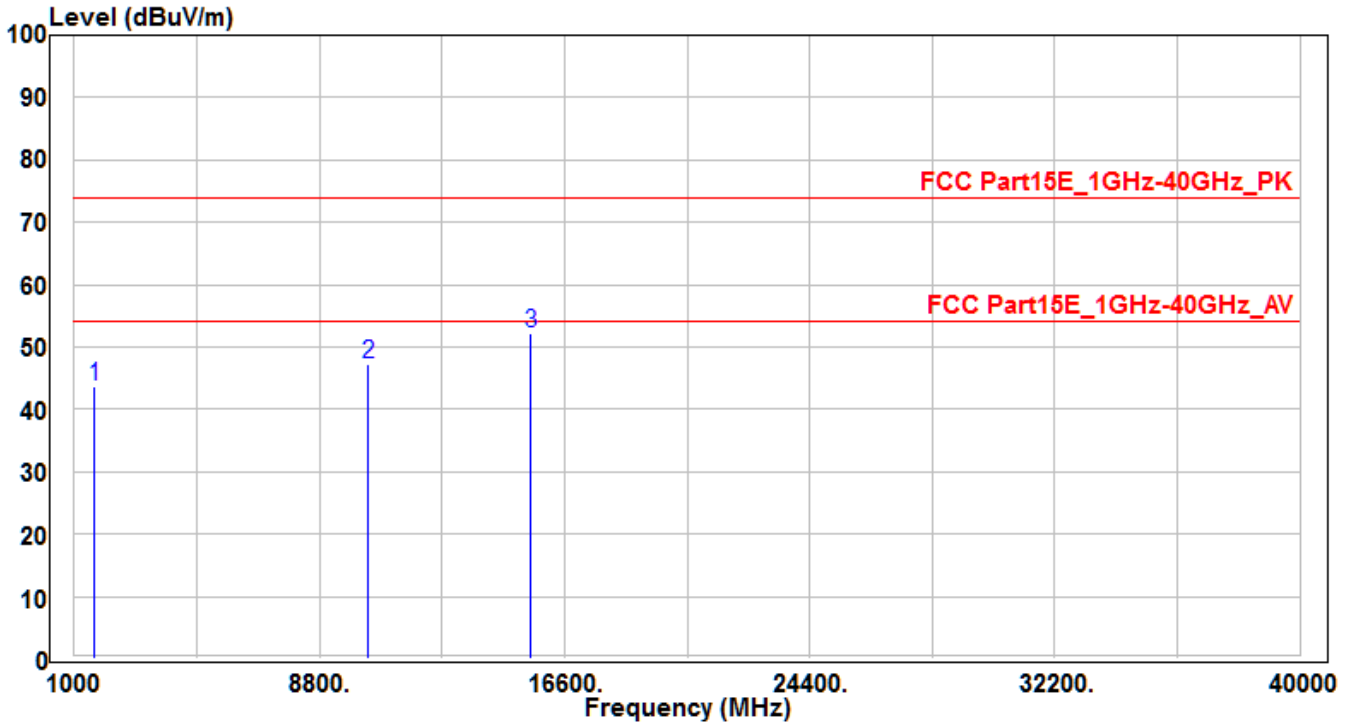


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1648.3	48.58	-4.98	43.6	-30.4	74	150	400	Peak
2	10360	30.02	17.34	47.36	-26.64	74	150	400	Peak
3	* 15540	30.41	21.82	52.23	-21.77	74	150	400	Peak

Note :

1. " \* " means the worst value in this measurement data ◦
2. Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) ◦
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) ◦
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report ◦

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE2 -CH36_Ant A+B	Test Voltage	AC 120V/60Hz

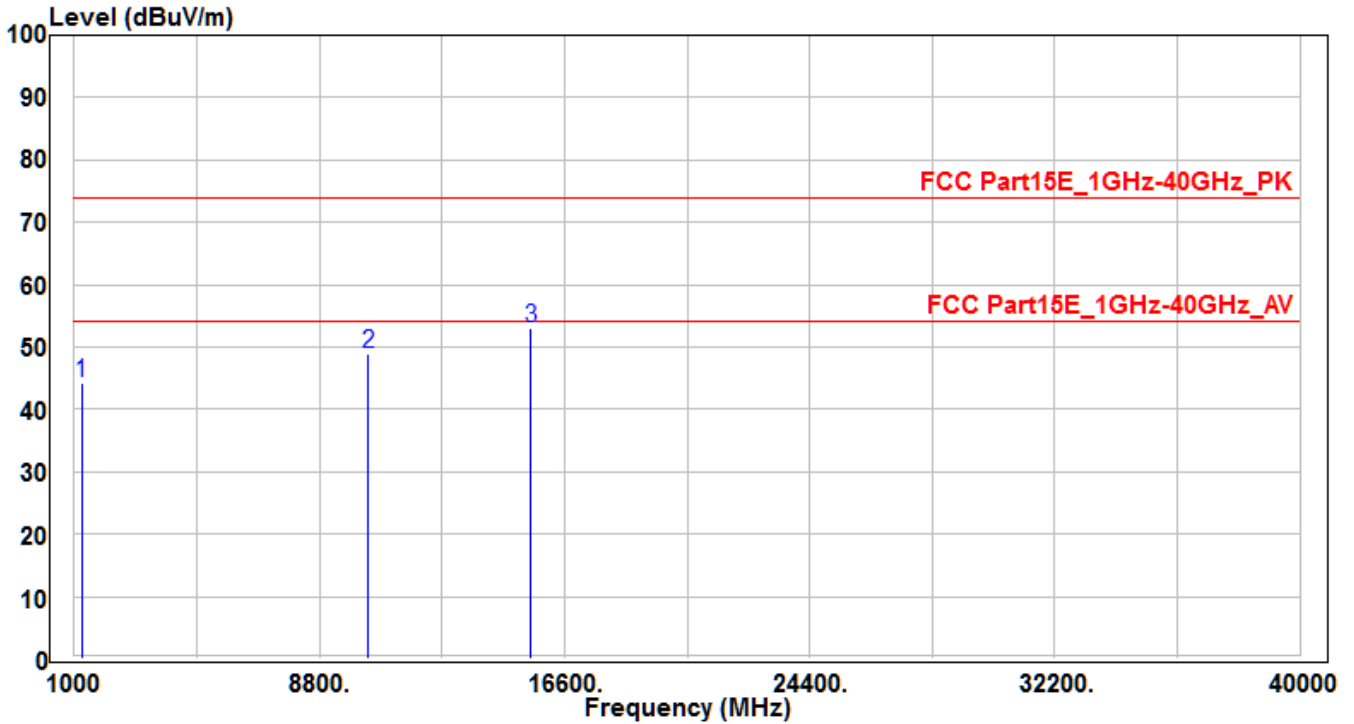


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1244.85	50.9	-6.66	44.24	-29.76	74	150	400	Peak
2	10360	31.57	17.34	48.91	-25.09	74	150	400	Peak
3	* 15540	31.26	21.82	53.08	-20.92	74	150	400	Peak

Note :

1. " \* " means the worst value in this measurement data ◦
2. Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB) ◦
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) ◦
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report ◦

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE2 -CH40_Ant A+B	Test Voltage	AC 120V/60Hz

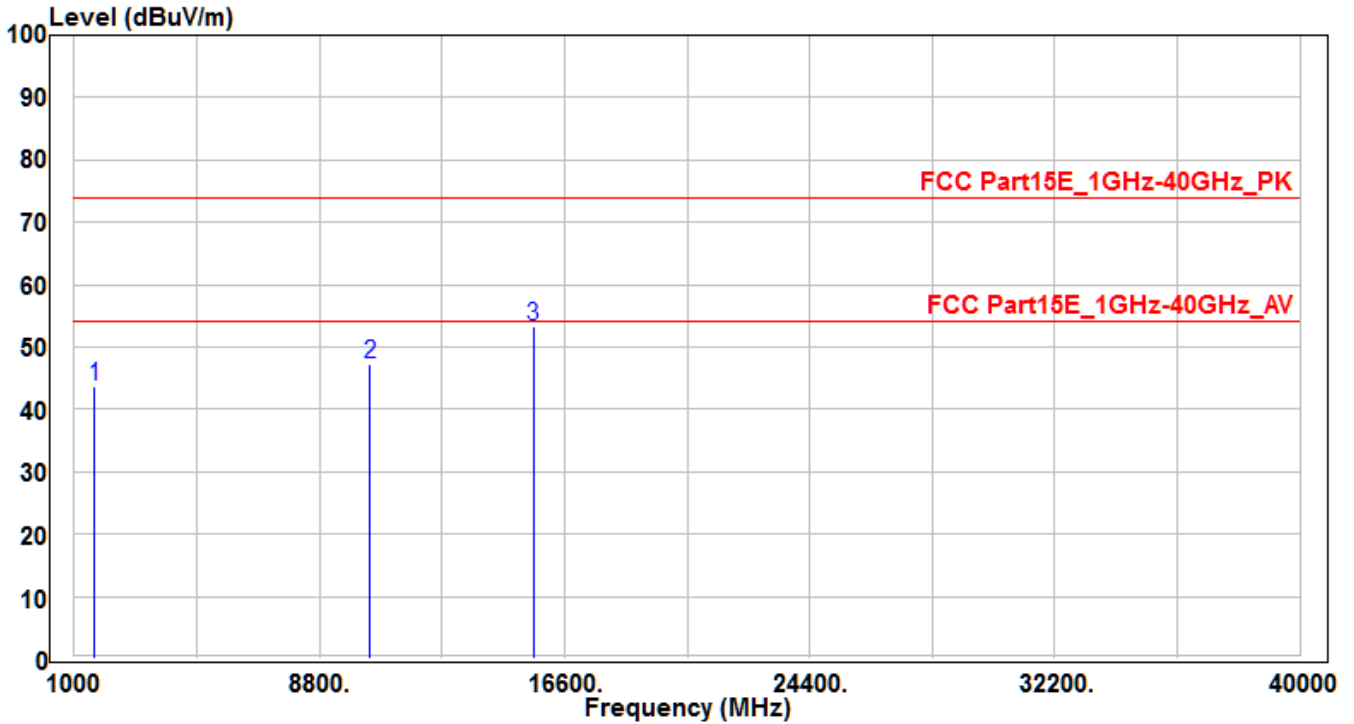


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1652.67	48.57	-4.97	43.6	-30.4	74	150	400	Peak
2	10400	29.61	17.53	47.14	-26.86	74	150	400	Peak
3	* 15600	31.61	21.6	53.21	-20.79	74	150	400	Peak

Note :

1. " \* " means the worst value in this measurement data ◦
2. Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) ◦
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) ◦
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report ◦

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE2 -CH40_Ant A+B	Test Voltage	AC 120V/60Hz

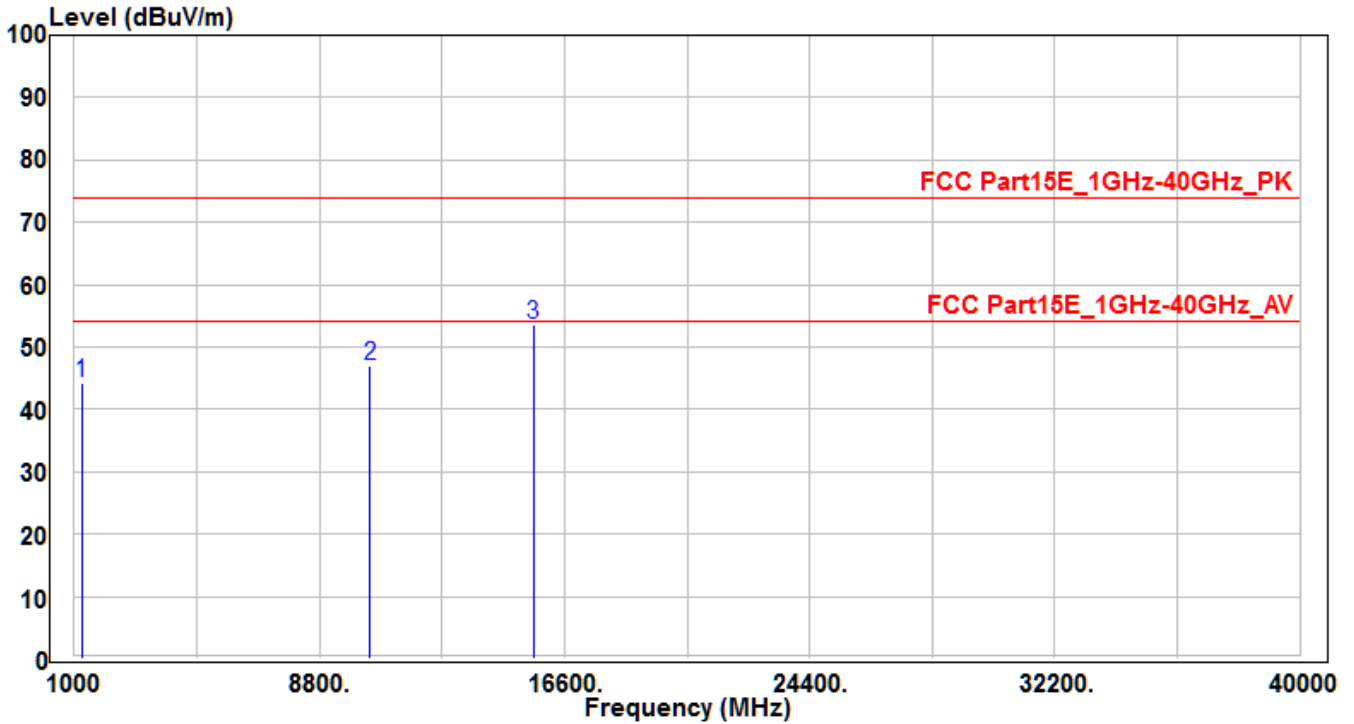


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1245.99	50.87	-6.66	44.21	-29.79	74	150	400	Peak
2	10400	29.44	17.53	46.97	-27.03	74	150	400	Peak
3	* 15600	32.06	21.6	53.66	-20.34	74	150	400	Peak

Note :

1. " \* " means the worst value in this measurement data ◦
2. Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) ◦
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) ◦
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report ◦



EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE2 -CH48_Ant A+B	Test Voltage	AC 120V/60Hz

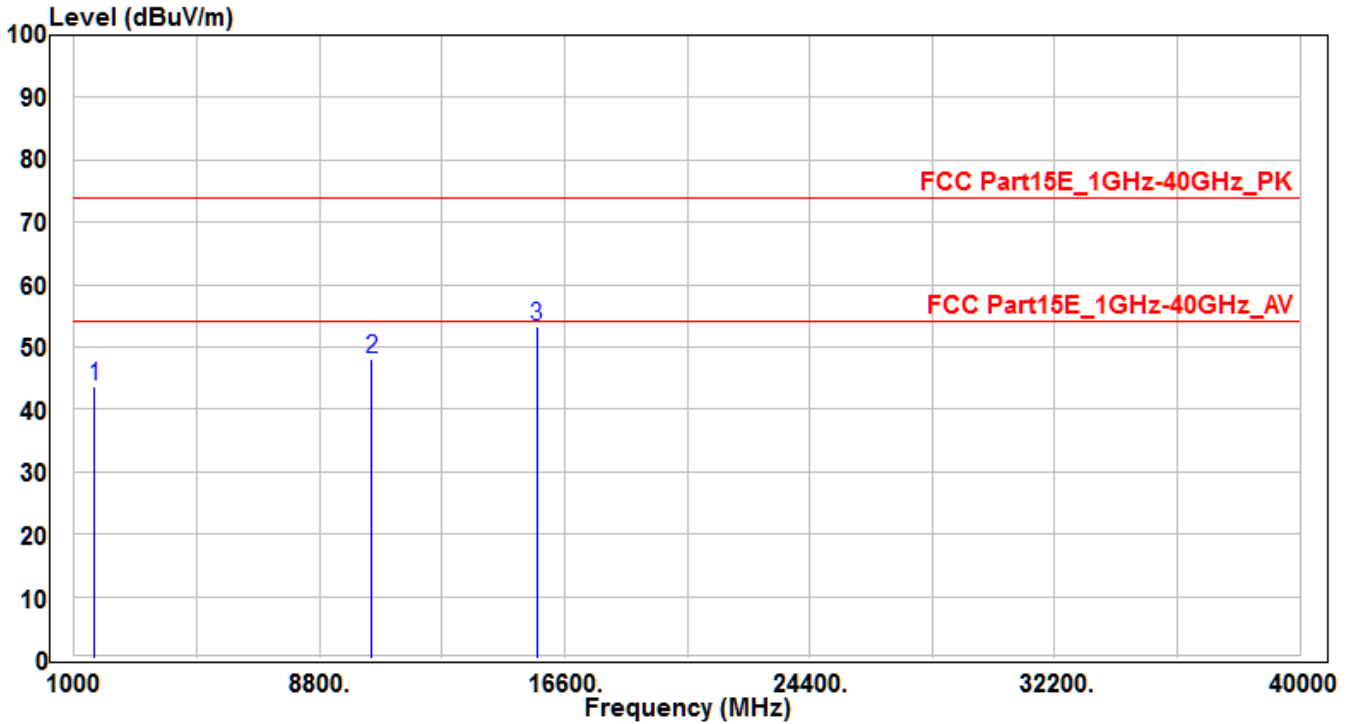


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1659.82	48.64	-4.95	43.69	-30.31	74	150	400	Peak
2	10480	30.33	17.88	48.21	-25.79	74	150	400	Peak
3	* 15720	32.23	21.18	53.41	-20.59	74	150	400	Peak

Note :

1. " \* " means the worst value in this measurement data ◦
2. Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) ◦
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) ◦
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report ◦

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE2 -CH48_Ant A+B	Test Voltage	AC 120V/60Hz

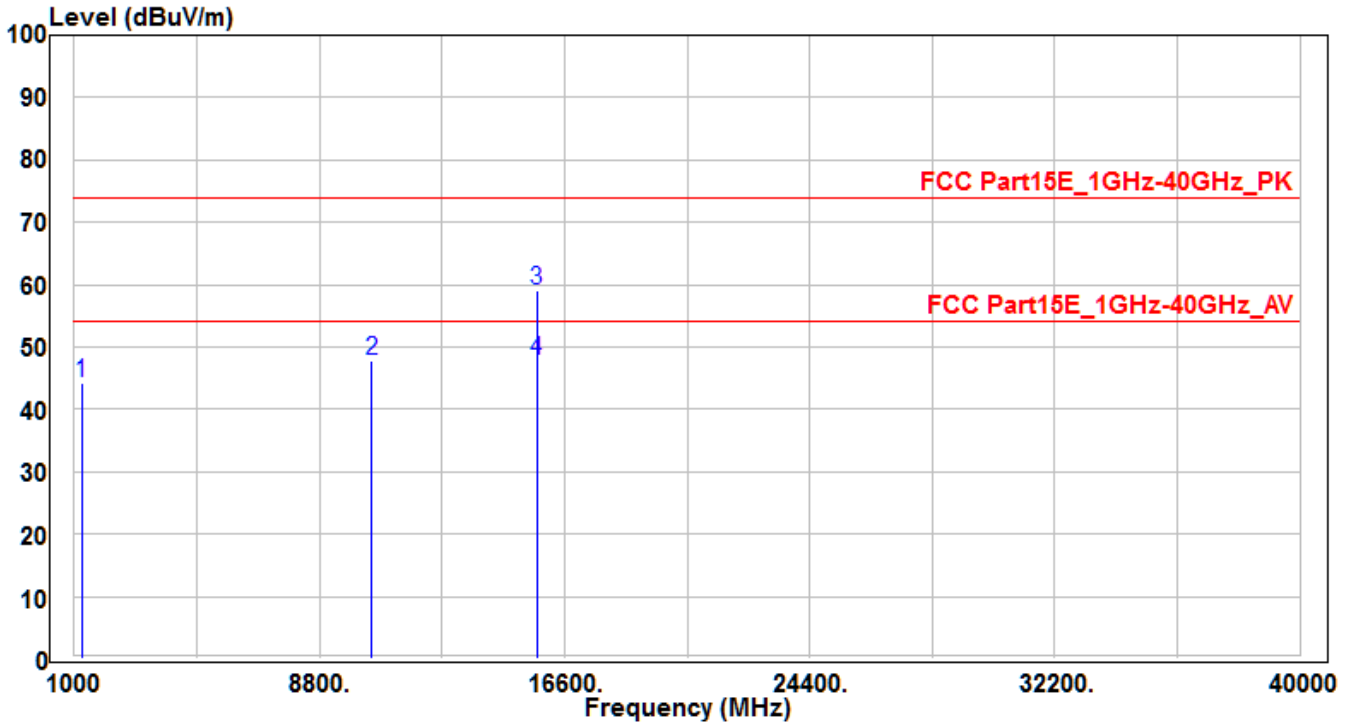


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1248.67	50.88	-6.64	44.24	-29.76	74	150	400	Peak
2	10480	29.96	17.88	47.84	-26.16	74	150	400	Peak
3	* 15720	37.84	21.18	59.02	-14.98	74	150	60	Peak
4	* 15720	26.6	21.18	47.78	-6.22	54	150	60	Average

Note :

1. " \* " means the worst value in this measurement data °
2. Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) °
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE2 -CH52_Ant A+B	Test Voltage	AC 120V/60Hz

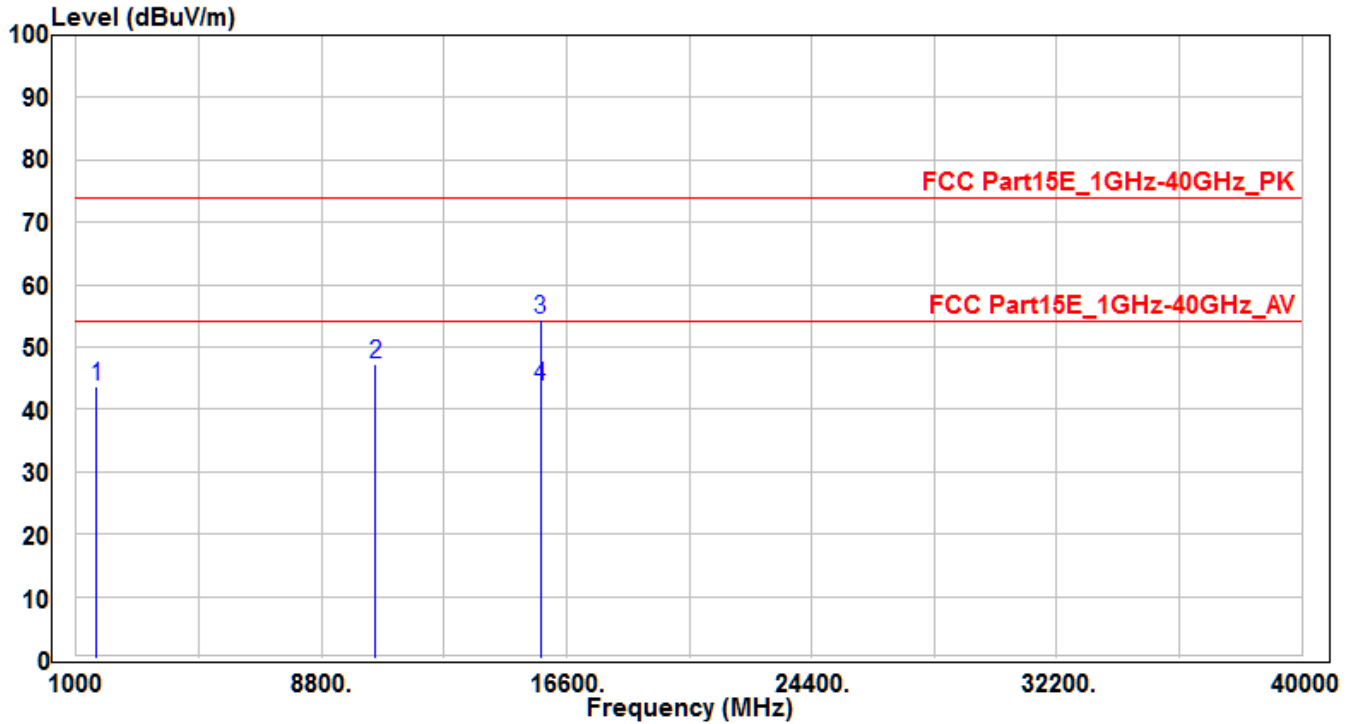


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1648.72	48.77	-4.98	43.79	-30.21	74	150	400	Peak
2	10520	29.32	18.02	47.34	-26.66	74	150	400	Peak
3	* 15780	33.37	20.98	54.35	-19.65	74	155	70	Peak
4	* 15780	22.75	20.98	43.73	-10.27	54	155	70	Average

Note :

1. " \* " means the worst value in this measurement data °
2. Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) °
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE2 -CH52_Ant A+B	Test Voltage	AC 120V/60Hz

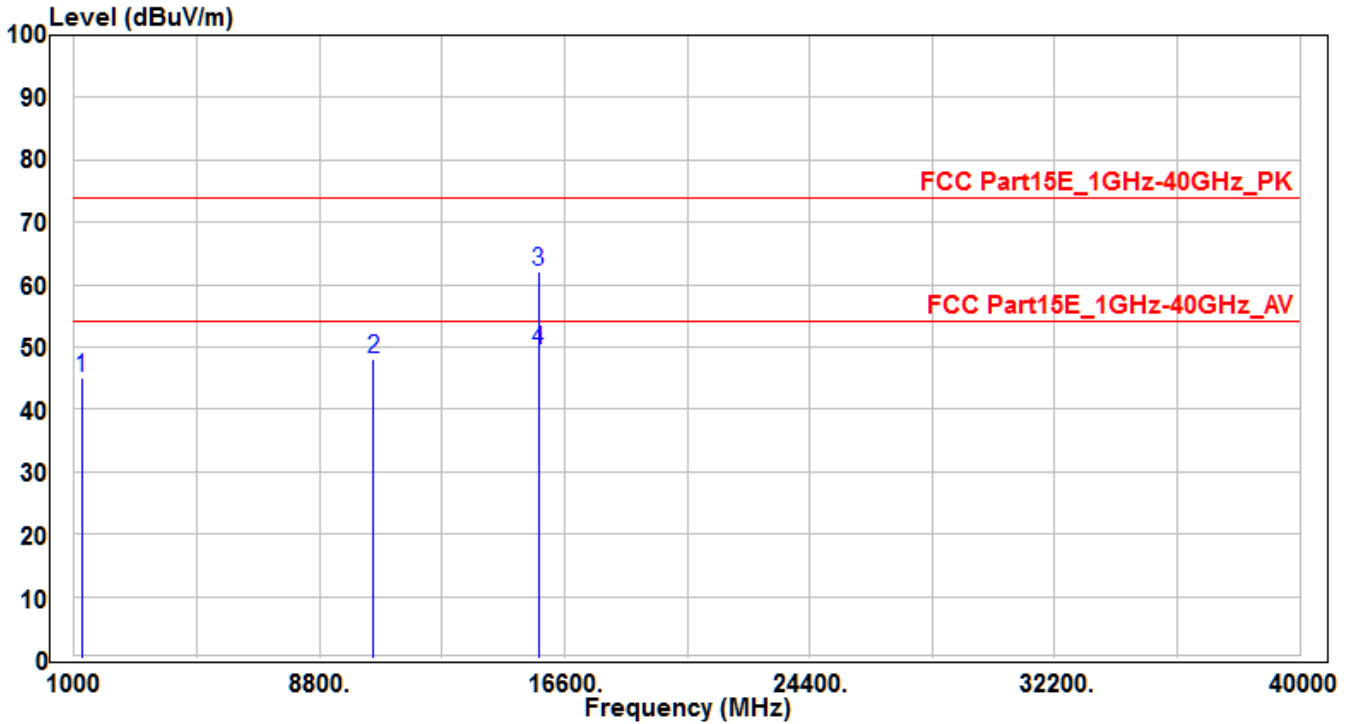


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1242.64	51.75	-6.67	45.08	-28.92	74	150	400	Peak
2	10520	30.01	18.02	48.03	-25.97	74	150	400	Peak
3	* 15780	41.09	20.98	62.07	-11.93	74	150	60	Peak
4	* 15780	28.46	20.98	49.44	-4.56	54	150	60	Average

Note :

1. " \* " means the worst value in this measurement data °
2. Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) °
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE2 -CH56_Ant A+B	Test Voltage	AC 120V/60Hz

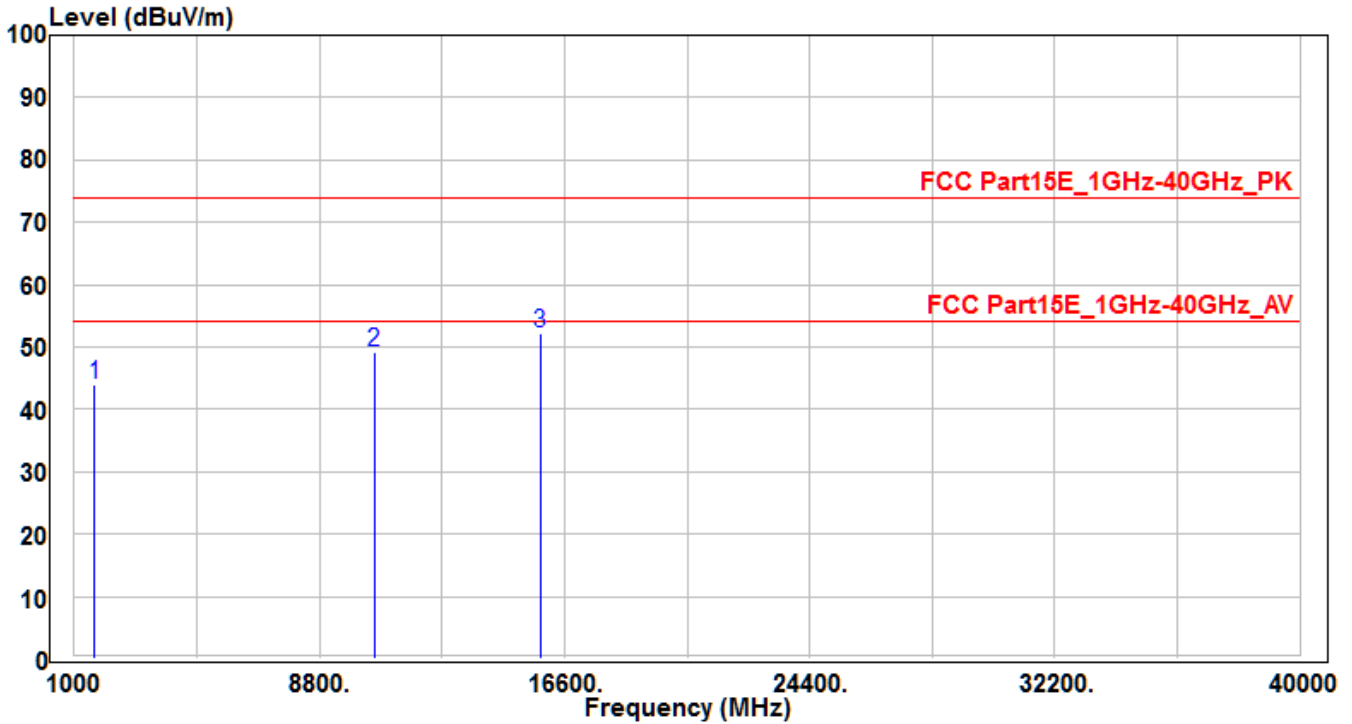


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1650.62	48.89	-4.98	43.91	-30.09	74	150	400	Peak
2	10560	31	18.11	49.11	-24.89	74	150	400	Peak
3	* 15840	31.55	20.77	52.32	-21.68	74	150	400	Peak

Note :

1. " \* " means the worst value in this measurement data °
2. Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) °
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE2 -CH56_Ant A+B	Test Voltage	AC 120V/60Hz

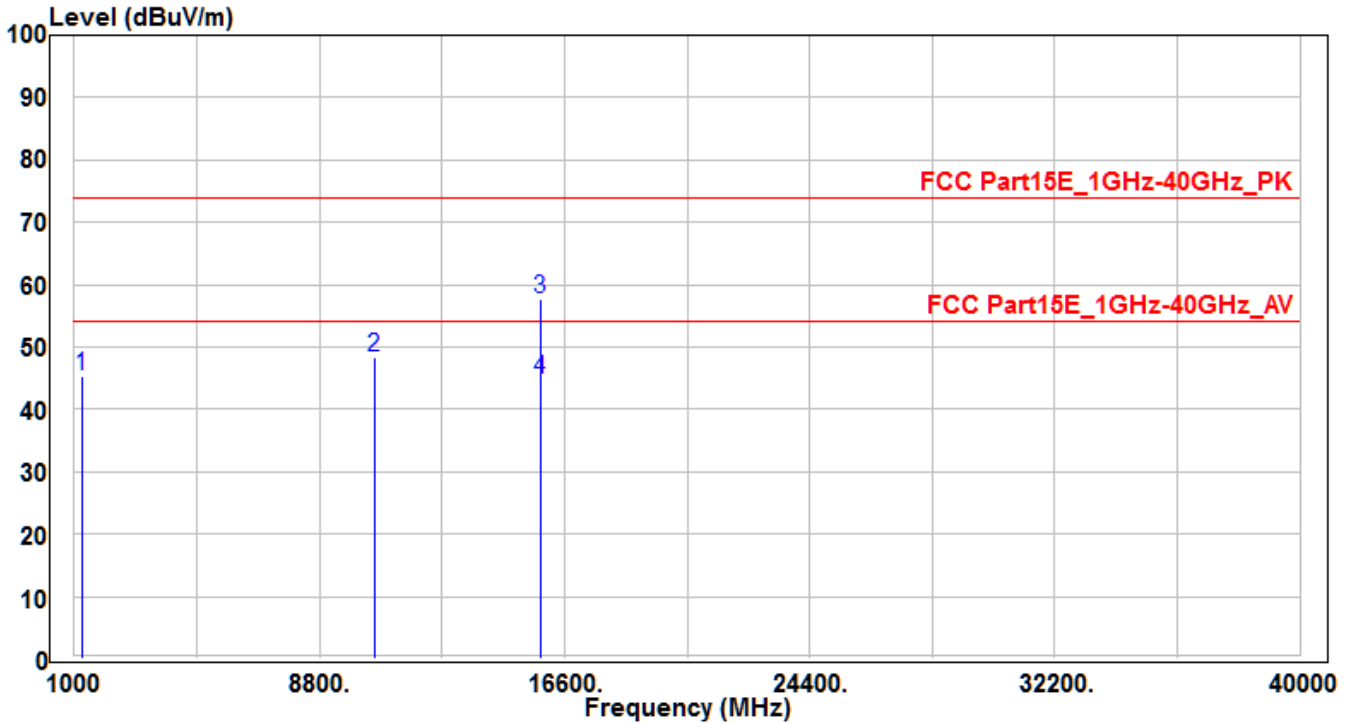


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1248.84	52.05	-6.64	45.41	-28.59	74	150	400	Peak
2	10560	30.26	18.11	48.37	-25.63	74	150	400	Peak
3	* 15840	36.93	20.77	57.7	-16.3	74	150	65	Peak
4	* 15840	23.96	20.77	44.73	-9.27	54	150	65	Average

Note :

1. " \* " means the worst value in this measurement data ◦
2. Measure Level (dBUV/m) = Reading Level (dBUV) + Factor (dB) ◦
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) ◦
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report ◦

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE2 -CH64_Ant A+B	Test Voltage	AC 120V/60Hz

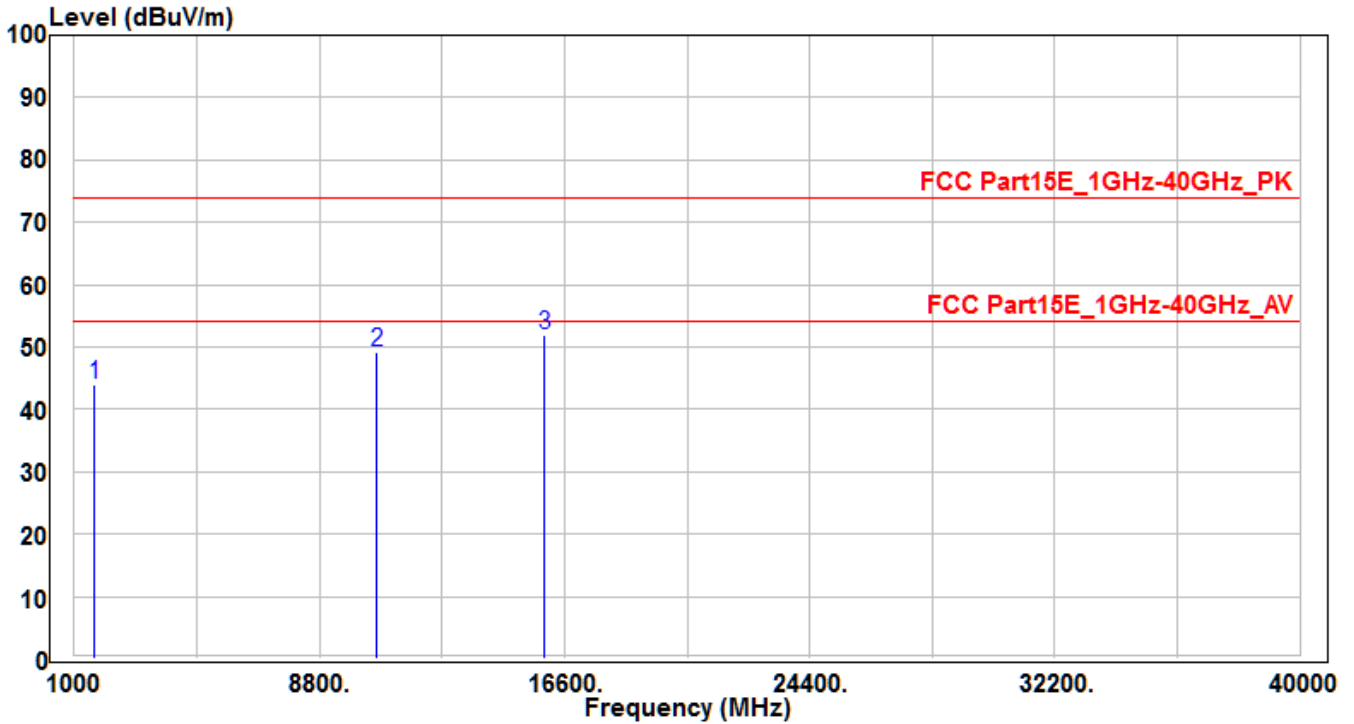


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1653.67	48.79	-4.96	43.83	-30.17	74	150	400	Peak
2	10640	30.89	18.28	49.17	-24.83	74	150	400	Peak
3	* 15960	31.5	20.34	51.84	-22.16	74	150	400	Peak

Note :

1. " \* " means the worst value in this measurement data ◦
2. Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) ◦
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) ◦
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report ◦

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE2 -CH64_Ant A+B	Test Voltage	AC 120V/60Hz

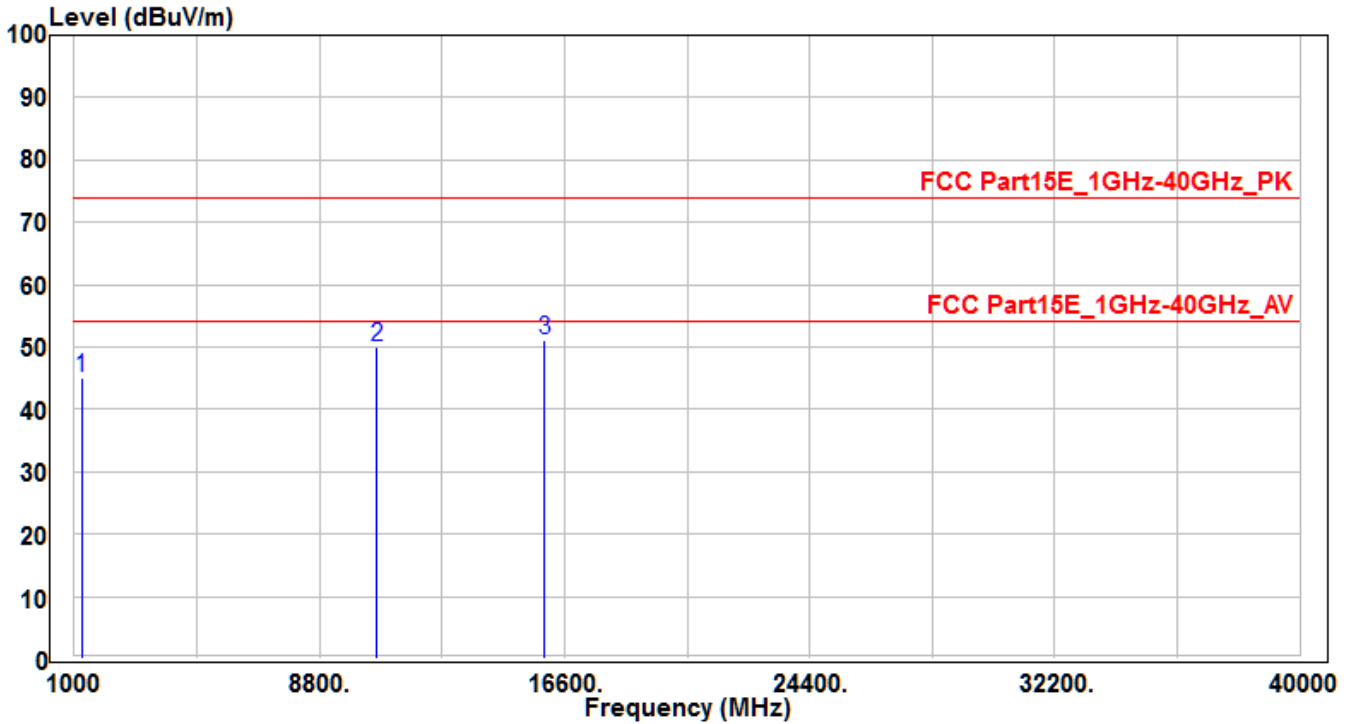


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1249.64	51.84	-6.64	45.2	-28.8	74	150	400	Peak
2	10640	31.75	18.28	50.03	-23.97	74	150	400	Peak
3	* 15960	30.71	20.34	51.05	-22.95	74	150	400	Peak

Note :

1. " \* " means the worst value in this measurement data ◦
2. Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB) ◦
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) ◦
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report ◦



EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE2 -CH100_Ant A+B	Test Voltage	AC 120V/60Hz

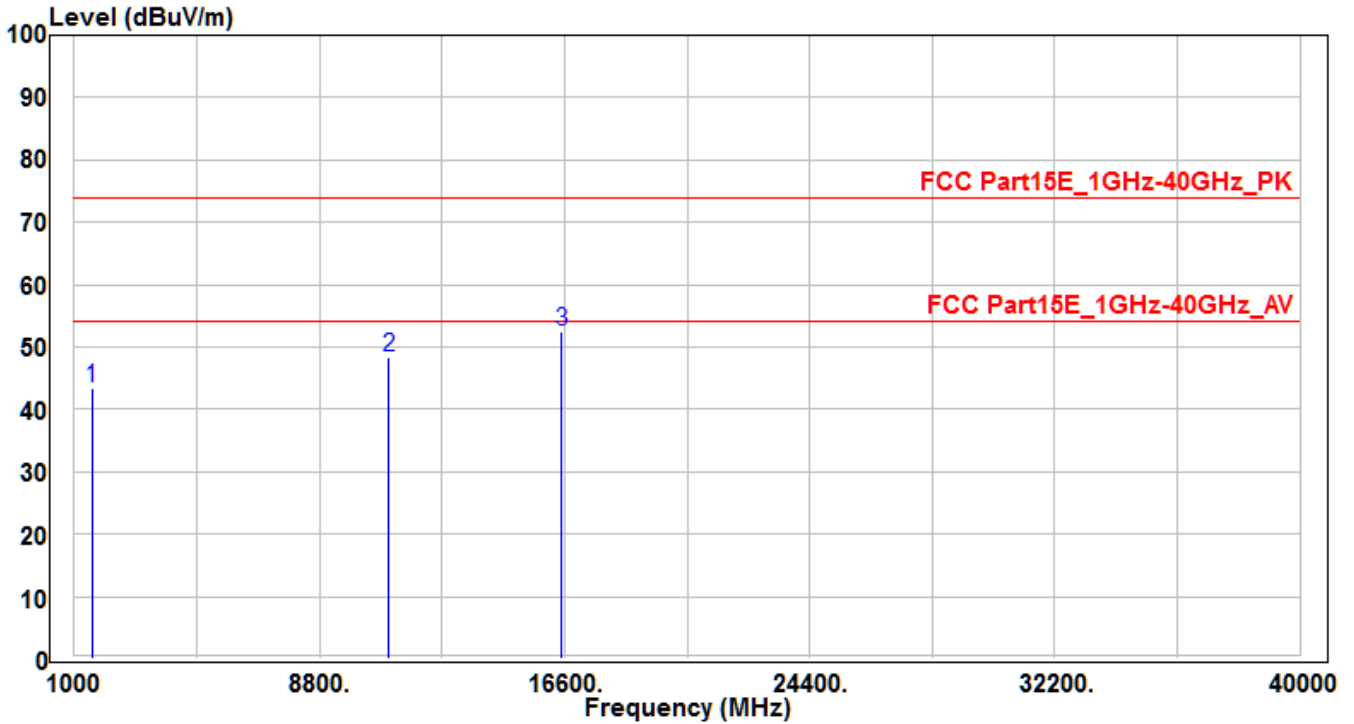


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1559.91	48.63	-5.25	43.38	-30.62	74	150	400	Peak
2	11000	29.16	19.08	48.24	-25.76	74	150	400	Peak
3	* 16500	30.4	22.06	52.46	-21.54	74	150	400	Peak

Note :

1. " \* " means the worst value in this measurement data ◦
2. Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) ◦
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) ◦
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report ◦

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE2 -CH100_Ant A+B	Test Voltage	AC 120V/60Hz

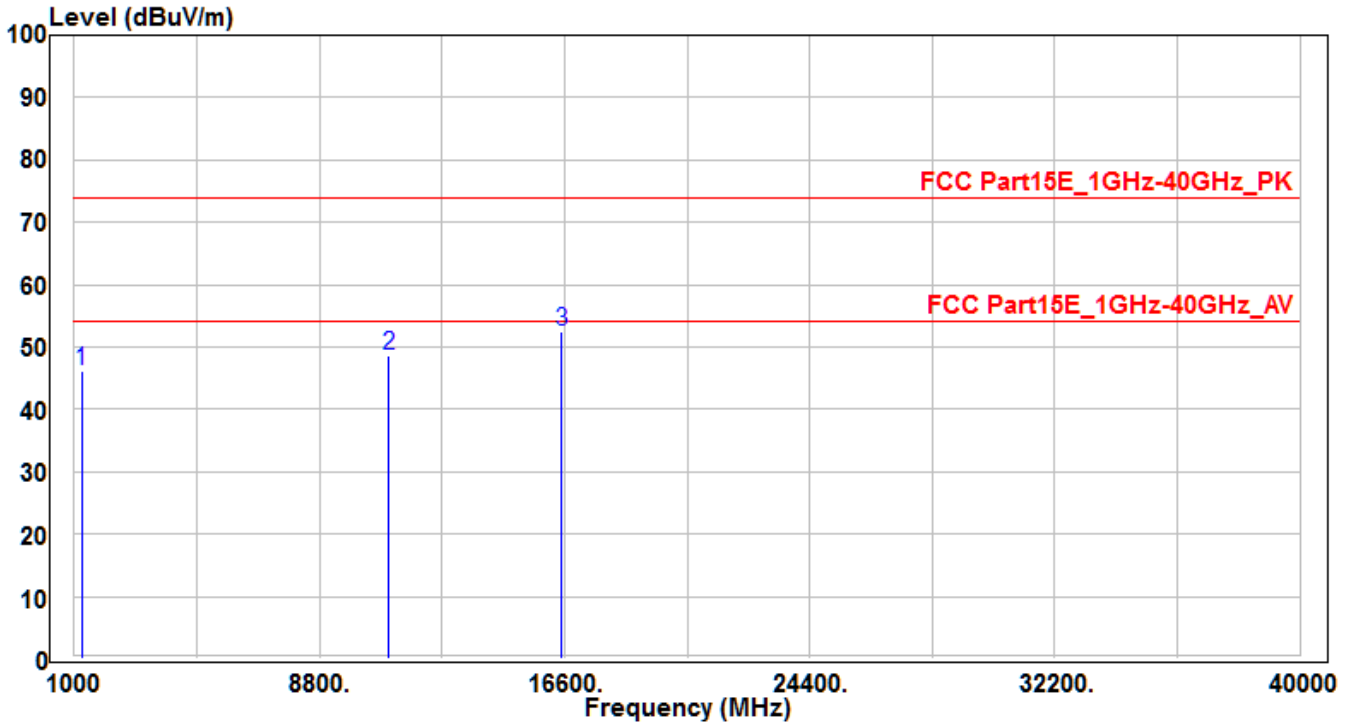


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1240.88	52.75	-6.69	46.06	-27.94	74	150	400	Peak
2	11000	29.68	19.08	48.76	-25.24	74	150	400	Peak
3	* 16500	30.36	22.06	52.42	-21.58	74	150	400	Peak

Note :

1. " \* " means the worst value in this measurement data ◦
2. Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) ◦
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) ◦
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report ◦

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE2 -CH120_Ant A+B	Test Voltage	AC 120V/60Hz

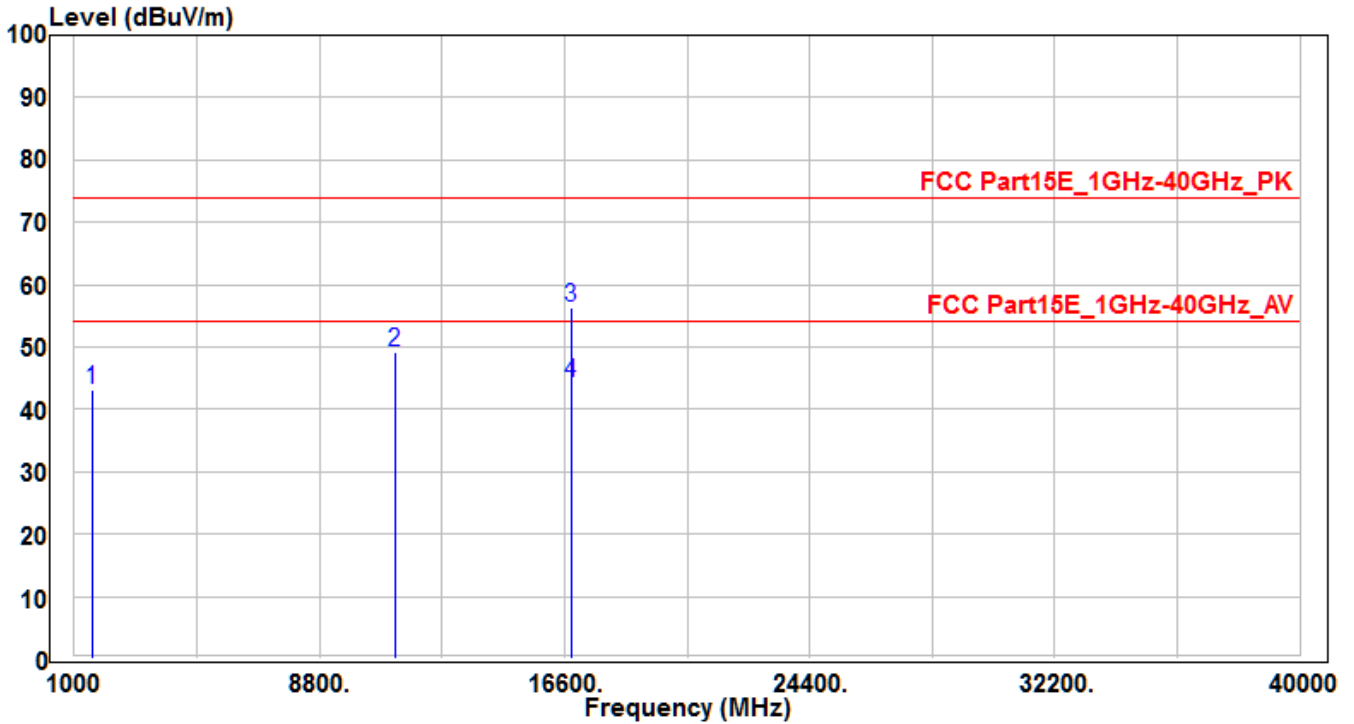


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1553.81	48.46	-5.26	43.2	-30.8	74	150	400	Peak
2	11200	29.95	19.15	49.1	-24.9	74	150	400	Peak
3	* 16800	32.13	24.31	56.44	-17.56	74	150	70	Peak
4	* 16800	19.97	24.31	44.28	-9.72	54	150	70	Average

Note :

1. " \* " means the worst value in this measurement data °
2. Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) °
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE2 - CH120_Ant A+B	Test Voltage	AC 120V/60Hz

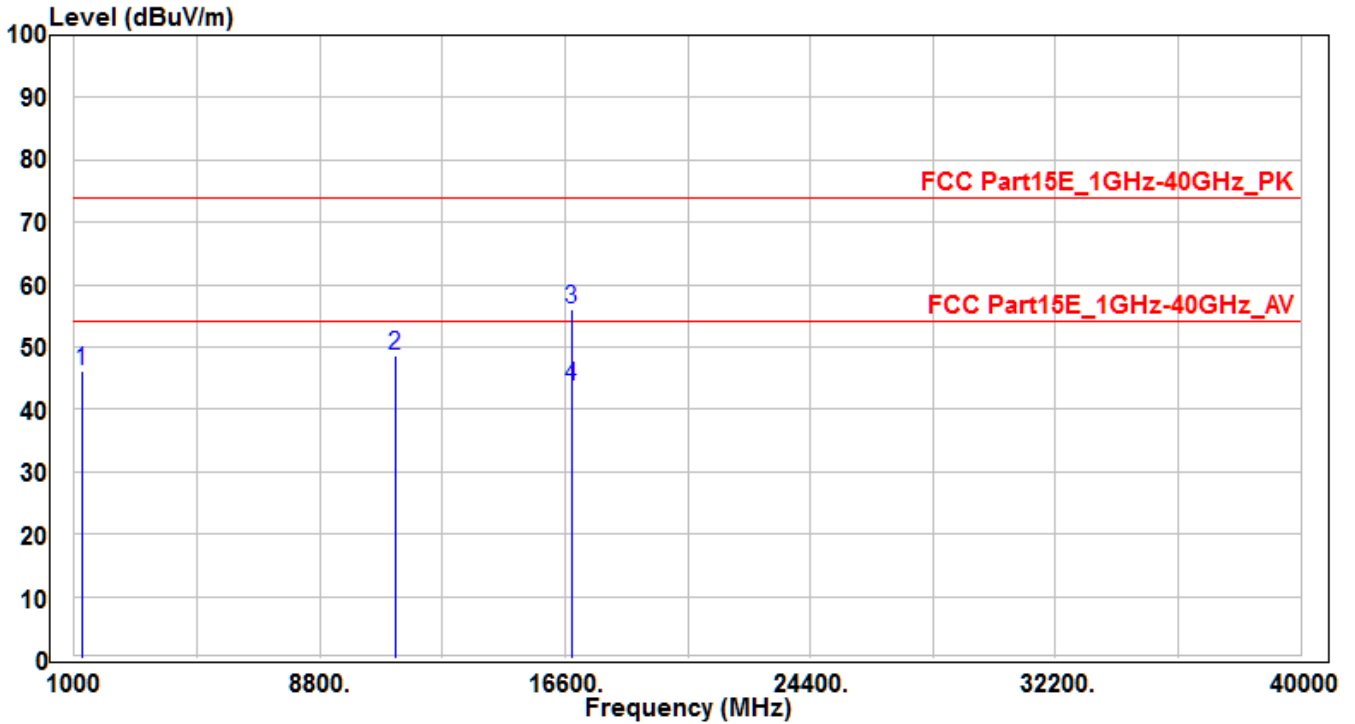


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1241.64	52.85	-6.68	46.17	-27.83	74	150	400	Peak
2	11200	29.47	19.15	48.62	-25.38	74	150	400	Peak
3	* 16800	31.84	24.31	56.15	-17.85	74	155	80	Peak
4	* 16800	19.27	24.31	43.58	-10.42	54	155	80	Average

Note :

1. " \* " means the worst value in this measurement data °
2. Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) °
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE2 -CH140_Ant A+B	Test Voltage	AC 120V/60Hz

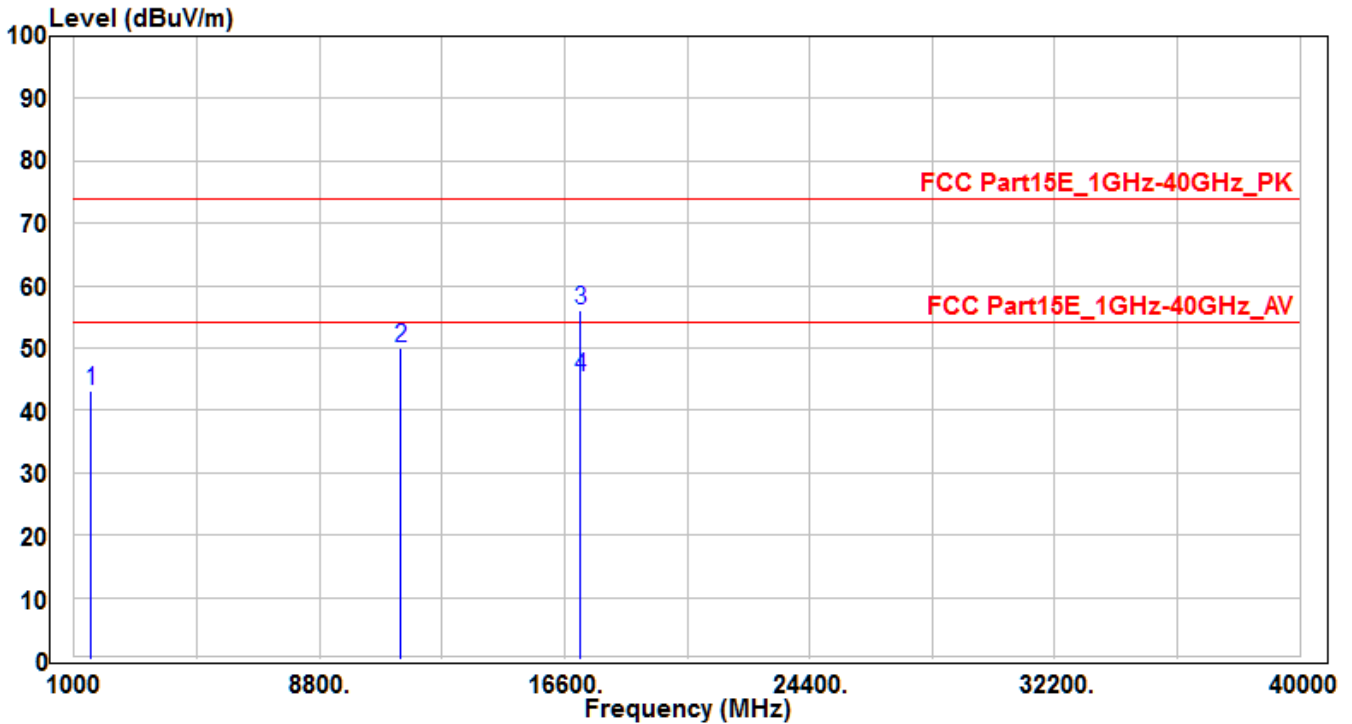


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1550.64	48.35	-5.28	43.07	-30.93	74	150	400	Peak
2	11400	30.68	19.22	49.9	-24.1	74	150	400	Peak
3	* 17100	29.48	26.64	56.12	-17.88	74	150	75	Peak
4	* 17100	18.79	26.64	45.43	-8.57	54	150	75	Average

Note :

1. " \* " means the worst value in this measurement data °
2. Measure Level (dBUV/m) = Reading Level (dBUV) + Factor (dB) °
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE2 -CH140_Ant A+B	Test Voltage	AC 120V/60Hz

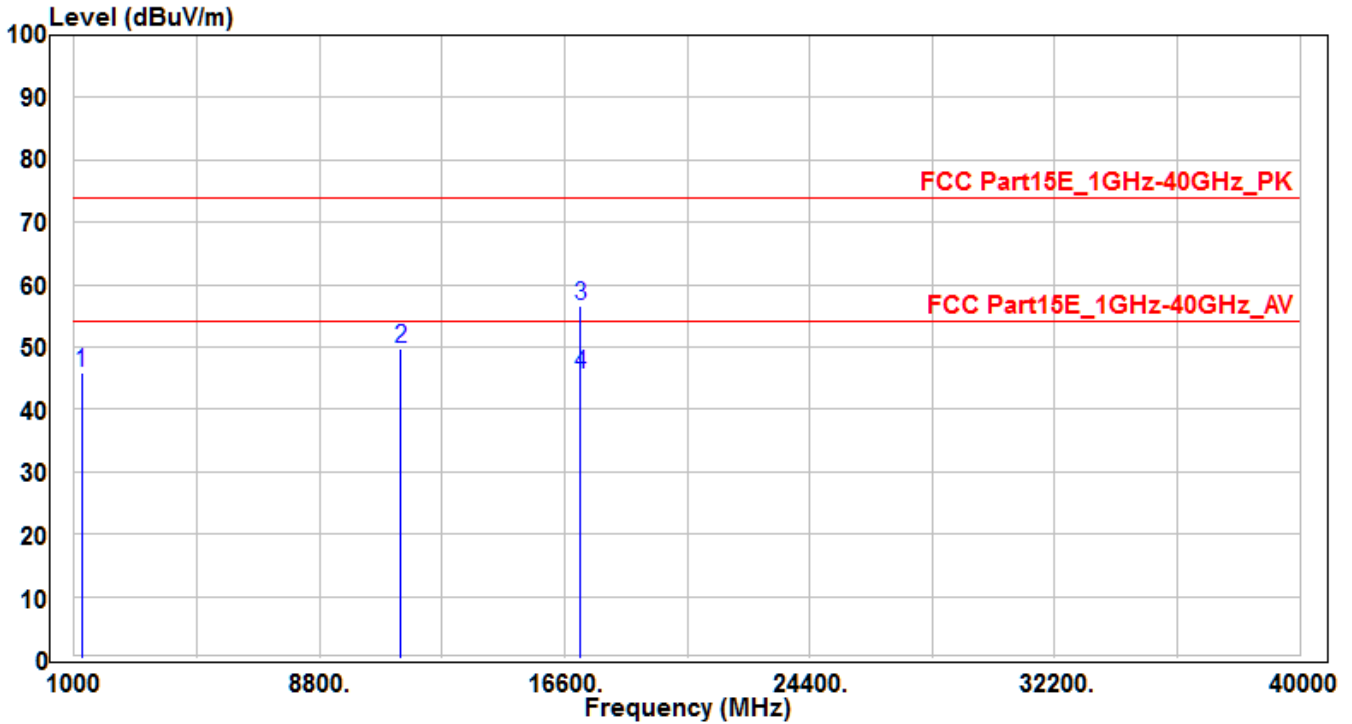


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1236.75	52.69	-6.71	45.98	-28.02	74	150	400	Peak
2	11400	30.65	19.22	49.87	-24.13	74	150	400	Peak
3	* 17100	29.93	26.64	56.57	-17.43	74	150	65	Peak
4	* 17100	18.96	26.64	45.6	-8.4	54	150	65	Average

Note :

1. " \* " means the worst value in this measurement data °
2. Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB) °
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE2 -CH144_Ant A+B	Test Voltage	AC 120V/60Hz

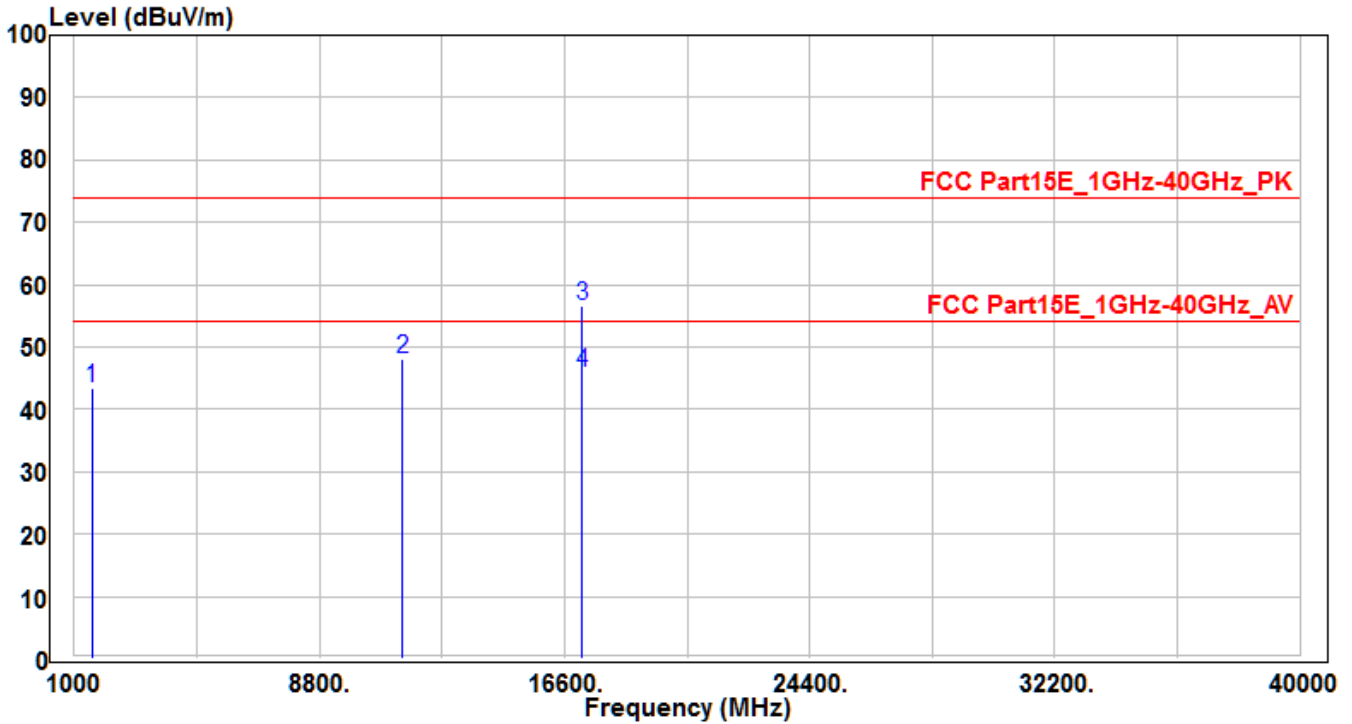


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1552.04	48.63	-5.28	43.35	-30.65	74	150	400	Peak
2	11440	28.89	19.23	48.12	-25.88	74	150	400	Peak
3	* 17160	29.39	27.13	56.52	-17.48	74	150	80	Peak
4	* 17160	18.72	27.13	45.85	-8.15	54	150	80	Average

Note :

1. " \* " means the worst value in this measurement data °
2. Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB) °
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE2 -CH144_Ant A+B	Test Voltage	AC 120V/60Hz

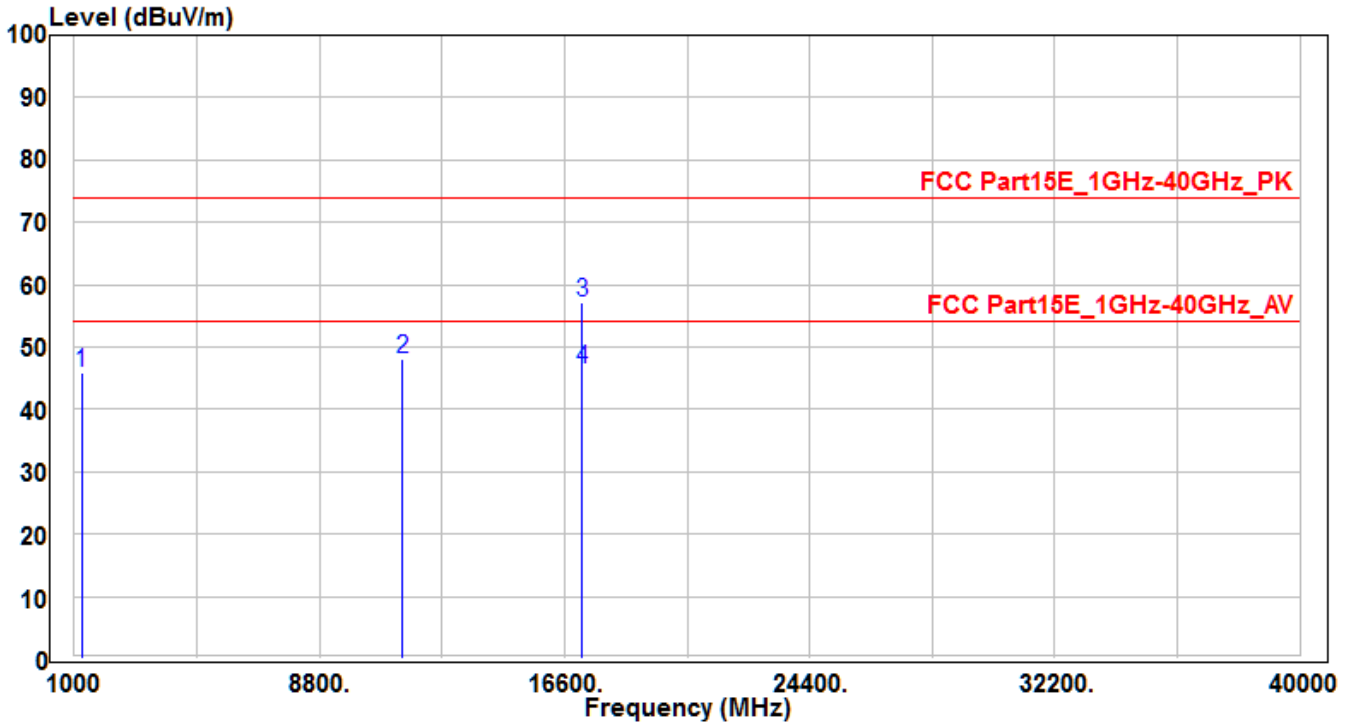


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1234.95	52.68	-6.71	45.97	-28.03	74	150	400	Peak
2	11440	28.92	19.23	48.15	-25.85	74	150	400	Peak
3	* 17160	30.04	27.13	57.17	-16.83	74	155	75	Peak
4	* 17160	19.38	27.13	46.51	-7.49	54	155	75	Average

Note :

1. " \* " means the worst value in this measurement data °
2. Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB) °
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report °



EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE2 -CH149_Ant A+B	Test Voltage	AC 120V/60Hz

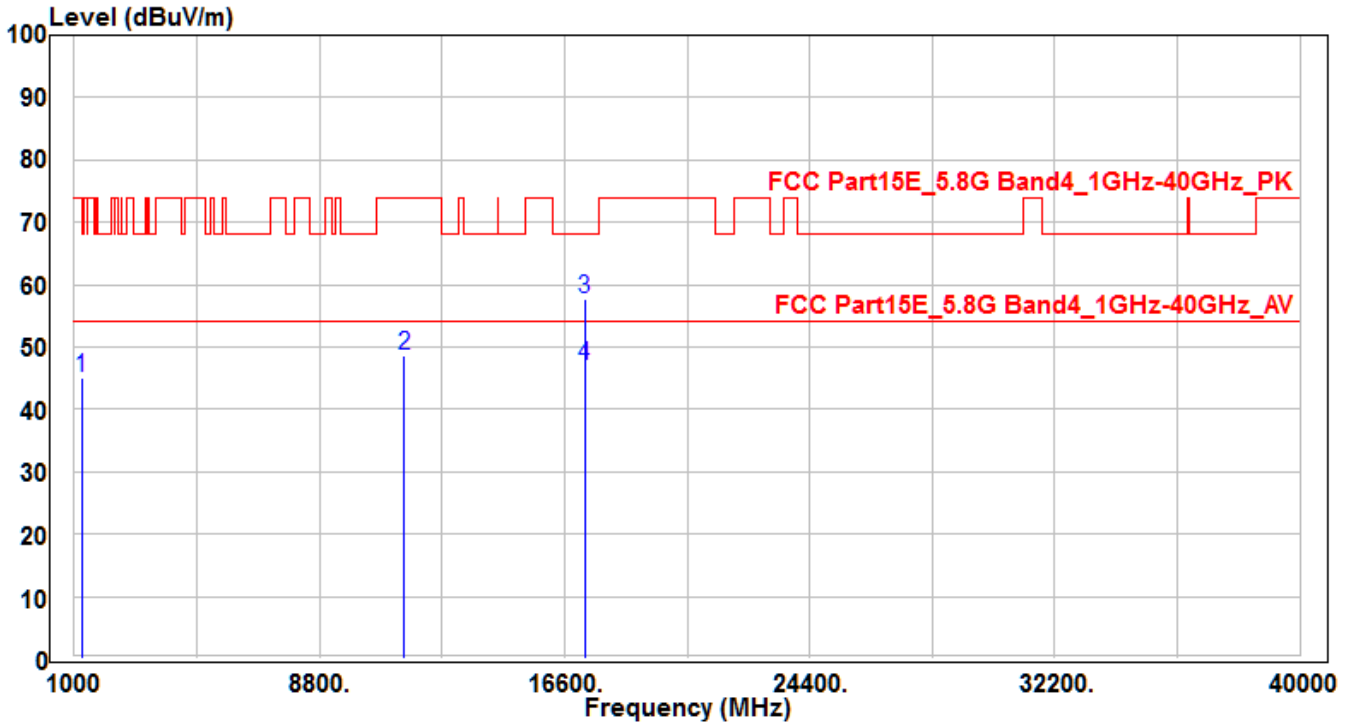


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1241.98	51.75	-6.67	45.08	-23.12	68.2	150	400	Peak
2	11490	29.27	19.24	48.51	-25.49	74	150	400	Peak
3	* 17235	29.97	27.74	57.71	-10.49	68.2	155	65	Peak
4	* 17235	19.19	27.74	46.93	-7.07	54	155	65	Average

Note :

1. " \* " means the worst value in this measurement data °
2. Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) °
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE2 -CH149_Ant A+B	Test Voltage	AC 120V/60Hz

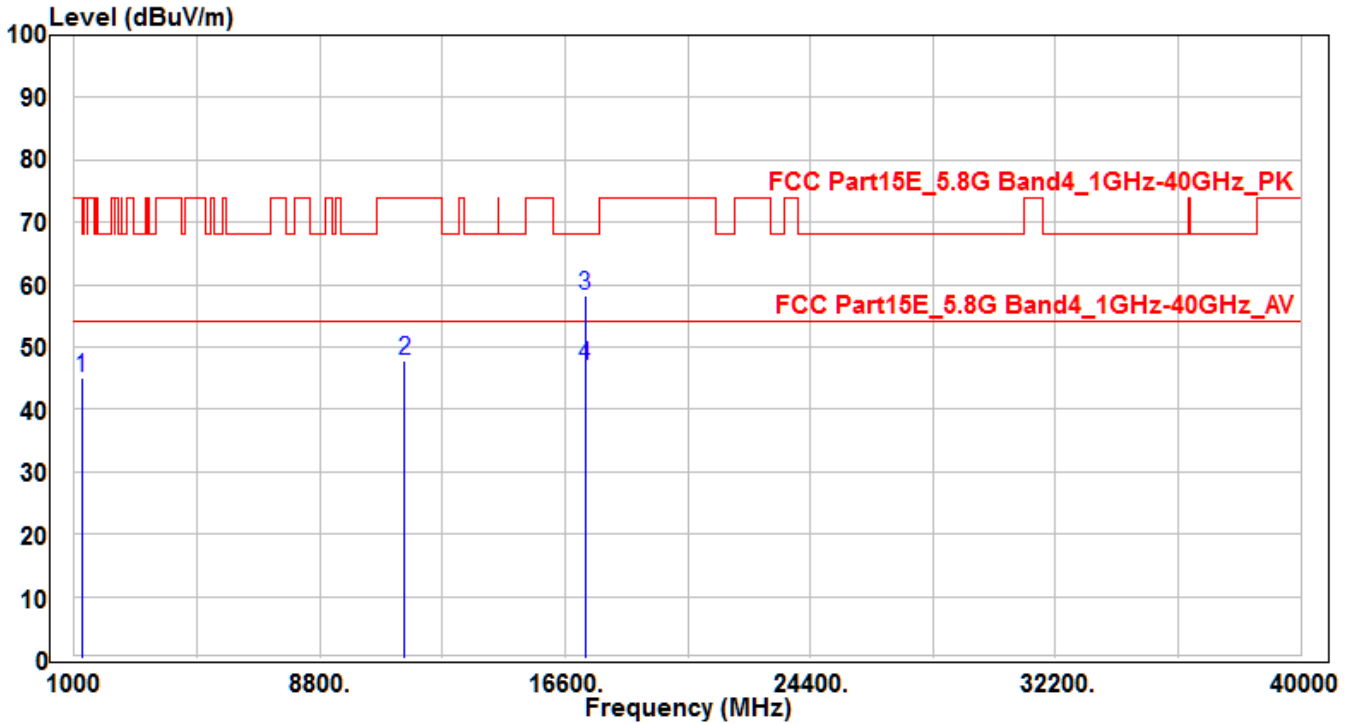


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1244.55	51.65	-6.67	44.98	-23.22	68.2	150	400	Peak
2	11490	28.52	19.24	47.76	-26.24	74	150	400	Peak
3	* 17235	30.51	27.74	58.25	-9.95	68.2	160	60	Peak
4	* 17235	19.21	27.74	46.95	-7.05	54	160	60	Average

Note :

1. " \* " means the worst value in this measurement data °
2. Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) °
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE2 -CH157_Ant A+B	Test Voltage	AC 120V/60Hz

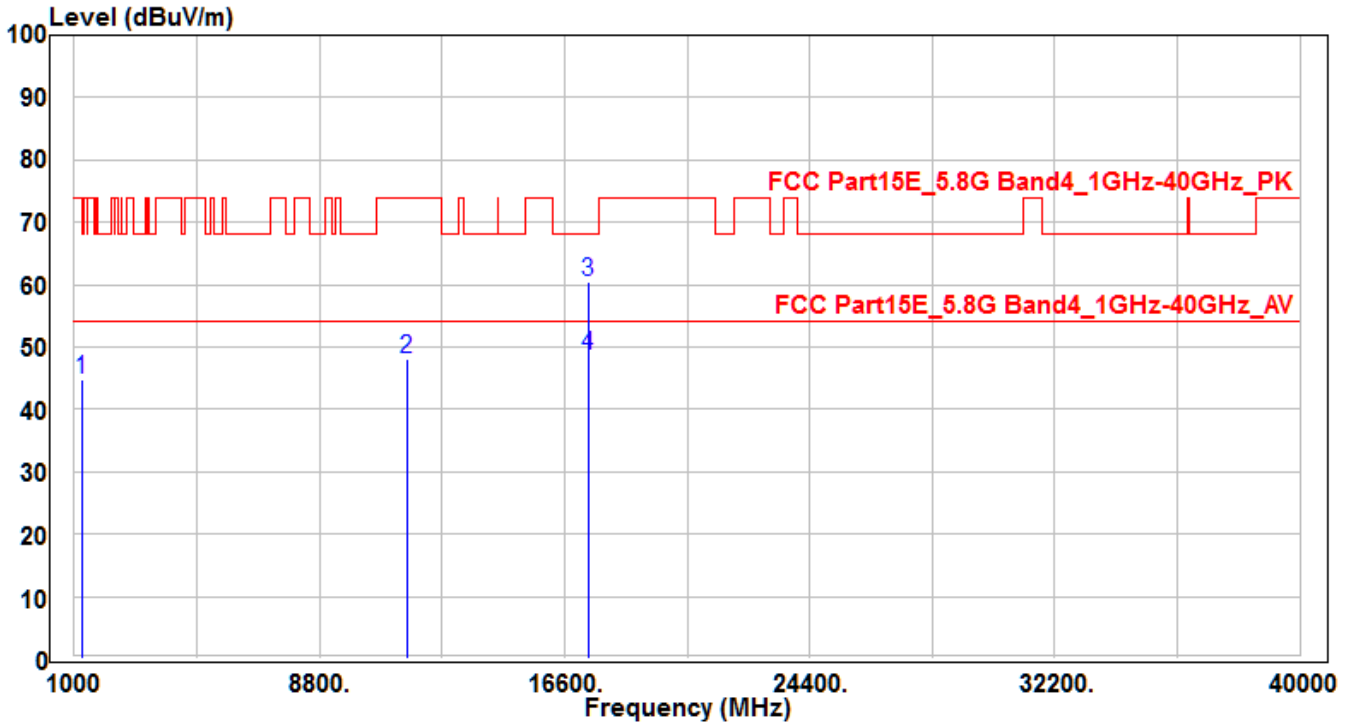


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1246.68	51.52	-6.65	44.87	-23.33	68.2	150	400	Peak
2	11570	28.95	19.19	48.14	-25.86	74	150	400	Peak
3	* 17355	31.65	28.73	60.38	-7.82	68.2	150	60	Peak
4	* 17355	19.87	28.73	48.6	-5.4	54	150	60	Average

Note :

1. " \* " means the worst value in this measurement data °
2. Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) °
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE2 -CH157_Ant A+B	Test Voltage	AC 120V/60Hz

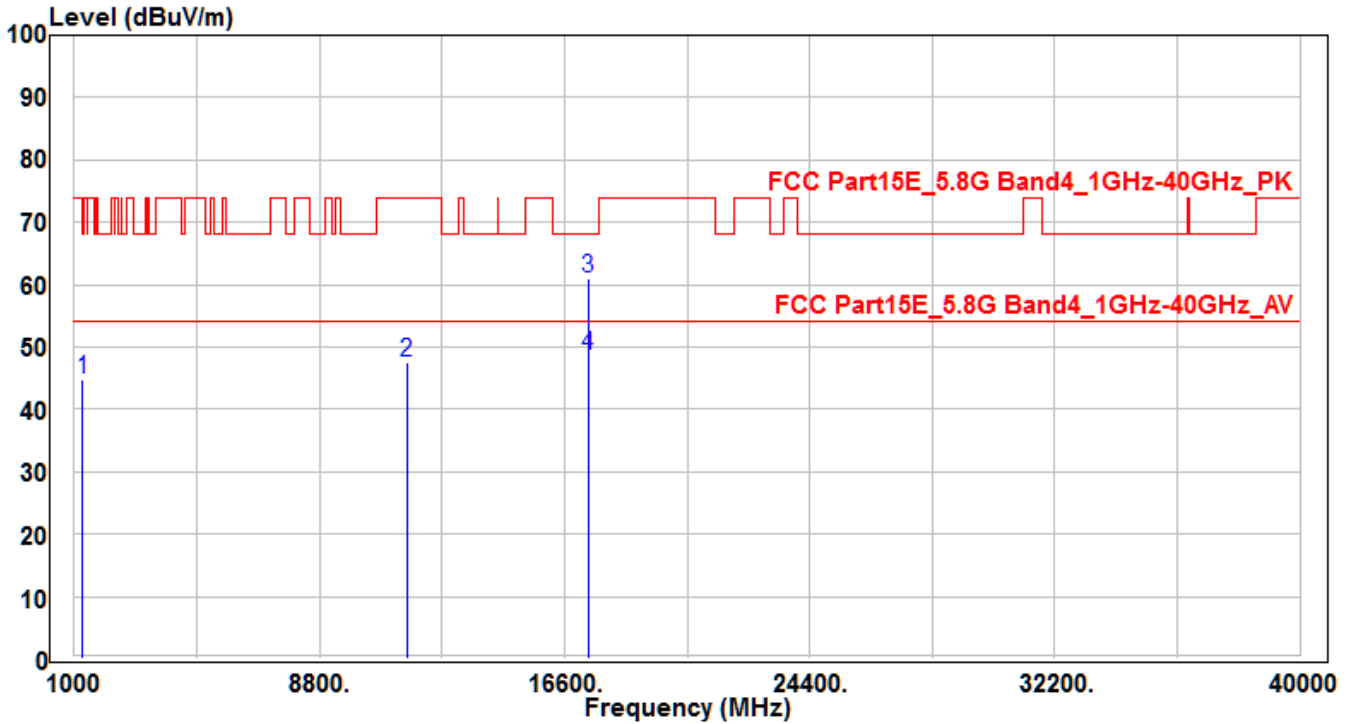


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1252.62	51.47	-6.63	44.84	-23.36	68.2	150	400	Peak
2	11570	28.25	19.19	47.44	-26.56	74	150	400	Peak
3	* 17355	32.33	28.73	61.06	-7.14	68.2	150	70	Peak
4	* 17355	19.88	28.73	48.61	-5.39	54	150	70	Average

Note :

1. " \* " means the worst value in this measurement data °
2. Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) °
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE2 -CH165 Ant A+B	Test Voltage	AC 120V/60Hz

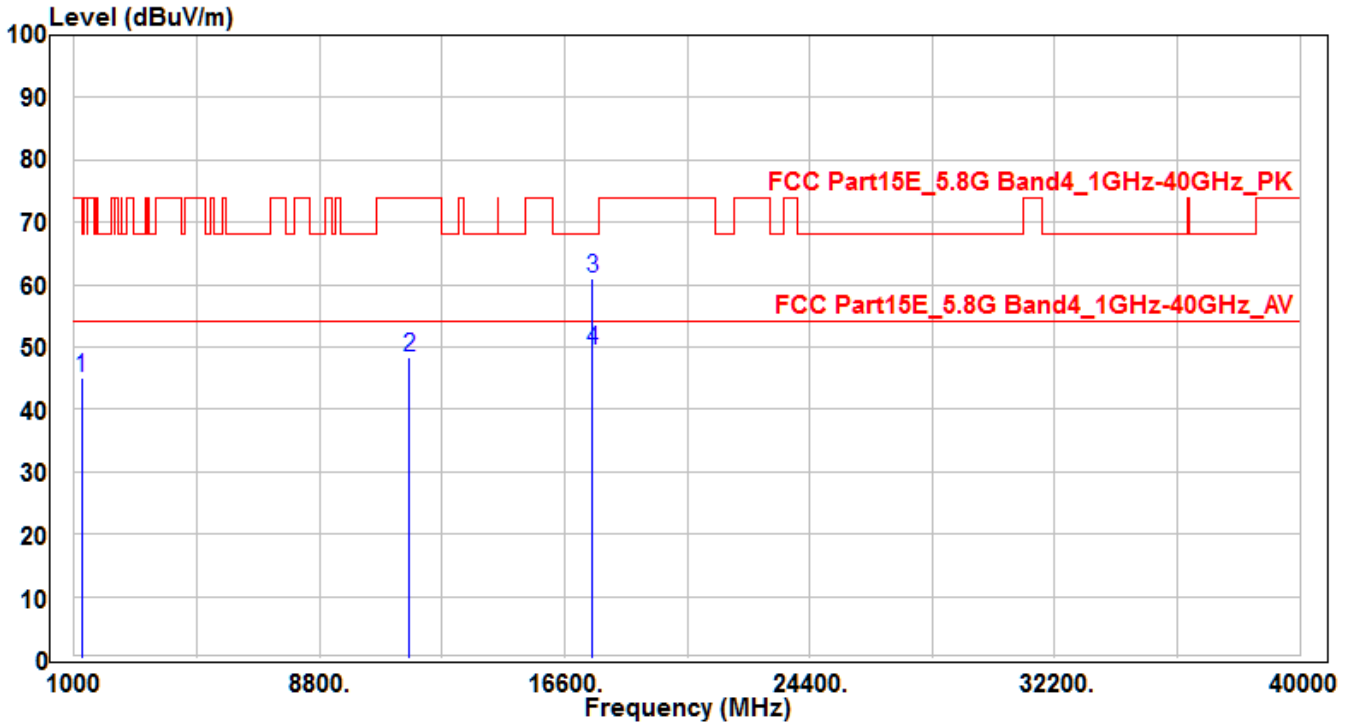


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1241.69	51.74	-6.67	45.07	-23.13	68.2	150	400	Peak
2	11650	29.11	19.12	48.23	-25.77	74	150	400	Peak
3	* 17475	31.33	29.72	61.05	-7.15	68.2	160	80	Peak
4	* 17475	19.77	29.72	49.49	-4.51	54	160	80	Average

Note :

1. " \* " means the worst value in this measurement data °
2. Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) °
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE2 -CH165_Ant A+B	Test Voltage	AC 120V/60Hz

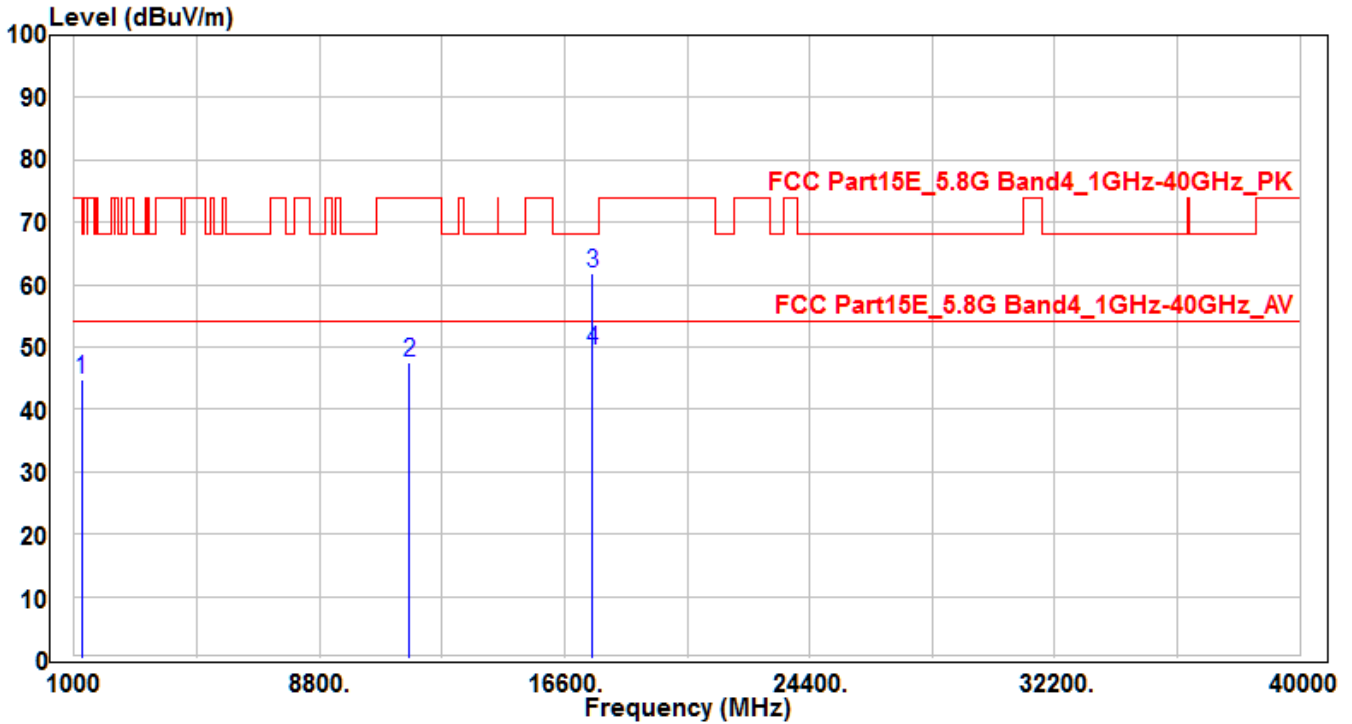


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1245.71	51.58	-6.66	44.92	-23.28	68.2	150	400	Peak
2	11650	28.41	19.12	47.53	-26.47	74	150	400	Peak
3	* 17475	32.12	29.72	61.84	-6.36	68.2	150	75	Peak
4	* 17475	19.8	29.72	49.52	-4.48	54	150	75	Average

Note :

1. " \* " means the worst value in this measurement data ◦
2. Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) ◦
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) ◦
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report ◦

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE3 -CH38_Ant A+B	Test Voltage	AC 120V/60Hz

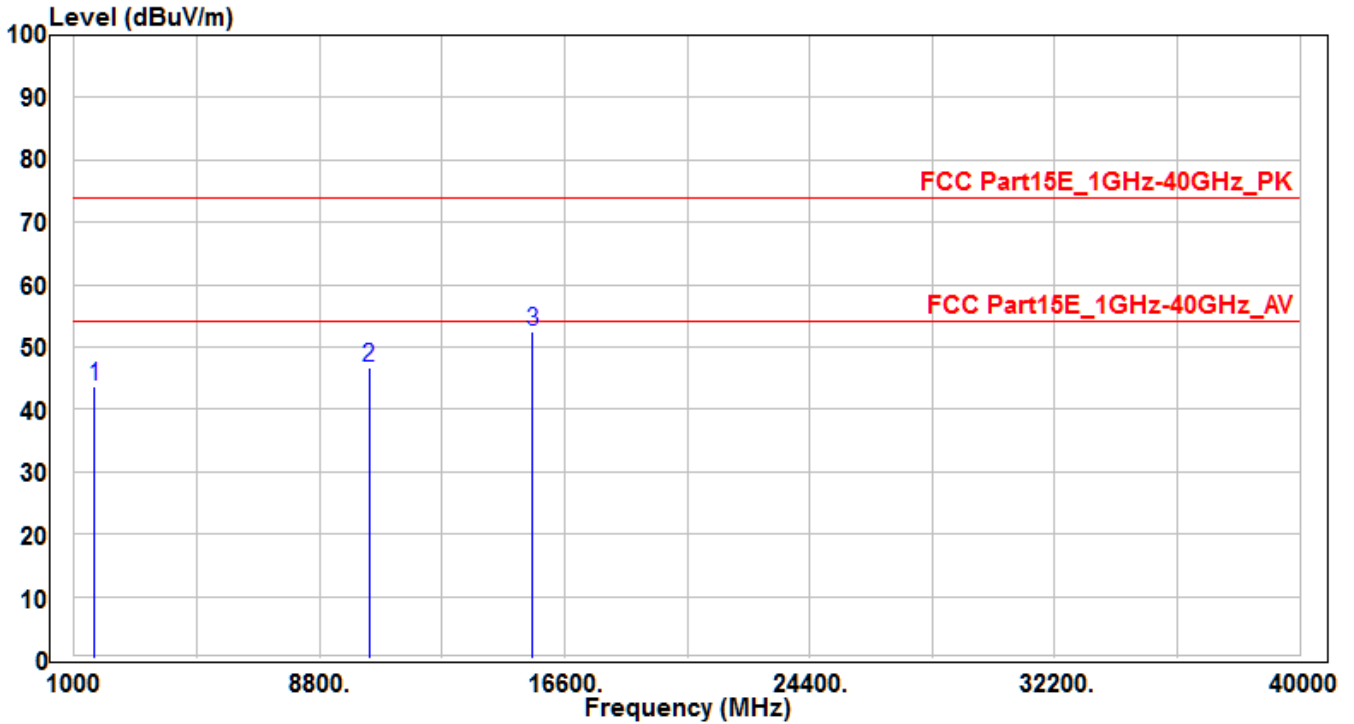


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1657.48	48.63	-4.96	43.67	-30.33	74	150	400	Peak
2	10380	29.37	17.44	46.81	-27.19	74	150	400	Peak
3	* 15570	30.84	21.7	52.54	-21.46	74	150	400	Peak

Note :

1. " \* " means the worst value in this measurement data °
2. Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) °
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE3 -CH38_Ant A+B	Test Voltage	AC 120V/60Hz

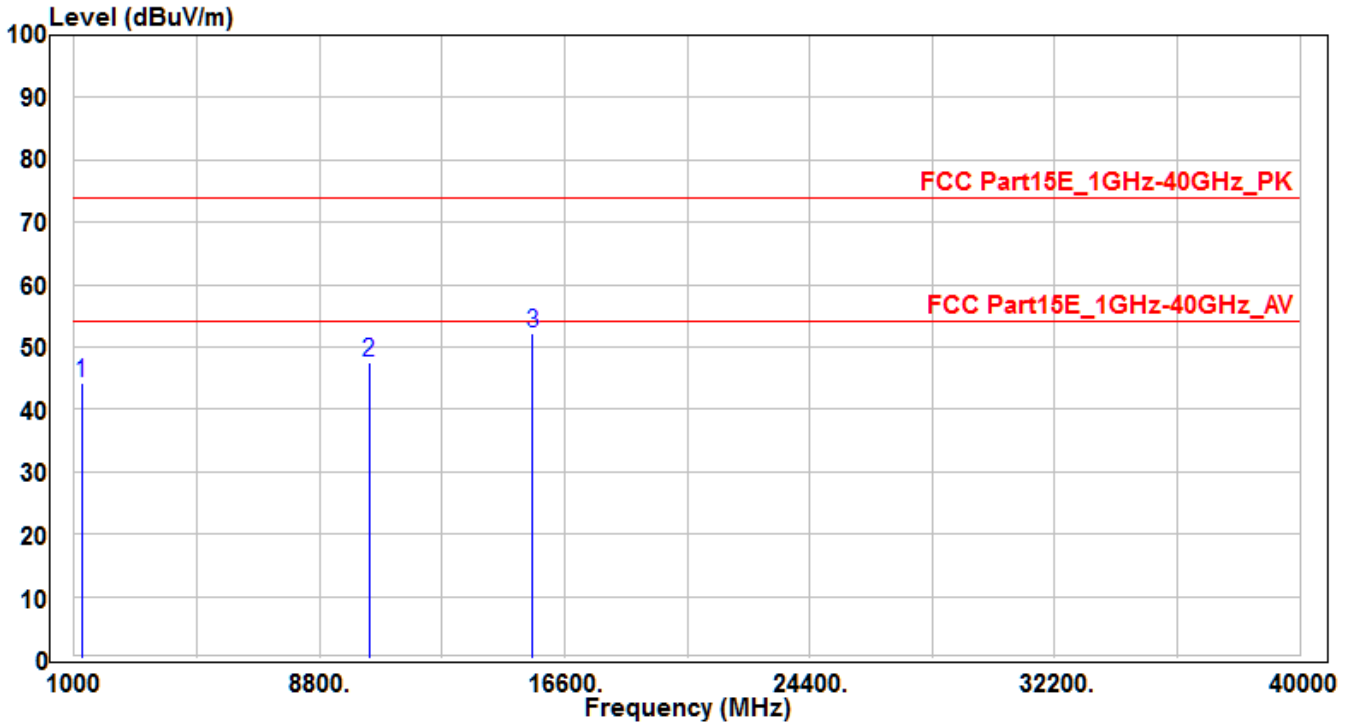


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1247.84	50.91	-6.65	44.26	-29.74	74	150	400	Peak
2	10380	30.08	17.44	47.52	-26.48	74	150	400	Peak
3	* 15570	30.63	21.7	52.33	-21.67	74	150	400	Peak

Note :

1. " \* " means the worst value in this measurement data ◦
2. Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) ◦
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) ◦
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report ◦



EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE3 -CH46_Ant A+B	Test Voltage	AC 120V/60Hz

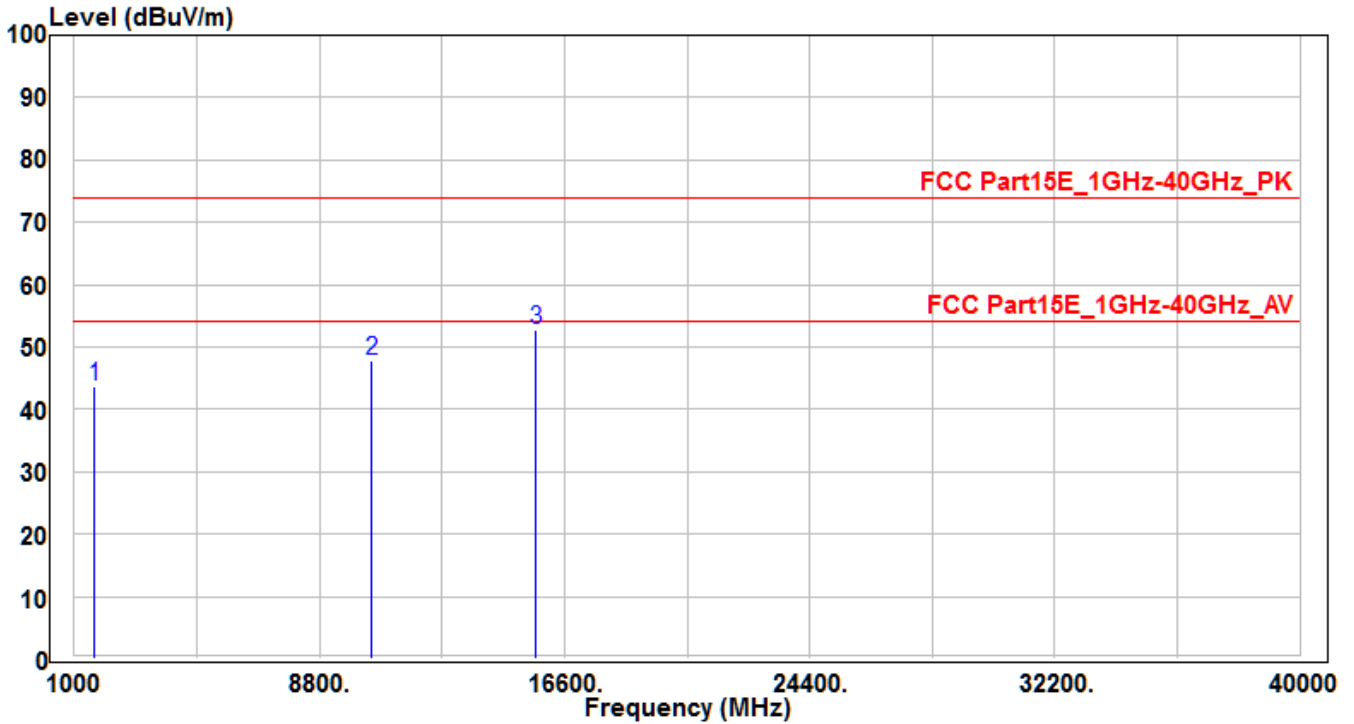


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1646.74	48.61	-4.99	43.62	-30.38	74	150	400	Peak
2	10460	30	17.79	47.79	-26.21	74	150	400	Peak
3	* 15690	31.48	21.29	52.77	-21.23	74	180	395	Peak

Note :

1. " \* " means the worst value in this measurement data ◦
2. Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) ◦
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) ◦
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report ◦

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE3 -CH46_Ant A+B	Test Voltage	AC 120V/60Hz

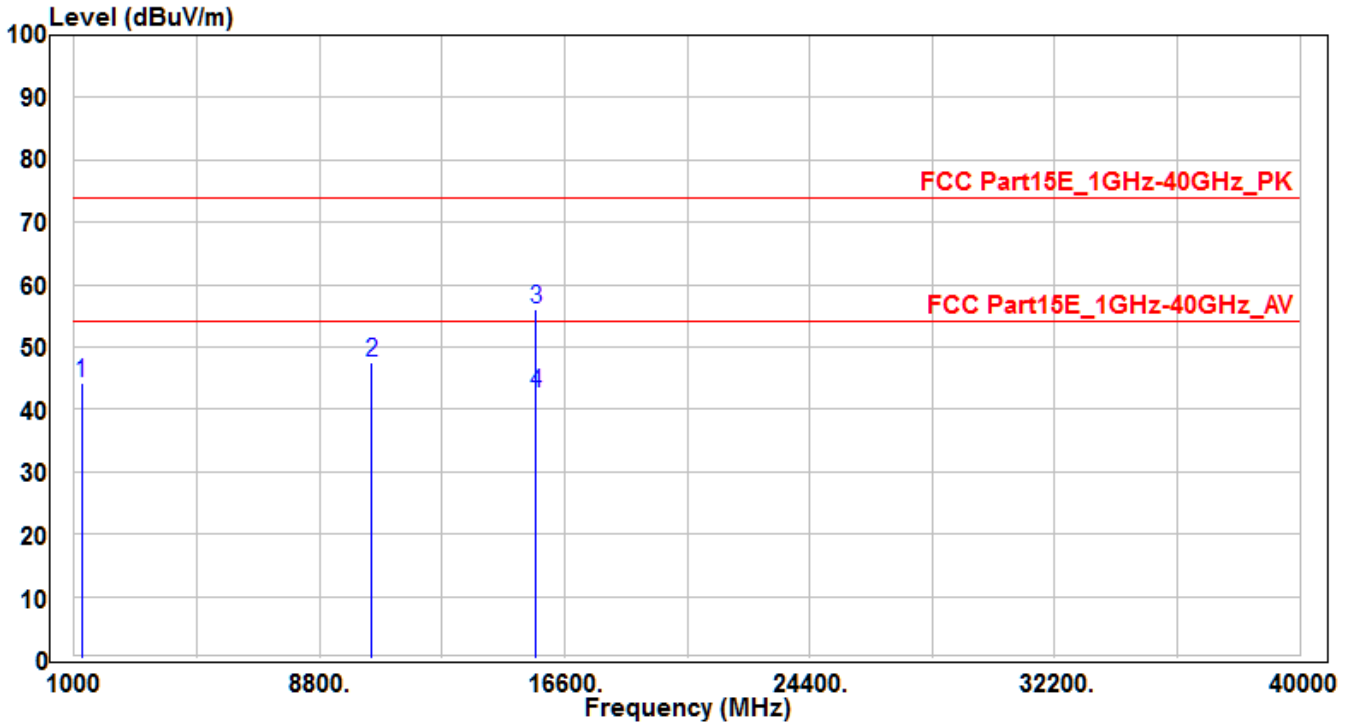


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1243.76	50.92	-6.67	44.25	-29.75	74	150	400	Peak
2	10460	29.83	17.79	47.62	-26.38	74	150	400	Peak
3	* 15690	34.66	21.29	55.95	-18.05	74	175	390	Peak
4	* 15690	21.28	21.29	42.57	-11.43	54	175	390	Average

Note :

1. " \* " means the worst value in this measurement data °
2. Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB) °
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE3 -CH54_Ant A+B	Test Voltage	AC 120V/60Hz

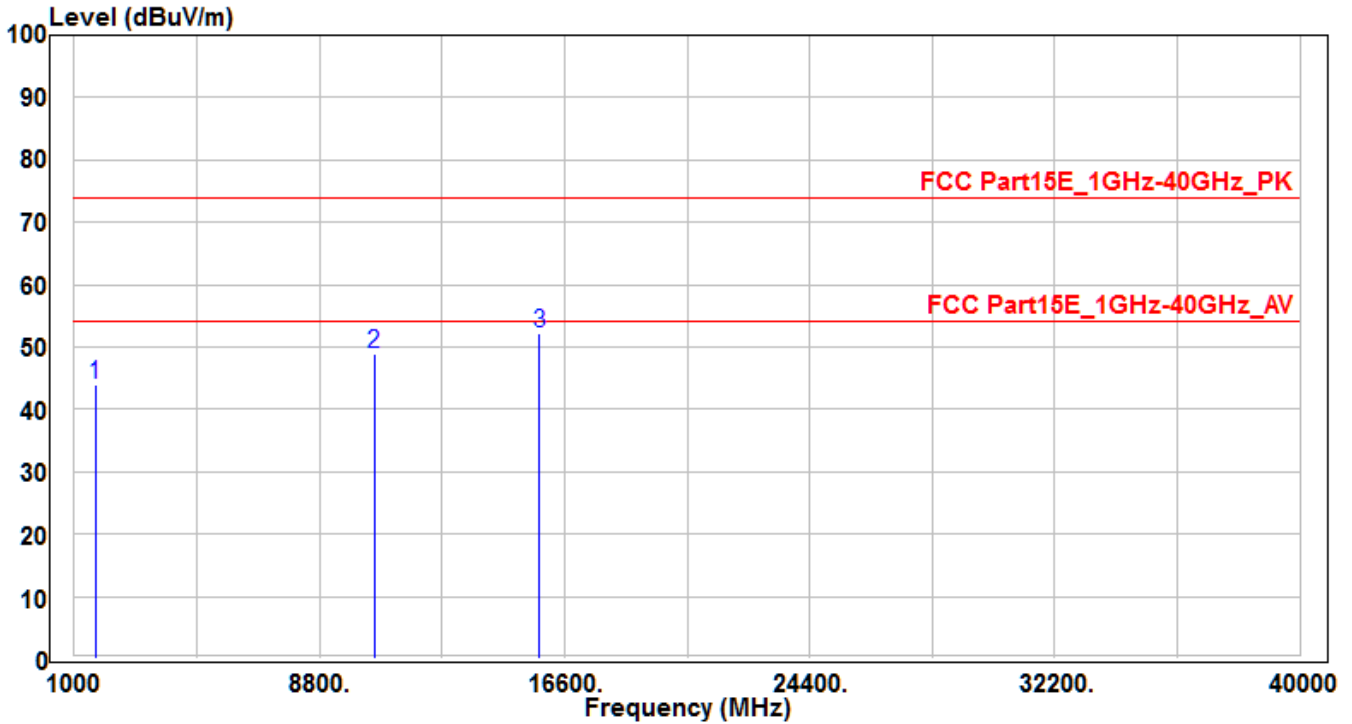


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1661.28	48.84	-4.94	43.9	-30.1	74	150	400	Peak
2	10540	30.83	18.05	48.88	-25.12	74	150	400	Peak
3	* 15810	31.27	20.87	52.14	-21.86	74	150	400	Peak

Note :

1. " \* " means the worst value in this measurement data ◦
2. Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) ◦
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) ◦
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report ◦

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE3 -CH54_Ant A+B	Test Voltage	AC 120V/60Hz

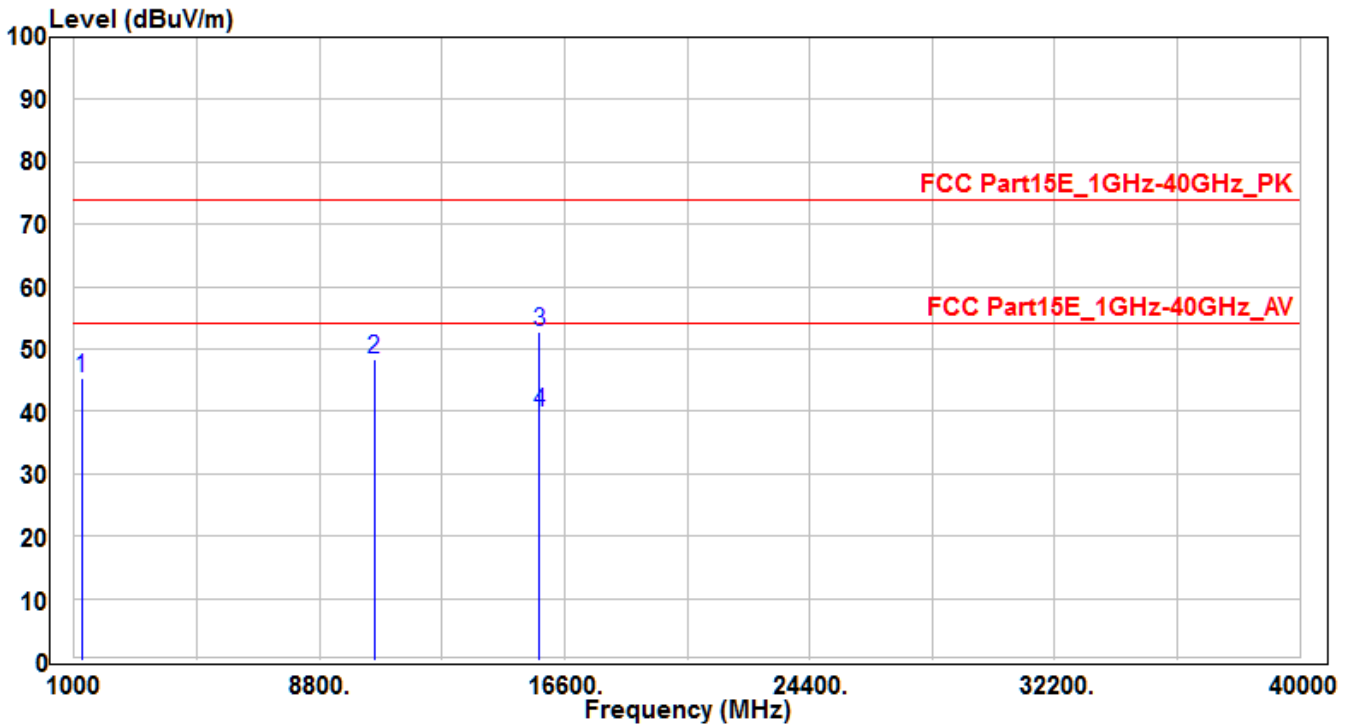


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1246.8	51.96	-6.65	45.31	-28.69	74	150	400	Peak
2	10540	30.42	18.05	48.47	-25.53	74	150	400	Peak
3	* 15810	31.79	20.87	52.66	-21.34	74	170	400	Peak
4	* 15810	18.86	20.87	39.73	-14.27	54	170	400	Average

Note :

1. " \* " means the worst value in this measurement data °
2. Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) °
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE3 -CH62_Ant A+B	Test Voltage	AC 120V/60Hz

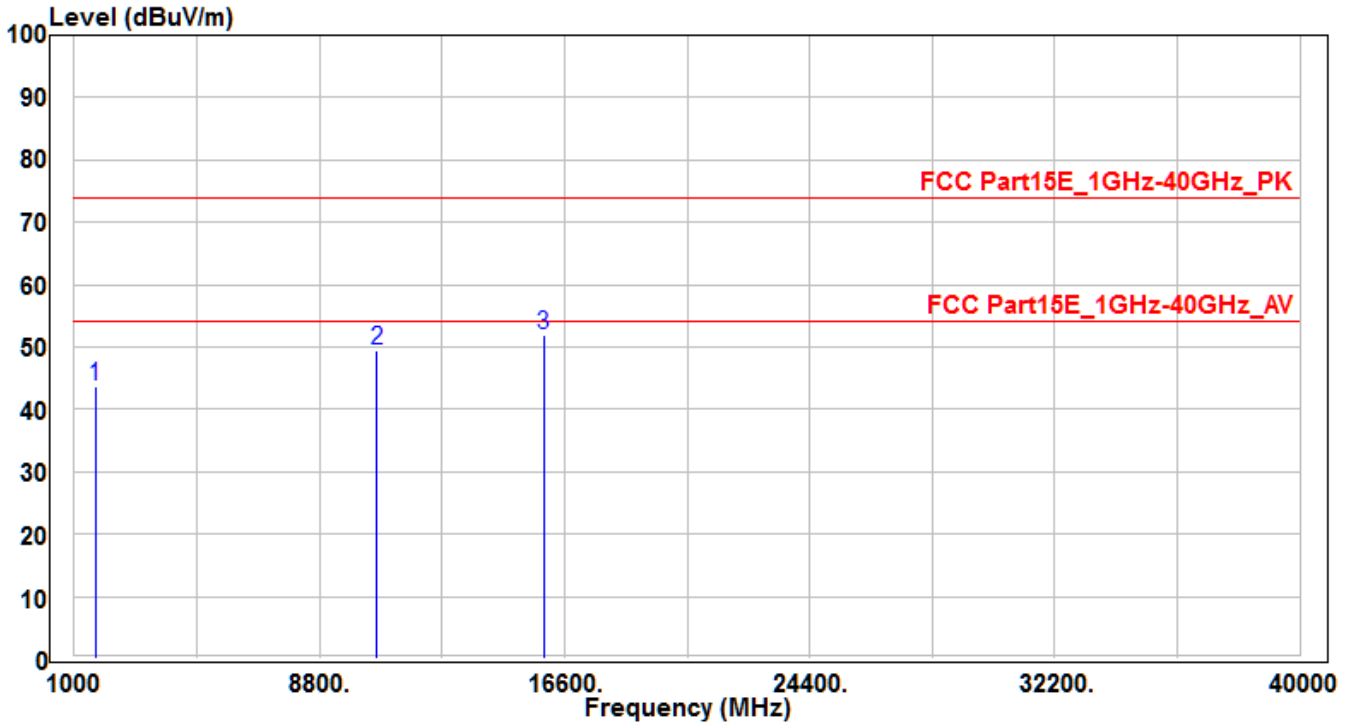


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1661.72	48.75	-4.94	43.81	-30.19	74	150	400	Peak
2	10620	31.36	18.24	49.6	-24.4	74	150	400	Peak
3	* 15930	31.51	20.46	51.97	-22.03	74	150	400	Peak

Note :

1. " \* " means the worst value in this measurement data ◦
2. Measure Level (dBUV/m) = Reading Level (dBUV) + Factor (dB) ◦
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) ◦
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report ◦

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE3 -CH62_Ant A+B	Test Voltage	AC 120V/60Hz

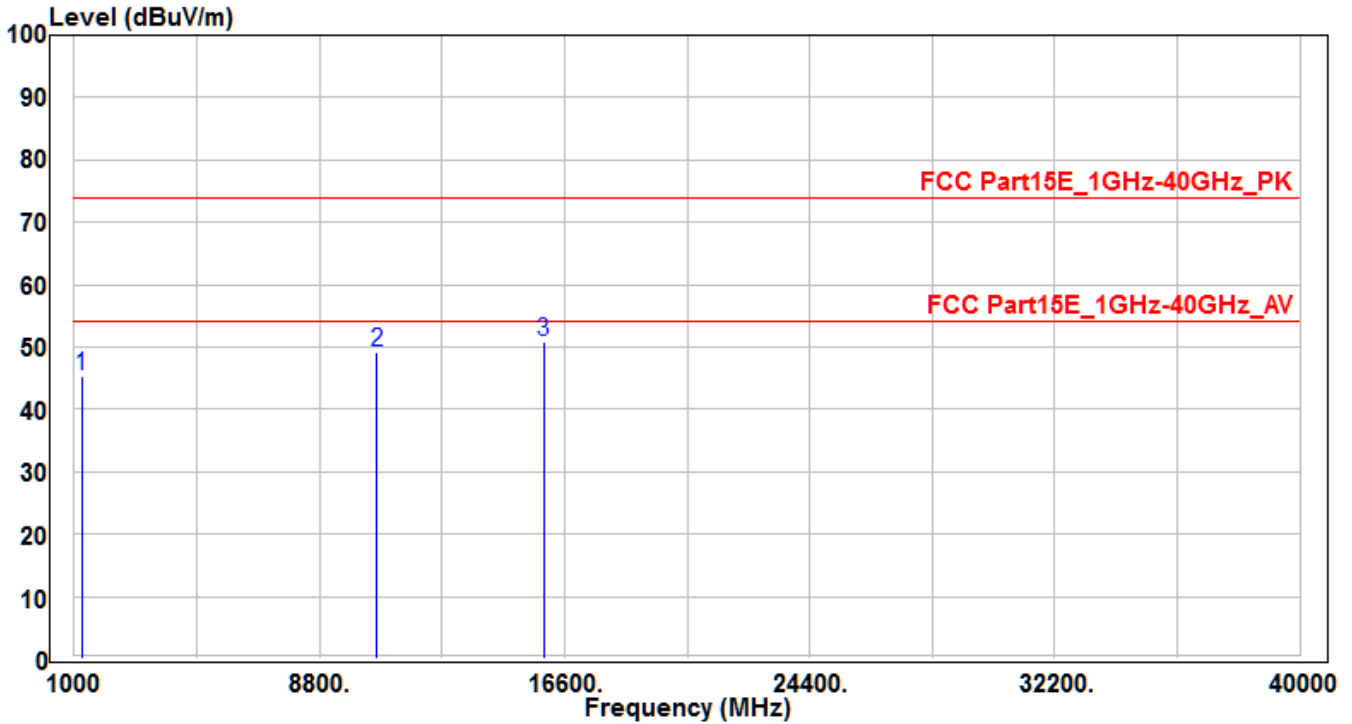


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1244.73	51.89	-6.66	45.23	-28.77	74	150	400	Peak
2	10620	31	18.24	49.24	-24.76	74	150	400	Peak
3	* 15930	30.33	20.46	50.79	-23.21	74	150	400	Peak

Note :

- "\*" means the worst value in this measurement data °
- Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) °
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
- The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE3 -CH102_Ant A+B	Test Voltage	AC 120V/60Hz

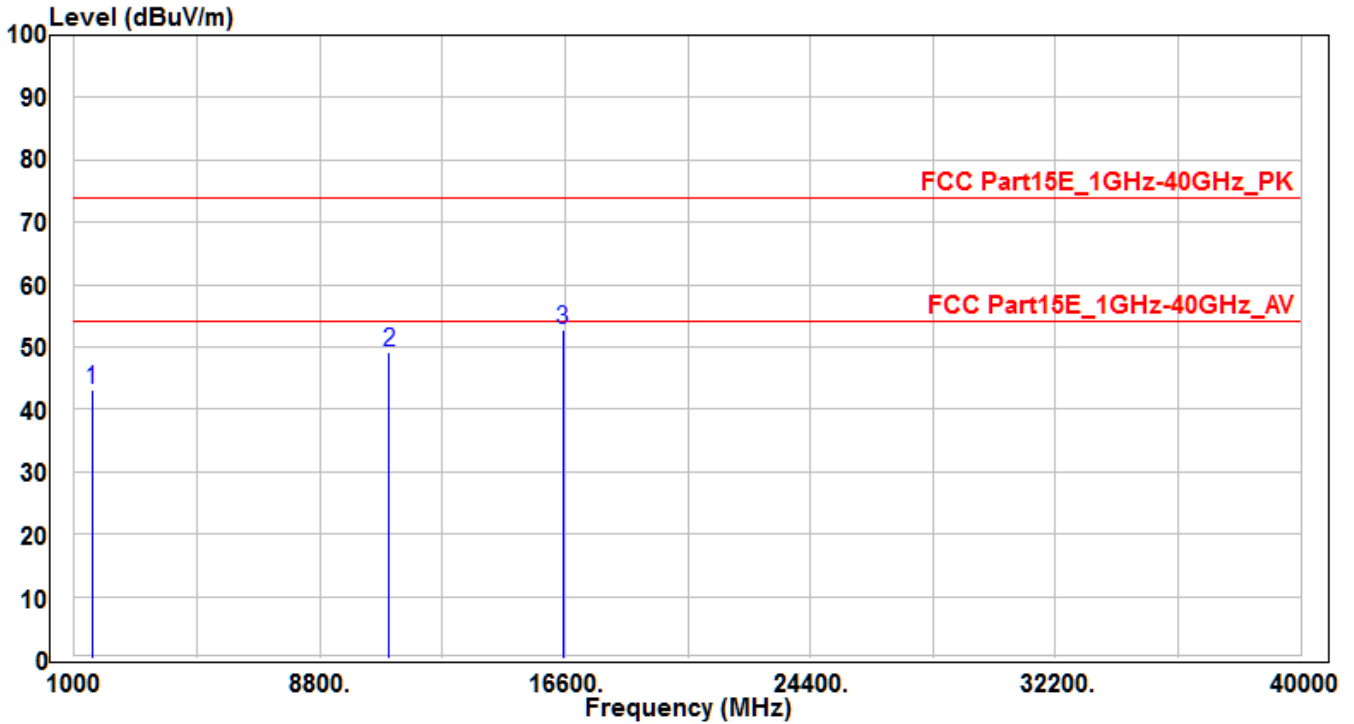


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1557.25	48.36	-5.26	43.1	-30.9	74	150	400	Peak
2	11020	29.98	19.08	49.06	-24.94	74	150	400	Peak
3	* 16530	30.53	22.28	52.81	-21.19	74	150	400	Peak

Note :

1. " \* " means the worst value in this measurement data ◦
2. Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) ◦
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) ◦
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report ◦

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE3 -CH102_Ant A+B	Test Voltage	AC 120V/60Hz

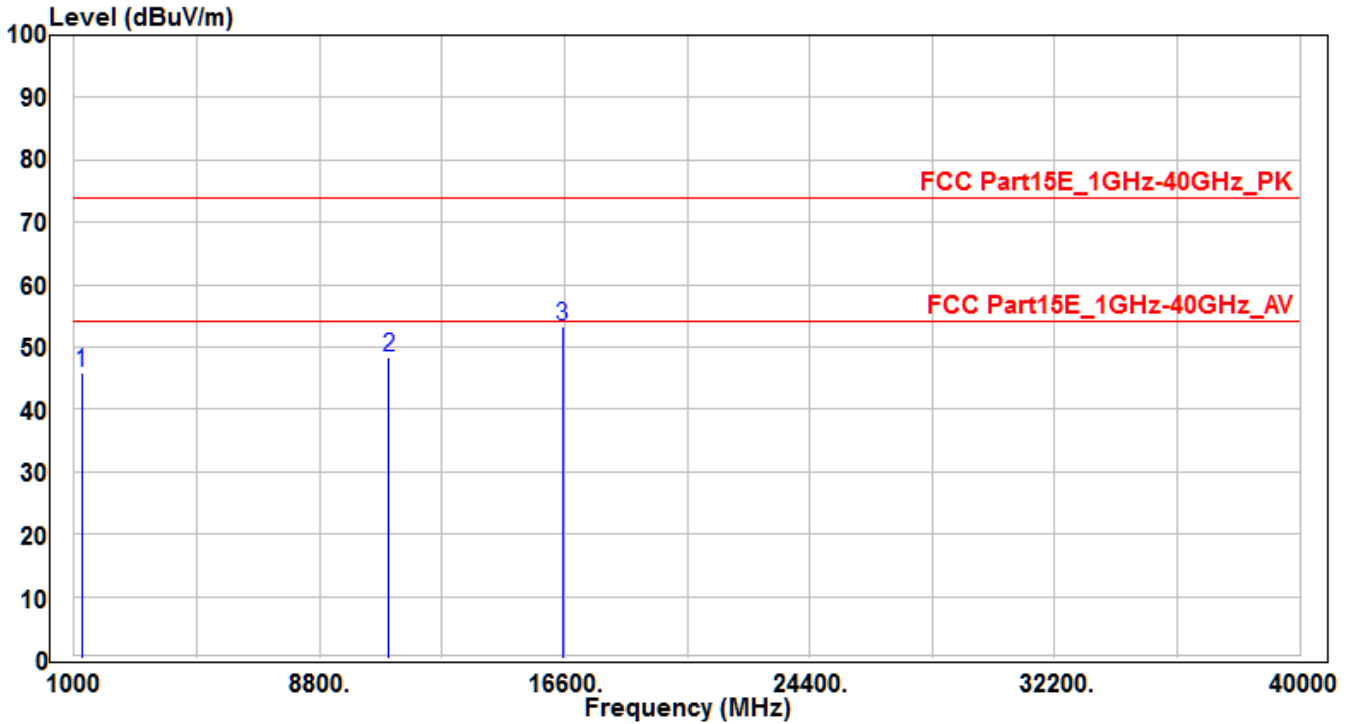


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1240.64	52.69	-6.69	46	-28	74	150	400	Peak
2	11020	29.37	19.08	48.45	-25.55	74	150	400	Peak
3	* 16530	30.96	22.28	53.24	-20.76	74	150	400	Peak

Note :

1. " \* " means the worst value in this measurement data ◦
2. Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) ◦
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) ◦
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report ◦



EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE3 -CH118_Ant A+B	Test Voltage	AC 120V/60Hz

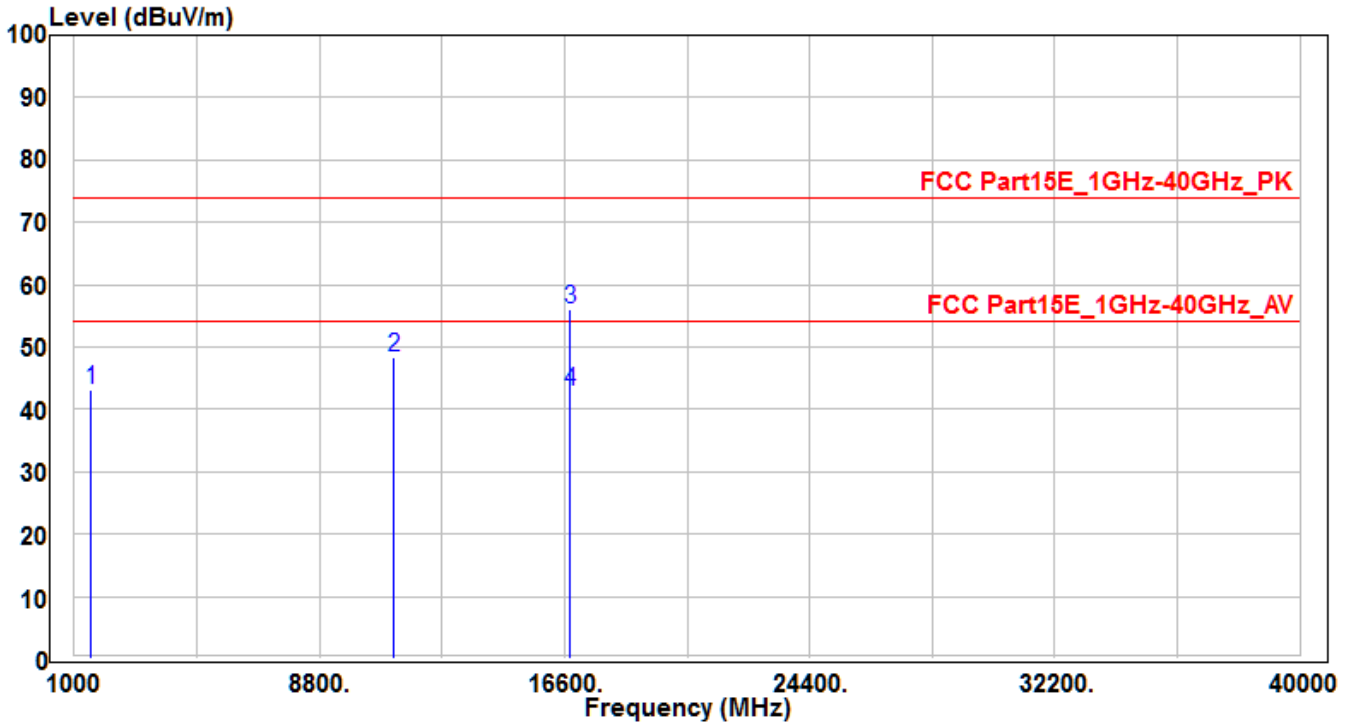


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1548.82	48.4	-5.28	43.12	-30.88	74	150	400	Peak
2	11180	29.14	19.15	48.29	-25.71	74	150	400	Peak
3	* 16770	31.83	24.09	55.92	-18.08	74	165	395	Peak
4	* 16770	18.74	24.09	42.83	-11.17	54	165	395	Average

Note :

1. " \* " means the worst value in this measurement data °
2. Measure Level (dBUV/m) = Reading Level (dBUV) + Factor (dB) °
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE3 -CH118_Ant A+B	Test Voltage	AC 120V/60Hz

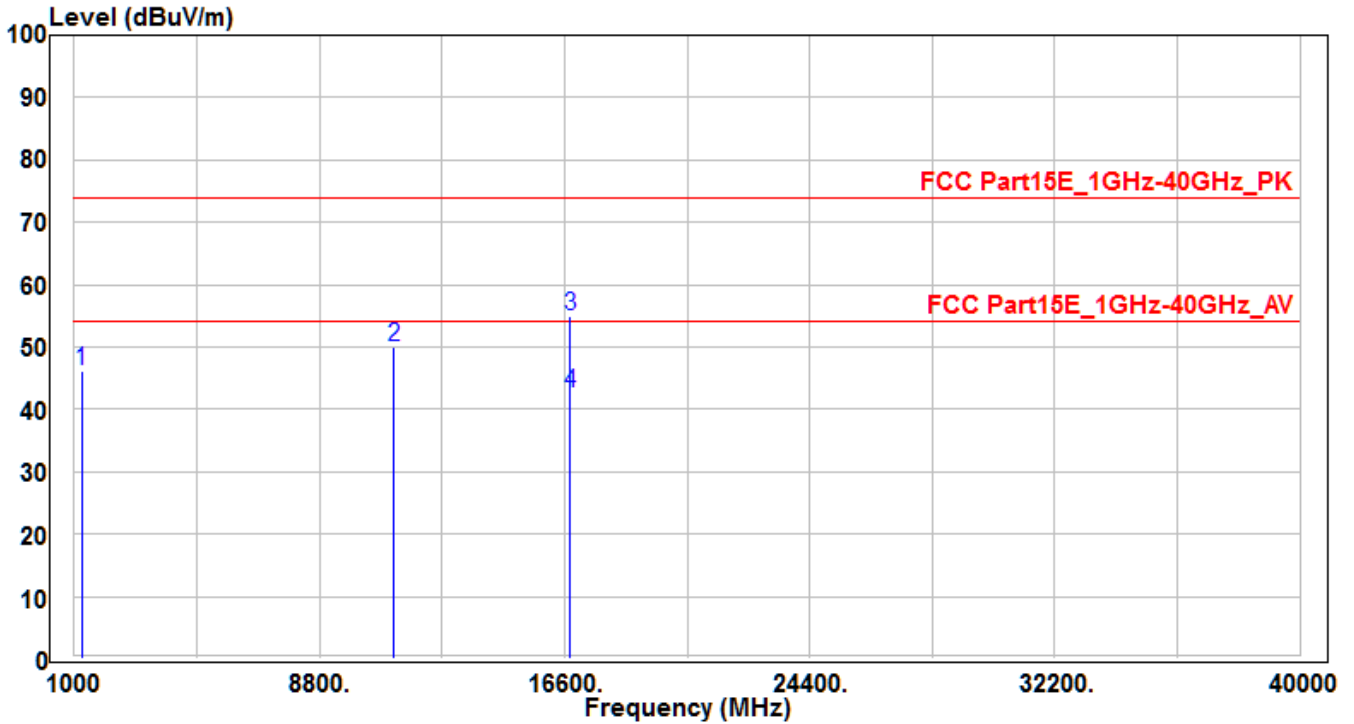


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1236.89	52.76	-6.71	46.05	-27.95	74	150	400	Peak
2	11180	30.91	19.15	50.06	-23.94	74	150	400	Peak
3	* 16770	30.92	24.09	55.01	-18.99	74	160	380	Peak
4	* 16770	18.47	24.09	42.56	-11.44	54	160	380	Average

Note :

1. " \* " means the worst value in this measurement data °
2. Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) °
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE3 -CH134_Ant A+B	Test Voltage	AC 120V/60Hz

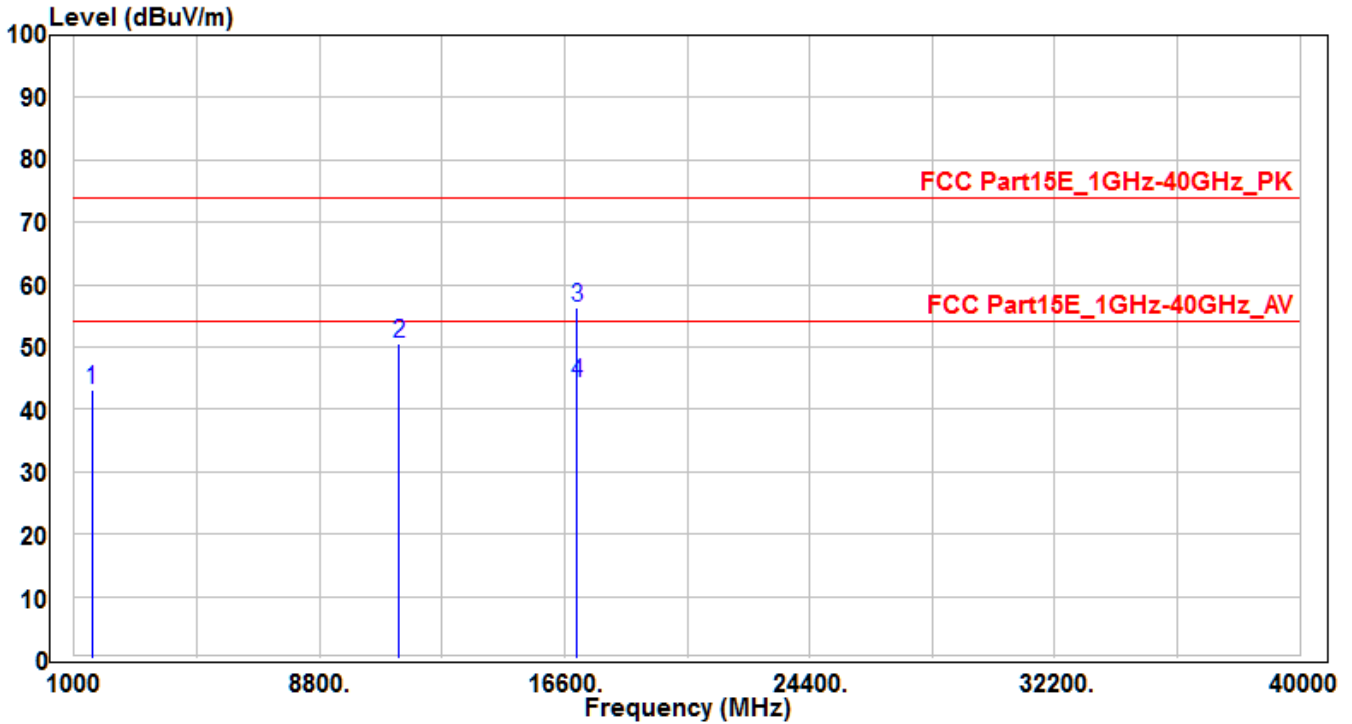


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1555.18	48.34	-5.26	43.08	-30.92	74	150	400	Peak
2	11340	31.31	19.19	50.5	-23.5	74	150	400	Peak
3	* 17010	30.37	25.89	56.26	-17.74	74	170	380	Peak
4	* 17010	18.36	25.89	44.25	-9.75	54	170	380	Average

Note :

1. " \* " means the worst value in this measurement data °
2. Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) °
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE3 -CH134_Ant A+B	Test Voltage	AC 120V/60Hz

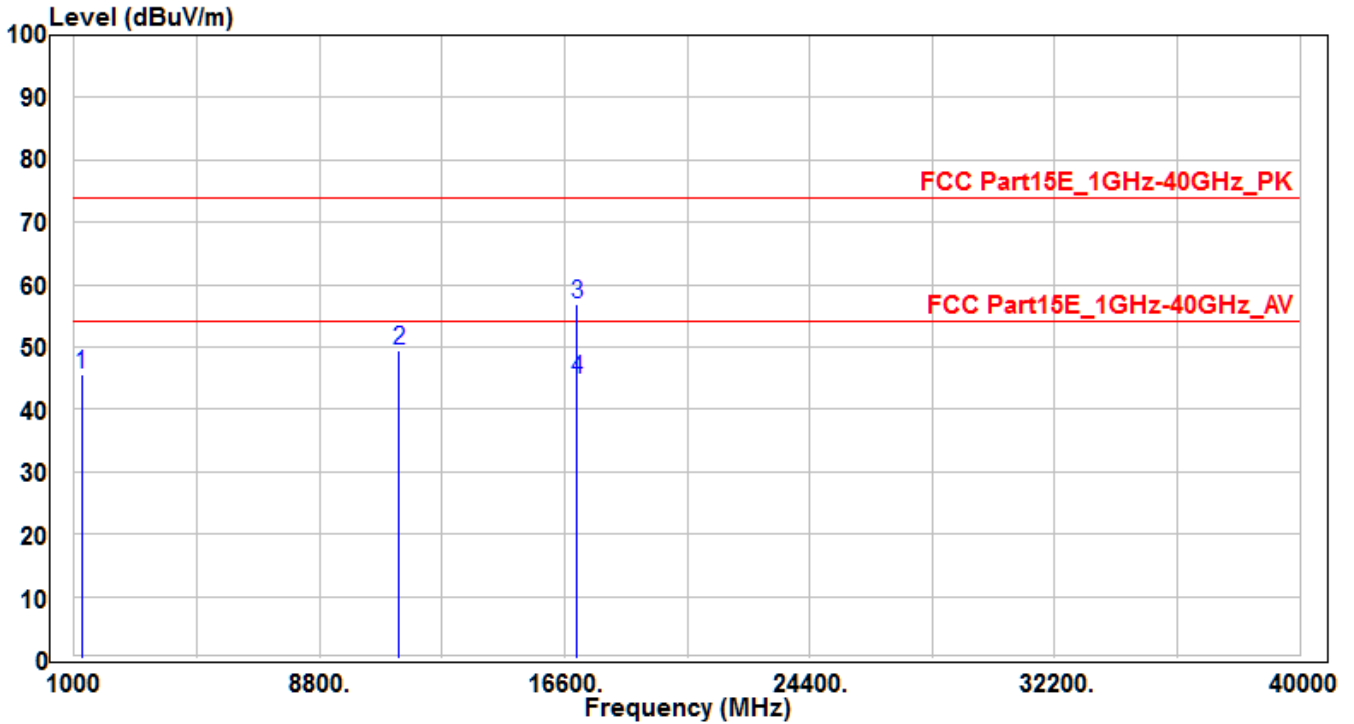


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1241.35	52.34	-6.68	45.66	-28.34	74	150	400	Peak
2	11340	30.39	19.19	49.58	-24.42	74	150	400	Peak
3	* 17010	31.04	25.89	56.93	-17.07	74	170	385	Peak
4	* 17010	18.95	25.89	44.84	-9.16	54	170	385	Average

Note :

1. " \* " means the worst value in this measurement data °
2. Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) °
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE3 -CH142_Ant A+B	Test Voltage	AC 120V/60Hz

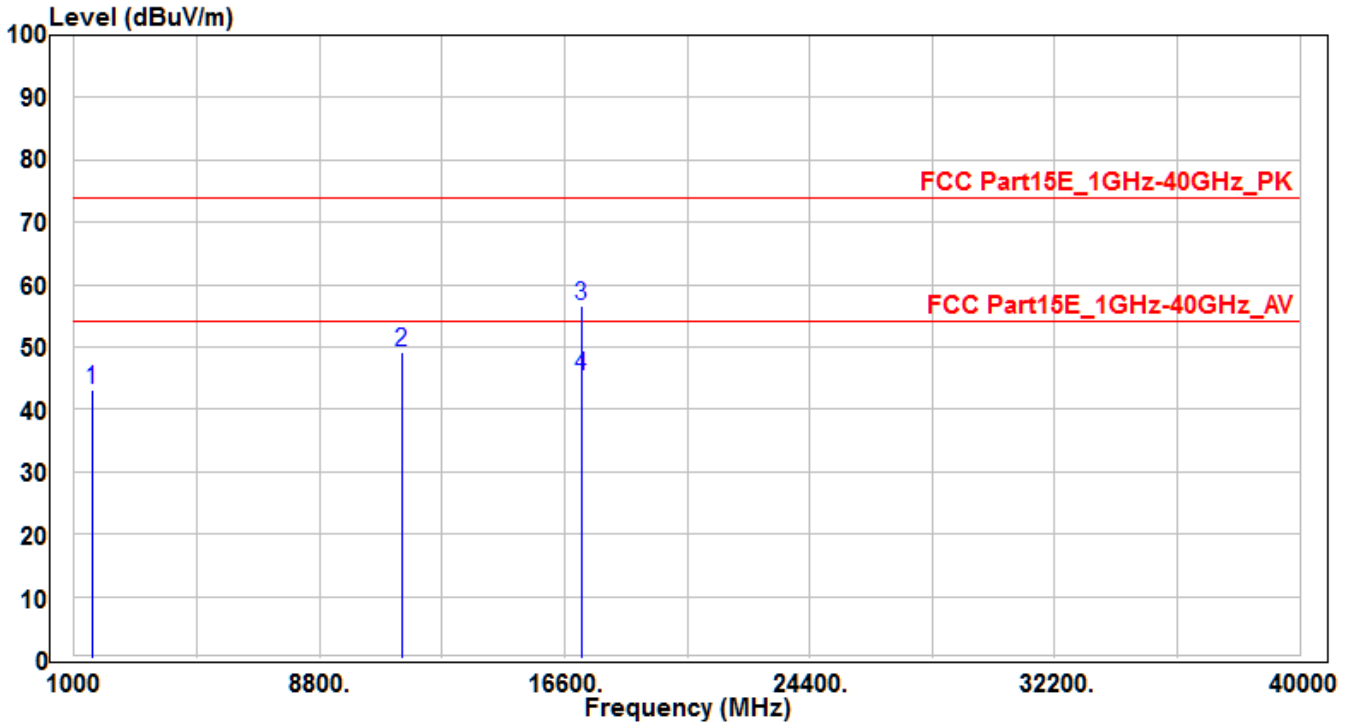


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1557.67	48.4	-5.26	43.14	-30.86	74	150	400	Peak
2	11420	30.1	19.22	49.32	-24.68	74	150	400	Peak
3	* 17130	29.7	26.88	56.58	-17.42	74	180	395	Peak
4	* 17130	18.45	26.88	45.33	-8.67	54	180	395	Average

Note :

1. " \* " means the worst value in this measurement data °
2. Measure Level (dBUV/m) = Reading Level (dBUV) + Factor (dB) °
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE3 -CH142_Ant A+B	Test Voltage	AC 120V/60Hz

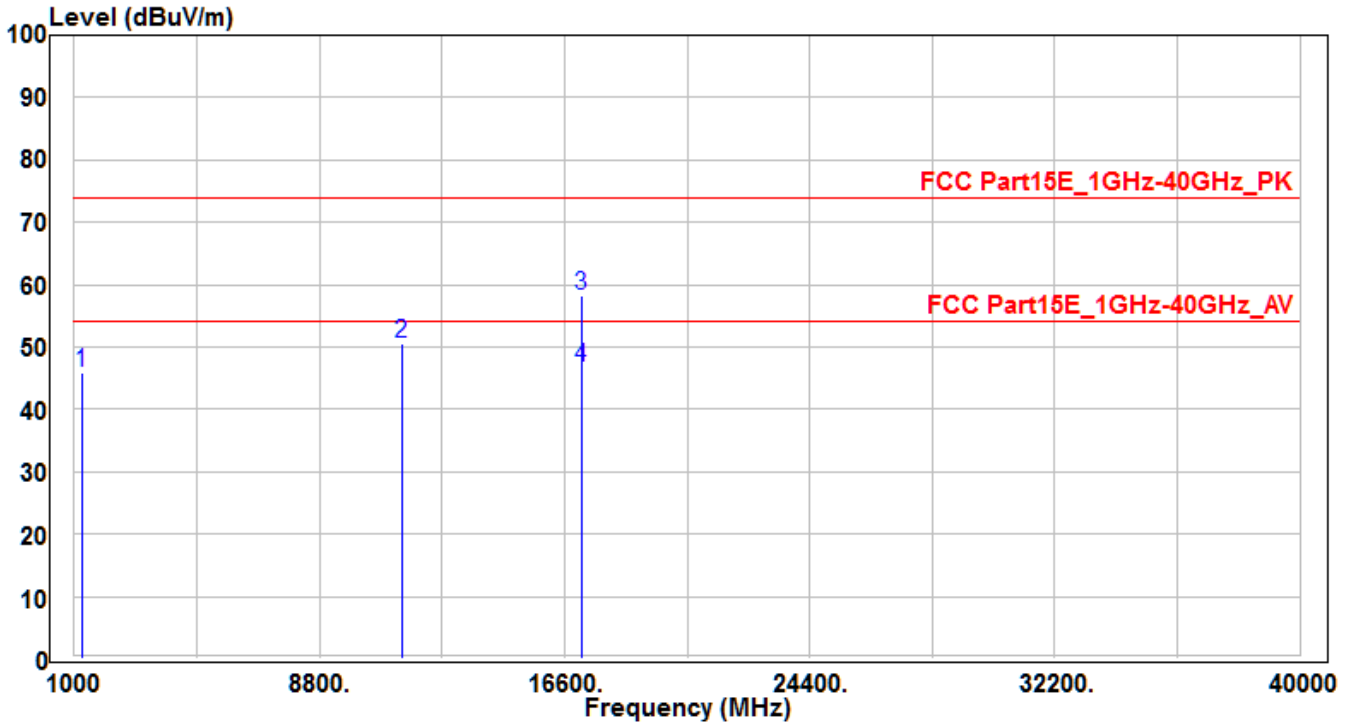


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1239.84	52.62	-6.69	45.93	-28.07	74	150	400	Peak
2	11420	31.36	19.22	50.58	-23.42	74	150	400	Peak
3	* 17130	31.44	26.88	58.32	-15.68	74	180	380	Peak
4	* 17130	19.82	26.88	46.7	-7.3	54	180	380	Average

Note :

1. " \* " means the worst value in this measurement data °
2. Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) °
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE3 -CH151_Ant A+B	Test Voltage	AC 120V/60Hz

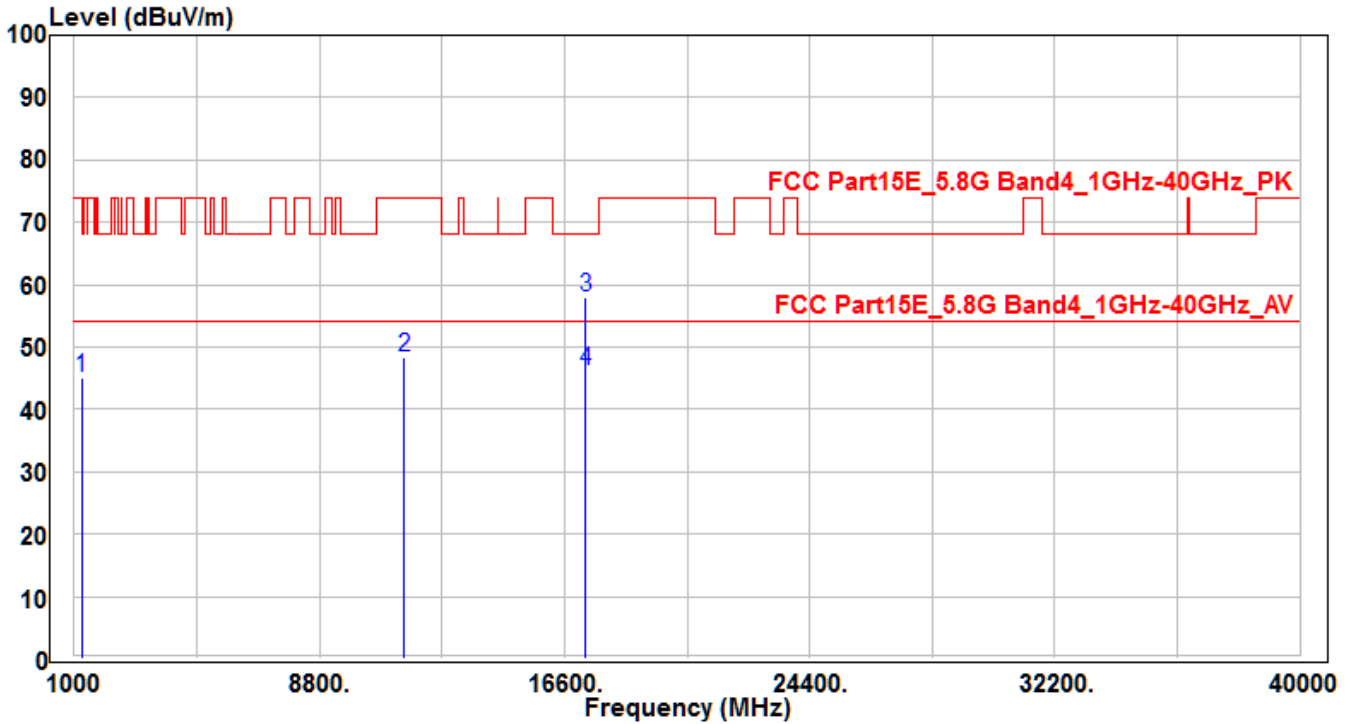


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1242.48	51.66	-6.67	44.99	-23.21	68.2	150	400	Peak
2	11510	29.08	19.25	48.33	-25.67	74	150	400	Peak
3	* 17265	29.9	27.99	57.89	-10.31	68.2	170	385	Peak
4	* 17265	18.25	27.99	46.24	-7.76	54	170	385	Average

Note :

1. " \* " means the worst value in this measurement data °
2. Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) °
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE3 -CH151_Ant A+B	Test Voltage	AC 120V/60Hz

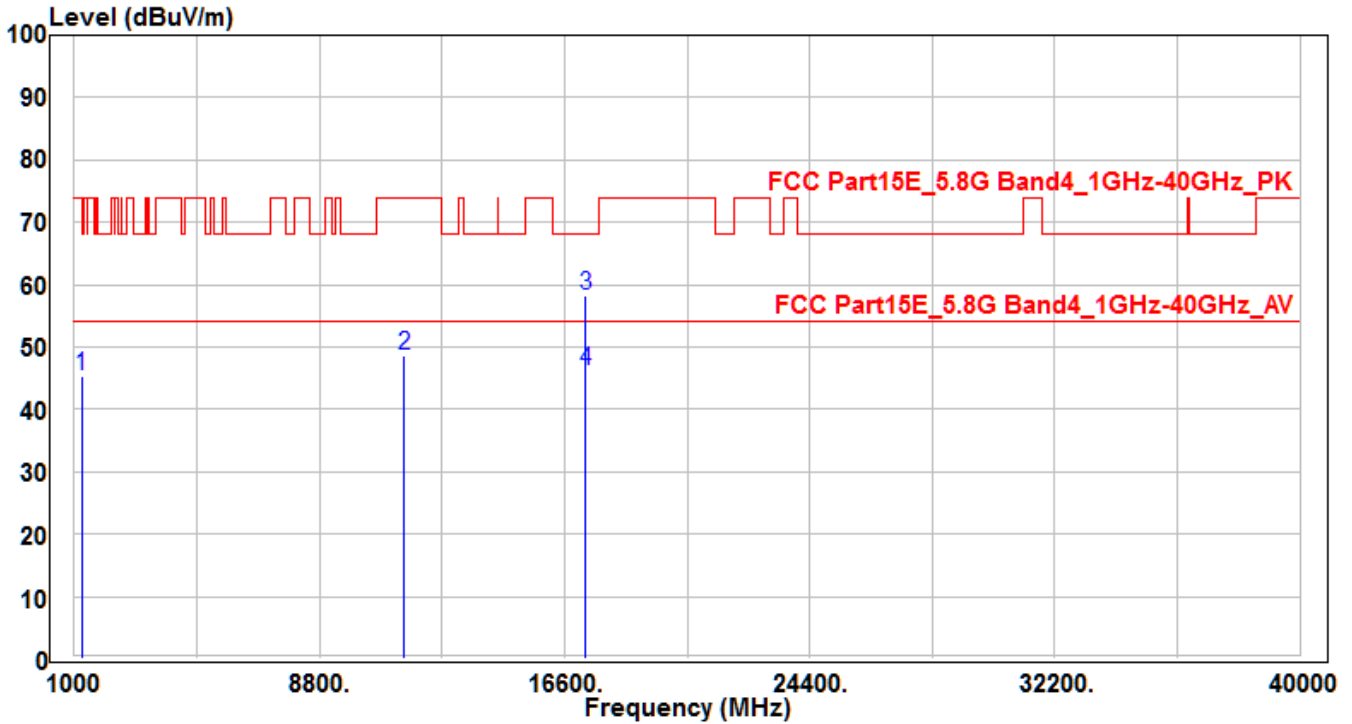


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1240.33	51.95	-6.69	45.26	-22.94	68.2	150	400	Peak
2	11510	29.42	19.25	48.67	-25.33	74	150	400	Peak
3	* 17265	30.2	27.99	58.19	-10.01	68.2	180	390	Peak
4	* 17265	18.29	27.99	46.28	-7.72	54	180	390	Average

Note :

1. " \* " means the worst value in this measurement data °
2. Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) °
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report °



EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE3 -CH159_Ant A+B	Test Voltage	AC 120V/60Hz

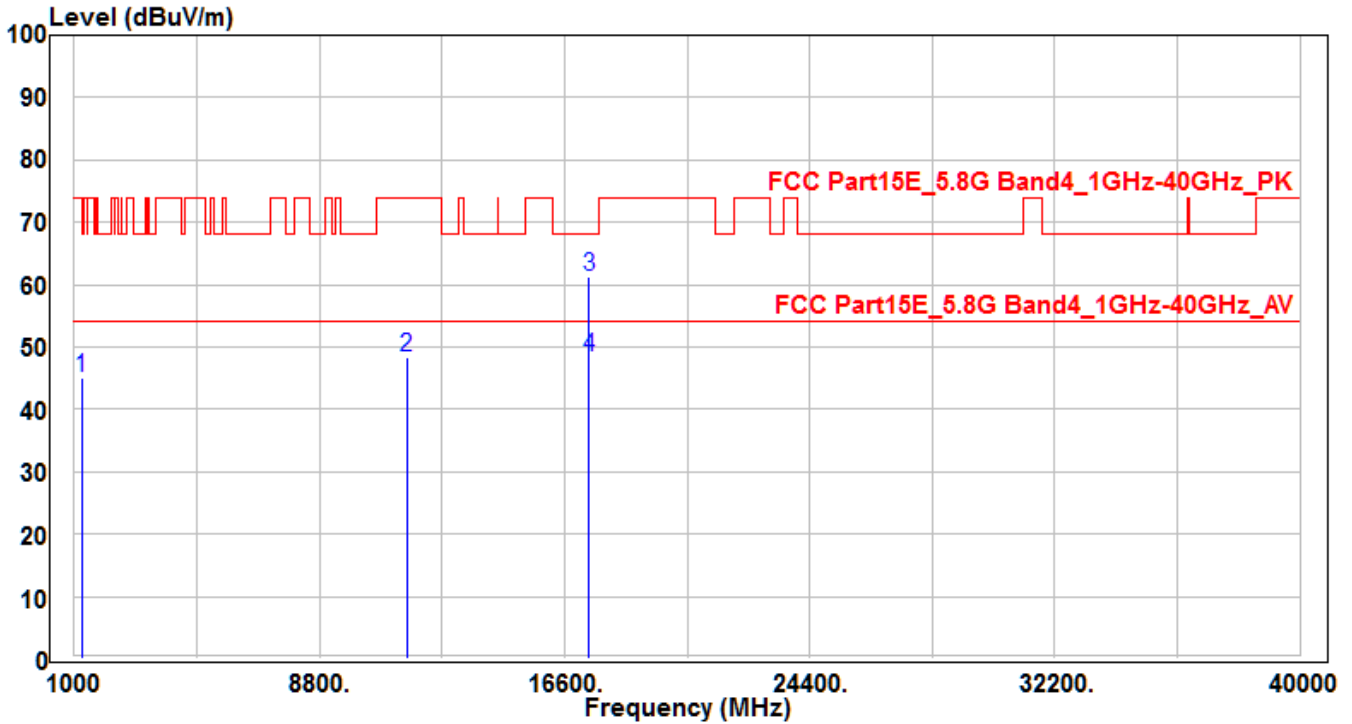


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1244.65	51.81	-6.66	45.15	-23.05	68.2	150	400	Peak
2	11590	29.14	19.17	48.31	-25.69	74	150	400	Peak
3	* 17385	32.37	28.98	61.35	-6.85	68.2	175	375	Peak
4	* 17385	19.46	28.98	48.44	-5.56	54	175	375	Average

Note :

1. " \* " means the worst value in this measurement data °
2. Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) °
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE3 -CH159_Ant A+B	Test Voltage	AC 120V/60Hz

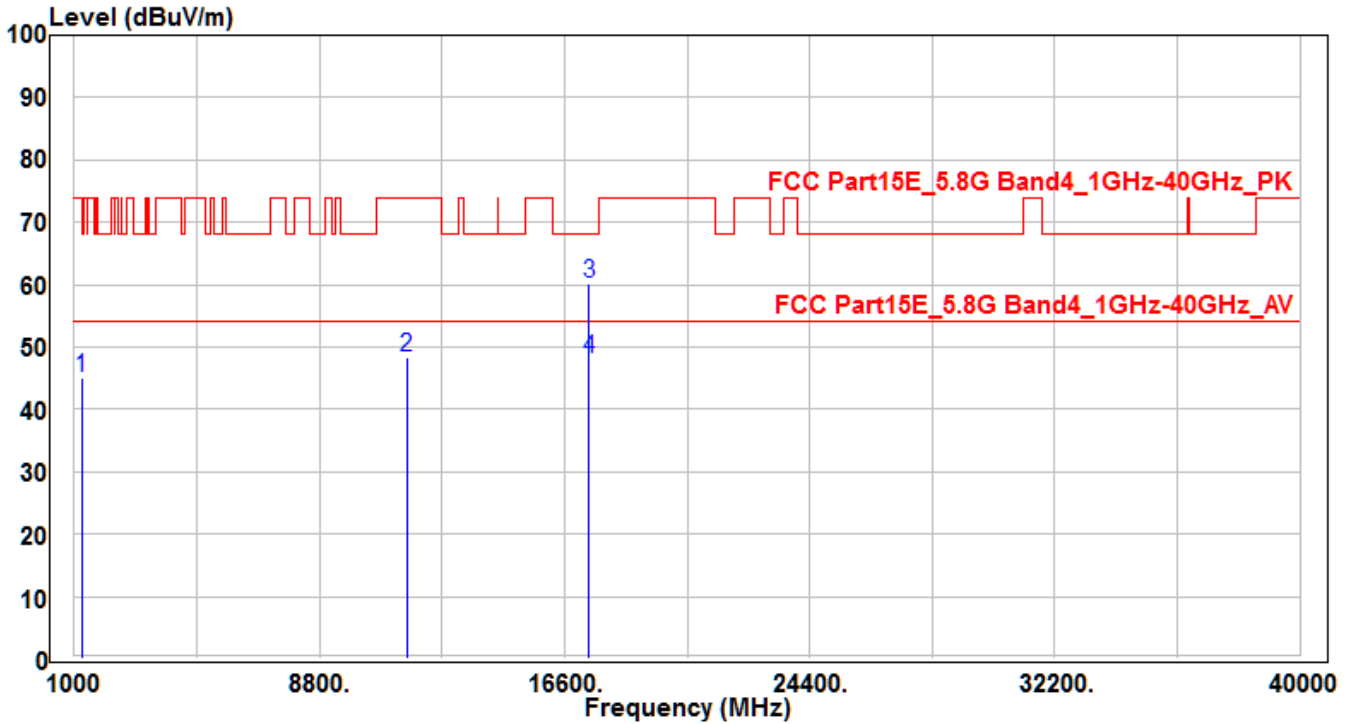


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1243.86	51.6	-6.67	44.93	-23.27	68.2	150	400	Peak
2	11590	29.2	19.17	48.37	-25.63	74	150	400	Peak
3	* 17385	31.09	28.98	60.07	-8.13	68.2	170	385	Peak
4	* 17385	19.03	28.98	48.01	-5.99	54	170	385	Average

Note :

1. " \* " means the worst value in this measurement data °
2. Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) °
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE4 -CH42_Ant A+B	Test Voltage	AC 120V/60Hz

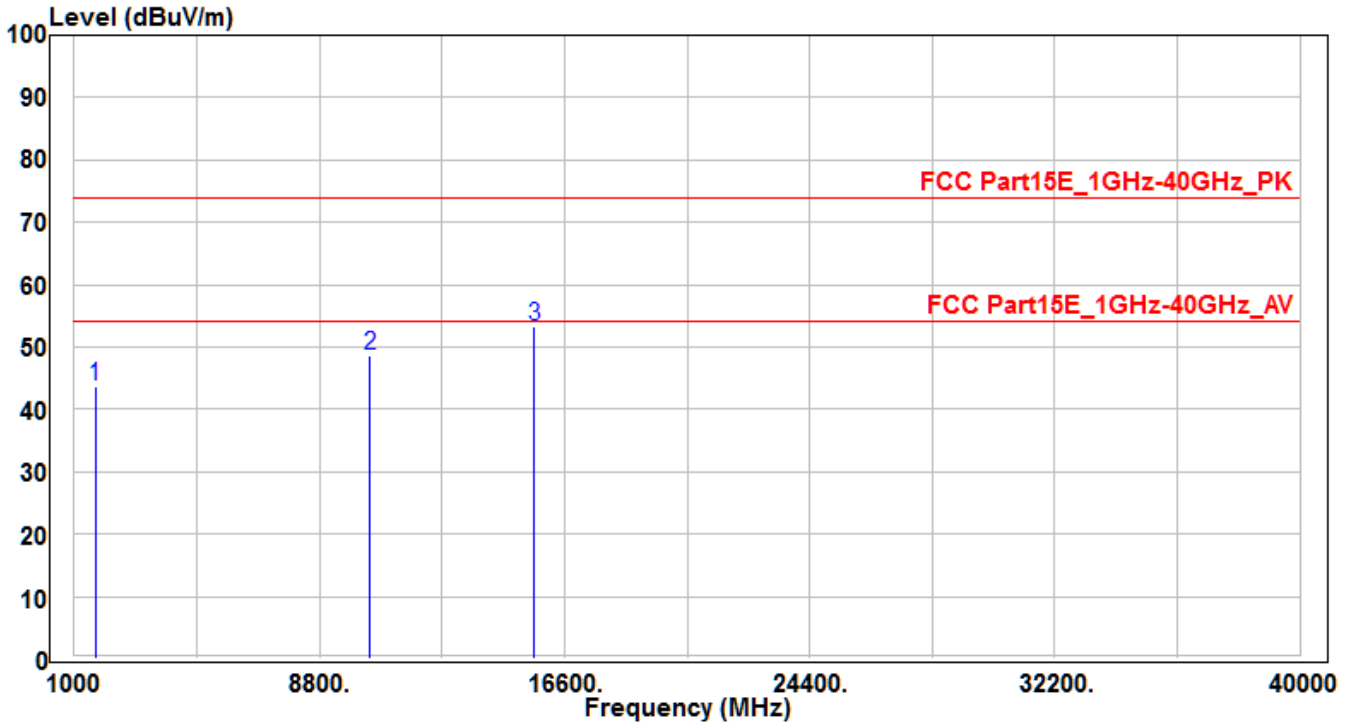


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1662.47	48.64	-4.94	43.7	-30.3	74	150	400	Peak
2	10420	30.98	17.62	48.6	-25.4	74	150	400	Peak
3	* 15630	31.7	21.5	53.2	-20.8	74	150	400	Peak

Note :

1. " \* " means the worst value in this measurement data ◦
2. Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) ◦
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) ◦
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report ◦

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE4 -CH42_Ant A+B	Test Voltage	AC 120V/60Hz

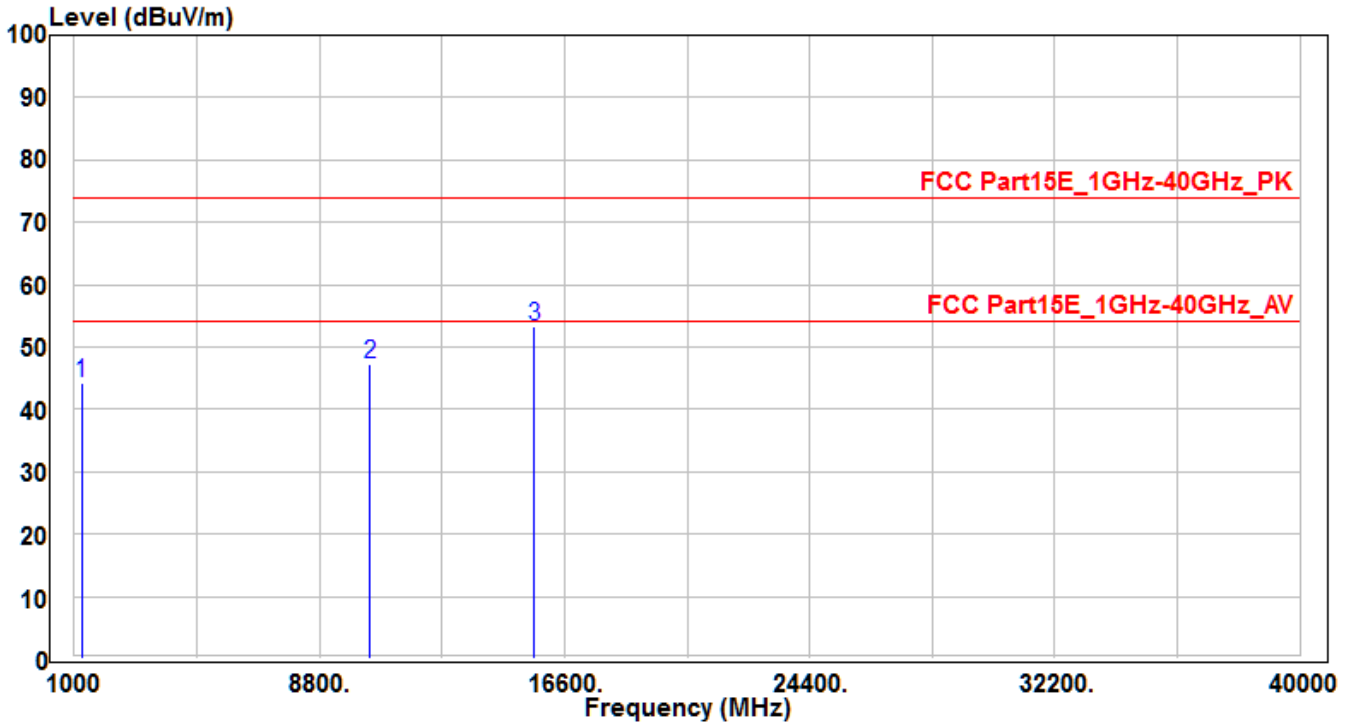


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1245.79	50.86	-6.66	44.2	-29.8	74	150	400	Peak
2	10420	29.77	17.62	47.39	-26.61	74	150	400	Peak
3	* 15630	31.83	21.5	53.33	-20.67	74	150	400	Peak

Note :

1. " \* " means the worst value in this measurement data ◦
2. Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) ◦
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) ◦
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report ◦

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE4 -CH58_Ant A+B	Test Voltage	AC 120V/60Hz

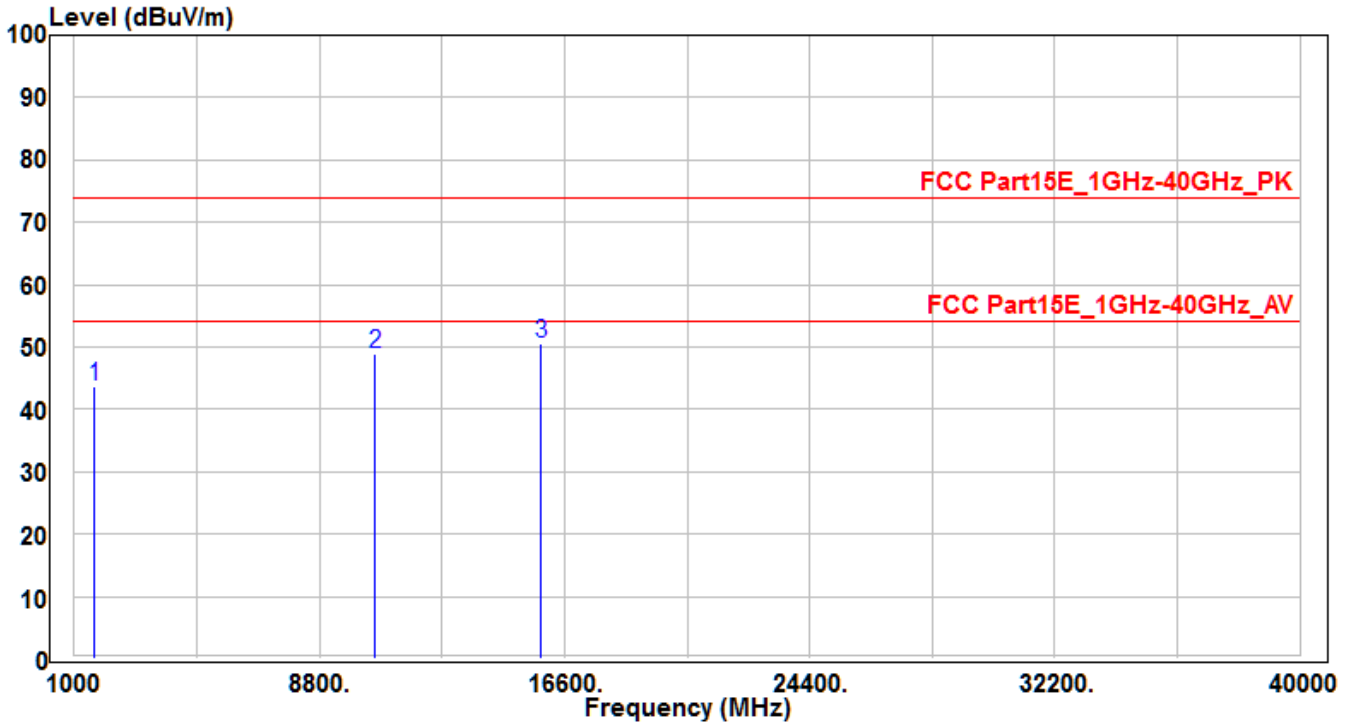


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1655.48	48.71	-4.96	43.75	-30.25	74	150	400	Peak
2	10580	30.85	18.14	48.99	-25.01	74	150	400	Peak
3	* 15870	29.96	20.66	50.62	-23.38	74	150	400	Peak

Note :

1. " \* " means the worst value in this measurement data °
2. Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) °
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE4 -CH58_Ant A+B	Test Voltage	AC 120V/60Hz

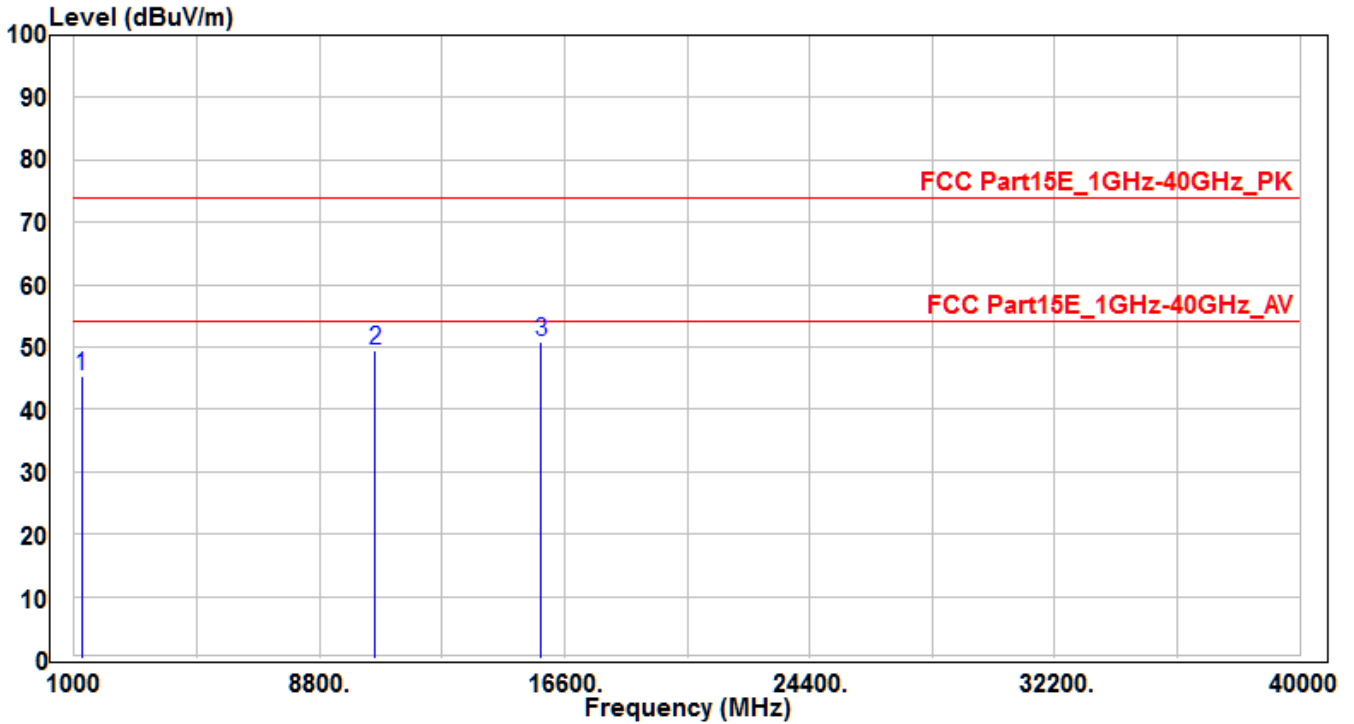


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1246.82	51.88	-6.65	45.23	-28.77	74	150	400	Peak
2	10580	31.27	18.14	49.41	-24.59	74	150	400	Peak
3	* 15870	30.05	20.66	50.71	-23.29	74	150	400	Peak

## Note :

- "\*" means the worst value in this measurement data °
- Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) °
- Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
- The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE4 -CH106_Ant A+B	Test Voltage	AC 120V/60Hz

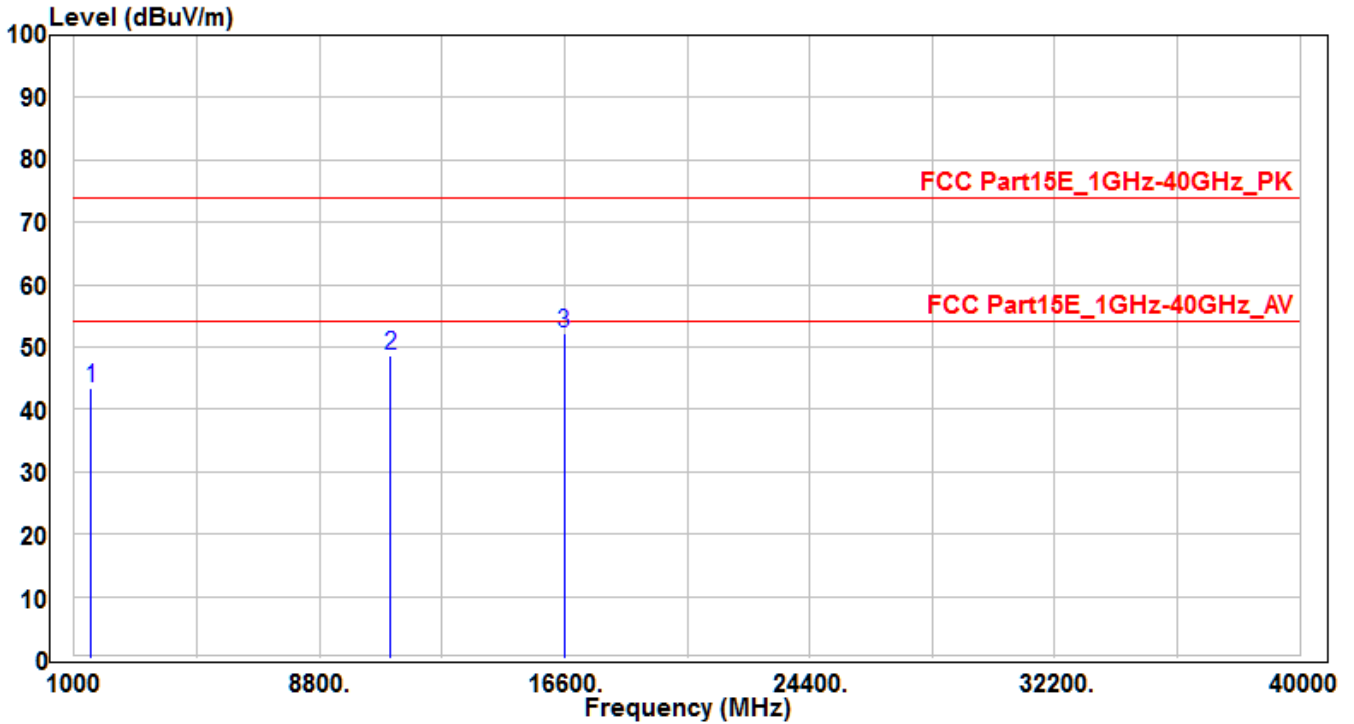


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1540.94	48.59	-5.3	43.29	-30.71	74	150	400	Peak
2	11060	29.61	19.1	48.71	-25.29	74	150	400	Peak
3	* 16590	29.58	22.73	52.31	-21.69	74	150	400	Peak

Note :

1. " \* " means the worst value in this measurement data °
2. Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) °
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE4 -CH106_Ant A+B	Test Voltage	AC 120V/60Hz

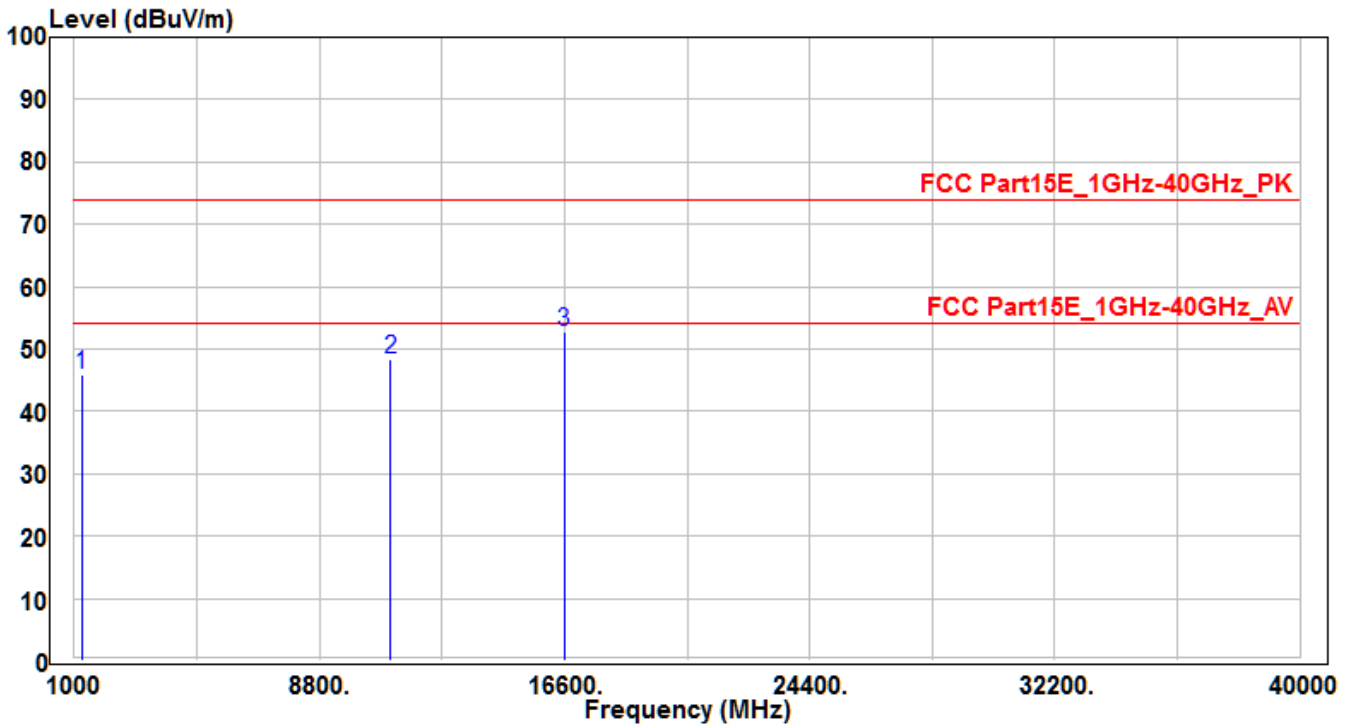


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1245.26	52.61	-6.66	45.95	-28.05	74	150	400	Peak
2	11060	29.32	19.1	48.42	-25.58	74	150	400	Peak
3	* 16590	29.96	22.73	52.69	-21.31	74	150	400	Peak

Note :

1. " \* " means the worst value in this measurement data °
2. Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) °
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report °



EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE4 -CH122_Ant A+B	Test Voltage	AC 120V/60Hz

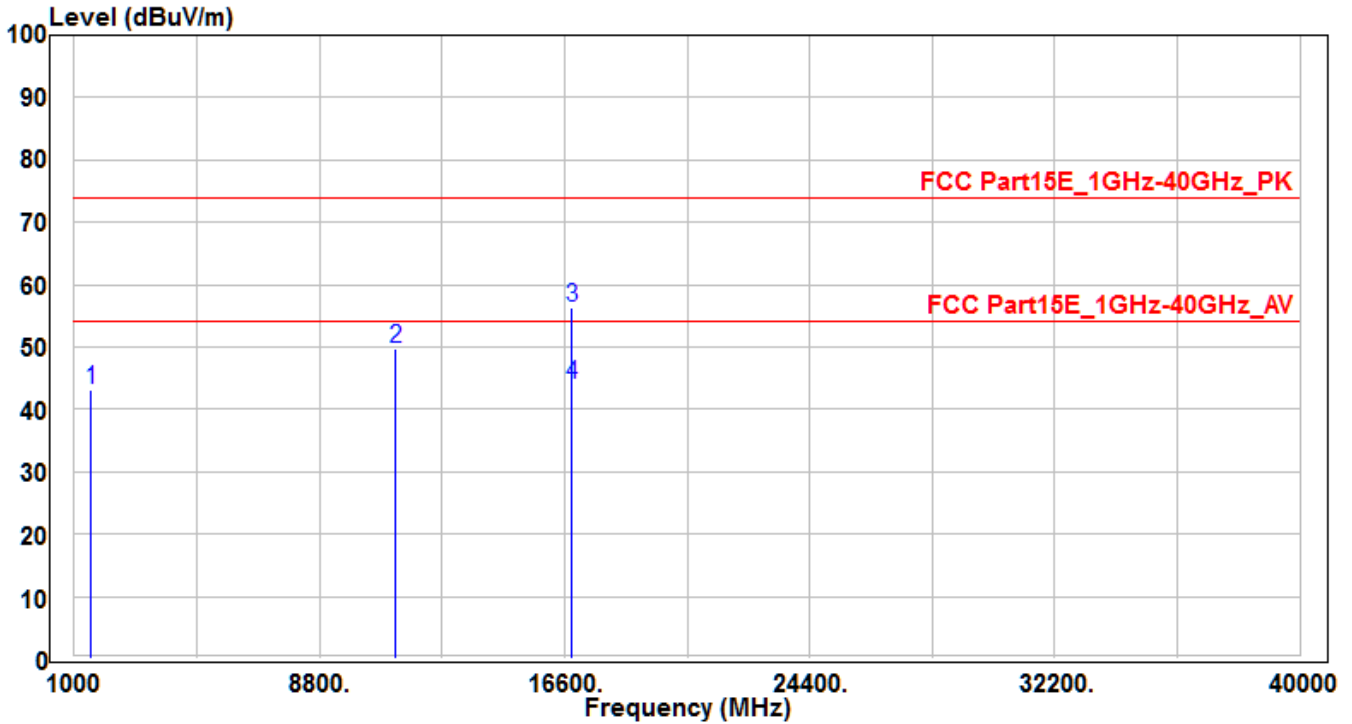


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1544.85	48.51	-5.3	43.21	-30.79	74	150	400	Peak
2	11220	30.59	19.15	49.74	-24.26	74	150	400	Peak
3	* 16830	31.78	24.53	56.31	-17.69	74	170	395	Peak
4	* 16830	19.38	24.53	43.91	-10.09	54	170	395	Average

Note :

1. " \* " means the worst value in this measurement data ◦
2. Measure Level (dBUV/m) = Reading Level (dBUV) + Factor (dB) ◦
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) ◦
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report ◦

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE4 -CH122_Ant A+B	Test Voltage	AC 120V/60Hz

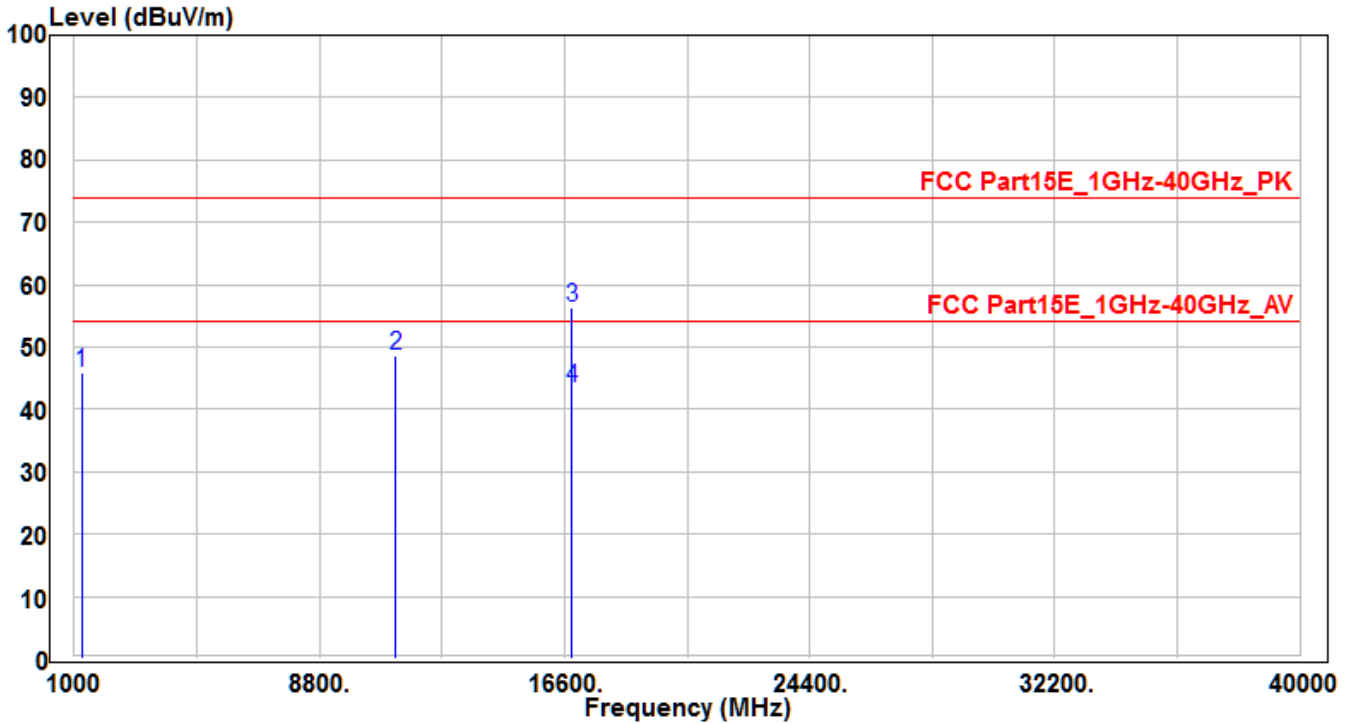


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1240.96	52.69	-6.69	46	-28	74	150	400	Peak
2	11220	29.51	19.15	48.66	-25.34	74	150	400	Peak
3	* 16830	31.79	24.53	56.32	-17.68	74	170	380	Peak
4	* 16830	18.76	24.53	43.29	-10.71	54	170	380	Average

Note :

1. " \* " means the worst value in this measurement data °
2. Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) °
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE4 -CH138_Ant A+B	Test Voltage	AC 120V/60Hz

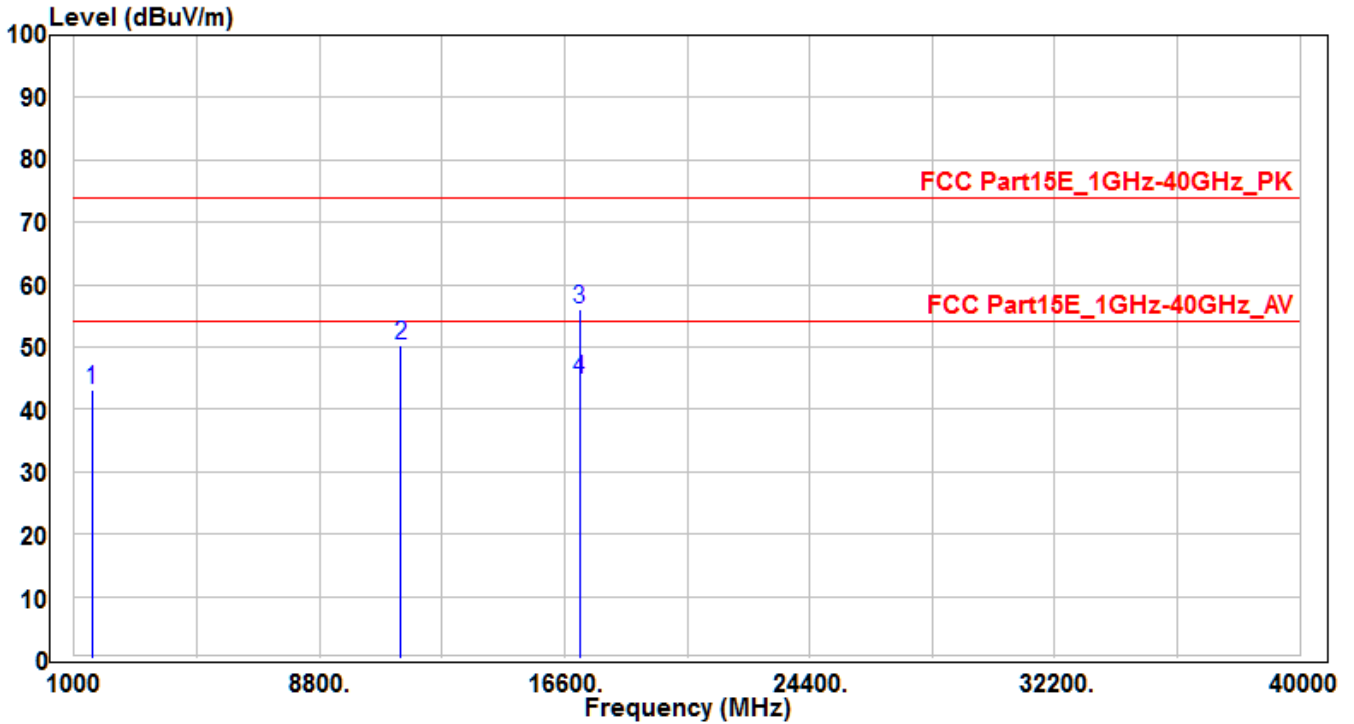


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1558.63	48.43	-5.26	43.17	-30.83	74	150	400	Peak
2	11380	31.06	19.22	50.28	-23.72	74	150	400	Peak
3	* 17070	29.74	26.39	56.13	-17.87	74	170	380	Peak
4	* 17070	18.5	26.39	44.89	-9.11	54	170	380	Average

Note :

1. " \* " means the worst value in this measurement data °
2. Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) °
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE4 -CH138_Ant A+B	Test Voltage	AC 120V/60Hz

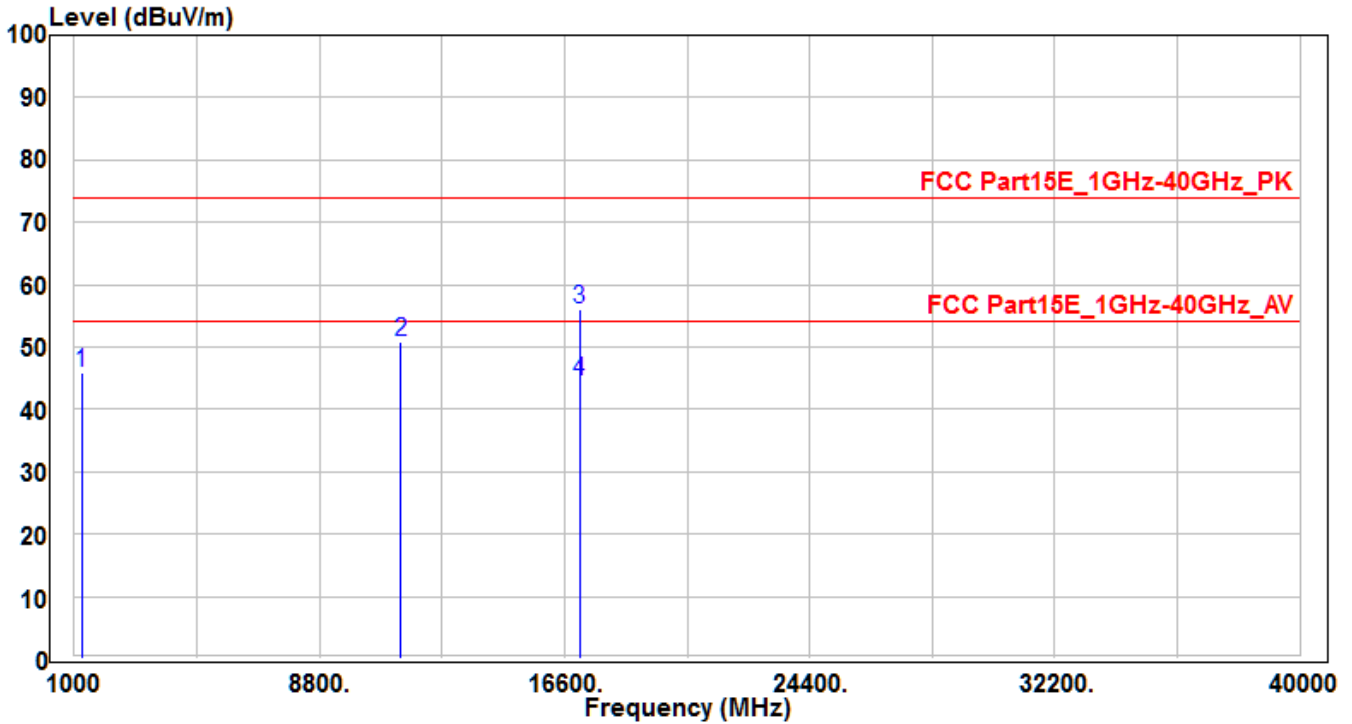


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1239.16	52.65	-6.7	45.95	-28.05	74	150	400	Peak
2	11380	31.64	19.22	50.86	-23.14	74	150	400	Peak
3	* 17070	29.53	26.39	55.92	-18.08	74	165	395	Peak
4	* 17070	18.04	26.39	44.43	-9.57	54	165	395	Average

Note :

1. " \* " means the worst value in this measurement data °
2. Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) °
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE4 -CH155_Ant A+B	Test Voltage	AC 120V/60Hz

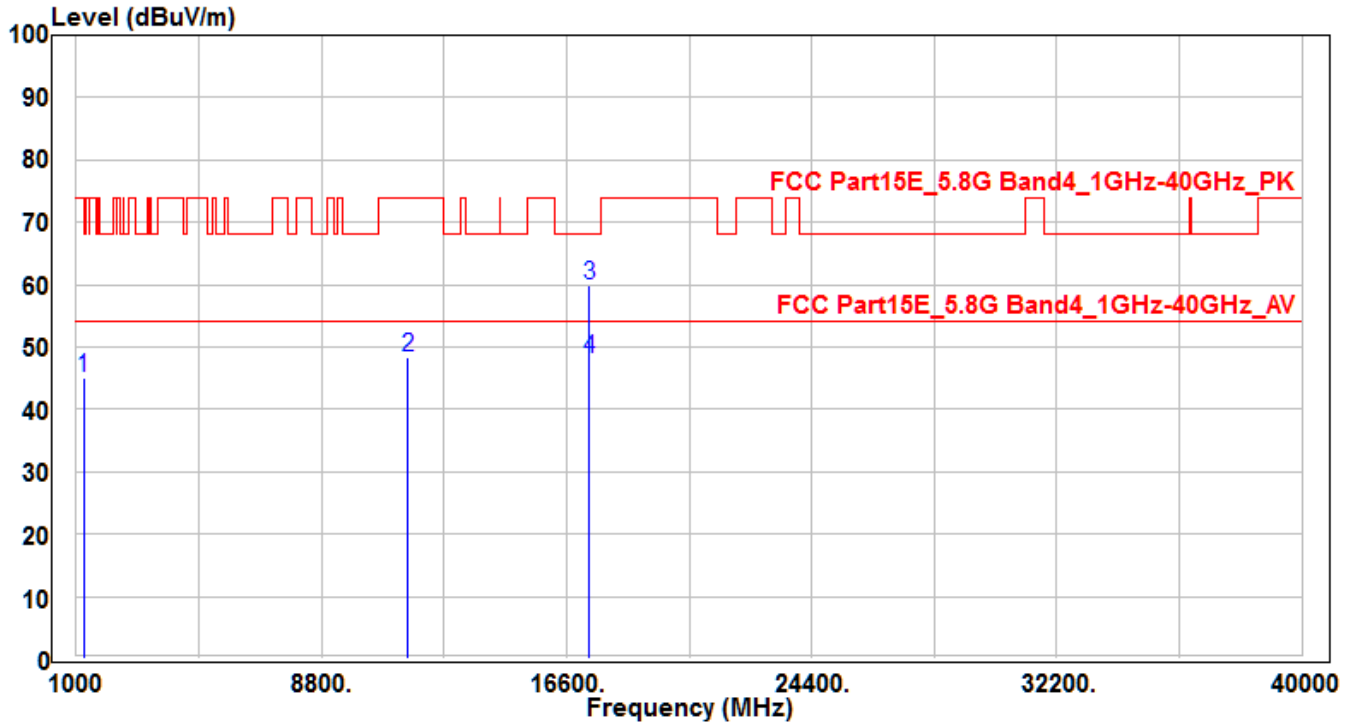


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1243.62	51.62	-6.67	44.95	-23.25	68.2	150	400	Peak
2	11550	29.18	19.21	48.39	-25.61	74	150	400	Peak
3	* 17325	31.34	28.49	59.83	-8.37	68.2	165	400	Peak
4	* 17325	19.63	28.49	48.12	-5.88	54	165	400	Average

Note :

1. " \* " means the worst value in this measurement data °
2. Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) °
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE4 -CH155_Ant A+B	Test Voltage	AC 120V/60Hz

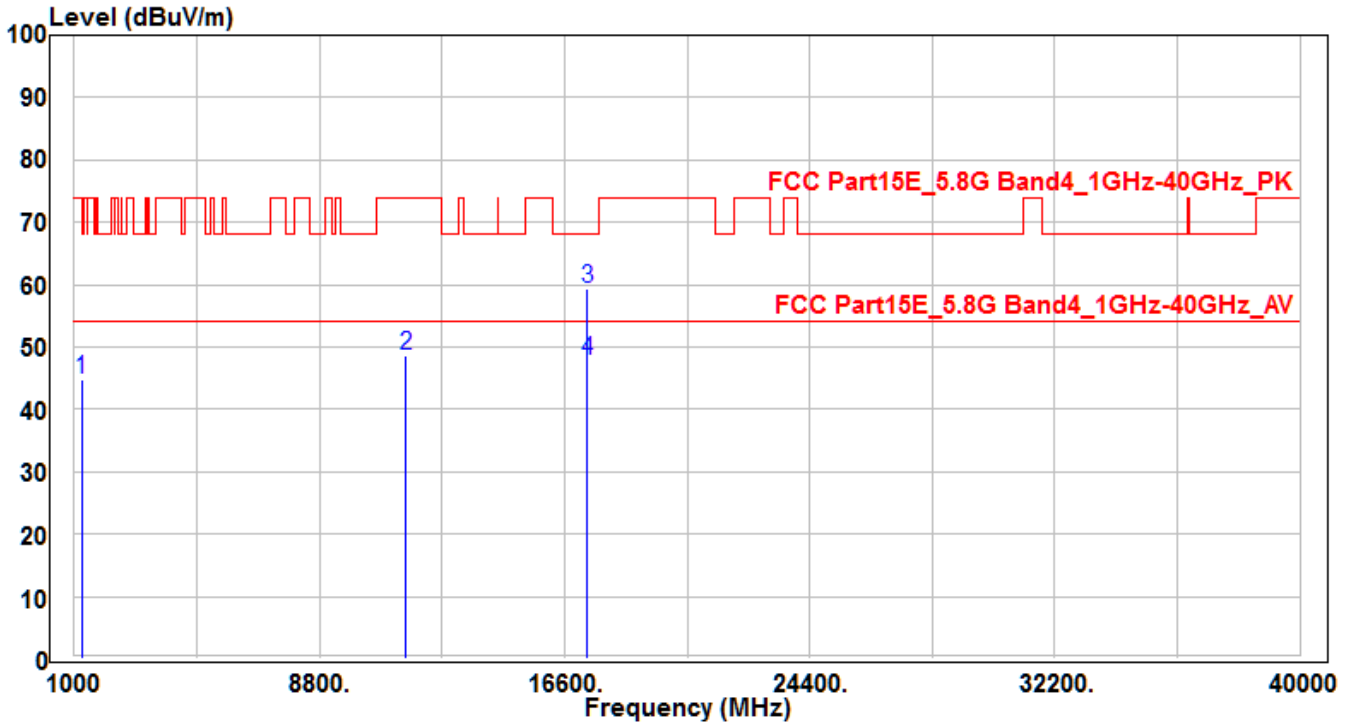


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1246.68	51.37	-6.65	44.72	-23.48	68.2	150	400	Peak
2	11550	29.33	19.21	48.54	-25.46	74	150	400	Peak
3	* 17325	30.95	28.49	59.44	-8.76	68.2	170	400	Peak
4	* 17325	19.35	28.49	47.84	-6.16	54	170	400	Average

Note :

1. " \* " means the worst value in this measurement data °
2. Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) °
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE5 -CH50 Ant A+B	Test Voltage	AC 120V/60Hz

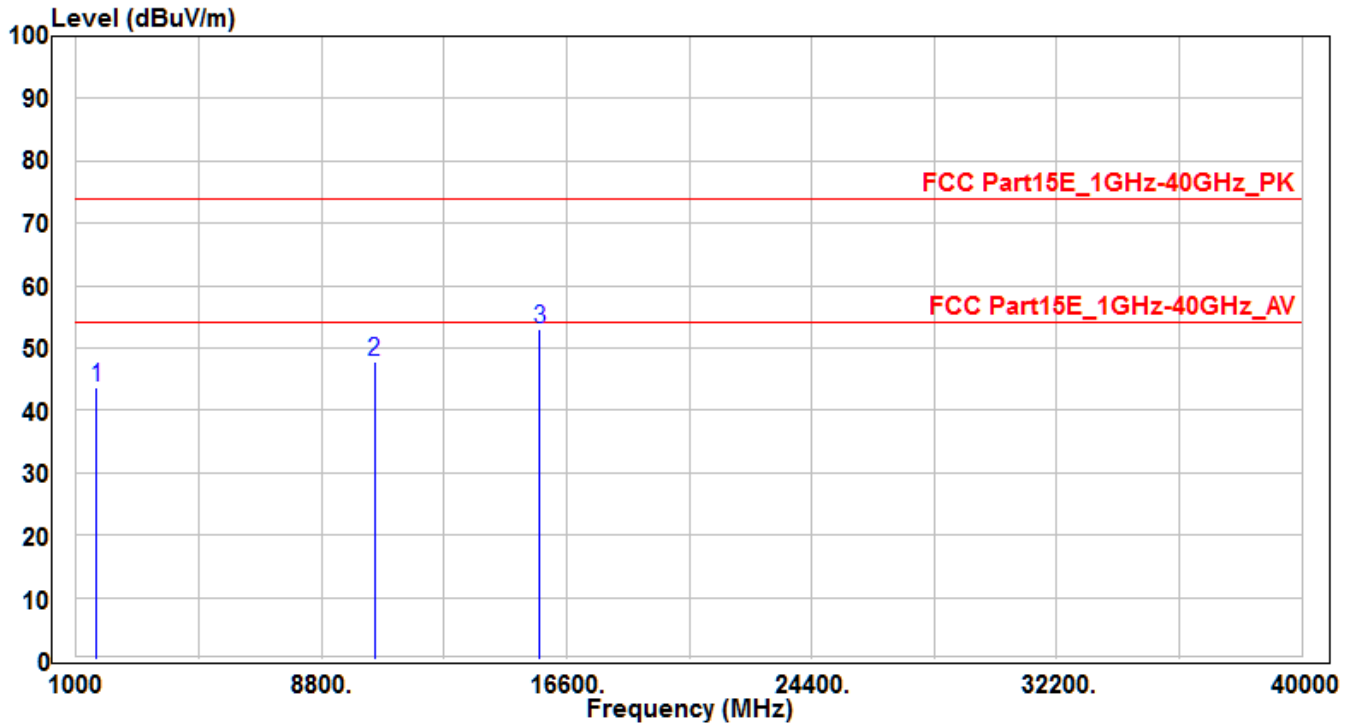


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1654.75	48.63	-4.96	43.67	-30.33	74	150	400	Peak
2	10500	29.91	17.97	47.88	-26.12	74	150	400	Peak
3	* 15750	31.95	21.08	53.03	-20.97	74	150	400	Peak

Note :

1. " \* " means the worst value in this measurement data ◦
2. Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) ◦
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) ◦
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report ◦

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE5 -CH50 Ant A+B	Test Voltage	AC 120V/60Hz

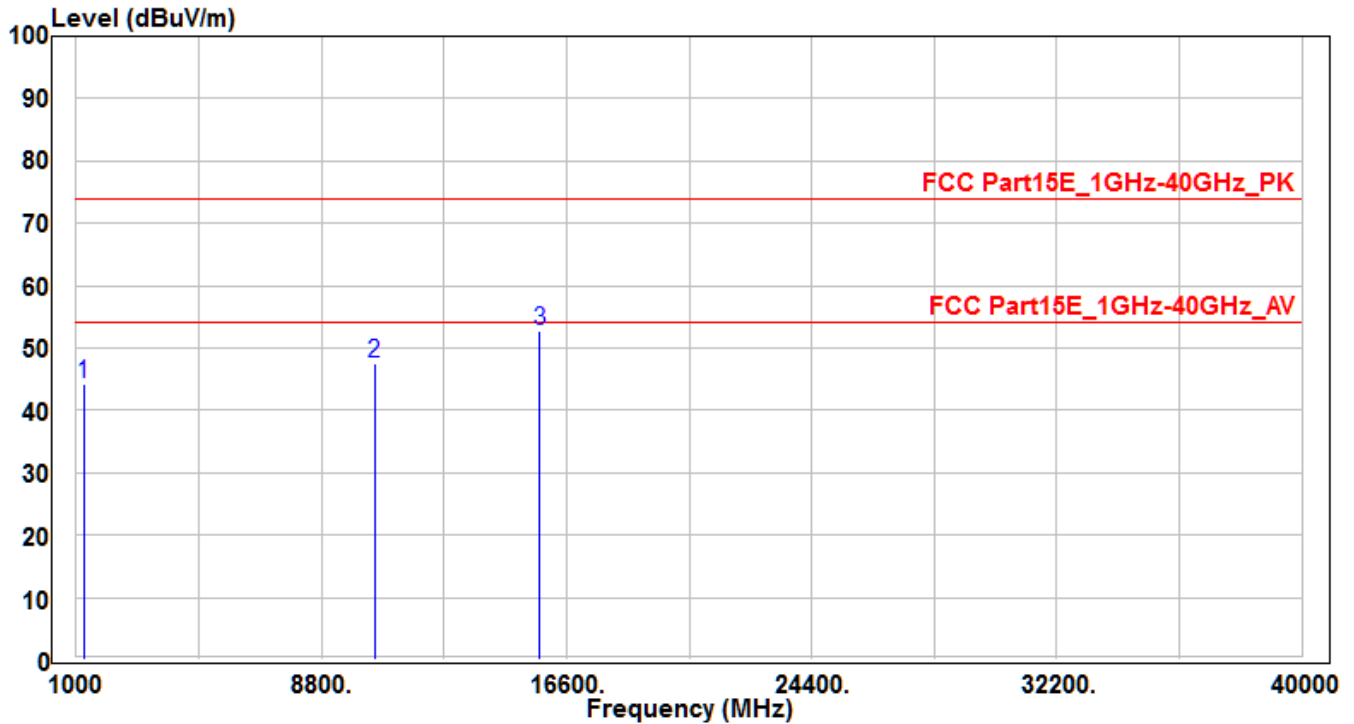


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1245.8	50.99	-6.66	44.33	-29.67	74	150	400	Peak
2	10500	29.64	17.97	47.61	-26.39	74	150	400	Peak
3	* 15750	31.81	21.08	52.89	-21.11	74	150	400	Peak

Note :

1. " \* " means the worst value in this measurement data ◦
2. Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) ◦
3. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) ◦
4. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report ◦



EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE5 -CH114_Ant A+B	Test Voltage	AC 120V/60Hz

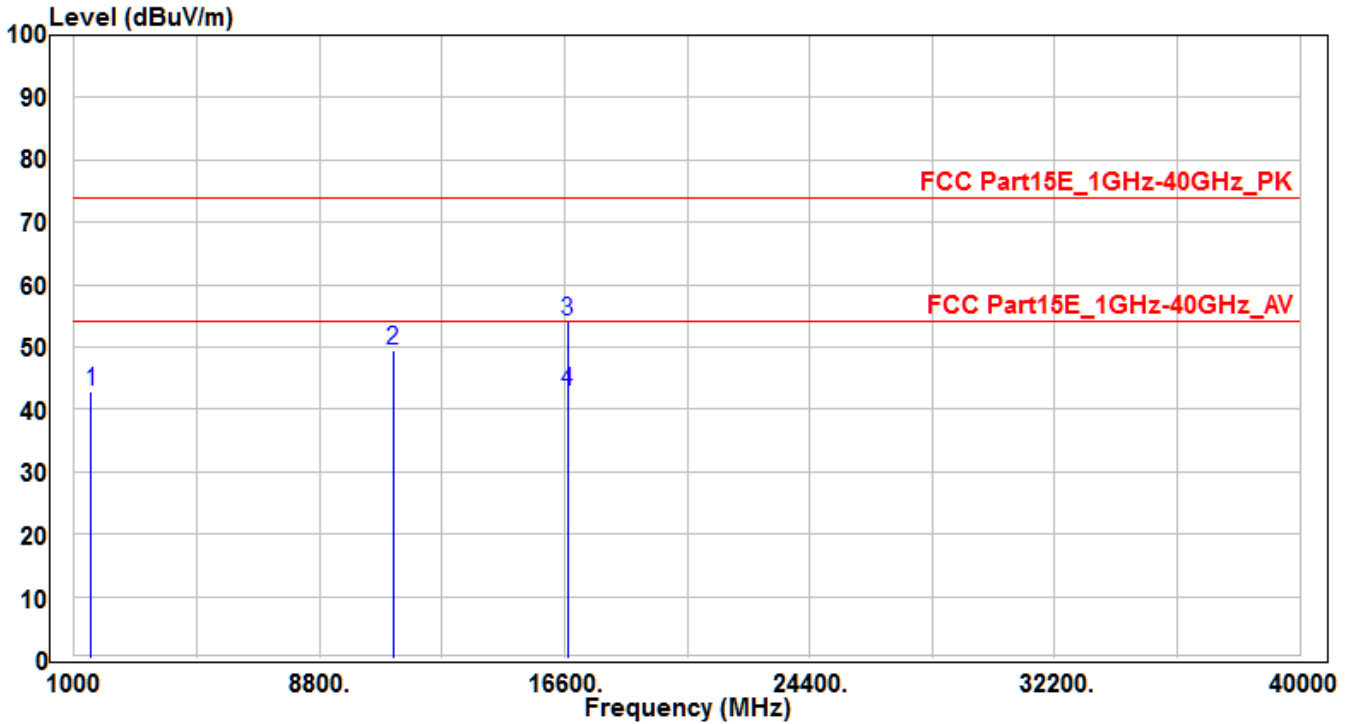


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1549.16	48.25	-5.28	42.97	-31.03	74	150	400	Peak
2	11140	30.27	19.13	49.4	-24.6	74	150	400	Peak
3	* 16710	30.46	23.64	54.1	-19.9	74	165	385	Peak
4	* 16710	19.15	23.64	42.79	-11.21	54	165	385	Average

Note :

5. " \* " means the worst value in this measurement data °
6. Measure Level (dBUV/m) = Reading Level (dBUV) + Factor (dB) °
7. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
8. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25°C / 60%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE5 -CH114_Ant A+B	Test Voltage	AC 120V/60Hz

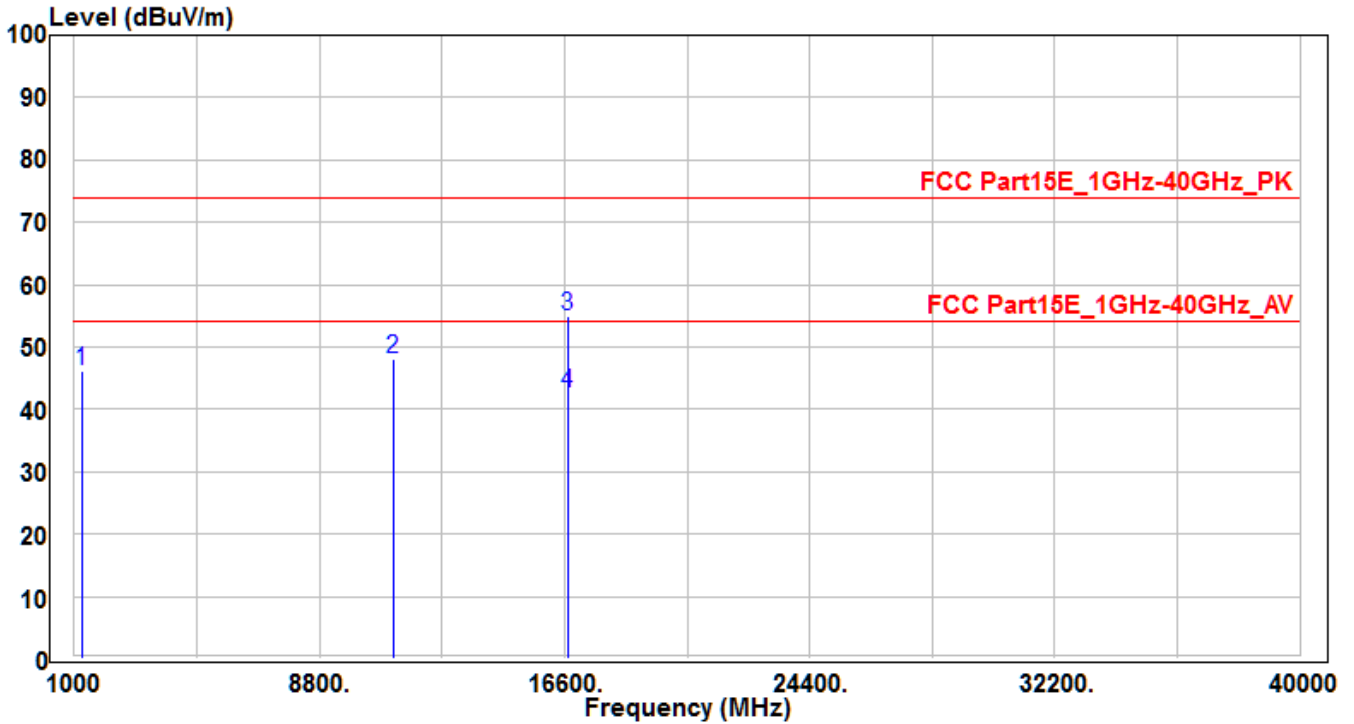

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1235.65	52.79	-6.71	46.08	-27.92	74	150	400	Peak
2	11140	28.9	19.13	48.03	-25.97	74	150	400	Peak
3	* 16710	31.23	23.64	54.87	-19.13	74	160	395	Peak
4	* 16710	18.85	23.64	42.49	-11.51	54	160	395	Average

Note :

5. " \* " means the worst value in this measurement data °
6. Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB) °
7. Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) °
8. The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible, therefore no data appear in the report °

## 7.8. Radiated Restricted Band Edge Measurement

### 7.8.1. Test Limit

#### For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.25 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41	--	--	--

**For 15.407(b) requirement:**

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

**For FCC transmitters operating in the 5.725-5.85 GHz band:** All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

**For IC transmitters operating in the 5.725-5.85 GHz band:** All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

Refer to KDB 789033 D02v02r01 G)2)c), as specified in § 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a maximum emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in § 15.407(b)(4)). However, an out-of-band emission that complies with both the peak and average limits of § 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz maximum emission limit.


All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

**FCC-Radiated emission limits; general requirements.**

<b>FCC Part 15 Subpart C Paragraph 15.209</b>		
<b>Frequency [MHz]</b>	<b>Field Strength [V/m]</b>	<b>Measured Distance [Meters]</b>
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	24000/F (kHz)	30
1.705 ~ 30	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

### 7.8.2. Test Result

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE1-CH36_Ant A	Test Voltage	AC 120V/60Hz

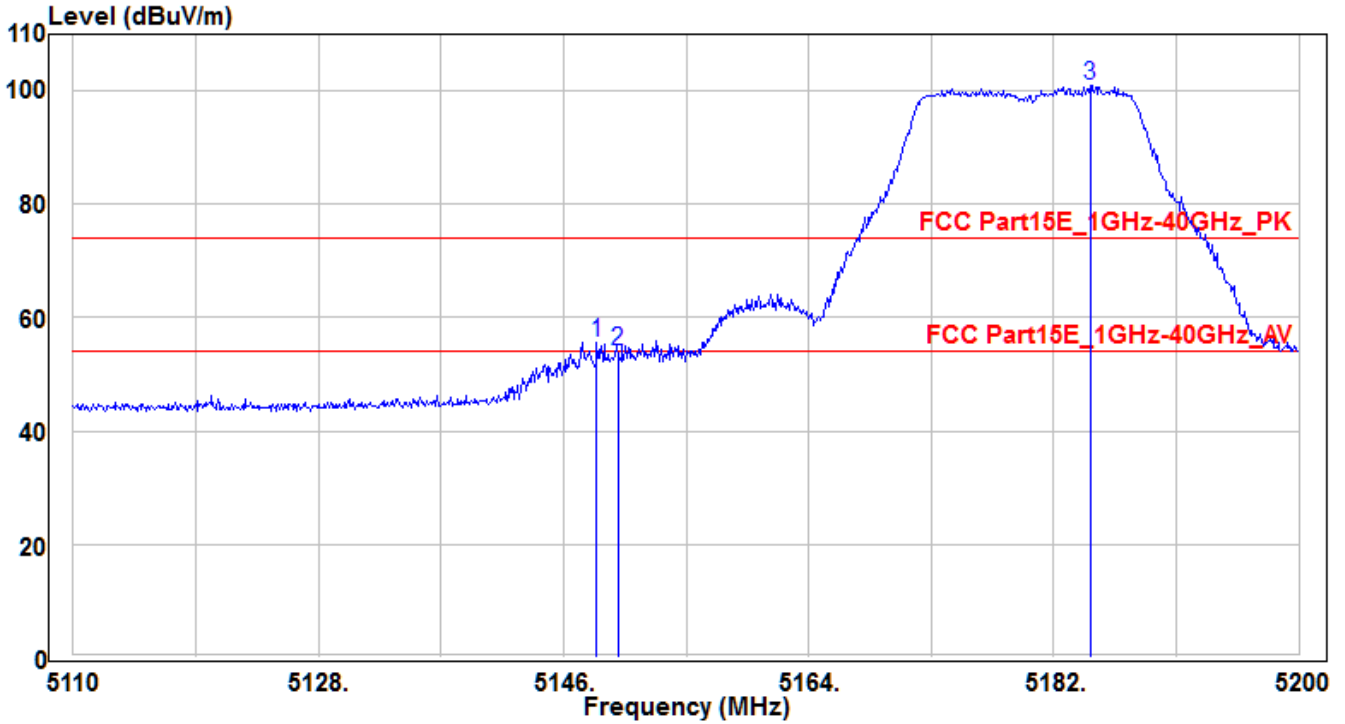


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	51.65	3.87	55.52	-18.48	74	240	200	Peak
2		50.33	3.88	54.21	-19.79	74	240	200	Peak
3		97	3.91	100.91	26.91	74	240	200	Peak

Note:

1. " \* " means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB)
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor)

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE1-CH36_Ant A	Test Voltage	AC 120V/60Hz

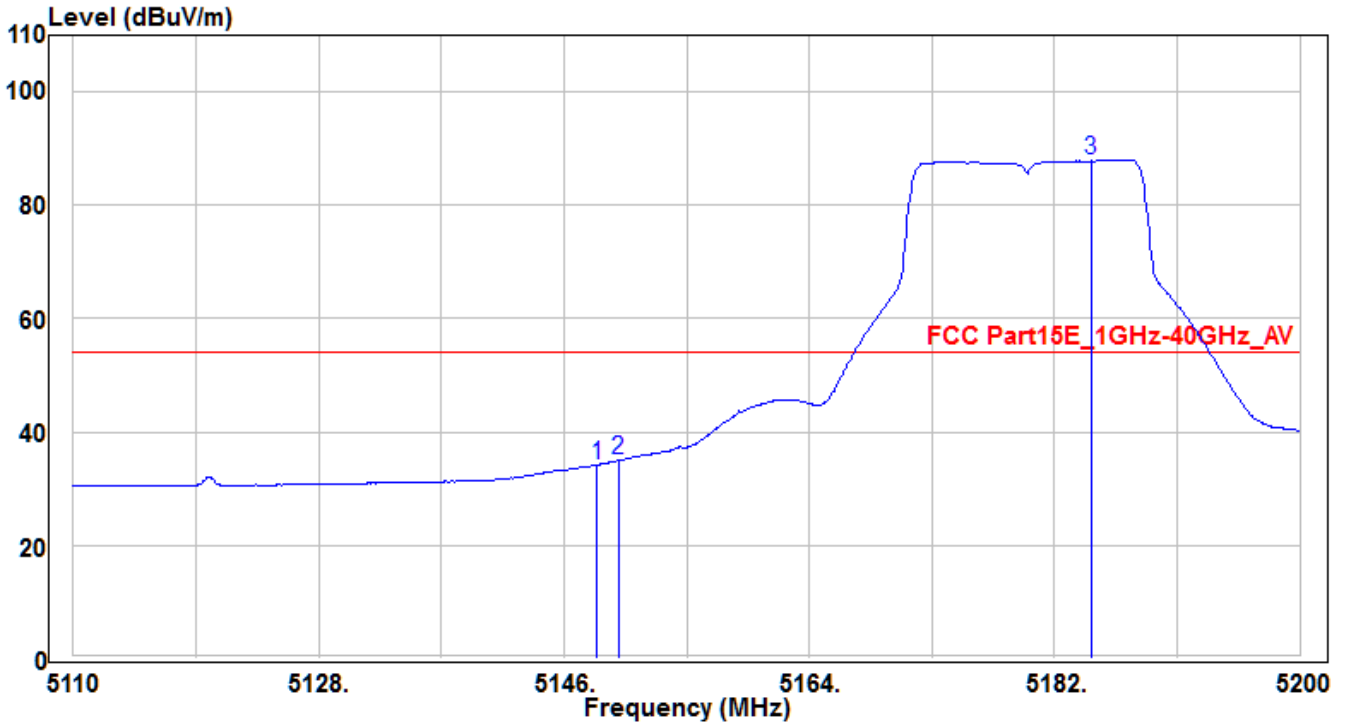


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5148.43	30.3	3.87	34.17	-19.83	54	240	200	Average
2	* 5150	31.1	3.88	34.98	-19.02	54	240	200	Average
3	5184.7	83.89	3.91	87.8	33.8	54	240	200	Average

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB)
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor)

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE1-CH36_Ant A	Test Voltage	AC 120V/60Hz

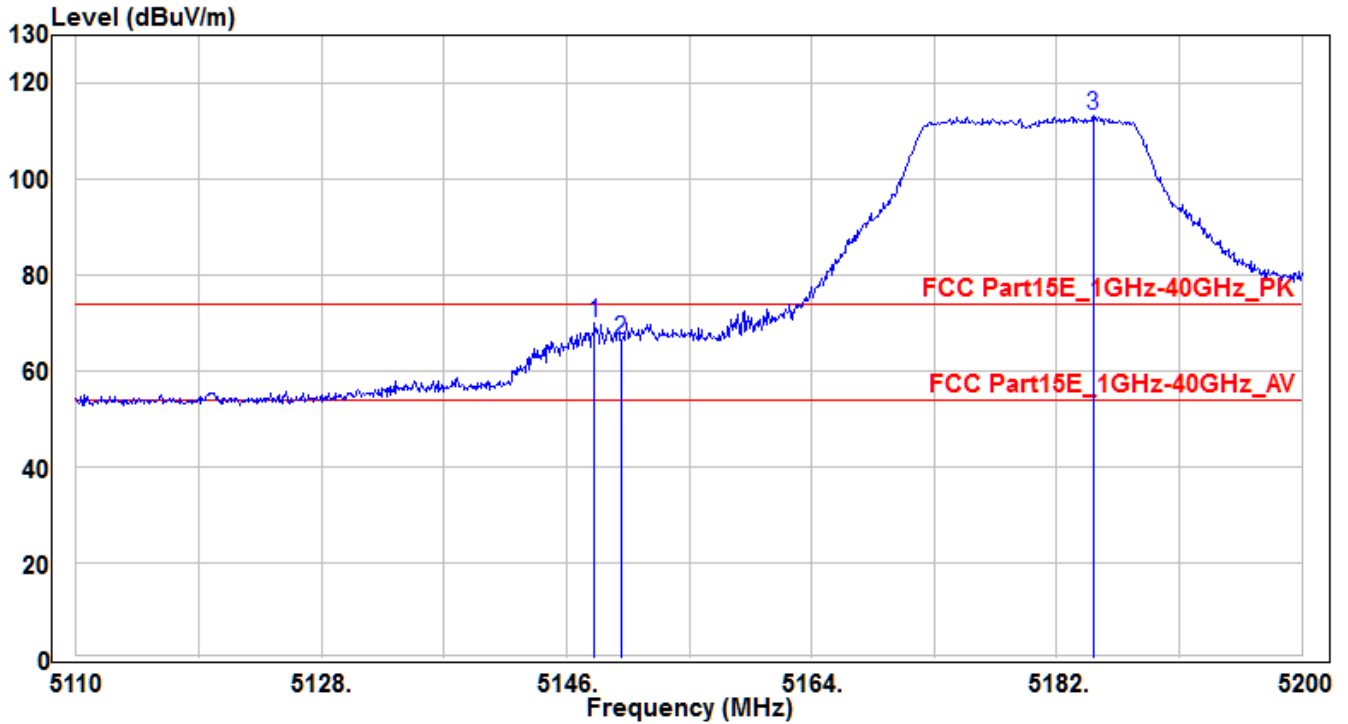


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5148.07	66.31	3.87	70.18	-3.82	74	220	220	Peak
2		5150	62.72	3.88	66.6	-7.4	74	220	220	Peak
3		5184.7	109.47	3.91	113.38	39.38	74	220	220	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB)
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor)



EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE1-CH36_Ant A	Test Voltage	AC 120V/60Hz

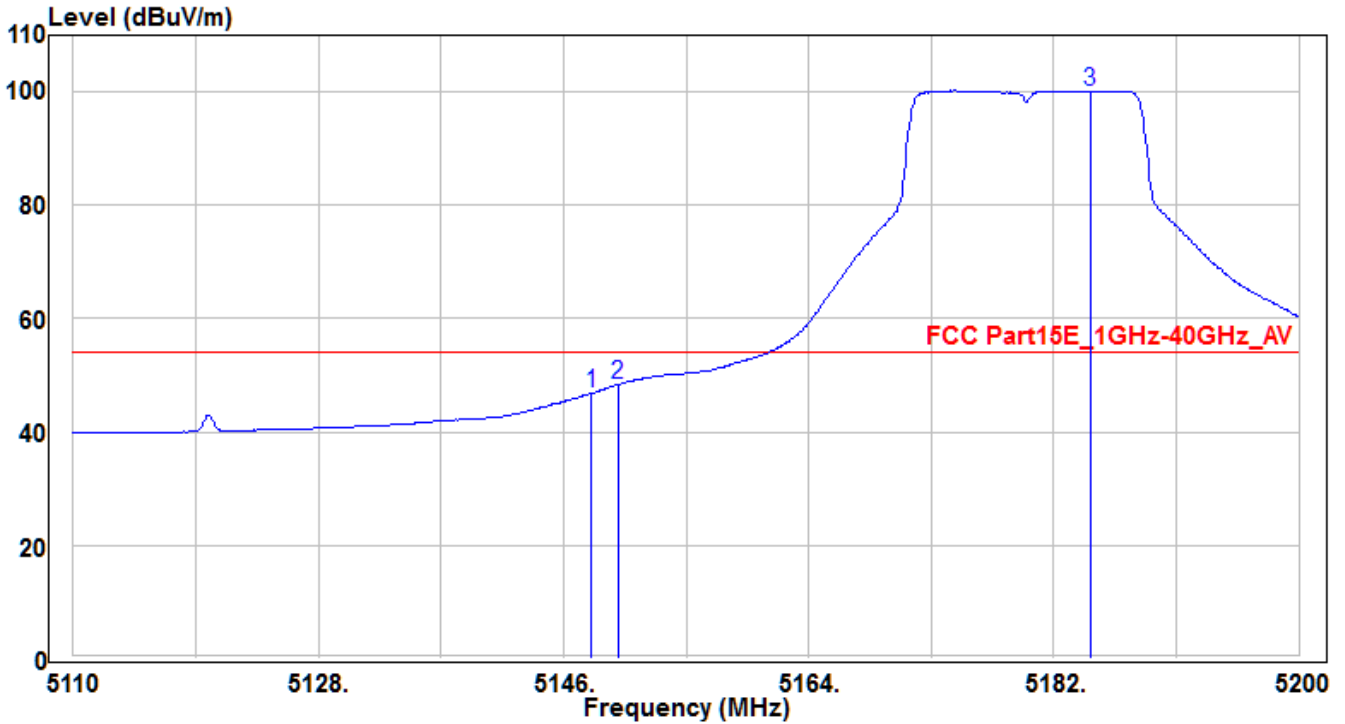


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5148.07	42.98	3.87	46.85	-7.15	54	220	220	Average
2	* 5150	44.45	3.88	48.33	-5.67	54	220	220	Average
3	5184.7	96.1	3.91	100.01	46.01	54	220	220	Average

Note:

1. " \* " means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB)
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor)

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE1-CH36_Ant B	Test Voltage	AC 120V/60Hz

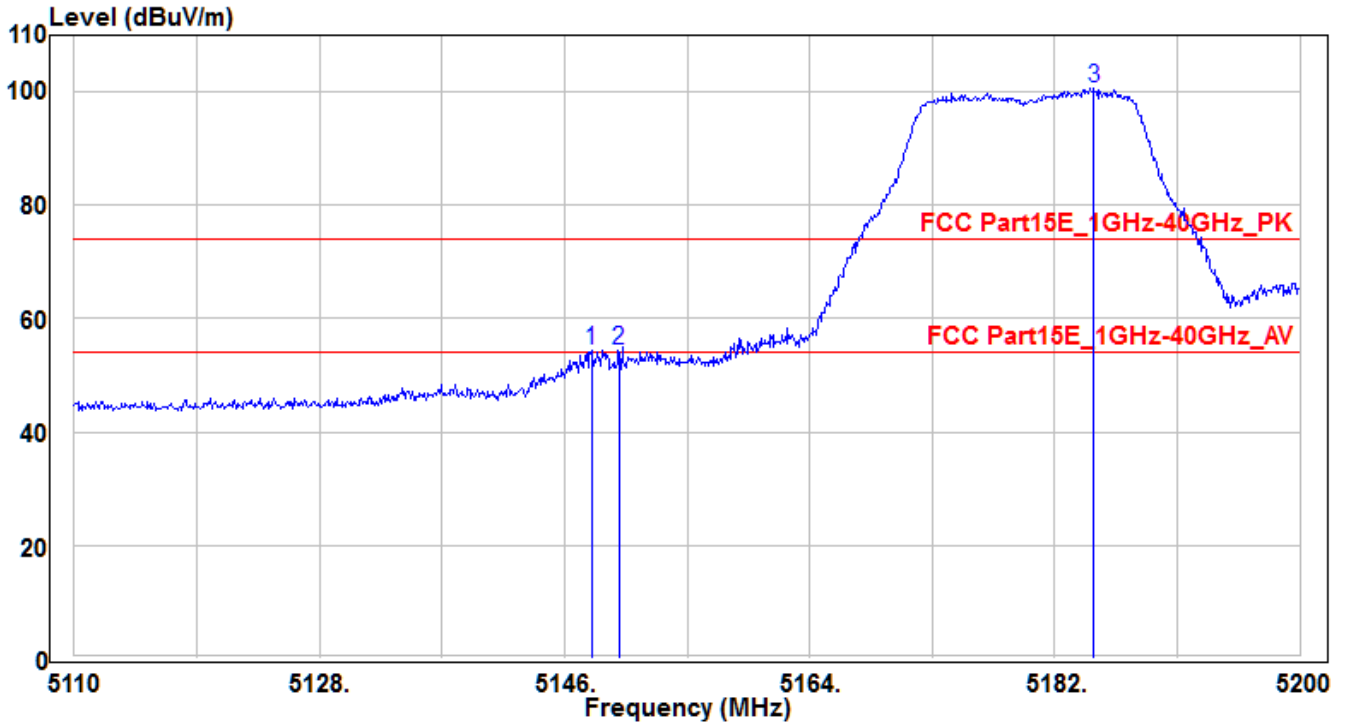


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5147.98	50.56	3.87	54.43	-19.57	74	150	240	Peak
2	* 5150	50.64	3.88	54.52	-19.48	74	150	240	Peak
3	5184.88	96.69	3.91	100.6	26.6	74	150	240	Peak

Note:

1. " \* " means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB)
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor)

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE1-CH36_Ant B	Test Voltage	AC 120V/60Hz

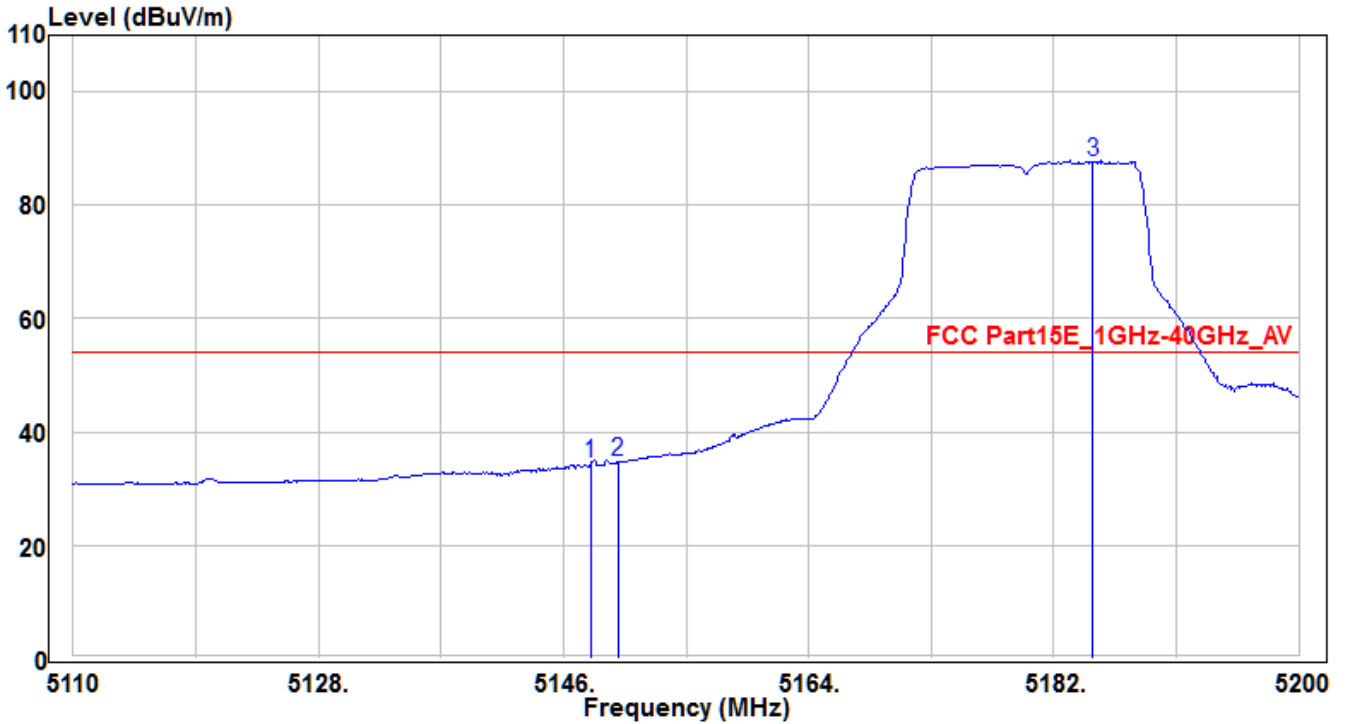


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5147.98	30.54	3.87	34.41	-19.59	54	150	240	Average
2	* 5150	30.75	3.88	34.63	-19.37	54	150	240	Average
3	5184.88	83.79	3.91	87.7	33.7	54	150	240	Average

Note:

1. " \* " means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB)
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor)

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE1-CH36_Ant B	Test Voltage	AC 120V/60Hz

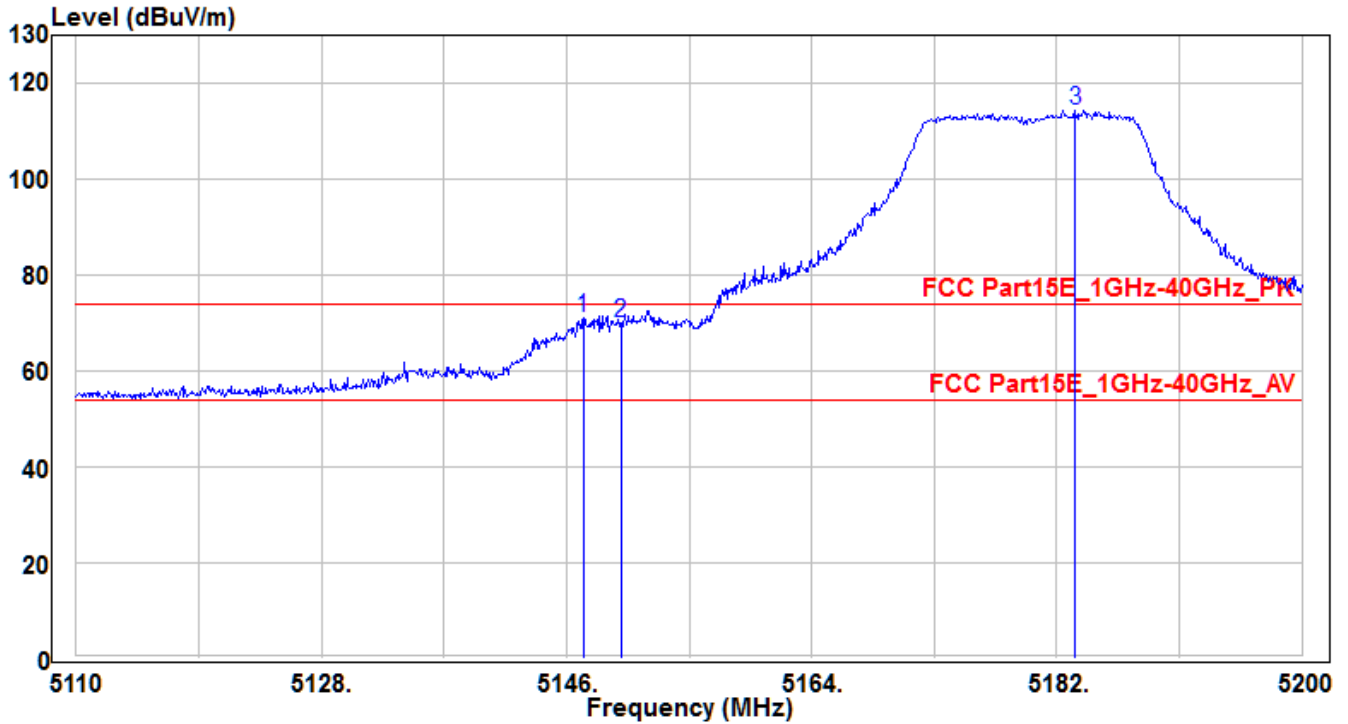


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5147.26	67.35	3.87	71.22	-2.78	74	225	40	Peak
2		5150	66.02	3.88	69.9	-4.1	74	225	40	Peak
3		5183.35	110.34	3.9	114.24	40.24	74	225	40	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB)
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor)

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE1-CH36_Ant B	Test Voltage	AC 120V/60Hz

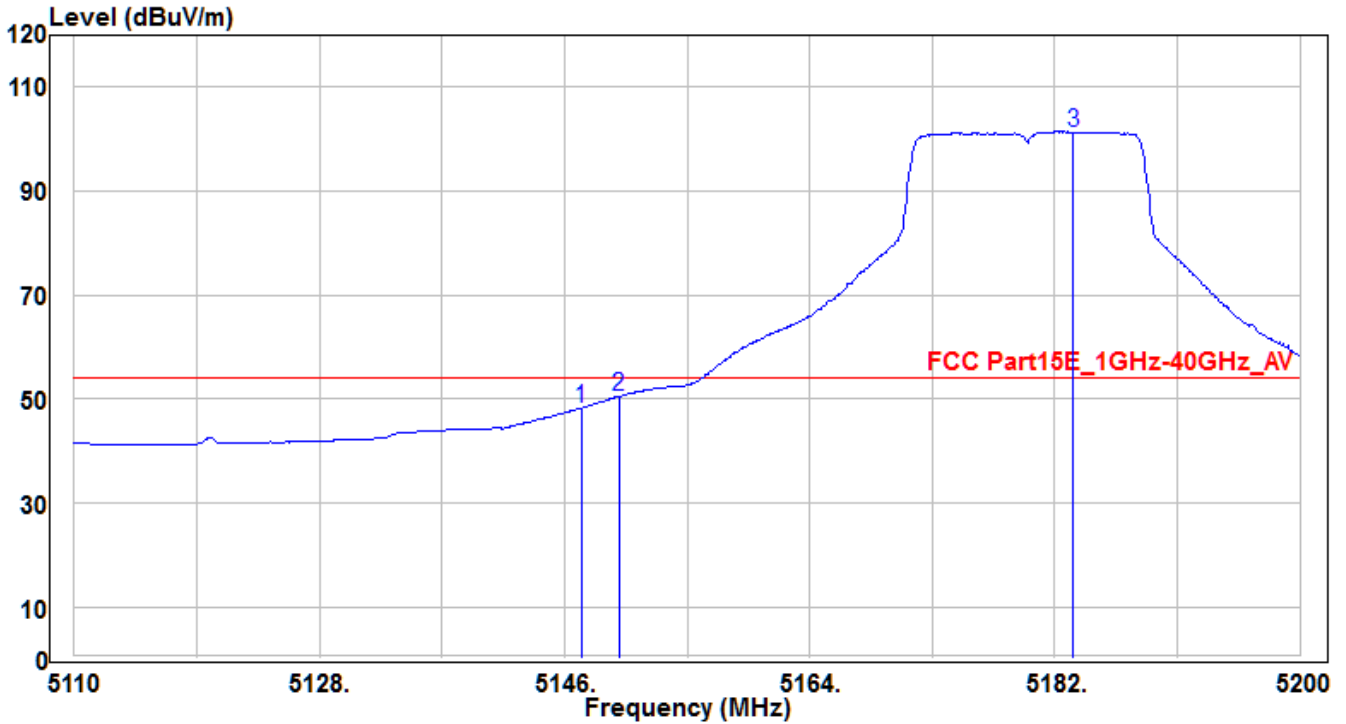


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5147.26	44.41	3.87	48.28	-5.72	54	225	40	Average
2	* 5150	46.59	3.88	50.47	-3.53	54	225	40	Average
3	5183.35	97.47	3.9	101.37	47.37	54	225	40	Average

Note:

1. " \* " means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB)
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor)

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE1-CH64_Ant A	Test Voltage	AC 120V/60Hz

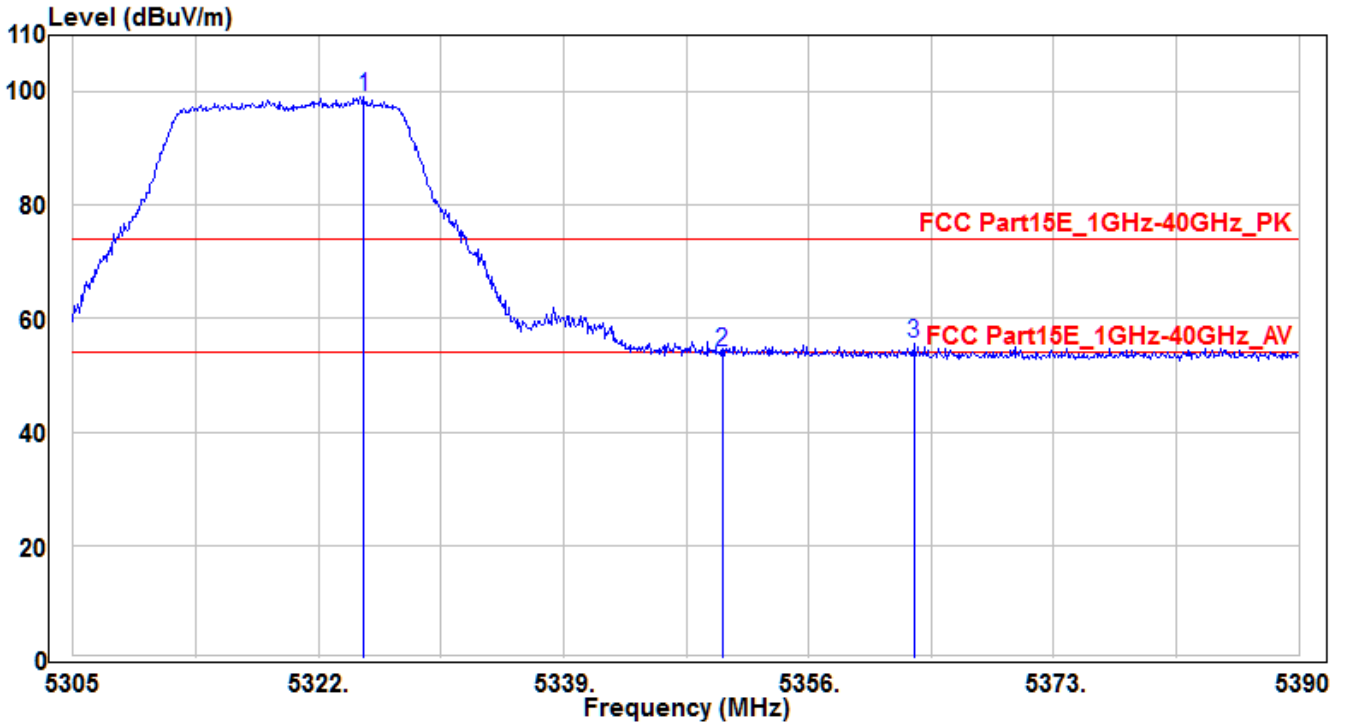


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5325.145	95.18	4.02	99.2	25.2	74	150	-5	Peak
2	5350	50.15	4.04	54.19	-19.81	74	150	-5	Peak
3	* 5363.31	51.5	4.06	55.56	-18.44	74	150	-5	Peak

Note:

1. " \* " means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB)
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor)

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE1-CH64_Ant A	Test Voltage	AC 120V/60Hz

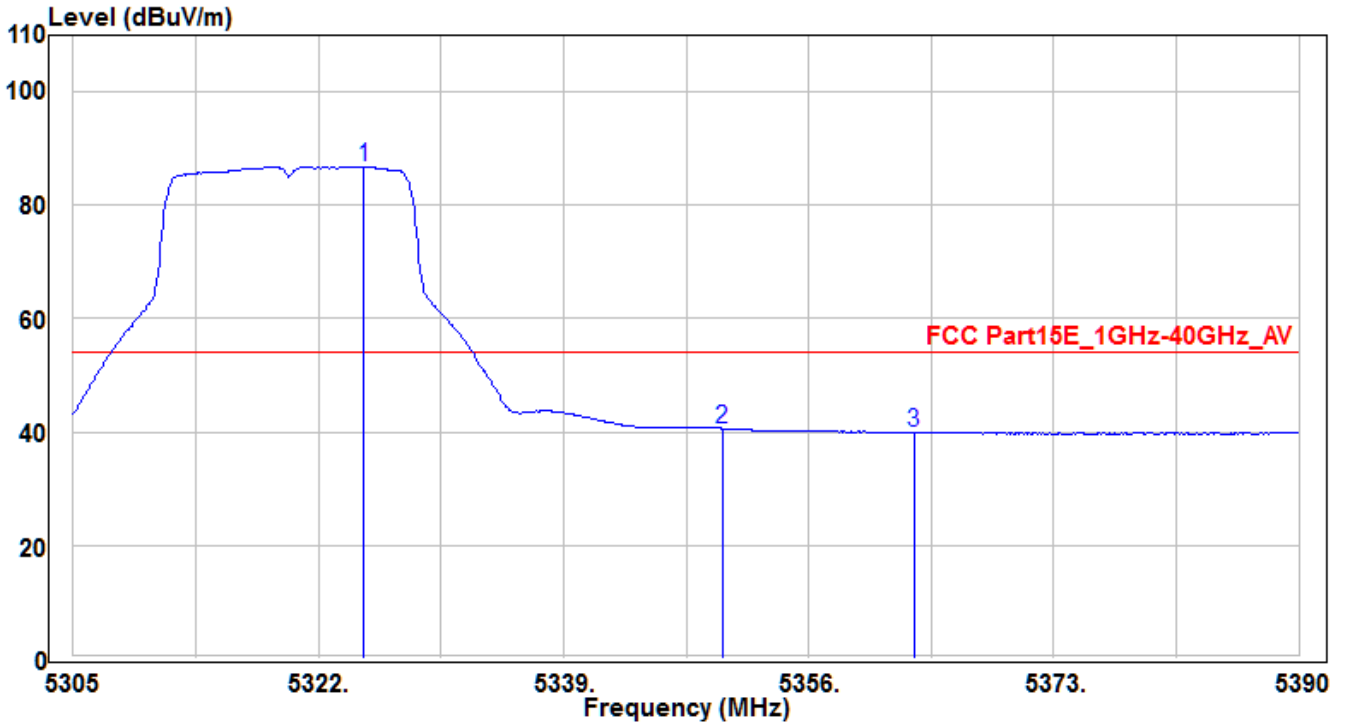


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5325.145	82.64	4.02	86.66	32.66	54	150	-5	Average
2	* 5350	36.59	4.04	40.63	-13.37	54	150	-5	Average
3	5363.31	35.85	4.06	39.91	-14.09	54	150	-5	Average

Note:

1. " \* " means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB)
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor)

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE1-CH64_Ant A	Test Voltage	AC 120V/60Hz

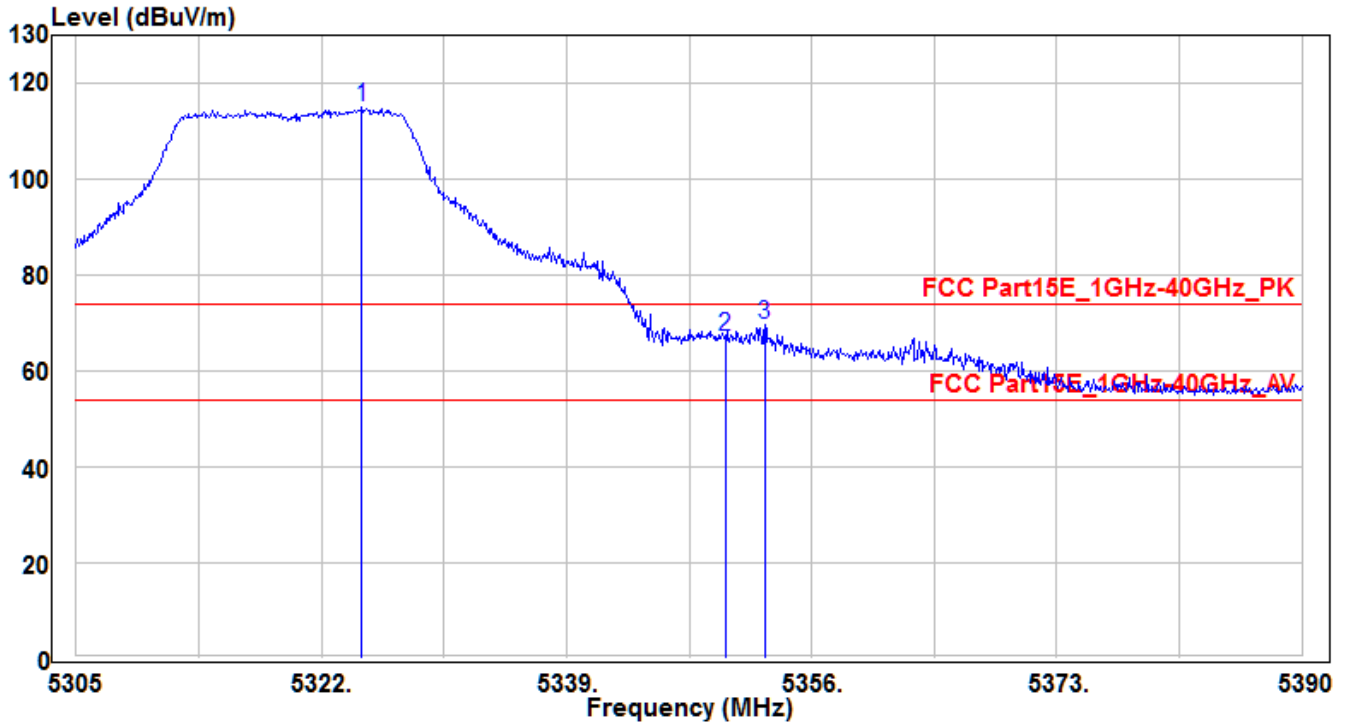


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5324.805	110.89	4.02	114.91	40.91	74	230	220	Peak
2	5350	62.95	4.04	66.99	-7.01	74	230	220	Peak
3	* 5352.77	65.47	4.05	69.52	-4.48	74	230	220	Peak

Note:

1. " \* " means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB)
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor)



EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE1-CH64_Ant A	Test Voltage	AC 120V/60Hz

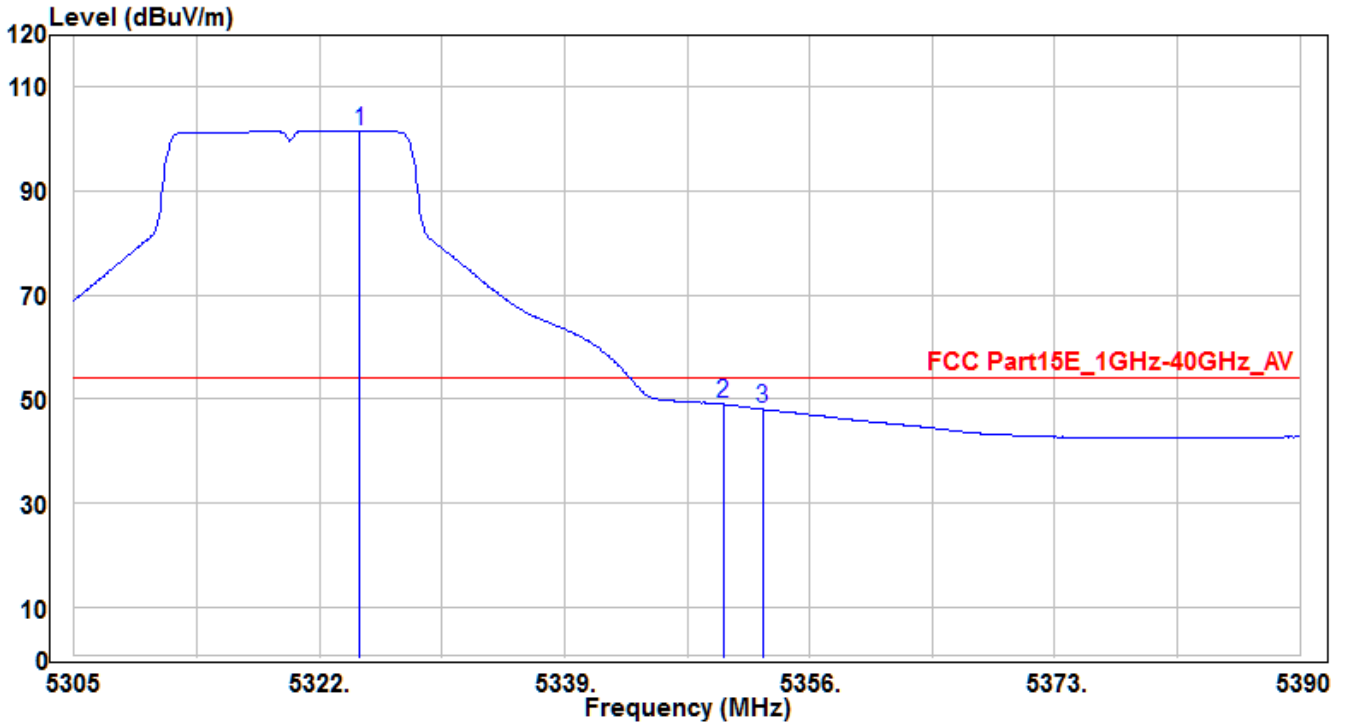


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5324.805	97.66	4.02	101.68	47.68	54	230	220	Average
2	* 5350	45.03	4.04	49.07	-4.93	54	230	220	Average
3	5352.77	43.99	4.05	48.04	-5.96	54	230	220	Average

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB)
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor)

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE1-CH64_Ant B	Test Voltage	AC 120V/60Hz

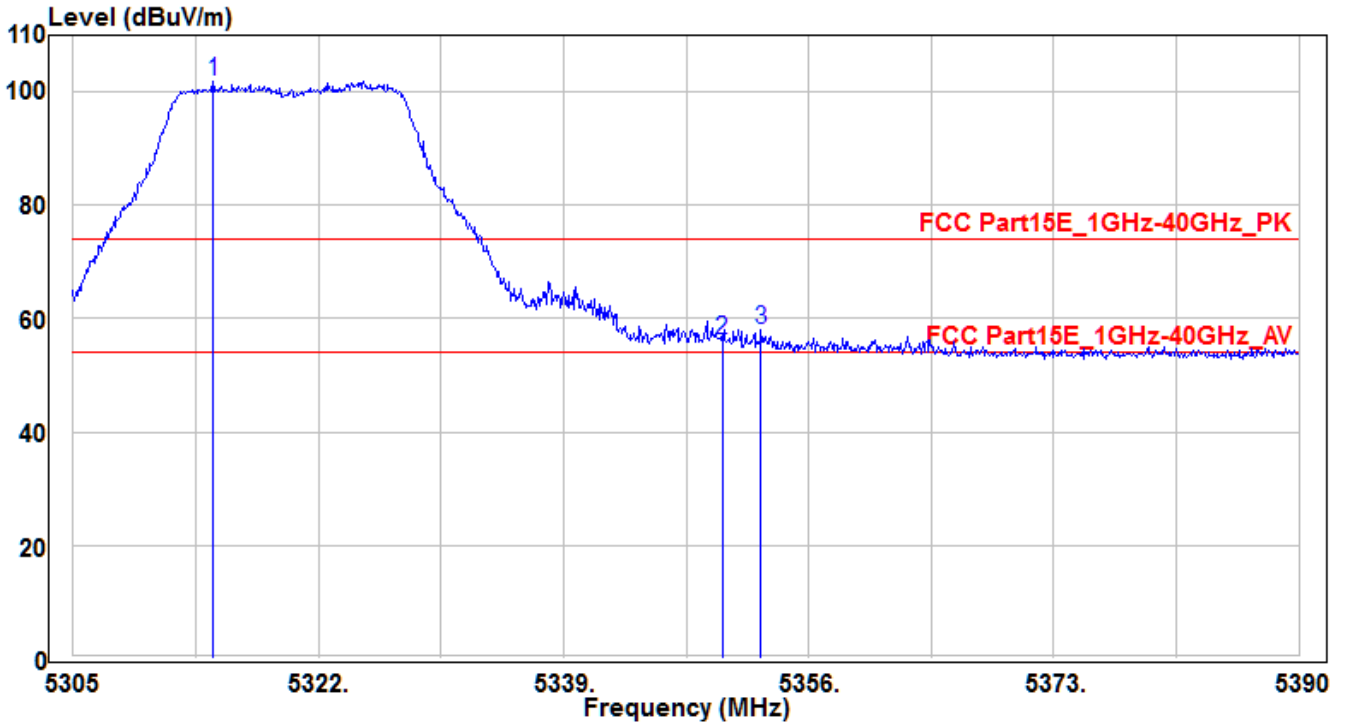


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5314.69	97.86	4.01	101.87	27.87	74	250	20	Peak
2	5350	52.33	4.04	56.37	-17.63	74	250	20	Peak
3	* 5352.685	53.84	4.05	57.89	-16.11	74	250	20	Peak

Note:

1. " \* " means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB)
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor)

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE1-CH64_Ant B	Test Voltage	AC 120V/60Hz

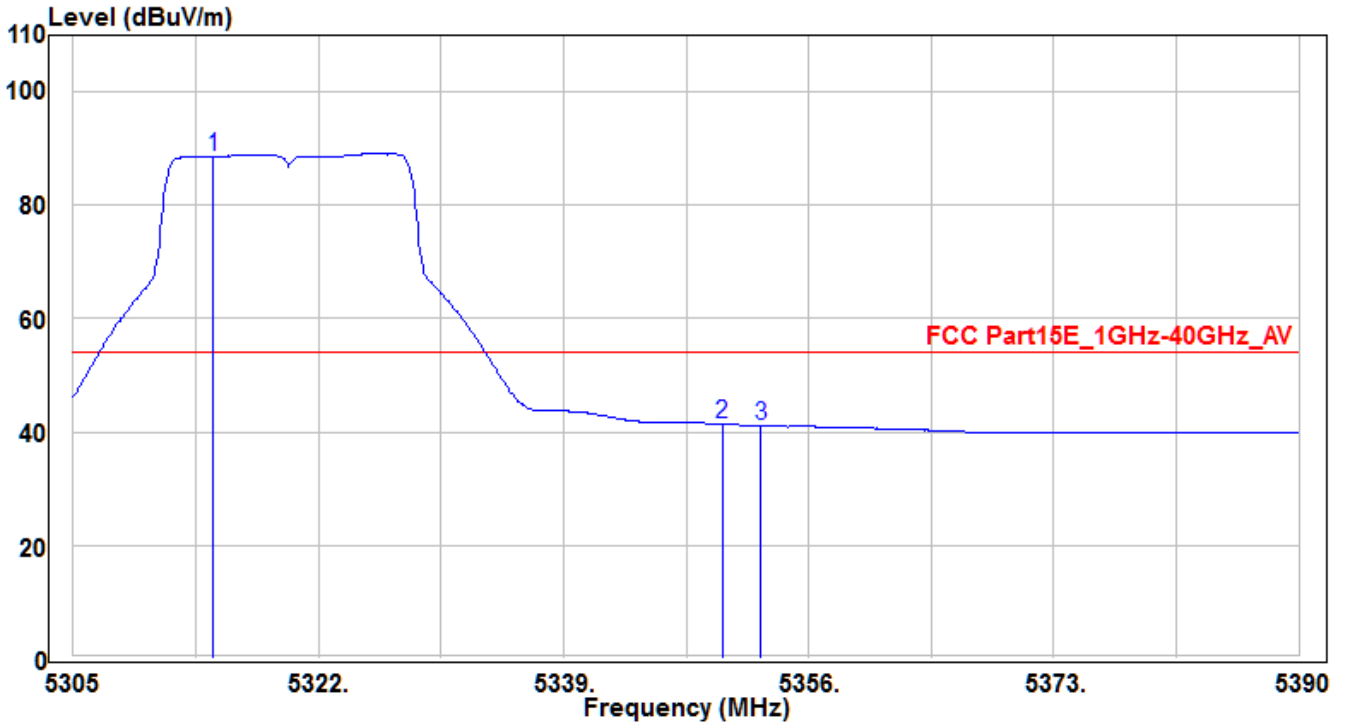


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5314.69	84.62	4.01	88.63	34.63	54	250	20	Average
2	* 5350	37.41	4.04	41.45	-12.55	54	250	20	Average
3	5352.685	37.04	4.05	41.09	-12.91	54	250	20	Average

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB)
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor)

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE1-CH64_Ant B	Test Voltage	AC 120V/60Hz

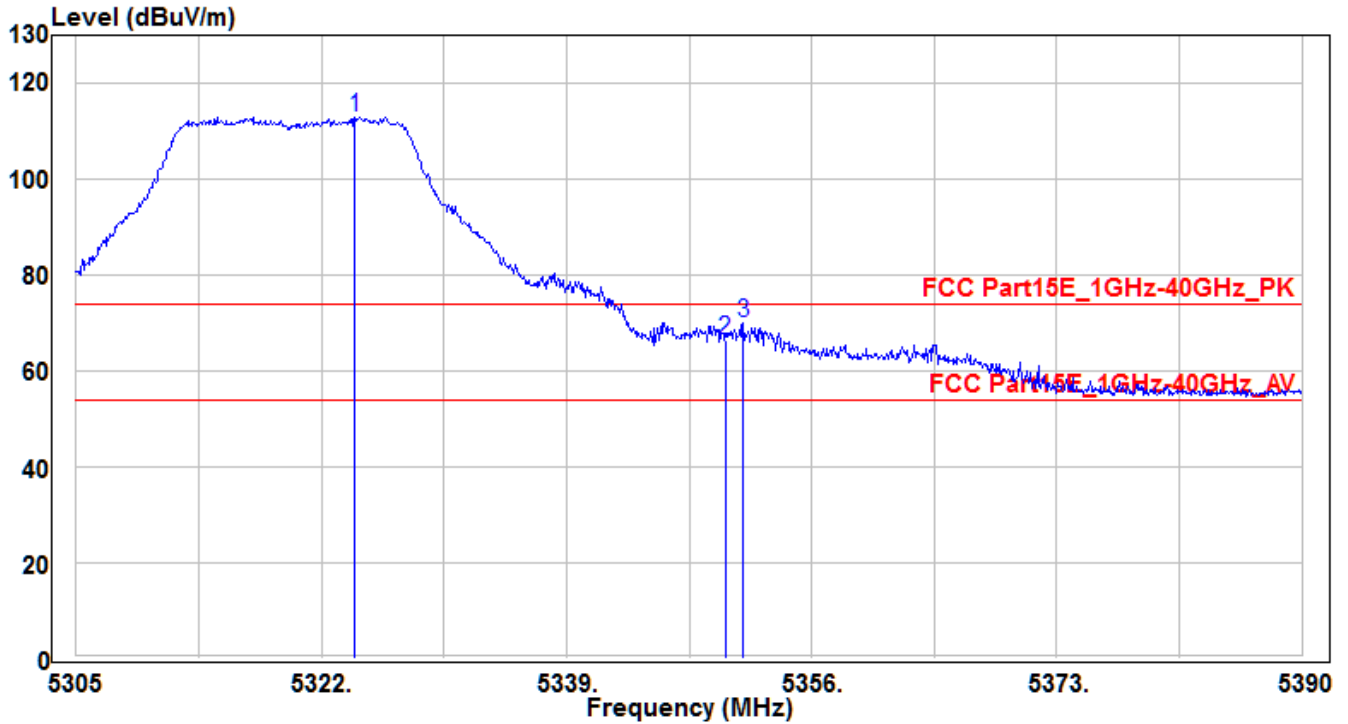


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5324.295	108.88	4.02	112.9	38.9	74	235	160	Peak
2	5350	62.39	4.04	66.43	-7.57	74	235	160	Peak
3	* 5351.24	65.96	4.05	70.01	-3.99	74	235	160	Peak

Note:

1. " \* " means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB)
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor)

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE1-CH64_Ant B	Test Voltage	AC 120V/60Hz

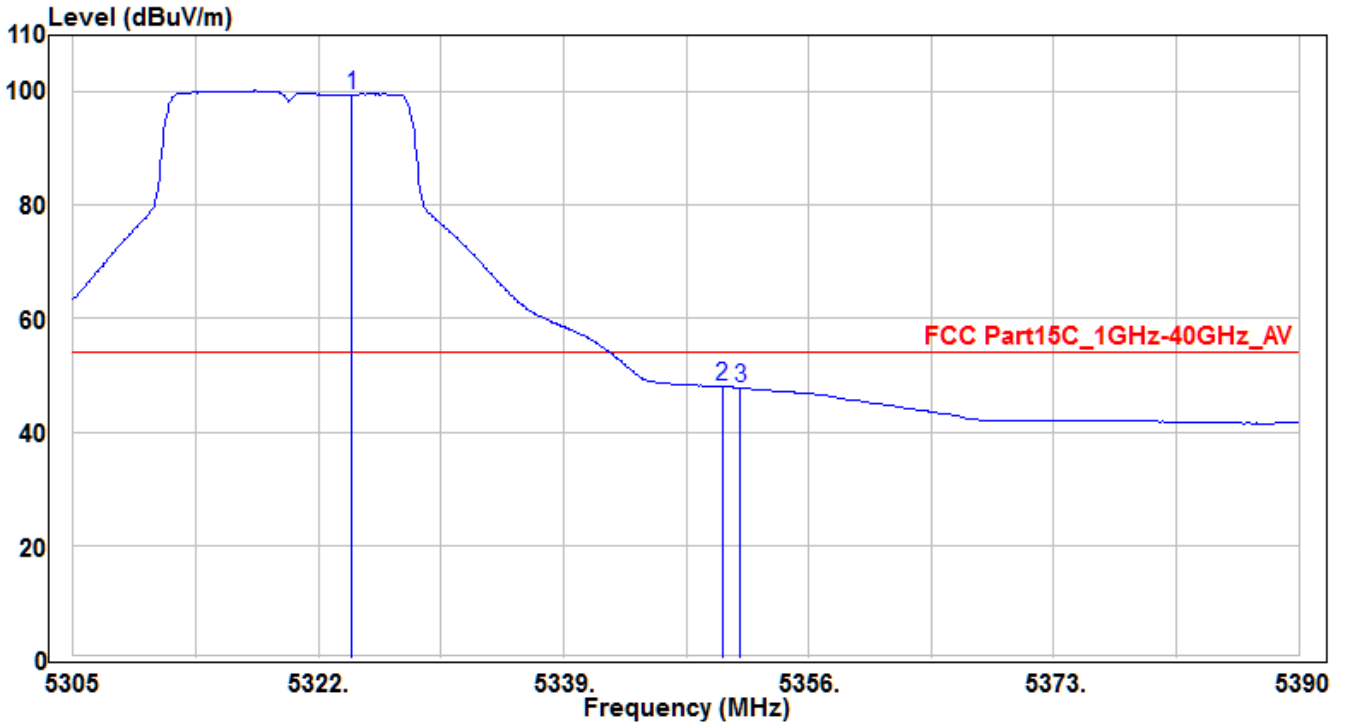


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5324.295	95.48	4.02	99.5	45.5	54	235	160	Average
2	* 5350	43.9	4.04	47.94	-6.06	54	235	160	Average
3	5351.24	43.77	4.05	47.82	-6.18	54	235	160	Average

Note:

1. " \* " means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB)
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor)

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE1-CH100_Ant A	Test Voltage	AC 120V/60Hz

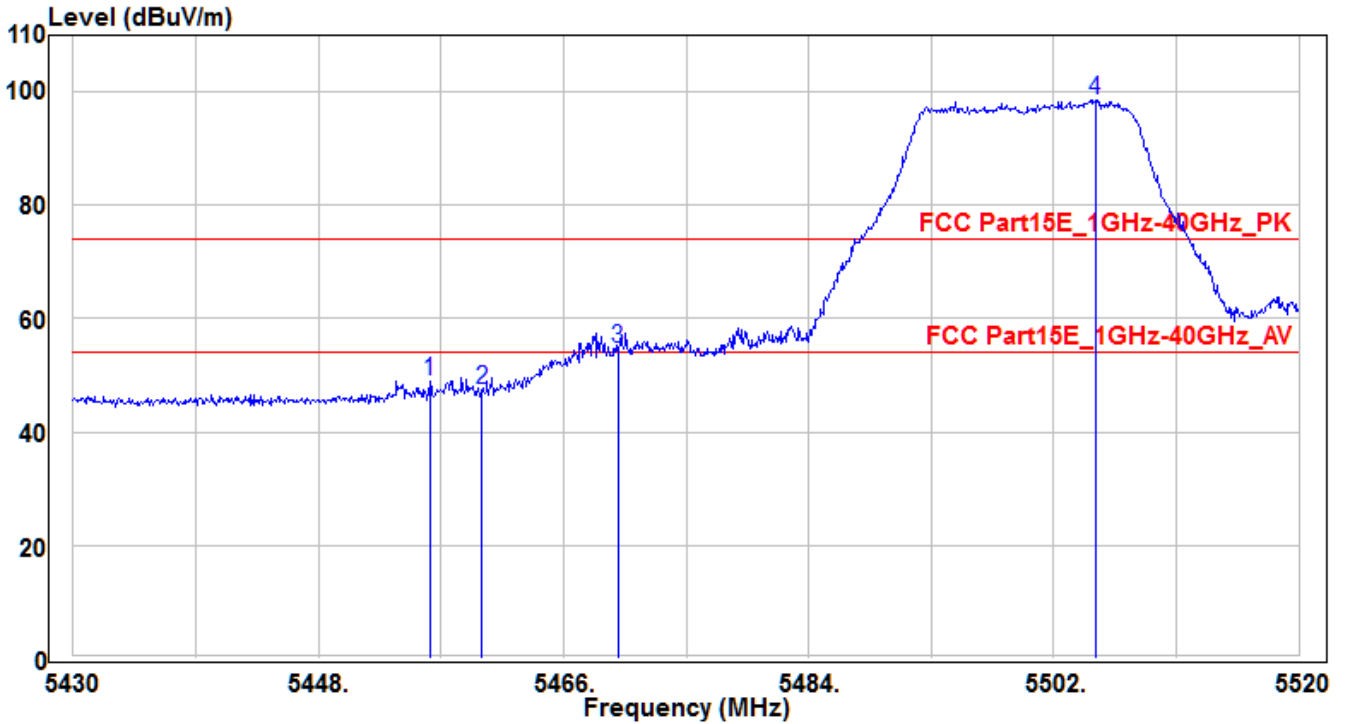


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.19	44.91	4.13	49.04	-24.96	74	150	95	Peak
2	5460	43.33	4.14	47.47	-26.53	74	150	95	Peak
3	* 5470	50.62	4.14	54.76	-19.24	74	150	95	Peak
4	5505.06	94.38	4.19	98.57	24.57	74	150	95	Peak

Note:

1. " \* " means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB)
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor)

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE1-CH100_Ant A	Test Voltage	AC 120V/60Hz

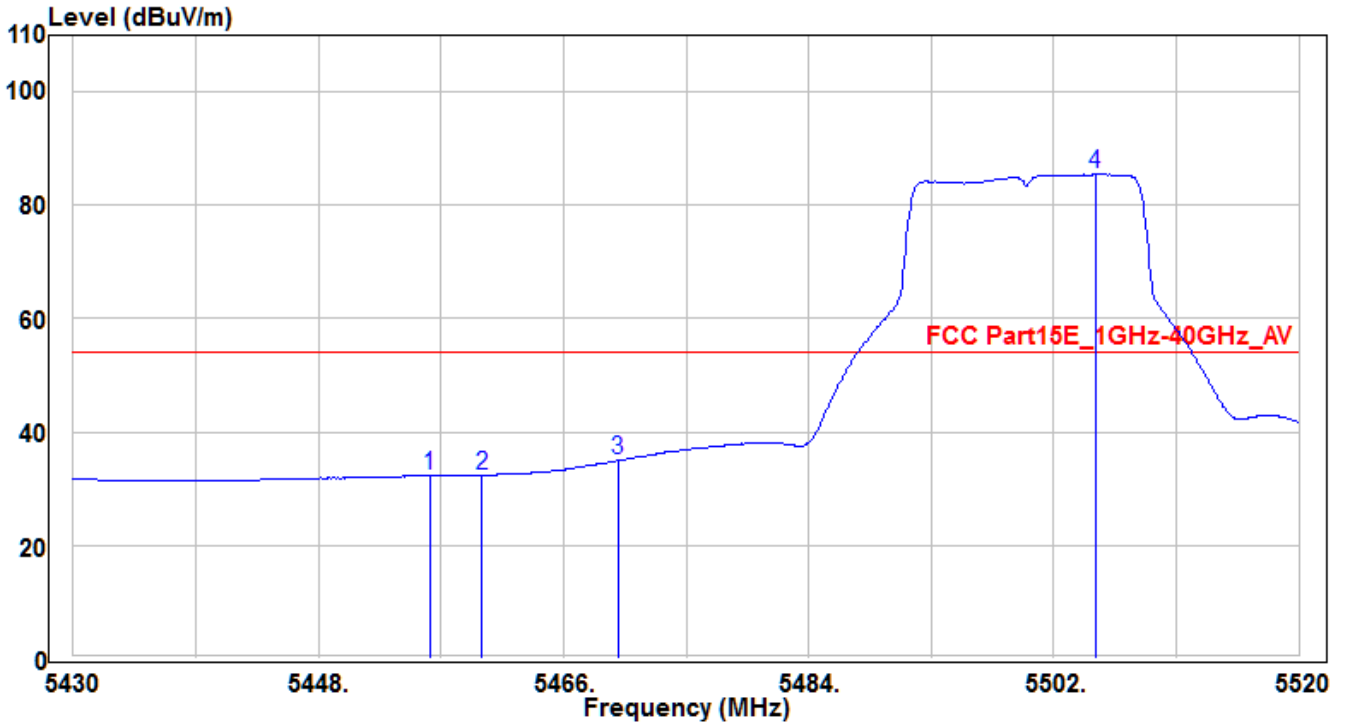


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.19	28.09	4.13	32.22	-21.78	54	150	95	Average
2	5460	28.26	4.14	32.4	-21.6	54	150	95	Average
3	* 5470	30.85	4.14	34.99	-19.01	54	150	95	Average
4	5505.06	81.28	4.19	85.47	31.47	54	150	95	Average

Note:

1. " \* " means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB)
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor)

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE1-CH100_Ant A	Test Voltage	AC 120V/60Hz

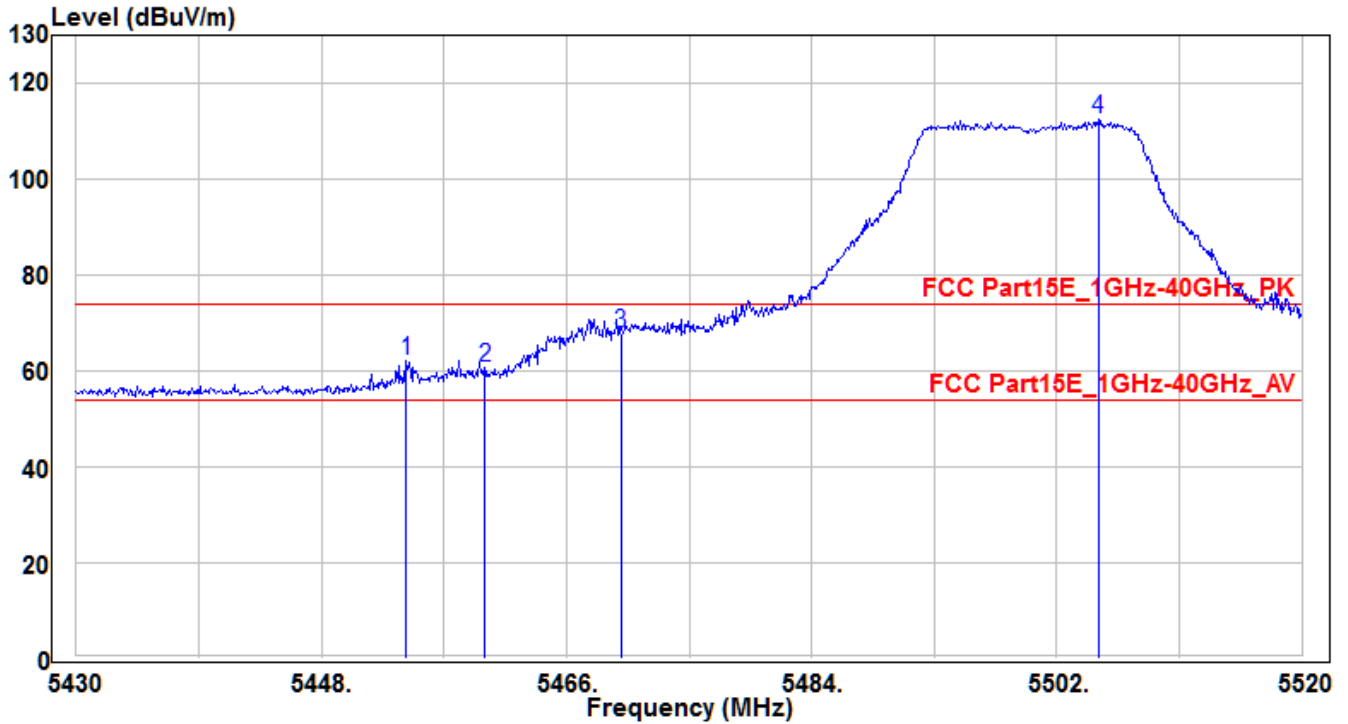


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5454.21	57.9	4.13	62.03	-11.97	74	300	215	Peak
2	5460	56.47	4.14	60.61	-13.39	74	300	215	Peak
3	* 5470	63.76	4.14	67.9	-6.1	74	300	215	Peak
4	5505.06	108.16	4.19	112.35	38.35	74	300	215	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB)
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor)



EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE1-CH100_Ant A	Test Voltage	AC 120V/60Hz

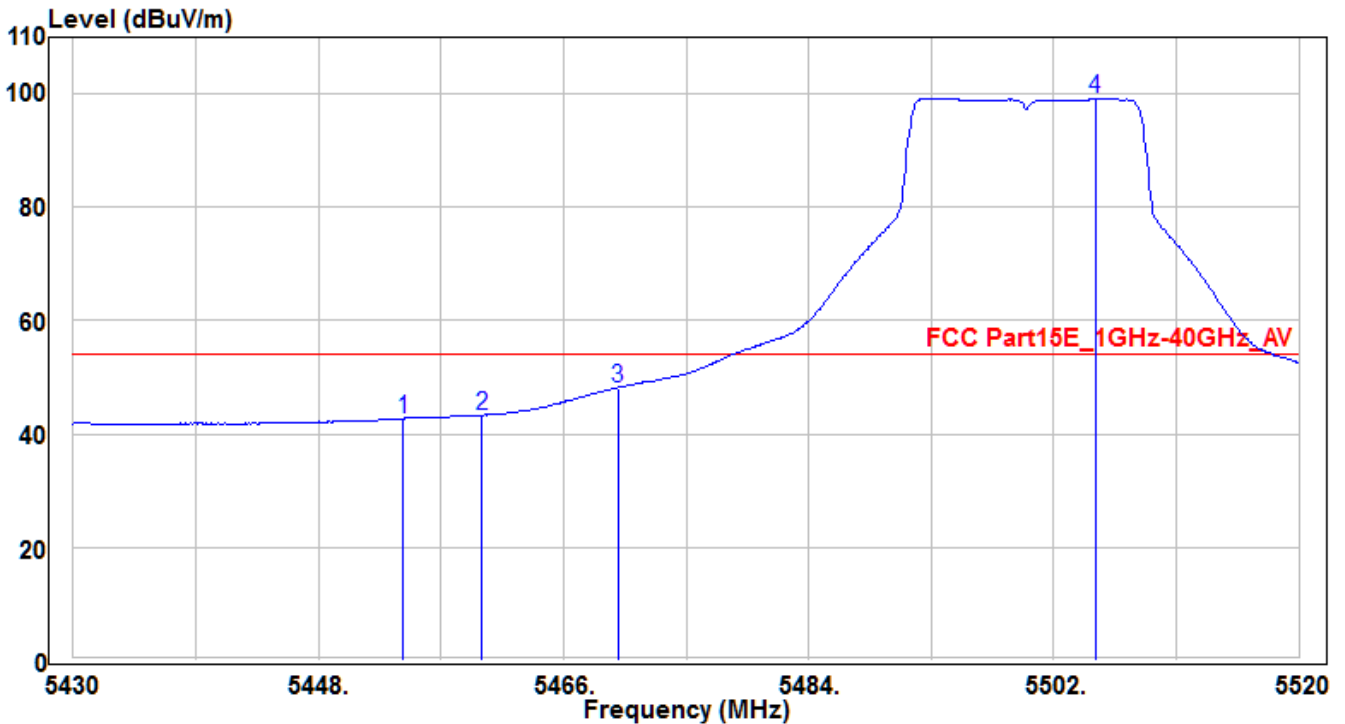


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5454.21	38.61	4.13	42.74	-11.26	54	300	215	Average
2	5460	39.23	4.14	43.37	-10.63	54	300	215	Average
3	* 5470	44.02	4.14	48.16	-5.84	54	300	215	Average
4	5505.06	94.86	4.19	99.05	45.05	54	300	215	Average

Note:

1. " \* " means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB)
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor)

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE1-CH100_Ant B	Test Voltage	AC 120V/60Hz

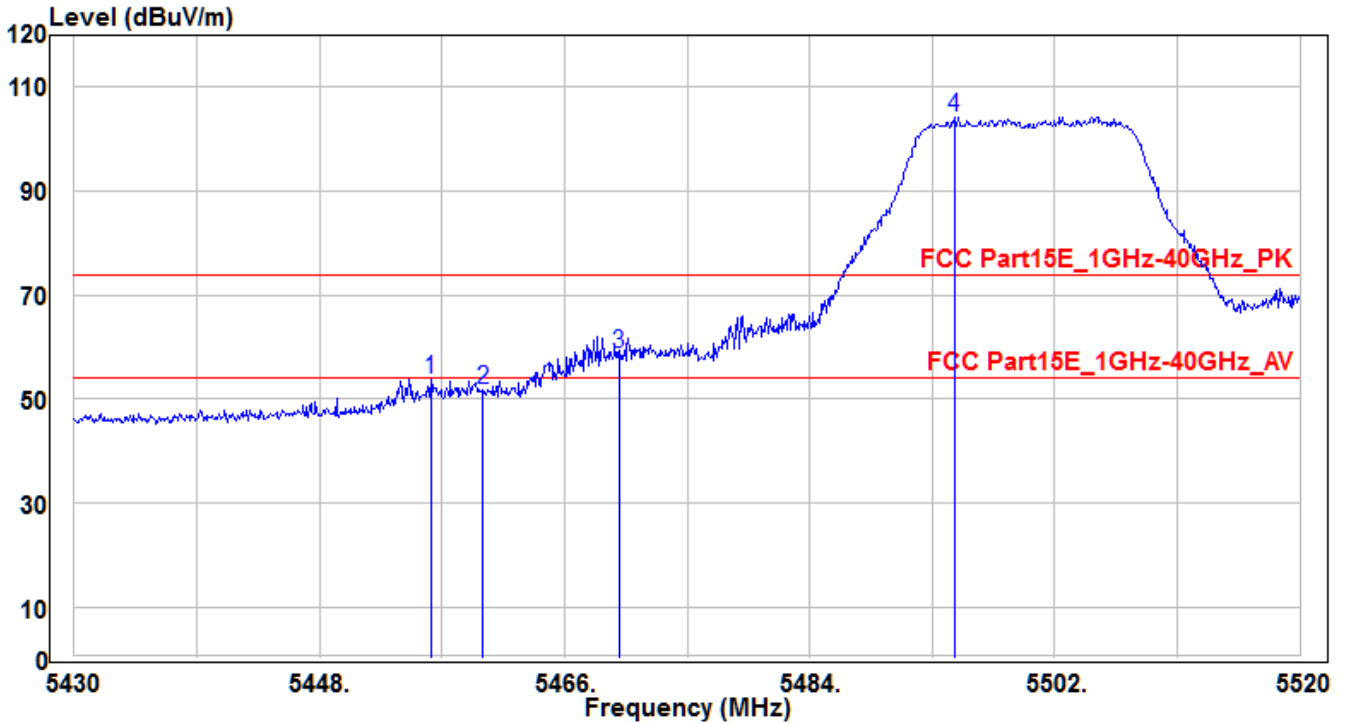


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.19	49.63	4.13	53.76	-20.24	74	150	140	Peak
2	5460	47.5	4.14	51.64	-22.36	74	150	140	Peak
3	* 5470	54.53	4.14	58.67	-15.33	74	150	140	Peak
4	5494.62	99.99	4.17	104.16	30.16	74	150	140	Peak

Note:

1. " \* " means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB)
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor)

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE1-CH100_Ant B	Test Voltage	AC 120V/60Hz

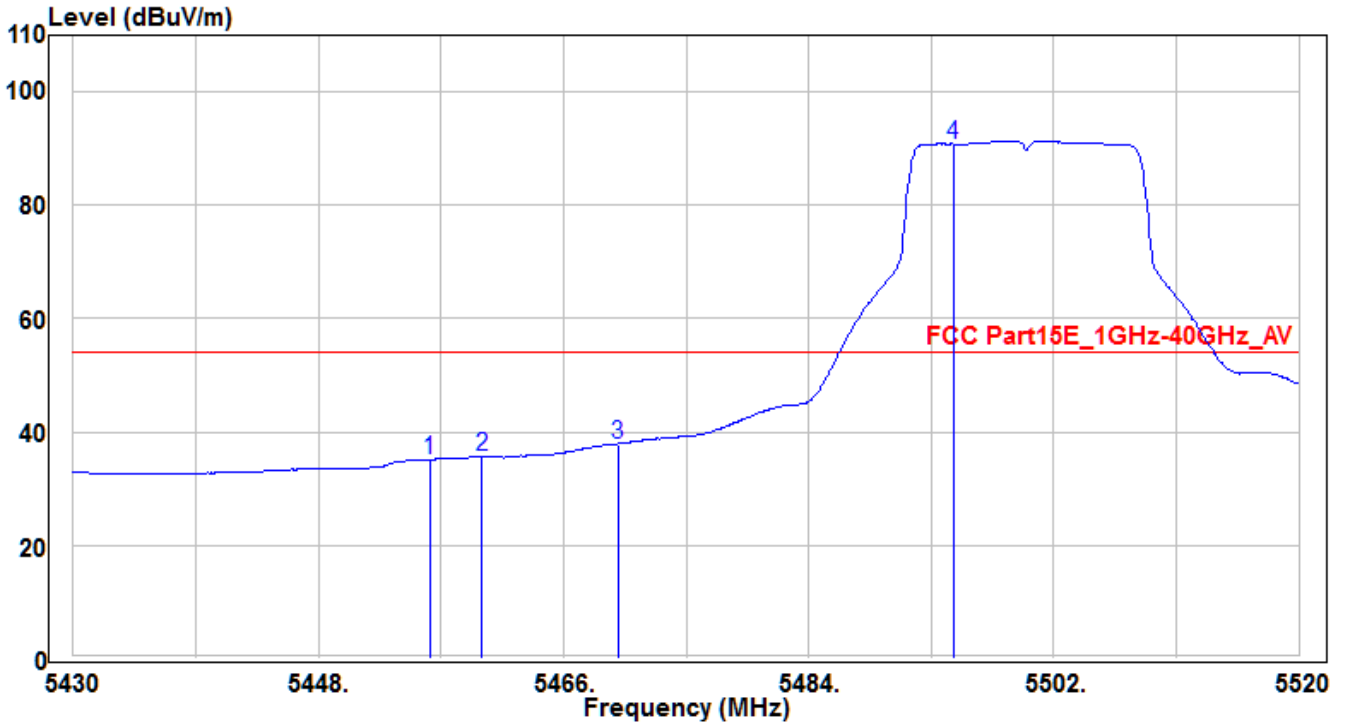


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.19	31.02	4.13	35.15	-18.85	54	150	140	Average
2	5460	31.52	4.14	35.66	-18.34	54	150	140	Average
3	* 5470	33.79	4.14	37.93	-16.07	54	150	140	Average
4	5494.62	86.6	4.17	90.77	36.77	54	150	140	Average

Note:

1. " \* " means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB)
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor)

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE1-CH100_Ant B	Test Voltage	AC 120V/60Hz

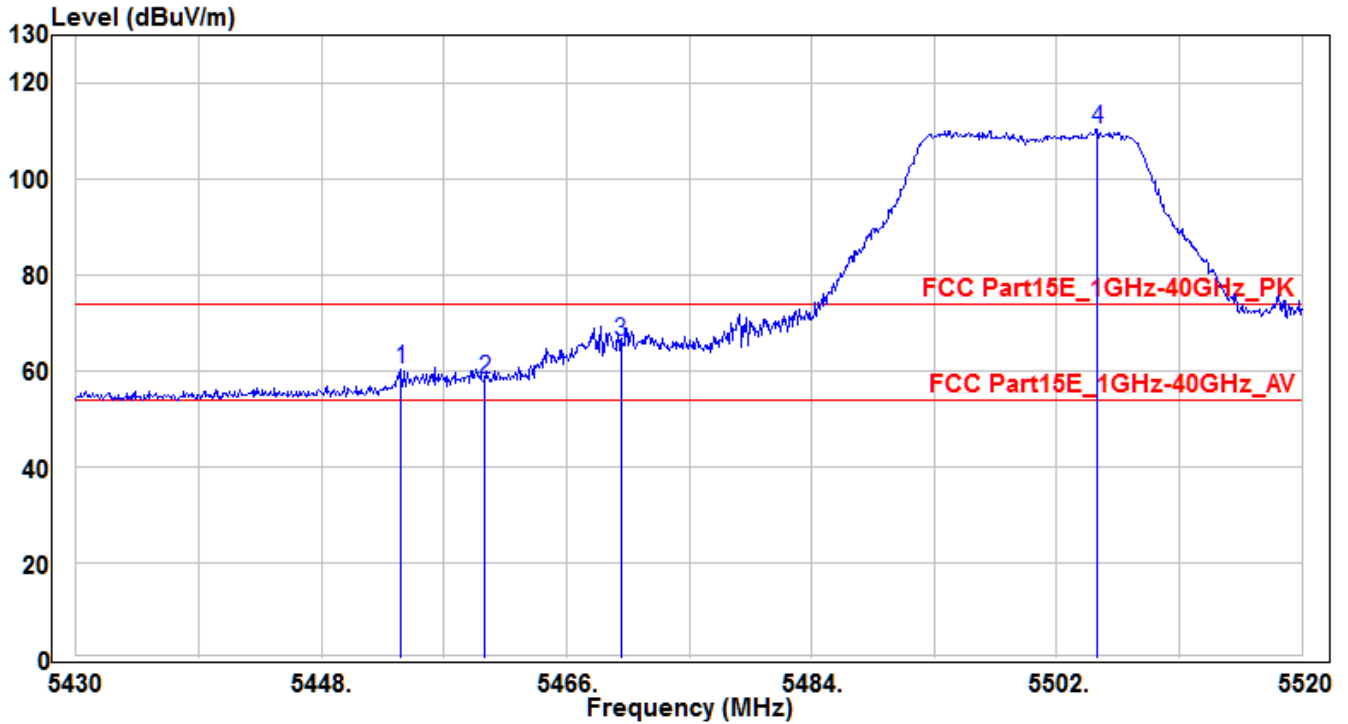


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5453.85	56.33	4.13	60.46	-13.54	74	310	175	Peak
2	5460	53.97	4.14	58.11	-15.89	74	310	175	Peak
3	* 5470	62.08	4.14	66.22	-7.78	74	310	175	Peak
4	5504.97	106.13	4.19	110.32	36.32	74	310	175	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB)
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor)

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE1-CH100_Ant B	Test Voltage	AC 120V/60Hz

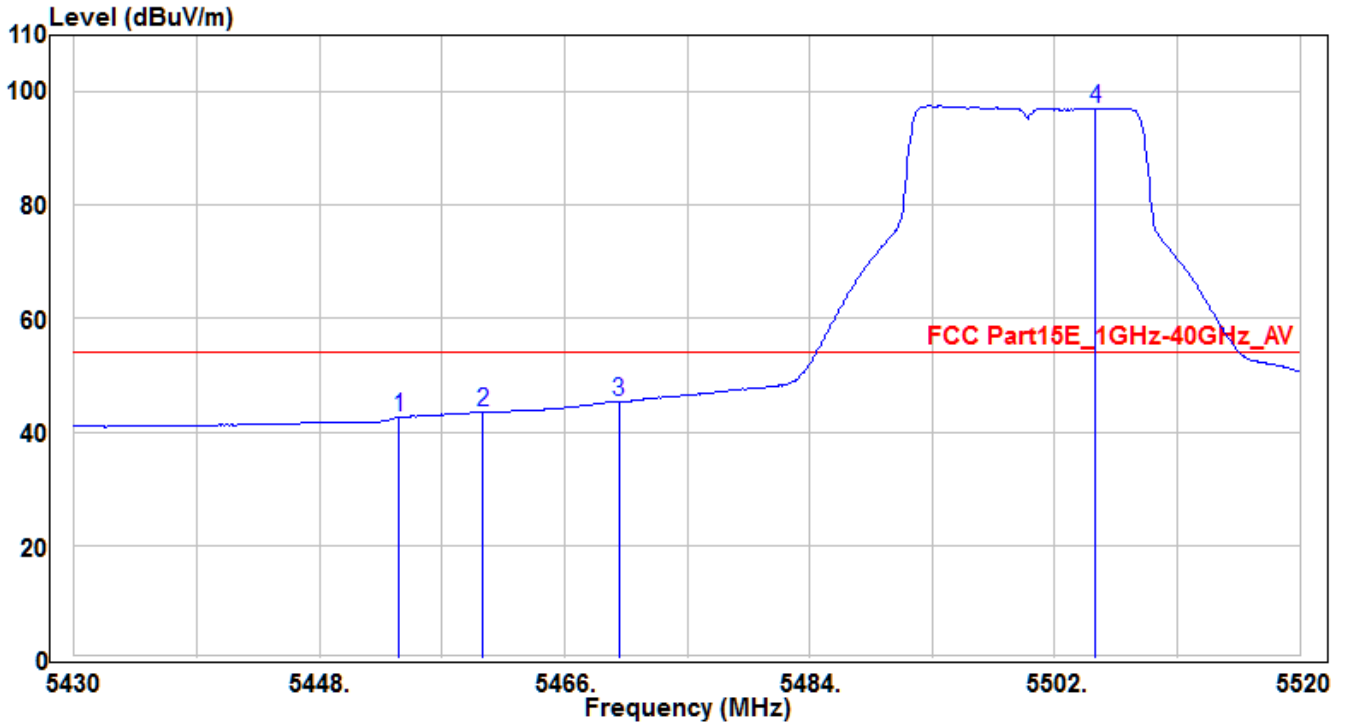


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5453.85	38.46	4.13	42.59	-11.41	54	310	175	Average
2	5460	39.37	4.14	43.51	-10.49	54	310	175	Average
3	* 5470	41.23	4.14	45.37	-8.63	54	310	175	Average
4	5504.97	92.82	4.19	97.01	43.01	54	310	175	Average

Note:

1. " \* " means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB)
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor)

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE1-CH140_Ant A	Test Voltage	AC 120V/60Hz

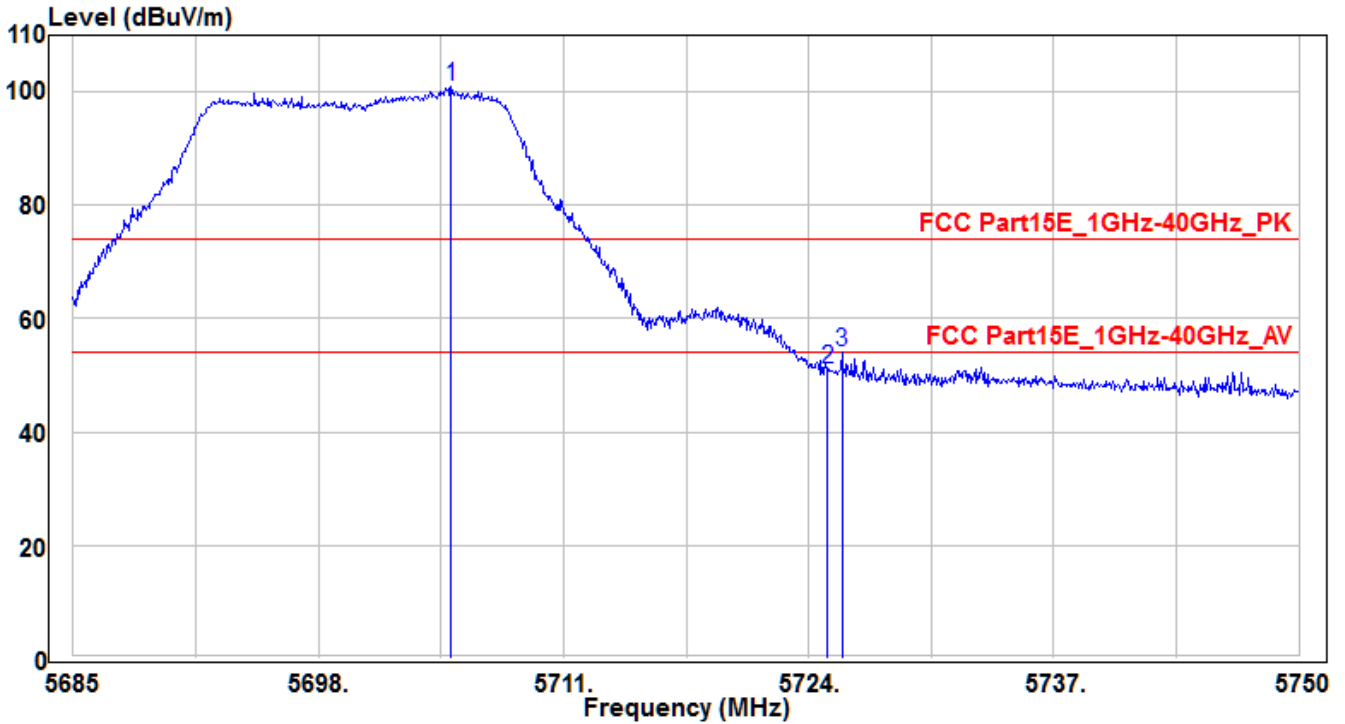


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5705.02	95.87	4.96	100.83	26.83	74	150	345	Peak
2	5725	46.1	5.03	51.13	-22.87	74	150	345	Peak
3	* 5725.755	49.01	5.04	54.05	-19.95	74	150	345	Peak

Note :

1. " \* " means the worst value in this measurement data °
2. C.F ( Correction Factor ) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
3. Measurement (dBuV/m) = Reading(dBuV) + C.F ( Correction Factor ) °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE1-CH140_Ant A	Test Voltage	AC 120V/60Hz

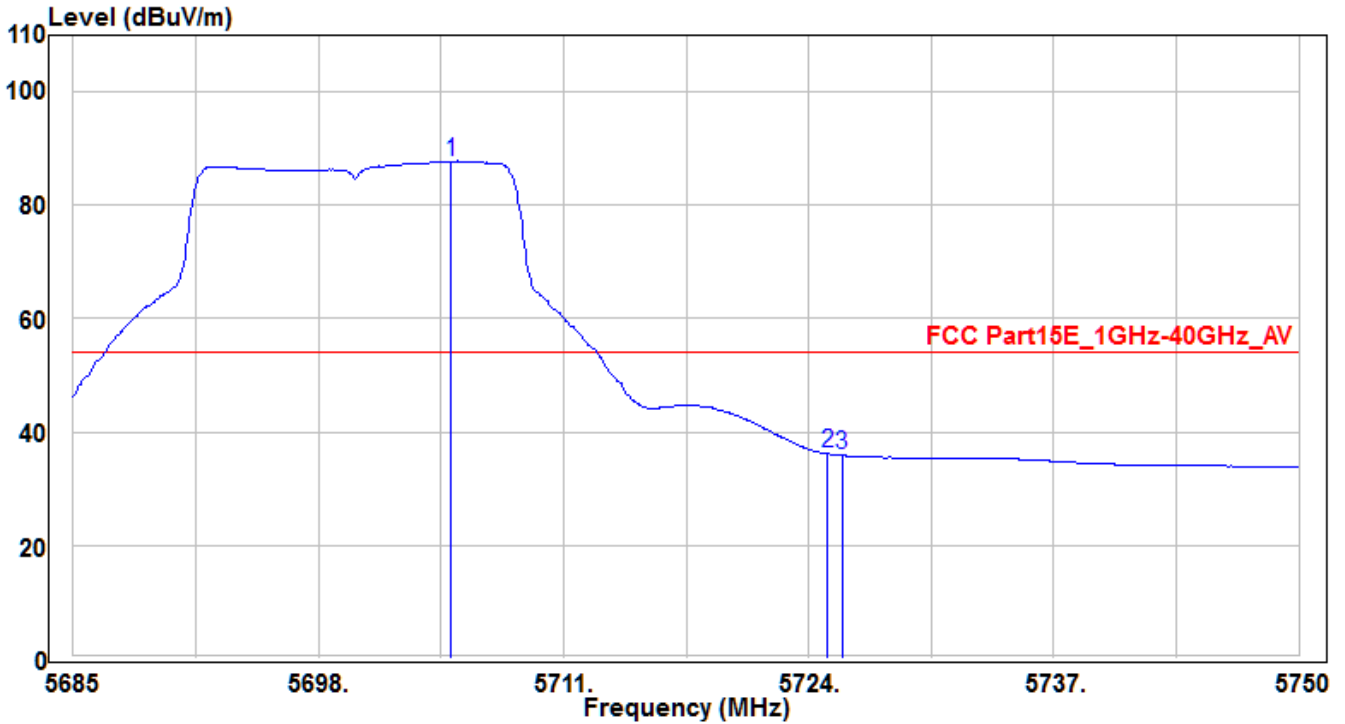


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5705.02	82.81	4.96	87.77	33.77	54	150	345	Average
2	* 5725	31.16	5.03	36.19	-17.81	54	150	345	Average
3	5725.755	30.86	5.04	35.9	-18.1	54	150	345	Average

Note :

1. " \* " means the worst value in this measurement data ◦
2. C.F ( Correction Factor ) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) ◦
3. Measurement (dBuV/m) = Reading(dBuV) + C.F ( Correction Factor ) ◦

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE1-CH140_Ant A	Test Voltage	AC 120V/60Hz

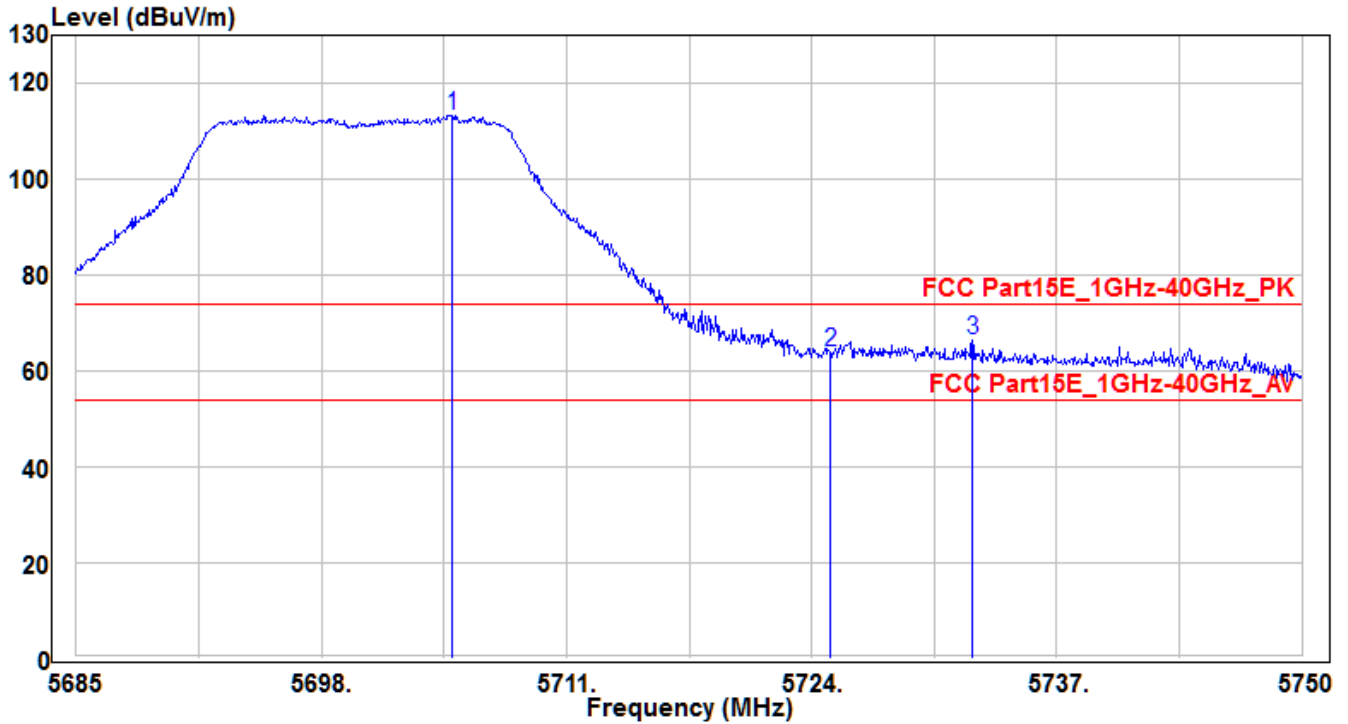


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5704.955	108.42	4.96	113.38	39.38	74	150	220	Peak
2	5725	58.99	5.03	64.02	-9.98	74	150	220	Peak
3	* 5732.515	61.25	5.07	66.32	-7.68	74	150	220	Peak

Note :

1. " \* " means the worst value in this measurement data °
2. C.F ( Correction Factor ) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
3. Measurement (dBuV/m) = Reading(dBuV) + C.F ( Correction Factor ) °



EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE1-CH140_Ant A	Test Voltage	AC 120V/60Hz

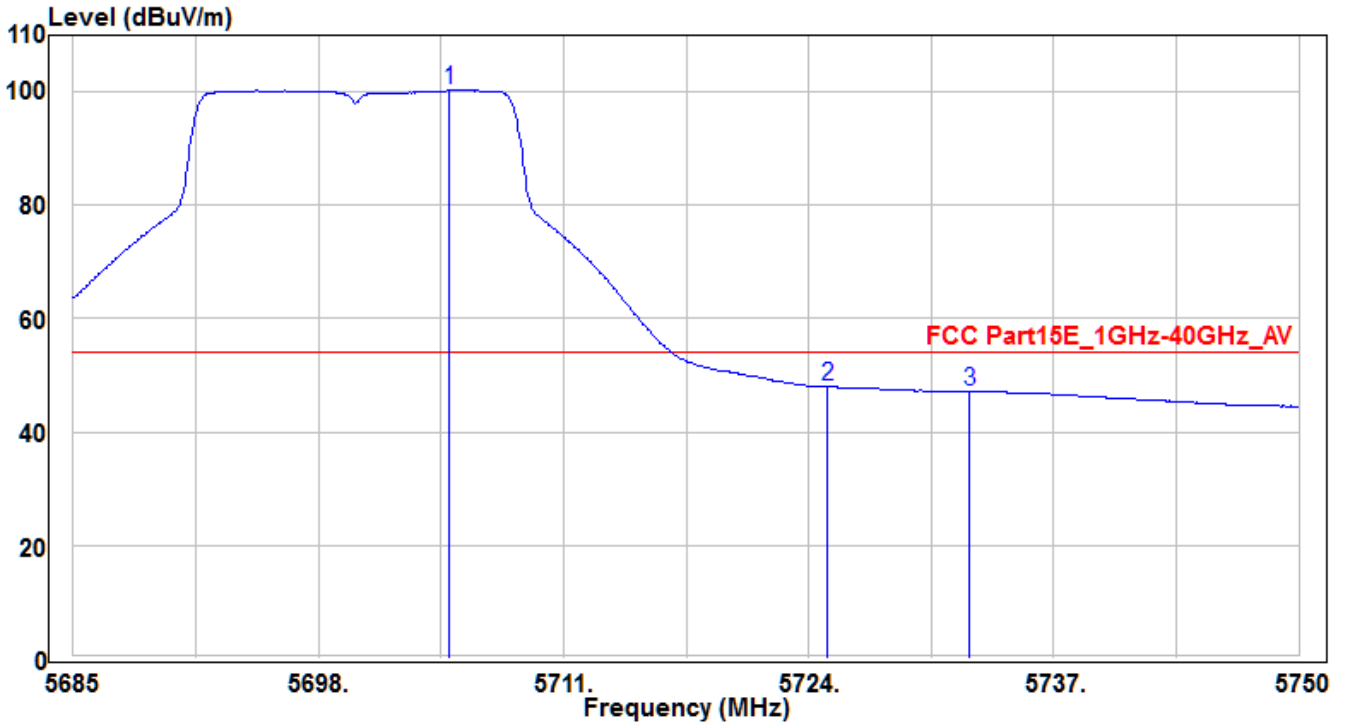


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5704.955	95.26	4.96	100.22	46.22	54	150	220	Average
2	* 5725	42.98	5.03	48.01	-5.99	54	150	220	Average
3	5732.515	42.05	5.07	47.12	-6.88	54	150	220	Average

Note :

1. " \* " means the worst value in this measurement data °
2. C.F ( Correction Factor ) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
3. Measurement (dBuV/m) = Reading(dBuV) + C.F ( Correction Factor ) °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE1-CH140_Ant B	Test Voltage	AC 120V/60Hz

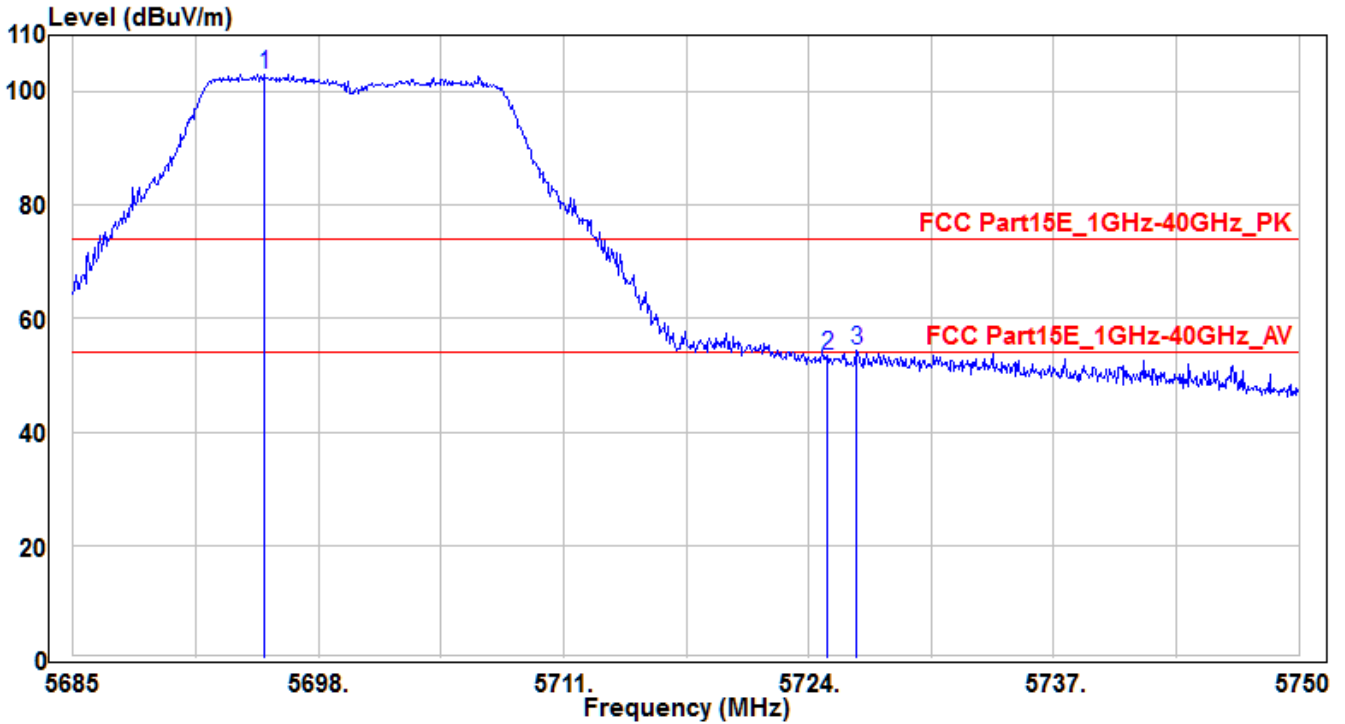


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5695.14	98.16	4.91	103.07	29.07	74	165	135	Peak
2	5725	48.39	5.03	53.42	-20.58	74	165	135	Peak
3	* 5726.535	49.32	5.04	54.36	-19.64	74	165	135	Peak

Note :

1. " \* " means the worst value in this measurement data °
2. C.F ( Correction Factor ) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
3. Measurement (dBuV/m) = Reading(dBuV) + C.F ( Correction Factor ) °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE1-CH140_Ant B	Test Voltage	AC 120V/60Hz

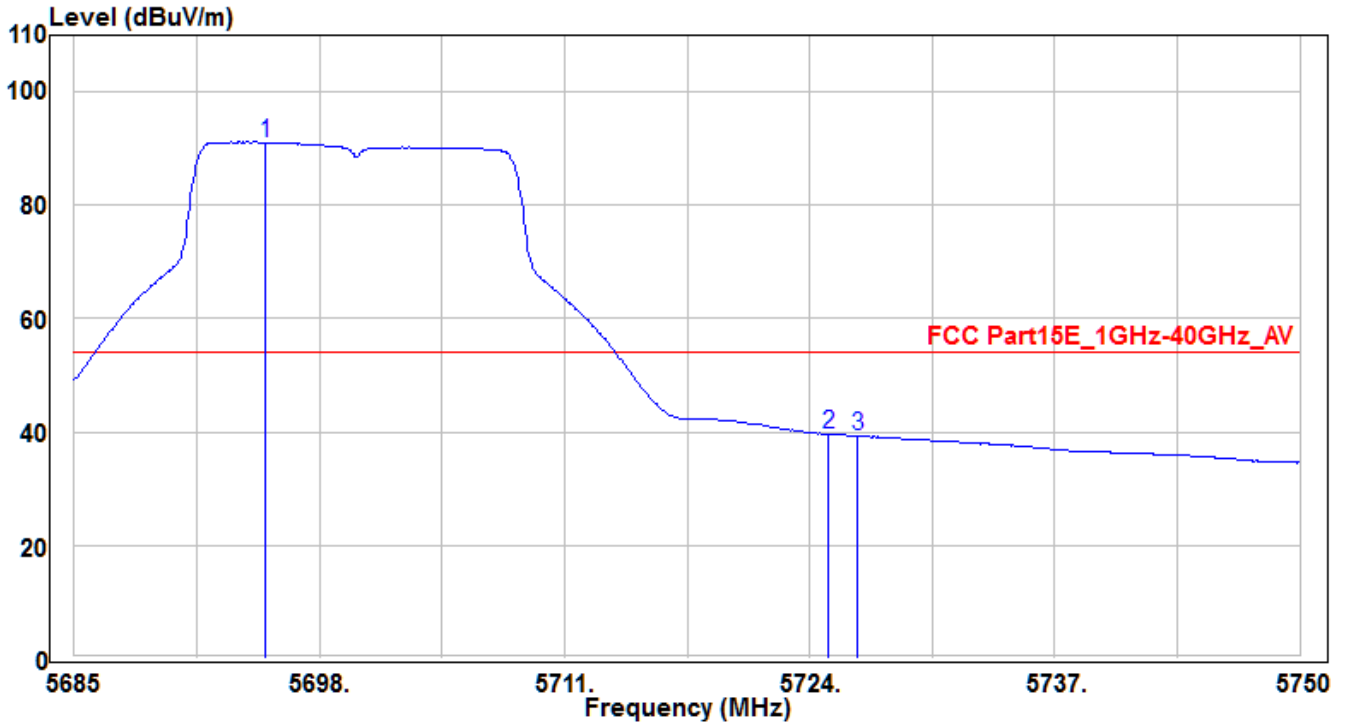


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5695.14	86.18	4.91	91.09	37.09	54	165	135	Average
2	* 5725	34.64	5.03	39.67	-14.33	54	165	135	Average
3	5726.535	34.28	5.04	39.32	-14.68	54	165	135	Average

Note :

- " \* " means the worst value in this measurement data °
- C.F ( Correction Factor ) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV) + C.F ( Correction Factor ) °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE1-CH140_Ant B	Test Voltage	AC 120V/60Hz

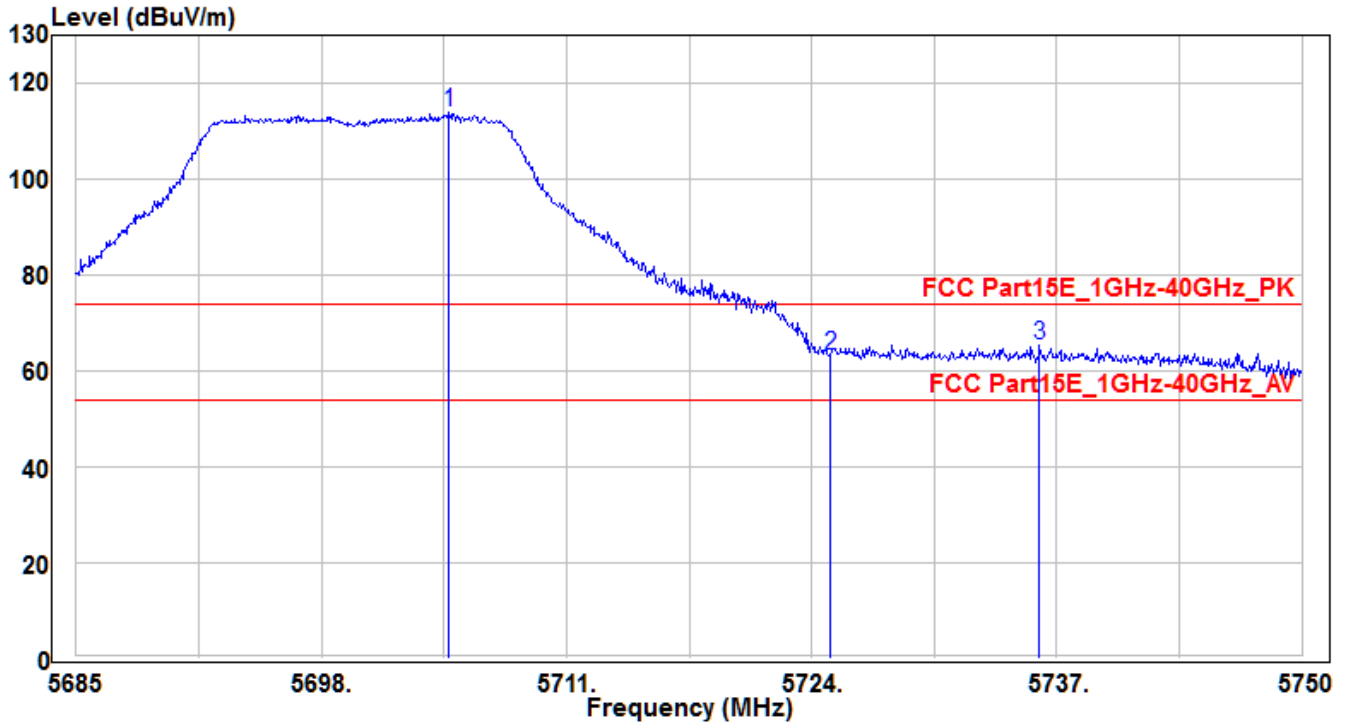


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5704.76	108.93	4.96	113.89	39.89	74	150	145	Peak
2	5725	58.28	5.03	63.31	-10.69	74	150	145	Peak
3	* 5736.09	60.44	5.07	65.51	-8.49	74	150	145	Peak

Note :

1. " \* " means the worst value in this measurement data °
2. C.F ( Correction Factor ) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
3. Measurement (dBuV/m) = Reading(dBuV) + C.F ( Correction Factor ) °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE1-CH140_Ant B	Test Voltage	AC 120V/60Hz

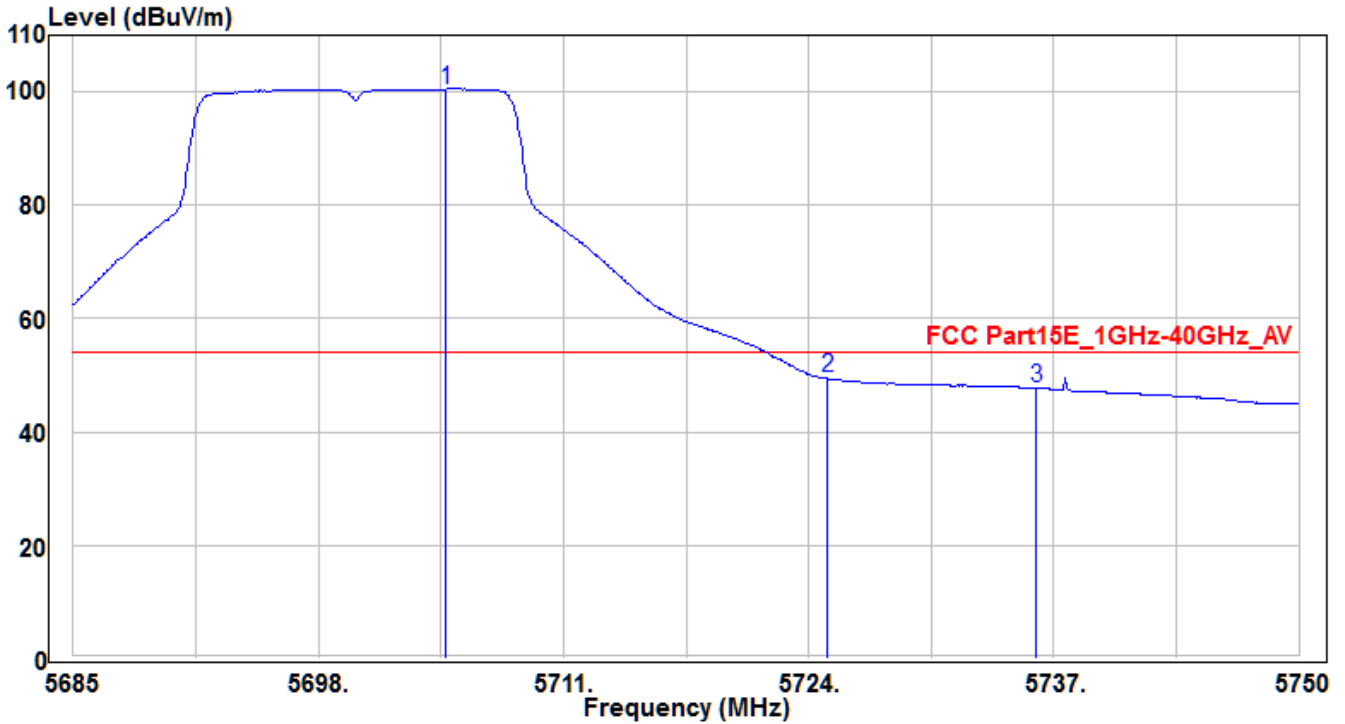

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5704.76	95.53	4.96	100.49	46.49	54	150	145	Average
2	* 5725	44.4	5.03	49.43	-4.57	54	150	145	Average
3	5736.09	42.68	5.07	47.75	-6.25	54	150	145	Average

Note :

1. " \* " means the worst value in this measurement data °
2. C.F ( Correction Factor ) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
3. Measurement (dBuV/m) = Reading(dBuV) + C.F ( Correction Factor ) °