



**Microtest**  
微测检测

# Test Report

**Report No.:** MTi231106021-11E4

**Date of issue:** 2024-02-22

**Applicant:** LEXON

**Product:** OSLO NEWS PREMIUM

**Model(s):** LA130

**FCC ID:** 2ARD3-LA130

Shenzhen Microtest Co., Ltd.

<http://www.mtitest.com>

## Instructions

1. This test report shall not be partially reproduced without the written consent of the laboratory.
2. The test results in this test report are only responsible for the samples submitted
3. This test report is invalid without the seal and signature of the laboratory.
4. This test report is invalid if transferred, altered, or tampered with in any form without authorization.
5. Any objection to this test report shall be submitted to the laboratory within 15 days from the date of receipt of the report.


# Contents

<b>1</b>	<b>General Description .....</b>	<b>5</b>
1.1	Description of the EUT .....	5
1.2	Description of test modes .....	5
1.3	Description of support units .....	6
<b>2</b>	<b>Measurement uncertainty .....</b>	<b>6</b>
<b>3</b>	<b>Test facilities and accreditations.....</b>	<b>7</b>
3.1	Test laboratory .....	7
<b>4</b>	<b>List of test equipment .....</b>	<b>8</b>
<b>5</b>	<b>Test result .....</b>	<b>9</b>
5.2	Test setup .....	10
5.3	Test Procedures.....	10
5.4	Test results .....	11
	<b>Photographs of the Test Setup.....</b>	<b>12</b>
	<b>Photographs of the EUT.....</b>	<b>12</b>

<b>Test Result Certification</b>	
<b>Applicant:</b>	LEXON
Address:	125 avenue des Champs-Élysées 75008 Paris France
<b>Manufacturer:</b>	LEXON
Address:	125 avenue des Champs-Élysées 75008 Paris France
<b>Product description</b>	
Product name:	OSLO NEWS PREMIUM
Trademark:	LEXON
Model name:	LA130
Series Model:	N/A
Standards:	FCC CFR 47 PART 1, § 1.1310
Test method:	KDB 680106 D01 Wireless Power Transfer v04
<b>Date of Test</b>	
Date of test:	2023-11-28 to 2024-02-22
Test result:	Pass

**Test Engineer :**


(Maleah Deng)

**Reviewed By :**


(Leon Chen)

**Approved By :**


(Tom Xue)

## 1 General Description

### 1.1 Description of the EUT

Product name:	OSLO NEWS PREMIUM
Model name:	LA130
Series Model:	N/A
Model difference:	N/A
Electrical rating:	Input: DC 9V 2A Wireless Output: 5W,7.5W,10W Battery: DC 3.6V 2000mAh
Accessories:	Cable: USB-C to USB-C cable 120cm
Hardware version:	V:2
Software version:	V0.22
Test sample(s) number:	MTi231106021-11S1001
<b>RF specification:</b>	
Operation frequency:	115-205KHz
Modulation type:	ASK
Antenna type:	Coil Antenna

### 1.2 Description of test modes

All the test modes were carried out with the EUT in normal operation, the final test mode of the EUT was the worst test mode for emission test, which was shown in this report and defined as:

No.	Emission test modes
Mode1	Charging+Wireless Output(5W)
Mode2	Charging+Wireless Output(7.5W)
Mode3	Charging+Wireless Output(10W)
Mode4	Stand by

### 1.3 Description of support units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

<b>Support equipment list</b>			
Description	Model	Serial No.	Manufacturer
Mobile phone	iPhone 12	/	APPLE
Mobile phone	S9+	R28C34V79NT	SAMSUNG
<b>Support cable list</b>			
Description	Length (m)	From	To
/	/	/	/

## 2 Measurement uncertainty

Parameter	Expanded Uncertainty
Magnetic field measurement (9kHz~30MHz)	± 18.6%
Electric field measurements (9kHz~30MHz)	± 18.6%

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

### 3 Test facilities and accreditations

#### 3.1 Test laboratory

Test laboratory:	Shenzhen Microtest Co., Ltd.
Test site location:	101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	(86-755)88850135
Fax:	(86-755)88850136
CNAS Registration No.:	CNAS L5868
FCC Registration No.:	448573

#### 4 List of test equipment

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
MTi-E115	Electric and Magnetic Field Probe – Analyzer	Narda	EHP-200A	101166	2023/08/15	2026/08/14



## 5 Test result

### 5.1.1 Requirement

§1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of FCC part 2.1093 of this chapter.

**Table 1 to §1.1310(e)(1) - Limits for Maximum Permissible Exposure (MPE)**

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
<b>(i) Limits for Occupational/Controlled Exposure</b>				
0.3-3.0	614	1.63	*(100)	≤6
3.0-30	1842/f	4.89/f	*(900/f <sup>2</sup> )	<6
30-300	61.4	0.163	1.0	<6
300-1500			f/300	<6
1500-100000			5	<6
<b>(ii) Limits for General Population/Uncontrolled Exposure</b>				
0.3-1.34	614	1.63	*(100)	<30
1.34-30	824/f	2.19/f	*(180/f <sup>2</sup> )	<30
30-300	27.5	0.073	0.2	<30
300-1500			f/1500	<30
1500-100000			1.0	<30


f = frequency in MHz

\* = Plane-wave equivalent power density

**Note 1:** Occupational/controlled exposure limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure.

**Note 2:** General population/uncontrolled exposure limits apply in situations in which the general public may be exposed, or in which persons who are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure.

## 5.2 Test setup

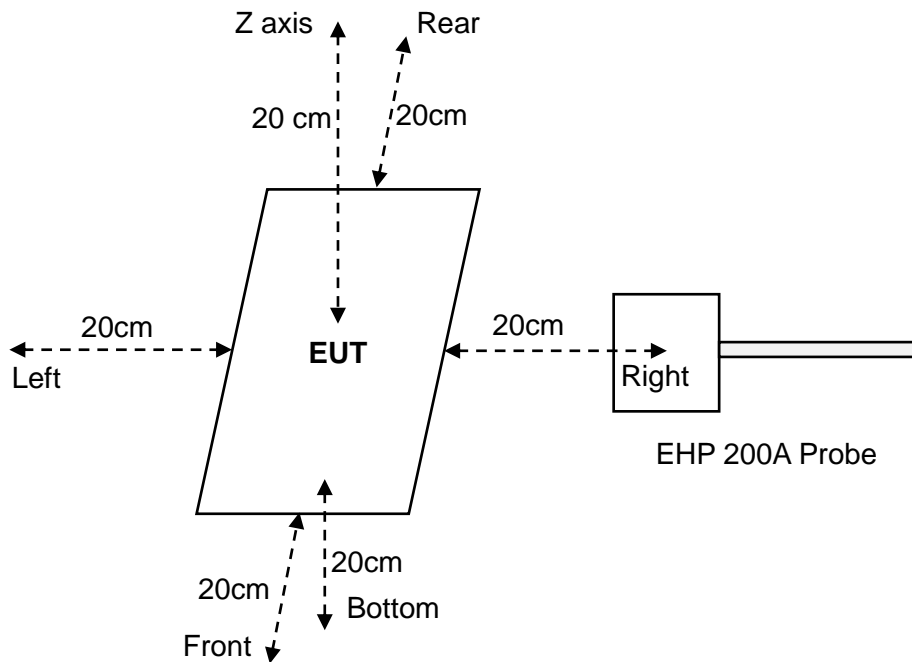

## 5.3 Test Procedures

- a. The RF exposure test was performed in anechoic chamber.
- b. E and H-field measurements should be made with these devices considered to meet the § 2.1091-Mobile conditions (“generally be used in such a way that a separation distance of at least 20 centimeters is normally maintained between the RF source's radiating structure(s) and [the nearest person]”).
- c. The highest emission level was recorded and compared with limit.
- d. The EUT was measured according to the dictates of KDB 680106 D01 Wireless Power Transfer v04.

**5.4 Test results**
**Test condition 1: Mode 3 operating mode with client device (1 % battery status of client device)**

Probe Position	E-field (V/m)			H-field (A/m)		
	Measurement	Limit	Percentage (%)	Measurement	Limit	Percentage (%)
Z axis	0.5342	614	0.14%	0.0803	1.63	6.94%
Left	0.8096			0.1131		
Right	0.8847			0.0502		
Front	0.7061			0.0540		
Rear	0.6322			0.0505		
bottom	0.3651			0.1131		

**Test condition 2: Mode 3 operating mode with client device (50 % battery status of client device)**

Probe Position	E-field (V/m)			H-field (A/m)		
	Measurement	Limit	Max. Percentage (%)	Measurement	Limit	Max. Percentage (%)
Z axis	0.5244	614	0.14%	0.0757	1.63	7.52%
Left	0.8159			0.1042		
Right	0.8649			0.0473		
Front	0.692			0.0625		
Rear	0.6307			0.0557		
Bottom	0.3682			0.1226		

**Test condition 3: Mode 3 operating mode with client device (99 % battery status of client device)**

Probe Position	E-field (V/m)			H-field (A/m)		
	Measurement	Limit	Percentage (%)	Measurement	Limit	Percentage (%)
Z axis	0.5319	614	0.14%	0.0756	1.63	6.75%
Left	0.7916			0.1035		
Right	0.8797			0.0475		
Front	0.689			0.0521		
Rear	0.6208			0.0492		
bottom	0.3602			0.1101		

## Photographs of the Test Setup

See the Appendix - Test Setup Photos.

## Photographs of the EUT

See the Appendix - EUT Photos.

**----End of Report----**