TEST REPORT

Application No.:	GZEM1912017991CR
Applicant:	Beijing Kingsmith Technology Co.,Ltd
Address of Applicant:	Floor 4, Building 25, Area 18, ABP Park, Fengtai, Beijing, China
Manufacturer:	Beijing Kingsmith Technology Co.,Ltd
Address of Manufacturer:	Floor 4, Building 25, Area 18, ABP Park, Fengtai, Beijing, China
Factory:	Beijing Kingsmith Technology Co.,Ltd
Address of Factory:	Floor 4, Building 25, Area 18, ABP Park, Fengtai, Beijing, China
Equipment Under Test (EUT):	
EUT Name:	Motorized Treadmill
Model No.:	DYCV-10221-120, TRR1F, TRR1F-H, TRR1F Pro, TRRyF, TRRyF-H, TRRyF Pro (“y” can be 2-99) ¤
¤	Please refer to section 2 of this report which indicates which model was actually tested and which were electrically identical.
Trade Mark:	KINGSMITH DYNAMAX
Standard(s):	47 CFR Part 15, Subpart C 15.247
Date of Receipt:	2019-12-30
Date of Test:	2020-01-03 to 2020-01-07
Date of Issue:	2020-01-08
Test Result:	**Pass***

* In the configuration tested, the EUT complied with the standards specified above.

Kobe Jian
EMC Laboratory Manager

Revision Record				
Version	**Chapter**	**Date**	**Modifier**	**Remark**
01		2020-01-08		Original

Authorized for issue by:				
Tested By		 **Jackson_Yuan /Project Engineer**		2020-01-03 to 2020-01-07 **Date**
Checked By		 **Ricky_Liu /Reviewer**		2020-01-08 **Date**

SGS-CSTC Standards Technical Services Co. Ltd. Guangzhou Branch, Testing Center
No.198 Kezhu Road, Scientech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

2 Test Summary

Radio Spectrum Technical Requirement				
Item	**Standard**	**Method**	**Requirement**	**Result**
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Pass

Radio Spectrum Matter Part				
Item	**Standard**	**Method**	**Requirement**	**Result**
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Minimum 6dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.9.1	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Power Spectrum Density	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass

¤ Declaration of EUT Family Grouping:

Model No.: DYCV-10221-120, TRR1F, TRR1F-H, TRR1F Pro, TRRyF, TRRyF-H, TRRyF Pro (“y” can be 2-99)

According to the declaration from the applicant, the electrical circuit design, layout, components used and internal wiring were identical for all models, with only difference on the model name.

Therefore only one model DYCV-10221-120 was tested in this report.

SGS-CSTC Standards Technical Services Co. Ltd. Guangzhou Branch Electronic EEC Laboratory
No.198 Kezhu Road, Scientech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

3 Contents

4 General Information

4.1 Details of E.U.T.

Power Supply:	AC 110-127V 60Hz
	DC 3V 'CR2032' battery for remote controller (FCC ID: 2ARDB-TRR11F)
Test Voltage:	AC 120 V, 60 Hz
Cable:	about 0.8m x 3 wires unscreened AC mains cable
Antenna Gain	5.3 dBi
Antenna Type	PCB Antenna
Channel Spacing	2MHz
Modulation Type	GFSK
Number of Channels	40 as below for details
Operation Frequency	2402MHz to 2480MHz
Software	EMI Tools.exe

Operation Frequency each of channel							
Channel	Frequency	Channe	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	10	2422MHz	20	2442MHz	30	2462MHz
1	2404MHz	11	2424MHz	21	2444MHz	31	2464MHz
2	2406MHz	12	2426MHz	22	2446MHz	32	2466MHz
3	2408MHz	13	2428MHz	23	2448MHz	33	2468MHz
4	2410MHz	14	2430MHz	24	2450MHz	34	2470MHz
5	2412MHz	15	2432MHz	25	2452MHz	35	2472MHz
6	2414MHz	16	2434MHz	26	2454MHz	36	2474MHz
7	2416MHz	17	2436MHz	27	2456MHz	37	2476MHz
8	2418MHz	18	2438MHz	28	2458MHz	38	2478MHz
9	2420MHz	19	2440MHz	29	2460MHz	39	2480MHz

Using test software was control EUT work in continuous transmitter and receiver mode.and select test channel as below:

Channel	Frequency
The lowest channel (CH0)	2402MHz
The middle channel (CH20)	2442MHz
The highest channel (CH39)	2480MHz

No.198 Kezhu Road, Scientech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
NoteBook	IBM	T30	S/N78-3VMLX 06/01
BT test board	SGS EMC	RF 07	RF 07

4.3 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	±5.5 x 10^{-8}
2	Duty cycle	±0.57%
3	Occupied Bandwidth	±3%
4	RF Conducted power	±0.68dB
5	RF Power Density	±1.50dB
6	Conducted Spurious Emissions	±1.04dB
7	RF Radiated Power	±4.5dB (below 1GHz)
		±4.8dB (above 1GHz)
8	Radiated Spurious Emission Test	±4.5dB (30MHz-1GHz)
		±4.8dB (1GHz-18GHz)
9	Temperature	±0.4℃
10	Humidity	±1.3%
11	Supply Voltages	±1.5%
12	Time	±3%

4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou Branch EMC Laboratory,

198 Kezhu Road, Scientech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663

Tel: +86 20 82155555 Fax: +86 20 82075059

No tests were sub-contracted.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **NVLAP (Lab Code: 200611-0)**

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 200611-0.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

- **ACMA**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our NVLAP accreditation.

- **SGS UK(Certificate No.: 32), SGS-TUV SAARLAND and SGS-FIMKO**

Have approved SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory as a supplier of EMC TESTING SERVICES and SAFETY TESTING SERVICES.

- **CNAS (Lab Code: L0167)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been assessed and in compliance with CNAS-CL01:2018 accreditation criteria for testing laboratories (identical to

ISO/IEC 17025:2017 General Requirements) for the Competence of Testing Laboratories.

- **FCC Recognized 2.948 Listed Test Firm(Registration No.: 282399)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 282399, May 31, 2002.

- **FCC Recognized Accredited Test Firm(Registration No.: 486818)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been accredited and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Designation Number: CN5016, Test Firm Registration Number: 486818, Jul 13, 2017.

- **Industry Canada (Registration No.: 4620B, CAB identifier: CN0052)**

SGS-CSTC Standards Technical Services Co., Ltd., has been registered by Innovation Science and Economic Development Canada for Wireless Device Testing laboratories to test to Canadian radio equipment requirements. Registration No. 4620B, CAB identifier: CN0052.

- **VCCI (Registration No.: R-12460, C-12584, G-10449 and T-11179)**

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-12460, C-12584，G-10449 and T-11179 respectively.

- **CBTL (Lab Code: TL129)**

SGS-CSTC Standards Technical Services Co., Ltd., E&E Laboratory has been assessed and fully comply with the requirements of ISO/IEC 17025:2005, the Basic Rules, IECEE 01 and Rules of procedure IECEE 02, and the relevant IECEE CB-Scheme Operational documents.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None

5 Equipment List

Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	**Manufacturer**	**Model No**	**Inventory No**	**Cal Date**	**Cal Due Date**
Shielding Room	Zhong Yu	8m x 3m x 3.8m	EMC0306	N/A	N/A
Two-Line V-Netwok	R&S	ENV216	EMC0118	2019-01-11	2020-01-10
LISN	R&S	ENV216	EMC2135	2019-09-16	2020-09-15
EMI Test Receiver	Rohde & Schwarz	ESCS30	EMC0506	2019-11-18	2020-11-17
Coaxial Cable	HangTianXing	2m	EMC0107	2018-09-20	2020-09-19
Voltage Probe	SGS	N/A	EMC0106	2018-04-04	2020-04-03
Conical Metal Housing	SGS-EMC	N/A	EMC0167	2018-04-19	2020-04-18
Test Software E3c	Audix	Ver. 5.4.1221b	GZE100-62	N/A	N/A

Minimum 6dB Bandwidth					
Equipment	**Manufacturer**	**Model No**	**Inventory No**	**Cal Date**	**Cal Due Date**
EXA Signal Analzer	AgilentTechnologies	N9010A	EMC2138	2019-11-18	2020-11-17
6dB Attenuator	HP	8491A	EMC2062	2018-04-04	2020-04-03
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A
MI CABLE	SGS	0.8M	EMC2136	2019-11-02	2021-11-01
MI CABLE	SGS	0.8M	EMC2137	2019-11-02	2021-11-01

Conducted Peak Output Power					
Equipment	**Manufacturer**	**Model No**	**Inventory No**	**Cal Date**	**Cal Due Date**
EXA Signal Analzer	AgilentTechnologies	N9010A	EMC2138	2019-11-18	2020-11-17
6dB Attenuator	HP	8491A	EMC2062	2018-04-04	2020-04-03
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A
MI CABLE	SGS	0.8M	EMC2136	2019-11-02	2021-11-01
MI CABLE	SGS	0.8M	EMC2137	2019-11-02	2021-11-01

Power Spectrum Density					
Equipment	**Manufacturer**	**Model No**	**Inventory No**	**Cal Date**	**Cal Due Date**
EXA Signal Analzer	AgilentTechnologies	N9010A	EMC2138	2019-11-18	2020-11-17
6dB Attenuator	HP	8491A	EMC2062	2018-04-04	2020-04-03
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A
MI CABLE	SGS	0.8M	EMC2136	2019-11-02	2021-11-01
MI CABLE	SGS	0.8M	EMC2137	2019-11-02	2021-11-01

No.198 Kezhu Road, Scientech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

Conducted Band Edges Measurement					
Equipment	**Manufacturer**	**Model No**	**Inventory No**	**Cal Date**	**Cal Due Date**
MXA Signal Analyzer	AgilentTechnologies	N9020A	SEM004-10	2019-02-24	2020-02-23
ESG Vector Signal Generator	Keysight	E4438C	SEM006-03	2019-04-05	2020-04-04
EXG Analog Signal Generator	AgilentTechnologies	N5171B	SEM006-04	2017-07-26	2020-07-25
Power Meter	AgilentTechnologies	U2021XA_Ch2	SEM009-02	2019-05-29	2020-05-28
Power Meter	AgilentTechnologies	U2021XA_Ch3	SEM009-03	2019-05-29	2020-05-28
EXA Signal Analzer	AgilentTechnologies	N9010A	EMC2138	2019-11-18	2020-11-17
6dB Attenuator	HP	8491A	EMC2062	2018-04-04	2020-04-03
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A
MI CABLE	SGS	0.8M	EMC2136	2019-11-02	2021-11-01
MI CABLE	SGS	0.8M	EMC2137	2019-11-02	2021-11-01

Conducted Spurious Emissions					
Equipment	**Manufacturer**	**Model No**	**Inventory No**	**Cal Date**	**Cal Due Date**
EXA Signal Analzer	AgilentTechnologies	N9010A	EMC2138	2019-11-18	2020-11-17
6dB Attenuator	HP	8491A	EMC2062	2018-04-04	2020-04-03
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A
MI CABLE	SGS	0.8M	EMC2136	2019-11-02	2021-11-01
MI CABLE	SGS	0.8M	EMC2137	2019-11-02	2021-11-01

Radiated Emissions which fall in the restricted bands					
Equipment	**Manufacturer**	**Model No**	**Inventory No**	**Cal Date**	**Cal Due Date**
EMI Test Receiver	Rohde & Schwarz	ESIB26	EMC0522	2019-01-20	2020-01-19
EMI Test Receiver	Rohde & Schwarz	ESCI	EMC0056	2019-01-20	2020-01-19
Chamber cable	HangTianXing	N/A	EMC0542	2019-06-28	2021-06-27
Trilog Broadband Antenna 25MHz-1GHz	SCHWARZBECKMESS-ELEKTRONIK	VULB 9168	EMC2174	2018-09-06	2021-09-05
Bi-log Type Antenna	Schaffner -Chase	CBL6143	EMC0519	2017-05-04	2020-05-03
Horn Antenna 1GHz-18GHz	R& S	HF906	EMC0518	2018-09-02	2021-09-01
1GHz-26.5 GHz Pre-Amplifier	Agilent	8449B	EMC0521	2019-01-07	2020-01-08
Amplifier	HP	8447F	EMC2065	2019-05-29	2020-05-28
Pre-Amplifier MH648A	ANRITSU CORP	MH648A	EMC2086	2019-11-18	2020-11-17
Active Loop Antenna	EMCO	6502	EMC0523	2018-03-05	2020-03-04
High Pass Filter(915MHz)	FSY MICROWAVE	HM1465-9SS	EMC2079	2019-01-11	2020-01-10
2.4GHz Filter	Micro-Tronics	BRM 50702	EMC2069	2019-01-11	2020-01-10

10m Semi-Anechoic Chamber	ETS	N/A	EMC0530	2019-10-20	2022-10-19
966 Anechoic Chamber	C.R.T	9m x 6m x 6m	EMC2142	2017-12-19	2020-12-18
MXE EMI Receiver	Keysight	N9038A	EMC2139	2019-11-18	2020-11-17
EXA Signal Analyzer	Keysight	N9010A	EMC2138	2019-11-18	2020-11-17
Trilog Broadband Antenna 30MHz-1GHz	SCHWARZBECKMESS-ELEKTRONIK	VULB 9168	SEM003-18	2019-02-22	2022-02-22
Test Software E3	Audix	Ver.6.120110a	GZE100-61	N/A	N/A

Radiated Spurious Emissions					
Equipment	**Manufacturer**	**Model No**	**Inventory No**	**Cal Date**	**Cal Due Date**
EMI Test Receiver	Rohde & Schwarz	ESIB26	EMC0522	2019-01-20	2020-01-19
EMI Test Receiver	Rohde & Schwarz	ESCI	EMC0056	2019-01-20	2020-01-19
Chamber cable	HangTianXing	N/A	EMC0542	2019-06-28	2021-06-27
Trilog Broadband Antenna 25MHz-1GHz	SCHWARZBECKMESS-ELEKTRONIK	VULB 9168	EMC2174	2018-09-06	2021-09-05
Bi-log Type Antenna	Schaffner -Chase	CBL6143	EMC0519	2017-05-04	2020-05-03
Horn Antenna 1GHz-18GHz	R& S	HF906	EMC0518	2018-09-02	2021-09-01
1GHz-26.5 GHz Pre-Amplifier	Agilent	8449B	EMC0521	2019-01-07	2020-01-08
Amplifier	HP	8447F	EMC2065	2019-05-29	2020-05-28
Pre-Amplifier MH648A	ANRITSU CORP	MH648A	EMC2086	2019-11-18	2020-11-17
Active Loop Antenna	EMCO	6502	EMC0523	2018-03-05	2020-03-04
High Pass Filter(915MHz)	FSY MICROWAVE	HM1465-9SS	EMC2079	2019-01-11	2020-01-10
2.4GHz Filter	Micro-Tronics	BRM 50702	EMC2069	2019-01-11	2020-01-10
10m Semi-Anechoic Chamber	ETS	N/A	EMC0530	2019-10-20	2022-10-19
966 Anechoic Chamber	C.R.T	9m x 6m x 6m	EMC2142	2017-12-19	2020-12-18
MXE EMI Receiver	Keysight	N9038A	EMC2139	2019-11-18	2020-11-17
EXA Signal Analyzer	Keysight	N9010A	EMC2138	2019-11-18	2020-11-17
Trilog Broadband Antenna 30MHz-1GHz	SCHWARZBECKMESS-ELEKTRONIK	VULB 9168	SEM003-18	2019-02-22	2022-02-22
Test Software E3	Audix	Ver.6.120110a	GZE100-61	N/A	N/A

General used equipment					
Equipment	**Manufacturer**	**Model No**	**Inventory No**	**Cal Date**	**Cal Due Date**
DMM	Fluke	73	EMC0006	2019-07-16	2020-07-15
DMM	Fluke	73	EMC0007	2019-07-16	2020-07-15

SGS-CSTC Standards Technical Services Co. Ltd. Guangzhou Branch, Electronic EEC Laboratory
No.198 Kezhu Road, Scientech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(c)

6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

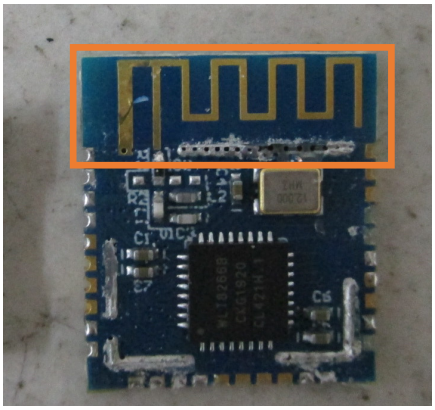

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 5.3 dBi.

7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207
Test Method: ANSI C63.10 (2013) Section 6.2
Limit:

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50
*Decreases with the logarithm of the frequency.		

7.1.1 E.U.T. Operation

Operating Environment:
Temperature: 23 °C Humidity: 52 % RH Atmospheric Pressure: 1020 mbar
Test mode a:TX mode_Keep the EUT in continuously transmitting mode with GFSK modulation

7.1.2 Test Setup Diagram

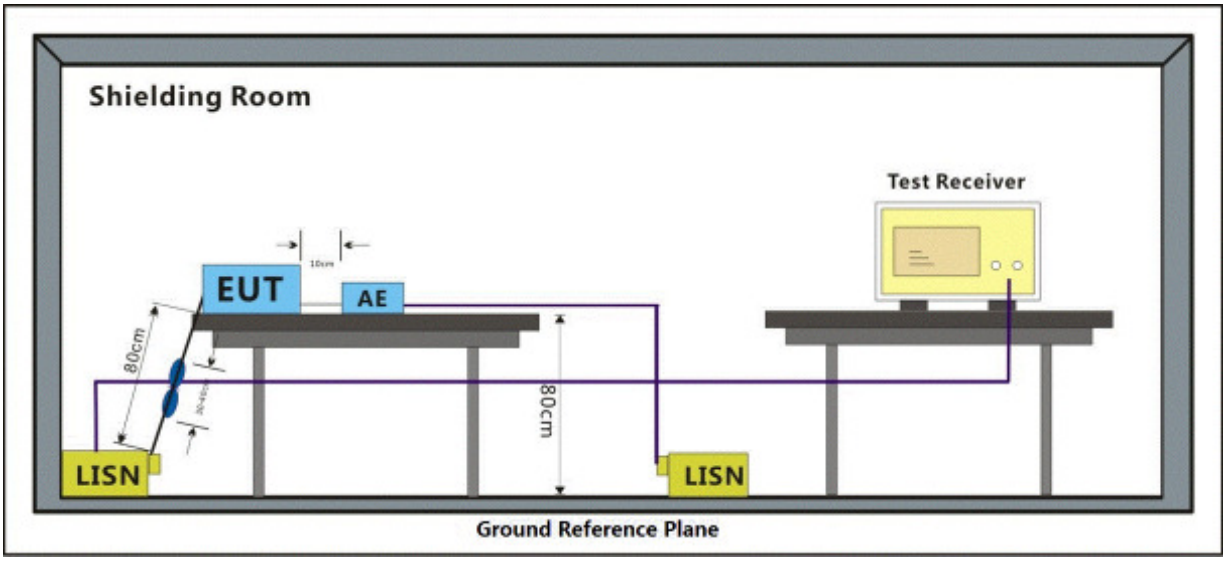

7.1.3 Measurement Procedure and Data

1) The mains terminal disturbance voltage test was conducted in a shielded room.

2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.

3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,

4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.

5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: LISN=Read Level+ Cable Loss+ LISN Factor

Mode:a; Line:Live Line

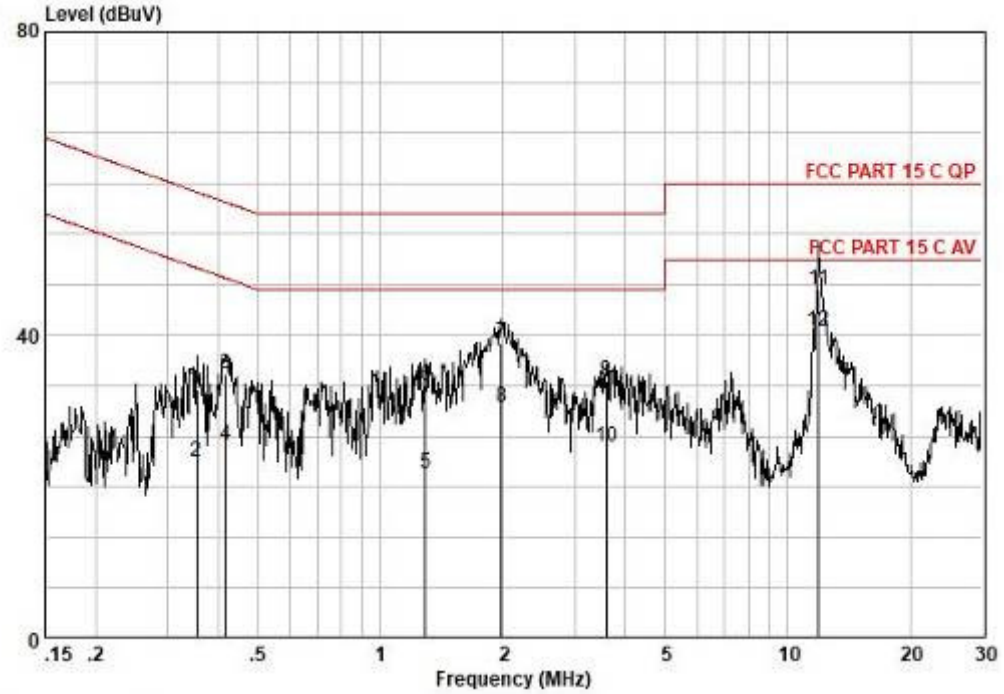

Pol :LIVE
No :
Model :

Frequency MHz	read level dBuV	Cable Loss dB	LISN Factor dB	Measured level dBuV	Limit Line dBuV	Over limit dB	Remark
0.35	23.24	0.10	9.66	33.00	58.87	-25.87	QP
0.35	13.48	0.10	9.66	23.24	48.87	-25.63	AVERAGE
0.42	25.22	0.10	9.66	34.98	57.51	-22.52	QP
0.42	15.76	0.10	9.66	25.52	47.51	-21.98	AVERAGE
1.29	11.91	0.10	9.68	21.69	46.00	-24.31	AVERAGE
1.29	23.49	0.10	9.68	33.27	56.00	-22.73	QP
1.98	29.26	0.10	9.69	39.05	56.00	-16.95	QP
1.98	20.80	0.10	9.69	30.59	46.00	-15.41	AVERAGE
3.58	24.17	0.20	9.70	34.07	56.00	-21.93	QP
3.58	15.32	0.20	9.70	25.22	46.00	-20.78	AVERAGE
11.93	35.91	0.30	9.77	45.98	60.00	-14.02	QP
11.93	30.49	0.30	9.77	40.56	50.00	-9.44	AVERAGE

Mode:a; Line:Neutral Line

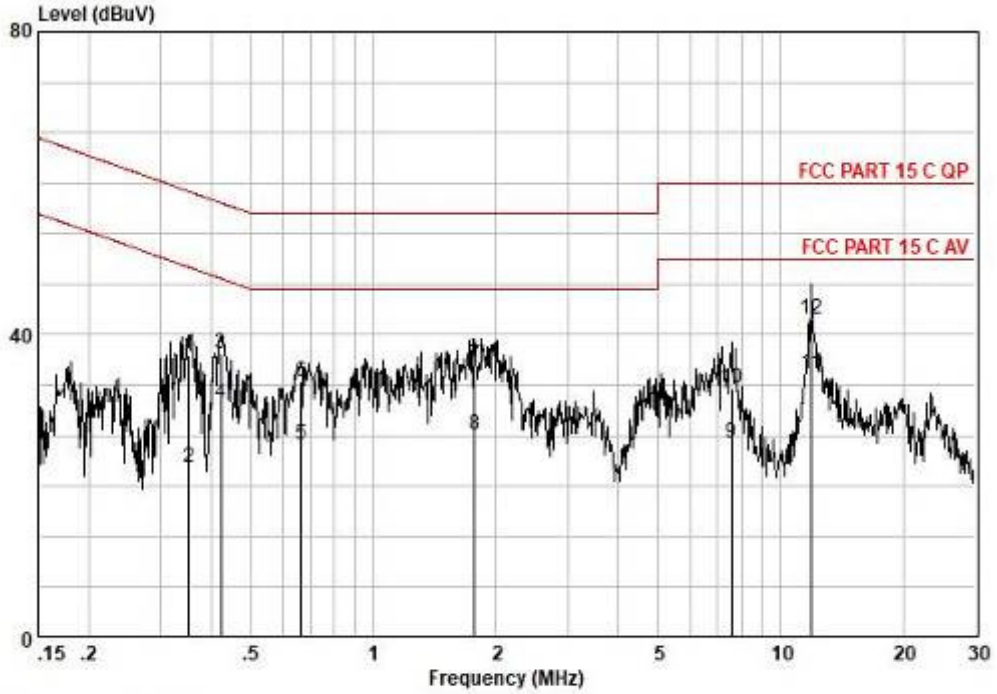

Pol :NEUTRAL
No :
Model :

Frequency MHz	read level dBuV	Cable Loss dB	LISN Factor dB	Measured level dBuV	Limit Line dBuV	Over limit dB	Remark
0.35	27.49	0.10	9.59	37.18	58.91	-21.73	QP
0.35	12.69	0.10	9.59	22.38	48.91	-26.53	AVERAGE
0.42	27.80	0.10	9.59	37.49	57.42	-19.93	QP
0.42	21.35	0.10	9.59	31.04	47.42	-16.38	AVERAGE
0.66	15.86	0.10	9.60	25.56	46.00	-20.44	AVERAGE
0.66	24.18	0.10	9.60	33.88	56.00	-22.12	QP
1.77	26.18	0.10	9.62	35.90	56.00	-20.10	QP
1.77	17.16	0.10	9.62	26.88	46.00	-19.12	AVERAGE
7.57	15.78	0.30	9.70	25.78	50.00	-24.22	AVERAGE
7.57	22.98	0.30	9.70	32.98	60.00	-27.02	QP
11.93	24.78	0.30	9.77	34.85	50.00	-15.15	AVERAGE
11.93	31.96	0.30	9.77	42.03	60.00	-17.97	QP

7.2 Minimum 6dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247a(2)
Test Method: ANSI C63.10 (2013) Section 11.8.1
Limit: ≥500 kHz

7.2.1 E.U.T. Operation

Operating Environment:
Temperature: 24 °C Humidity: 46.3 % RH Atmospheric Pressure: 1020 mbar
Test mode a:TX mode_Keep the EUT in continuously transmitting mode with GFSK modulation

7.2.2 Test Setup Diagram

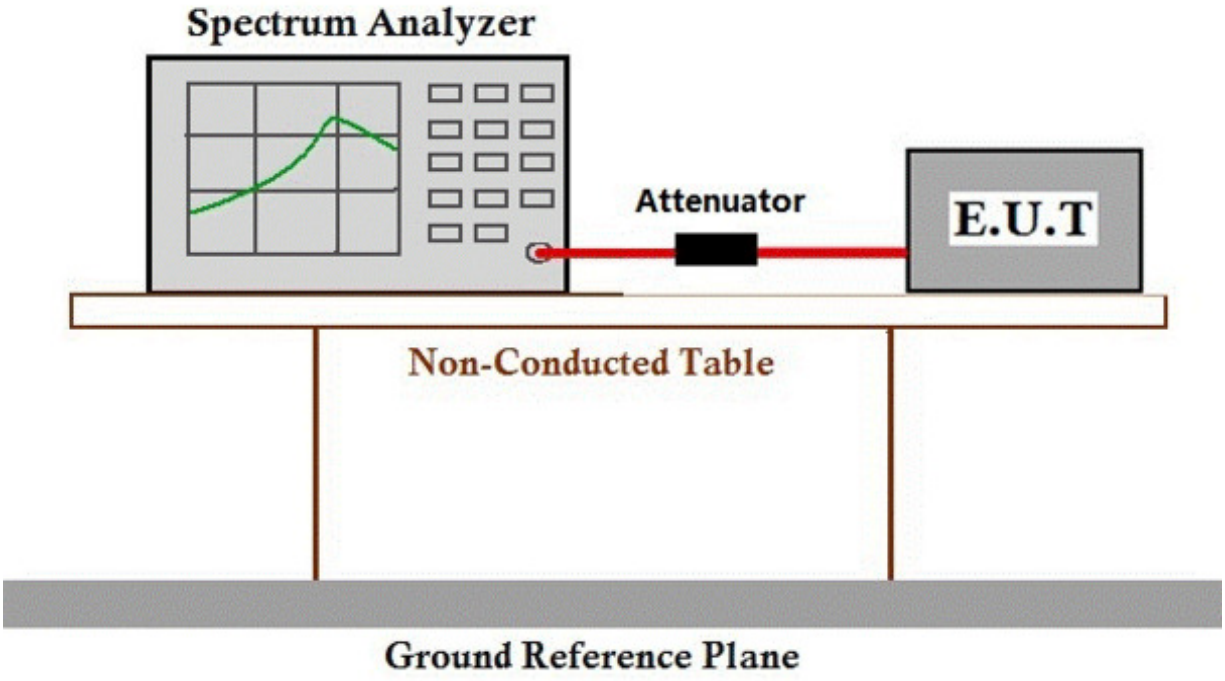

7.2.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247

7.3 Conducted Peak Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(3)
Test Method: ANSI C63.10 (2013) Section 11.9.1
Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥50 hopping channels
	0.25 for 25≤ hopping channels <50
	1 for digital modulation
2400-2483.5	1 for ≥75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

7.3.1 E.U.T. Operation

Operating Environment:
Temperature: 24 °C Humidity: 46.3 % RH Atmospheric Pressure: 1020 mbar
Test mode a:TX mode_Keep the EUT in continuously transmitting mode with GFSK modulation

7.3.2 Test Setup Diagram

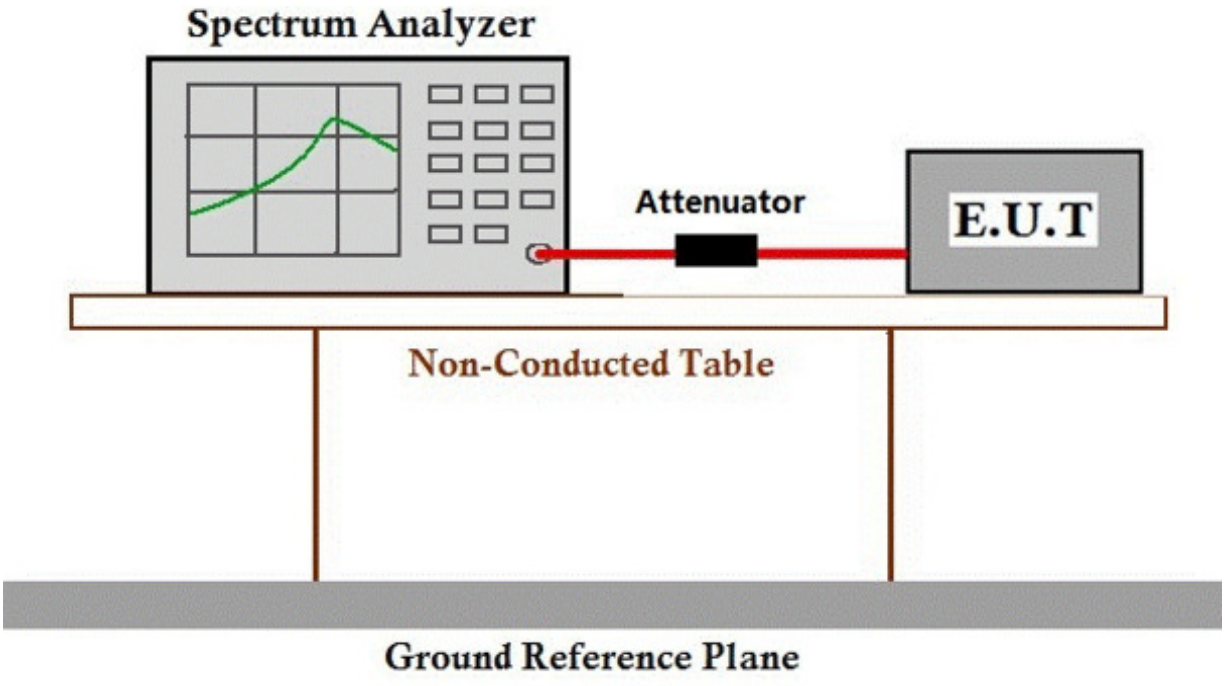

7.3.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247

7.4 Power Spectrum Density

Test Requirement	47 CFR Part 15, Subpart C 15.247(e)
Test Method:	ANSI C63.10 (2013) Section 11.10.2
Limit:	≤8dBm in any 3 kHz band during any time interval of continuous transmission

7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 24 °C Humidity: 46.3 % RH Atmospheric Pressure: 1020 mbar

Test mode a:TX mode_Keep the EUT in continuously transmitting mode with GFSK modulation

7.4.2 Test Setup Diagram

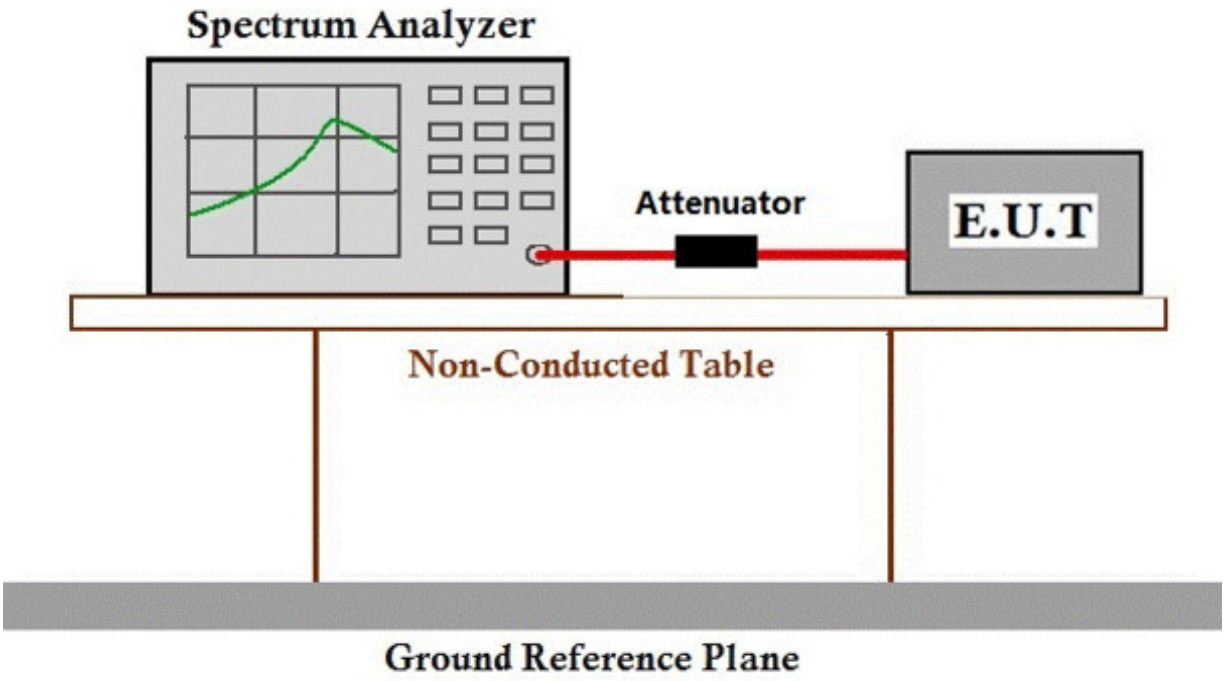

7.4.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247

7.5 Conducted Band Edges Measurement

Test Requirement: 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2013) Section 11.13.3.2

Limit: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)

7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 24 °C Humidity: 46.3 % RH Atmospheric Pressure: 1020 mbar

Test mode a:TX mode_Keep the EUT in continuously transmitting mode with GFSK modulation

7.5.2 Test Setup Diagram

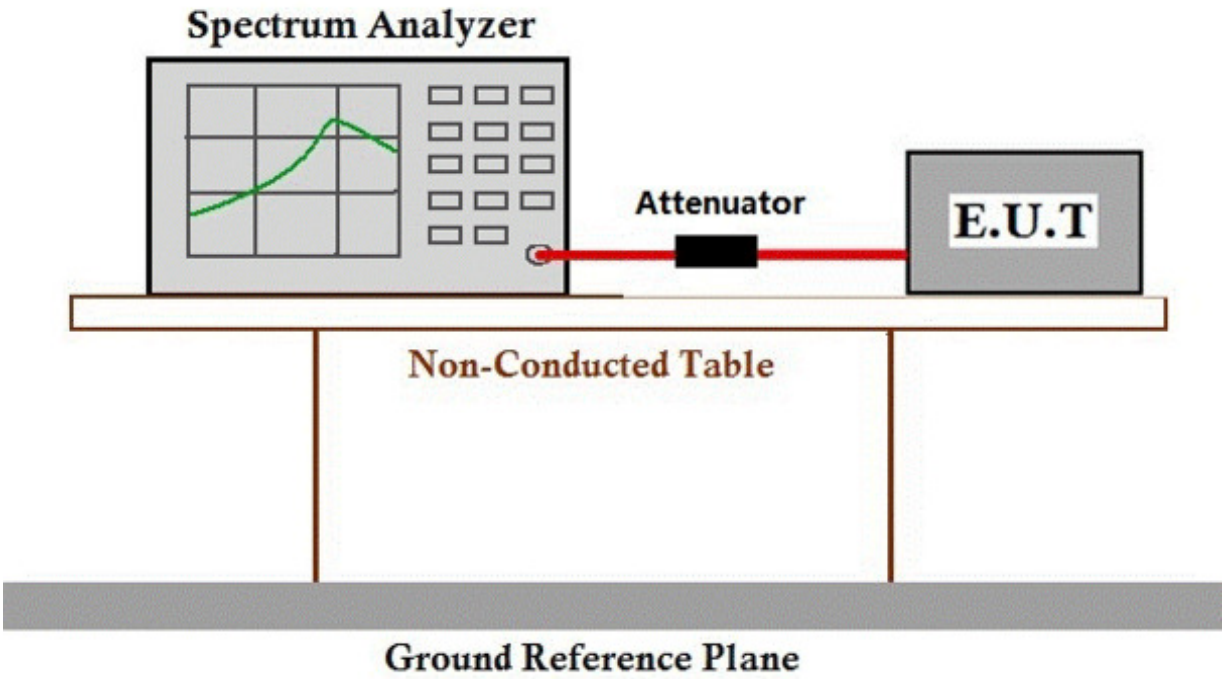

7.5.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247

7.6 Conducted Spurious Emissions

Test Requirement: 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2013) Section 11.11

Limit: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)

7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 24 °C Humidity: 46.3 % RH Atmospheric Pressure: 1020 mbar

Test mode a:TX mode_Keep the EUT in continuously transmitting mode with GFSK modulation

7.6.2 Test Setup Diagram

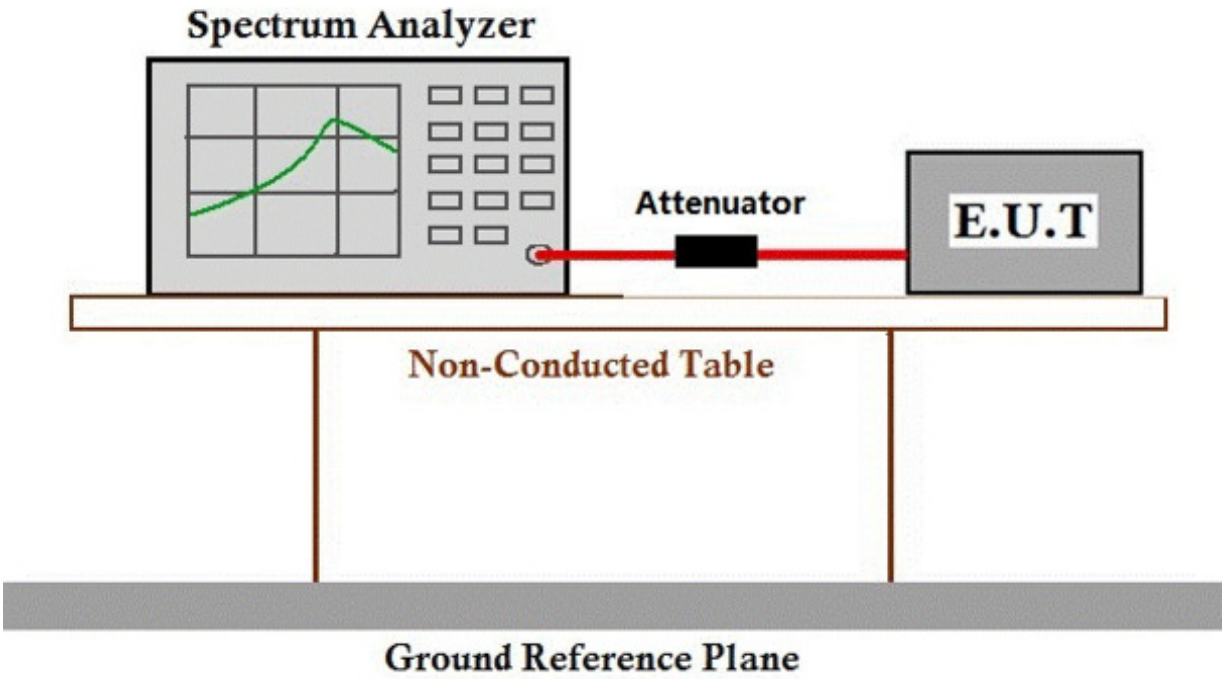

7.6.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247

7.7 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209
Test Method: ANSI C63.10 (2013) Section 6.10.5
Measurement Distance: 3m
Limit:

Frequency(MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3
Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.		

7.7.1 E.U.T. Operation

Operating Environment:
Temperature: 23.3 °C Humidity: 53.3 % RH Atmospheric Pressure: 1020 mbar
Test mode a:TX mode_Keep the EUT in continuously transmitting mode with GFSK modulation

7.7.2 Test Setup Diagram

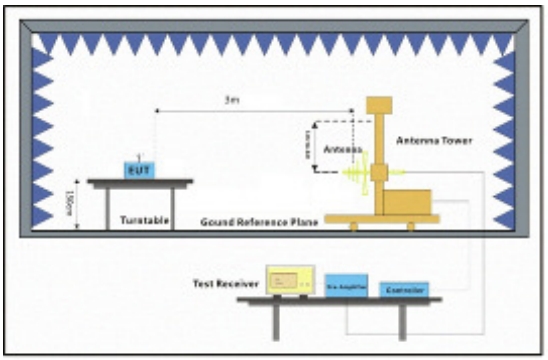

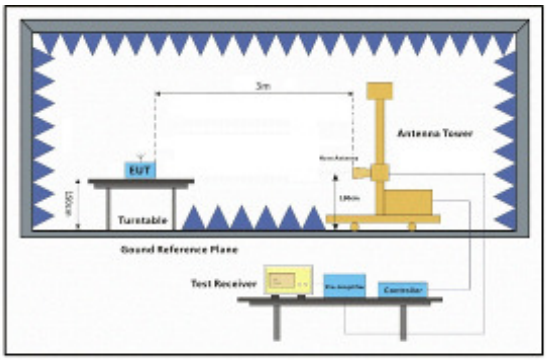

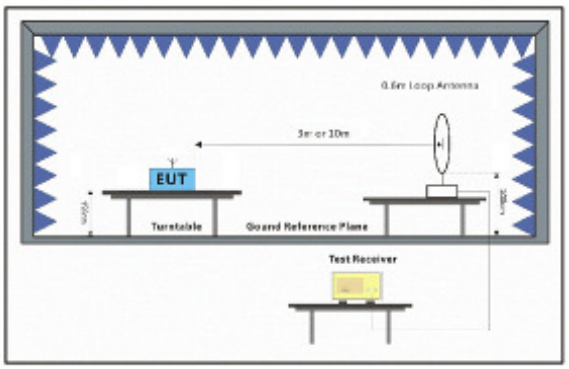

7.7.3 Measurement Procedure and Data

a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.

b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.

c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

h. Test the EUT in the lowest channel, the middle channel, the Highest channel.

i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.

j. Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor

Mode:a; Polarization:Horizontal; Modulation:GFSK; ; Channel:Low

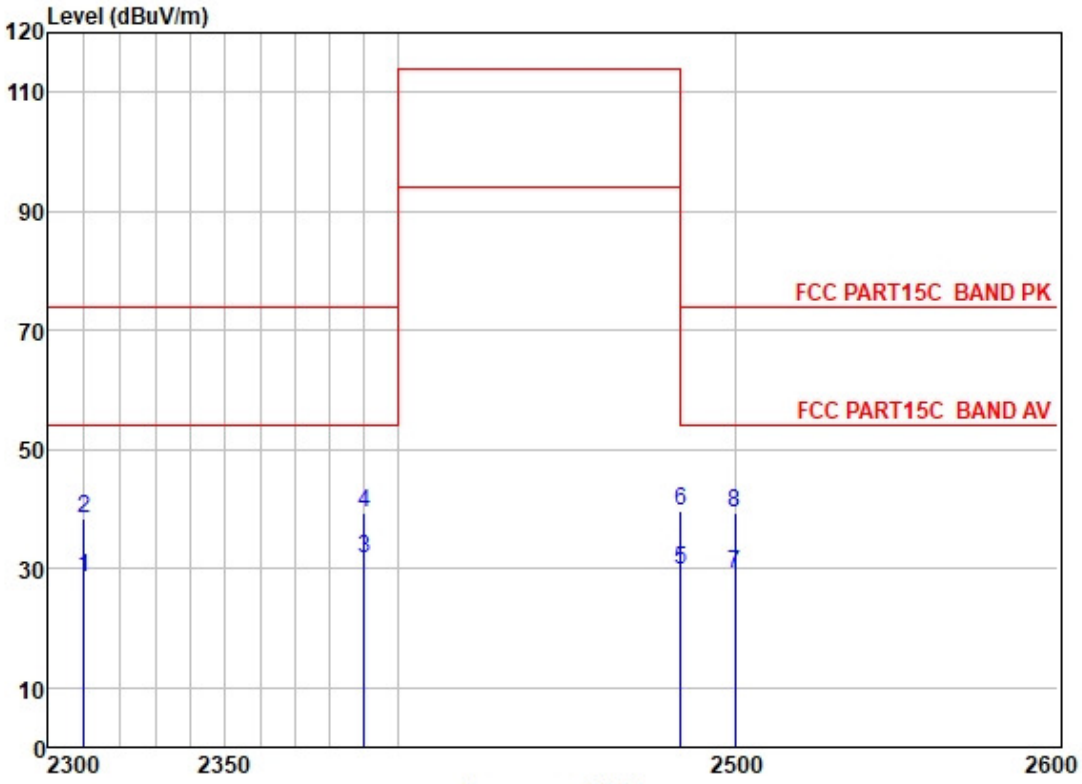

race: (Discrete)

	Freq	ReadLevel	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2310.000	35.34	27.15	3.32	37.44	28.37	54.00	-25.63	HORIZONTAL	Average
2	2310.000	45.37	27.15	3.32	37.44	38.40	74.00	-35.60	HORIZONTAL	Peak
3	2390.000	38.29	27.33	3.48	37.42	31.68	54.00	-22.32	HORIZONTAL	Average
4	2390.000	45.97	27.33	3.48	37.42	39.36	74.00	-34.64	HORIZONTAL	Peak
5	2483.500	36.00	27.48	3.53	37.40	29.61	54.00	-24.39	HORIZONTAL	Average
6	2483.500	46.18	27.48	3.53	37.40	39.79	74.00	-34.21	HORIZONTAL	Peak
7	2500.000	35.66	27.50	3.40	37.39	29.17	54.00	-24.83	HORIZONTAL	Average
8	2500.000	45.81	27.50	3.40	37.39	39.32	74.00	-34.68	HORIZONTAL	Peak

Mode:a; Polarization:Vertical; Modulation:GFSK; ; Channel:Low

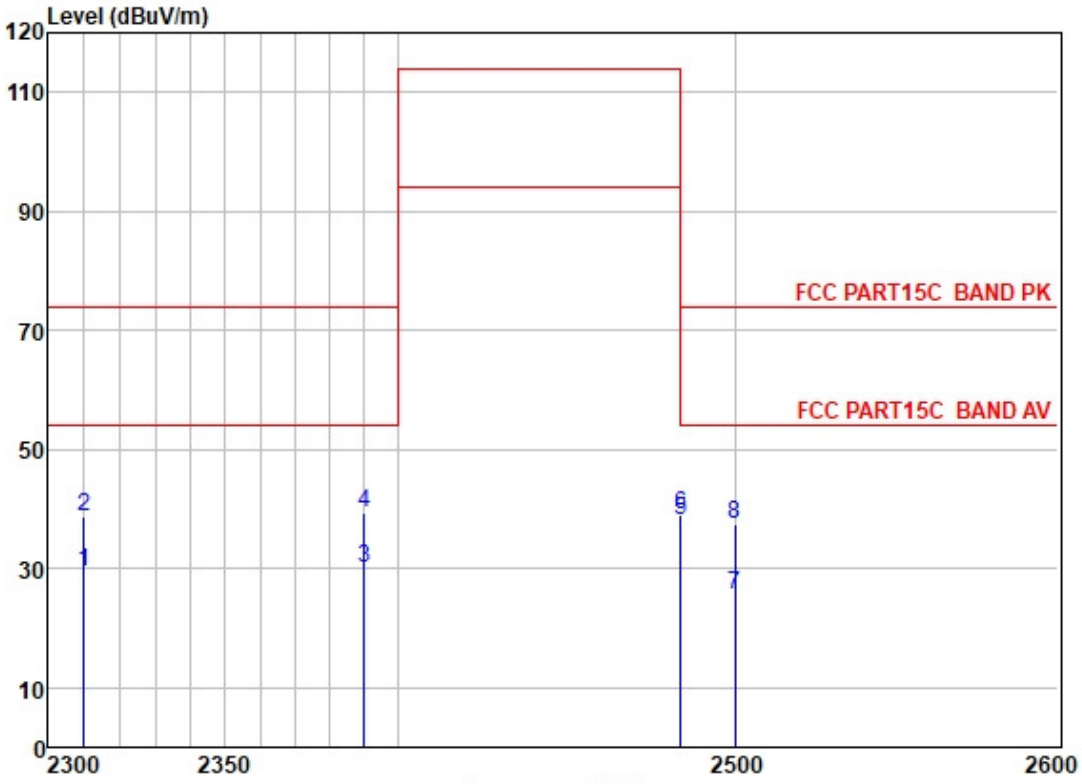

race: (Discrete)

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2310.000	36.44	27.15	3.32	37.44	29.47	54.00	-24.53	VERTICAL	Average
2	2310.000	45.56	27.15	3.32	37.44	38.59	74.00	-35.41	VERTICAL	Peak
3	2390.000	36.69	27.33	3.48	37.42	30.08	54.00	-23.92	VERTICAL	Average
4	2390.000	45.90	27.33	3.48	37.42	39.29	74.00	-34.71	VERTICAL	Peak
5	2483.500	44.37	27.48	3.53	37.40	37.98	54.00	-16.02	VERTICAL	Average
6	2483.500	45.52	27.48	3.53	37.40	39.13	74.00	-34.87	VERTICAL	Peak
7	2500.000	32.18	27.50	3.40	37.39	25.69	54.00	-28.31	VERTICAL	Average
8	2500.000	43.80	27.50	3.40	37.39	37.31	74.00	-36.69	VERTICAL	Peak

SGS-CSTC Standards Technical Services Co. Ltd. Guangzhou Branch, Electronic EEC Laboratory
No.198 Kezhu Road, Scientech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

Mode:a; Polarization:Horizontal; Modulation:GFSK; ; Channel:High

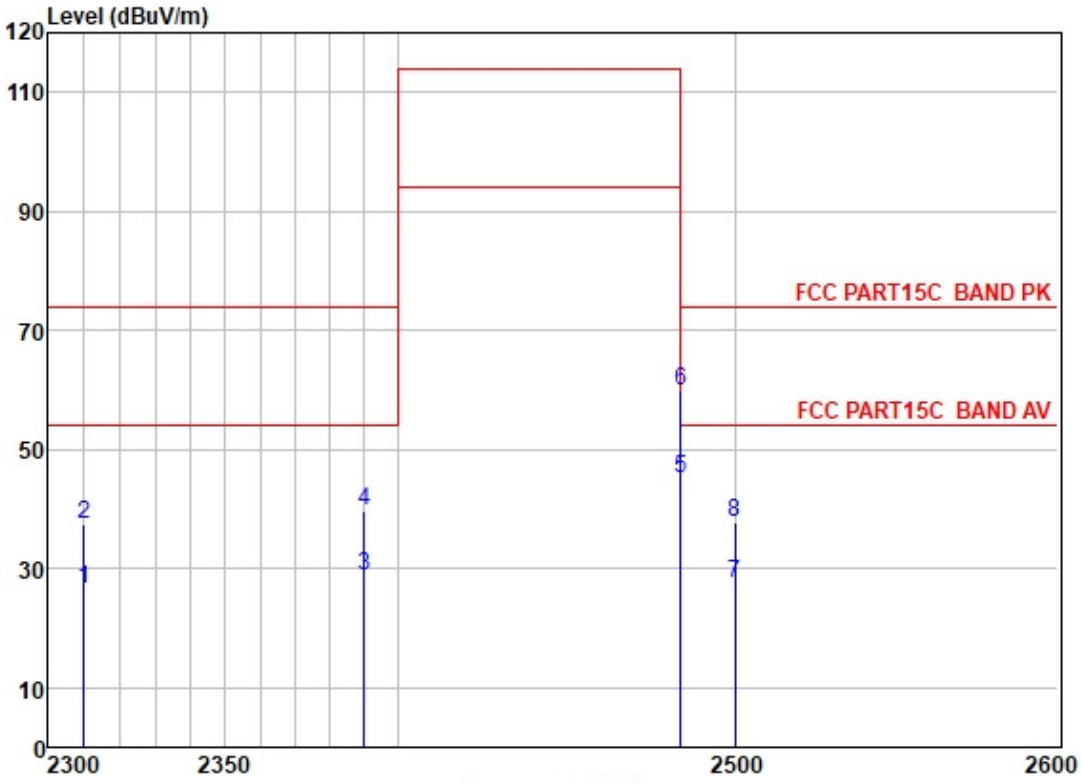

race: (Discrete)

	Freq	ReadLevel	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2310.000	33.45	27.15	3.32	37.44	26.48	54.00	-27.52	HORIZONTAL	Average
2	2310.000	44.40	27.15	3.32	37.44	37.43	74.00	-36.57	HORIZONTAL	Peak
3	2390.000	35.30	27.33	3.48	37.42	28.69	54.00	-25.31	HORIZONTAL	Average
4	2390.000	46.40	27.33	3.48	37.42	39.79	74.00	-34.21	HORIZONTAL	Peak
5	2483.500	51.42	27.48	3.53	37.40	45.03	54.00	-8.97	HORIZONTAL	Average
6	2483.500	66.37	27.48	3.53	37.40	59.98	74.00	-14.02	HORIZONTAL	Peak
7	2500.000	34.04	27.50	3.40	37.39	27.55	54.00	-26.45	HORIZONTAL	Average
8	2500.000	44.37	27.50	3.40	37.39	37.88	74.00	-36.12	HORIZONTAL	Peak

No.198 Kezhu Road, Scientech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

Mode:a; Polarization:Vertical; Modulation:GFSK; ; Channel:High

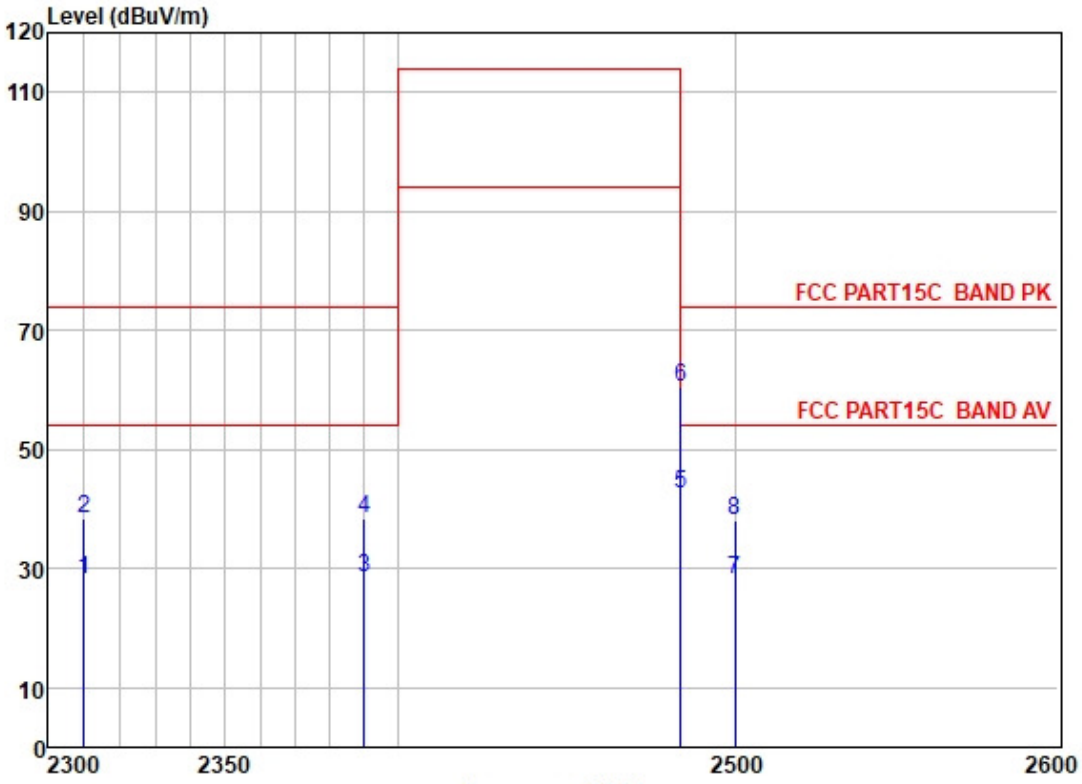

race: (Discrete)

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2310.000	35.25	27.15	3.32	37.44	28.28	54.00	-25.72	VERTICAL	Average
2	2310.000	45.23	27.15	3.32	37.44	38.26	74.00	-35.74	VERTICAL	Peak
3	2390.000	35.06	27.33	3.48	37.42	28.45	54.00	-25.55	VERTICAL	Average
4	2390.000	45.13	27.33	3.48	37.42	38.52	74.00	-35.48	VERTICAL	Peak
5	2483.500	48.96	27.48	3.53	37.40	42.57	54.00	-11.43	VERTICAL	Average
6	2483.500	66.73	27.48	3.53	37.40	60.34	74.00	-13.66	VERTICAL	Peak
7	2500.000	34.60	27.50	3.40	37.39	28.11	54.00	-25.89	VERTICAL	Average
8	2500.000	44.51	27.50	3.40	37.39	38.02	74.00	-35.98	VERTICAL	Peak

7.8 Radiated Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209
Test Method: ANSI C63.10 (2013) Section 6.4,6.5,6.6
Measurement Distance: 3m
Limit:

Frequency(MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3
Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.		

7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 23.3 °C Humidity: 53.3 % RH Atmospheric Pressure: 1020 mbar

Test mode a:TX mode_Keep the EUT in continuously transmitting mode with GFSK modulation

7.8.2 Test Setup Diagram

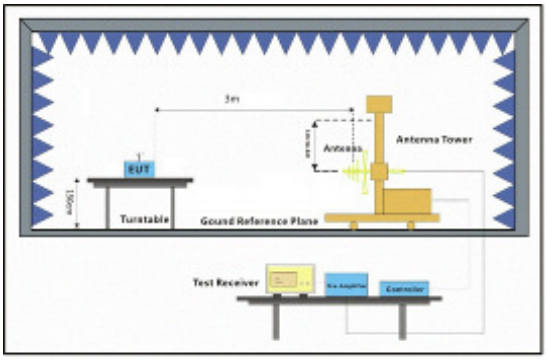

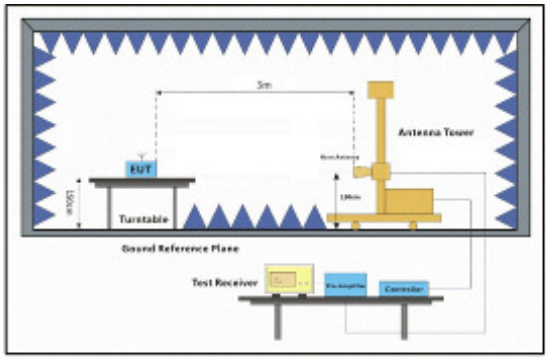

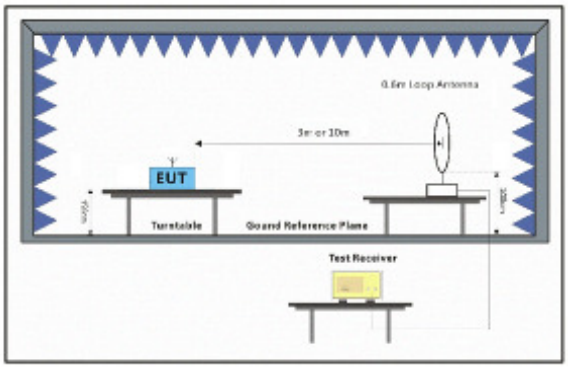

7.8.3 Measurement Procedure and Data

a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.

b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.

c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

h. Test the EUT in the lowest channel, the middle channel, the Highest channel.

i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.

j. Repeat above procedures until all frequencies measured was complete.

Remark:

1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

3) Scan from 9kHz to 25GHz, the disturbance above 18GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown

Mode:a; Polarization:Horizontal; Modulation:GFSK; ; Channel:Low

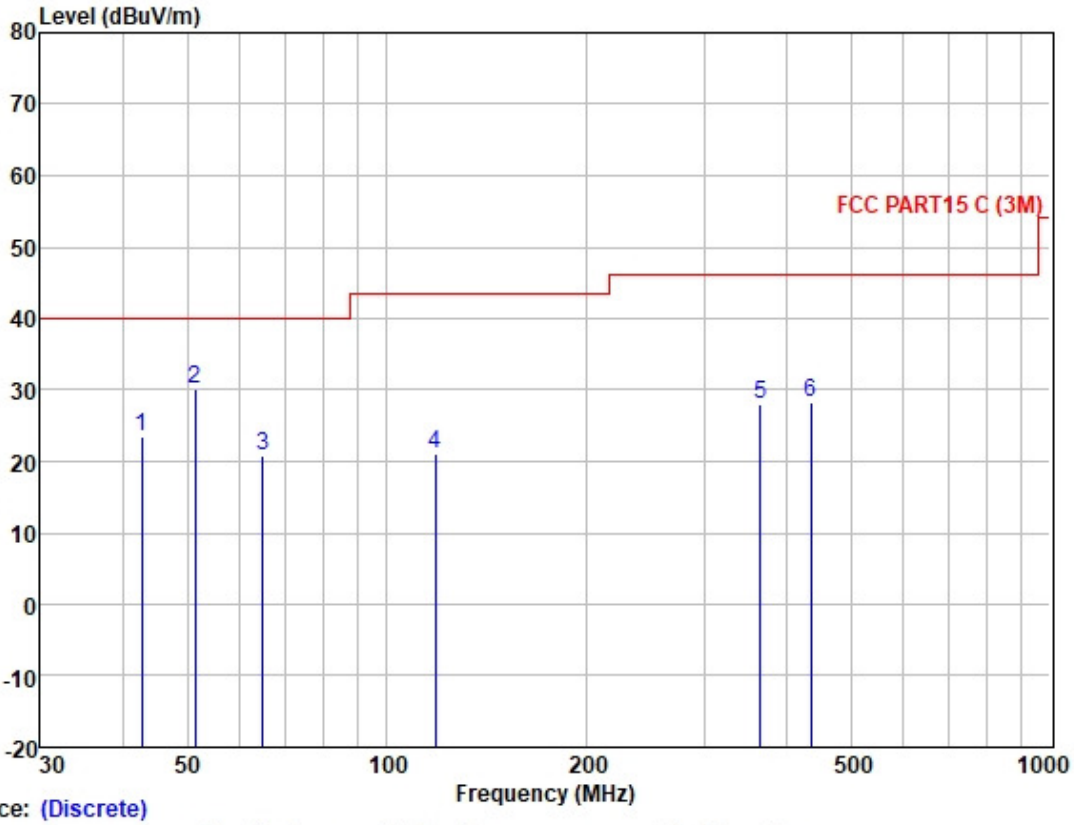

race: (Discrete)

	Freq	ReadLevel	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	42.600	34.83	12.00	0.70	24.12	23.41	40.00	-16.59	HORIZONTAL	QP
2	51.301	41.90	12.35	0.80	24.90	30.15	40.00	-9.85	HORIZONTAL	QP
3	64.887	34.19	11.20	0.90	25.38	20.91	40.00	-19.09	HORIZONTAL	QP
4	118.186	36.48	11.40	1.20	28.14	20.94	43.50	-22.56	HORIZONTAL	QP
5	365.539	40.35	15.02	2.18	29.58	27.97	46.00	-18.03	HORIZONTAL	QP
6	435.590	39.18	16.16	2.44	29.45	28.33	46.00	-17.67	HORIZONTAL	QP

Mode:a; Polarization:Horizontal; Modulation:GFSK; ; Channel:Low

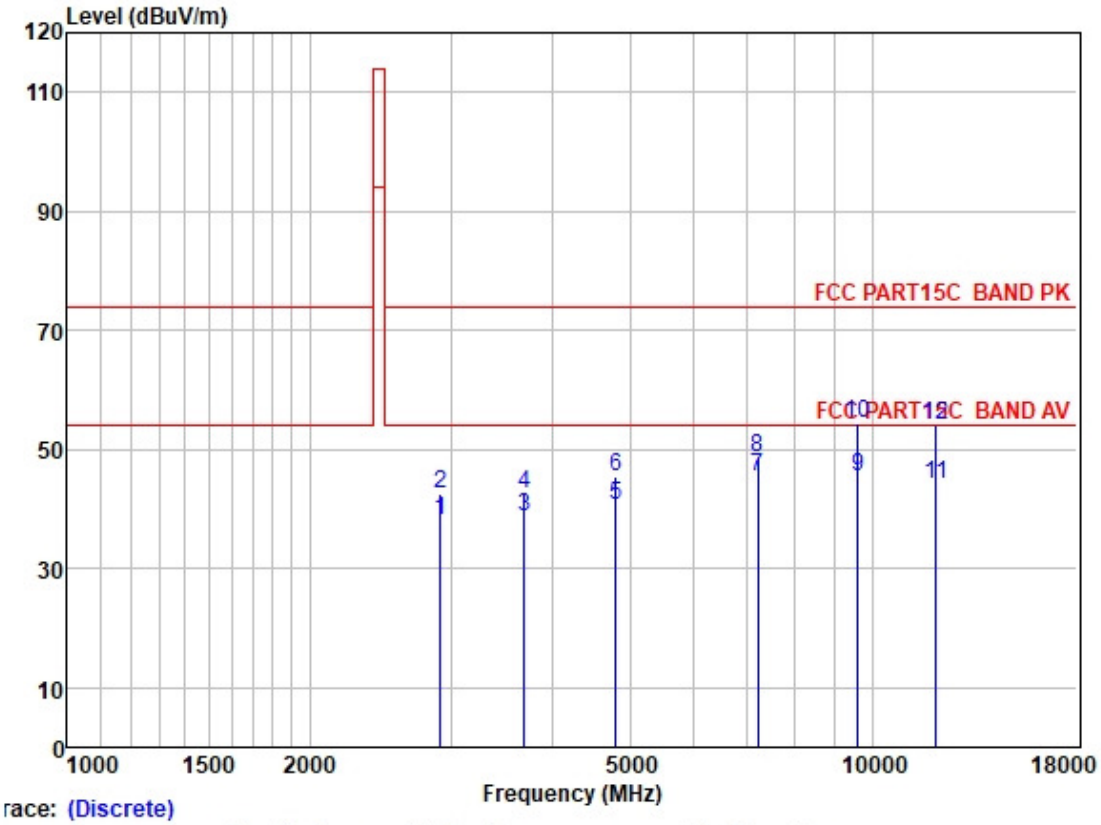

race: (Discrete)

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2905.331	43.26	28.30	3.71	37.13	38.14	54.00	-15.86	HORIZONTAL	Average
2	2905.331	47.73	28.30	3.71	37.13	42.61	74.00	-31.39	HORIZONTAL	Peak
3	3693.033	41.96	29.22	4.55	36.93	38.80	54.00	-15.20	HORIZONTAL	Average
4	3693.033	45.65	29.22	4.55	36.93	42.49	74.00	-31.51	HORIZONTAL	Peak
5	4804.058	40.72	31.42	5.40	36.94	40.60	54.00	-13.40	HORIZONTAL	Average
6	4804.058	45.67	31.42	5.40	36.94	45.55	74.00	-28.45	HORIZONTAL	Peak
7	7206.092	40.70	35.54	5.98	36.93	45.29	54.00	-8.71	HORIZONTAL	Average
8	7206.092	44.21	35.54	5.98	36.93	48.80	74.00	-25.20	HORIZONTAL	Peak
9	9608.018	37.18	38.37	7.07	37.08	45.54	54.00	-8.46	HORIZONTAL	Average
10	9608.018	45.89	38.37	7.07	37.08	54.25	74.00	-19.75	HORIZONTAL	Peak
11	12010.520	34.23	38.90	8.19	37.20	44.12	54.00	-9.88	HORIZONTAL	Average
12	12010.520	44.23	38.90	8.19	37.20	54.12	74.00	-19.88	HORIZONTAL	Peak

Mode:a; Polarization:Vertical; Modulation:GFSK; ; Channel:Low

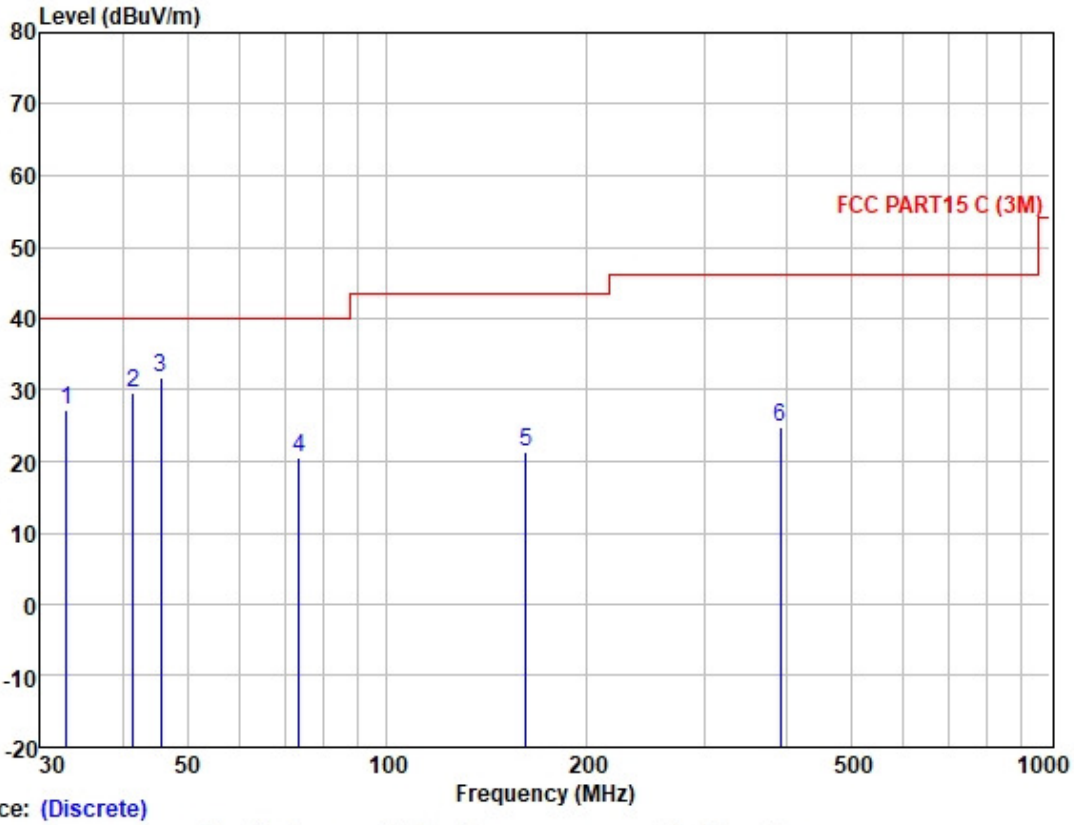

race: (Discrete)

	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	32.864	37.45	11.28	0.60	22.26	27.07	40.00	-12.93	VERTICAL	QP
2	41.422	40.83	11.95	0.70	23.87	29.61	40.00	-10.39	VERTICAL	QP
3	45.535	43.42	12.22	0.71	24.51	31.84	40.00	-8.16	VERTICAL	QP
4	73.617	35.45	9.73	0.98	25.67	20.49	40.00	-19.51	VERTICAL	QP
5	162.041	35.19	12.86	1.44	28.10	21.39	43.50	-22.11	VERTICAL	QP
6	392.095	36.93	15.42	2.26	29.79	24.82	46.00	-21.18	VERTICAL	QP

Mode:a; Polarization:Vertical; Modulation:GFSK; ; Channel:Low

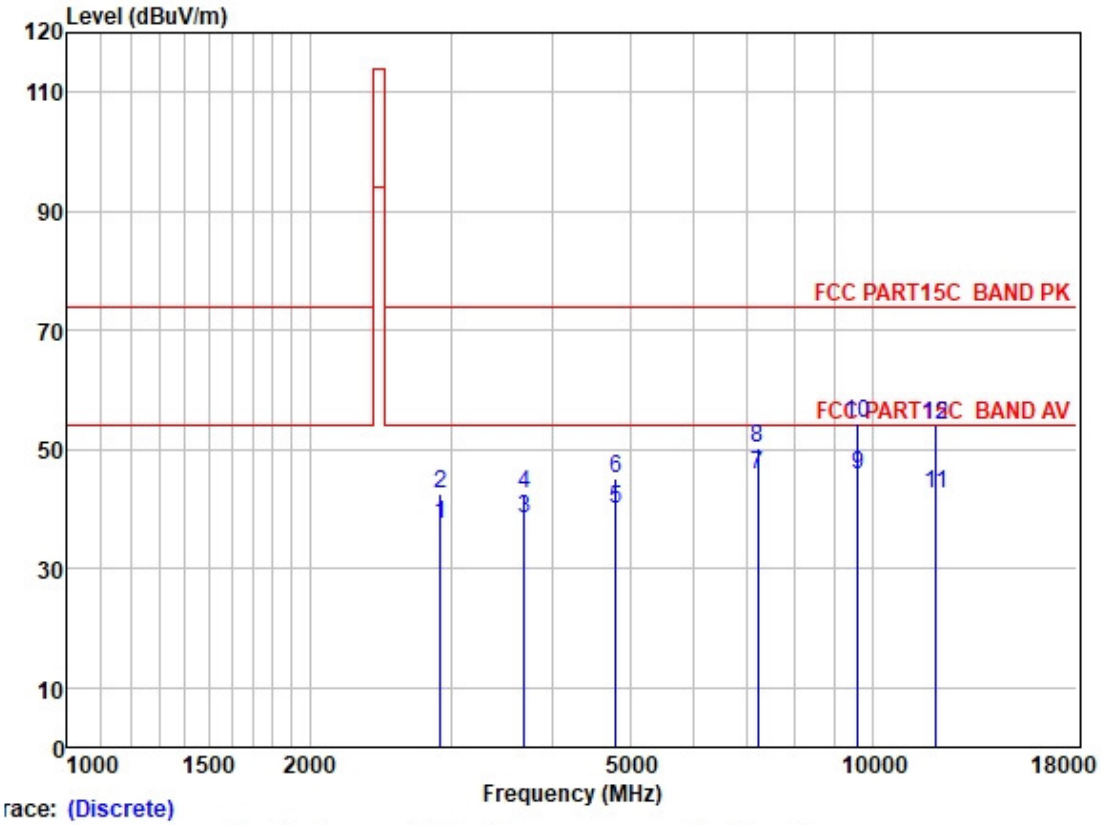

race: (Discrete)

	Freq	ReadLevel	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2905.331	42.63	28.30	3.71	37.13	37.51	54.00	-16.49	VERTICAL	Average
2	2905.331	47.73	28.30	3.71	37.13	42.61	74.00	-31.39	VERTICAL	Peak
3	3693.033	41.66	29.22	4.55	36.93	38.50	54.00	-15.50	VERTICAL	Average
4	3693.033	45.65	29.22	4.55	36.93	42.49	74.00	-31.51	VERTICAL	Peak
5	4804.948	40.18	31.42	5.40	36.94	40.06	54.00	-13.94	VERTICAL	Average
6	4804.948	45.31	31.42	5.40	36.94	45.19	74.00	-28.81	VERTICAL	Peak
7	7206.267	41.28	35.54	5.98	36.93	45.87	54.00	-8.13	VERTICAL	Average
8	7206.267	45.71	35.54	5.98	36.93	50.30	74.00	-23.70	VERTICAL	Peak
9	9608.018	37.26	38.37	7.07	37.08	45.62	54.00	-8.38	VERTICAL	Average
10	9608.018	45.89	38.37	7.07	37.08	54.25	74.00	-19.75	VERTICAL	Peak
11	12010.520	32.55	38.90	8.19	37.20	42.44	54.00	-11.56	VERTICAL	Average
12	12010.520	44.23	38.90	8.19	37.20	54.12	74.00	-19.88	VERTICAL	Peak

Mode:a; Polarization:Horizontal; Modulation:GFSK; ; Channel:middle

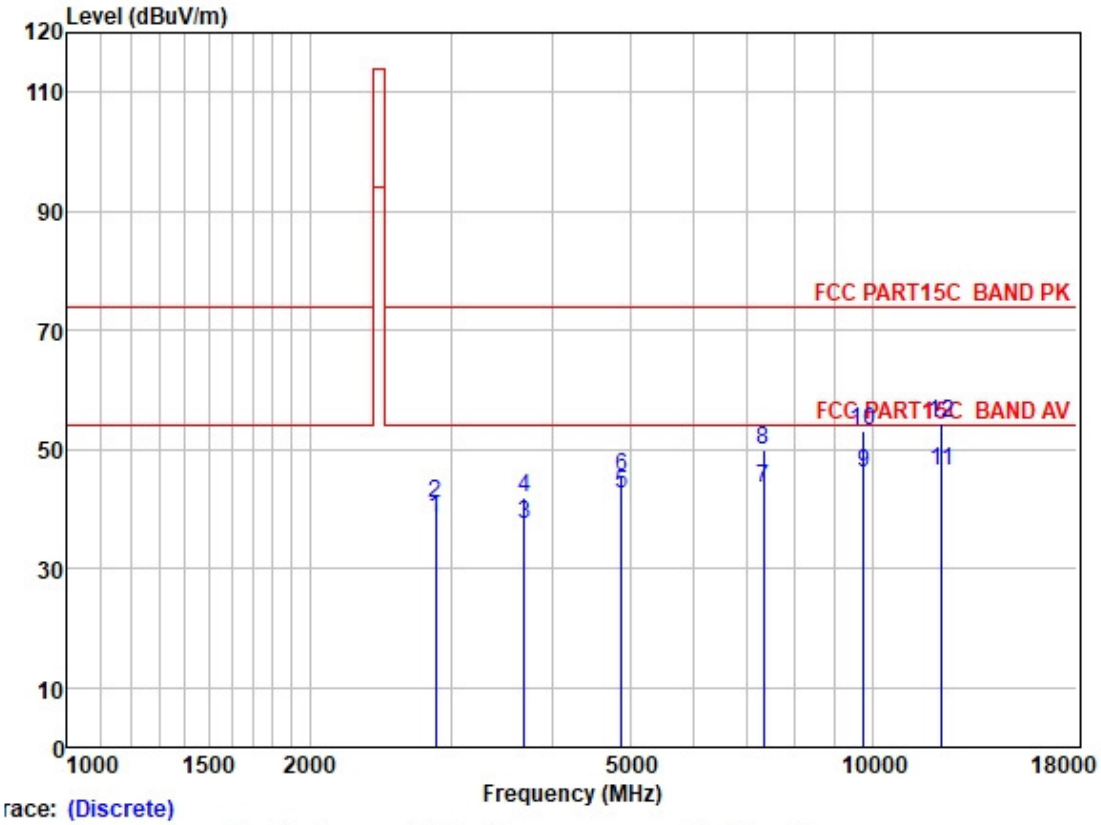

race: (Discrete)

	Freq	ReadLevel	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2871.934	43.60	28.26	3.70	37.15	38.41	54.00	-15.59	HORIZONTAL	Average
2	2871.934	46.14	28.26	3.70	37.15	40.95	74.00	-33.05	HORIZONTAL	Peak
3	3693.033	40.72	29.22	4.55	36.93	37.56	54.00	-16.44	HORIZONTAL	Average
4	3693.033	45.03	29.22	4.55	36.93	41.87	74.00	-32.13	HORIZONTAL	Peak
5	4882.993	42.43	31.56	5.52	36.95	42.56	54.00	-11.44	HORIZONTAL	Average
6	4882.993	45.17	31.56	5.52	36.95	45.30	74.00	-28.70	HORIZONTAL	Peak
7	7323.015	38.17	36.00	6.13	36.92	43.38	54.00	-10.62	HORIZONTAL	Average
8	7323.015	44.86	36.00	6.13	36.92	50.07	74.00	-23.93	HORIZONTAL	Peak
9	9764.349	37.53	38.50	7.02	37.09	45.96	54.00	-8.04	HORIZONTAL	Average
10	9764.349	44.82	38.50	7.02	37.09	53.25	74.00	-20.75	HORIZONTAL	Peak
11	12205.070	36.65	38.74	8.08	37.06	46.41	54.00	-7.59	HORIZONTAL	Average
12	12205.070	44.60	38.74	8.08	37.06	54.36	74.00	-19.64	HORIZONTAL	Peak

Mode:a; Polarization:Vertical; Modulation:GFSK; ; Channel:middle

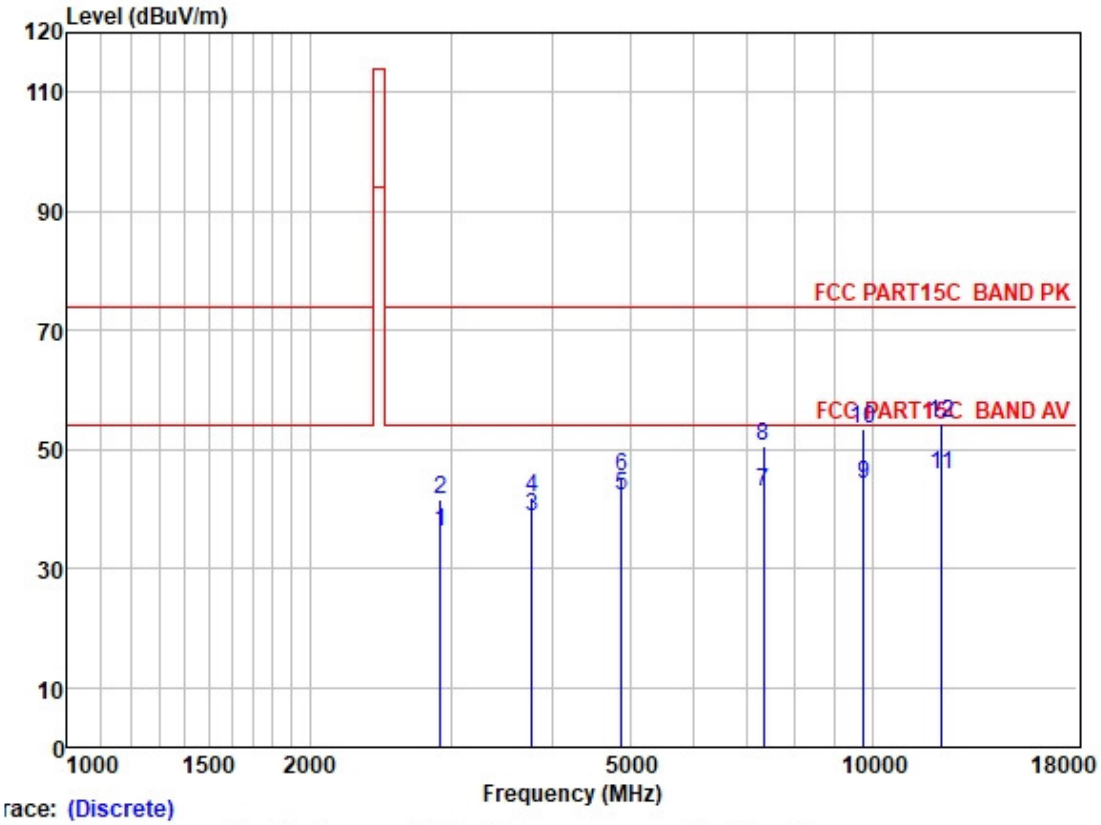

race: (Discrete)

	Freq	ReadLevel	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2905.331	41.37	28.30	3.71	37.13	36.25	54.00	-17.75	VERTICAL	Average
2	2905.331	46.85	28.30	3.71	37.13	41.73	74.00	-32.27	VERTICAL	Peak
3	3779.422	41.56	29.47	4.59	36.92	38.70	54.00	-15.30	VERTICAL	Average
4	3779.422	44.63	29.47	4.59	36.92	41.77	74.00	-32.23	VERTICAL	Peak
5	4882.977	41.97	31.56	5.52	36.95	42.10	54.00	-11.90	VERTICAL	Average
6	4882.977	45.40	31.56	5.52	36.95	45.53	74.00	-28.47	VERTICAL	Peak
7	7323.646	37.72	36.00	6.13	36.92	42.93	54.00	-11.07	VERTICAL	Average
8	7323.646	45.19	36.00	6.13	36.92	50.40	74.00	-23.60	VERTICAL	Peak
9	9764.525	35.58	38.50	7.02	37.09	44.01	54.00	-9.99	VERTICAL	Average
10	9764.525	45.04	38.50	7.02	37.09	53.47	74.00	-20.53	VERTICAL	Peak
11	12205.610	36.10	38.74	8.08	37.06	45.86	54.00	-8.14	VERTICAL	Average
12	12205.610	44.78	38.74	8.08	37.06	54.54	74.00	-19.46	VERTICAL	Peak

No.198 Kezhu Road, Scientech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

Mode:a; Polarization:Horizontal; Modulation:GFSK; ; Channel:High

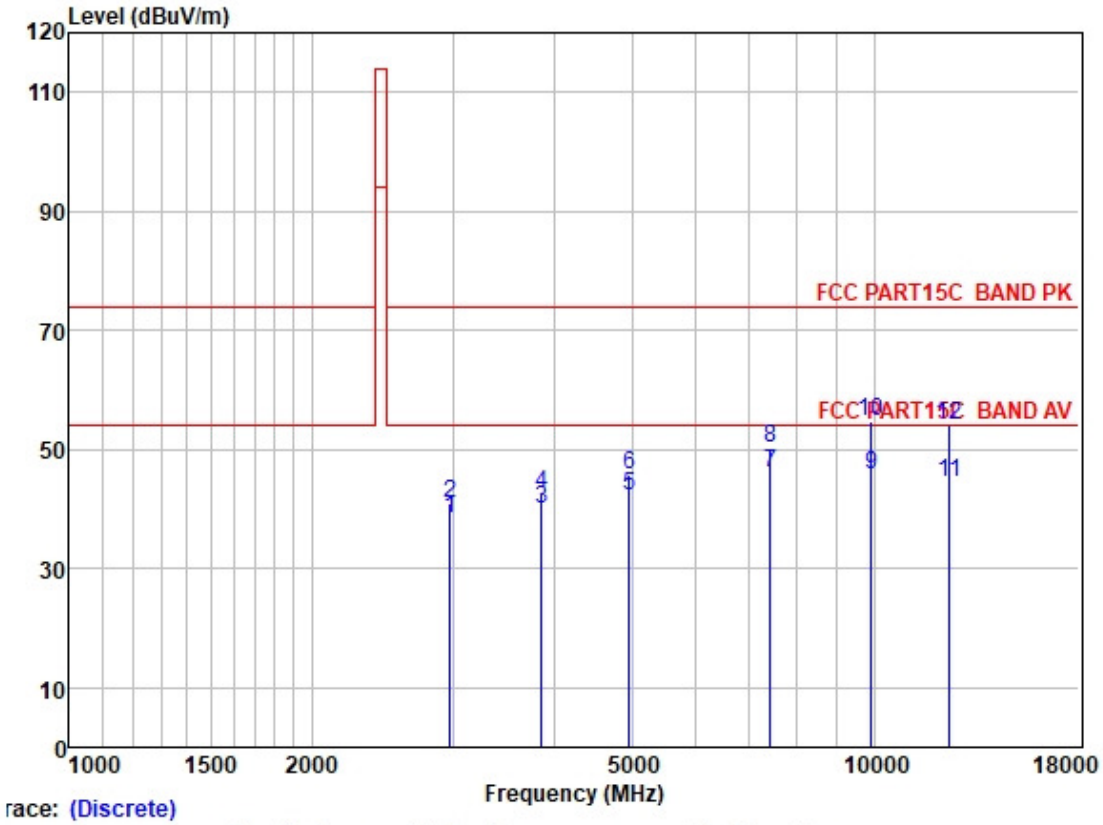

race: (Discrete)

	Freq	ReadLevel	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2973.293	43.22	28.38	3.78	37.09	38.29	54.00	-15.71	HORIZONTAL	Average
2	2973.293	45.93	28.38	3.78	37.09	41.00	74.00	-33.00	HORIZONTAL	Peak
3	3856.668	42.72	29.62	4.60	36.91	40.03	54.00	-13.97	HORIZONTAL	Average
4	3856.668	45.15	29.62	4.60	36.91	42.46	74.00	-31.54	HORIZONTAL	Peak
5	4960.143	41.75	31.65	5.65	36.96	42.09	54.00	-11.91	HORIZONTAL	Average
6	4960.143	45.26	31.65	5.65	36.96	45.60	74.00	-28.40	HORIZONTAL	Peak
7	7440.006	40.56	36.27	6.22	36.92	46.13	54.00	-7.87	HORIZONTAL	Average
8	7440.006	44.67	36.27	6.22	36.92	50.24	74.00	-23.76	HORIZONTAL	Peak
9	9920.230	37.15	38.65	6.96	37.10	45.66	54.00	-8.34	HORIZONTAL	Average
10	9920.230	46.22	38.65	6.96	37.10	54.73	74.00	-19.27	HORIZONTAL	Peak
11	12400.220	34.96	38.57	7.97	36.90	44.60	54.00	-9.40	HORIZONTAL	Average
12	12400.220	44.37	38.57	7.97	36.90	54.01	74.00	-19.99	HORIZONTAL	Peak

No.198 Kezhu Road, Scientech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

Mode:a; Polarization:Vertical; Modulation:GFSK; ; Channel:High

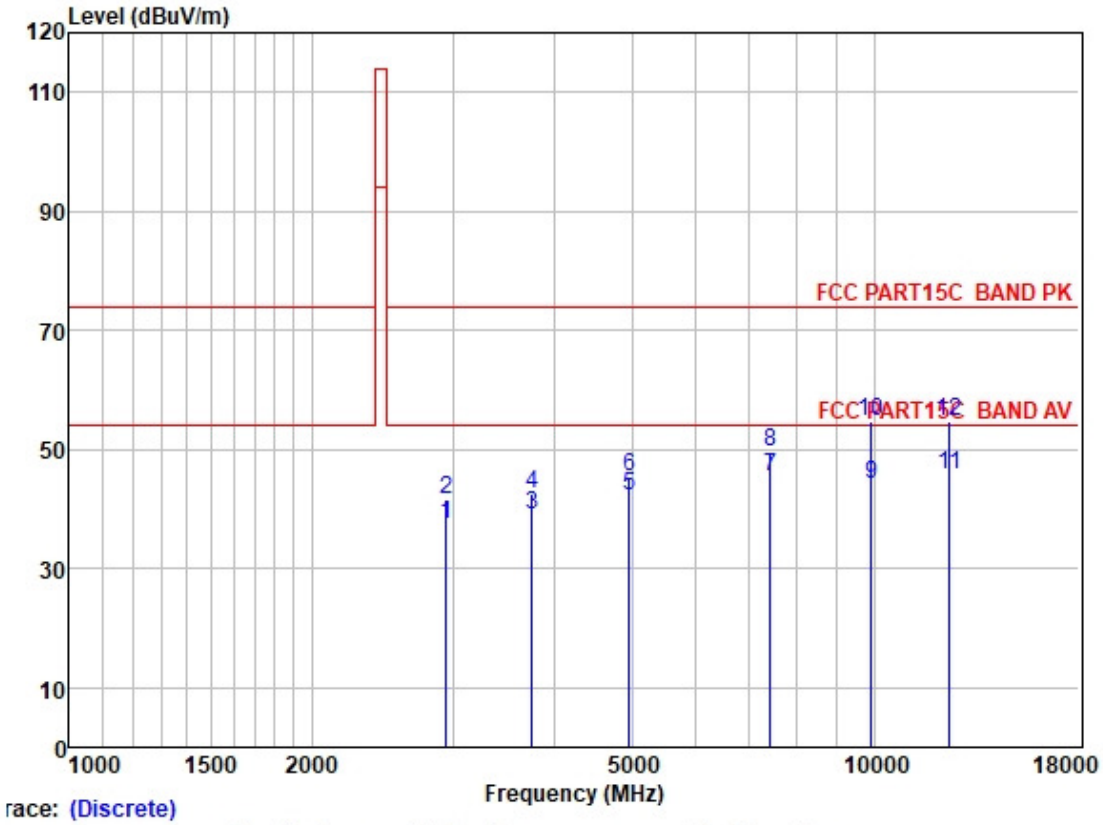

race: (Discrete)

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2939.115	42.55	28.34	3.74	37.10	37.53	54.00	-16.47	VERTICAL	Average
2	2939.115	46.68	28.34	3.74	37.10	41.66	74.00	-32.34	VERTICAL	Peak
3	3757.637	41.96	29.42	4.58	36.92	39.04	54.00	-14.96	VERTICAL	Average
4	3757.637	45.49	29.42	4.58	36.92	42.57	74.00	-31.43	VERTICAL	Peak
5	4960.007	41.96	31.65	5.65	36.96	42.30	54.00	-11.70	VERTICAL	Average
6	4960.007	45.13	31.65	5.65	36.96	45.47	74.00	-28.53	VERTICAL	Peak
7	7440.038	39.72	36.27	6.22	36.92	45.29	54.00	-8.71	VERTICAL	Average
8	7440.038	43.99	36.27	6.22	36.92	49.56	74.00	-24.44	VERTICAL	Peak
9	9920.390	35.67	38.65	6.96	37.10	44.18	54.00	-9.82	VERTICAL	Average
10	9920.390	46.07	38.65	6.96	37.10	54.58	74.00	-19.42	VERTICAL	Peak
11	12400.470	36.12	38.57	7.97	36.90	45.76	54.00	-8.24	VERTICAL	Average
12	12400.470	45.03	38.57	7.97	36.90	54.67	74.00	-19.33	VERTICAL	Peak

No.198 Kezhu Road, Scientech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

8 Appendix

8.1 Appendix 15.247

1.6dB Bandwidth

Test Mode	Test Channel	Ant	6dB Bandwidth [MHz]	Limit	Verdict
BLE	2402	Ant1	0.6823	0.5	PASS
BLE	2442	Ant1	0.6967	0.5	PASS
BLE	2480	Ant1	0.6911	0.5	PASS

TEST PLOT

6dB Bandwidth_BLE_2402_Ant1

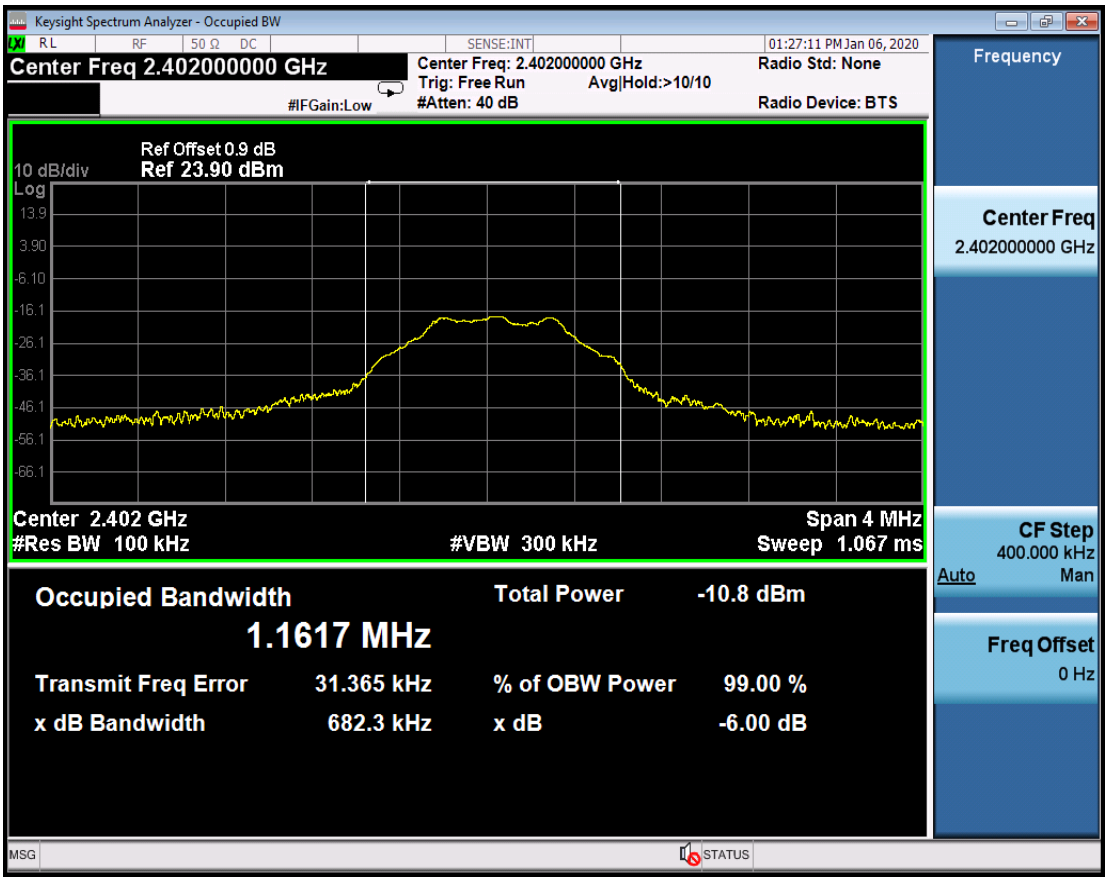

6dB Bandwidth_BLE_2442_Ant1

6dB Bandwidth_BLE_2480_Ant1

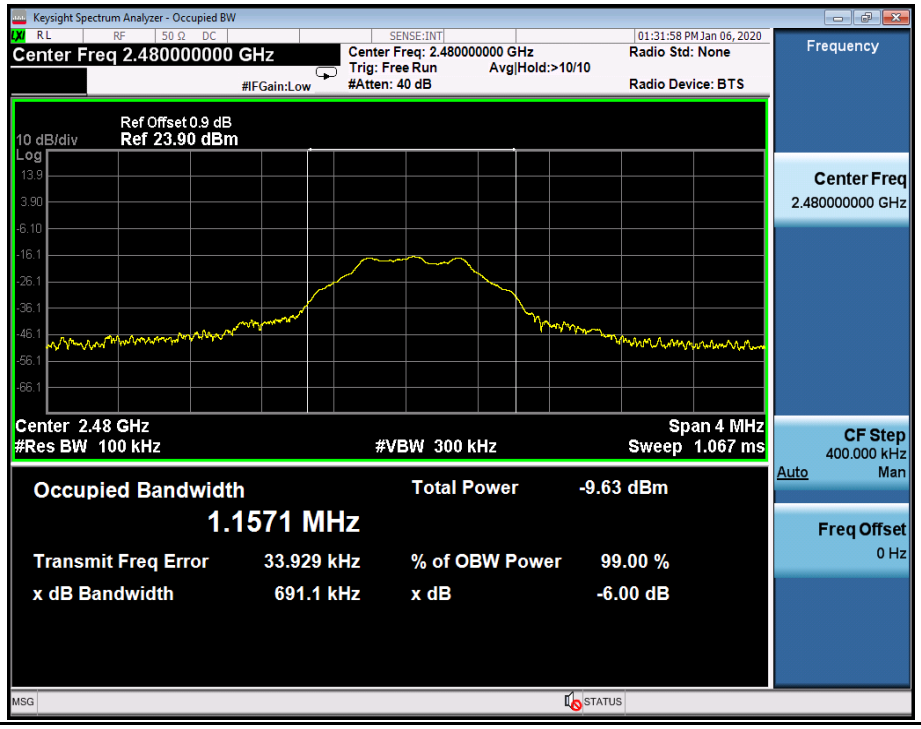

2.Maximum peak conducted output power

Test Mode	Test Channel	Ant	Power[dBm]	Limit[dBm]	Verdict
BLE	2402	Ant1	-16.394	30	PASS
BLE	2442	Ant1	-15.676	30	PASS
BLE	2480	Ant1	-15.29	30	PASS

TEST PLOT

Maximum peak conducted output power_BLE_2402_Ant1

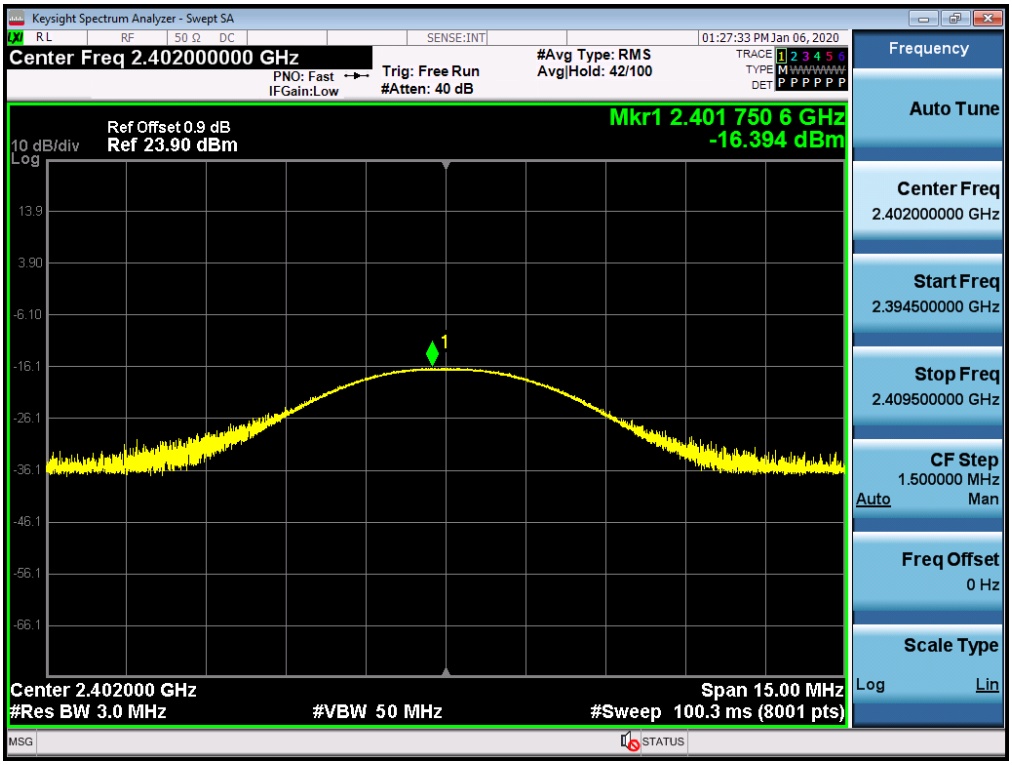

SGS-CSTC Standards Technical Services Co. Ltd. Guangzhou Branch, EMC Laboratory
No.198 Kezhu Road, Scientech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

Maximum peak conducted output power_BLE_2442_Ant1

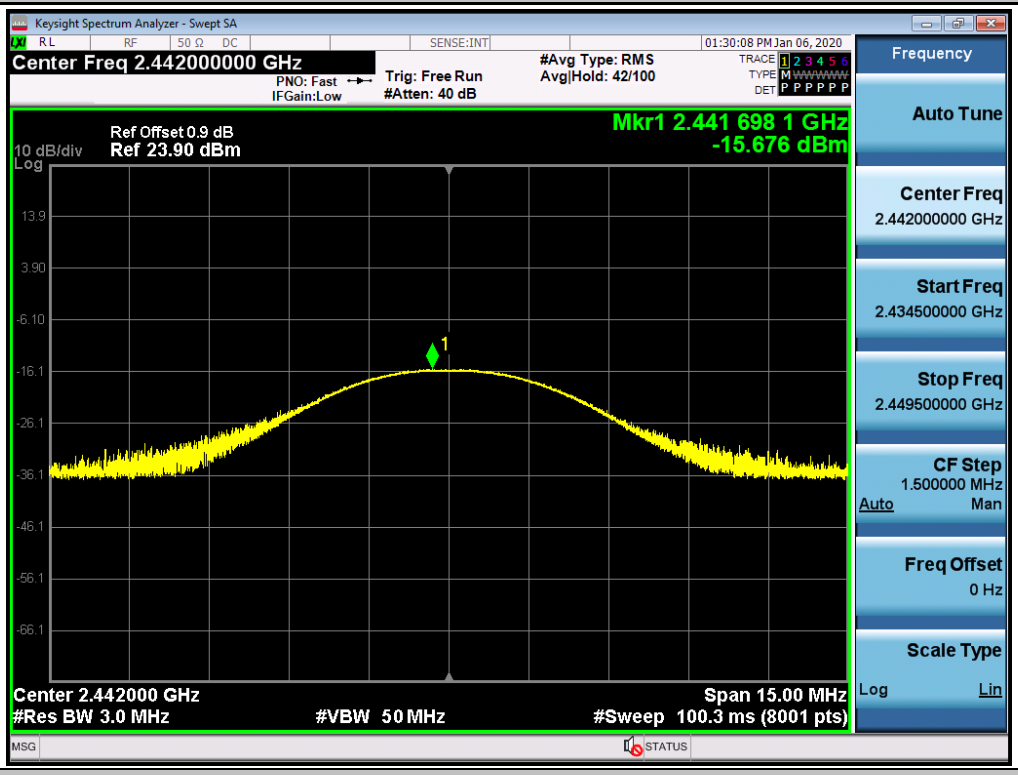

Maximum peak conducted output power_BLE_2480_Ant1

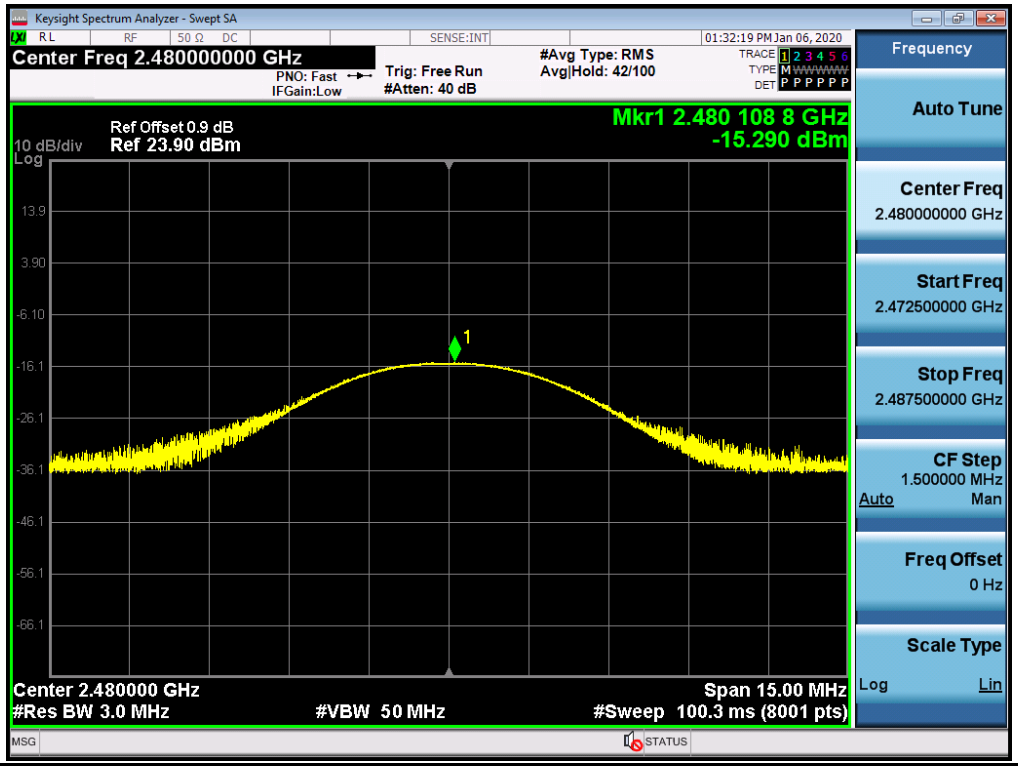

SGS-CSTC Standards Technical Services Co. Ltd. Guangzhou Branch, Electronic EMC Laboratory
No.198 Kezhu Road, Scientech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

3.Maximum Peak power spectral density

Test Mode	Test Channel	Ant	Result	Limit[dBm/3kHz]	Verdict
BLE	2402	Ant1	-29.493	8.00	PASS
BLE	2442	Ant1	-28.991	8.00	PASS
BLE	2480	Ant1	-28.595	8.00	PASS

TEST PLOT

Maximum Peak power spectral density_BLE_2402_Ant1

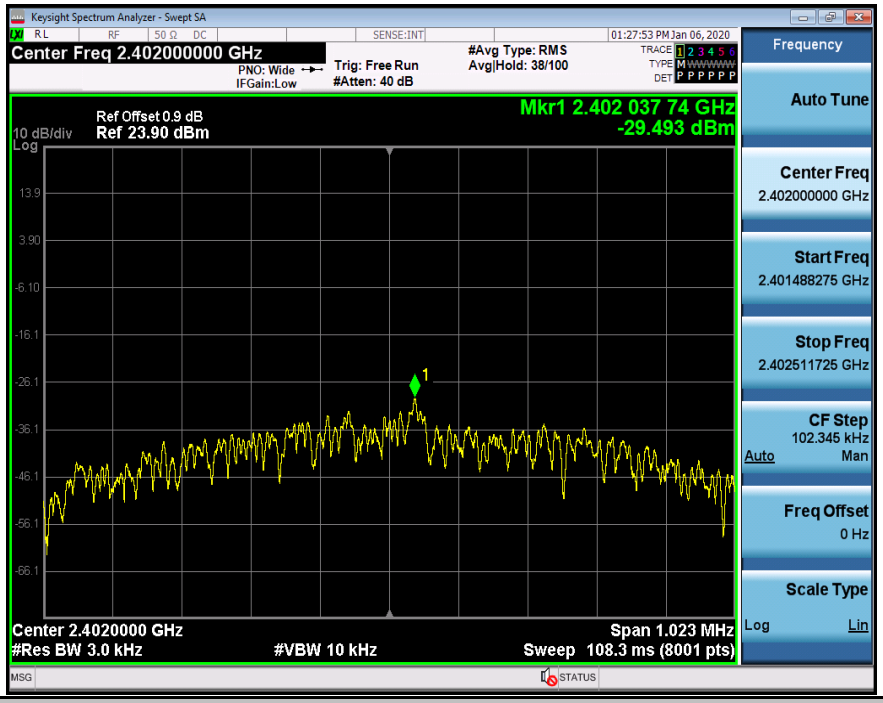

Maximum Peak power spectral density_BLE_2442_Ant1

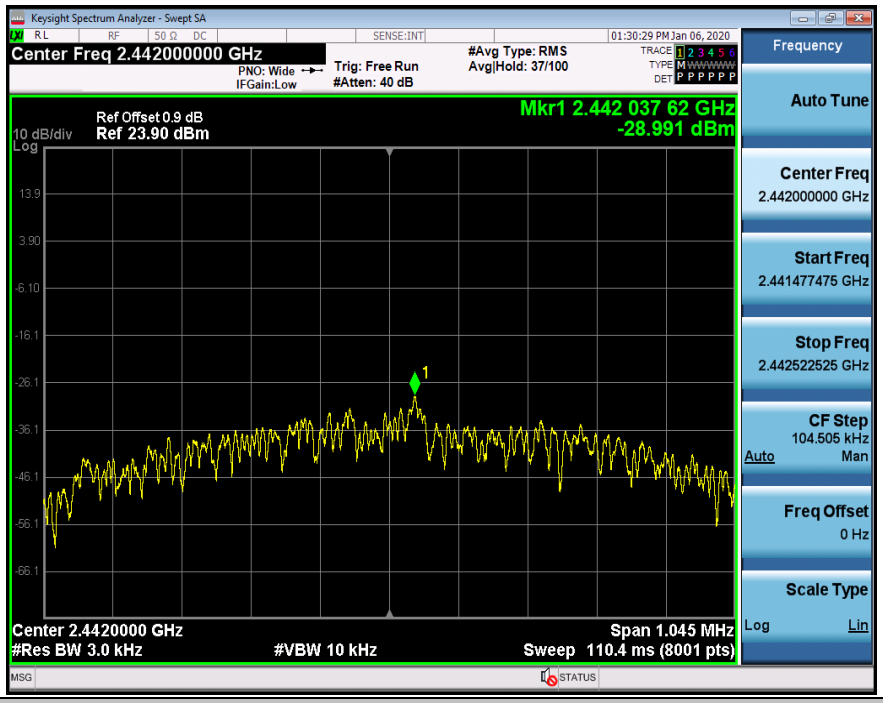

Maximum Peak power spectral density_BLE_2480_Ant1

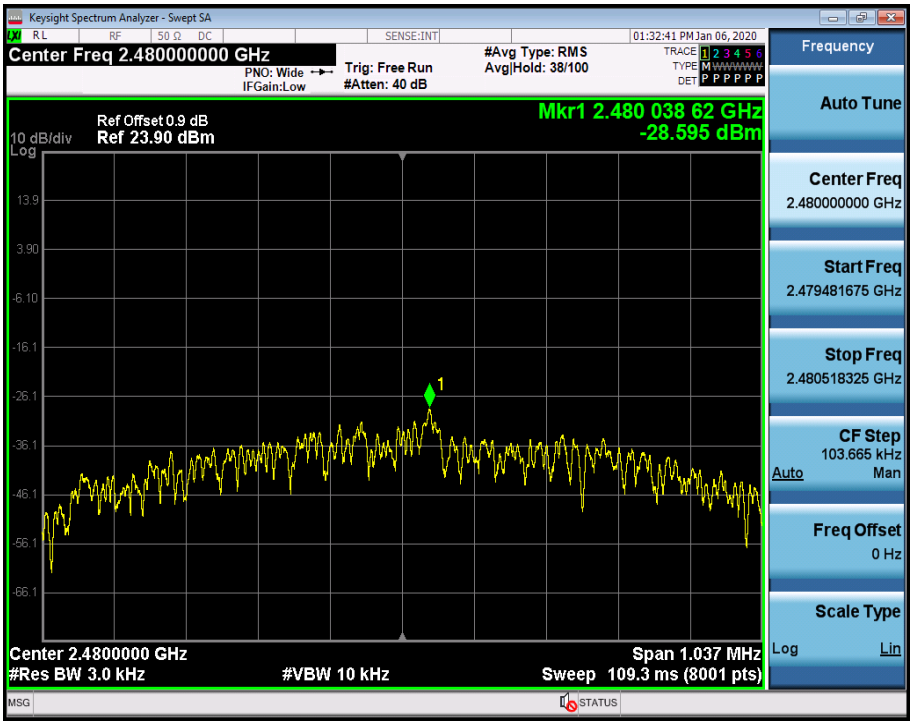

4.Band-edge for RF Conducted Emissions

Test Mode	Test Channel	Ant	Carrier Power[dBm]	Max. Spurious Level [dBm]	Limit [dBm]	Verdict
BLE	2402	Ant1	-17.753	-49.136	-37.75	PASS
BLE	2480	Ant1	-16.589	-48.836	-36.59	PASS

TEST PLOT

Band-edge for RF Conducted Emissions_BLE_2402_Ant1

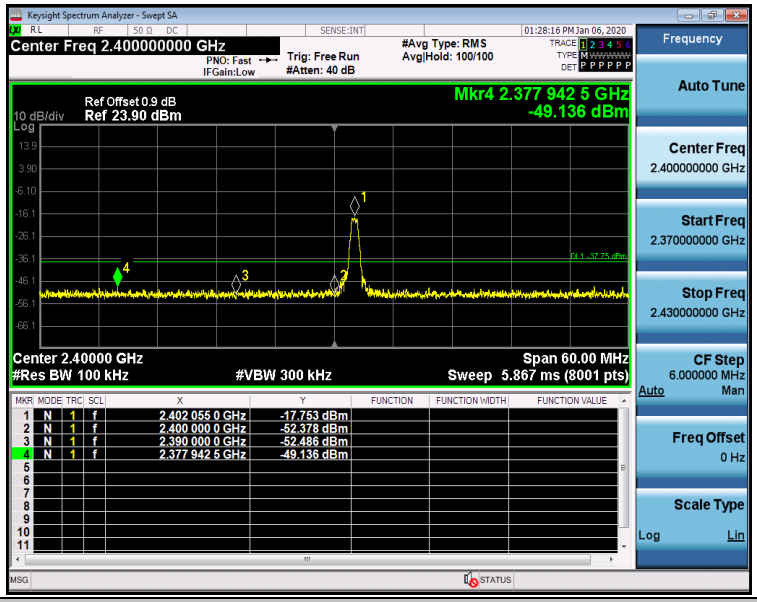

Band-edge for RF Conducted Emissions_BLE_2480_Ant1

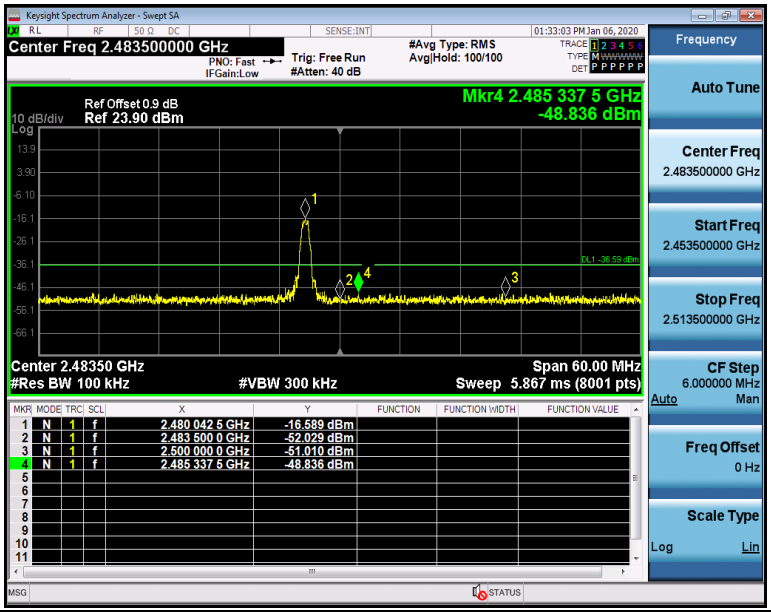

5.RF Conducted Spurious Emissions

Test Mode	Test Channel	Ant	StartFre [MHz]	StopFre [MHz]	RBW [kHz]	VBW [kHz]	Pref[dBm]	Max. Level [dBm]	Limit [dBm]	Verdict
BLE	2402	Ant1	30	10000	100	300	-17.733	-54.189	<-37.733	PASS
BLE	2402	Ant1	10000	26000	100	300	-17.733	-51.859	<-37.733	PASS
BLE	2442	Ant1	30	10000	100	300	-17.01	-52.595	<-37.01	PASS
BLE	2442	Ant1	10000	26000	100	300	-17.01	-51.193	<-37.01	PASS
BLE	2480	Ant1	30	10000	100	300	-16.621	-52.705	<-36.621	PASS
BLE	2480	Ant1	10000	26000	100	300	-16.621	-51.363	<-36.621	PASS

TEST PLOT

RF Conducted Spurious Emissions_BLE_2402_Ant1

Pref

CSE_1	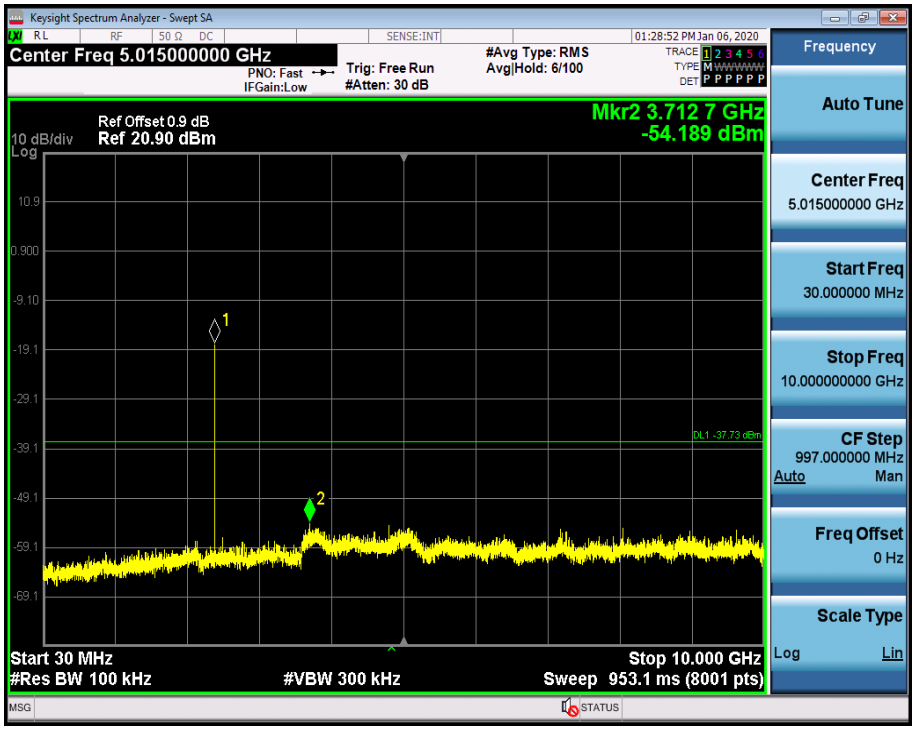
CSE_2	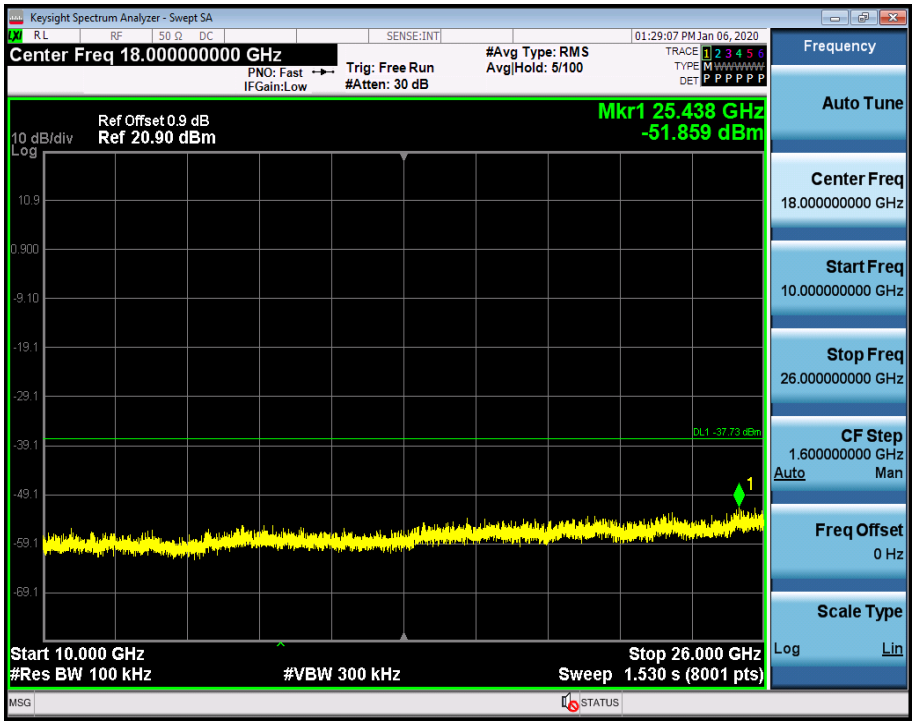

RF Conducted Spurious Emissions_BLE_2442_Ant1

Pref	
CSE_1	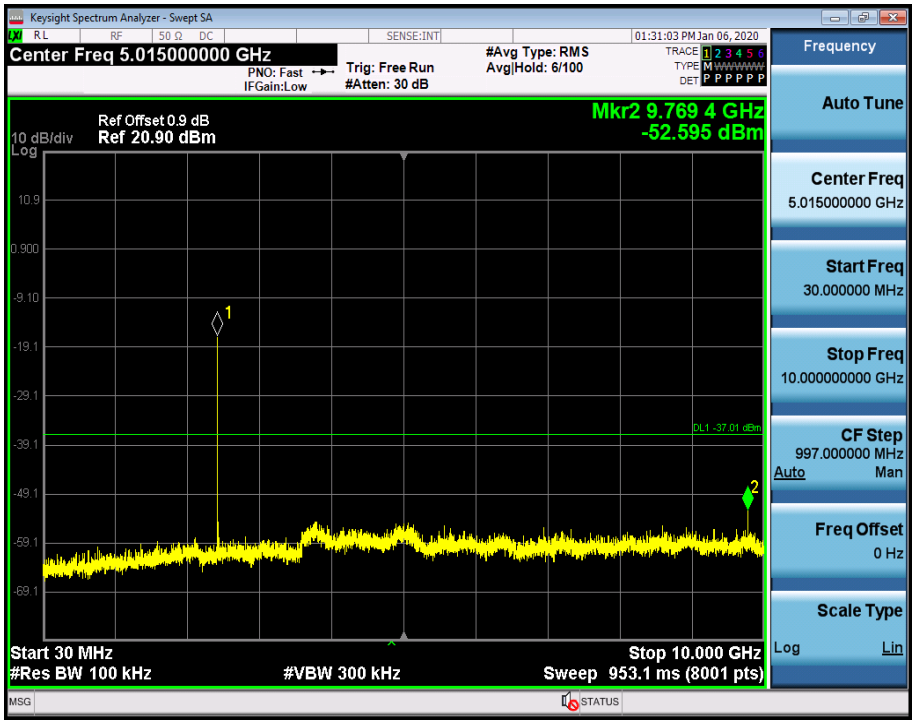

SGS-CSTC Standards Technical Services Co. Ltd. Guangzhou Branch
No.198 Kezhu Road, Scientech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

CSE_2

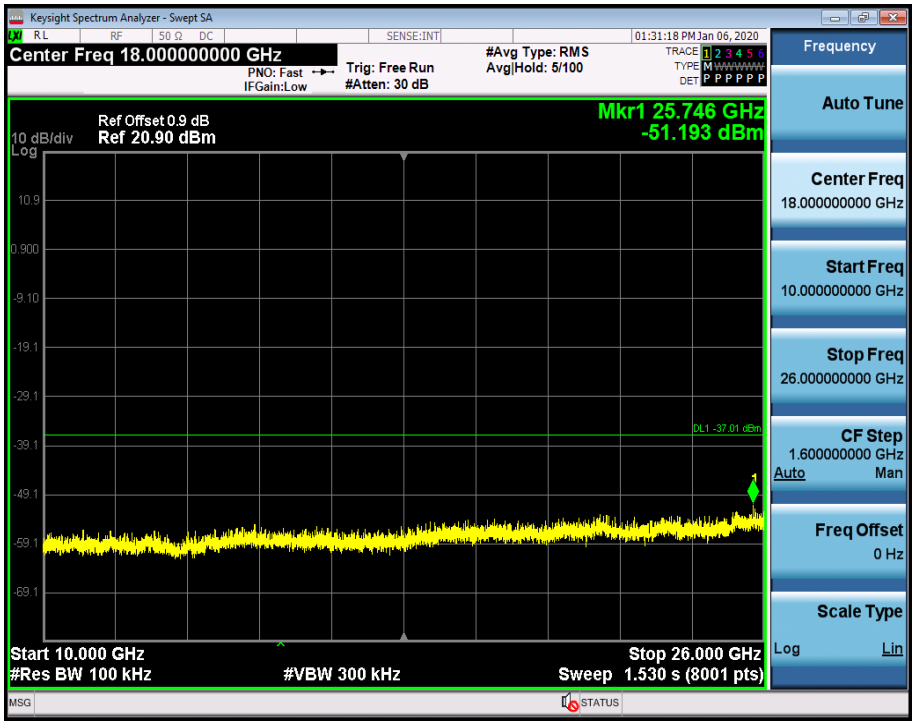

RF Conducted Spurious Emissions_BLE_2480_Ant1

Pref

CSE_1	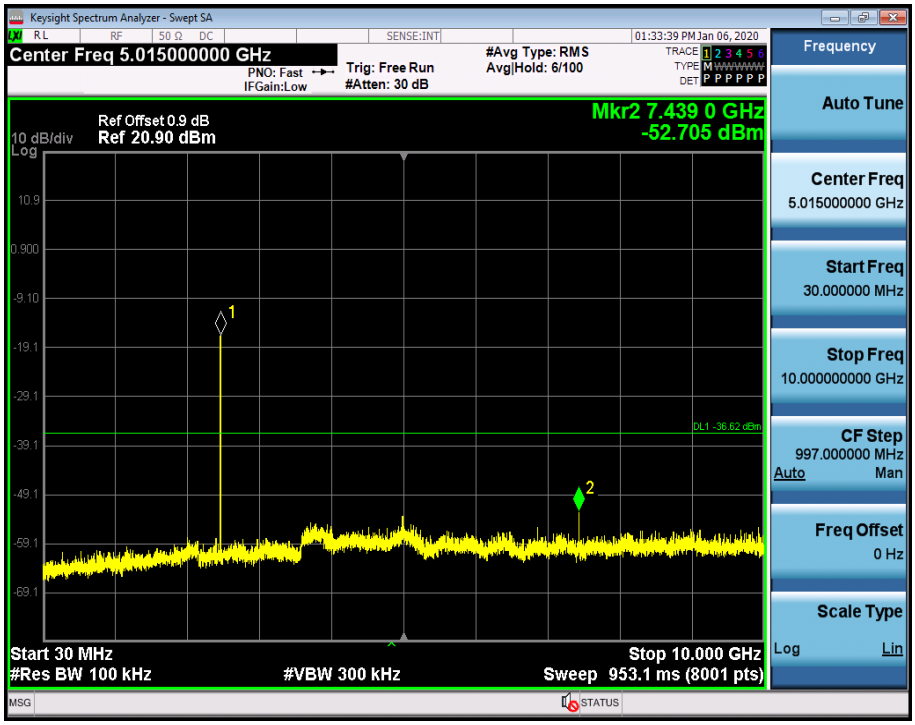
CSE_2	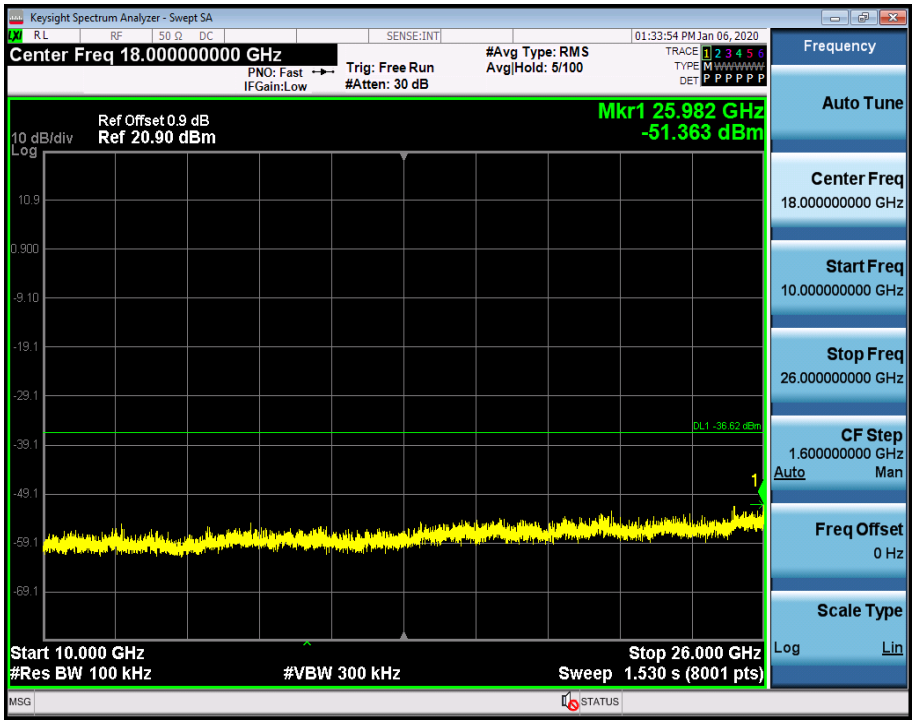

--End of Report--