



FCC TEST REPORT

FCC ID: 2ARE7-P81

On Behalf of

ShenZhenShi NewStone Technology co., Ltd

2.4G remote controller

Model No.: See model list for details

Prepared for : ShenZhenShi NewStone Technology co., Ltd
Address : B2 blvd, YuHong Industrial Park, No.20, XingYe West Road, ShaJing
Town, ShenZhen, China

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
Shenzhen, Guangdong, China

Report Number : A2310065-C01-R02
Date of Receipt : October 17, 2023
Date of Test : October 17, 2023 – November 2, 2023
Date of Report : November 2, 2023
Version Number : V0

TABLE OF CONTENTS

Description	Page
1. Summary Of Standards And Results	6
1.1. Description of Standards and Results	6
2. General Information	7
2.1. Description of Device (EUT)	7
2.2. Accessories of Device (EUT)	8
2.3. Tested Supporting System Details	8
2.4. Block Diagram of connection between EUT and simulators	8
2.5. Test Mode Description	9
2.6. Test Conditions	10
2.7. Test Facility	10
2.8. Measurement Uncertainty	10
2.9. Test Equipment List	11
3. Maximum Peak Output Power	13
3.1. Limit	13
3.2. Test Procedure	13
3.3. Test Setup	13
3.4. Test Result	13
4. Bandwidth	14
4.1. Limit	14
4.2. Test Procedure	14
4.3. Test Result	14
5. Carrier Frequency Separation	18
5.1. Limit	18
5.2. Test Procedure	18
5.3. Test Result	18
6. Number Of Hopping Channel	19
6.1. Limit	19
6.2. Test Procedure	19
6.3. Test Result	19
7. Dwell Time	20
7.1. Test limit	20
7.2. Test Procedure	20
7.3. Test Result	20
8. Radiated Emissions	22
8.1. Limit	22
8.2. Block Diagram of Test setup	23
8.3. Test Procedure	24
8.4. Test Result	24
9. Band Edge Compliance	30

9.1. Block Diagram of Test Setup	30
9.2. Limit	30
9.3. Test Procedure	30
9.4. Test Result.....	30
10. Power Line Conducted Emissions	34
10.1. Block Diagram of Test Setup	34
10.2. Limit	34
10.3. Test Procedure	34
10.4. Test Result.....	35
11. Antenna Requirements.....	36
11.1. Limit	36
11.2. Result	36
12. Test Setup Photo	37
12.1. Photos of Radiated emission.....	37
13. EUT Photo.....	38
14. Annex	51

TEST REPORT DECLARATION

Applicant : ShenZhenShi NewStone Technology co., Ltd
Address : B2 blvd, YuHong Industrial Park,No.20,XingYe West Road, ShaJing Town,
ShenZhen, China
Manufacturer : ShenZhenShi NewStone Technology co., Ltd
Address : B2 blvd, YuHong Industrial Park,No.20,XingYe West Road, ShaJing Town,
ShenZhen, China
EUT Description : 2.4G remote controller
(A) Model No. : See model list for details
(B) Trademark : N/A

Measurement Standard Used:

**FCC Rules and Regulations Part 15 Subpart C Section 15.247,
ANSI C63.10-2013**

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....:	Yannis Wen Project Engineer	
Approved by (name + signature).....:	Reak Yang Project Manager	
Date of issue.....	November 2, 2023	

Revision History

Revision	Issue Date	Revisions	Revised By
V0	November 2, 2023	Initial released Issue	Yannis Wen

1. Summary Of Standards And Results

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Test Item	Standards Paragraph	Result
Maximum Peak Output Power	FCC Part 15: 15.247(b)(1)	P
Bandwidth	FCC Part 15: 15.215	P
Carrier Frequency Separation	FCC Part 15: 15.247(a)(1)	P
Number Of Hopping Channel	FCC Part 15: 15.247(a)(1)	P
Dwell Time	FCC Part 15: 15.247(a)(1)	P
Radiated Emission	FCC Part 15: 15.209 FCC Part 15: 15.247(d)	P
Band Edge Compliance	FCC Part 15: 15.247(d)	P
Power Line Conducted Emissions	FCC Part 15: 15.207	P
Antenna requirement	FCC Part 15: 15.203	P
Note:	1. P is an abbreviation for Pass. 2. F is an abbreviation for Fail. 3. N/A is an abbreviation for Not Applicable.	

2. General Information

2.1. Description of Device (EUT)

Description/PMN : 2.4G remote controller

Model : See model list for details

Number/HVIN(s)

Diff. : There is no difference except the name of the model. All tests are made with the P81 model.

Test Voltage : DC 6V from battery

Radio Technology : 2.4G Technology

Operation frequency : 2405MHz-2478MHz

Modulation : GFSK

Channel No. : 73 Channels

Antenna Type : Internal Antenna, max gain 1.86dBi.
Antenna information is provided by applicant.

Software version : V1.0

Hardware version : V1.0

Remark:

1. The worst-case simultaneous transmission configuration was evaluated with no non-compliance found. Results in this report are only for 2.4G function, and there is no other transmitter involved.


2.2. Accessories of Device (EUT)

Accessories : /
Manufacturer : /
Model : /
Input : /
Output : /

2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification or SDOC
1.	Notebook PC	Lenovo	ThinkPad E14	N/A	SDOC

2.4. Block Diagram of connection between EUT and simulators

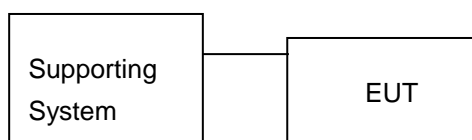

2.5. Test Mode Description

The test software was used to control EUT work in Continuous TX mode, and select test channel, wireless mode

Channel list

CH0	2405MHz	CH16	2421MHz	CH32	2437MHz	CH48	2453MHz	CH64	2469MHz
CH1	2406MHz	CH17	2422MHz	CH33	2438MHz	CH49	2454MHz	CH65	2470MHz
CH2	2407MHz	CH18	2423MHz	CH34	2439MHz	CH50	2455MHz	CH66	2471MHz
CH3	2408MHz	CH19	2424MHz	CH35	2440MHz	CH51	2456MHz	CH67	2472MHz
CH4	2409MHz	CH20	2425MHz	CH36	2441MHz	CH52	2457MHz	CH68	2473MHz
CH5	2410MHz	CH21	2426MHz	CH37	2442MHz	CH53	2458MHz	CH69	2474MHz
CH6	2411MHz	CH22	2427MHz	CH38	2443MHz	CH54	2459MHz	CH70	2475MHz
CH7	2412MHz	CH23	2428MHz	CH39	2444MHz	CH55	2460MHz	CH71	2476MHz
CH8	2413MHz	CH24	2429MHz	CH40	2445MHz	CH56	2461MHz	CH71	2476MHz
CH9	2414MHz	CH25	2430MHz	CH41	2446MHz	CH57	2462MHz	CH72	2478MHz
CH10	2415MHz	CH26	2431MHz	CH42	2447MHz	CH58	2463MHz		
CH11	2416MHz	CH27	2432MHz	CH43	2448MHz	CH59	2464MHz		
CH12	2417MHz	CH28	2433MHz	CH44	2449MHz	CH60	2465MHz		
CH13	2418MHz	CH29	2434MHz	CH45	2450MHz	CH61	2466MHz		
CH14	2419MHz	CH30	2435MHz	CH46	2451MHz	CH62	2467MHz		
CH15	2420MHz	CH31	2436MHz	CH47	2452MHz	CH63	2468MHz		

Tested mode, channel, and data rate information		
Mode	Channel	Frequency (MHz)
Carrier Tx Mode	CH0	2405
	CH36	2441
	CH72	2478
GFSK hopping on Tx Mode	CH0 to CH72	2405 to 2478
GFSK hopping off Tx Mode	CH0	2402
	CH36	2441
	CH72	2478

2.6. Test Conditions

Items	Required	Actual
Temperature range:	15-35°C	25°C
Humidity range:	25-75%	56%
Pressure range:	86-106kPa	98kPa

2.7. Test Facility

Shenzhen Alpha Product Testing Co., Ltd

Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission

Registration Number: 293961

Designation Number: CN1236

July 15, 2019 Certificated by IC

Registration Number: CN0085

2.8. Measurement Uncertainty

(95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	1.63dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	3.5dB
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.74dB(Polarize: V)
	3.76dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	3.77dB(Polarize: V)
	3.80dB(Polarize: H)
Uncertainty for radio frequency	5.06×10^{-8} GHz
Uncertainty for conducted RF Power	0.40dB
Uncertainty for temperature	0.2°C
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%

2.9. Test Equipment List

Equipment	Manufacture	Model No.	Firmware version	Serial No.	Last cal.	Cal Interval
9*6*6 anechoic chamber	CHENYU	9*6*6	/	N/A	2022.05.17	3Year
Spectrum analyzer	ROHDE&SCHWARZ	FSV40-N	2.3	102137	2023.08.16	1Year
Spectrum analyzer	Agilent	N9020A	A.14.16	MY499100060	2023.08.16	1Year
Receiver	ROHDE&SCHWARZ	ESR	2.28 SP1	1316.3003K03-10 2082-Wa	2023.08.16	1Year
Receiver	R&S	ESCI	4.42 SP1	101165	2023.08.16	1Year
Bilog Antenna	Schwarzbeck	VULB 9168	/	VULB 9168#627	2023.08.28	1Year
Horn Antenna	SCHWARZBECK	BBHA 9120 D	/	2106	2023.08.19	1Year
Loop Antenna	SCHWARZBECK	FMZB 1519B	/	00128	2023.08.19	1Year
RF Cable	Resenberger	Cable 1	/	RE1	2023.08.16	1Year
RF Cable	Resenberger	Cable 2	/	RE2	2023.08.16	1Year
RF Cable	Resenberger	Cable 3	/	CE1	2023.08.16	1Year
Pre-amplifier	HP	HP8347A	/	2834A00455	2023.08.16	1Year
Pre-amplifier	Agilent	8449B	/	3008A02664	2023.08.16	1Year
L.I.S.N.#1	Schwarzbeck	NSLK8126	/	8126-466	2023.08.16	1Year
L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	/	101043	2023.08.16	1Year
Horn Antenna	SCHWARZBECK	BBHA 9170	/	00946	2023.08.19	1Year
Preamplifier	SKET	LNPA_1840 -50	/	SK2018101801	2023.08.16	1 Year
Power Meter	Agilent	E9300A	/	MY41496628	2023.08.16	1 Year
Power Sensor	DARE	RPR3006W	/	15100041SNO91	2023.08.16	1 Year
Temp. & Humid. Chamber	Teelong	TL-HW408S	/	TL-20191205-01	2023.07.25	1 Year
Switching Mode Power Supply	JUNKE	JK12010S	/	20140927-6	2023.08.16	1 Year
Adjustable attenuator	MWRFtest	N/A	/	N/A	N/A	N/A
10dB Attenuator	Mini-Circuits	DC-6G	/	N/A	N/A	N/A

Software Information			
Test Item	Software Name	Manufacturer	Version
RE	EZ-EMC	Farad	Alpha-3A1
RF-CE	MTS 8310	MWRFtest	V2.0.0.0

3. Maximum Peak Output Power

3.1. Limit


Please refer FCC part 15.247 & RSS-247..

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W

3.2. Test Procedure

The transmitter output is connected to the RF Power meter. The Power meter is set to the peak power detection.

3.3. Test Setup

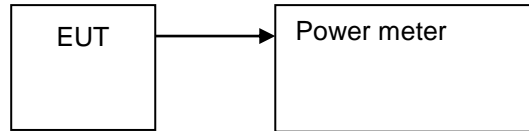

3.4. Test Result

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	E.I.R.P. (dBm)	Limit (dBm)	Verdict
NVNT	2.4G	2405	Ant1	5.98	0	7.844	21	Pass
NVNT	2.4G	2441	Ant1	5.18	0	7.041	21	Pass
NVNT	2.4G	2478	Ant1	5.16	0	7.017	21	Pass

4. Bandwidth

4.1. Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in RSS-GEN, FCC Section 15.247(a)(1), must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.


4.2. Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

4.3. Test Result


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	2.4G	2405	Ant1	0.214
NVNT	2.4G	2441	Ant1	0.116
NVNT	2.4G	2478	Ant1	0.26

OBW NVNT 2.4G 2405MHz Ant1

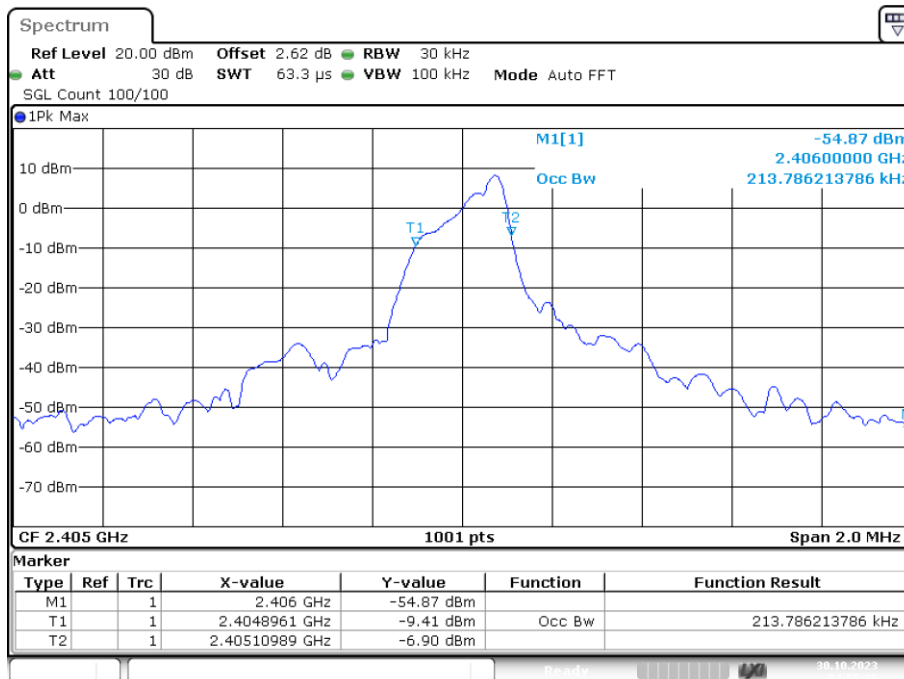


Date: 30.OCT.2023 04:55:26

OBW NVNT 2.4G 2441MHz Ant1

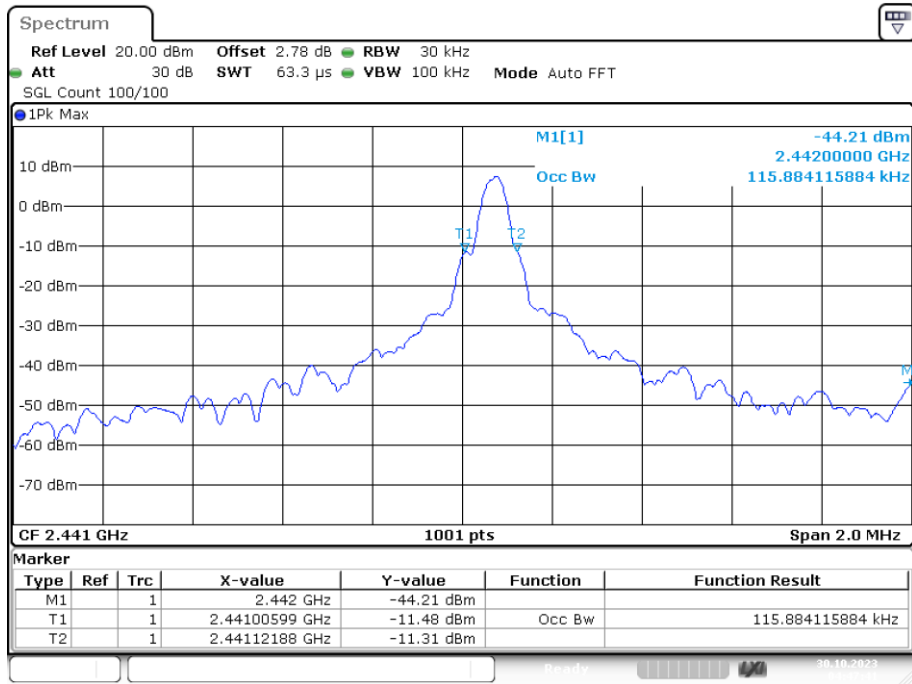

Date: 30.OCT.2023 04:47:41


OBW NVNT 2.4G 2478MHz Ant1

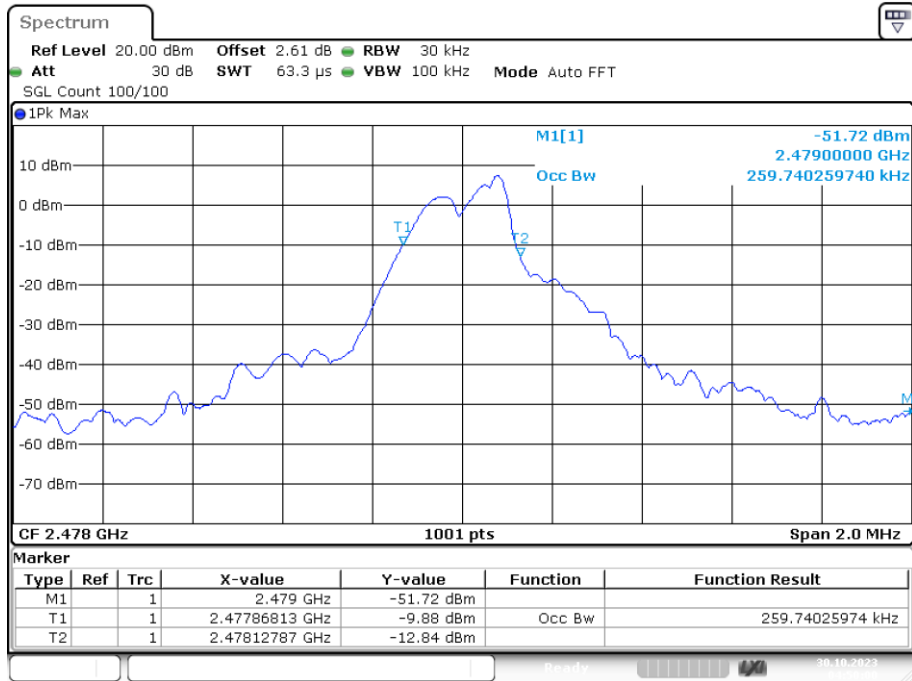


Date: 30.OCT.2023 04:50:00

Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVNT	2.4G	2405	Ant1	0.434	/	Pass
NVNT	2.4G	2441	Ant1	0.276	/	Pass
NVNT	2.4G	2478	Ant1	0.084	/	Pass


-20dB Bandwidth NVNT 2.4G 2405MHz Ant1

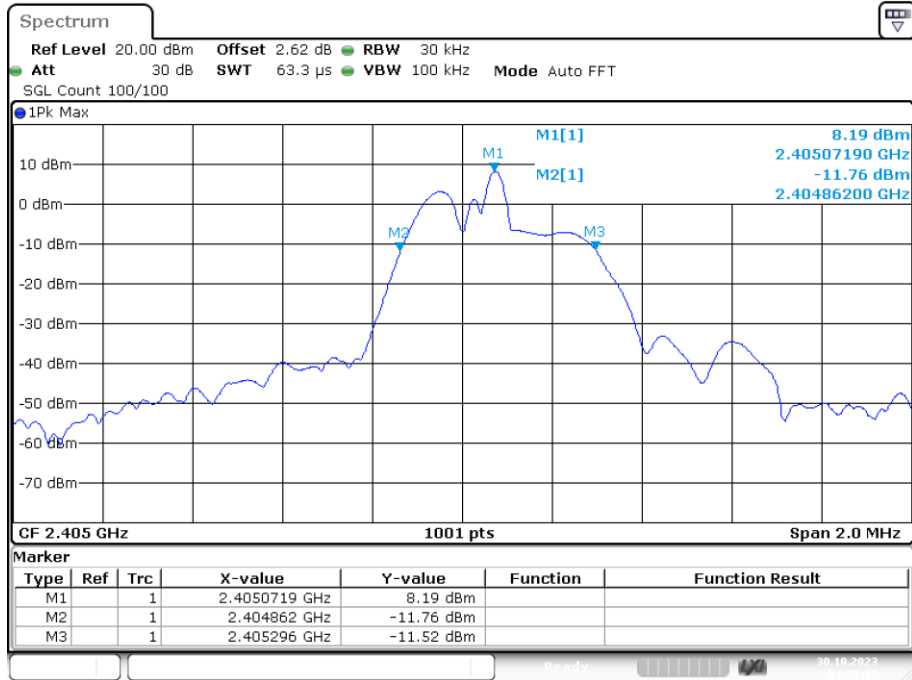

-20dB Bandwidth NVNT 2.4G 2441MHz Ant1

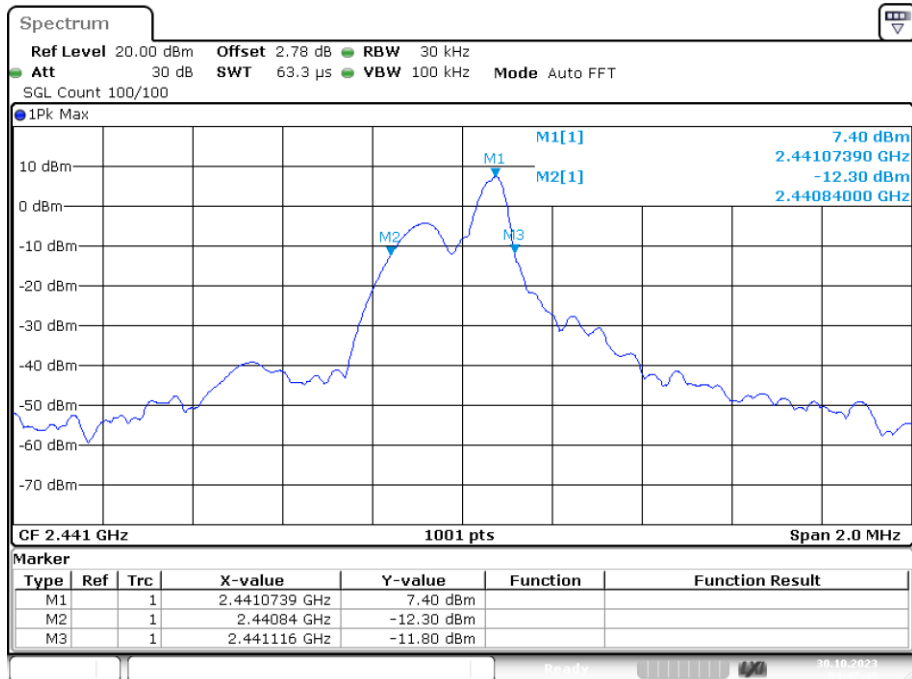

-20dB Bandwidth NVNT 2.4G 2478MHz Ant1

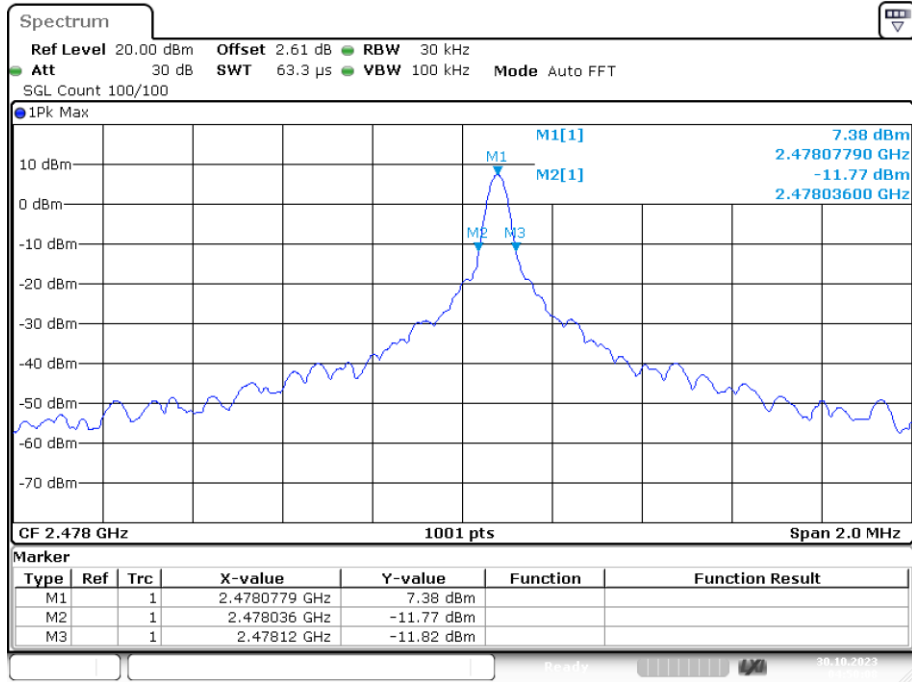

Date: 30.OCT.2023 04:50:08

5. Carrier Frequency Separation

5.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW


5.2. Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The carrier frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW.

5.3. Test Result

Condition	Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	2.4G	Ant1	2441.054	2442.056	1.002	0.025	Pass

CFS NVNT 2.4G 2441MHz Ant1

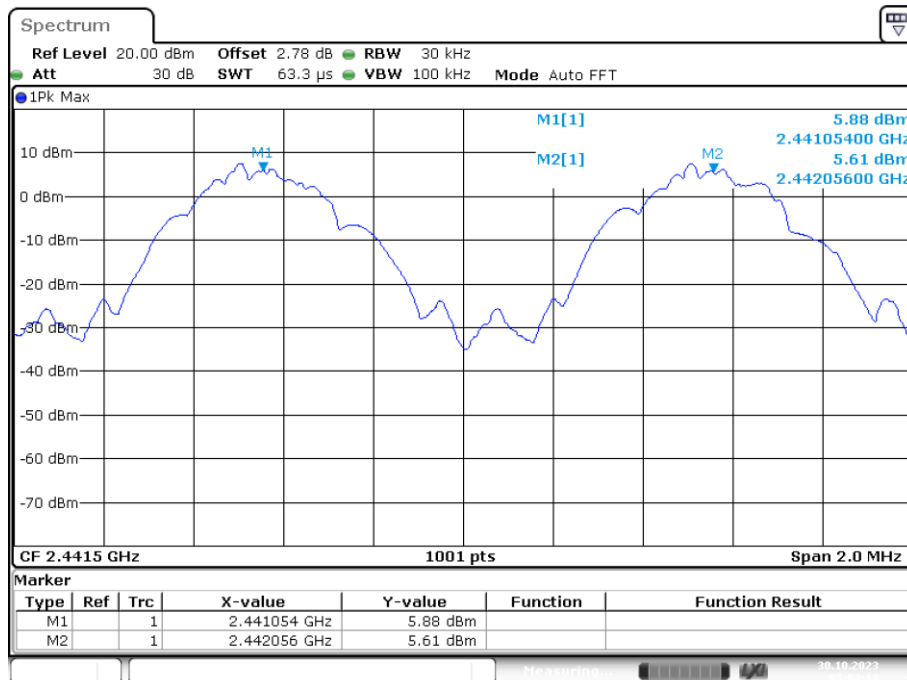

Date: 30.OCT.2023 05:04:13

6. Number Of Hopping Channel

6.1. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels


6.2. Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The number of hopping channel was measured by spectrum analyzer with 100kHz RBW and 300kHz VBW.

6.3. Test Result

Condition	Mode	Antenna	Hopping Number	Limit	Verdict
NVNT	2.4G	Ant1	73	15	Pass

Hopping No. NVNT 2.4G 2441MHz Ant1

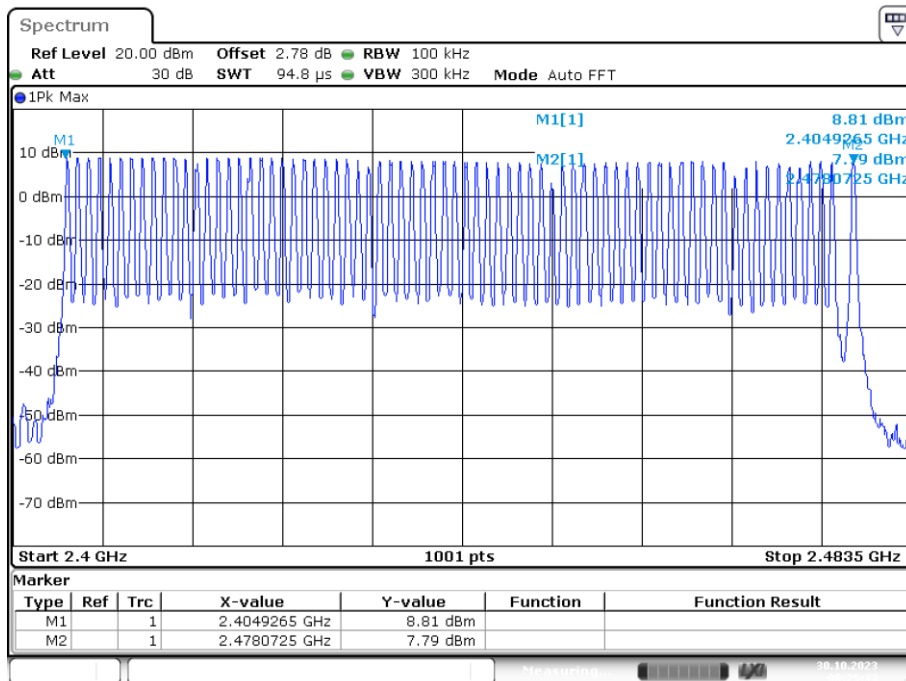

7. Dwell Time

7.1. Test limit

Please refer FCC part 15.247 & RSS-247.

Frequency hopping systems operating in the 2400MHz-2483.5 MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channel employed.

7.2. Test Procedure

7.2.1. Place the EUT on the table and set it in transmitting mode.

7.2.2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

7.2.3. Set center frequency of spectrum analyzer = operating frequency.

7.2.4. Set the spectrum analyzer as RBW, VBW=1MHz, Span = 0Hz, Sweep = auto.

7.2.5. Repeat above procedures until all frequency measured were complete.


7.3. Test Result

PASS.

Detailed information please see the following page.


Condition	Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
NVNT	2.4G	2441	Ant1	1.17	49.14	42	31600	400	Pass

Dwell NVNT 2.4G 2441MHz Ant1 One Burst

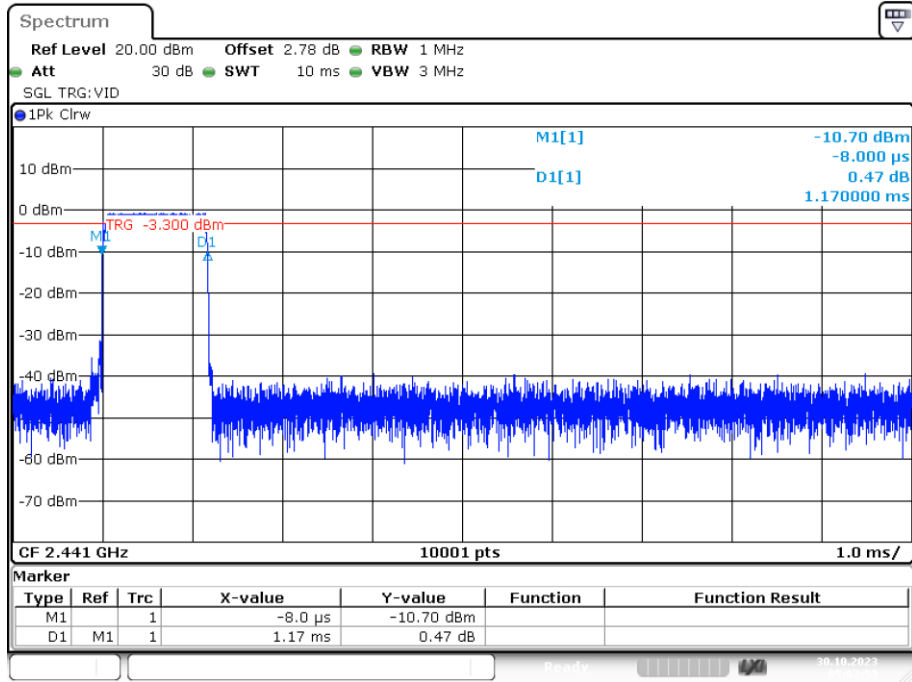

Date: 30.OCT.2023 05:07:52

Dwell NVNT 2.4G 2441MHz Ant1 Accumulated

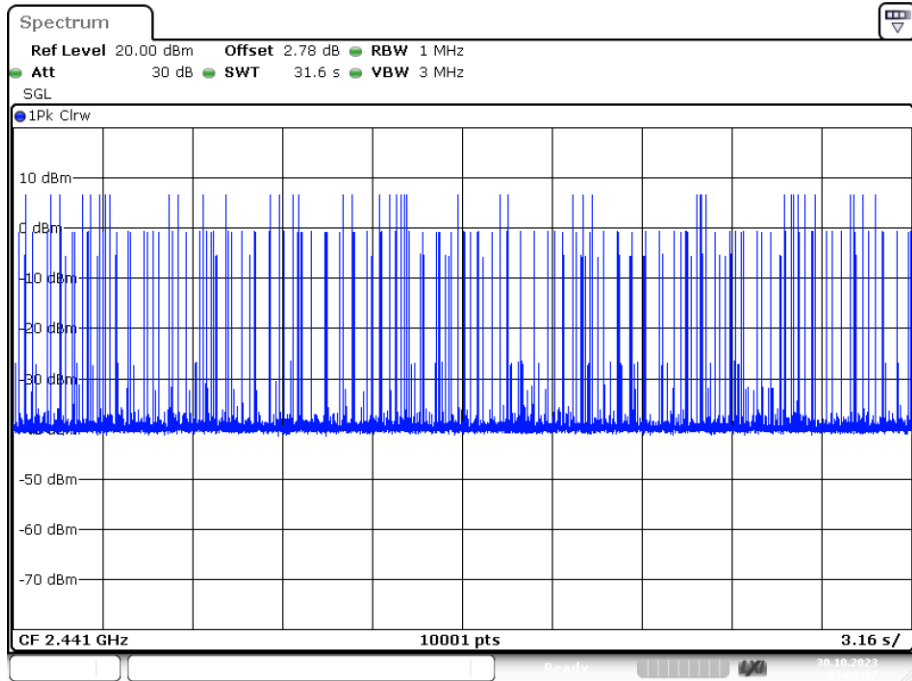

Date: 30.OCT.2023 05:08:27

8. Radiated Emissions

8.1. Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)


15.209 Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009-0.490	300	2400/F(KHz)	/
0.490-1.705	30	24000/F(KHz)	/
1.705-30	30	30	29.5
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above	1000	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	


Note: The peak limit is 20 dB higher than the average limit

8.2. Block Diagram of Test setup


8.2.1 In 3m Anechoic Chamber Test Setup Diagram for below 30MHz

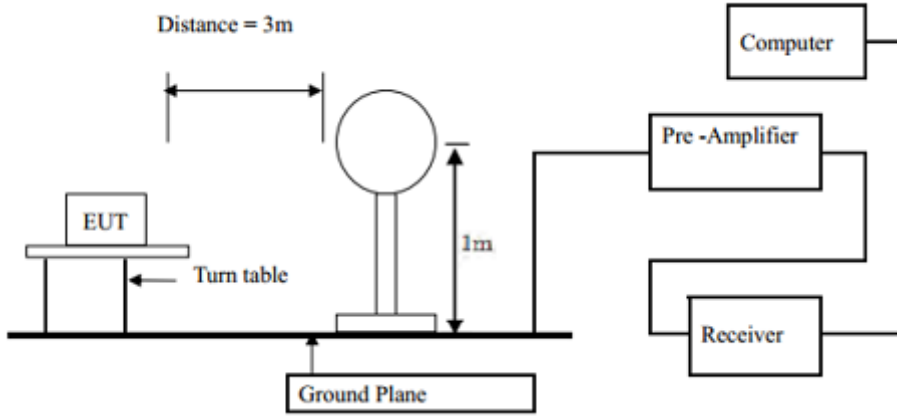

8.2.1 In 3m Anechoic Chamber Test Setup Diagram for below 1GHz

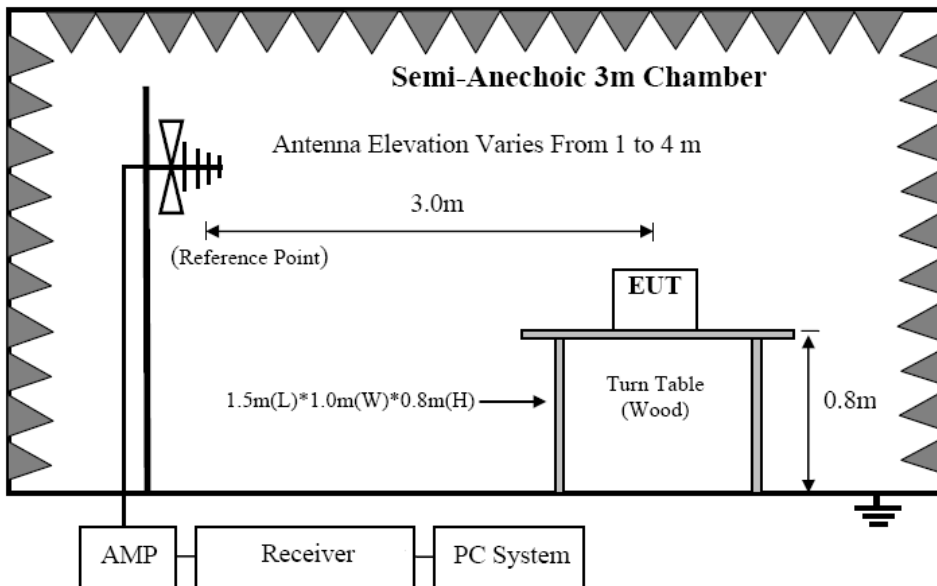

8.2.2 In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz

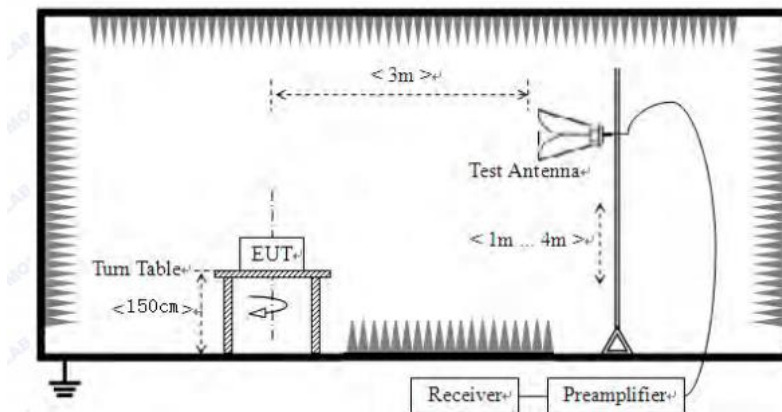

Note: For harmonic emissions test a appropriate high pass filter was inserted in the input port of AMP.

8.3. Test Procedure

- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber.
- (2) Setup EUT and simulator
- (3) Test antenna was located 3m from the EUT on an adjustable mast. Below pre-scan procedure was first performed in order to find prominent radiated emissions.
 - (a) Change work frequency or channel of device if practicable.
 - (b) Change modulation type of device if practicable.
 - (c) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions
- (4) Spectrum frequency from 9KHz to 25GHz (tenth harmonic of fundamental frequency) was investigated
- (5) For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10 :2013on Radiated Emission test.
- (6) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RBW is set at 1MHz, VBW is set at 10Hz for Average measure.

8.4. Test Result


We have scanned from 9kHz to the 10th harmonic of the EUT's highest frequency.
Detailed information please see the following page.

From 9KHz to 30MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

From 30MHz to 1000MHz: Conclusion: PASS

Vertical:

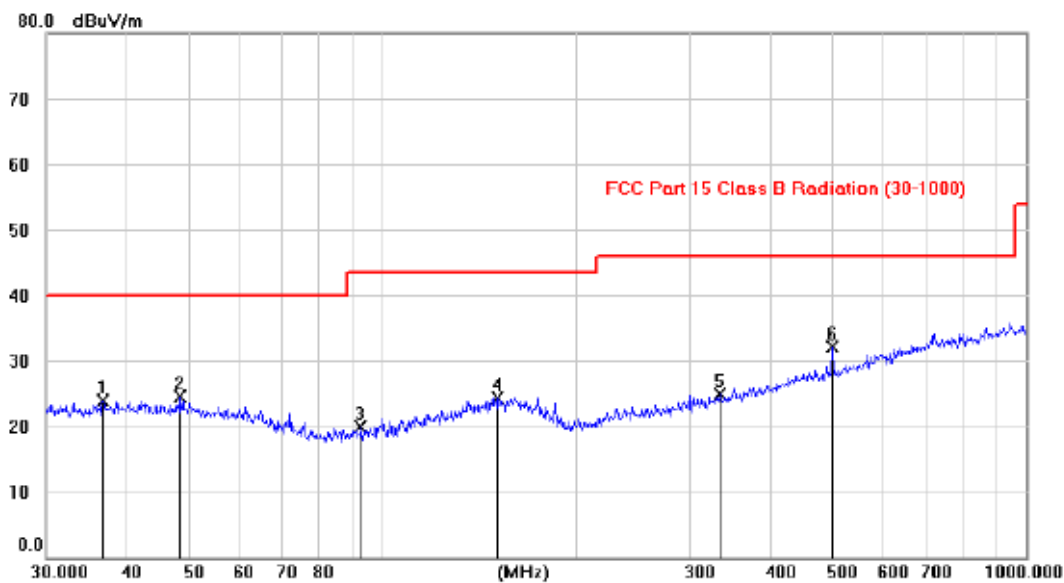


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		36.8350	9.86	14.04	23.90	40.00	-16.10			peak
2		48.5696	10.54	14.06	24.60	40.00	-15.40			peak
3		92.7222	9.60	10.31	19.91	43.50	-23.59			peak
4		150.5554	9.21	15.06	24.27	43.50	-19.23			peak
5		334.0770	9.97	14.93	24.90	46.00	-21.10			peak
6	*	500.0088	13.94	18.21	32.15	46.00	-13.85			peak

Note:1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Horizontal:

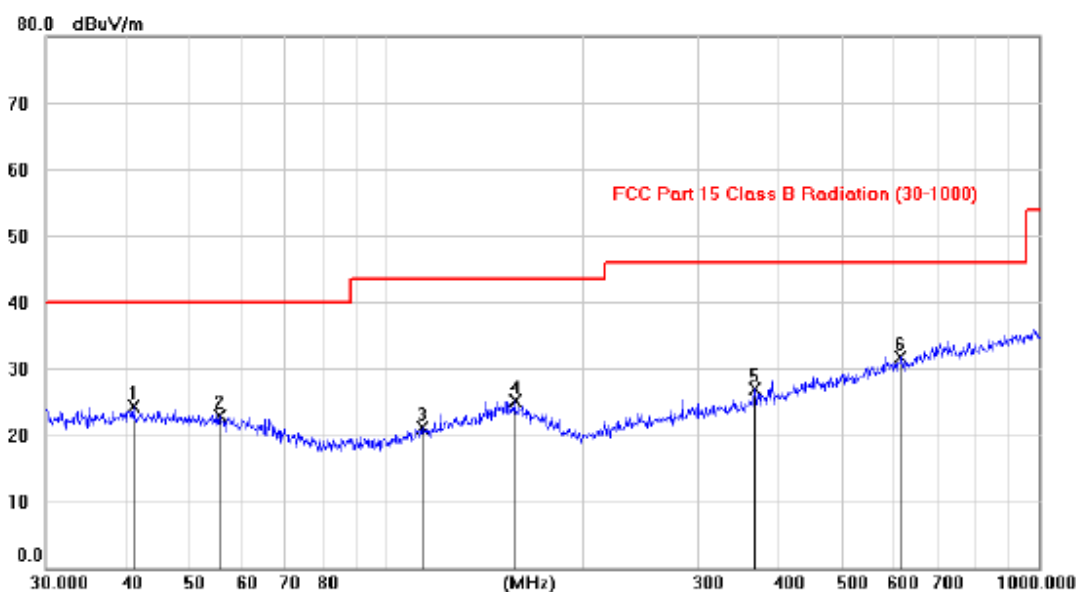

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		40.9785	10.01	14.34	24.35	40.00	-15.65	peak		
2		55.5834	9.38	13.57	22.95	40.00	-17.05	peak		
3		113.5815	8.87	12.27	21.14	43.50	-22.36	peak		
4		157.2461	9.98	15.05	25.03	43.50	-18.47	peak		
5		367.9396	11.27	15.60	26.87	46.00	-19.13	peak		
6	*	614.3578	11.30	20.48	31.78	46.00	-14.22	peak		

Note:1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.


Remark: All modes have been tested, and only worst data of GFSK mode, Channel 2441MHz was listed in this report.

From 1G-25GHz

Test Mode: GFSK TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4810	45.10	V	33.95	10.18	34.26	54.97	74	-19.03	PK
4810	35.28	V	33.95	10.18	34.26	45.15	54	-8.85	AV
7215	/	/	/	/	/	/	/	/	/
9620	/	/	/	/	/	/	/	/	/
4810	43.91	H	33.95	10.18	34.26	53.78	74	-20.22	PK
4810	35.28	H	33.95	10.18	34.26	45.15	54	-8.85	AV
7215	/	/	/	/	/	/	/	/	/
9620	/	/	/	/	/	/	/	/	/
Test Mode: GFSK TX Mid									
4882	42.17	V	33.93	10.2	34.29	52.01	74	-21.99	PK
4882	34.14	V	33.93	10.2	34.29	43.98	54	-10.02	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
4882	46.51	H	33.93	10.2	34.29	56.35	74	-17.65	PK
4882	34.57	H	33.93	10.2	34.29	44.41	54	-9.59	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
Test Mode: GFSK TX High									
4956	43.64	V	33.98	10.22	34.25	53.59	74	-20.41	PK
4956	35.29	V	33.98	10.22	34.25	45.24	54	-8.76	AV
7434	/	/	/	/	/	/	/	/	/
9912	/	/	/	/	/	/	/	/	/
4956	43.14	H	33.98	10.22	34.25	53.09	74	-20.91	PK
4956	35.29	H	33.98	10.22	34.25	45.24	54	-8.76	AV
7434	/	/	/	/	/	/	/	/	/
9912	/	/	/	/	/	/	/	/	/
Note:									
1, Result = Read level + Antenna factor + cable loss-Amp factor									
2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									


Conducted RF Spurious Emission

Tx. Spurious NVNT 2.4G 2405MHz Ant1 Emission

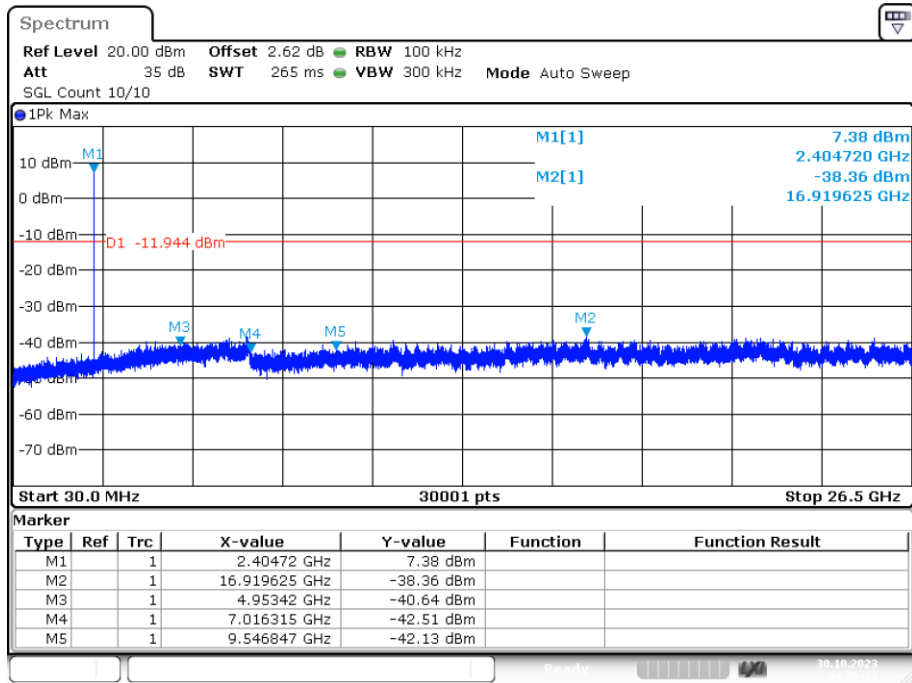


Date: 30.OCT.2023 04:56:13

Tx. Spurious NVNT 2.4G 2441MHz Ant1 Emission

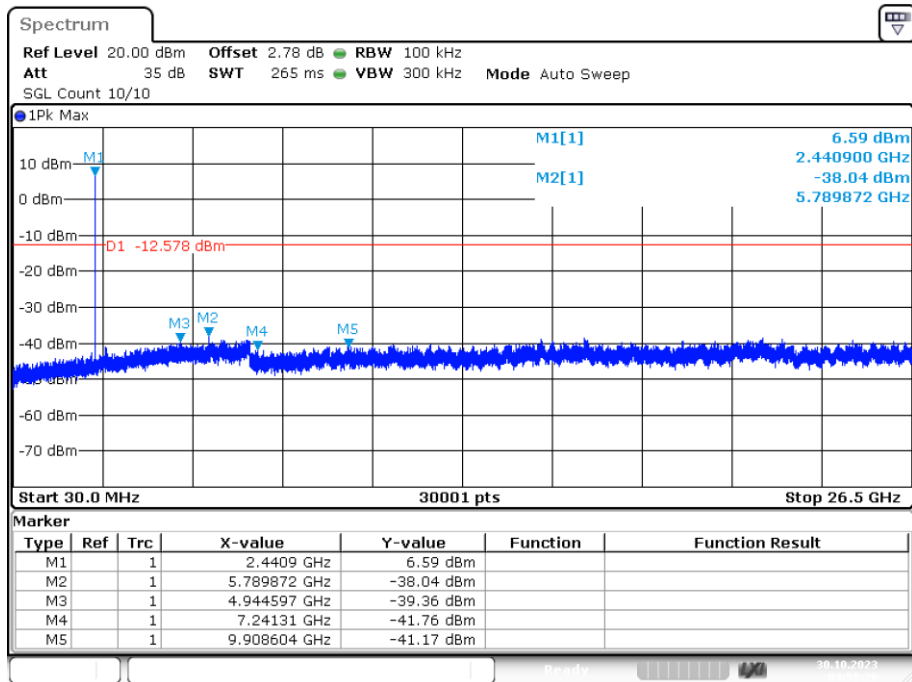

Date: 30.OCT.2023 04:58:26


Tx. Spurious NVNT 2.4G 2478MHz Ant1 Emission

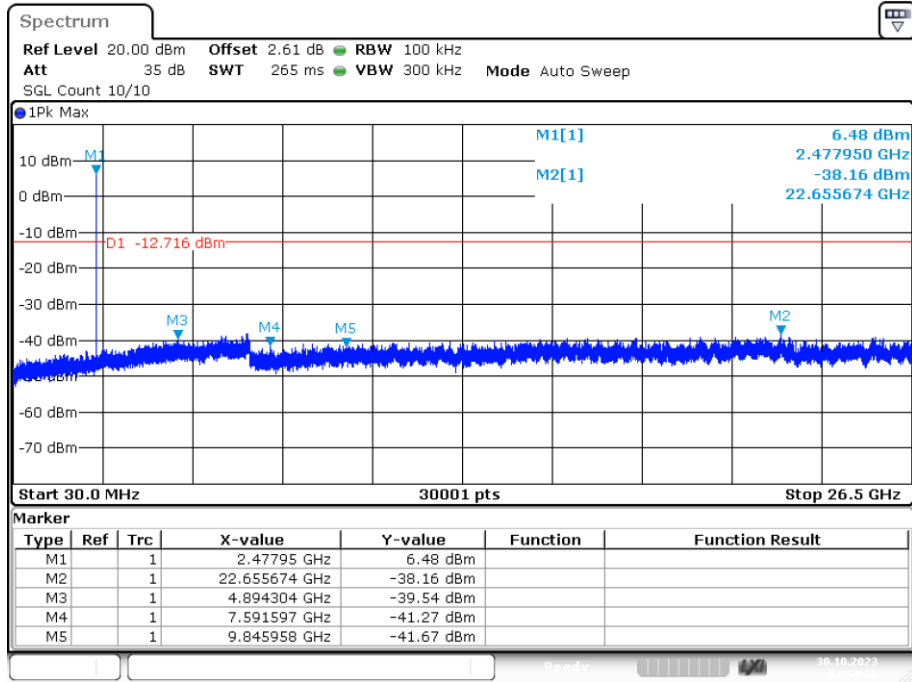

Date: 30.OCT.2023 04:54:07

9. Band Edge Compliance

9.1. Block Diagram of Test Setup

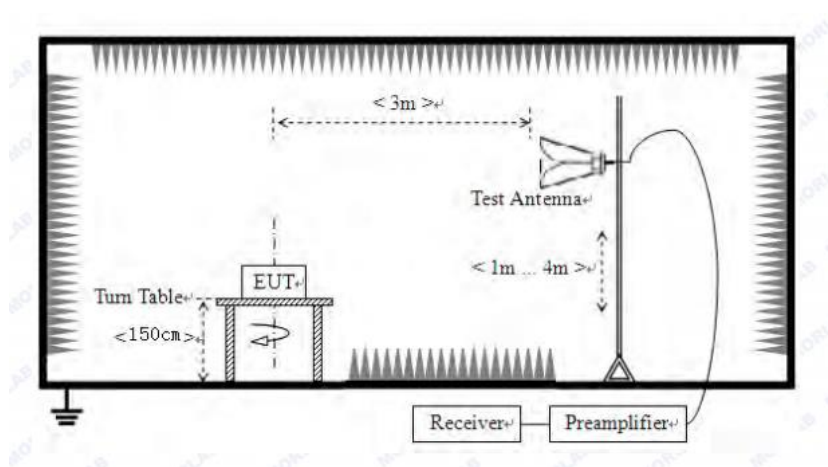

9.2. Limit

All the lower and upper band-edges emissions appearing within restricted frequency bands shall not exceed the limits shown in FCC part 15.209 and RSS-GEN, all the other emissions outside operation shall be at least 20dB below the fundamental emissions, or comply with FCC part 15.209 and RSS-GEN limits.

9.3. Test Procedure

Refer to ANSI C 63.10, Clause 6.10.



All restriction band and non- restriction band have been tested, only worse case is reported.

9.4. Test Result



PASS. (See below detailed test data)

Radiated Method:

Test Mode: GFSK-Low

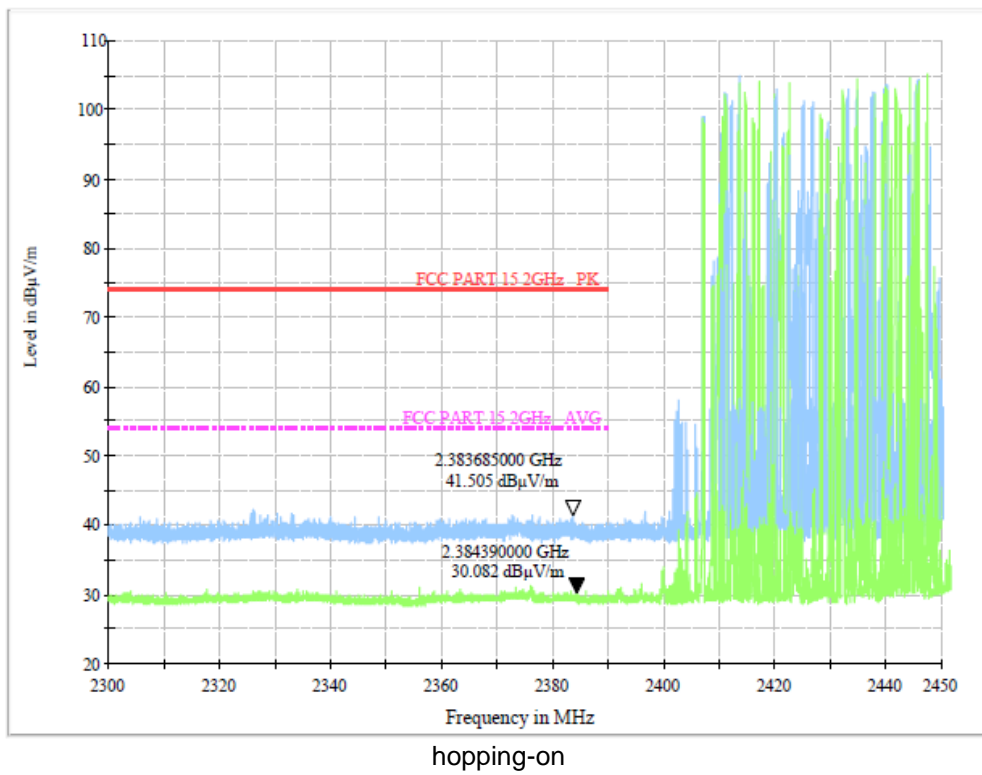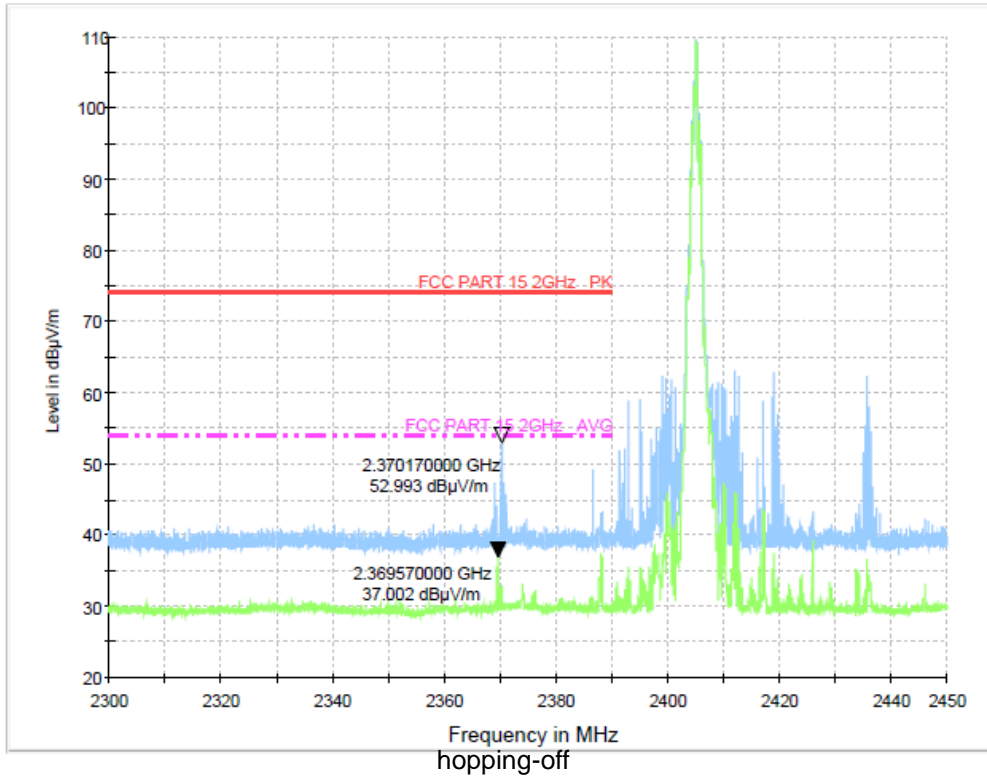

Test Mode: GFSK-High

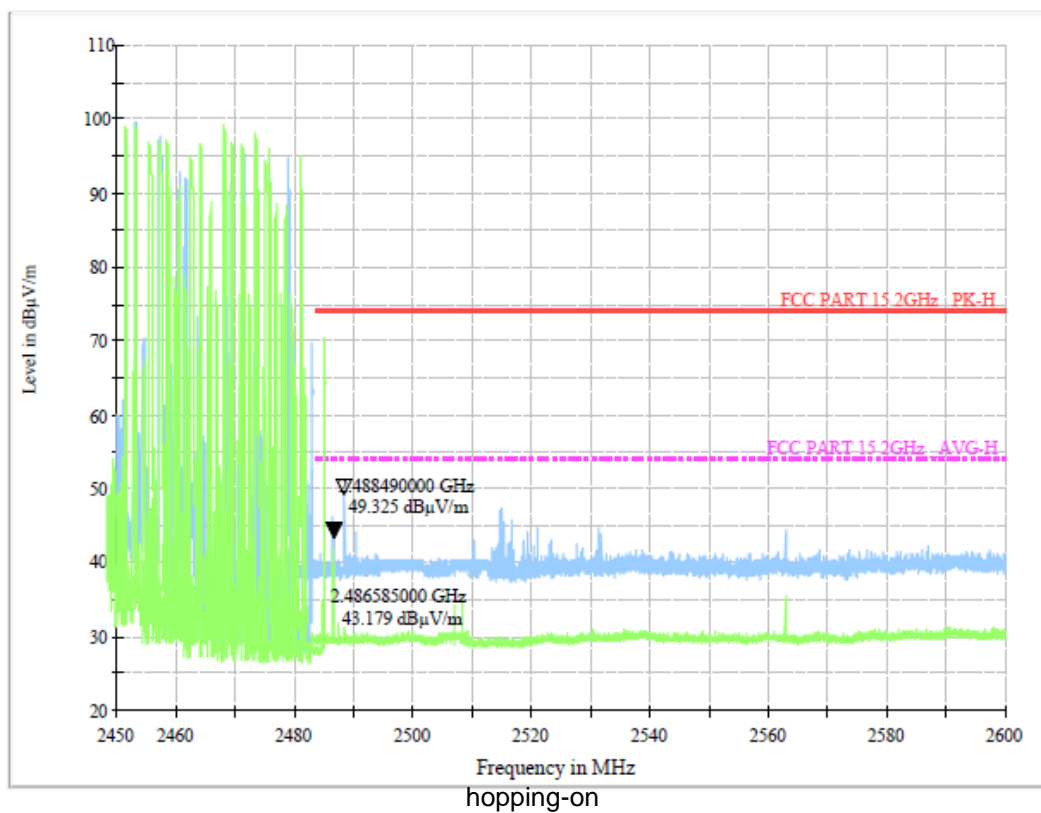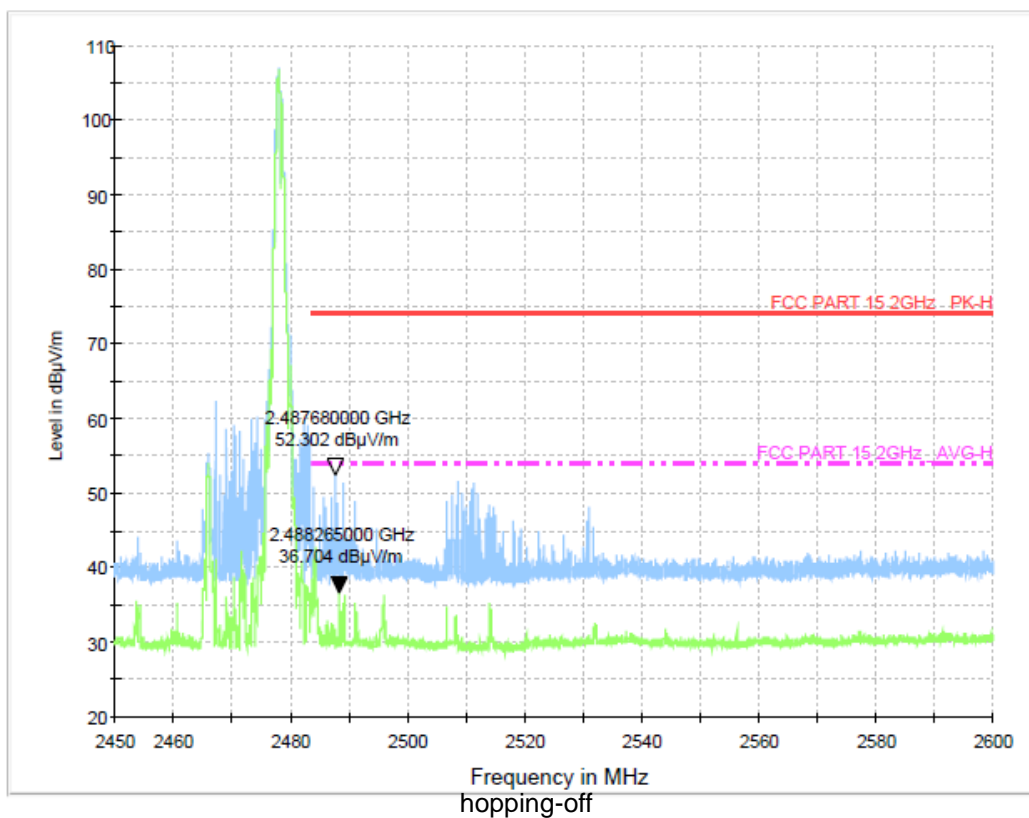

Note: 1. *:Maximum data; x:Over limit; !:over margin.


2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Conducted Method

GFSK Mode:


Test channel:

Lowest channel

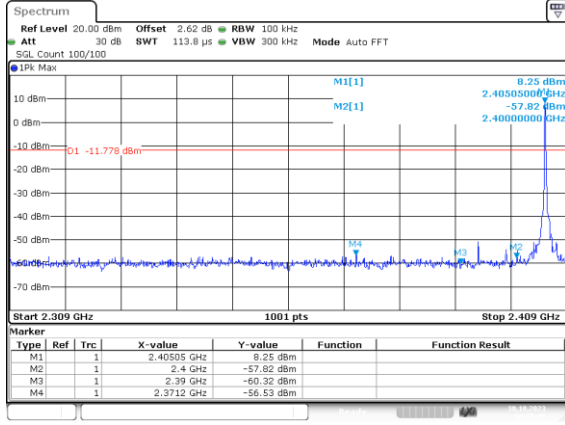

Date: 30.OCT.2023 04:55:49

No-hopping mode

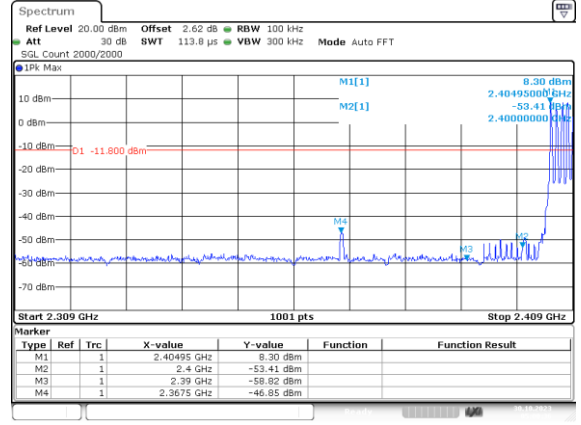


Date: 30.OCT.2023 05:00:36

Hopping mode


Test channel:

Highest channel

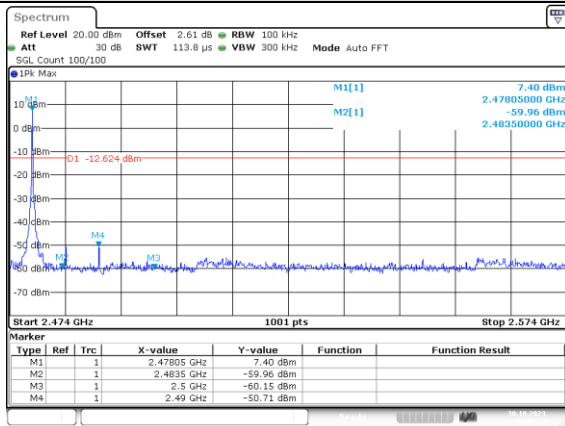

Date: 30.OCT.2023 04:50:22

No-hopping mode

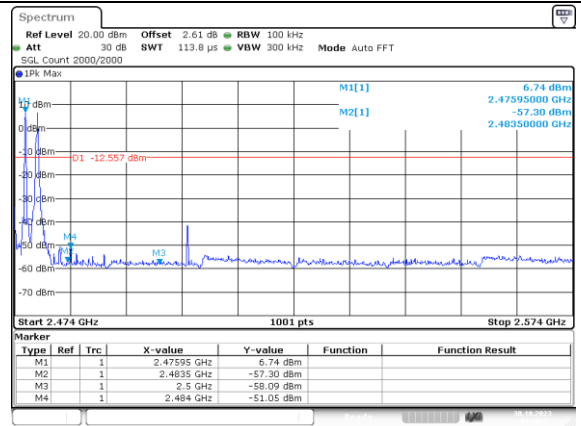


Date: 30.OCT.2023 05:10:57

Hopping mode

10. Power Line Conducted Emissions

10.1. Block Diagram of Test Setup

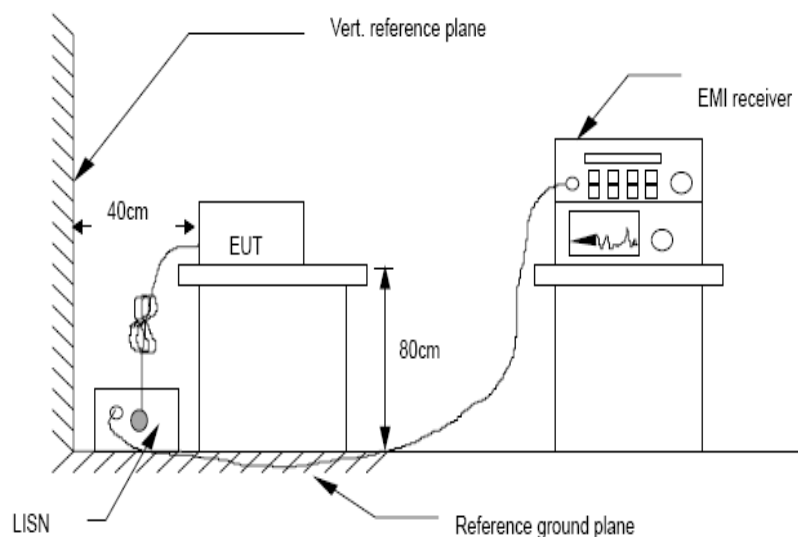

10.2. Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

10.3. Test Procedure

- (1) The EUT was placed on a non-metallic table, 80cm above the ground plane.
- (2) Setup the EUT and simulator as shown in 10.1
- (3) The EUT Power connected to the power mains through a power adapter and a line impedance stabilization network (L.I.S.N1). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N2), this provided a 50-ohm coupling impedance for the EUT (Please refer to the block diagram of the test setup and photographs). Both sides of power line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10:2013on conducted Emission test.
- (4) The bandwidth of test receiver is set at 10KHz.
- (5) The frequency range from 150 KHz to 30MHz is checked.

10.4. Test Result

Not applicable for equipment operated with battery.

11. Antenna Requirements

11.1. Limit


For intentional device, according to FCC 47 CFR Section 15.203 and RSS-GEN, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

11.2. Result

The EUT antenna is internal antenna. It complies with the standard requirement.

12. Test Setup Photo

12.1. Photos of Radiated emission

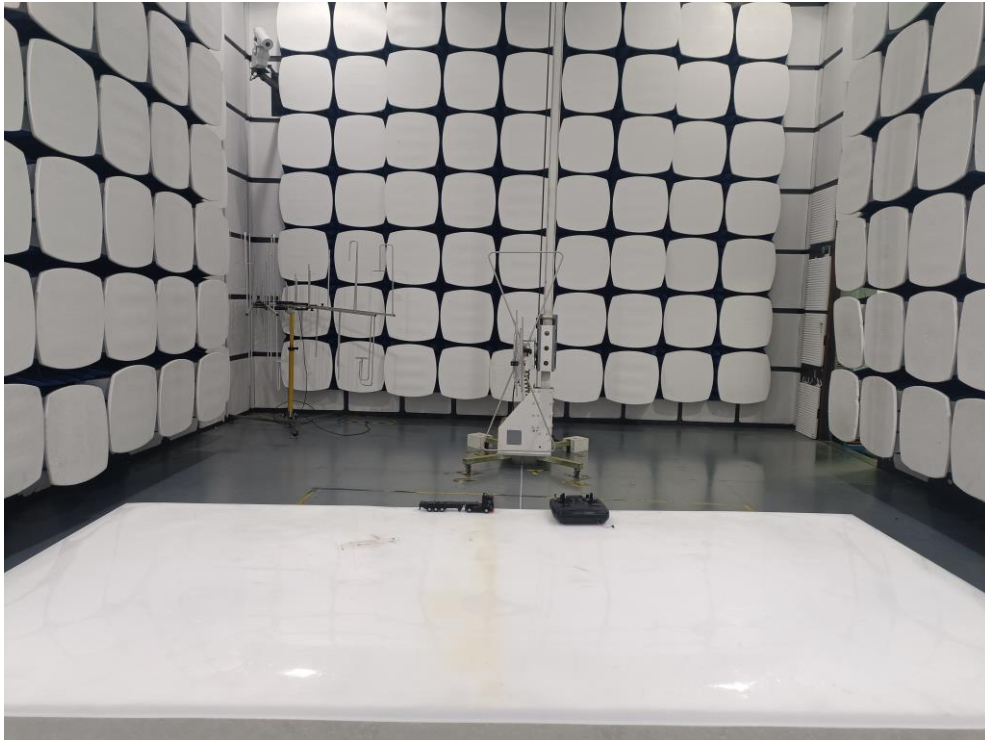

13. EUT Photo



