

FCC REPORT

Applicant: TWELVE SOUTH, LLC

Address of Applicant: 1503 KING ST STE201 Charleston, SC29405

Equipment Under Test (EUT)

Product Name: HiRise Wireless 2-in-1 desktop charging stand and travel charger

Model No.: 12-1811

FCC ID: 2AREBHR18ZZ

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.209

Date of sample receipt: 09 Oct., 2018

Date of Test: 09 Oct., to 19 Oct., 2018

Date of report issue: 22 Oct., 2018

Test Result: PASS*

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
00	22 Oct., 2018	Original

Tested By: Zora Lee **Date:** 22 Oct., 2018
Test Engineer

Reviewed By: Wimer Zhang **Date:** 22 Oct., 2018
Project Engineer

3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY.....	4
5 GENERAL INFORMATION.....	5
5.1 CLIENT INFORMATION.....	5
5.2 GENERAL DESCRIPTION OF E.U.T.....	5
5.3 TEST MODE	5
5.4 DESCRIPTION OF SUPPORT UNITS.....	5
5.5 MEASUREMENT UNCERTAINTY.....	6
5.6 LABORATORY FACILITY.....	7
5.7 LABORATORY LOCATION	7
5.8 TEST INSTRUMENTSLIST.....	8
6 TEST RESULTS ANDMEASUREMENT DATA	9
6.1 ANTENNA REQUIREMENT	9
6.2 RADIATED EMISSION	10
6.3 CONDUCTED EMISSION	17
6.4 20DB BANDWIDTH.....	20
7 TEST SETUP PHOTOS.....	22
8 EUT CONSTRUCTIONAL PHOTOS.....	24

4 Test Summary

Test Item	Section in CFR 47	Result
Spurious emissions	15.209	Pass
20dB Bandwidth	15.215(c)	Pass
Conducted Emission	15.207	Pass
<i>Remark:</i> <i>Pass: The EUT complies with the essential requirements in the standard.</i>		

5 General Information

5.1 Client Information

Applicant:	TWELVE SOUTH, LLC
Address:	1503 KING ST STE201 Charleston, SC29405
Manufacturer/Factory:	Dongguan Union Electric Co., LTD
Address:	3/F, 9 YINYUAN ST JIAOYITANG VILLAGE TANGXIA TOWN DONGGUAN CITY, GUANGDONG PROVINCE. CHINA

5.2 General Description of E.U.T.

Product Name:	HiRise Wireless 2-in-1 desktop charging stand and travel charger
Model No.:	12-1811
Operation Frequency:	112.30kHz~203.00kHz
Modulation type:	ASK
Antenna Type:	Coil Antenna
Power supply:	Input: 5V, 2A / 9V, 1.67A Output: 5V, 1A / 6V, 1.25A / 9V, 1.1A

5.3 Test mode

Transmitting mode:	Keep the EUT in transmitting mode with modulation
<i>Remark:</i> <i>Pre-scan input: 5V, output: 5V,1A/6V,1.25A/9V,1.1A and input: 9V, output: 5V,1A/6V,1.25A/9V,1.1A of the Power supply, found input: 5V, output: 9V,1.1A was worse case mode. So the report only reflects the worse mode.</i>	

5.4 Description of Support Units

Manufacturer	Description	Model	S/N	FCC ID/DoC
Skytek	Wireless charging match load	N/A	N/A	N/A
Shenzhen HengChangshengding Electronics Co., Ltd.	Adapter	HCSD-12650100	N/A	N/A

5.5 Measurement Uncertainty

Parameter	Expanded Uncertainty (Confidence of 95%)
Conducted Emission (9kHz ~ 30MHz)	±2.22 dB
Radiated Emission (9kHz ~ 30MHz)	±2.76 dB
Radiated Emission (30MHz ~ 1000MHz)	±4.28 dB
Radiated Emission (1GHz ~ 18GHz)	±5.72 dB
Radiated Emission (18GHz ~ 26.5GHz)	±2.88 dB

5.6 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC - Registration No.: 727551**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been accredited as a testing laboratory by FCC (Federal Communications Commission). The Registration No. is 727551.

- **IC - Registration No.: 10106A-1**

The 3m Semi-anechoic chamber of Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

- **CNAS - Registration No.: CNAS L6048**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6048.

- **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

5.7 Laboratory Location

Shenzhen Zhongjian Nanfang Testing Co., Ltd.

Address: No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755-23118282, Fax: +86-755-23116366

Email: info@ccis-cb.com, Website: <http://www.ccis-cb.com>


5.8 Test Instrumentslist

Radiated Emission:					
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m SAC	SAEMC	9m*6m*6m	966	07-22-2017	07-21-2020
BiConiLog Antenna	SCHWARZBECK	VULB9163	497	03-16-2018	03-15-2019
Horn Antenna	SCHWARZBECK	BBHA9120D	916	03-16-2018	03-15-2019
Loop Antenna	SCHWARZBECK	FMZB 1519 B	00044	02-25-2018	02-24-2019
EMI Test Software	AUDIX	E3	6.110919b	N/A	N/A
Pre-amplifier	HP	8447D	2944A09358	03-07-2018	03-06-2019
Pre-amplifier	CD	PAP-1G18	11804	03-07-2018	03-06-2019
Spectrum analyzer	Rohde & Schwarz	FSP30	101454	03-07-2018	03-06-2019
EMI Test Receiver	Rohde & Schwarz	ESRP7	101070	03-07-2018	03-06-2019
Simulated Station	Anritsu	MT8820C	6201026545	03-07-2018	03-06-2019
Cable	ZDECL	Z108-NJ-NJ-81	1608458	03-07-2018	03-06-2019
Cable	MICRO-COAX	MFR64639	K10742-5	03-07-2018	03-06-2019
Cable	SUHNER	SUCOFLEX100	58193/4PE	03-07-2018	03-06-2019

Conducted Emission:					
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
EMI Test Receiver	Rohde & Schwarz	ESCI	101189	03-07-2018	03-06-2019
Pulse Limiter	SCHWARZBECK	OSRAM 2306	9731	03-07-2018	03-06-2019
LISN	CHASE	MN2050D	1447	03-19-2018	03-18-2019
LISN	Rohde & Schwarz	ESH3-Z5	8438621/010	07-21-2018	07-20-2019
Cable	HP	10503A	N/A	03-07-2018	03-06-2019
EMI Test Software	AUDIX	E3	6.110919b	N/A	N/A

6 Test results and Measurement Data

6.1 Antenna requirement

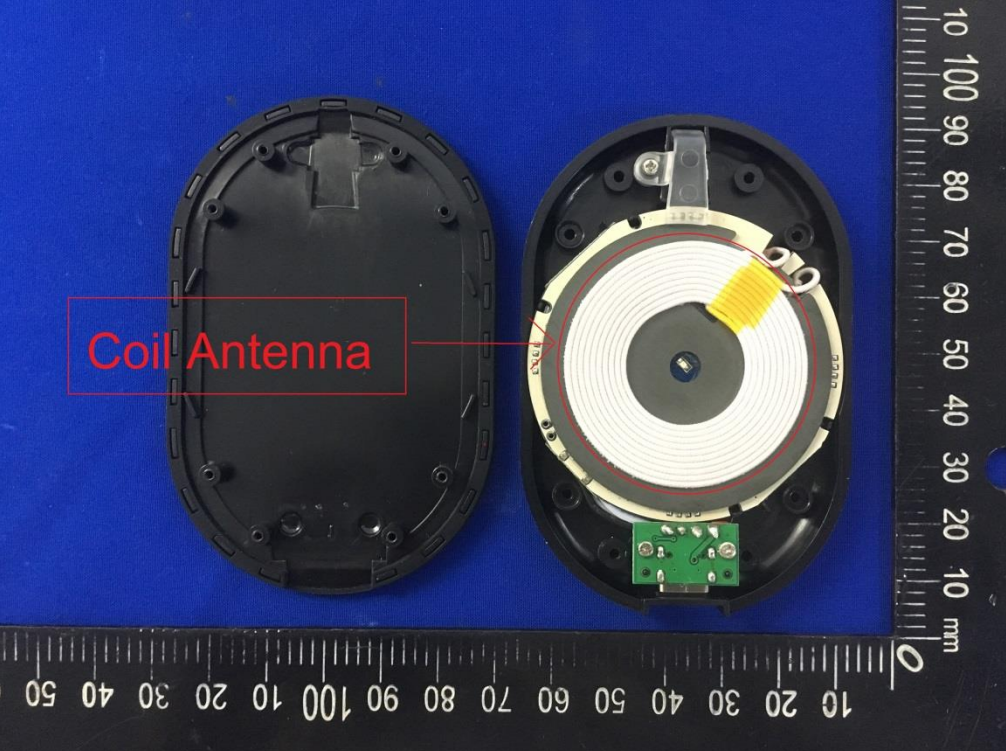Standard requirement:	FCC Part15 C Section 15.203
<p>15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p>	
E.U.T Antenna:	
	

6.2 Radiated Emission

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.4:2014				
Test Frequency Range:	9kHz to 1000MHz				
Test site:	Measurement Distance: 3m(Semi-Anechoic Chamber)				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	9kHz-150kHz	Quasi-peak	200Hz	600Hz	Quasi-peak Value
	150kHz-30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
Limit:	Frequency (MHz)	Limit (uV/m @3m)		Distance (m)	
	0.009-0.490	2400/F(kHz)		300	
	0.490-1.705	24000/F(kHz)		30	
	1.705-30	30		30	
	30-88	100		3	
	88-216	150		3	
	216-960	200		3	
	Above 1GHz	500		3	
Test Procedure:	<p>a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotating table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p>				
Test setup:	<p>9kHz-30MHz</p> <p>30MHz-1GHz</p>				

<p>Test Instruments:</p>	<p>Refer to section 5.9 for details</p>
<p>Test mode:</p>	<p>Refer to section 5.3 for details</p>
<p>Test results:</p>	<p>Pass</p>
<p>Remark:</p>	<p>The emission levels of above 1 GHz are very lower than the limit and not show in test report.</p>

Measurement Data:


a) Fundamental field strength

Peak value				
Test Polarization	Frequency (kHz)	H-field@3m (dBμV)	Limit@3m (dBμV)	Result
Horizontal	157.65	65.56	83.65	Pass
Vertical	157.65	59.80	83.65	Pass
Average value				
Test Polarization	Frequency (kHz)	H-field@3m (dBμV)	Limit@3m (dBμV)	Result
Horizontal	157.65	51.62	63.65	Pass
Vertical	157.65	47.85	63.65	Pass

b) Radiated spurious:

Below 1GHz:

Product Name:	HiRise Wireless 2-in-1 desktop charging stand & travel charger	Product Model:	12-1811
Test By:	Zora	Test mode:	Charing mode
Test Frequency:	9kHz~30MHz	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz	Environment:	Temp: 24°C Huni: 57%

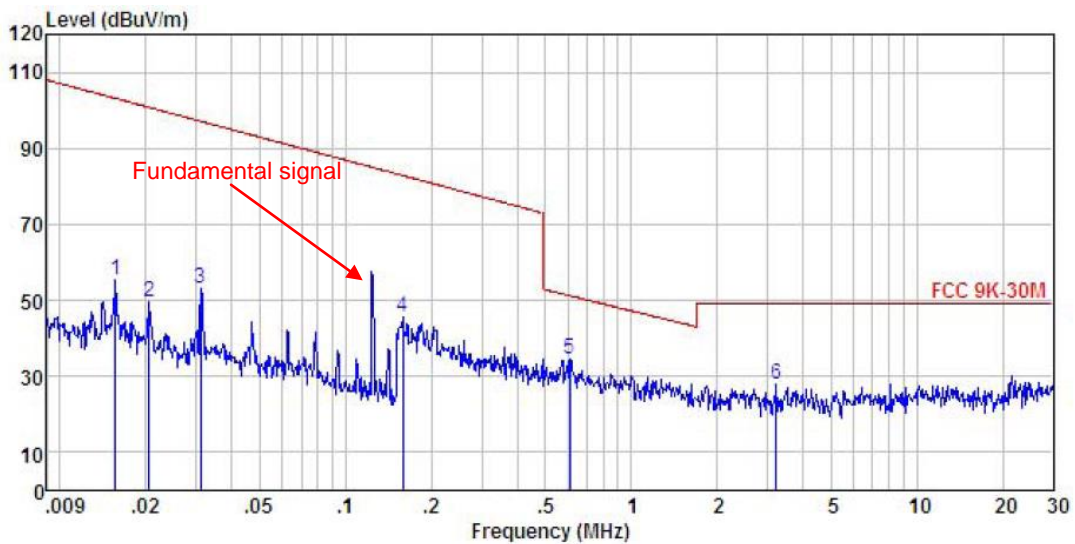


REMARK :

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	0.016	29.78	-25.86	0.05	0.00	55.47	103.17	-47.70	Peak
2	0.021	23.92	-25.90	0.06	0.00	49.58	100.76	-51.18	Peak
3	0.031	27.42	-25.95	0.12	0.00	53.09	97.13	-44.04	Peak
4	0.159	19.94	-26.17	0.28	0.00	45.55	82.86	-37.31	Peak
5	0.611	8.85	-26.30	0.52	0.00	34.57	51.23	-16.66	Peak
6	3.224	2.15	-26.55	0.66	0.00	27.76	49.00	-21.24	Peak

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	HiRise Wireless 2-in-1 desktop charging stand & travel charger	Product Model:	12-1811
Test By:	Zora	Test mode:	Charing mode
Test Frequency:	9kHz~30MHz	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz	Environment:	Temp: 24°C Huni: 57%

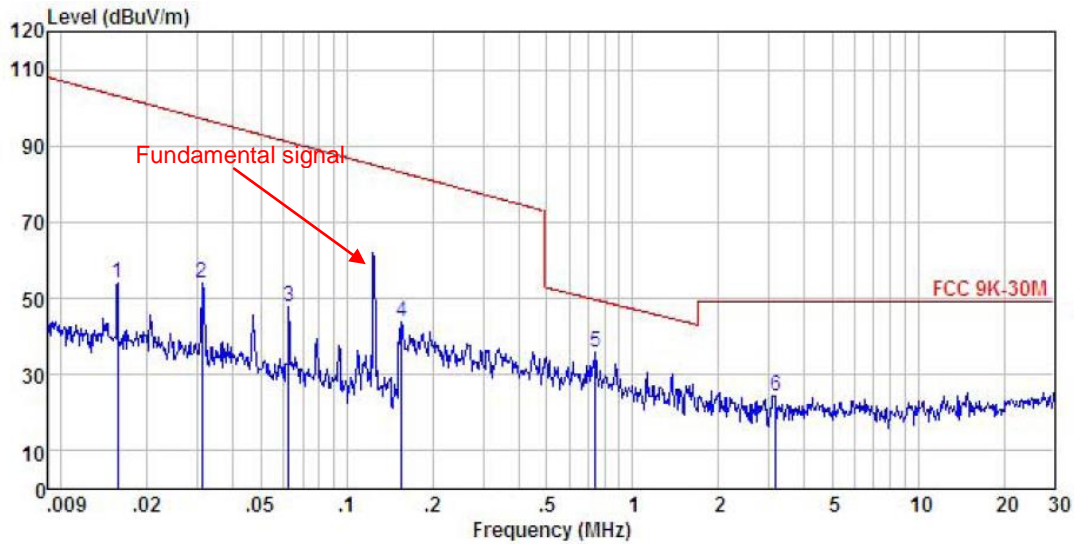


REMARK :

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	0.016	28.48	-25.87	0.05	0.00	54.16	103.10	-48.94	Peak
2	0.031	28.21	-25.95	0.12	0.00	53.88	97.13	-43.25	Peak
3	0.063	22.09	-26.03	0.19	0.00	47.75	91.02	-43.27	Peak
4	0.155	18.15	-26.16	0.28	0.00	43.77	83.07	-39.30	Peak
5	0.742	10.02	-26.30	0.57	0.00	35.79	49.67	-13.88	Peak
6	3.172	-1.07	-26.55	0.66	0.00	24.54	49.00	-24.46	Peak

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	HiRise Wireless 2-in-1 desktop charging stand & travel charger	Product Model:	12-1811
Test By:	Zora	Test mode:	Charing mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz	Environment:	Temp: 24°C Huni: 57%

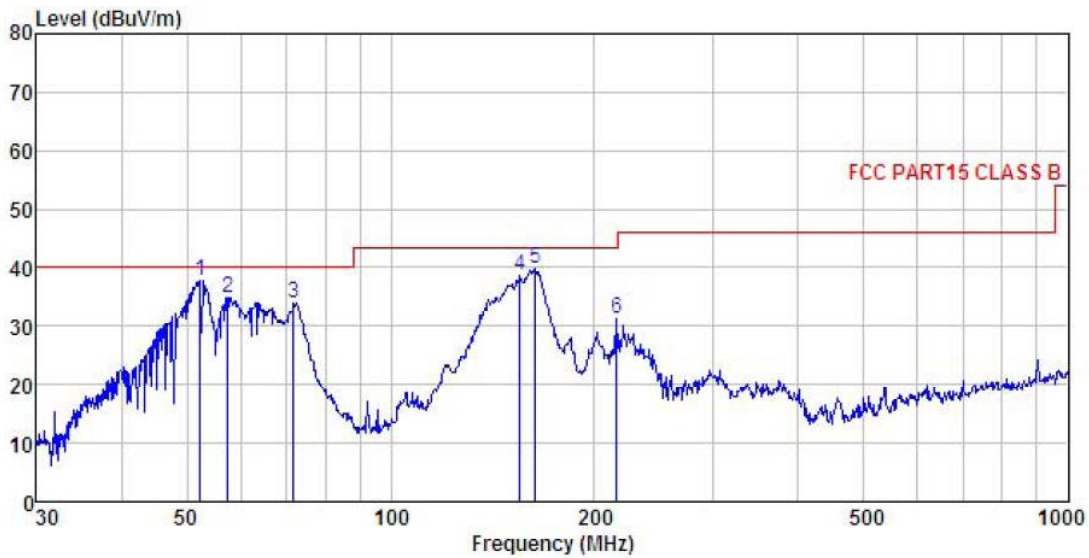


REMARK :

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuA	dB/m	dB	dB	dBuA/m	dBuA/m	dB	
1	52.391	52.75	13.66	1.29	29.81	37.89	40.00	-2.11	QP
2	57.392	50.57	12.81	1.37	29.79	34.96	40.00	-5.04	QP
3	71.832	53.33	8.91	1.56	29.71	34.09	40.00	-5.91	QP
4	155.364	56.29	8.87	2.55	29.17	38.54	43.50	-4.96	QP
5	163.755	56.99	9.21	2.62	29.10	39.72	43.50	-3.78	QP
6	215.268	45.14	12.09	2.85	28.73	31.35	43.50	-12.15	QP

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	HiRise Wireless 2-in-1 desktop charging stand & travel charger	Product Model:	12-1811
Test By:	Zora	Test mode:	Charing mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz	Environment:	Temp: 24°C Humi: 57%

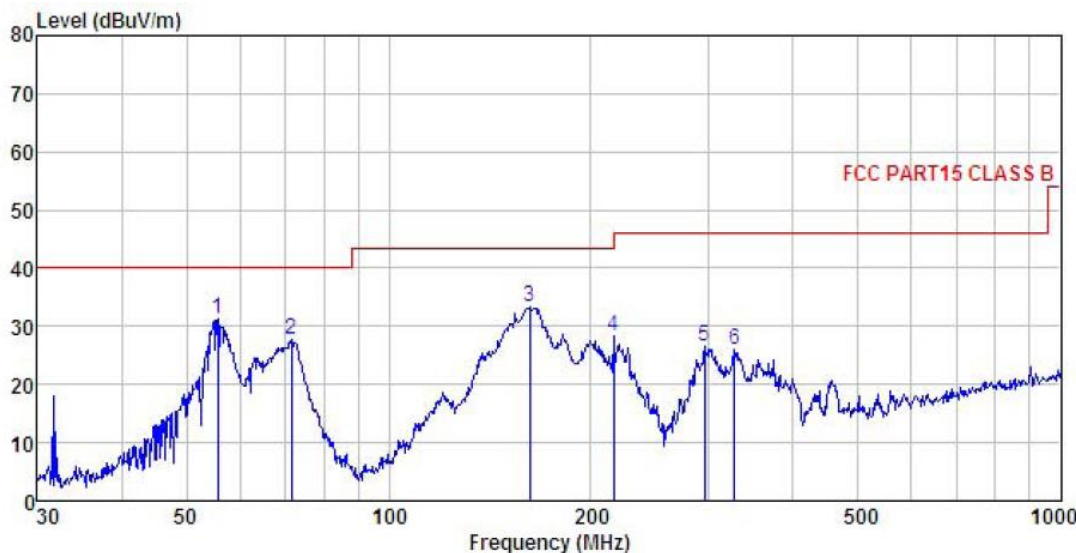

REMARK :

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuA	dB/m	dB	dB	dBuA/m	dBuA/m	dB	
1	55.609	46.48	13.11	1.36	29.80	31.15	40.00	-8.85	QP
2	71.581	47.02	8.93	1.56	29.71	27.80	40.00	-12.20	QP
3	162.041	50.65	9.16	2.60	29.12	33.29	43.50	-10.21	QP
4	216.024	42.14	12.12	2.85	28.73	28.38	46.00	-17.62	QP
5	295.147	38.43	13.57	2.93	28.46	26.47	46.00	-19.53	QP
6	326.740	37.28	14.15	3.02	28.51	25.94	46.00	-20.06	QP

Remark:


1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

6.3 Conducted Emission

Test Requirement:	FCC Part 15 B Section 15.207		
Test Method:	ANSI C63.4:2014		
Test Frequency Range:	150kHz to 30MHz		
Class / Severity:	Class B		
Receiver setup:	RBW=9kHz, VBW=30kHz		
Limit:	Frequency range (MHz)	Limit (dB μ V)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	0.5-30	60	50
* Decreases with the logarithm of the frequency.			
Test setup:	<p><i>Remark</i> E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>		
Test procedure	<ol style="list-style-type: none"> 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network(L.I.S.N.). The provide a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement. 		
Test environment:	Temp.:	23 °C	Humid.: 56% Press.: 101kPa
Test Instruments:	Refer to section 5.9 for details		
Test mode:	Refer to section 5.3 for details		
Test results:	Pass		

Measurement data:

Product name:	HiRise Wireless 2-in-1 desktop charging stand & travel charger	Product Model:	12-1811
Test by:	Zora	Test mode:	Charing mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Line
Test voltage:	AC 120 V/60 Hz	Environment:	Temp: 22.5°C Huni: 55%

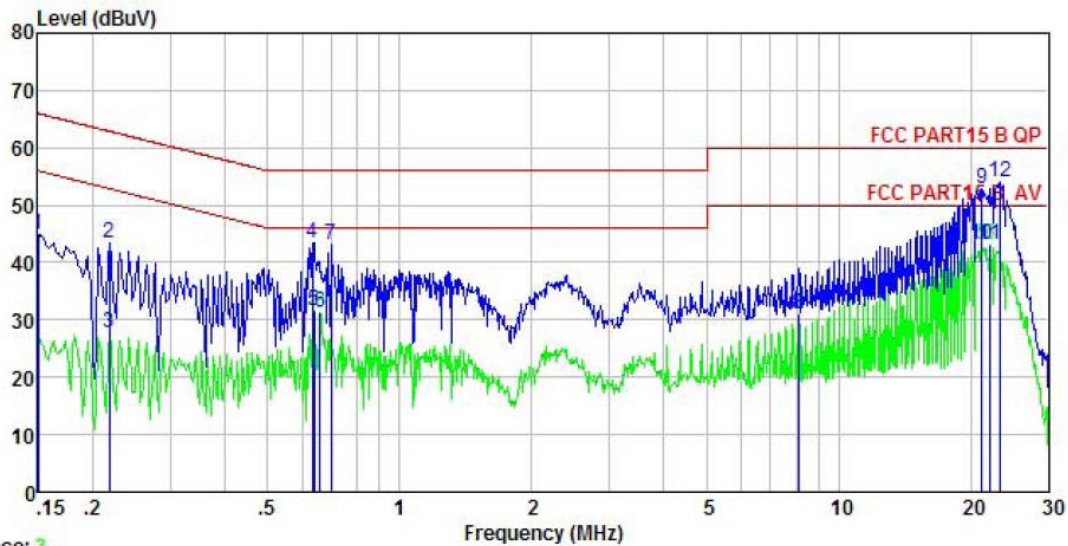


Remark	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.150	34.02	0.18	10.78	44.98	66.00	-21.02	QP
2	0.219	32.59	0.15	10.76	43.50	62.88	-19.38	QP
3	0.219	16.82	0.15	10.76	27.73	52.88	-25.15	Average
4	0.634	32.64	0.13	10.77	43.54	56.00	-12.46	QP
5	0.637	20.83	0.13	10.77	31.73	46.00	-14.27	Average
6	0.658	20.33	0.13	10.77	31.23	46.00	-14.77	Average
7	0.697	32.26	0.13	10.77	43.16	56.00	-12.84	QP
8	8.105	19.99	0.28	10.86	31.13	50.00	-18.87	Average
9	21.147	41.78	0.29	10.91	52.98	60.00	-7.02	QP
10	21.147	31.83	0.29	10.91	43.03	50.00	-6.97	Average
11	22.180	31.86	0.30	10.90	43.06	50.00	-6.94	Average
12	23.263	42.83	0.32	10.89	54.04	60.00	-5.96	QP

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss.

Product name:	HiRise Wireless 2-in-1 desktop charging stand & travel charger	Product Model:	12-1811
Test by:	Zora	Test mode:	Charing mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Neutral
Test voltage:	AC 120 V/60 Hz	Environment:	Temp: 22.5°C Huni: 55%

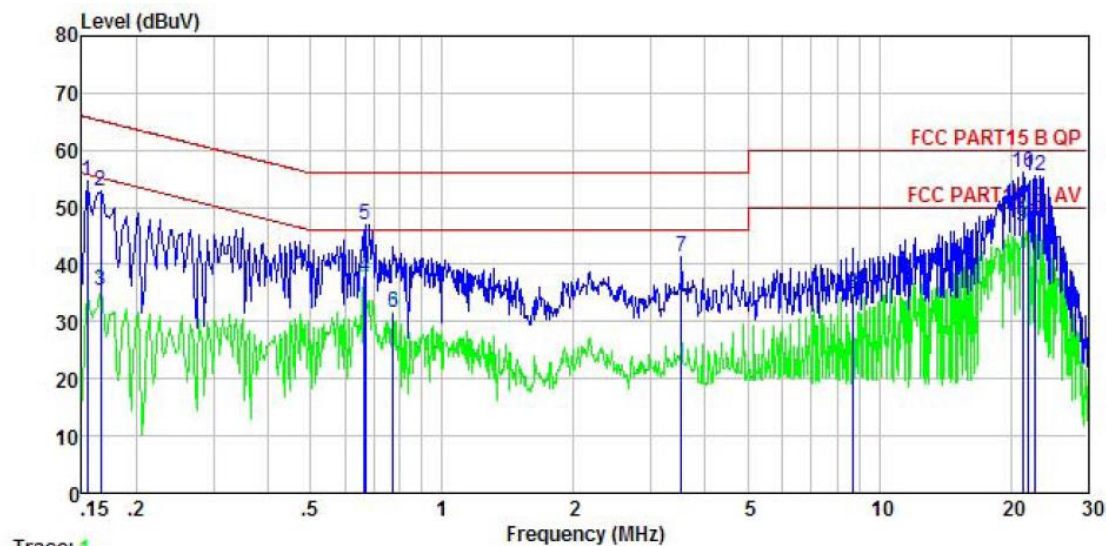


Trace: 1

Remark	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.154	42.94	0.98	10.78	54.70	65.78	-11.08	QP
2	0.166	40.96	0.97	10.77	52.70	65.16	-12.46	QP
3	0.166	23.61	0.97	10.77	35.35	55.16	-19.81	Average
4	0.665	26.11	0.97	10.77	37.85	46.00	-8.15	Average
5	0.668	35.24	0.97	10.77	46.98	56.00	-9.02	QP
6	0.771	19.73	0.97	10.80	31.50	46.00	-14.50	Average
7	3.528	29.29	1.00	10.90	41.19	56.00	-14.81	QP
8	8.729	23.07	1.02	10.89	34.98	50.00	-15.02	Average
9	21.260	35.11	0.68	10.91	46.70	50.00	-3.30	Average
10	21.373	44.49	0.68	10.91	56.08	60.00	-3.92	QP
11	21.830	36.01	0.68	10.91	47.60	50.00	-2.40	Average
12	22.655	43.97	0.68	10.90	55.55	60.00	-4.45	QP

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss.

6.4 20dB Bandwidth

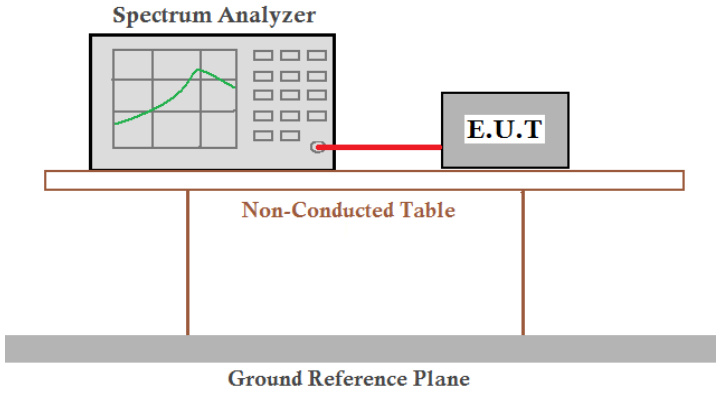Test Requirement:	FCC Part15 C Section 15.215 (c)
Test Method:	ANSI C63.4:2009
Receiver setup:	RBW=1 kHz, VBW=3 kHz, detector: Peak
Limit:	The fundamentalemission be kept within atleast the central 80% of the permittedband
Test Procedure:	<ol style="list-style-type: none"> 1. According to the follow Test-setup, keep the relative position between the artificial antenna and the EUT. 2. Set the EUT to proper test channel. 3. Max hold the radiated emissions, mark the peak power frequency point and the -20dB upper and lower frequency points. 4. Read 20dB bandwidth.
Test setup:	 <p>The diagram shows a Spectrum Analyzer on the left and an E.U.T. on the right, connected by a red cable. They are both on a table labeled 'Non-Conducted Table'. Below the table is a 'Ground Reference Plane'.</p>
Test Instruments:	Refer to section 5.9 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data

20dB bandwidth (kHz)	Limits
2.76	N/A
2.82	
<i>Remark: For report purpose only.</i>	

Test plot as follows:

