

Versa Networks

RF TEST REPORT

Report Type:

FCC Part 15.247 & ISED RSS-247 RF report

Model:

CSGXXX-YYY-ZZZ

REPORT NUMBER:

220900385SHA-002

ISSUE DATE:

October 15, 2022

DOCUMENT CONTROL NUMBER:

TTRF15.247-01_V1 © 2018 Intertek



Applicant: Versa Networks
2550 GREAT AMERICA WAY SUITE 350 SANTA CLARA, CA 95054

Manufacturer: Versa Networks
2550 GREAT AMERICA WAY SUITE 350 SANTA CLARA, CA 95054

Product Name: Cloud Services Gateway


Type/Model: CSGXXX-YYY-ZZZ

FCC ID: 2ARF9CSG-BT

SUMMARY:

The equipment complies with the requirements according to the following standard(s) or Specification:
47CFR Part 15 (2017): Radio Frequency Devices (Subpart C)
ANSI C63.10 (2013): American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

PREPARED BY: REVIEWED BY:



Project Engineer
Dylan Tang

Reviewer
Wakeyou Wang

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TEST REPORT

Content

REVISION HISTORY.....	4
MEASUREMENT RESULT SUMMARY	5
1 GENERAL INFORMATION	6
1.1 DESCRIPTION OF EQUIPMENT UNDER TEST (EUT)	6
1.2 TECHNICAL SPECIFICATION	7
1.3 FREQUENCY HOPPING SYSTEM REQUIREMENT	8
1.4 DESCRIPTION OF TEST FACILITY	10
2 TEST SPECIFICATIONS.....	11
2.1 STANDARDS OR SPECIFICATION	11
2.2 MODE OF OPERATION DURING THE TEST.....	11
2.3 TEST SOFTWARE LIST	12
2.4 TEST PERIPHERALS LIST	12
2.5 TEST ENVIRONMENT CONDITION:.....	12
2.6 INSTRUMENT LIST	13
2.7 MEASUREMENT UNCERTAINTY	14
3 20DB BANDWIDTH	15
3.1 LIMIT	15
3.2 MEASUREMENT PROCEDURE	15
3.3 TEST CONFIGURATION	16
3.4 TEST RESULTS OF 20dB BANDWIDTH.....	16
<i>Test Graphs</i>	16
4 OUTPUT POWER.....	20
4.1 LIMIT	20
4.2 TEST CONFIGURATION	20
4.3 MEASUREMENT PROCEDURE	20
4.4 TEST RESULTS OF OUTPUT POWER.....	21
<i>Test Graphs</i>	21
5 RADIATED EMISSIONS	24
5.1 LIMIT	24
5.2 MEASUREMENT PROCEDURE	24
5.3 TEST CONFIGURATION	26
5.4 TEST RESULTS OF RADIATED EMISSIONS	28
6 POWER LINE CONDUCTED EMISSION.....	33
6.1 LIMIT	33
6.2 TEST CONFIGURATION	33
6.3 MEASUREMENT PROCEDURE	34
6.4 TEST RESULTS OF POWER LINE CONDUCTED EMISSION.....	35
7 ANTENNA REQUIREMENT.....	37

Revision History

Report No.	Version	Description	Issued Date
220900385SHA-002	Rev. 01	Initial issue of report	October 15, 2022

Measurement result summary

TEST ITEM	FCC REFERANCE	RESULT
20 dB Bandwidth	15.247(a)(1)	Verified
Carrier Frequency Separation	15.247(a)(1)	NA
Output power	15.247(b)(1)	Verified
Radiated Emissions	15.205 & 15.209	Pass
Conducted Spurious Emissions & Band Edge	15.247(d)	Pass
Power line conducted emission	15.207	Pass
Number of Hopping Frequencies	15.247(a)(1)(iii)	NA
Dwell time	15.247(a)(1)(iii)	NA
Occupied bandwidth	-	NA
Antenna requirement	15.203	Verified

Notes:

1: NA =Not Applicable

2. Determination of the test conclusion is based on IEC Guide 115 in consideration of measurement uncertainty.

3: Additions, Deviations and Exclusions from Standards: None.

4. Verified= This report is based on the previous report. For specific changes, need to verified power.

TEST REPORT

1 GENERAL INFORMATION

1.1 Description of Equipment Under Test (EUT)

Product name:	Cloud Services Gateway
Type/Model:	CSGXXX-YYY-ZZZ XXX=750,770 YYY= WLA, 2LA, W, LA, or blank ZZZ= 4GP-120W, 4GF, 8GE, 4DS, or blank
Description of EUT:	The EUT is an Cloud Services Gateway, with Bluetooth function. the EUT provide two slots for optional wireless modules. Maximum two LTE modules can be equipped. There have series models and they used the same main board PCB are electric identical. We choose CSG750-2LA-4GP-120W to test as representative.
Rating:	DC 12V 5A Switching Power Adapter Model No.: FSP060-DHAN3 AC Input:100 -240V~, 1.8A 50-60Hz DC Output:12V===5.0A 60.0W
EUT type:	<input checked="" type="checkbox"/> Table top <input type="checkbox"/> Floor standing
Software Version:	21.2.2
Hardware Version:	V1.0
Serial numbers:	0221019-45-003(for radiation sample), 0221019-45-004(for conduction sample)
Sample received date:	September 2, 2022
Date of test:	September 5, 2022 ~ October 15, 2022

Note:

1. ALL models are listed as below. Model CGS750 is the representative for final test.

Brand	Versa	
Series Models	CSGXXX-YYY-ZZZ XXX=750,770 YYY= WLA, 2LA, W, LA, or blank ZZZ= 4GP-120W, 4GF, 8GE, 4DS, or blank	
Series	CSG750	CGS770
CPU	ATOM C3558 2.2GHz/ 4 cores/FC-BGA 16W	ATOM C3708 1.7GHz/ 8 cores/FC-BGA 17W
LTE Module	Band: Sierra, Model: MC7455, FCC ID :N7NMC7455	
WLAN Module	Band: VERSA NETWORKS, Model: CSG-W1, FCC ID :2ARF9CSG-W1	
BT Module	Band: Qualcomm, Model: CSR8811A12-IQQD-R	
NIC Card	4 ports* 1G RJ45 4 ports* 1G RJ45 with NIC-4GP-120W 4 ports* 1G SFP with 4GF	

TEST REPORT

	4 ports* RJ45 (T1) with 4DS 8 ports* 1G RJ45 with 8EG
RAM	SODIM DDR4 ECC 4GB SODIM DDR4 ECC 8GB SODIM DDR4 ECC 16GB

2. The EUT consumes power from the following adapter.

Adapter	
Brand	FSP GROUP INC.
Model	FSP060-DHAN3
Input Power	100-240Vac, 1.8A, 50-60Hz
Output Power	12.0Vac, 5.0A 60W
Power Line	1.15m non-shielded power cable with one core

POE Module Adapter	
Brand	DELTA ELECTRONICS, INC.
Model	ADP-150AR B
Input Power	100-240Vac, 2A, 50-60Hz
Output Power	54VDC, 2.78A
Power Line	1.45m DC cable

1.2 Technical Specification

Frequency Range:	2400MHz ~ 2483.5MHz
Support Standards:	Bluetooth 4.2(BR+EDR)
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Type of Modulation:	GFSK, $\pi/4$ DQPSK, 8DPSK
Channel Number:	79 (0 - 78)
Data Rate:	1Mbps
Channel Separation:	1 MHz
Antenna:	-1.86dBi, PIFA antenna

1.3 Frequency Hopping System Requirement

Test Requirement: Section 15.247 (a)(1), (g), (h) requirement:

The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.


The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hop sets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

Compliance for section 15.247(a)(1)

According to Bluetooth Core Specification, the pseudorandom sequence may be generated in a nine stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES;

i.e. the shift register is initialized with nine ones.


- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

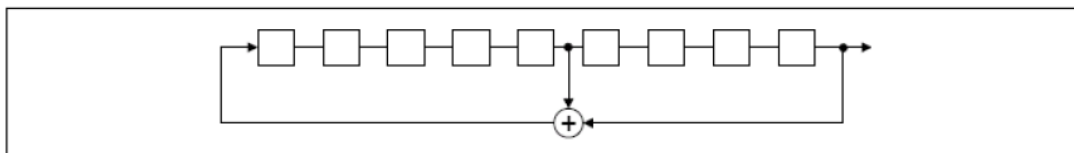

Linear Feedback Shift Register for Generation of the PRBS sequence

TEST REPORT

An example of Pseudorandom Frequency Hopping Sequence as follow:

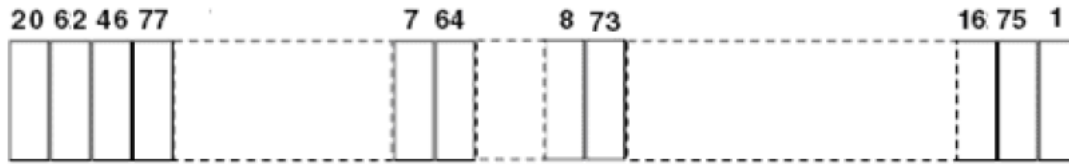

Each frequency used equally on the average by each transmitter.

According to Bluetooth Core Specification, Bluetooth receivers are designed to have input and IF bandwidths that match the hopping channel bandwidths of any Bluetooth transmitters and shift frequencies in synchronization with the transmitted signals.

Compliance for section 15.247(g)

According to Bluetooth Core Specification, the Bluetooth system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the Bluetooth system is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system.

Compliance for section 15.247(h)

According to Bluetooth Core specification, the Bluetooth system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels.

According to the Bluetooth Core specification, the Bluetooth system is designed not have the ability to coordinate with other FHSS System in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitter.

1.4 Description of Test Facility

Name:	Intertek Testing Services Shanghai
Address:	Building 86, No. 1198 Qinzhou Road(North), Shanghai 200233, P.R. China
Telephone:	86 21 61278200
Telefax:	86 21 54262353

The test facility is recognized, certified, or accredited by these organizations:	CNAS Accreditation Lab Registration No. CNAS L0139
	FCC Accredited Lab Designation Number: CN0175
	IC Registration Lab Registration code No.: 2042B-1
	VCCI Registration Lab Registration No.: R-4243, G-845, C-4723, T-2252
	NVLAP Accreditation Lab NVLAP LAB CODE: 200849-0
	A2LA Accreditation Lab Certificate Number: 3309.02

2 TEST SPECIFICATIONS

2.1 Standards or specification

47CFR Part 15 (2017)

ANSI C63.10 (2013)

2.2 Mode of operation during the test

While testing the transmitter mode of the EUT, the internal modulation is applied. All the functions of the host device except the BT module were set on stand-by mode.

The test setting software is offered by the manufactory. The pre-scan for the conducted power with all rates in each modulation and bands was used, and the worst case was found and used in all test cases.

The worst-case modulation configuration:

Worst Modulation Used for Conformance Testing			
Bluetooth Mode	Data Rate	Packet Type	Worst Mode
GFSK	BR-1Mbps	DH1,DH3,DH5	BR-1Mbps DH5 EDR-2Mbps 2DH5 EDR-3Mbps 3DH5
$\pi/4$ DQPSK	EDR-2Mbps	2DH1,2DH3,2DH5	
8DPSK	EDR-3Mbps	3DH1,3DH3,3DH5	
Note: The BR-1Mbps DH5 mode was chosen for radiation emission bellow 1GHz and Conducted emission testing as representative in this report.			

The power setting parameter:

The worst-case power setting parameter			
Test software Version	CSR BlueSuite		
Modulation Mode	2402MHz	2441MHz	2480MHz
BR-1Mbps	default	default	default
EDR-2Mbps	default	default	default
EDR-3Mbps	default	default	default

Radiated test mode: EUT transmitted signal with BT antenna;

Conducted test mode: EUT transmitted signal from BT RF port connected to SPA directly;

2.3 Test software list

Test Items	Software	Manufacturer	Version
Conducted emission	ESxS-K1	R&S	V2.1.0
Radiated emission	ES-K1	R&S	V1.71

2.4 Test peripherals list

Item No.	Name	Band and Model	Description
1	Laptop computer	DELL 5480	-
2	RF cable	/	0.2m length; 0.5dB loss

2.5 Test environment condition:

Test items	Temperature	Humidity
20 dB Bandwidth	23°C	52% RH
Output power		
Carrier Frequency Separation		
Number of Hopping Frequencies		
Dwell time		
Occupied bandwidth		
Conducted Spurious Emissions & Band Edge		
Power line conducted emission	22°C	53% RH
Radiated Emissions	22°C	55% RH

TEST REPORT

2.6 Instrument list

Conducted Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESCS 30	EC 2107	2023-07-18
<input checked="" type="checkbox"/>	A.M.N.	R&S	ESH2-Z5	EC 3119	2022-11-09
<input type="checkbox"/>	A.M.N.	R&S	ENV4200	EC 3558	2023-06-04
<input checked="" type="checkbox"/>	Attenuator	Huaxiang	TS5-10dB-6G-B	21062303	2023-04-24
<input checked="" type="checkbox"/>	Shielded room	Zhongyu	-	EC 2838	2023-01-12
Radiated Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESIB 26	EC 3045	2022-10-19
<input checked="" type="checkbox"/>	Test Receiver	Keysight	N9030A	EC 5338	2023-03-14
<input checked="" type="checkbox"/>	Bilog Antenna	TESEQ	CBL 6112B	EC 6411	2023-08-23
<input checked="" type="checkbox"/>	Horn antenna	R&S	HF 906	EC 3049	2023-01-17
<input checked="" type="checkbox"/>	Horn antenna	ETS	3117	EC 4792-1	2023-06-27
<input checked="" type="checkbox"/>	Horn antenna	TOYO	HAP18-26W	EC 4792-3	2023-07-29
<input checked="" type="checkbox"/>	Pre-amplifier	R&S	AFS42-00101800-25-S-42	EC 5262	2023-06-04
<input checked="" type="checkbox"/>	Semi-anechoic chamber	Albatross project	-	EC 3048	2023-07-13
RF test					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	PXA Signal Analyzer	Keysight	N9030A	EC 5338	2023-03-14
<input checked="" type="checkbox"/>	PXA Signal Analyzer	Keysight	N9030B	EC 6078	2023-06-04
<input checked="" type="checkbox"/>	Power sensor	Agilent	U2021XA	EC 5338-1	2023-03-14
<input checked="" type="checkbox"/>	Vector Signal Generator	Agilent	N5182B	EC 5175	2023-03-14
<input checked="" type="checkbox"/>	MXG Analog Signal Generator	Agilent	N5181A	EC 5338-2	2023-03-14
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESCI 7	EC 4501	2022-12-09
<input type="checkbox"/>	Universal Radio Communication Tester	R&S	CMW500	EC5944	2023-01-20
<input type="checkbox"/>	Universal Radio Communication Tester	R&S	CMW500	Ec6209	2023-01-20
<input checked="" type="checkbox"/>	Signal generator	Agilent	N5182A	Ec6172	2023-08-18
<input checked="" type="checkbox"/>	Signal generator	Agilent	N5181A	Ec6171	2023-08-18
<input checked="" type="checkbox"/>	Climate chamber	GWS	MT3065	EC 6021	2023-03-06
Additional instrument					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Therom-Hygrograph	ZJ1-2A	S.M.I.F.	EC 3783	2023-03-24
<input checked="" type="checkbox"/>	Pressure meter	YM3	Shanghai Mengde	EC 4620	2023-09-13

2.7 Measurement uncertainty

The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Test item	Measurement uncertainty
Maximum peak output power	± 0.74dB
Minimum 6dB bandwidth	
Power spectrum density	
Emission outside the frequency band	
Occupied bandwidth	
Radiated Emissions in restricted frequency bands below 1GHz	± 4.90dB
Radiated Emissions in restricted frequency bands above 1GHz	± 5.02dB
Emission outside the frequency band	± 2.89dB
Power line conducted emission	± 3.19dB

3 20dB bandwidth

Test result: Pass

3.1 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.


3.2 Measurement Procedure

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the EMI receiver or spectrum analyzer shall be between two times and five times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than [10 log (OBW/RBW)] below the reference level.
- d) Steps a) through c) might require iteration to adjust within the specified tolerances.
- e) The dynamic range of the instrument at the selected RBW shall be more than 10 dB below the target “-xx dB down” requirement; that is, if the requirement calls for measuring the -20 dB OBW, the instrument noise floor at the selected RBW shall be at least 30 dB below the reference value.
- f) Set detection mode to peak and trace mode to max hold.
- g) Determine the reference value: Set the EUT to transmit an unmodulated carrier or modulated signal, as applicable. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).
- h) Determine the “-xx dB down amplitude” using [(reference value) - xx]. Alternatively, this calculation may be made by using the marker-delta function of the instrument.
- i) If the reference value is determined by an unmodulated carrier, then turn the EUT modulation ON, and either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to stabilize. Otherwise, the trace from step g) shall be used for step j).
- j) Place two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-xx dB down amplitude” determined in step h). If a marker is below this “-xx dB down amplitude” value, then it shall be as close as possible to this value. The occupied bandwidth is the frequency difference between the two markers. Alternatively, set a marker at the lowest frequency of the envelope of the spectral display, such that the marker is at or slightly below the “-xx dB down amplitude” determined in step h). Reset the marker-delta function and move the marker to the other side of the emission until the delta marker amplitude is at the same level as the reference marker

TEST REPORT

- amplitude. The marker-delta frequency reading at this point is the specified emission bandwidth.
- k) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).


3.3 Test Configuration

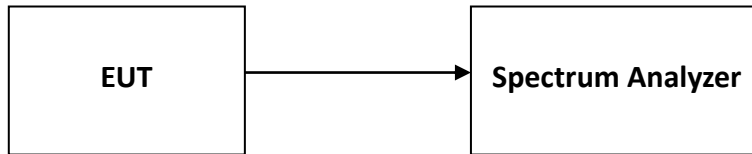


3.4 Test Results of 20dB bandwidth


Test Mode	Antenna	Frequency [MHz]	20db EBW [MHz]	FL[MHz]	FH[MHz]	Limit [MHz]	Verdict
DH5	Ant1	2402	0.963	2401.553	2402.516	---	---
		2441	0.954	2440.553	2441.507	---	---
		2480	0.963	2479.550	2480.513	---	---
2DH5	Ant1	2402	1.329	2401.355	2402.684	---	---
		2441	1.326	2440.355	2441.681	---	---
		2480	1.248	2479.388	2480.636	---	---
3DH5	Ant1	2402	1.296	2401.376	2402.672	---	---
		2441	1.269	2440.373	2441.642	---	---
		2480	1.311	2479.364	2480.675	---	---

Test Graphs

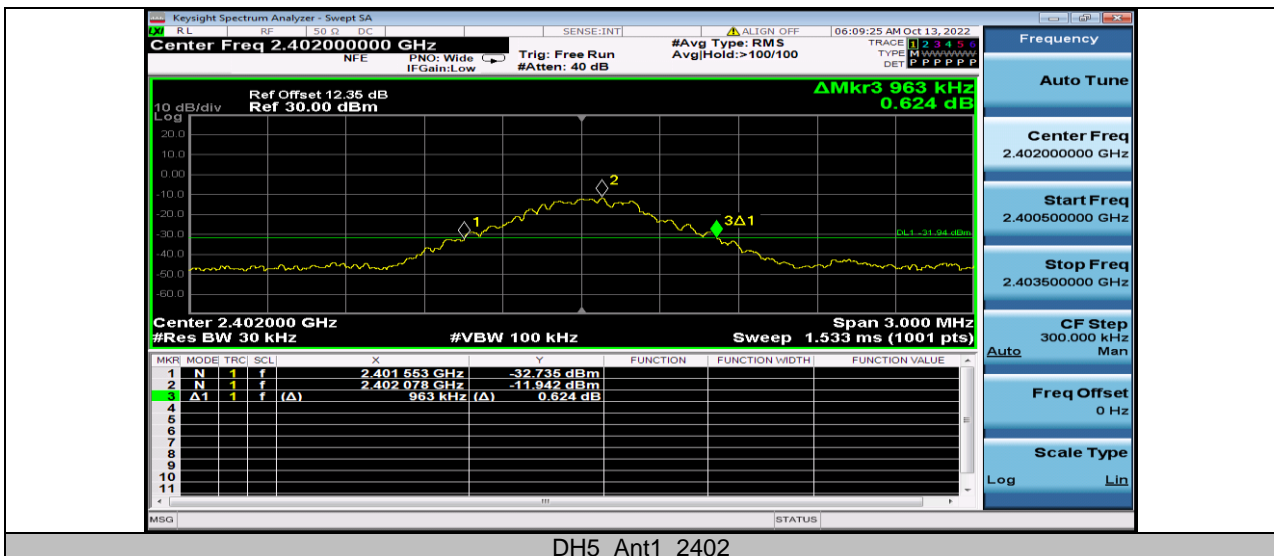


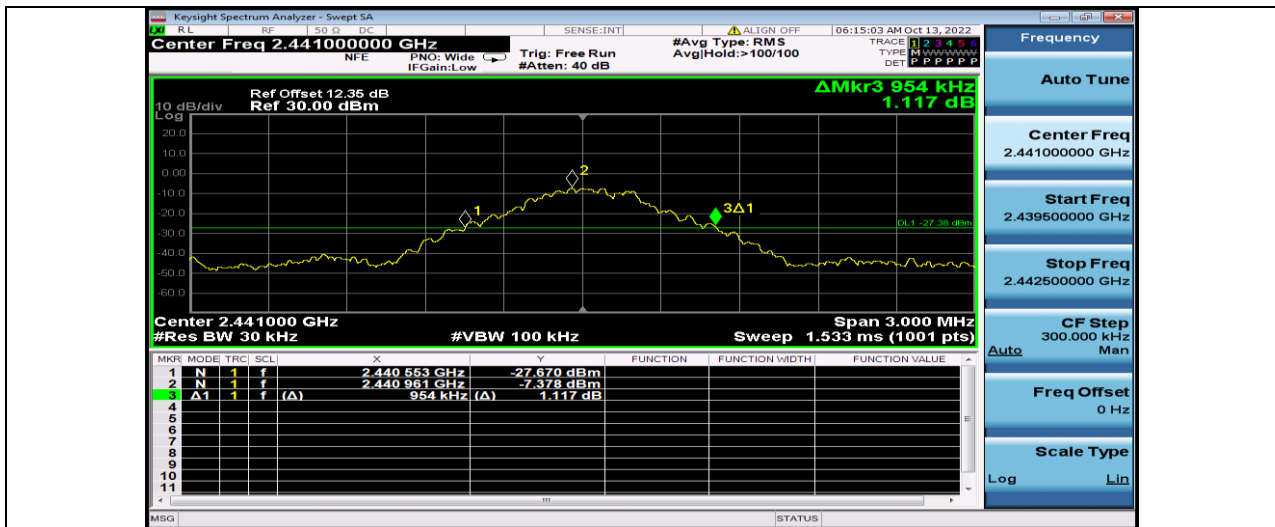


DH5_Ant1_2441

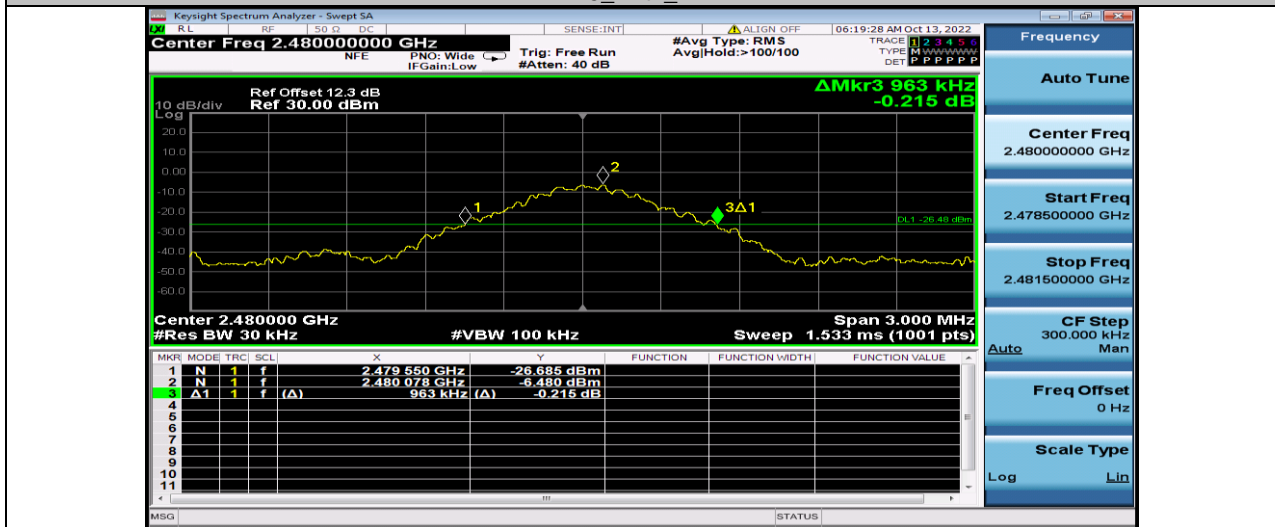


DH5_Ant1_2480

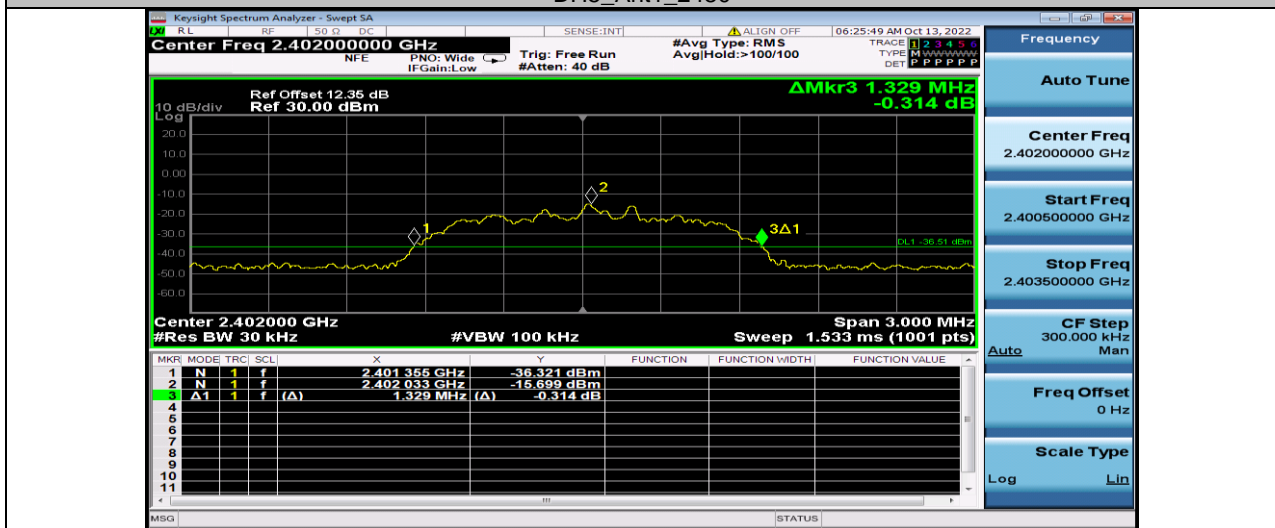


2DH5_Ant1_2402

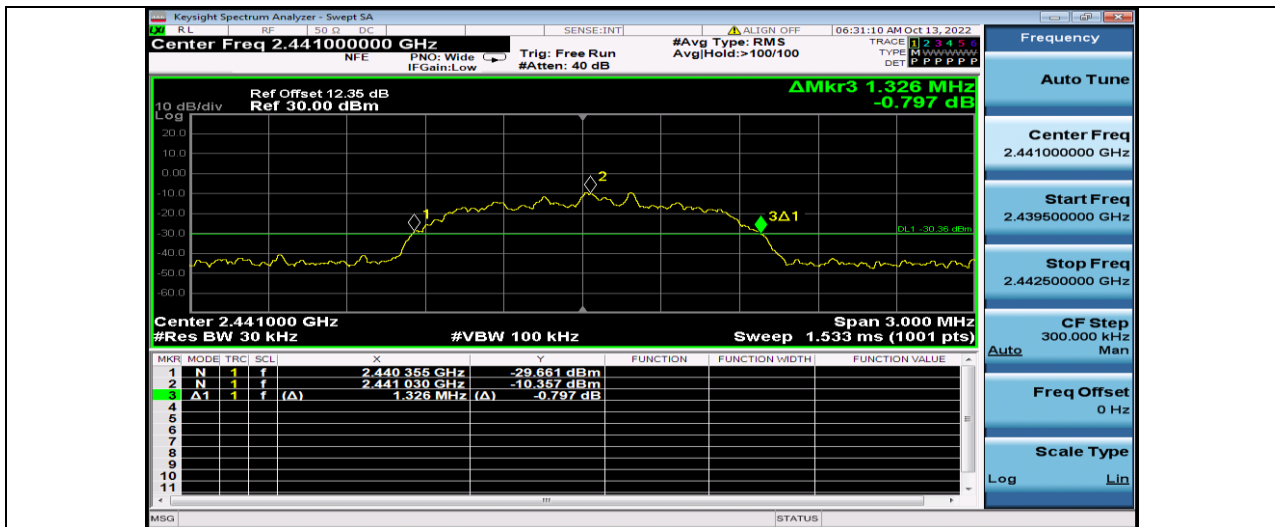

2DH5_Ant1_2441

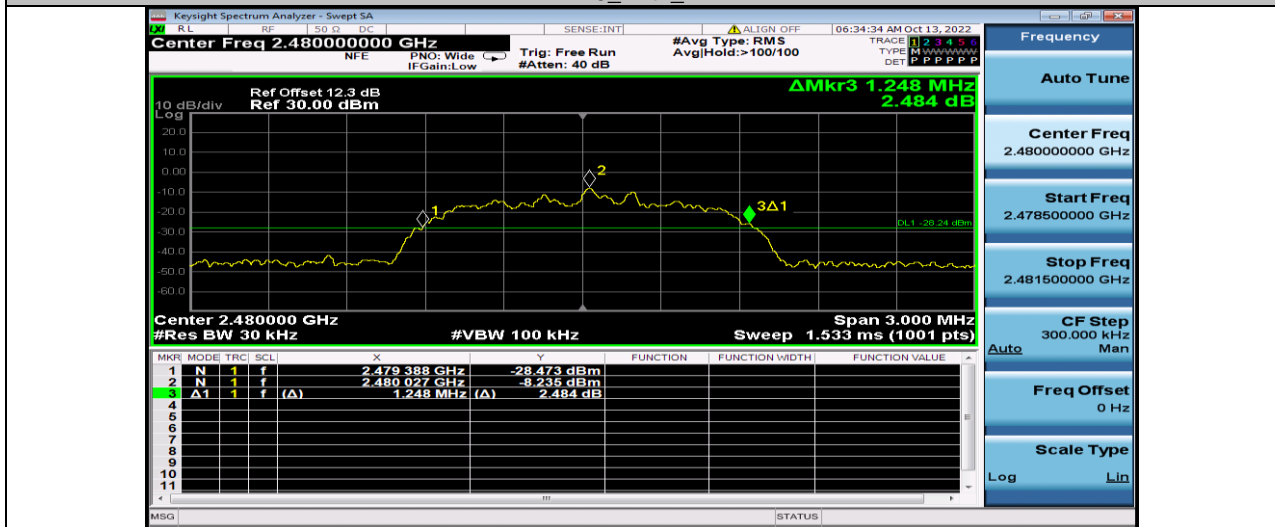


2DH5_Ant1_2480

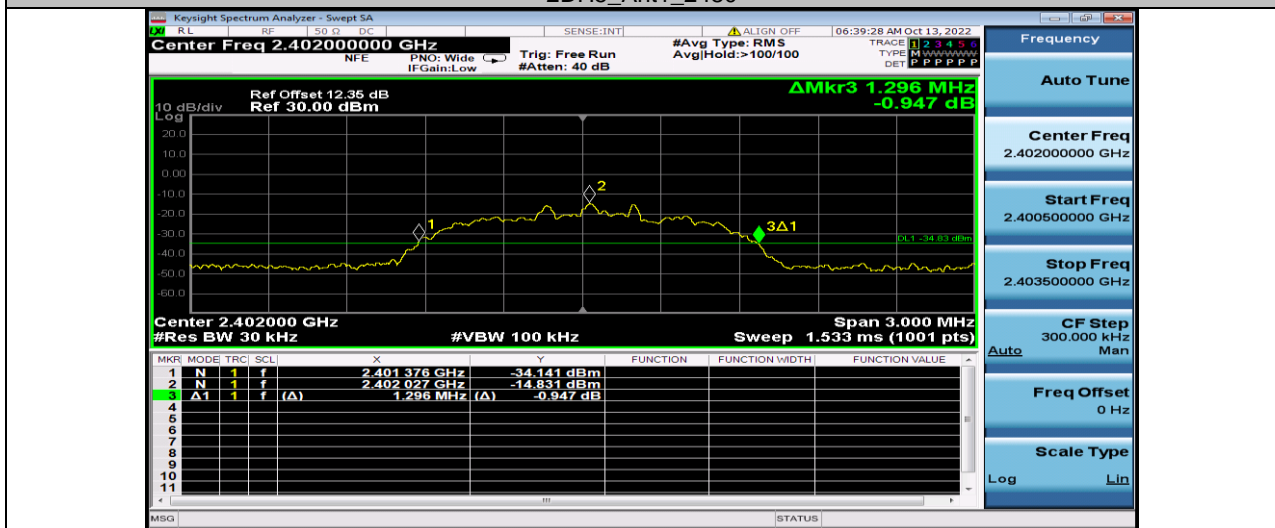

3DH5_Ant1_2402



3DH5_Ant1_2441

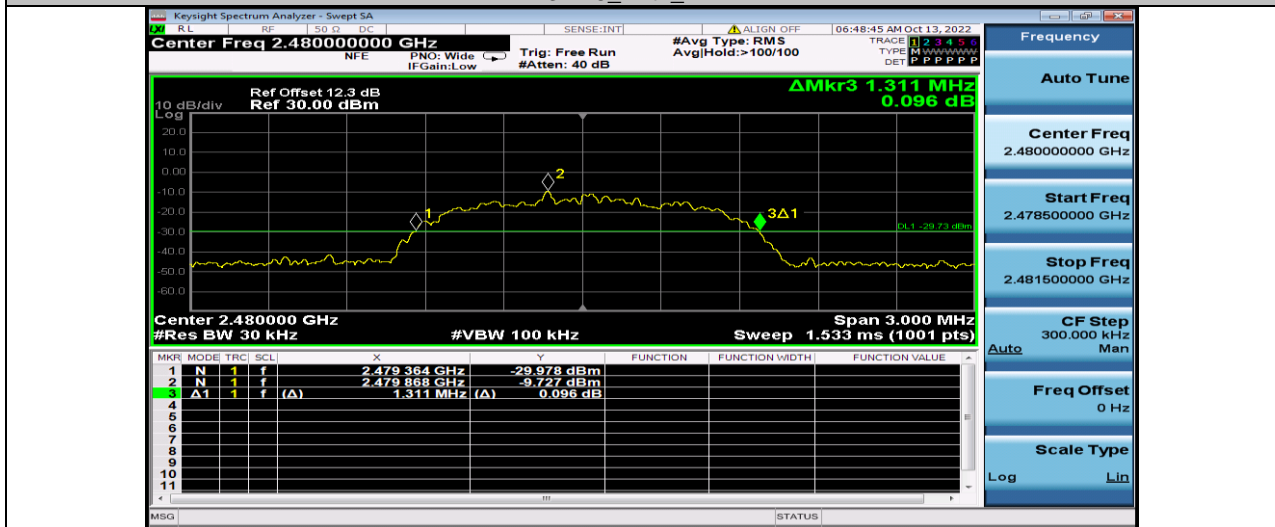

3DH5_Ant1_2480

4 Output power


Test result: Pass

4.1 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. (The e.i.r.p. shall not exceed 4 W)

If the transmitting antenna of directional gain greater than 6dBi is used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.2 Test Configuration

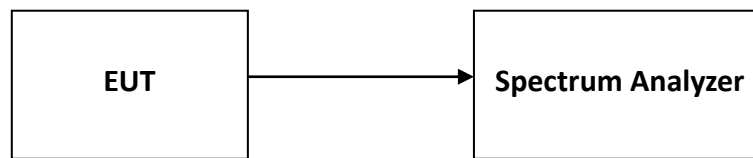

4.3 Measurement Procedure

This is an RF-conducted test to evaluate maximum peak output power. Use a direct connection between the antenna port of the unlicensed wireless device and the spectrum analyzer, through suitable attenuation. The hopping shall be disabled for this test:


- a) Use the following spectrum analyzer settings:
 - 1) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
 - 2) RBW > 20 dB bandwidth of the emission being measured.
 - 3) VBW \geq RBW.
 - 4) Sweep: Auto.
 - 5) Detector function: Peak.
 - 6) Trace: Max hold.
- b) Allow trace to stabilize.
- c) Use the marker-to-peak function to set the marker to the peak of the emission.
- d) The indicated level is the peak output power, after any corrections for external attenuators and cables.
- e) A plot of the test results and setup description shall be included in the test report.

4.4 Test Results of Output Power


Test Mode	Antenna	Frequency [MHz]	Conducted Peak Power [dBm]	Conducted Limit [dBm]	Verdict
DH5	Ant1	2402	0.64	≤20.97	PASS
		2441	2.26	≤20.97	PASS
		2480	0.16	≤20.97	PASS
3DH5	Ant1	2402	-0.23	≤20.97	PASS
		2441	-0.39	≤20.97	PASS
		2480	1.47	≤20.97	PASS

Test Graphs




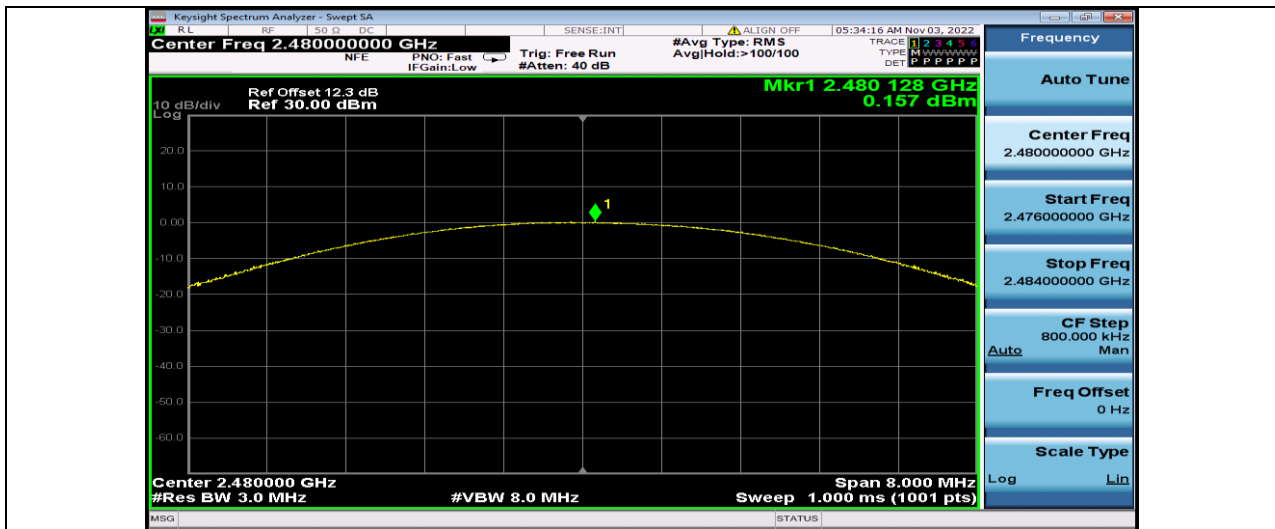


DH5_Ant1_2480

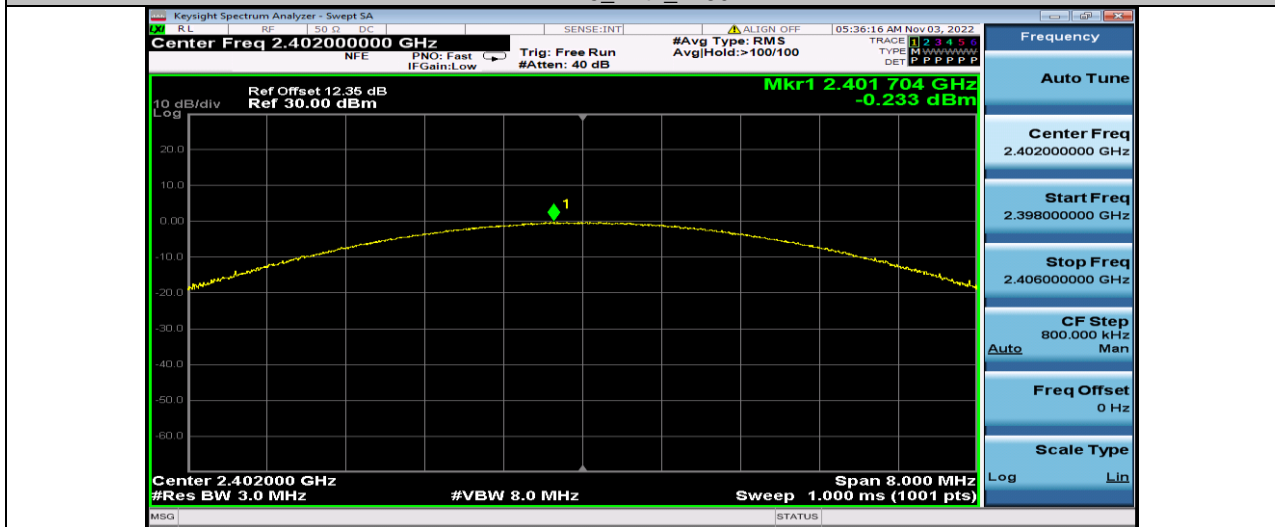

3DH5_Ant1_2402

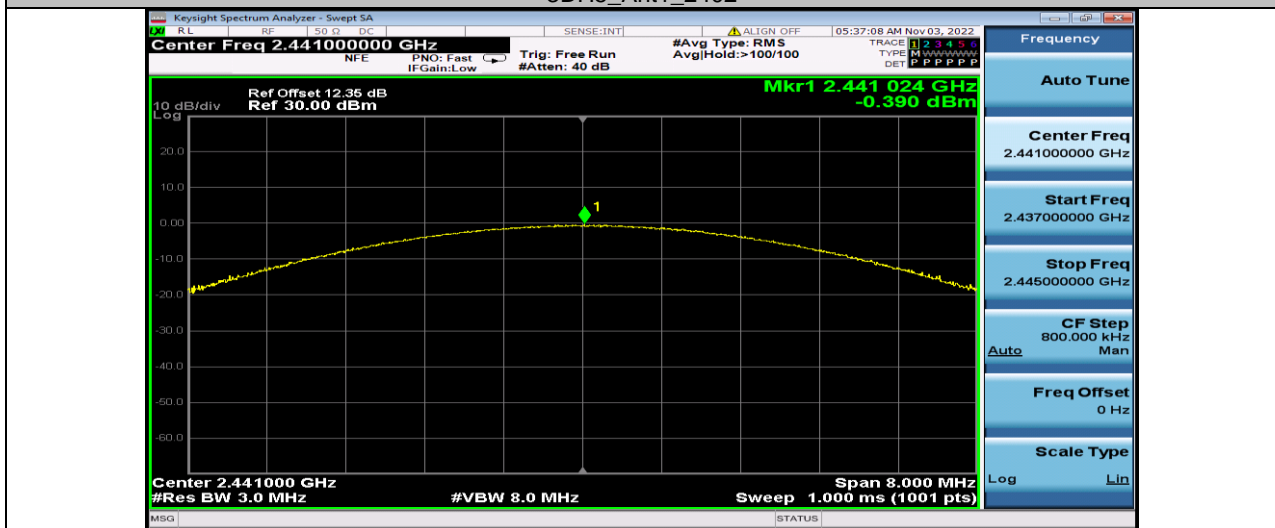

3DH5_Ant1_2441

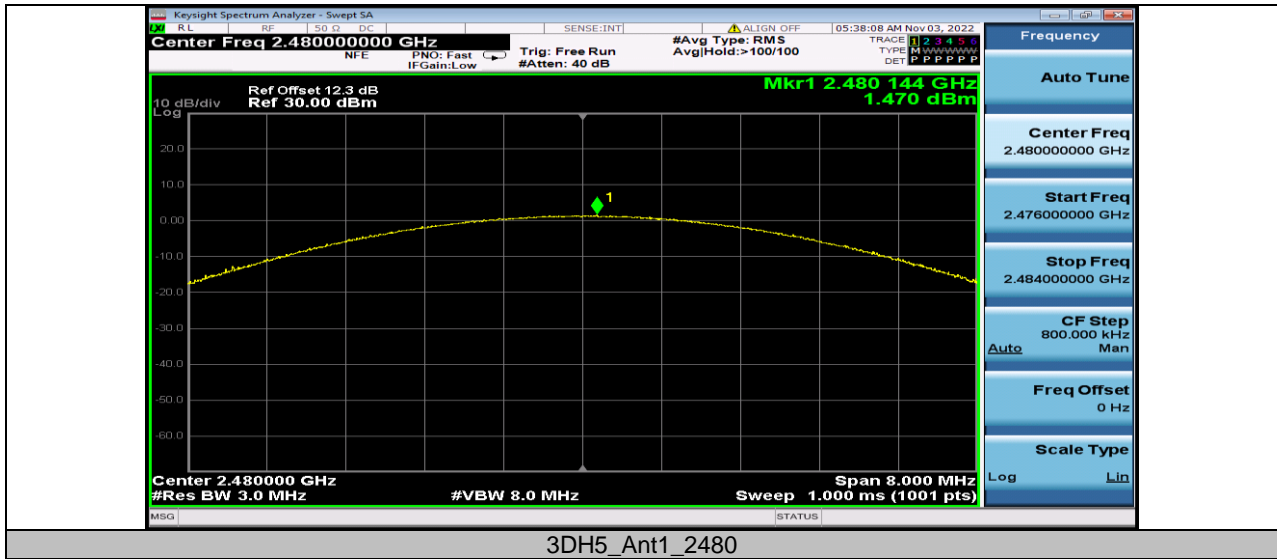

TEST REPORT

5 Radiated Emissions

Test result: Pass

5.1 Limit

The radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits specified showed as below:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

5.2 Measurement Procedure

For Radiated emission below 30MHz:

- a) The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c) Both X and Y axes of the antenna are set to make the measurement.
- d) For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e) The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

TEST REPORT**For Radiated emission above 30MHz:**


- a) The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c) The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e) The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f) The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or $3 \times \text{RBW}$ (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported

5.3 Test Configuration


For Radiated emission below 30MHz:

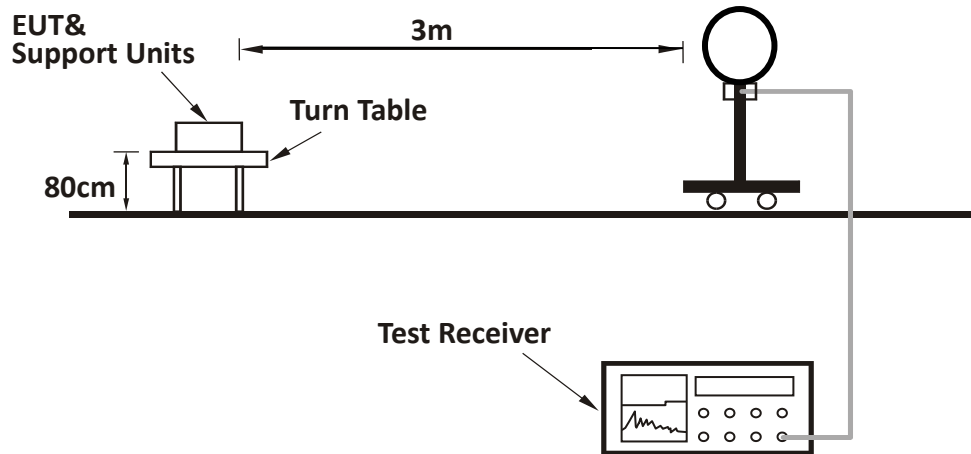

For Radiated emission 30MHz to 1GHz:

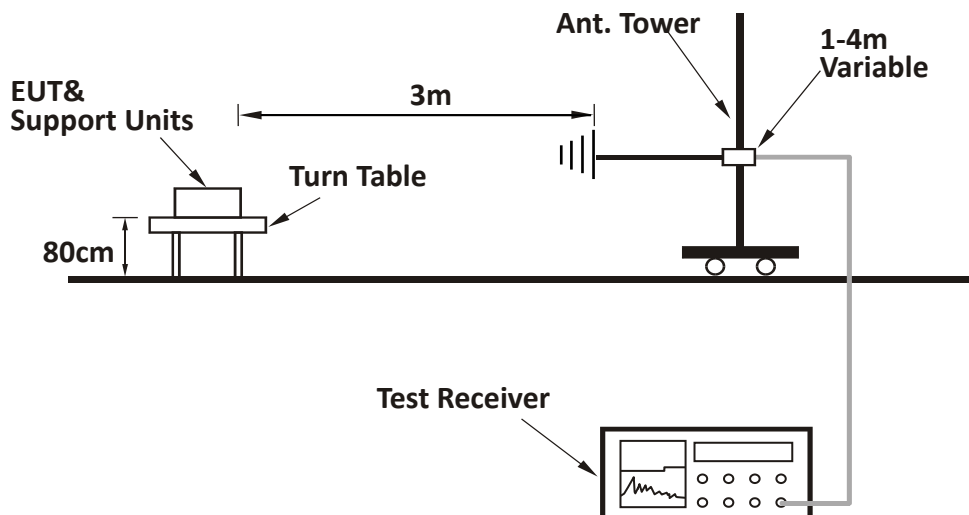

For Radiated emission above 1GHz:

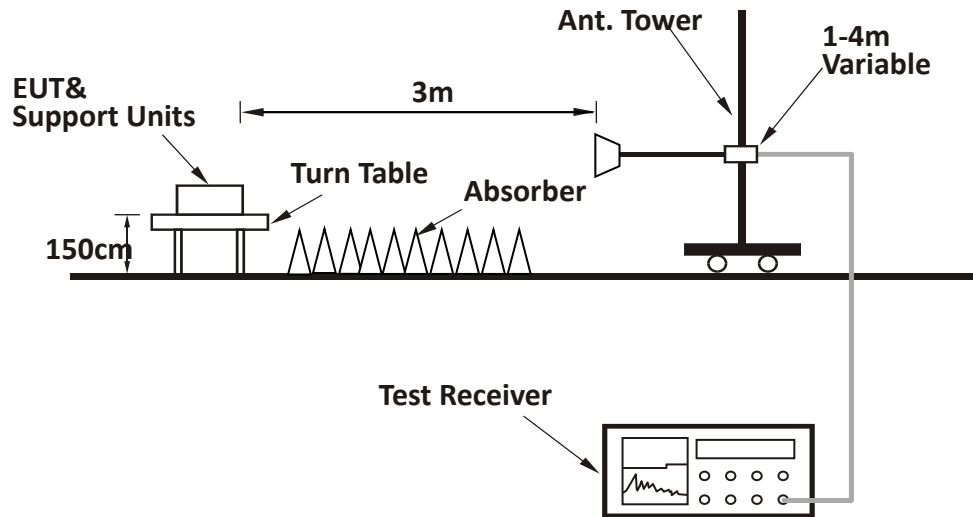


TEST REPORT

5.4 Test Results of Radiated Emissions

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

EUT was tested with D83 module on and off, and the worst data was listed in the report and the worst waveform from 30MHz to 1000MHz is listed as below:

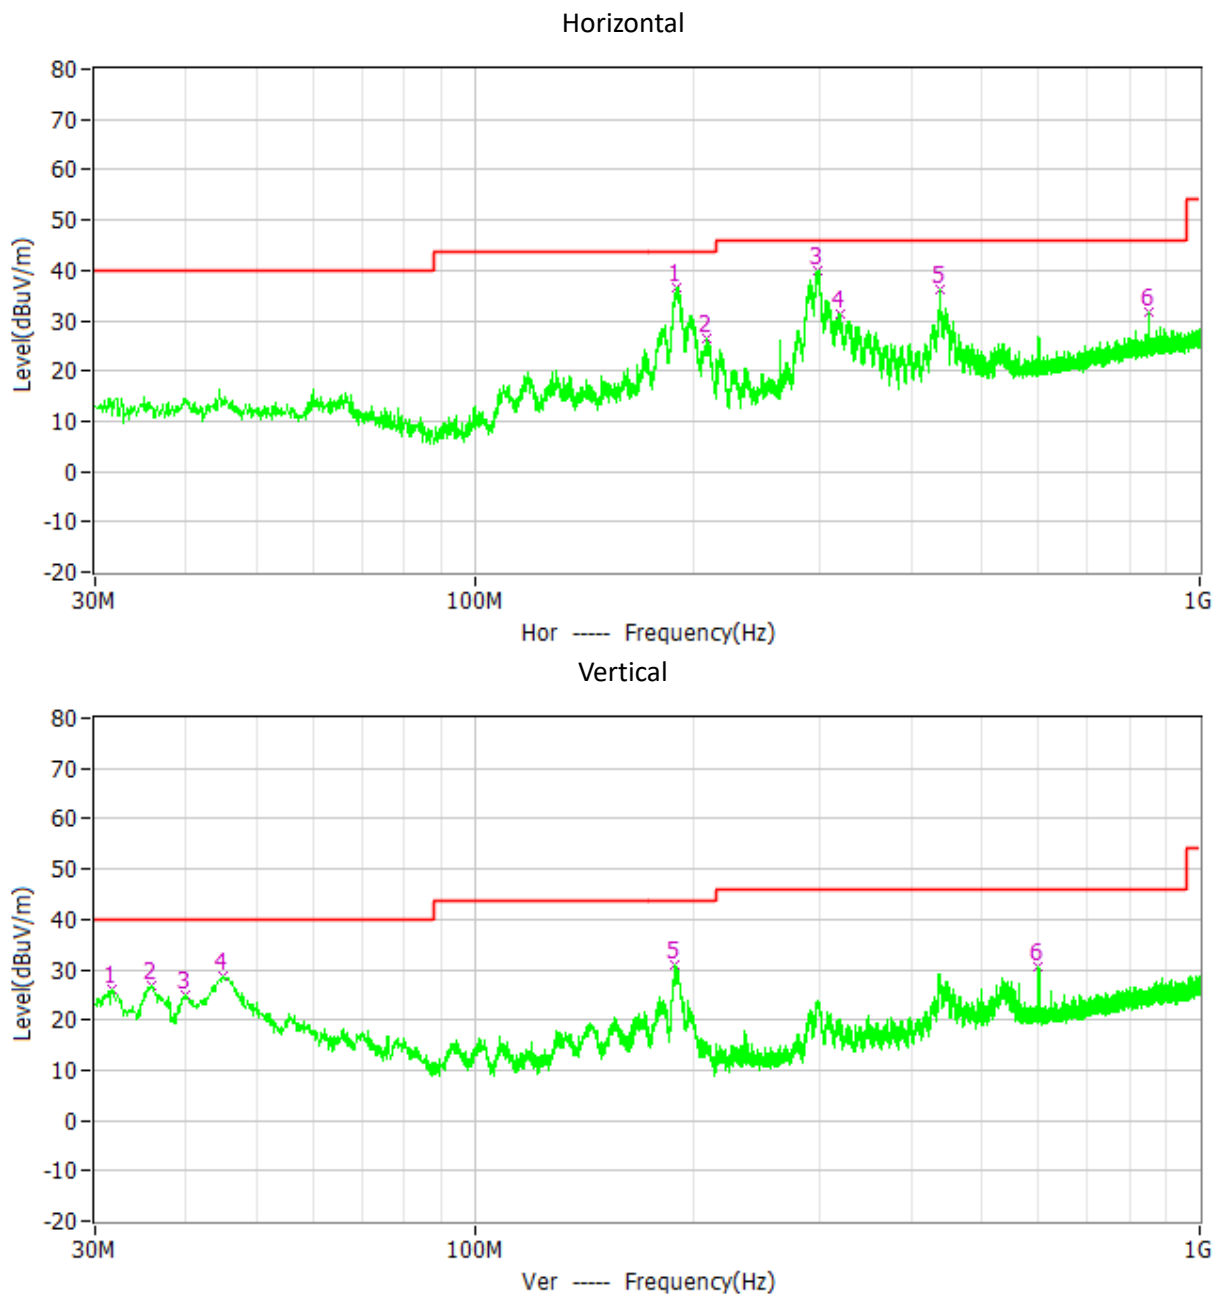

TEST REPORT

Test data 30MHz~1GHz:

Polarization	Frequency (MHz)	Measured level (dB μ V/m)	Correct Factor (dB/m)	Limits (dB μ V/m)	Margin (dB)	Detector
H	190.438	36.7	12.2	43.5	6.8	PK
	209.547	26.4	11.7	43.5	17.1	PK
	296.653	40.1	15.0	46.0	5.9	PK
	318.575	31.2	15.6	46.0	14.8	PK
	437.497	36.3	18.5	46.0	9.7	PK
	850.038	31.5	25.9	46.0	14.5	PK
V	31.746	25.9	13.0	40.0	14.1	PK
	35.820	26.7	13.4	40.0	13.3	PK
	39.894	24.9	13.8	40.0	15.1	PK
	45.132	28.8	14.2	40.0	11.2	PK
	189.177	30.8	12.3	43.5	12.7	PK
	599.972	30.5	22.2	46.0	15.5	PK

TEST REPORT

Test result of 1GHz to 25GHz:

GFSK (DH5) Modulation:

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2402.00	96.4	32.5	Fundamental	/	PK
	V	2402.00	94.8	32.5	Fundamental	/	PK
	H	2390.00	48.8	32.4	74.00	25.2	PK
	V	2390.00	48.6	32.4	74.00	25.4	PK
	H	4952.00	57.5	-13.7	74.00	16.5	PK
	H	4952.00	52.6	-13.7	54.00	1.4	AV
	H	7206.00	39.5	-8.7	74.00	34.5	PK
	V	4952.00	57.0	-13.7	74.00	17.0	PK
	V	4952.00	51.9	-13.7	54.00	2.1	AV
	V	7206.00	39.7	-8.7	74.00	34.3	PK
M	H	4884.00	49.9	-14.0	74.00	24.1	PK
	H	7323.00	40.3	-8.4	74.00	33.7	PK
	V	4882.00	50.3	-14.0	74.00	23.7	PK
	V	7323.00	41.5	-8.4	74.00	32.5	PK
H	H	2480.00	93.8	32.8	Fundamental	/	PK
	V	2480.00	95.2	32.9	Fundamental	/	PK
	H	2483.50	52.4	32.9	74.00	21.6	PK
	V	2483.50	53.0	32.9	74.00	21.0	PK
	H	4782.00	49.2	-14.3	74.00	24.8	PK
	H	7440.00	39.6	-8.7	74.00	34.4	PK
	V	4782.00	49.5	-14.3	74.00	24.5	PK
	V	7440.00	39.9	-8.7	74.00	34.1	PK

$\pi/4$ QPSK (2DH5) Modulation:

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2402.00	92.4	32.5	Fundamental	/	PK
	V	2402.00	91.6	32.5	Fundamental	/	PK
	H	2390.00	48.2	32.5	74.00	25.8	PK
	V	2390.00	48.4	32.5	74.00	25.6	PK
	H	4952.00	56.8	-13.7	74.00	17.2	PK
	H	4952.00	51.8	-13.7	54.00	2.2	AV
	H	7206.00	38.6	-8.7	74.00	35.4	PK
	V	4952.00	55.8	-13.7	74.00	18.2	PK

TEST REPORT

	V	4952.00	50.8	-13.7	54.00	3.2	AV
	V	7206.00	39.5	-8.7	74.00	34.5	PK
M	H	4884.00	49.1	-14.0	74.00	24.9	PK
	H	7323.00	39.8	-8.4	74.00	34.2	PK
	V	4882.00	49.8	-14.0	74.00	24.2	PK
	V	7323.00	40.6	-8.4	74.00	33.4	PK
H	H	2480.00	90.8	32.8	Fundamental	/	PK
	V	2480.00	91.6	32.8	Fundamental	/	PK
	H	2483.50	48.5	32.9	74.00	25.5	PK
	V	2483.50	49.5	32.9	74.00	24.5	PK
	H	4782.00	47.9	-14.3	74.00	26.1	PK
	H	7440.00	38.8	-8.7	74.00	35.2	PK
	V	4782.00	48.2	-14.3	74.00	25.8	PK
	V	7440.00	39.0	-8.7	74.00	35.0	PK

8DPSK (3DH5) Modulation:

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2402.00	92.4	32.5	Fundamental	/	PK
	V	2402.00	91.7	32.5	Fundamental	/	PK
	H	2390.00	48.7	32.4	74.00	25.3	PK
	V	2390.00	48.8	32.4	74.00	25.2	PK
	H	4952.00	57.1	-13.7	74.00	16.9	PK
	H	4952.00	52.3	-13.7	54.00	1.7	AV
	H	7206.00	38.9	-8.7	74.00	35.1	PK
	V	4952.00	56.5	-13.7	74.00	17.5	PK
	V	4952.00	51.6	-13.7	54.00	2.4	AV
	V	7206.00	39.3	-8.7	74.00	34.7	PK
M	H	4884.00	49.7	-14.0	74.00	24.3	PK
	H	7323.00	40.0	-8.4	74.00	34.0	PK
	V	4882.00	50.0	-14.0	74.00	24.0	PK
	V	7323.00	40.9	-8.4	74.00	33.1	PK
H	H	2480.00	91.7	32.8	Fundamental	/	PK
	V	2480.00	91.6	32.8	Fundamental	/	PK
	H	2483.50	49.2	32.9	74.00	24.8	PK
	V	2483.50	49.2	32.9	74.00	24.8	PK
	H	4782.00	48.7	-14.3	74.00	25.3	PK
	H	7440.00	39.2	-8.7	74.00	34.8	PK

TEST REPORT

	V	4782.00	48.9	-14.3	74.00	25.1	PK
	V	7440.00	39.4	-8.7	74.00	34.6	PK

- Remark: 1. Correct Factor = Antenna Factor + Cable Loss (- Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.
 2. Corrected Reading = Original Receiver Reading + Correct Factor
 3. Margin = Limit - Corrected Reading
 4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,
 Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10.00dBuV,
 Limit = 40.00dBuV/m.
 Then Correct Factor = $30.20 + 2.00 - 32.00 = 0.20\text{dB/m}$;
 Corrected Reading = $10\text{dBuV} + 0.20\text{dB/m} = 10.20\text{dBuV/m}$;
 Margin = $40.00\text{dBuV/m} - 10.20\text{dBuV/m} = 29.80\text{dB}$.

6 Power line conducted emission


Test result: Pass

6.1 Limit

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	QP	AV
0.15-0.5	66 to 56*	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

6.2 Test Configuration

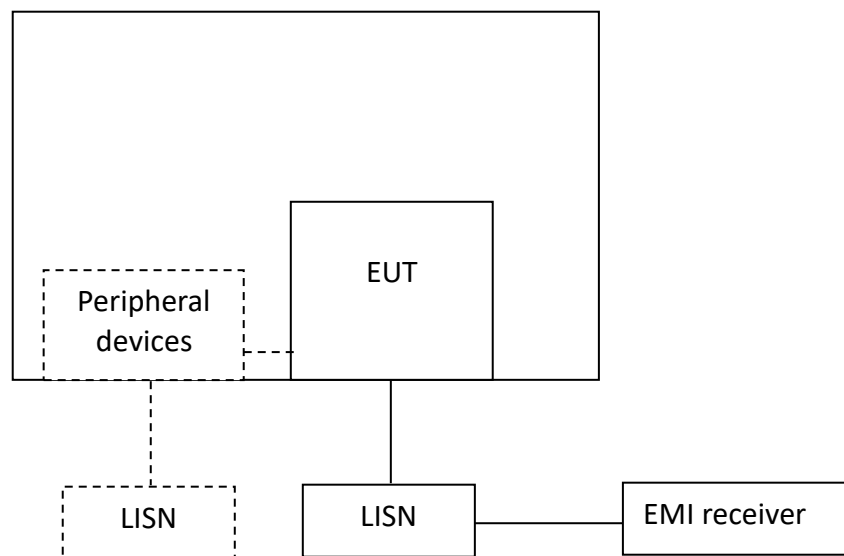

6.3 Measurement Procedure


Measured levels of ac power-line conducted emission shall be the emission voltages from the voltage probe, where permitted, or across the 50 Ω LISN port (to which the EUT is connected), where permitted, terminated into a 50 Ω measuring instrument. All emission voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord by the use of mating plugs and receptacles on the LISN, if used. Equipment shall be tested with power cords that are normally supplied or recommended by the manufacturer and that have electrical and shielding characteristics that are the same as those cords normally supplied or recommended by the manufacturer. For those measurements using a LISN, the 50 Ω measuring port is terminated by a measuring instrument having 50 Ω input impedance. All other ports are terminated in 50 Ω loads.

Tabletop devices shall be placed on a platform of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The vertical conducting plane or wall of an RF-shielded (screened) room shall be located 40 cm to the rear of the EUT. Floor-standing devices shall be placed either directly on the reference ground-plane or on insulating material as described in ANSI C63.4. All other surfaces of tabletop or floor-standing EUTs shall be at least 80 cm from any other grounded conducting surface, including the case or cases of one or more LISNs.


The bandwidth of the test receiver is set at 9 kHz.

6.4 Test Results of Power line conducted emission

L line

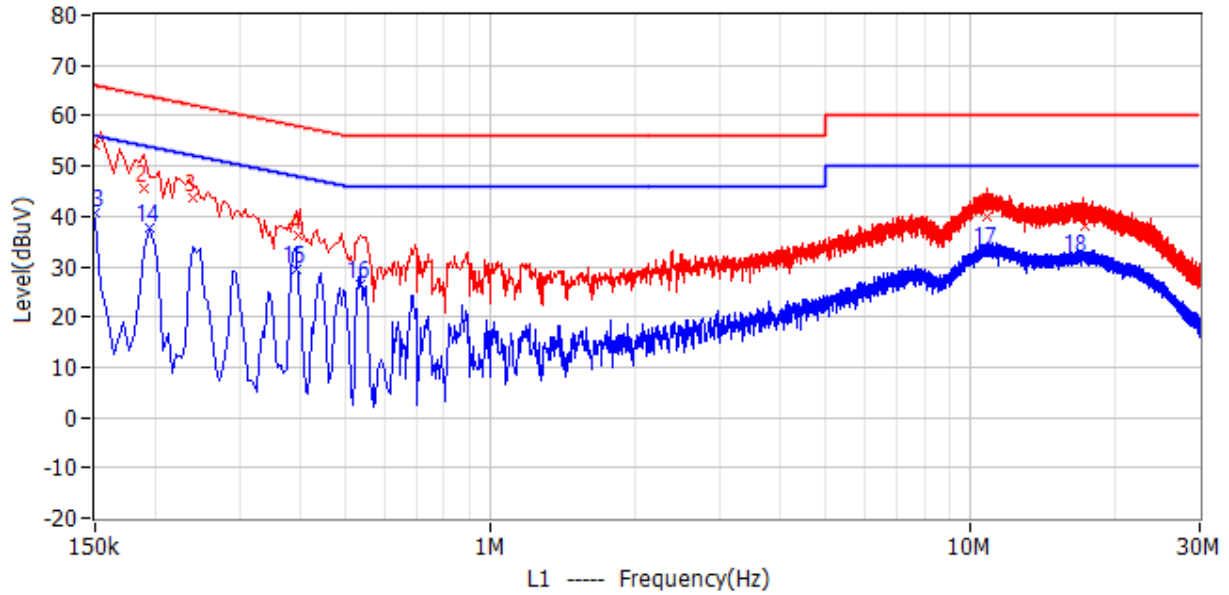

N line

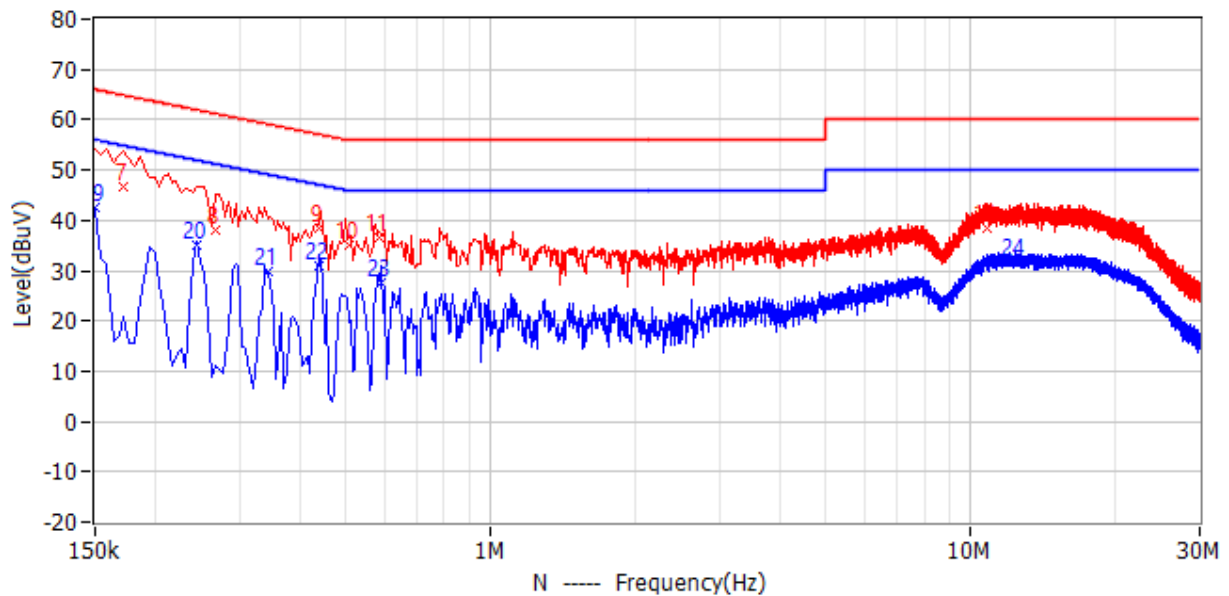

TEST REPORT

Test Data:

No.	Frequency	Limit dBuV	Level dBuV	Margin dB	Reading dBuV	Factor dB	Detector	Phase
1	150.000kHz	66.0	54.0	12.0	47.8	6.2	QP	L1
2	190.500kHz	64.0	45.5	18.6	39.3	6.2	QP	L1
3	240.000kHz	62.1	43.6	18.5	37.4	6.2	QP	L1
4	397.500kHz	57.9	36.0	21.9	29.8	6.2	QP	L1
5	10.847MHz	60.0	39.8	20.2	33.5	6.3	QP	L1
6	17.313MHz	60.0	37.9	22.1	31.5	6.4	QP	L1
7	172.500kHz	64.8	46.5	18.4	40.3	6.2	QP	N
8	267.000kHz	61.2	37.9	23.3	31.7	6.2	QP	N
9	438.000kHz	57.1	38.3	18.8	32.0	6.3	QP	N
10	505.500kHz	56.0	35.1	20.9	28.8	6.3	QP	N
11	586.500kHz	56.0	36.4	19.6	30.1	6.3	QP	N
12	10.770MHz	60.0	38.3	21.7	31.9	6.4	QP	N
13	150.000kHz	56.0	40.5	15.5	34.3	6.2	AV	L1
14	195.000kHz	53.8	37.7	16.1	31.5	6.2	AV	L1
15	393.000kHz	48.0	29.4	18.6	23.2	6.2	AV	L1
16	537.000kHz	46.0	26.6	19.4	20.4	6.2	AV	L1
17	10.815MHz	50.0	33.0	17.0	26.7	6.3	AV	L1
18	16.719MHz	50.0	31.7	18.3	25.3	6.4	AV	L1
19	150.000kHz	56.0	42.7	13.3	36.5	6.2	AV	N
20	244.500kHz	51.9	35.2	16.7	29.0	6.2	AV	N
21	343.500kHz	49.1	30.0	19.1	23.7	6.3	AV	N
22	438.000kHz	47.1	30.9	16.2	24.6	6.3	AV	N
23	591.000kHz	46.0	27.7	18.3	21.4	6.3	AV	N
24	12.431MHz	50.0	31.7	18.3	25.3	6.4	AV	N

- Remark: 1. Factor = LISN Factor + Cable Loss, the value was added to Original Receiver Reading by the software automatically.*
- 2. Level = Reading + Factor*
- 3. Margin = Limit - Level*
- 4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.*

TEST REPORT

7 Antenna requirement

Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Result:

EUT uses permanently attached antenna to the intentional radiator, so it can comply with the provisions of this section.

***** END *****