

# TEST REPORT

**ACCORDING TO:**

**FCC CFR 47 Part 15 subpart C, section 15.231 and subpart B, Class B;  
RSS-210, issue 10 Annex A and ICES-003, Class B**

**FOR:**

**Essence Smartcare Ltd.  
Emergency Pendant Plus Halo  
Model: ES700EPPH  
FCC ID: 2ARFP-EPPH  
IC: 24417-EPPH**

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested. This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.

## Table of contents

1	Applicant information.....	3
2	Equipment under test attributes .....	3
3	Manufacturer information .....	3
4	Test details.....	3
5	Tests summary.....	4
6	EUT description.....	5
6.1	General information.....	5
6.2	Test configuration.....	5
6.3	Changes made in EUT .....	5
6.4	Transmitter characteristics .....	6
7	Transmitter tests according to 47CFR part 15 subpart C requirements .....	7
7.1	Periodic operation requirements .....	7
7.2	Field strength of emissions.....	11
7.3	Occupied bandwidth test.....	25
7.4	Antenna requirements .....	28
8	Unintentional emissions according to 47CFR part 15 subpart B and ICES-003 requirements .....	29
8.1	Radiated emission measurements .....	29
9	APPENDIX A Test equipment and ancillaries used for tests.....	34
10	APPENDIX B Test equipment correction factors.....	35
11	APPENDIX C Measurement uncertainties .....	37
12	APPENDIX D Test laboratory description .....	38
13	APPENDIX E Specification references.....	39
14	APPENDIX F Abbreviations and acronyms.....	40



## 1 Applicant information

**Client name:** Essence Smartcare Ltd.  
**Address:** 12 Abba Eban avenue, Ackerstein Tower Bldg. D, P.O.Box 2073, Herzliya 4612001, Israel  
**Telephone:** +972 732 447 735  
**Fax:** +972 9772 9962  
**E-mail:** [israelgo@essence-grp.com](mailto:israelgo@essence-grp.com)  
**Contact name:** Mr. Israel Gottesman

## 2 Equipment under test attributes

**Product name:** Emergency Pendant Plus Halo  
**Product type:** Transceiver  
**Model(s):** ES700EPPH  
**Serial number:** A000AB11  
**Hardware version:** 4.A  
**Software release:** 11.05  
**Receipt date** 18-Jan-21

## 3 Manufacturer information

**Manufacturer name:** Essence Smartcare Ltd.  
**Address:** 12 Abba Eban avenue, Ackerstein Tower Bldg. D, P.O.Box 2073, Herzliya 4612001, Israel  
**Telephone:** +972 732 447 735  
**Fax:** +972 9772 9962  
**E-Mail:** [israelgo@essence-grp.com](mailto:israelgo@essence-grp.com)  
**Contact name:** Mr. Israel Gottesman

## 4 Test details

**Project ID:** 40972  
**Location:** Hermon Laboratories Ltd. P.O. Box 23, Binyamina 3055001, Israel  
**Test started:** 19-Jan-21  
**Test completed:** 20-Jan-21  
**Test specification(s):** FCC CFR 47 Part 15 subpart C, section 15.231 and subpart B, Class B;  
RSS-210, issue 10 Annex A and ICES-003, Class B

## 5 Tests summary

Test	Status
<b>Transmitter characteristics</b>	
FCC Part 15, Section 231(a) / RSS-210, Section A1.1, Periodic operation requirements	Pass
FCC Part 15, Section 231(a) / RSS-210, Section A1.2, Field strength of emissions	Pass
FCC Part 15, Section 231(c) / RSS-210, Section A1.3, Occupied bandwidth	Pass
FCC Part 15, Section 207 / RSS-Gen, Section 8.8, Conducted emission	Not required
FCC Part 15, Section 203 / RSS-Gen, Section 8.3, Antenna requirements	Pass
<b>Unintentional emissions</b>	
FCC Part 15, Section 107 / ICES-003, Section 6.1 class B, Conducted emission at AC power port	Not required
FCC Part 15, Section 109 / RSS-Gen, Section 7.1.2/ ICES-003, Section 6.2 class B, Radiated emission	Pass

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.

The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

	Name and Title	Date	Signature
<b>Tested by:</b>	Mr. A. Morozov, test engineer, EMC & Radio	19-Jan-21 – 21-Jan-21	
<b>Reviewed by:</b>	Mrs. S. Peysahov Sheynin, test engineer, EMC & Radio	04-Feb-21	
<b>Approved by:</b>	Mr. S. Samokha, technical manager, EMC & Radio	16-Feb-21	


## 6 EUT description

Note: The following data in this clause is provided by the customer and represents his sole responsibility

### 6.1 General information

The EUT is Panic device with Fall Detection, operate at 916.5MHz.  
It is equipped with integral antenna and is powered by internal 3 VDC battery.

### 6.2 Test configuration

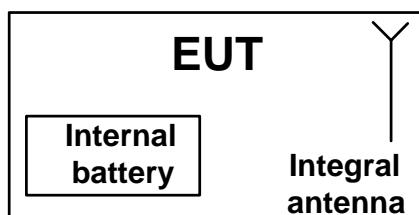

### 6.3 Changes made in EUT

No changes were implemented in the EUT during testing.

## 6.4 Transmitter characteristics

<b>Type of equipment</b>						
<input checked="" type="checkbox"/>	Stand-alone (Equipment with or without its own control provisions)					
<input type="checkbox"/>	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)					
<input type="checkbox"/>	Plug-in card (Equipment intended for a variety of host systems)					
<b>Operating frequencies</b>		916.5 MHz				
<b>Maximum rated output power</b>		At transmitter 50 Ω RF output connector			dBm	
		Field strength at 3 m distance			94.21 dB(µV/m) -peak 69.75 dB(µV/m)-average	
<b>Is transmitter output power variable?</b>		X	No			
		Yes		continuous variable		
				stepped variable with stepsize		
				dB		
	minimum RF power			dBm		
	maximum RF power			dBm		
<b>Antenna connection</b>						
unique coupling	standard connector		X	integral	with temporary RF connector <input checked="" type="checkbox"/> without temporary RF connector	
<b>Antenna/s technical characteristics</b>						
Type	Manufacturer		Model number		Gain	
Integral	Essence Security		printed		-14dBi	
<b>Type of modulation</b>		2FSK				
<b>Transmitter aggregate data rate/s</b>		38.4 kbps				
<b>Transmitter power source</b>						
X	Battery	Nominal rated voltage	3VDC	Battery type	Alkaline	
DC		Nominal rated voltage	VDC			
AC mains		Nominal rated voltage	VAC			
<b>Common power source for transmitter and receiver</b>			X	yes	no	



HERMON LABORATORIES

Report ID: ESSRAD\_FCC.40972  
Date of Issue: 16-Feb-21

<b>Test specification:</b>	<b>FCC Part 15, Section 231(a) / RSS-210, Section A1.1.1, Periodic operation requirements</b>		
<b>Test procedure:</b>	Supplier declaration		
<b>Test mode:</b>	Compliance		
<b>Date(s):</b>	20-Jan-21		
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 40 %	<b>Air Pressure:</b> 1014 hPa	<b>Power:</b> 3 VDC
<b>Remarks:</b>			

## 7 Transmitter tests according to 47CFR part 15 subpart C requirements

### 7.1 Periodic operation requirements

#### 7.1.1 General

The EUT was verified for compliance with periodic operation requirements listed below:

- Continuous transmissions such as voice, video and the radio control of toys are not permitted;
- A manually operated transmitter shall employ switch that will automatically deactivate the transmitter within not more than 5 seconds of being released;
- A transmitter activated automatically shall cease transmission within 5 seconds after activation;
- Periodic transmissions, excluding polling or supervision transmissions, at regular predetermined intervals are not permitted;
- Total duration of polling or supervision transmissions, including data, to determine system integrity in security or safety applications shall not exceed 2 seconds per hour;
- Transmission of set-up information for security systems may exceed the transmission duration limits of 5 seconds, provided such transmissions are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data.

The rationale for compliance with the above requirements was either test results or supplier declaration. The summary of results is provided in Table 7.1.1.

#### 7.1.2 Test procedure for transmitter shut down test

7.1.2.1 The EUT was set up as shown in Figure 7.1.1.

7.1.2.2 The spectrum analyzer center frequency was adjusted to the EUT carrier, span set to zero and video triggered for transmission.

7.1.2.3 The transmitter was activated either manually or automatically. Once manually operated transmitter was activated, the switch was immediately released.

7.1.2.4 The transmission time was captured and shown in Plot 7.1.1.

#### 7.1.3 Test procedure for measurements of polling / supervision transmission duration

7.1.3.1 The EUT was set up as shown in Figure 7.1.1.

7.1.3.2 The spectrum analyzer center frequency was adjusted to the EUT carrier, span set to zero and video triggered for transmission.

7.1.3.3 The transmission time was captured and shown in Plot 7.1.1.

Figure 7.1.1 Setup for transmitter shut down test






HERMON LABORATORIES

Report ID: ESSRAD\_FCC.40972  
Date of Issue: 16-Feb-21

<b>Test specification:</b>	<b>FCC Part 15, Section 231(a) / RSS-210, Section A1.1.1, Periodic operation requirements</b>		
<b>Test procedure:</b>	Supplier declaration		
<b>Test mode:</b>	Compliance		
<b>Date(s):</b>	20-Jan-21	<b>Verdict:</b>	PASS
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 40 %	<b>Air Pressure:</b> 1014 hPa	<b>Power:</b> 3 VDC
<b>Remarks:</b>			

**Table 7.1.1 Periodic operation requirements**

Requirement	Rationale	Verdict
Continuous transmissions are not permitted	Supplier declaration	Comply
A manually operated transmitter shall be deactivated within not more than 5 seconds of switch being released	NA	Comply
Transmitter activated automatically shall cease transmission within 5 seconds	Plot 7.1.1	Comply
Periodic transmissions at regular predetermined intervals are not permitted	Supplier declaration	Comply
Total duration of polling or supervision transmissions shall not exceed 2 seconds per hour	Plot 7.1.2, Plot 7.1.3	Comply
Transmission of set-up information for security systems may exceed the transmission duration limits of 5 seconds, provided such transmissions are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data.	Supplier declaration	Comply

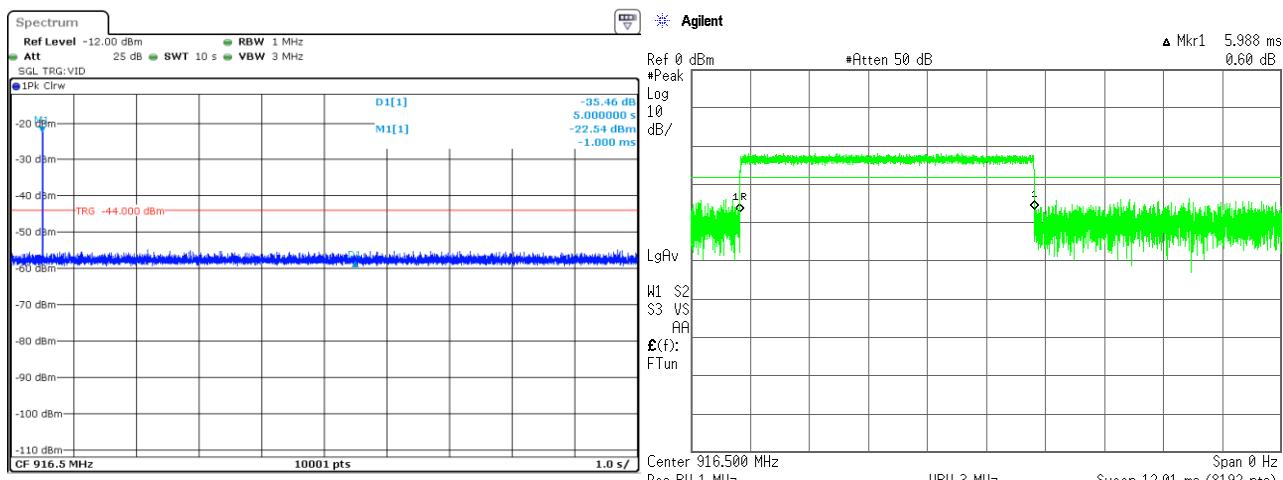**Plot 7.1.1 Transmitter shut down test result**




HERMON LABORATORIES

Report ID: ESSRAD\_FCC.40972  
Date of Issue: 16-Feb-21

<b>Test specification:</b>	<b>FCC Part 15, Section 231(a) / RSS-210, Section A1.1.1, Periodic operation requirements</b>		
<b>Test procedure:</b>	Supplier declaration		
<b>Test mode:</b>	Compliance		
<b>Date(s):</b>	20-Jan-21		
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 40 %	<b>Air Pressure:</b> 1014 hPa	<b>Power:</b> 3 VDC
<b>Remarks:</b>			

**Plot 7.1.2 Polling / supervision transmission duration**

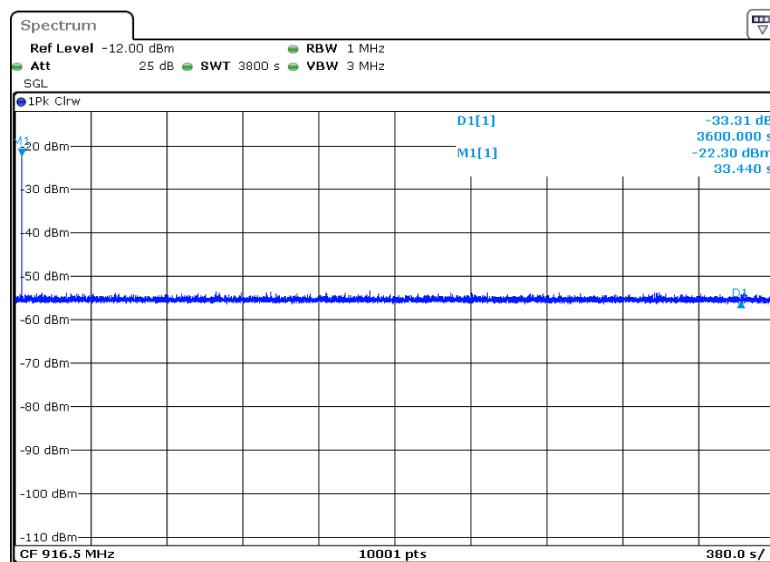



HERMON LABORATORIES

Report ID: ESSRAD\_FCC.40972  
Date of Issue: 16-Feb-21

<b>Test specification:</b>	<b>FCC Part 15, Section 231(a) / RSS-210, Section A1.1.1, Periodic operation requirements</b>		
<b>Test procedure:</b>	Supplier declaration		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	PASS
<b>Date(s):</b>	20-Jan-21		
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 40 %	<b>Air Pressure:</b> 1014 hPa	<b>Power:</b> 3 VDC
<b>Remarks:</b>			

**Table 7.1.2 Total duration of polling / supervision transmissions**

<b>Duration, ms</b>	<b>Repetition period, ms</b>	<b>Maximum number of transmissions within 1 hour</b>	<b>Total duration within 1 hour, ms</b>
5.988	NA	1	5.988

**Reference numbers of test equipment used**

HL 4355	HL 5397	HL 4136	HL 5663				
---------	---------	---------	---------	--	--	--	--

Full description is given in Appendix A.



HERMON LABORATORIES

Report ID: ESSRAD\_FCC.40972  
Date of Issue: 16-Feb-21

<b>Test specification:</b>	<b>FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions</b>		
<b>Test procedure:</b>	ANSI C63.10, Section 6.5 / 6.6		
<b>Test mode:</b>	Compliance		
<b>Date(s):</b>	19-Jan-21		
<b>Temperature:</b> 19.6 °C	<b>Relative Humidity:</b> 51 %	<b>Air Pressure:</b> 1013 hPa	<b>Power:</b> 3 VDC
<b>Remarks:</b>			

## 7.2 Field strength of emissions

### 7.2.1 General

This test was performed to measure field strength of fundamental and spurious emissions from the EUT. Specification test limits are given in Table 7.2.1 and Table 7.2.2.

Table 7.2.1 Radiated fundamental emission limits

Fundamental frequency, MHz	Field strength at 3 m, dB(µV/m)	
	Peak	Average
916.5	102.0	82.0

Table 7.2.2 Radiated spurious emissions limits

Frequency, MHz	Field strength at 3 m, dB(µV/m)				
	Within restricted bands			Outside restricted bands	
	Peak	Quasi Peak	Average	Peak	Average
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**	NA	62.0
0.090 – 0.110	NA	108.5 – 106.8**	NA		
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**		
0.490 – 1.705		73.8 – 63.0**			
1.705 – 30.0*		69.5			
30 – 88		40.0			
88 – 216		43.5			
216 – 960		46.0			
960 - 1000		54.0			
Above 1000	74.0	NA	54.0		

\*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:  

$$Lims_2 = Lims_1 + 40 \log (S_1/S_2)$$

where  $S_1$  and  $S_2$  – standard defined and test distance respectively in meters.

\*\*- The limit decreases linearly with the logarithm of frequency.

Note 1: The fundamental emission limit in dB(µV/m) was calculated as follows:

$$Lim_{AVR} = 20 \times \log(56.81818 \times F - 6136.3636) \text{ - within } 130 - 174 \text{ MHz band;}$$

$$Lim_{AVR} = 20 \times \log(41.6667 \times F - 7083.3333) \text{ - within } 260 - 470 \text{ MHz band,}$$

where  $F$  is the carrier frequency in MHz.

The limit for spurious emissions was 20 dB lower than fundamental emission limit.

The above limits provided in terms of average values, peak limit was 20 dB above the average limit.

Note 2: The above field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.



HERMON LABORATORIES

Report ID: ESSRAD\_FCC.40972  
Date of Issue: 16-Feb-21

<b>Test specification:</b>	<b>FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions</b>		
<b>Test procedure:</b>	ANSI C63.10, Section 6.5 / 6.6		
<b>Test mode:</b>	Compliance		
<b>Date(s):</b>	19-Jan-21		
<b>Temperature:</b> 19.6 °C	<b>Relative Humidity:</b> 51 %	<b>Air Pressure:</b> 1013 hPa	<b>Power:</b> 3 VDC
<b>Remarks:</b>			

### 7.2.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

- 7.2.2.1 The EUT was set up as shown in Figure 7.2.1 energized and the performance check was conducted.
- 7.2.2.2 The measurements were performed in three EUT orthogonal positions.
- 7.2.2.3 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.
- 7.2.2.4 The worst test results (the lowest margins) were found in the EUT vertical (X, Y, Z-axis) position, recorded in Table 7.2.3, Table 7.2.5 and shown in the associated plots.

### 7.2.3 Test procedure for spurious emission field strength measurements above 30 MHz

- 7.2.3.1 The EUT was set up as shown in Figure 7.2.2, Figure 7.2.3, energized and the performance check was conducted.
- 7.2.3.2 The measurements were performed in three EUT orthogonal positions.
- 7.2.3.3 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.
- 7.2.3.4 The worst test results (the lowest margins) were found in the EUT vertical (X, Y, Z-axis) position, recorded in Table 7.2.3, Table 7.2.5 and shown in the associated plots.




HERMON LABORATORIES

Report ID: ESSRAD\_FCC.40972  
Date of Issue: 16-Feb-21

<b>Test specification:</b>	<b>FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions</b>		
<b>Test procedure:</b>	<b>ANSI C63.10, Section 6.5 / 6.6</b>		
<b>Test mode:</b>	<b>Compliance</b>		
<b>Date(s):</b>	<b>19-Jan-21</b>	<b>Verdict:</b>	<b>PASS</b>
<b>Temperature:</b> 19.6 °C	<b>Relative Humidity:</b> 51 %	<b>Air Pressure:</b> 1013 hPa	<b>Power:</b> 3 VDC
<b>Remarks:</b>			

**Figure 7.2.1 Setup for spurious emission field strength measurements below 30 MHz**

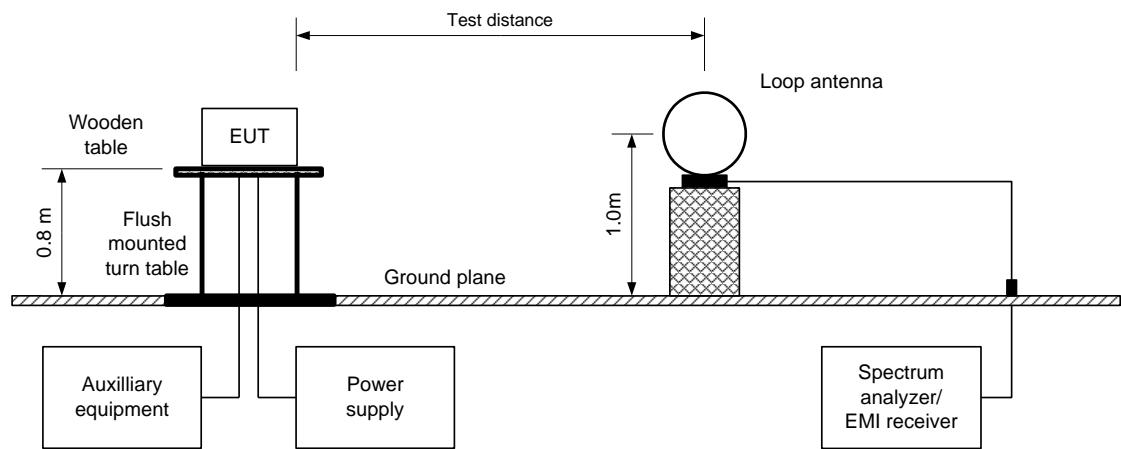



HERMON LABORATORIES

Report ID: ESSRAD\_FCC.40972  
Date of Issue: 16-Feb-21

<b>Test specification:</b>	<b>FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions</b>		
<b>Test procedure:</b>	<b>ANSI C63.10, Section 6.5 / 6.6</b>		
<b>Test mode:</b>	<b>Compliance</b>		
<b>Date(s):</b>	<b>19-Jan-21</b>		
<b>Temperature:</b> 19.6 °C	<b>Relative Humidity:</b> 51 %	<b>Air Pressure:</b> 1013 hPa	<b>Power:</b> 3 VDC
<b>Remarks:</b>			

Figure 7.2.2 Setup for spurious emission field strength measurements in 30 -1000 MHz


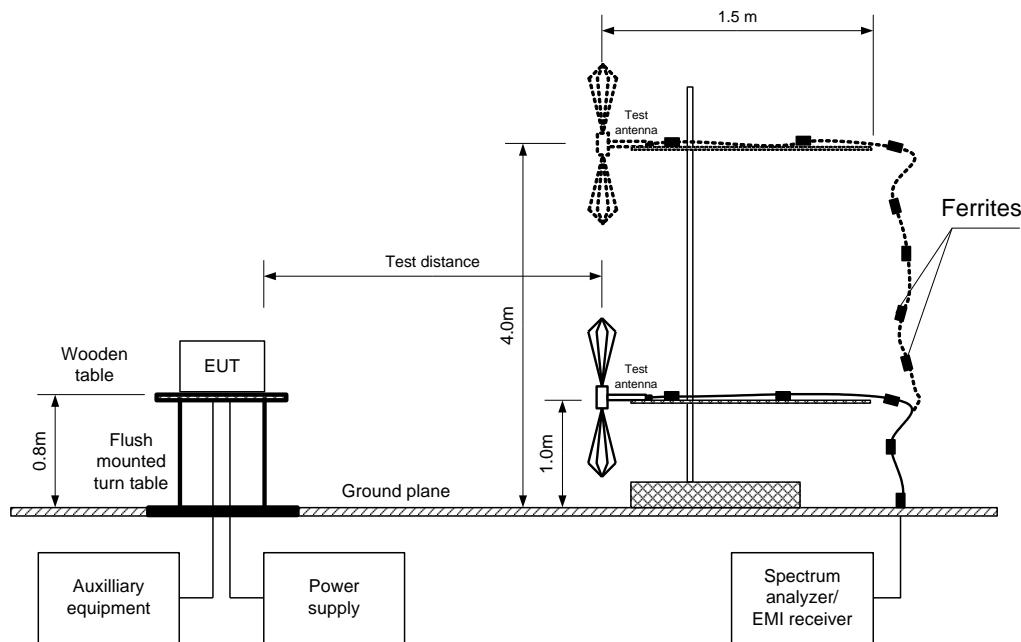


Figure 7.2.3 Setup for spurious emission field strength measurements above 1000 MHz



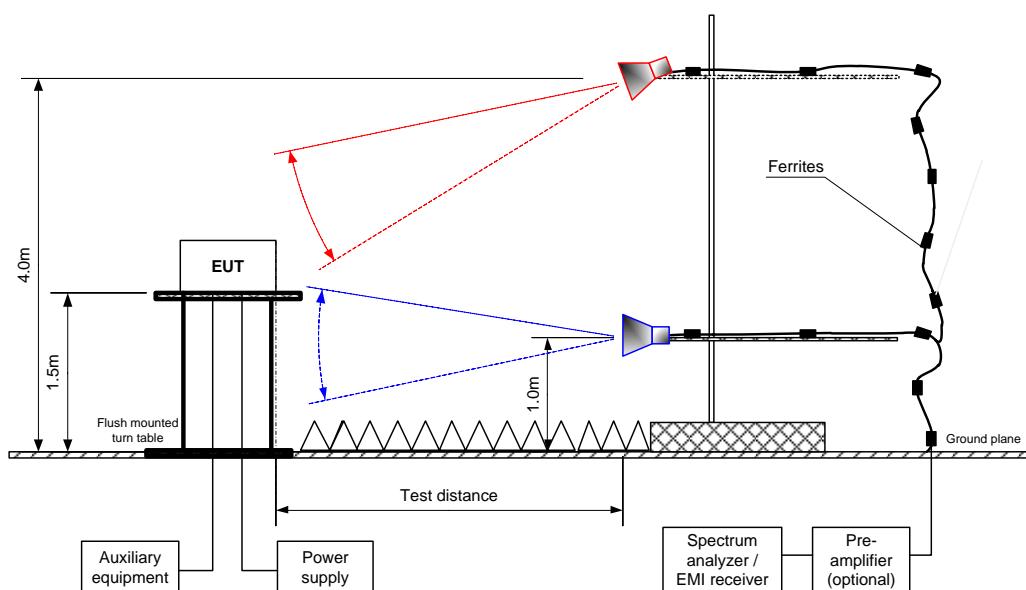

HERMON LABORATORIES

Report ID: ESSRAD\_FCC.40972  
Date of Issue: 16-Feb-21

<b>Test specification:</b>		FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions			
<b>Test procedure:</b>		ANSI C63.10, Section 6.5 / 6.6			
<b>Test mode:</b>		Compliance			<b>Verdict:</b> PASS
<b>Date(s):</b>		19-Jan-21			
<b>Temperature:</b> 19.6 °C		<b>Relative Humidity:</b> 51 %		<b>Air Pressure:</b> 1013 hPa	<b>Power:</b> 3 VDC
<b>Remarks:</b>					

**Table 7.2.3 Field strength of fundamental emission, spurious emissions outside restricted bands and within restricted bands at frequencies above 1 GHz**

TEST DISTANCE:	3 m
EUT POSITION:	3 orthogonal ( X / Y / Z )
MODULATION:	QFSK
MODULATING SIGNAL:	PRBS
BIT RATE:	38.44 kbps
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum
INVESTIGATED FREQUENCY RANGE:	0.009 -10000MHz
DETECTOR USED:	Peak
RESOLUTION BANDWIDTH:	0.2 kHz (9 kHz – 150 kHz) 9.0 kHz (150 kHz – 30 MHz) 120 kHz (30 MHz – 1000 MHz) 1.0 MHz (above 1000 MHz) ≥ Resolution bandwidth
VIDEO BANDWIDTH:	Active loop (9 kHz – 30 MHz)
TEST ANTENNA TYPE:	Biconilog (30 MHz – 1000 MHz) Double ridged guide (above 1000 MHz)

F, MHz	Antenna		Azimuth, degrees*	Peak field strength			Average field strength			Verdict
	Pol.	Height, m		Measured, dB(µV/m)	Limit, dB(µV/m)	Margin, dB**	Measured, dB(µV/m)	Calculated, dB(µV/m)	Limit, dB(µV/m)	
<b>Fundamental emission***</b>										
916.50	H	1.0	180	94.21	102.0	-7.79	94.21	69.7556	82.0	-12.24
<b>Spurious emissions</b>										
3666.15	H	1.28	7.0	42.63	74.00	-31.37	42.63	18.1756	54.0	-35.82

\*- EUT front panel refers to 0 degrees position of turntable.

\*\*- Margin, dB =Measured (calculated) value, dB(µV/m)-Limit, dB(µV/m)

\*\*\* Max value was obtained in Z-axis orthogonal position and at Unom input power voltage.

**Table 7.2.4 Average factor calculation**

Transmission pulse		Transmission burst		Transmission train duration, ms	Average factor, dB
Duration, ms	Period, ms	Duration, ms	Period, ms		
100	5.988	NA	NA	NA	-24.4544

\*- Average factor was calculated as follows

$$\text{for pulse train shorter than 100 ms: } \text{Average factor} = 20 \times \log_{10} \left( \frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{\text{Train duration}} \times \text{Number of bursts within pulse train} \right)$$

$$\text{for pulse train longer than 100 ms: } \text{Average factor} = 20 \times \log_{10} \left( \frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{100\text{ms}} \times \text{Number of bursts within 100ms} \right)$$

**Reference numbers of test equipment used**

HL 446	HL 3903	HL 4360	HL 4933	HL 5085	HL 5669		
HL 5670	HL 4011	HL 3818					

Full description is given in Appendix A.



HERMON LABORATORIES

Report ID: ESSRAD\_FCC.40972  
Date of Issue: 16-Feb-21

<b>Test specification:</b> FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions	
<b>Test procedure:</b> ANSI C63.10, Section 6.5 / 6.6	
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS
<b>Date(s):</b> 19-Jan-21	
<b>Temperature:</b> 19.6 °C	<b>Air Pressure:</b> 1013 hPa
<b>Relative Humidity:</b> 51 %	<b>Power:</b> 3 VDC
<b>Remarks:</b>	

**Table 7.2.5 Field strength of emissions below 1 GHz within restricted bands**

TEST DISTANCE:	3 m
EUT POSITION:	3 orthogonal ( X / Y / Z )
MODULATION:	QFSK
MODULATING SIGNAL:	PRBS
BIT RATE:	38.44 kbps
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum
INVESTIGATED FREQUENCY RANGE:	0.009 – 1000 MHz
DETECTOR USED:	Peak
RESOLUTION BANDWIDTH:	0.2 kHz (9 kHz – 150 kHz) 9.0 kHz (150 kHz – 30 MHz) 120 kHz (30 MHz – 1000 MHz) ≥ Resolution bandwidth
VIDEO BANDWIDTH:	Active loop (9 kHz – 30 MHz) Biconical (30 MHz – 200 MHz) Log periodic (200 MHz – 1000 MHz) Biconilog (30 MHz – 1000 MHz)
TEST ANTENNA TYPE:	

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
No emissions were found in restricted bands								

\*- Margin = Measured emission - specification limit.

\*\*- EUT front panel refer to 0 degrees position of turntable.



HERMON LABORATORIES

Report ID: ESSRAD\_FCC.40972  
Date of Issue: 16-Feb-21

<b>Test specification:</b> FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions					
<b>Test procedure:</b> ANSI C63.10, Section 6.5 / 6.6					
<b>Test mode:</b> Compliance					<b>Verdict:</b> PASS
<b>Date(s):</b> 19-Jan-21					
<b>Temperature:</b> 19.6 °C	<b>Relative Humidity:</b> 51 %	<b>Air Pressure:</b> 1013 hPa		<b>Power:</b> 3 VDC	
<b>Remarks:</b>					

**Table 7.2.6 Restricted bands according to FCC 15, Section 205**

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.37625 - 8.38675	73 - 74.6	399.9 - 410	2690 - 2900	10.6 - 12.7
0.495 - 0.505	8.41425 - 8.41475	74.8 - 75.2	608 - 614	3260 - 3267	13.25 - 13.4
2.1735 - 2.1905	12.290 - 12.293	108 - 121.94	960 - 1240	3332 - 3339	14.47 - 14.5
4.125 - 4.128	12.51975 - 12.52025	123 - 138	1300 - 1427	3345.8 - 3358	15.35 - 16.2
4.17725 - 4.17775	12.57675 - 12.57725	149.9 - 150.05	1435 - 1626.5	3600 - 4400	17.7 - 21.4
4.20725 - 4.20775	13.36 - 13.41	156.52475 - 156.52525	1645.5 - 1646.5	4500 - 5150	22.01 - 23.12
6.215 - 6.218	16.420 - 16.423	156.7 - 156.9	1660 - 1710	5350 - 5460	23.6 - 24
6.26775 - 6.26825	16.69475 - 16.69525	162.0125 - 167.17	1718.8 - 1722.2	7250 - 7750	31.2 - 31.8
6.31175 - 6.31225	16.80425 - 16.80475	167.72 - 173.2	2200 - 2300	8025 - 8500	36.43 - 36.5
8.291 - 8.294	25.5 - 25.67	240 - 285	2310 - 2390	9000 - 9200	
8.362 - 8.366	37.5 - 38.25	322 - 335.4	2483.5 - 2500	9300 - 9500	Above 38.6

**Table 7.2.7 Restricted bands according to RSS-Gen, Table 3**

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.291 - 8.294	16.80425 - 16.80475	399.9 - 410	3260 - 3267	10.6 - 12.7
2.1735 - 2.190	8.362 - 8.366	25.5 - 25.67	608 - 614	3332 - 3339	13.25 - 13.4
3.020 - 3.026	8.37625 - 8.38675	37.5 - 38.25	960 - 1427	3345.8 - 3358	14.47 - 14.5
4.125 - 4.128	8.41425 - 8.41475	73 - 74.6	1435 - 1626.5	3500 - 4400	15.35 - 16.2
4.17725 - 4.17775	12.290 - 12.293	74.8 - 75.2	1645.5 - 1646.5	4500 - 5150	17.7 - 21.4
4.20725 - 4.20775	12.51975 - 12.52025	108 - 138	1660 - 1710	5350 - 5460	22.01 - 23.12
5.677 - 5.683	12.57675 - 12.57725	156.52475 - 156.52525	1718.8 - 1722.2	7250 - 7750	23.6 - 24.0
6.215 - 6.218	13.36 - 13.41	156.7 - 156.9	2200 - 2300	8025 - 8500	31.2 - 31.8
6.26775 - 6.26825	16.42 - 16.423	240 - 285	2310 - 2390	9000 - 9200	36.43 - 36.5
6.31175 - 6.31225	16.69475 - 16.69525	322 - 335.4	2655 - 2900	9300 - 9500	Above 38.6




HERMON LABORATORIES

Report ID: ESSRAD\_FCC.40972  
Date of Issue: 16-Feb-21

<b>Test specification:</b>	<b>FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions</b>		
<b>Test procedure:</b>	<b>ANSI C63.10, Section 6.5 / 6.6</b>		
<b>Test mode:</b>	<b>Compliance</b>		
<b>Date(s):</b>	<b>19-Jan-21</b>		
<b>Temperature:</b> 19.6 °C	<b>Relative Humidity:</b> 51 %	<b>Air Pressure:</b> 1013 hPa	<b>Power:</b> 3 VDC
<b>Remarks:</b>			

**Plot 7.2.1 Radiated emission measurements at the fundamental frequency**

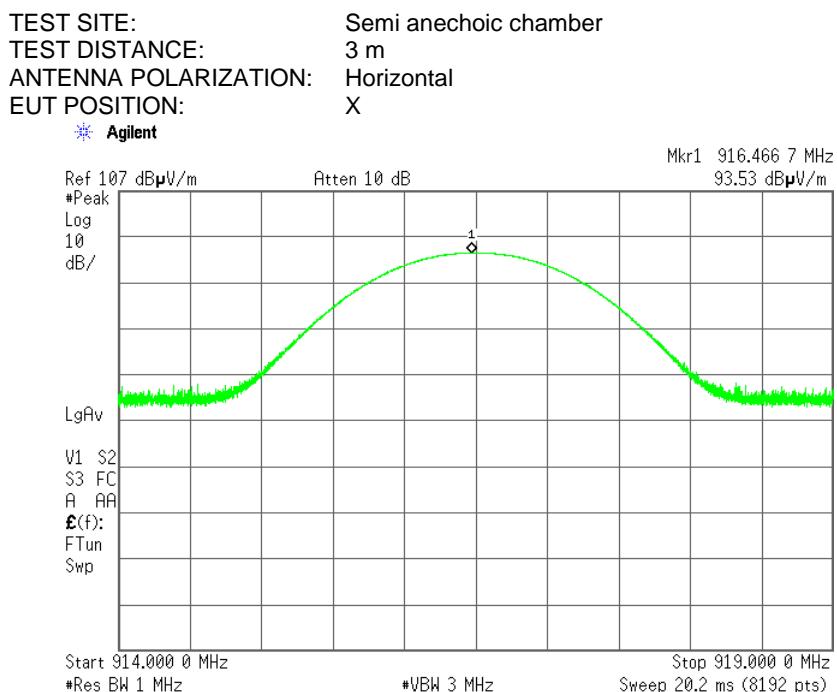



HERMON LABORATORIES

Report ID: ESSRAD\_FCC.40972  
Date of Issue: 16-Feb-21

<b>Test specification:</b>	<b>FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions</b>		
<b>Test procedure:</b>	<b>ANSI C63.10, Section 6.5 / 6.6</b>		
<b>Test mode:</b>	<b>Compliance</b>		
<b>Date(s):</b>	<b>19-Jan-21</b>		
<b>Temperature:</b> 19.6 °C	<b>Relative Humidity:</b> 51 %	<b>Air Pressure:</b> 1013 hPa	<b>Power:</b> 3 VDC
<b>Remarks:</b>			


**Plot 7.2.2 Radiated emission measurements at the fundamental frequency**

TEST SITE: Semi anechoic chamber

TEST DISTANCE: 3 m

ANTENNA POLARIZATION: Horizontal

EUT POSITION: Y

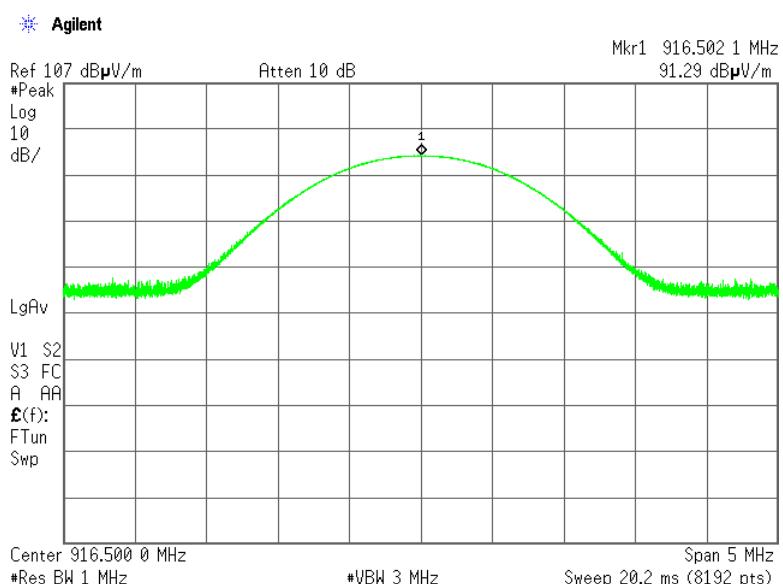




HERMON LABORATORIES

Report ID: ESSRAD\_FCC.40972  
Date of Issue: 16-Feb-21

<b>Test specification:</b>	<b>FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions</b>		
<b>Test procedure:</b>	ANSI C63.10, Section 6.5 / 6.6		
<b>Test mode:</b>	Compliance		
<b>Date(s):</b>	19-Jan-21		
<b>Temperature:</b> 19.6 °C	<b>Relative Humidity:</b> 51 %	<b>Air Pressure:</b> 1013 hPa	<b>Power:</b> 3 VDC
<b>Remarks:</b>			

#### Plot 7.2.3 Radiated emission measurements at the fundamental frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Horizontal  
EUT POSITION: Z

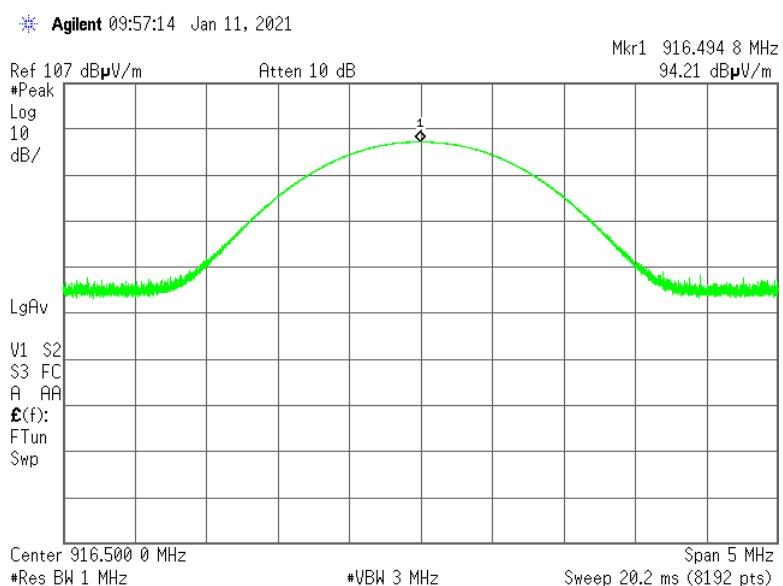



HERMON LABORATORIES

Report ID: ESSRAD\_FCC.40972  
Date of Issue: 16-Feb-21

<b>Test specification:</b>	<b>FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions</b>		
<b>Test procedure:</b>	<b>ANSI C63.10, Section 6.5 / 6.6</b>		
<b>Test mode:</b>	<b>Compliance</b>		
<b>Date(s):</b>	<b>19-Jan-21</b>		
<b>Temperature:</b> 19.6 °C	<b>Relative Humidity:</b> 51 %	<b>Air Pressure:</b> 1013 hPa	<b>Power:</b> 3 VDC
<b>Remarks:</b>			


**Plot 7.2.4 Radiated emission measurements at the fundamental frequency**

TEST SITE: Semi anechoic chamber

TEST DISTANCE: 3 m

ANTENNA POLARIZATION: Horizontal

EUT POSITION: Z

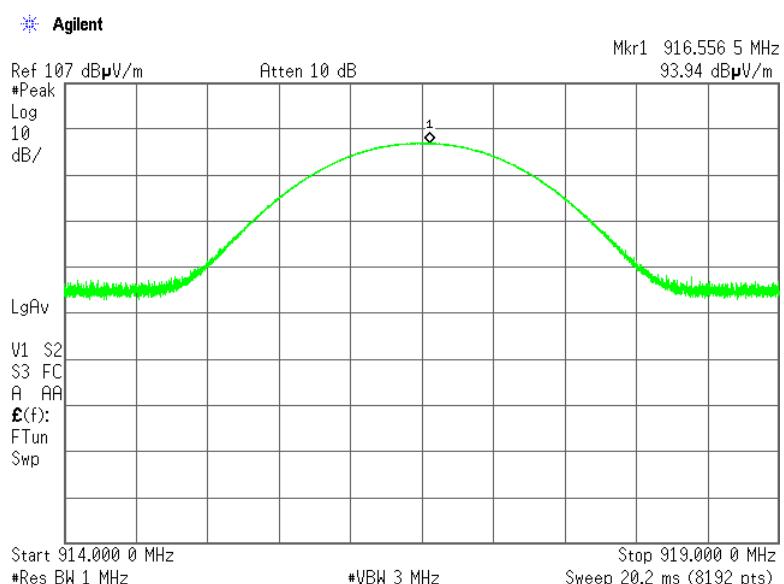




HERMON LABORATORIES

Report ID: ESSRAD\_FCC.40972  
Date of Issue: 16-Feb-21

<b>Test specification:</b>	<b>FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions</b>		
<b>Test procedure:</b>	<b>ANSI C63.10, Section 6.5 / 6.6</b>		
<b>Test mode:</b>	<b>Compliance</b>		
<b>Date(s):</b>	<b>19-Jan-21</b>		
<b>Temperature:</b> 19.6 °C	<b>Relative Humidity:</b> 51 %	<b>Air Pressure:</b> 1013 hPa	<b>Power:</b> 3 VDC
<b>Remarks:</b>			


#### Plot 7.2.5 Radiated emission measurements from 9 kHz to 30 MHz

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal  
EUT POSITION: Z

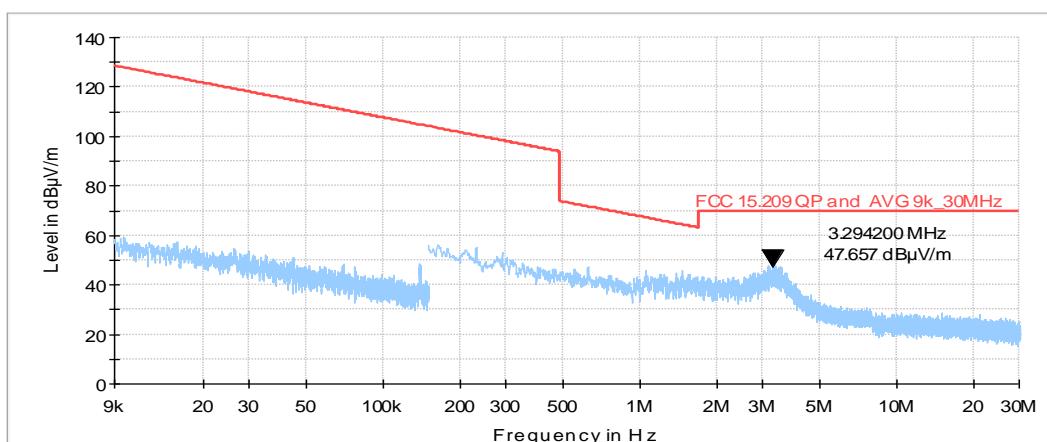

#### Plot 7.2.6 Radiated emission measurements from 30 to 1000 MHz

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal  
EUT POSITION: Z

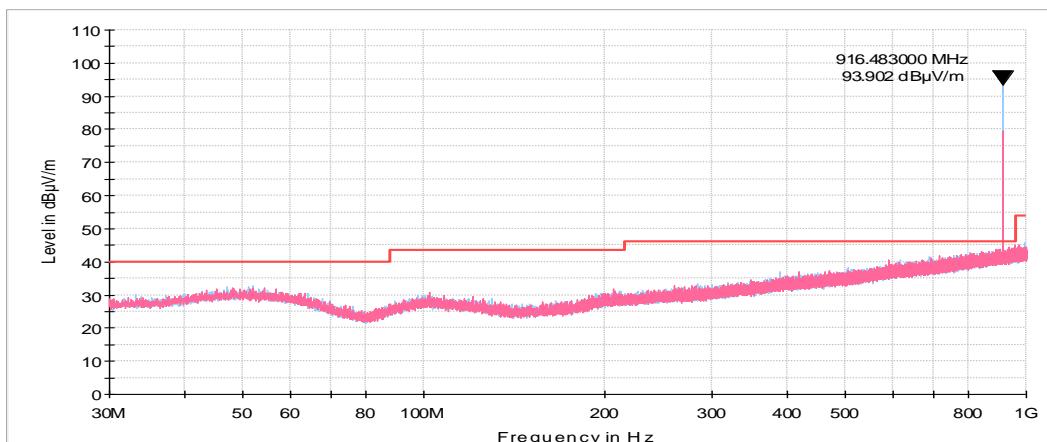




HERMON LABORATORIES

Report ID: ESSRAD\_FCC.40972  
Date of Issue: 16-Feb-21

<b>Test specification:</b>	<b>FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions</b>		
<b>Test procedure:</b>	<b>ANSI C63.10, Section 6.5 / 6.6</b>		
<b>Test mode:</b>	<b>Compliance</b>		
<b>Date(s):</b>	<b>19-Jan-21</b>		
<b>Temperature:</b> 19.6 °C	<b>Relative Humidity:</b> 51 %	<b>Air Pressure:</b> 1013 hPa	<b>Power:</b> 3 VDC
<b>Remarks:</b>			

#### Plot 7.2.7 Radiated emission measurements from 1000 to 10000 MHz

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal  
EUT POSITION: Z

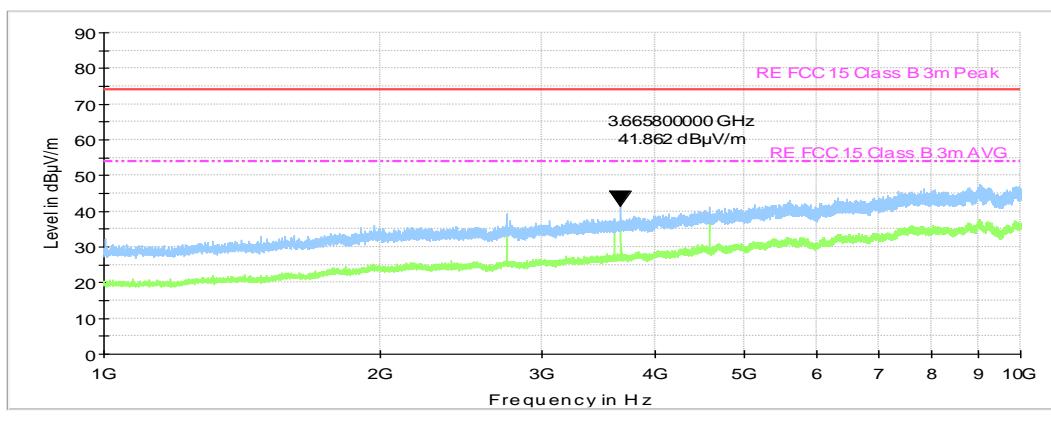




HERMON LABORATORIES


Report ID: ESSRAD\_FCC.40972  
Date of Issue: 16-Feb-21

<b>Test specification:</b>	<b>FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions</b>		
<b>Test procedure:</b>	<b>ANSI C63.10, Section 6.5 / 6.6</b>		
<b>Test mode:</b>	<b>Compliance</b>		
<b>Date(s):</b>	<b>19-Jan-21</b>		
<b>Temperature:</b> 19.6 °C	<b>Relative Humidity:</b> 51 %	<b>Air Pressure:</b> 1013 hPa	<b>Power:</b> 3 VDC
<b>Remarks:</b>			

**Plot 7.2.8 Transmission pulse duration**

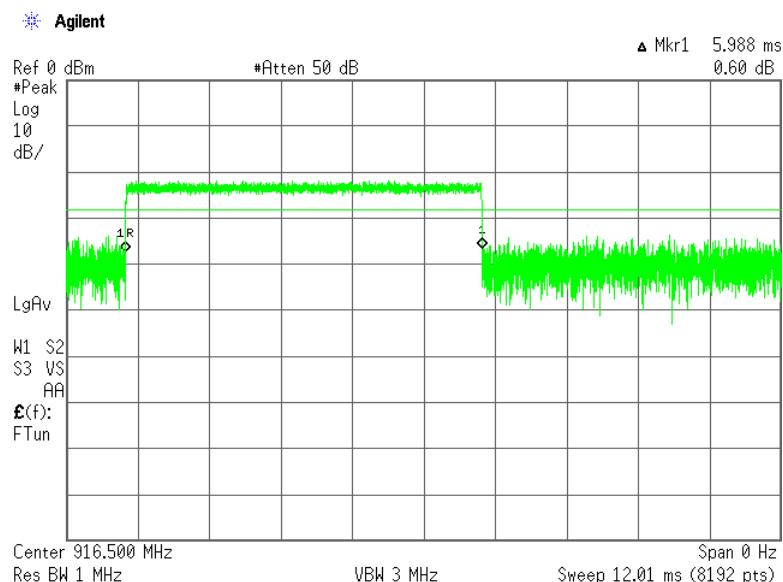

**Plot 7.2.9 Transmission pulse period**

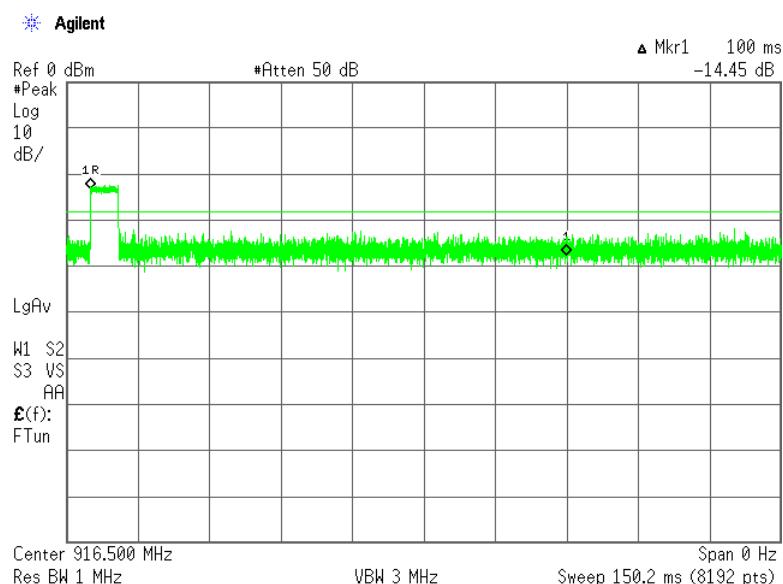



HERMON LABORATORIES

Report ID: ESSRAD\_FCC.40972  
Date of Issue: 16-Feb-21

<b>Test specification:</b> FCC Part 15, Section 231(c) / RSS-210, Section A1.1.3, Occupied bandwidth			
<b>Test procedure:</b> ANSI C63.10, Section 6.9.2			
<b>Test mode:</b> Compliance			<b>Verdict:</b> PASS
<b>Date(s):</b> 20-Jan-21			
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 40 %	<b>Air Pressure:</b> 1014 hPa	<b>Power:</b> 3 VDC
<b>Remarks:</b>			

## 7.3 Occupied bandwidth test

### 7.3.1 General

This test was performed to measure transmitter occupied bandwidth. Specification test limits are given in Table 7.3.1. The test results are provided in Table 7.3.2 and associated plots.

Table 7.3.1 Occupied bandwidth limits


Assigned frequency, MHz	Modulation envelope reference points*, dBc	Maximum allowed bandwidth, % of the carrier frequency
70 - 900		0.25
Above 900	20.0	0.50

\*- Modulation envelope reference points provided in terms of attenuation below modulated carrier.

### 7.3.2 Test procedure

- 7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized and its proper operation was checked.
- 7.3.2.2 The EUT was set to transmit modulated carrier.
- 7.3.2.3 The transmitter occupied bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.3.2 and associated plot.

Figure 7.3.1 Occupied bandwidth test setup

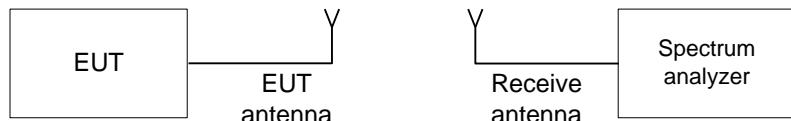



HERMON LABORATORIES

Report ID: ESSRAD\_FCC.40972  
Date of Issue: 16-Feb-21

<b>Test specification:</b> FCC Part 15, Section 231(c) / RSS-210, Section A1.1.3, Occupied bandwidth					
<b>Test procedure:</b> ANSI C63.10, Section 6.9.2					
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS			
<b>Date(s):</b> 20-Jan-21					
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 40 %	<b>Air Pressure:</b> 1014 hPa		<b>Power:</b> 3 VDC	
<b>Remarks:</b>					

**Table 7.3.2 Occupied bandwidth test results**

DETECTOR USED: Peak hold  
 RESOLUTION BANDWIDTH: 3kHz  
 VIDEO BANDWIDTH: 10kHz  
 MODULATION ENVELOPE REFERENCE POINTS: 20 dBc  
 MODULATION: QFSK  
 MODULATING SIGNAL: PRBS  
 BIT RATE: 38.44kbps  
 MODULATION ENVELOPE REFERENCE POINTS: 20 dBc

Carrier frequency, MHz	Occupied bandwidth, kHz	Limit		Margin, kHz	Verdict
		% of the carrier frequency	kHz		
916.5	82.3720	0.5	4582.5	-4500.13	Pass

DETECTOR USED: Peak hold  
 RESOLUTION BANDWIDTH: 3kHz  
 VIDEO BANDWIDTH: 10kHz  
 MODULATION ENVELOPE REFERENCE POINTS: 20 dBc  
 MODULATION: QFSK  
 MODULATING SIGNAL: PRBS  
 BIT RATE: 38.44kbps  
 MODULATION ENVELOPE REFERENCE POINTS: 99 %

Carrier frequency, MHz	Occupied bandwidth, kHz	Limit		Margin, kHz	Verdict
		% of the carrier frequency	kHz		
916.5	77.2423	0.5	4582.5	-4505.26	Pass

**Reference numbers of test equipment used**

HL 4355	HL 5397	HL 4136	HL 5663	HL 5693			
---------	---------	---------	---------	---------	--	--	--

Full description is given in Appendix A.




HERMON LABORATORIES


Report ID: ESSRAD\_FCC.40972  
Date of Issue: 16-Feb-21

<b>Test specification:</b> FCC Part 15, Section 231(c) / RSS-210, Section A1.1.3, Occupied bandwidth			
<b>Test procedure:</b> ANSI C63.10, Section 6.9.2			
<b>Test mode:</b> Compliance			<b>Verdict:</b> PASS
<b>Date(s):</b> 20-Jan-21			
Temperature: 25 °C	Relative Humidity: 40 %	Air Pressure: 1014 hPa	Power: 3 VDC
<b>Remarks:</b>			

Plot 7.3.1 Occupied bandwidth test result 20 dBc

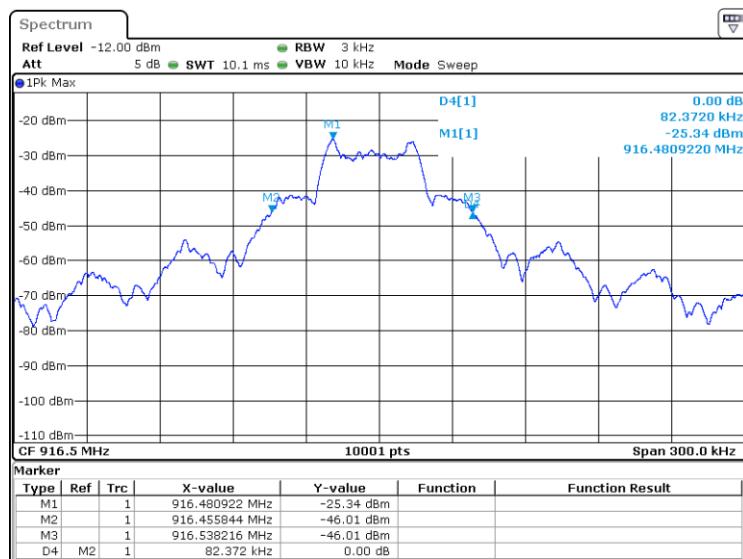

Plot 7.3.2 Occupied bandwidth test result 99%

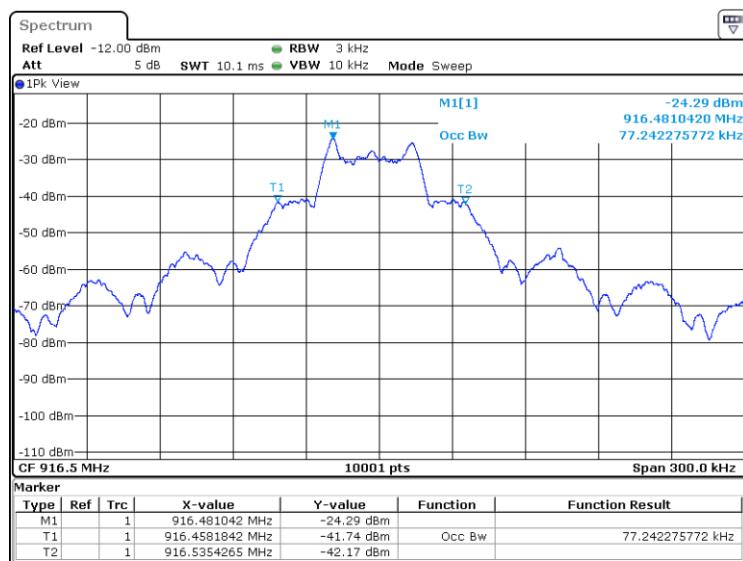



HERMON LABORATORIES

Report ID: ESSRAD\_FCC.40972  
Date of Issue: 16-Feb-21

<b>Test specification:</b> FCC Part 15, Section 203 / RSS-Gen, Section 6.8, Antenna requirements			
<b>Test procedure:</b>	Visual inspection / supplier declaration		
<b>Test mode:</b>	Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b>	20-Jan-21		
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 40 %	<b>Air Pressure:</b> 1014 hPa	<b>Power:</b> 3 VDC
<b>Remarks:</b>			

## 7.4 Antenna requirements

The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters.

The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.4.1.

Table 7.4.1 Antenna requirements

Requirement	Rationale	Verdict
The transmitter antenna is permanently attached	Visual inspection	Comply
The transmitter employs a unique antenna connector	NA	
The transmitter requires professional installation	NA	

Photograph 7.4.1 Antenna assembly





HERMON LABORATORIES

Report ID: ESSRAD\_FCC.40972  
Date of Issue: 16-Feb-21

<b>Test specification:</b>	<b>FCC 47 CFR, Section 15.109 / ICES-003, Section 6.2, Class B, Radiated emissions</b>		
<b>Test procedure:</b>	<b>ANSI C63.4, Section 8.3</b>		
<b>Test mode:</b>	<b>Compliance</b>		
<b>Date(s):</b>	<b>19-Jan-21</b>		
<b>Temperature:</b> 19.6 °C	<b>Relative Humidity:</b> 51 %	<b>Air Pressure:</b> 1013 hPa	<b>Power:</b> 3 VDC
<b>Remarks:</b>			

## 8 Unintentional emissions according to 47CFR part 15 subpart B and ICES-003 requirements

### 8.1 Radiated emission measurements

#### 8.1.1 General

This test was performed to measure radiated emissions from the EUT enclosure. Specification test limits are given in Table 8.1.1.

**Table 8.1.1 Radiated emission test limits**

Frequency, MHz	Class B limit, dB(µV/m)		Class A limit, dB(µV/m)	
	10 m distance	3 m distance	10 m distance	3 m distance
30 - 88	29.5*	40.0	39.0	49.5*
88 - 216	33.0*	43.5	43.5	54.0*
216 - 960	35.5*	46.0	46.4	56.9*
960 - 5 <sup>th</sup> harmonic**	43.5*	54.0	49.5	60.0*

\* - The limit for test distance other than specified was calculated using the inverse linear distance extrapolation factor as follows:  $Lims_2 = Lims_1 + 20 \log (S_1/S_2)$ , where  $S_1$  and  $S_2$  – standard defined and test distance respectively in meters.

**8.1.1.1 30 – 1000 MHz range.** The EUT was set up as shown in Figure 8.2.1 and the associated photographs, energized and the EUT performance was checked.

**8.1.1.2** The measurements were performed in the semi anechoic chamber at 3 m test distance. The specified frequency range was investigated with the antenna connected to the EMI receiver. To find the highest emission the turntable was rotated 360° and the measuring antenna height was swept from 1 to 4 m in both, vertical and horizontal polarizations. The EUT cables position was varied to maximize emission.

**8.1.1.3 1000 – 10000 MHz range.** The EUT was set up as shown in Figure 8.2.2 and the associated photographs, energized and the EUT performance was checked.

**8.1.1.4** The measurements were performed in the semi anechoic chamber at 3 m test distance. The specified frequency range was investigated with the antenna connected to the EMI receiver. To find the highest emission the turntable was rotated 360° and the measuring antenna height was swept from 1 to 4 m in both, vertical and horizontal polarizations. In order to stay within the 3 dB beamwidth while keeping the antenna height scanned from 1 to 4 m, a few sweeps with different antenna angles over the entire height were performed.

**8.1.1.5** The worst test results with respect to the limits were recorded in Table 8.2.2 and shown in the associated plots.




HERMON LABORATORIES

Report ID: ESSRAD\_FCC.40972  
Date of Issue: 16-Feb-21

<b>Test specification:</b>	<b>FCC 47 CFR, Section 15.109 / ICES-003, Section 6.2, Class B, Radiated emissions</b>		
<b>Test procedure:</b>	<b>ANSI C63.4, Section 8.3</b>		
<b>Test mode:</b>	<b>Compliance</b>		
<b>Date(s):</b>	19-Jan-21	<b>Verdict:</b>	<b>PASS</b>
<b>Temperature:</b> 19.6 °C	<b>Relative Humidity:</b> 51 %	<b>Air Pressure:</b> 1013 hPa	<b>Power:</b> 3 VDC
<b>Remarks:</b>			

**Figure 8.1.1 Setup for radiated emission measurements in anechoic chamber, table-top equipment**

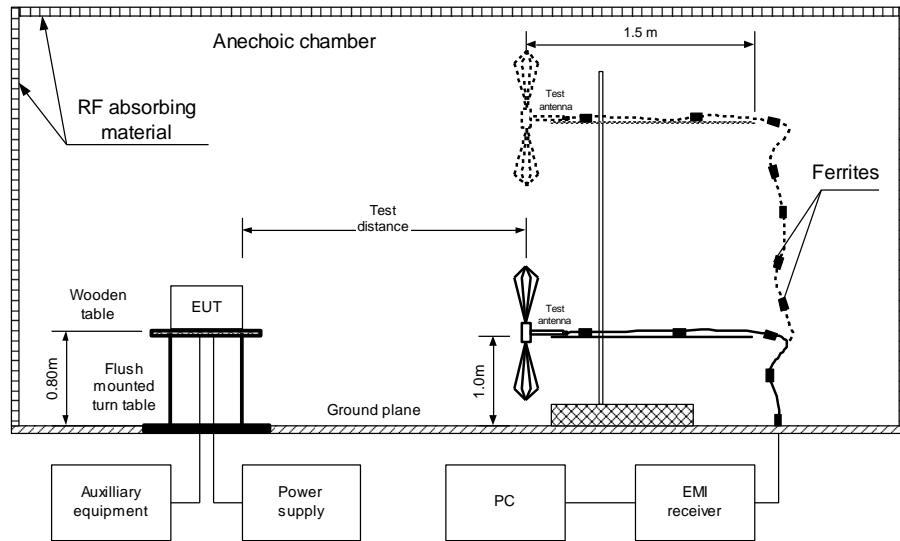



HERMON LABORATORIES

Report ID: ESSRAD\_FCC.40972  
Date of Issue: 16-Feb-21

<b>Test specification:</b> FCC 47 CFR, Section 15.109 / ICES-003, Section 6.2, Class B, Radiated emissions	
<b>Test procedure:</b>	ANSI C63.4, Section 8.3
<b>Test mode:</b>	Compliance
<b>Date(s):</b>	19-Jan-21
<b>Temperature:</b> 19.6 °C	<b>Relative Humidity:</b> 51 %
<b>Air Pressure:</b> 1013 hPa	<b>Power:</b> 3 VDC
<b>Remarks:</b>	

Table 8.1.2 Radiated emission test results

EUT SET UP: TABLE-TOP  
 LIMIT: Class B  
 EUT OPERATING MODE: Stand-by and Receive  
 TEST SITE: SEMI ANECHOIC CHAMBER  
 TEST DISTANCE: 3 m  
 FREQUENCY RANGE: 30 MHz – 1000 MHz  
 RESOLUTION BANDWIDTH: 120 kHz

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
All emissions were found more than 20 dB below limit								

TEST SITE: SEMI ANECHOIC CHAMBER  
 TEST DISTANCE: 3 m  
 DETECTORS USED: PEAK / AVERAGE  
 FREQUENCY RANGE: 1000 MHz - 10000 MHz  
 RESOLUTION BANDWIDTH: 1000 kHz

Frequency, MHz	Peak			Average			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
	Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*	Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
All emissions were found more than 20 dB below limit										

\*- Margin = Measured emission - specification limit.

\*\*- EUT front panel refer to 0 degrees position of turntable.

## Reference numbers of test equipment used

HL 3903	HL 4360	HL 4933	HL 5669	HL 5670	HL 4011		
HL 5288	HL 5085						

Full description is given in Appendix A.




HERMON LABORATORIES

Report ID: ESSRAD\_FCC.40972  
Date of Issue: 16-Feb-21

<b>Test specification:</b>	<b>FCC 47 CFR, Section 15.109 / ICES-003, Section 6.2, Class B, Radiated emissions</b>		
<b>Test procedure:</b>	<b>ANSI C63.4, Section 8.3</b>		
<b>Test mode:</b>	<b>Compliance</b>		
<b>Date(s):</b>	<b>19-Jan-21</b>		
<b>Temperature:</b> 19.6 °C	<b>Relative Humidity:</b> 51 %	<b>Air Pressure:</b> 1013 hPa	<b>Power:</b> 3 VDC
<b>Remarks:</b>			

**Plot 8.1.1 Radiated emission measurements in 30 - 1000 MHz range, vertical and horizontal antenna polarization**

TEST SITE: Semi anechoic chamber  
LIMIT: Class B  
TEST DISTANCE: 3 m  
EUT OPERATING MODE: Receive

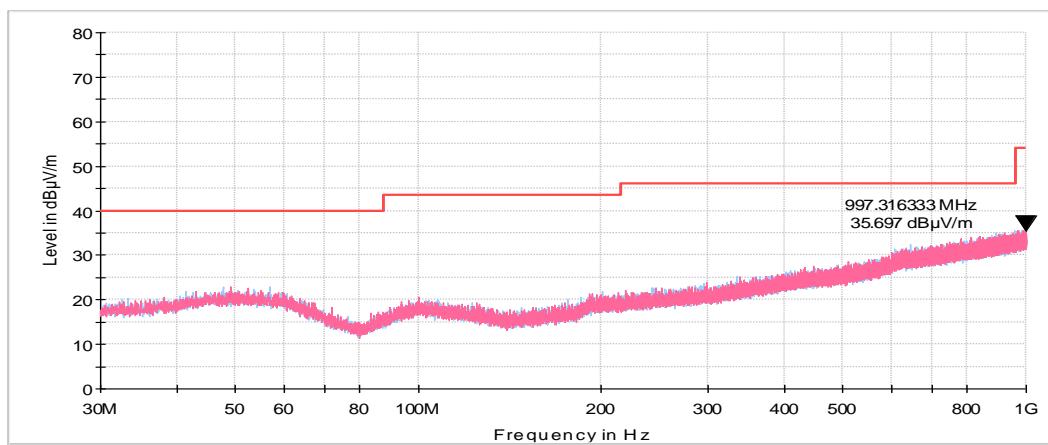




HERMON LABORATORIES

Report ID: ESSRAD\_FCC.40972  
Date of Issue: 16-Feb-21

<b>Test specification:</b>	<b>FCC 47 CFR, Section 15.109 / ICES-003, Section 6.2, Class B, Radiated emissions</b>		
<b>Test procedure:</b>	ANSI C63.4, Section 8.3		
<b>Test mode:</b>	Compliance		
<b>Date(s):</b>	19-Jan-21		
<b>Temperature:</b> 19.6 °C	<b>Relative Humidity:</b> 51 %	<b>Air Pressure:</b> 1013 hPa	<b>Power:</b> 3 VDC
<b>Remarks:</b>			

**Plot 8.1.2 Radiated emission measurements above 1000 MHz, vertical and horizontal antenna polarization**

TEST SITE: Semi anechoic chamber  
LIMIT: Class B  
TEST DISTANCE: 3 m  
EUT OPERATING MODE: Receive

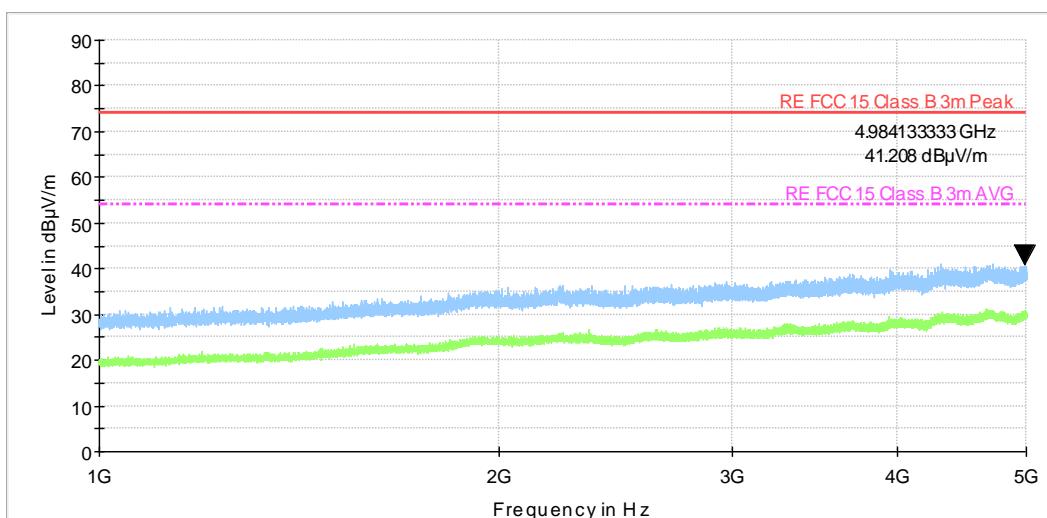

Comment



HERMON LABORATORIES

Report ID: ESSRAD\_FCC.40972  
Date of Issue: 16-Feb-21

## 9 APPENDIX A Test equipment and ancillaries used for tests

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./Check	Due Cal./Check
0446	Antenna, Loop, Active, 10 (9) kHz - 30 MHz	EMCO	6502	2857	24-Feb-20	24-Feb-21
3818	PSA Series Spectrum Analyzer, 3 Hz- 44 GHz	Agilent Technologies	E4446A	MY482502 88	27-Apr-20	27-Apr-21
3903	Microwave Cable Assembly, 40.0 GHz, 1.5 m, SMA/SMA	Huber-Suhner	SUCOFL EX 102A	1226/2A	06-Apr-20	06-Apr-21
4011	Temp. & Humidity Meter, (-50 - +70) deg, (20 - 99 )% RH	Mad Electronics	HTC-1	NA	12-Aug-20	12-Aug-21
4136	Shield Box	TESCOM CO., LTD	TC-5916A	5916A000 137	23-Apr-20	23-Apr-21
4355	Signal and Spectrum Analyzer, 9 kHz to 7 GHz	Rohde & Schwarz	FSV 7	101630	09-Sep-20	09-Sep-21
4360	EMI Test Receiver, 20 Hz to 40 GHz.	Rohde & Schwarz	ESU40	100322	19-Jan-21	19-Jan-22
4933	Active Horn Antenna, 1 GHz to 18 GHz	COM-POWER CORPORATION	AHA-118	701046	26-Jan-21	26-Jan-22
5085	Attenuator, 4 dB, DC - 6 GHz, 1 W	Mini-Circuits	UNAT-4+	NA	22-May-20	22-May-21
5288	Trilog Antenna, 25 MHz - 8 GHz, 100W	Frankonia	ALX-8000E	00809	08-Feb-19	08-Feb-22
5397	H-field near field probe, 3 cm	ETS Lindgren	7405-902	NA	16-Aug-20	16-Aug-22
5663	Cable, 1. SF102EA/11SK(x2)/5.5M, 40 GHz	Huber-Suhner	SF102EA	505604/2EA	03-Nov-20	03-Nov-21
5669	Cable SF126EA/11N(x2)/3.0M, 18 GHz	Huber-Suhner	SF126EA	506775/12 6EA	25-Oct-20	25-Oct-21
5670	Cable SF126EA/11N(x2)/3M, 18 GHz	Huber-Suhner	SF126EA	506774/12 6EA	25-Oct-20	25-Oct-21
5693	Temp. & Humidity Meter, (-10 - +50) deg, (10 - 99 )% RH	Mad Electronics	HTC-1	NA	13-Dec-20	13-Dec-21



HERMON LABORATORIES

Report ID: ESSRAD\_FCC.40972  
Date of Issue: 16-Feb-21

## 10 APPENDIX B Test equipment correction factors

HL 0446: Active Loop Antenna  
EMCO, model: 6502, s/n 2857

Frequency,	Measured antenna factor, dBs/m	Measurement uncertainty, dB
10	-33.4	±1.0
20	-37.8	±1.0
50	-40.5	±1.0
75	-41.0	±1.0
100	-41.2	±1.0
150	-41.2	±1.0
250	-41.1	±1.0
500	-41.2	±1.0
750	-41.3	±1.0
1000	-41.3	±1.0

Frequency,	Measured antenna factor, dBs/m	Measurement uncertainty, dB
2000	-41.4	±1.0
3000	-41.4	±1.0
4000	-41.5	±1.0
5000	-41.5	±1.0
10000	-41.7	±1.0
15000	-42.1	±1.0
20000	-42.7	±1.0
25000	-44.2	±1.0
30000	-45.8	±1.0

The antenna factor shall be added to receiver reading in dB $\mu$ V to obtain field strength in dB $\mu$ A/m.HL 4933: Active Horn Antenna  
COM-POWER CORPORATION, model: AHA-118, s/n 701046

Frequency, MHz	Measured antenna factor (with preamplifier), dB/m
1000	-16.1
1500	-15.1
2000	-10.9
2500	-11.9
3000	-11.1
3500	-10.6
4000	-8.6
4500	-8.3
5000	-5.9
5500	-5.7
6000	-3.3
6500	-4.0
7000	-2.2
7500	-1.7
8000	1.1
8500	-0.8
9000	-1.5
9500	-0.2

Frequency, MHz	Measured antenna factor (with preamplifier), dB/m
10000	1.8
10500	1.0
11000	0.3
11500	-0.5
12000	3.1
12500	1.4
13000	-0.3
13500	-0.4
14000	2.5
14500	2.2
15000	1.9
15500	0.5
16000	2.1
16500	1.2
17000	0.6
17500	3.1
18000	4.2

The antenna factor shall be added to receiver reading in dB $\mu$ V to obtain field strength in dB $\mu$ V/m.



HERMON LABORATORIES

Report ID: ESSRAD\_FCC.40972  
Date of Issue: 16-Feb-21HL 5288: Trilog Antenna  
Frankonia, model: ALX-8000E, s/n: 00809  
30-1000 MHz

Frequency, MHz	Antenna factor, dB/m
30	14.96
35	15.33
40	16.37
45	17.56
50	17.95
60	16.87
70	13.22
80	10.56
90	13.61
100	15.46
120	14.03
140	12.23

Frequency, MHz	Antenna factor, dB/m
160	12.67
180	13.34
200	15.40
250	16.42
300	17.28
400	19.98
500	21.11
600	22.90
700	24.13
800	25.25
900	26.35
1000	27.18

The antenna factor shall be added to receiver reading in dB $\mu$ V to obtain field strength in dB $\mu$ V/m.  
above 1000 MHz

Frequency, MHz	Antenna factor, dB/m
1000	26.9
1100	28.1
1200	28.4
1300	29.6
1400	29.1
1500	30.4
1600	30.7
1700	31.5
1800	32.3
1900	32.6
2000	32.5
2100	32.9
2200	33.5
2300	33.2
2400	33.7
2500	34.6
2600	34.7
2700	34.6
2800	35.0
2900	35.5
3000	36.2
3100	36.8
3200	36.8
3300	37.0
3400	37.5
3500	38.2

Frequency, MHz	Antenna factor, dB/m
3600	38.9
3700	39.4
3800	39.4
3900	39.6
4000	39.7
4100	39.8
4200	40.5
4300	40.9
4400	41.1
4500	41.4
4600	41.3
4700	41.6
4800	41.9
4900	42.3
5000	42.7
5100	43.0
5200	42.9
5300	43.5
5400	43.6
5500	44.3
5600	44.7
5700	45.0
5800	45.0
5900	45.3
6000	45.9

The antenna factor shall be added to receiver reading in dB $\mu$ V to obtain field strength in dB $\mu$ V/m.



HERMON LABORATORIES

Report ID: ESSRAD\_FCC.40972  
Date of Issue: 16-Feb-21

## 11 APPENDIX C Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Conducted emissions with LISN	9 kHz to 150 kHz: $\pm 3.9$ dB 150 kHz to 30 MHz: $\pm 3.8$ dB
Radiated emissions at 10 m measuring distance Horizontal polarization	Biconilog antenna: $\pm 5.0$ dB Biconical antenna: $\pm 5.0$ dB Log periodic antenna: $\pm 5.1$ dB Double ridged horn antenna: $\pm 5.3$ dB
Vertical polarization	Biconilog antenna: $\pm 5.5$ dB Biconical antenna: $\pm 5.5$ dB Log periodic antenna: $\pm 5.6$ dB Double ridged horn antenna: $\pm 5.8$ dB
Radiated emissions at 3 m measuring distance Horizontal polarization	Biconilog antenna: $\pm 5.3$ dB Biconical antenna: $\pm 5.0$ dB Log periodic antenna: $\pm 5.3$ dB Double ridged horn antenna: $\pm 5.3$ dB
Vertical polarization	Biconilog antenna: $\pm 6.0$ dB Biconical antenna: $\pm 5.7$ dB Log periodic antenna: $\pm 6.0$ dB Double ridged horn antenna: $\pm 6.0$ dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: $\pm 2.6$ dB 2.9 GHz to 6.46 GHz: $\pm 3.5$ dB 6.46 GHz to 13.2 GHz: $\pm 4.3$ dB 13.2 GHz to 22.0 GHz: $\pm 5.0$ dB 22.0 GHz to 26.8 GHz: $\pm 5.5$ dB 26.8 GHz to 40.0 GHz: $\pm 4.8$ dB
Duty cycle, timing (Tx ON / OFF) and average factor measurements	$\pm 1.0$ %
Occupied bandwidth	$\pm 8.0$ %

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.



HERMON LABORATORIES

Report ID: ESSRAD\_FCC.40972  
Date of Issue: 16-Feb-21

## 12 APPENDIX D Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, Radio, Safety, Environmental and Telecommunication testing facility.

Hermon Laboratories is recognized and accredited by the Federal Communications Commission (USA) for relevant parts of Code of Federal Regulations 47 (CFR 47), Test Firm Registration Number is 927748, Designation Number is IL1001; Recognized by Innovation, Science and Economic Development Canada for wireless and terminal testing (ISED), ISED #2186A, CAB identifier is IL1001; Certified by VCCI, Japan (the registration numbers are R-10808 for OATS, R-1082 for anechoic chamber, G-10869 for RE measurements above 1 GHz, C-10845 for conducted emissions site and T-11606 for conducted emissions at telecommunication ports).

The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing, environmental simulation and calibration (for exact scope please refer to Certificate No. 839.01, 839.03 and 839.04).

Address: P.O. Box 23, Binyamina 3055001, Israel.  
Telephone: +972 4628 8001  
Fax: +972 4628 8277  
e-mail: mail@hermonlabs.com  
website: www.hermonlabs.com

Person for contact: Mr. Michael Nikishin, EMC&Radio group manager



HERMON LABORATORIES

Report ID: ESSRAD\_FCC.40972  
Date of Issue: 16-Feb-21

## 13 APPENDIX E

### Specification references

47CFR part 15: 2019	Radio Frequency Devices.
ANSI C63.10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
ANSI C63.4: 2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
RSS-210 Issue 10: 2019	Licence-Exempt Radio Apparatus: Category I Equipment
RSS-Gen Issue 5: 2018	General Requirements and Information for the certification of Radiocommunication Equipment
ICES-003 Issue 6: 2016	Information Technology Equipment (Including Digital Apparatus) – Limits and methods of measurement



HERMON LABORATORIES

Report ID: ESSRAD\_FCC.40972  
Date of Issue: 16-Feb-21

## 14 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
A/m	ampere per meter
AM	amplitude modulation
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(µV)	decibel referred to one microvolt
dB(µV/m)	decibel referred to one microvolt per meter
dB(µA)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
µs	microsecond
NA	not applicable
NB	narrow band
OATS	open area test site
Ω	Ohm
PM	pulse modulation
PS	power supply
ppm	part per million ( $10^{-6}$ )
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt
WB	wideband

END OF DOCUMENT