



# FCC RADIO TEST REPORT

**FCC ID** : 2ARGE-6383  
**Equipment** : Digital Media Receiver  
**Model Name** : O2T2V3  
**Applicant** : Flake LLC  
4321 W. College Avenue; Suite 200  
Appleton, Wisconsin 54914  
**Standard** : FCC Part 15 Subpart C §15.247

The product was received on Jan. 22, 2019 and testing was started from Apr. 27, 2019 and completed on Jul. 10, 2019. We, SPORTON INTERNATIONAL INC., EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Jones Tsai

**SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory**  
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



## Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
<b>1 General Description.....</b>	<b>5</b>
1.1 Product Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test.....	5
1.3 Modification of EUT .....	5
1.4 Testing Location .....	6
1.5 Applicable Standards.....	6
<b>2 Test Configuration of Equipment Under Test .....</b>	<b>7</b>
2.1 Carrier Frequency Channel .....	7
2.2 Test Mode.....	7
2.3 Connection Diagram of Test System.....	8
2.4 Support Unit used in test configuration and system .....	9
2.5 EUT Operation Test Setup .....	9
2.6 Measurement Results Explanation Example.....	9
<b>3 Test Result.....</b>	<b>10</b>
3.1 6dB and 99% Bandwidth Measurement .....	10
3.2 Output Power Measurement.....	15
3.3 Power Spectral Density Measurement .....	16
3.4 Conducted Band Edges and Spurious Emission Measurement .....	21
3.5 Spurious Emission Measurement.....	28
3.6 AC Conducted Emission Measurement.....	32
3.7 Antenna Requirements .....	34
<b>4 List of Measuring Equipment .....</b>	<b>35</b>
<b>5 Uncertainty of Evaluation.....</b>	<b>37</b>
<b>Appendix A. Conducted Test Results</b>	
<b>Appendix B. AC Conducted Emission Test Result</b>	
<b>Appendix C. Radiated Spurious Emission</b>	
<b>Appendix D. Radiated Spurious Emission Plots</b>	
<b>Appendix E. Duty Cycle Plots</b>	



### History of this test report

Report No.	Version	Description	Issued Date
FR8O0521-02D	01	Initial issue of report	Jul. 14, 2019



## Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)
3.1	15.247(a)(2)	6dB Bandwidth	Pass
3.1	2.1049	99% Occupied Bandwidth	Reporting only
3.2	15.247(b)(3)	Peak Output Power	Pass
3.3	15.247(e)	Power Spectral Density	Pass
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass
0	15.247(d)	Radiated Band Edges and Spurious Emission	Pass
3.6	15.207	AC Conducted Emission	Pass
3.7	15.203 & 15.247(b)	Antenna Requirement	Pass

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

**Reviewed by: Wii Chang**

**Report Producer: Ann Lee**



# 1 General Description

## 1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Digital Media Receiver
Model Name	O2T2V3
FCC ID	2ARGE-6383
EUT supports Radios application	WLAN 11b/g/n HT20 WLAN 11a/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE Zigbee

## 1.2 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2405 MHz ~ 2480 MHz
Number of Channels	16
Carrier Frequency of Each Channel	5 MHz
Maximum Output Power to Antenna	15.60 dBm (0.0363 W)
99% Occupied Bandwidth	2.310 MHz
Antenna Type / Gain	Flex Antenna with gain 4.9 dBi
Type of Modulation	OQPSK

## 1.3 Modification of EUT

No modifications are made to the EUT during all test items.



### 1.4 Testing Location

<b>Test Site</b>	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory	
<b>Test Site Location</b>	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978	
<b>Test Site No.</b>	<b>Sporton Site No.</b>	
	TH05-HY	CO05-HY

**Note:** The test site complies with ANSI C63.4 2014 requirement.

<b>Test Site</b>	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory	
<b>Test Site Location</b>	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855	
<b>Test Site No.</b>	<b>Sporton Site No.</b>	
	03CH16-HY	

**Note:** The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW0007

### 1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

**Remark:** All test items were verified and recorded according to the standards and without any deviation during the test.



## 2 Test Configuration of Equipment Under Test

### 2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	11	2405	19	2445
	12	2410	20	2450
	13	2415	21	2455
	14	2420	22	2460
	15	2425	23	2465
	16	2430	24	2470
	17	2435	25	2475
	18	2440	26	2480

### 2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in two setup, without accessories and with accessories. The worst cases (without accessories) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases	
Test Item	Data Rate / Modulation
	250 kbps / OQPSK
<b>Conducted Test Cases</b>	Mode 1: Zigbee Tx CH11_2405 MHz Mode 2: Zigbee Tx CH17_2435 MHz Mode 3: Zigbee Tx CH25_2475 MHz Mode 4: Zigbee Tx CH26_2480 MHz
<b>Radiated Test Cases</b>	Mode 1: Zigbee Tx CH11_2405 MHz Mode 2: Zigbee Tx CH17_2435 MHz Mode 3: Zigbee Tx CH25_2475 MHz Mode 4: Zigbee Tx CH26_2480 MHz
<b>AC Conducted Emission</b>	Mode 1 :WLAN (2.4GHz) Link with AP Router + WLAN (5GHz) Link with Notebook + Bluetooth Link + Zigbee Link + Play Audio from Bluetooth Phone

## 2.3 Connection Diagram of Test System

<Zigbee Tx Mode>

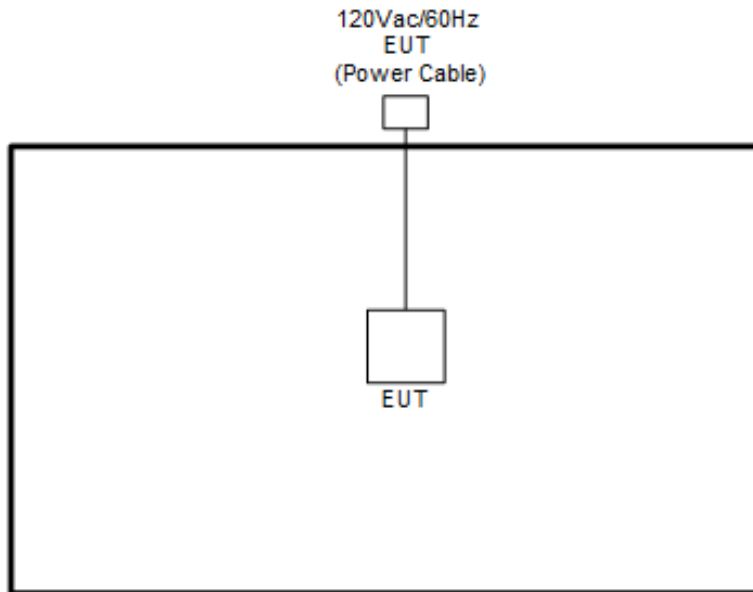

<AC Conducted Emission Mode>

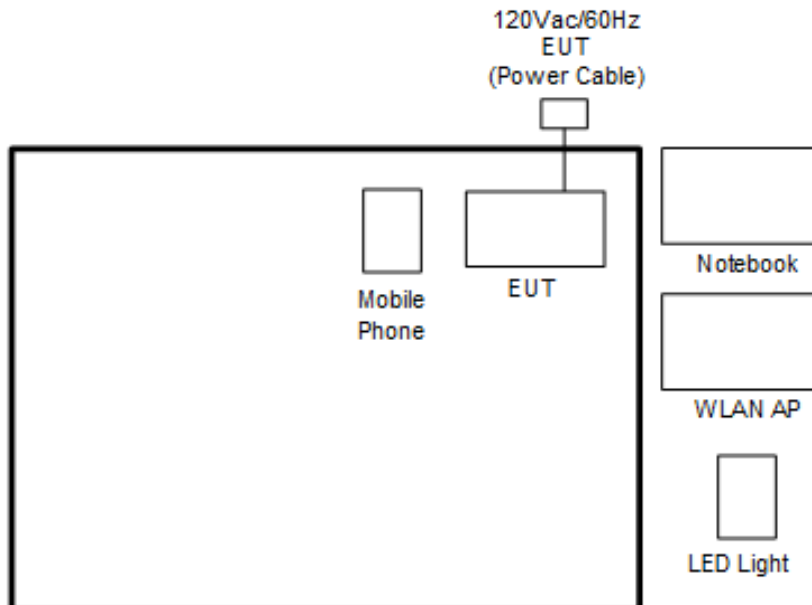



## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	Net Gear	R7000	FCC DoC	N/A	Unshielded, 1.8m
2.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
3.	Notebook	DELL	Latitude E5570	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Mobile Phone	Apple	A1524	FCC DoC	N/A	N/A
5.	LED light	OSRAM	73674	DZO-IQHOMÉ	N/A	N/A

## 2.5 EUT Operation Test Setup

The RF test items, utility “Compliance.exe Version 1.0.0.50” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

## 2.6 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
 &= 4.2 + 10 = 14.2 \text{ (dB)}
 \end{aligned}$$

### 3 Test Result

#### 3.1 6dB and 99% Bandwidth Measurement

##### 3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


##### 3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

##### 3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW)  $\geq 3 * RBW$ .
6. Measure and record the results in the test report.

##### 3.1.4 Test Setup

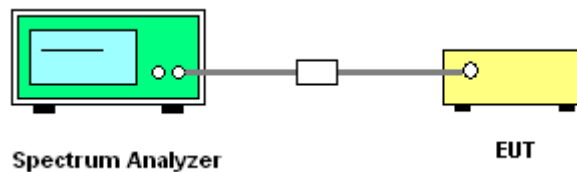




### 3.1.5 Test Result of 6dB Bandwidth


Please refer to Appendix A.

#### 6 dB Bandwidth Plot on Channel 11

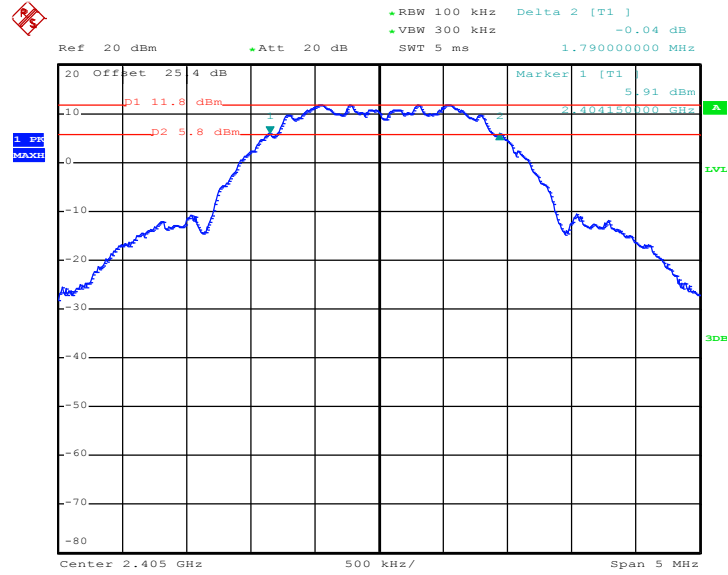

Date: 1.JUL.2019 13:51:45


#### 6 dB Bandwidth Plot on Channel 17

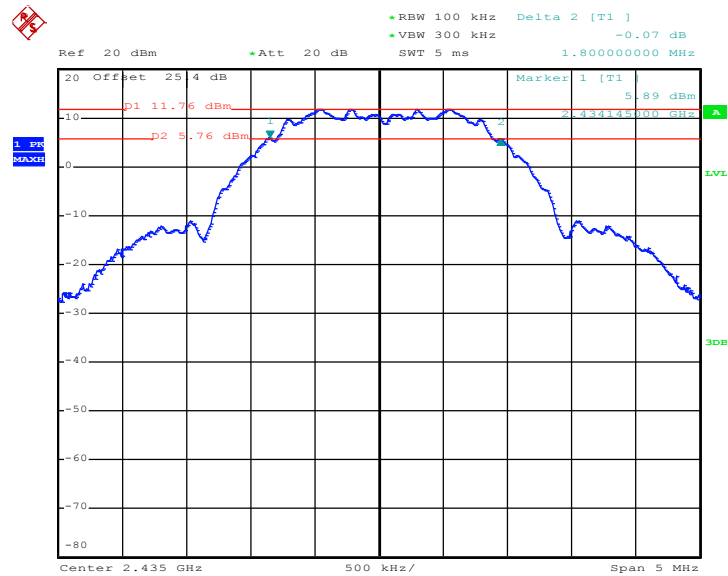

Date: 1.JUL.2019 13:55:53




6 dB Bandwidth Plot on Channel 25

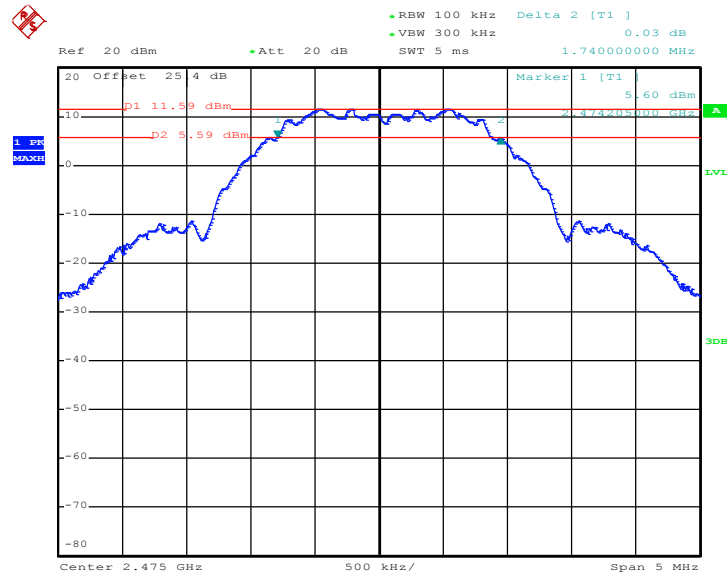

Date: 1.JUL.2019 13:59:29

6 dB Bandwidth Plot on Channel 26

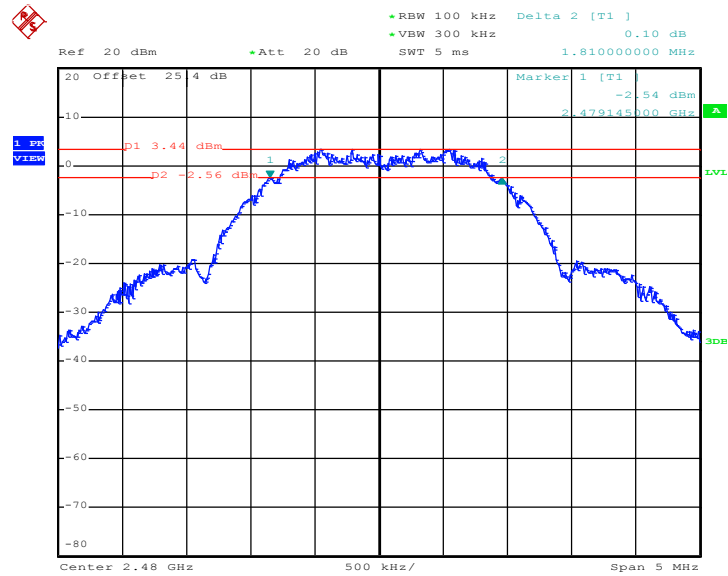


Date: 17.MAY.2019 02:37:10



### 3.1.6 Test Result of 99% Occupied Bandwidth


Please refer to Appendix A.

#### 99% Occupied Bandwidth Plot on Channel 11

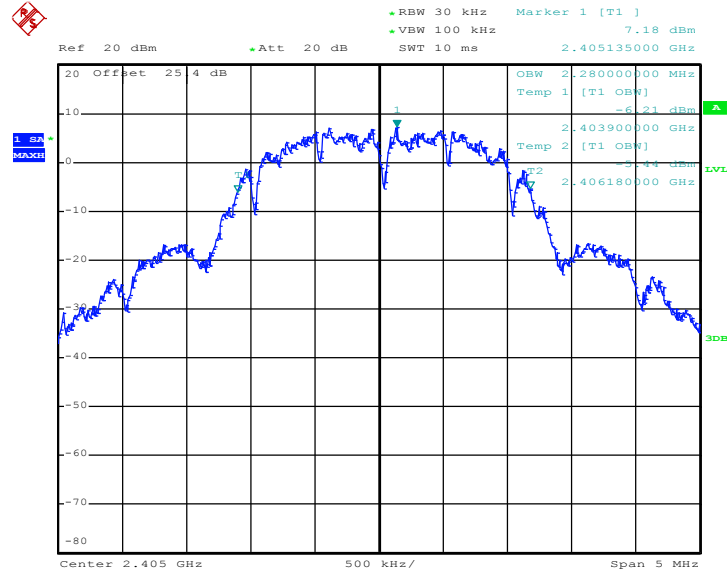

Date: 1.JUL.2019 13:54:03


#### 99% Occupied Bandwidth Plot on Channel 17

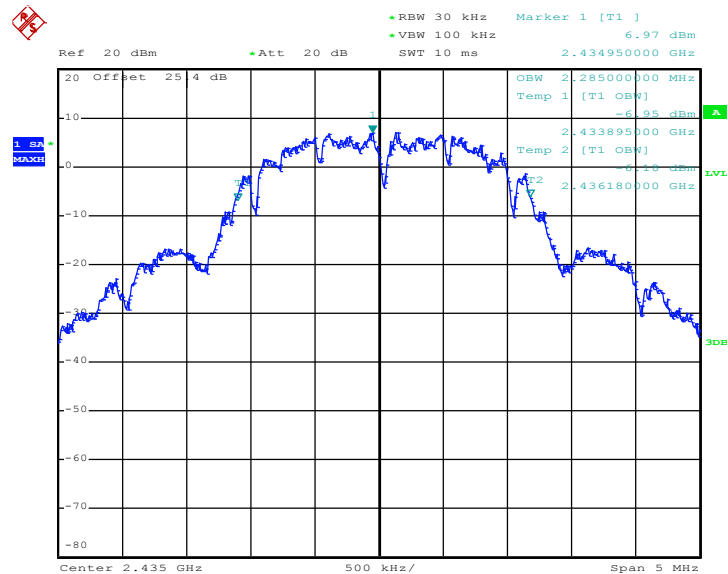

Date: 1.JUL.2019 13:57:49




99% Occupied Bandwidth Plot on Channel 25

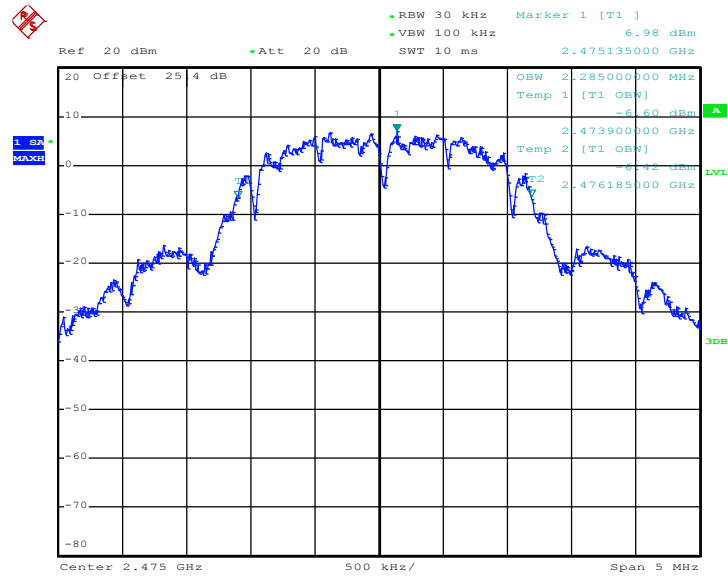

Date: 1.JUL.2019 14:01:15

99% Occupied Bandwidth Plot on Channel 26

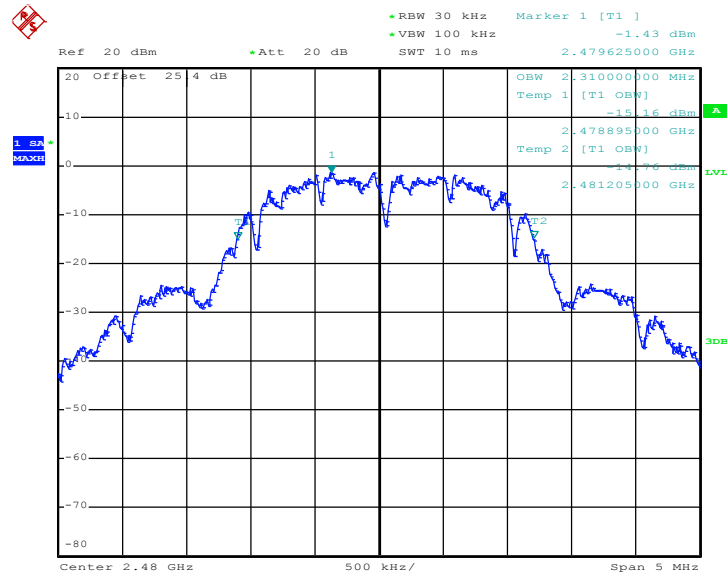

Date: 17.MAY.2019 02:40:24

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

## 3.2 Output Power Measurement

### 3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


### 3.2.2 Measuring Instruments

See list of measuring equipment of this test report.

### 3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGP-M-G
2. The RF output of EUT was connected to the power meter by RF cable and attenuator.
3. The path loss was compensated to the results for each measurement.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Measure the conducted output power and record the results in the test report.

### 3.2.4 Test Setup

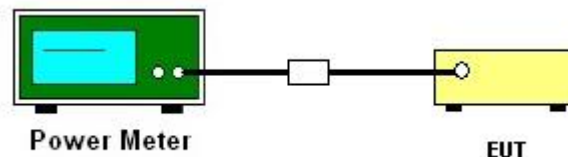

### 3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


#### 3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

#### 3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

#### 3.3.4 Test Setup

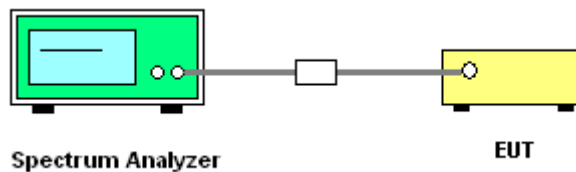

#### 3.3.5 Test Result of Power Spectral Density


Please refer to Appendix A.






### 3.3.6 Test Result of Power Spectral Density Plots (100kHz)

PSD 100kHz Plot on Channel 11

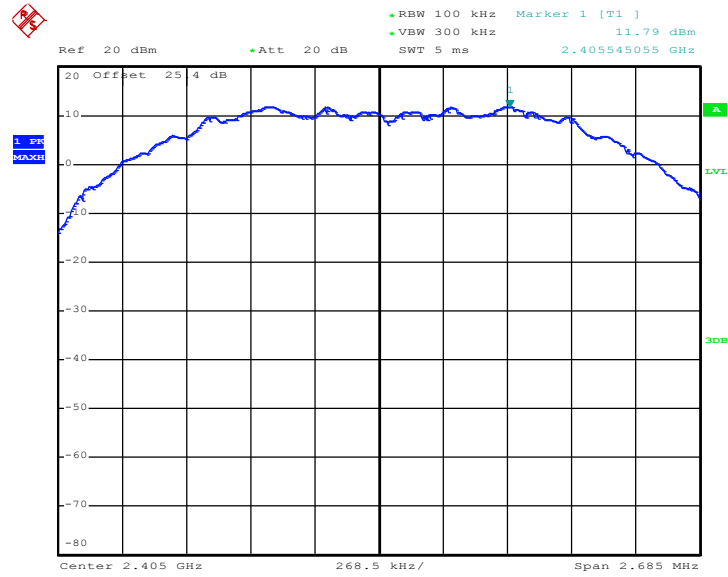

Date: 1.JUL.2019 13:52:39


PSD 100kHz Plot on Channel 17

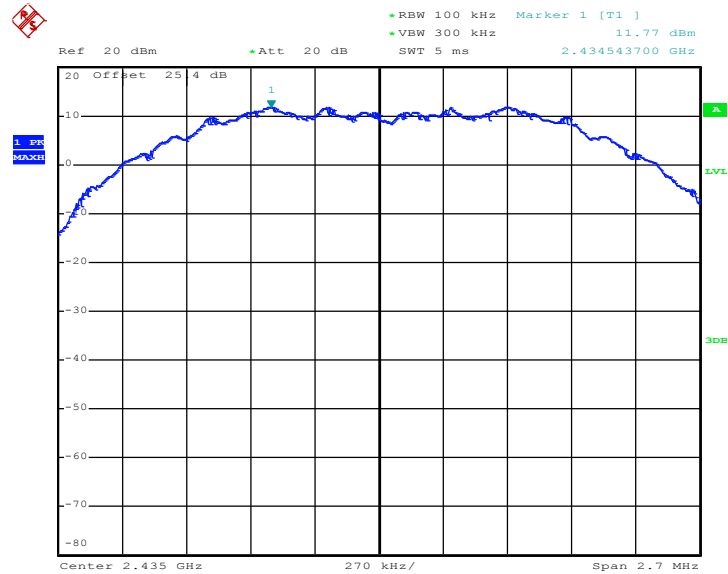

Date: 1.JUL.2019 13:56:34




PSD 100kHz Plot on Channel 25

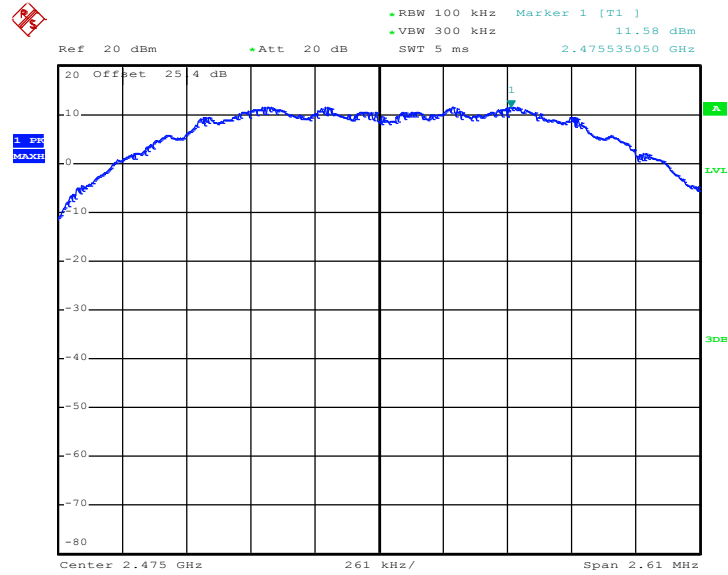

Date: 1.JUL.2019 14:00:08

PSD 100kHz Plot on Channel 26

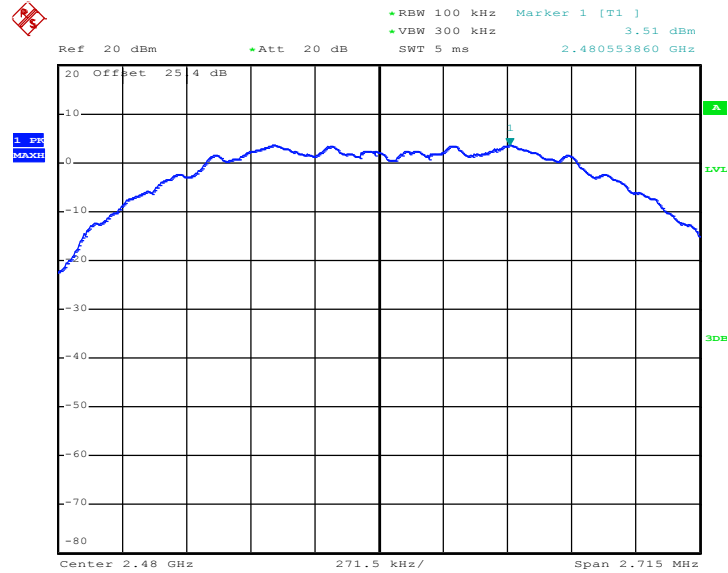


Date: 17.MAY.2019 02:38:34




### 3.3.7 Test Result of Power Spectral Density Plots (3kHz)

PSD 3kHz Plot on Channel 11

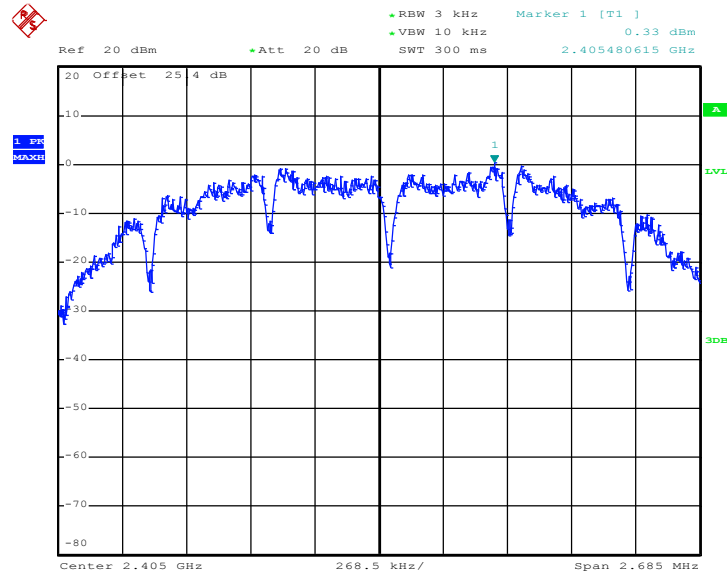

Date: 1.JUL.2019 13:52:08


PSD 3kHz Plot on Channel 17

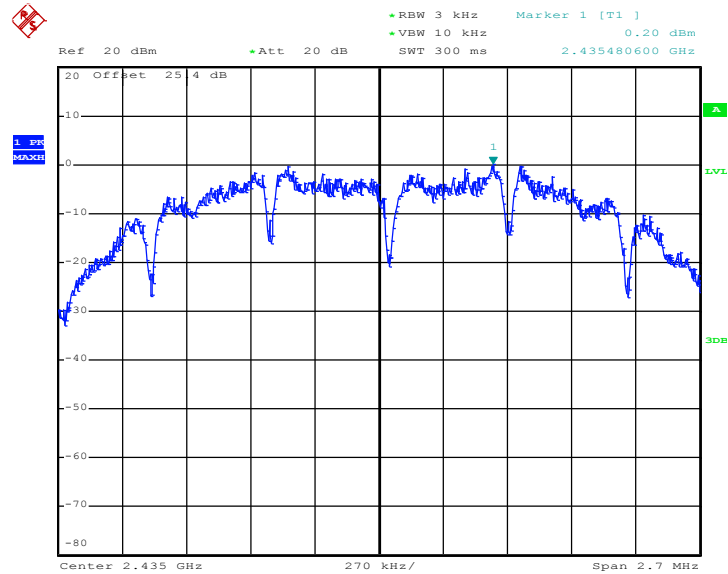

Date: 1.JUL.2019 13:56:13




PSD 3kHz Plot on Channel 25

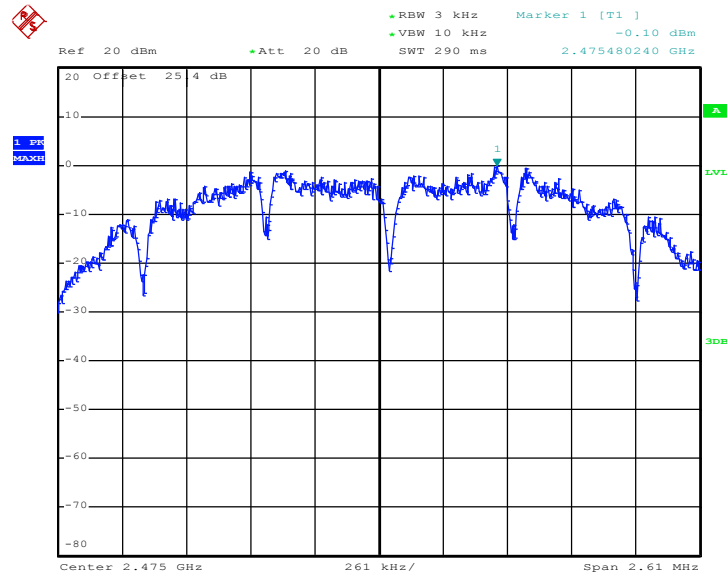

Date: 1.JUL.2019 13:59:51

PSD 3kHz Plot on Channel 26

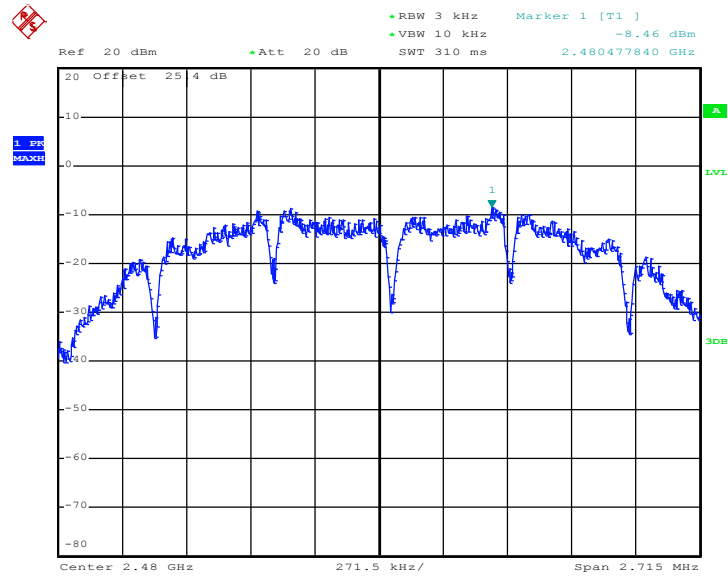

Date: 17.MAY.2019 02:37:32

## 3.4 Conducted Band Edges and Spurious Emission Measurement

### 3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 30 dB down from the highest emission level within the authorized band.


### 3.4.2 Measuring Instruments

See list of measuring equipment of this test report.

### 3.4.3 Test Procedure

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


### 3.4.4 Test Setup

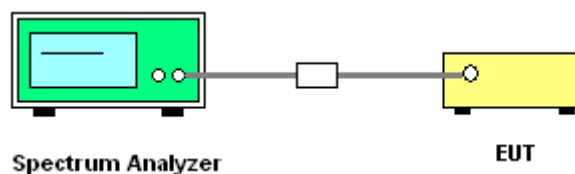




### 3.4.5 Test Result of Conducted Band Edges Plots

#### Low Band Edge Plot on Channel 11

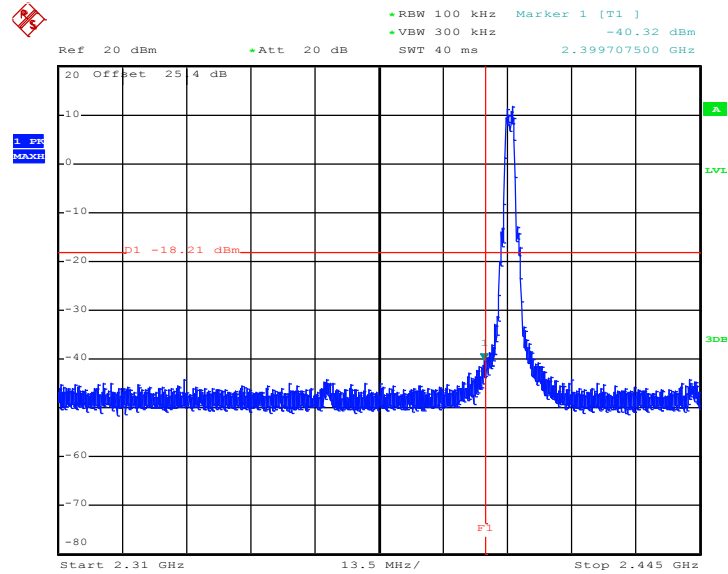

Date: 1.JUL.2019 13:53:02


#### High Band Edge Plot on Channel 25

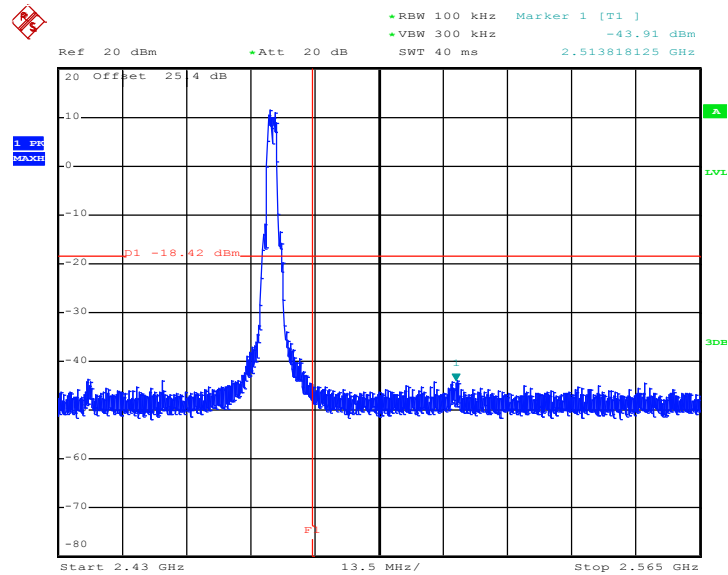

Date: 1.JUL.2019 14:00:26



High Band Edge Plot on Channel 26

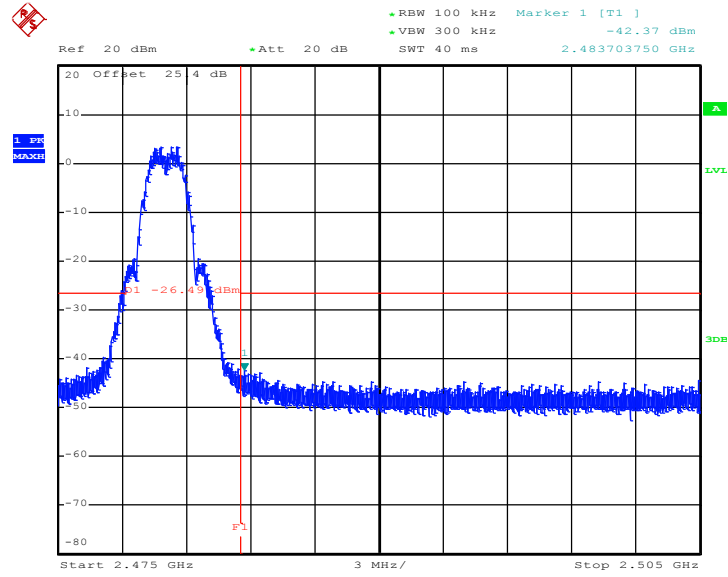


Date: 17.MAY.2019 02:38:54




### 3.4.6 Test Result of Conducted Spurious Emission Plots

#### Conducted Spurious Emission Plot on Zigbee Channel 11

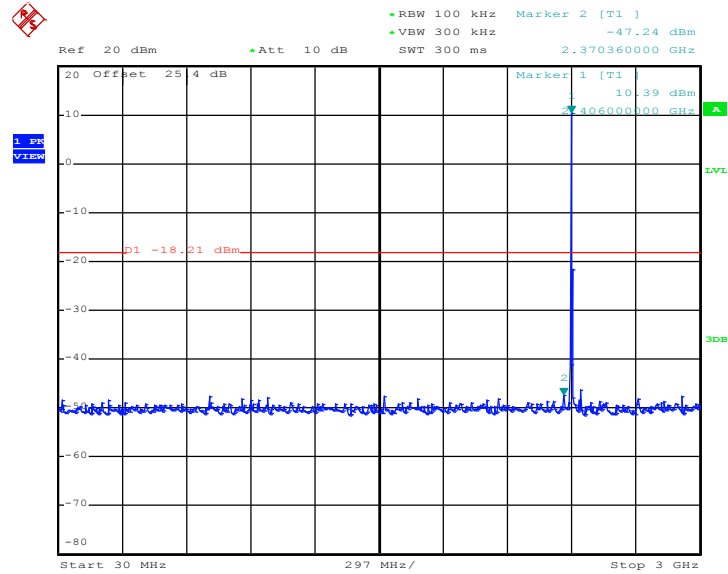

Date: 1.JUL.2019 13:53:23

#### Conducted Spurious Emission Plot on Zigbee Channel 11

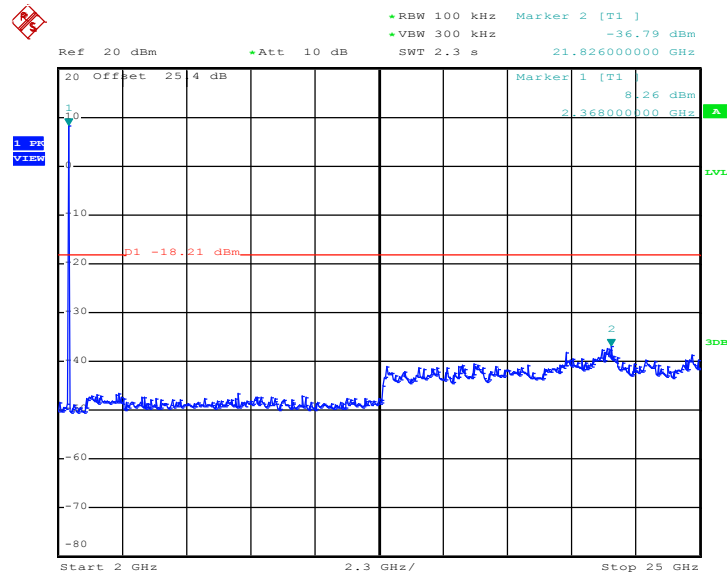


Date: 1.JUL.2019 13:53:39






Conducted Spurious Emission Plot on Zigbee Channel 17

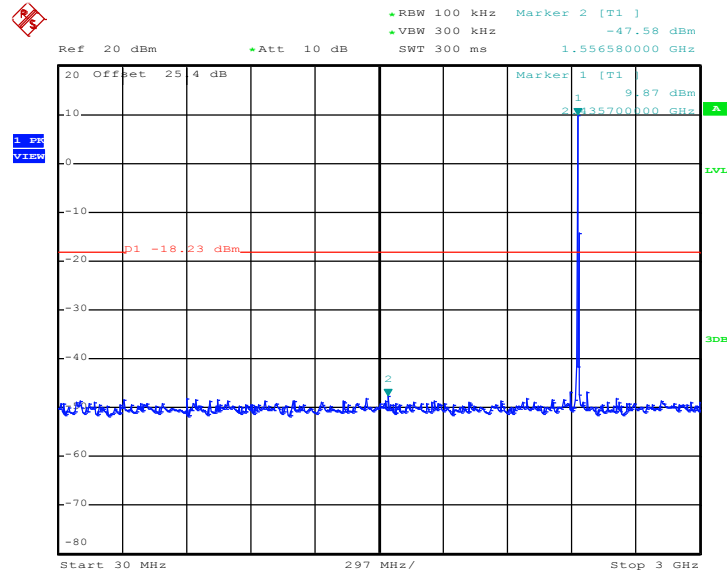

Date: 1.JUL.2019 13:57:19


Conducted Spurious Emission Plot on Zigbee Channel 17

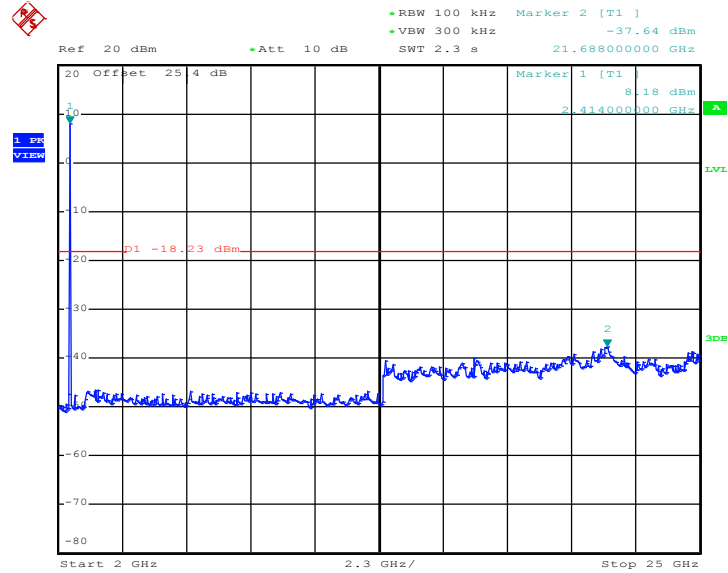

Date: 1.JUL.2019 13:57:34




Conducted Spurious Emission Plot on Zigbee Channel 25

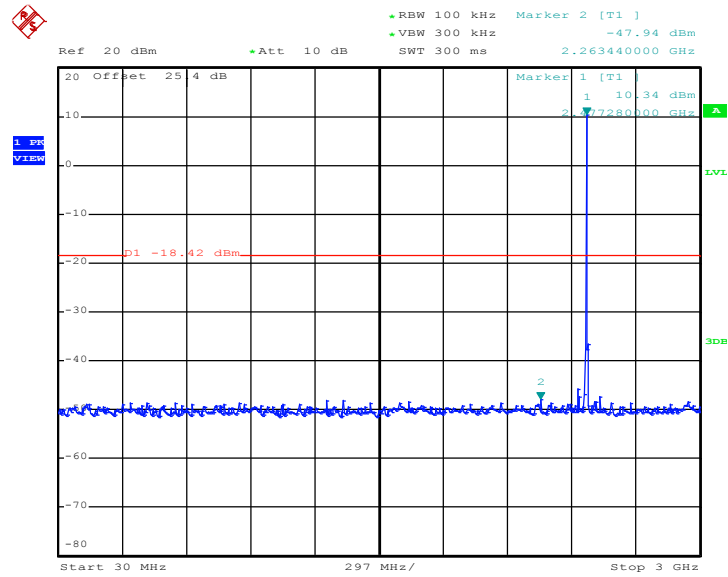

Date: 1.JUL.2019 14:00:44


Conducted Spurious Emission Plot on Zigbee Channel 25

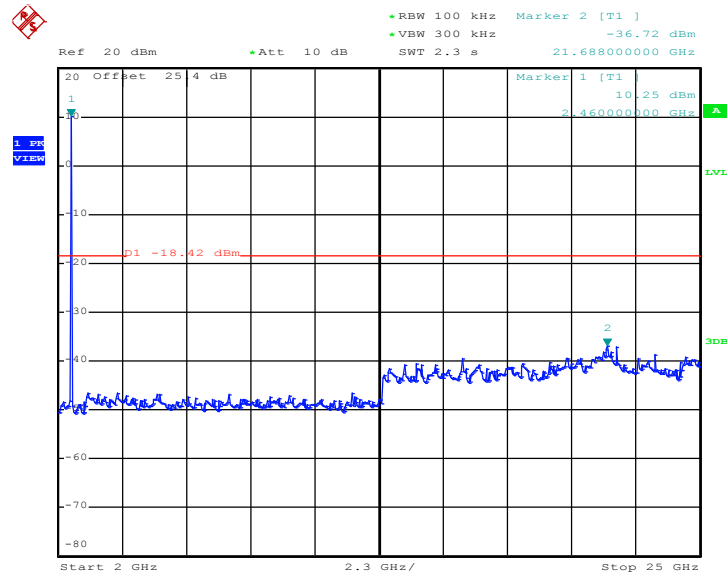

Date: 1.JUL.2019 14:01:00




### Conducted Spurious Emission Plot on Zigbee Channel 26

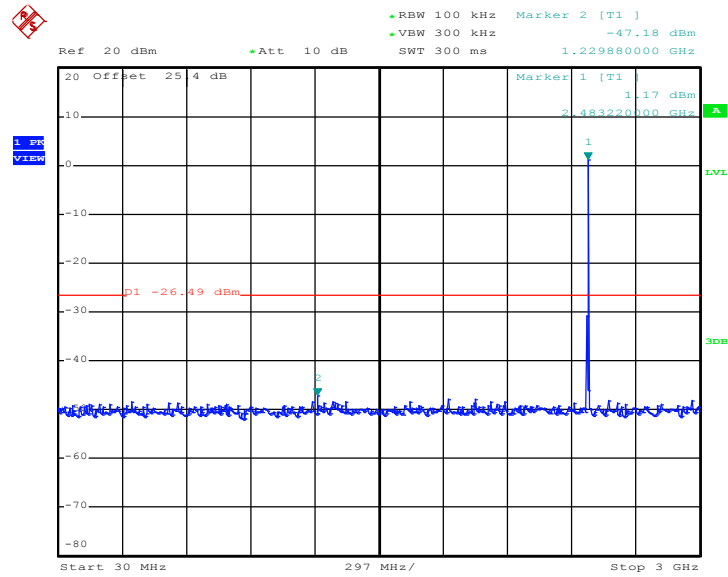

Date: 17.MAY.2019 02:39:27

### Conducted Spurious Emission Plot on Zigbee Channel 26

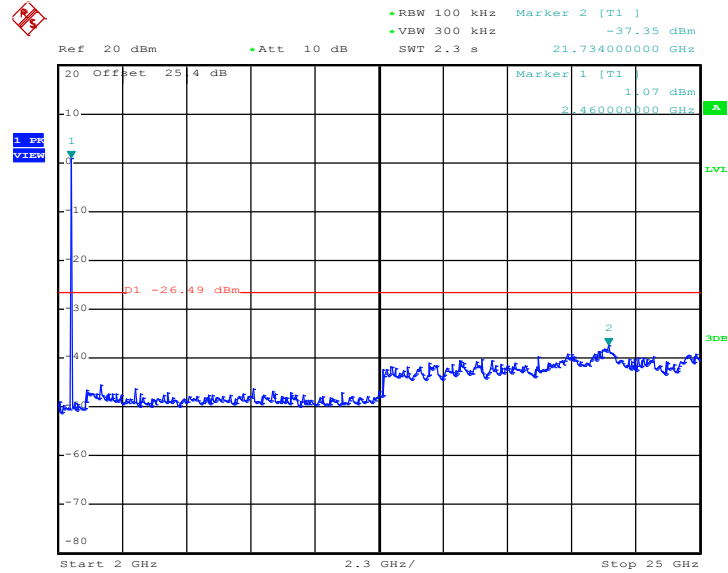

Date: 17.MAY.2019 02:39:55



### 3.5 Spurious Emission Measurement

#### 3.5.1 Limit of Spurious Emission Measurement in the Restricted Band

Emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments


See list of measuring equipment of this test report.

**3.5.3 Test Procedures**


1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For conducted spurious emission measurement in the restricted band, the RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
7. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement.  
For average measurement:
    - VBW = 10 Hz, when duty cycle is no less than 98 percent.
    - VBW  $\geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

### 3.5.4 Test Setup


For Conducted Measurement:

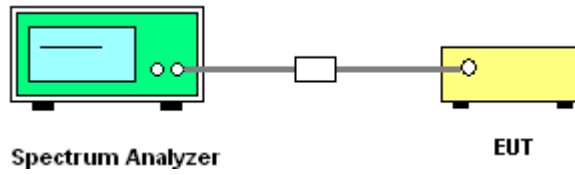


For radiated emissions below 30MHz

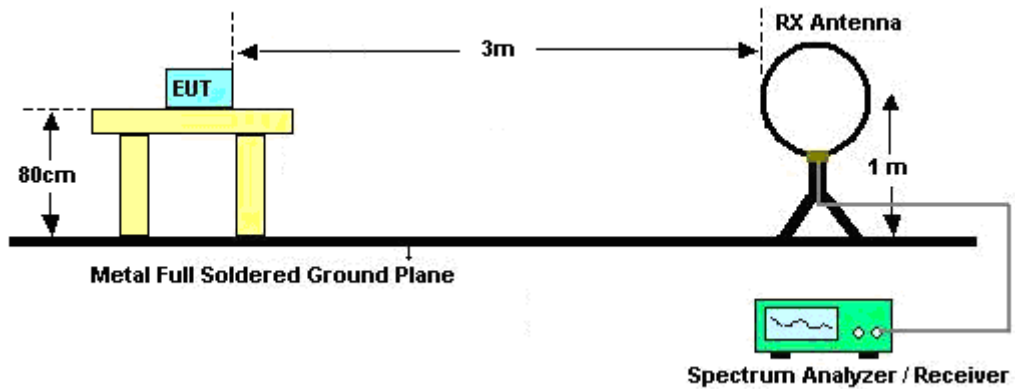

For radiated emissions from 30MHz to 1GHz

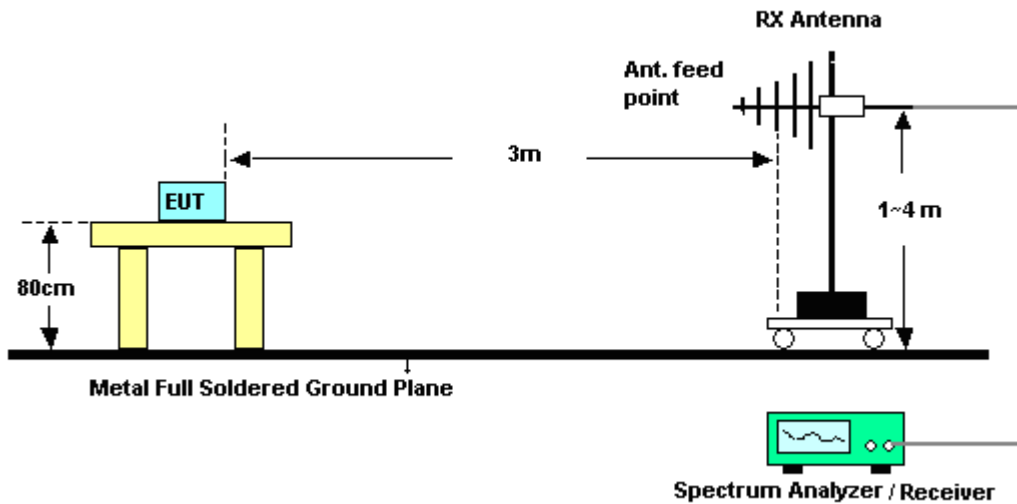

For radiated emissions above 1GHz

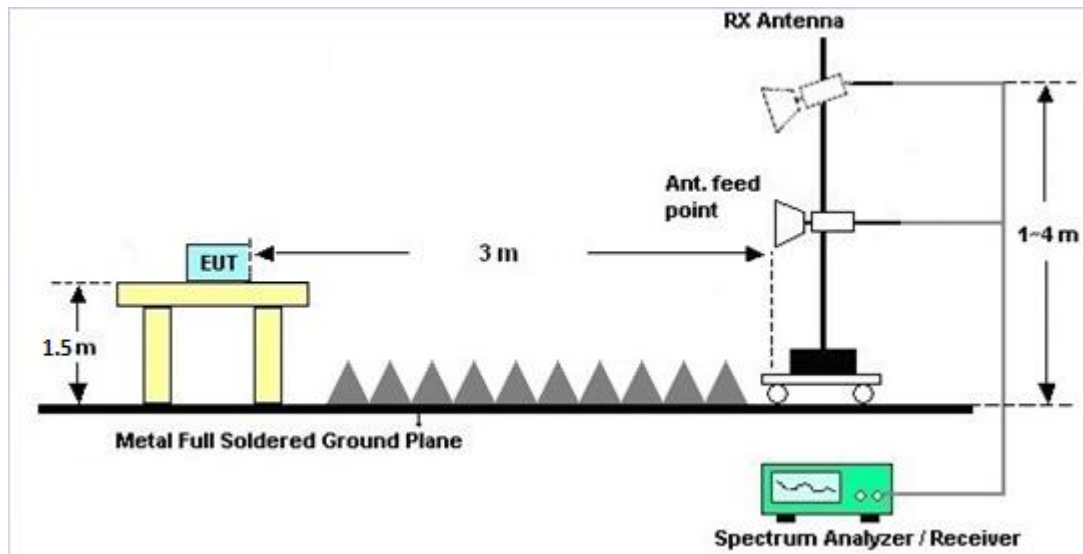

### 3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

### 3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

### 3.5.7 Duty Cycle

Please refer to Appendix E.

### 3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C and D.



### 3.6 AC Conducted Emission Measurement

#### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

#### 3.6.2 Measuring Instruments

See list of measuring equipment of this test report.

#### 3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.



### 3.6.4 Test Setup



### 3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

### **3.7.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.7.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Jan. 11, 2019	May 01, 2019~ Jun. 27, 2019	Jan. 10, 2020	Radiation (03CH16-HY)
Bilog Antenna	TESEQ	CBL6111D&0 0802N1D01N- 06	47020&06	30MHz to 1GHz	Oct. 13, 2018	May 01, 2019~ Jun. 27, 2019	Oct. 12, 2019	Radiation (03CH16-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-152 2	1G~18GHz	Sep. 07, 2018	May 01, 2019~ Jun. 27, 2019	Sep. 06, 2019	Radiation (03CH16-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA9170 251	18GHz ~ 40GHz	Nov. 20, 2018	May 01, 2019~ Jun. 27, 2019	Nov. 19, 2019	Radiation (03CH16-HY)
Amplifier	SONOMA	310N	371607	9kHz~1000MHz	Oct. 02, 2018	May 01, 2019~ Jun. 27, 2019	Oct. 01, 2019	Radiation (03CH16-HY)
Preamplifier	Jet-Power	JPA0118-55-3 03	171000180 0055007	1GHz~18GHz	Apr. 01, 2019	May 01, 2019~ Jun. 27, 2019	Mar. 31, 2020	Radiation (03CH16-HY)
Preamplifier	Keysight	83017A	MY532702 64	1GHz~26.5GHz	Dec. 12, 2018	May 01, 2019~ Jun. 27, 2019	Dec.11, 2019	Radiation (03CH16-HY)
Amplifier	MITEQ	TTA1840-35- HG	1871923	18GHz~40GHz, VSWR : 2.5:1 max	Jul. 16, 2018	May 01, 2019~ Jun. 27, 2019	Jul. 15, 2019	Radiation (03CH16-HY)
EMI Test Receiver	Keysight	N9038A (MXE)	MY572901 11	3Hz~26.5GHz	Nov. 29, 2018	May 01, 2019~ Jun. 27, 2019	Nov. 28, 2019	Radiation (03CH16-HY)
Spectrum Analyzer	Agilent	N9010A	MY542004 86	10Hz~44GHz	Oct. 19, 2018	May 01, 2019~ Jun. 27, 2019	Oct. 18, 2019	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	MY1082/2 6EA	30M-18G	Oct. 15, 2018	May 01, 2019~ Jun. 27, 2019	Oct. 14, 2019	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY15539/ 4	30M-18G	Feb. 26, 2019	May 01, 2019~ Jun. 27, 2019	Feb. 25, 2020	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY36980/ 4	30M~18GHz	Apr. 15, 2019	May 01, 2019~ Jun. 27, 2019	Apr. 14, 2020	Radiation (03CH16-HY)
Software	Audix	E3 6.2009-8-24	RK-001136	N/A	N/A	May 01, 2019~ Jun. 27, 2019	N/A	Radiation (03CH16-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Jul. 10, 2019	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Nov. 12, 2018	Jul. 10, 2019	Nov. 11, 2019	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Nov. 14, 2018	Jul. 10, 2019	Nov. 13, 2019	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 09, 2018	Jul. 10, 2019	Nov. 08, 2019	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Jul. 10, 2019	N/A	Conduction (CO05-HY)
LF Cable	HUBER + SUHNER	RG-214/U	LF01	N/A	Dec. 31, 2018	Jul. 10, 2019	Dec. 30, 2019	Conduction (CO05-HY)
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100851	N/A	Dec. 31, 2018	Jul. 10, 2019	Dec. 30, 2019	Conduction (CO05-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Sensor	DARE	RPR3006W	13I00030S NO32	9kHz~6GHz	Dec. 03, 2018	Apr. 27, 2019~ Jul. 01, 2019	Dec. 02, 2019	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100057	9kHz-40GHz	Nov. 21, 2018	Apr. 27, 2019~ Jul. 01, 2019	Nov. 20, 2019	Conducted (TH05-HY)
Switch Box & RF Cable	Burgeon	ETF-058	EC120838 2	N/A	Mar. 27, 2019	Apr. 27, 2019~ Jul. 01, 2019	Mar. 26, 2020	Conducted (TH05-HY)



## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.20
---	------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.90
---	------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.80
---	------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.90
---	------

## Appendix A. Test Result of Conducted Test Items

Test Engineer:	Luffy Lin	Temperature:	21~25	°C
Test Date:	2019/4/27 ~ 2019/07/01	Relative Humidity:	51~54	%

### **TEST RESULTS DATA** **6dB and 99% Occupied Bandwidth**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
Zigbee	250K	1	11	2405	2.280	1.790	0.50	Pass
Zigbee	250K	1	17	2435	2.285	1.800	0.50	Pass
Zigbee	250K	1	25	2475	2.285	1.740	0.50	Pass
Zigbee	250K	1	26	2480	2.310	1.810	0.50	Pass

### **TEST RESULTS DATA** **Average Power Table**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
Zigbee	250K	1	11	2405	15.50	30.00	4.90	20.40	36.00	Pass
Zigbee	250K	1	17	2435	15.60	30.00	4.90	20.50	36.00	Pass
Zigbee	250K	1	25	2475	15.60	30.00	4.90	20.50	36.00	Pass
Zigbee	250K	1	26	2480	7.40	30.00	4.90	12.30	36.00	Pass

### **TEST RESULTS DATA** **Peak Power Density**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
Zigbee	250K	1	11	2405	11.79	0.33	4.90	8.00	Pass
Zigbee	250K	1	17	2435	11.77	0.20	4.90	8.00	Pass
Zigbee	250K	1	25	2475	11.58	-0.10	4.90	8.00	Pass
Zigbee	250K	1	26	2480	3.51	-8.46	4.90	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.




## Appendix B. AC Conducted Emission Test Results

Test Engineer :	Louis Chung	Temperature :	23.9~26°C
		Relative Humidity :	63.3~70.3%

## EUT Information

Report NO : 800521-02  
 Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Line

Full Spectrum

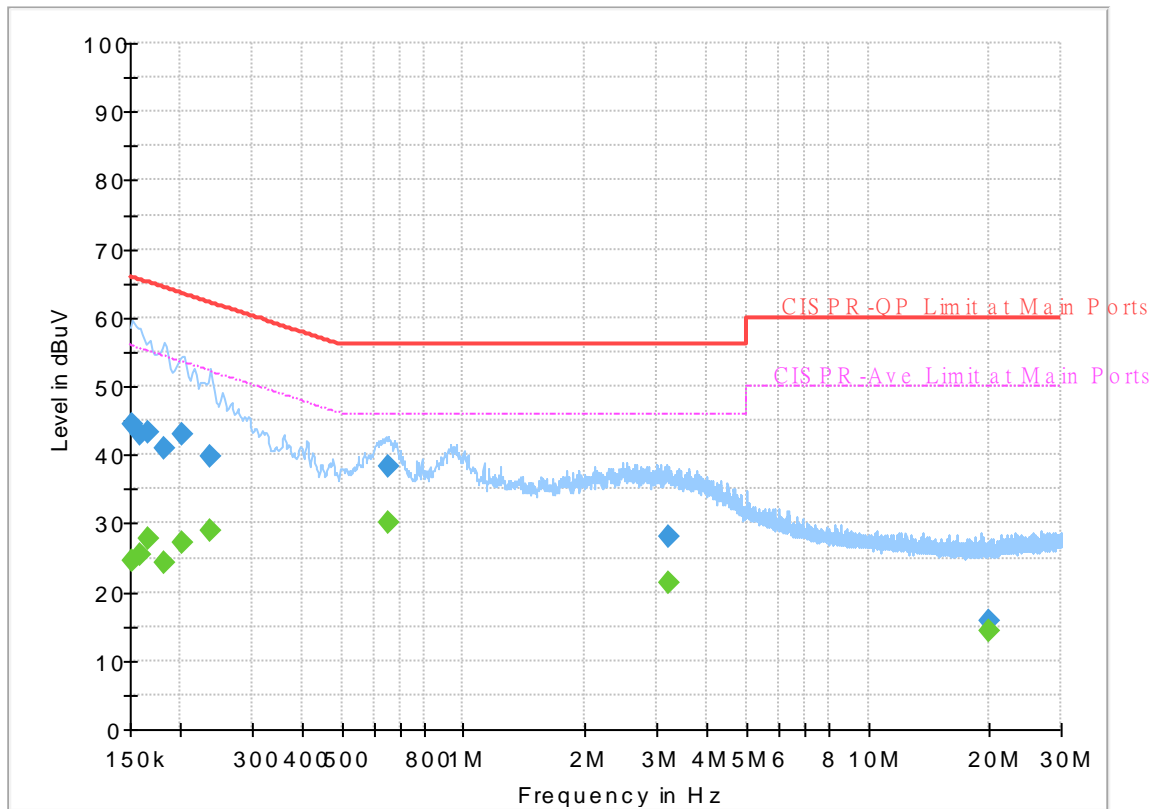

## Final\_Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	24.70	55.88	31.18	L1	OFF	19.4
0.152250	44.32	---	65.88	21.56	L1	OFF	19.4
0.159000	---	25.35	55.52	30.17	L1	OFF	19.4
0.159000	43.10	---	65.52	22.42	L1	OFF	19.4
0.165750	---	27.91	55.17	27.26	L1	OFF	19.4
0.165750	43.18	---	65.17	21.99	L1	OFF	19.4
0.181500	---	24.24	54.42	30.18	L1	OFF	19.4
0.181500	40.88	---	64.42	23.54	L1	OFF	19.4
0.201750	---	27.29	53.54	26.25	L1	OFF	19.4
0.201750	43.05	---	63.54	20.49	L1	OFF	19.4
0.235500	---	29.05	52.25	23.20	L1	OFF	19.4
0.235500	39.91	---	62.25	22.34	L1	OFF	19.4
0.651750	---	29.98	46.00	16.02	L1	OFF	19.4
0.651750	38.39	---	56.00	17.61	L1	OFF	19.4
3.212250	---	21.46	46.00	24.54	L1	OFF	19.5
3.212250	28.17	---	56.00	27.83	L1	OFF	19.5
19.846500	---	14.33	50.00	35.67	L1	OFF	19.7
19.846500	15.76	---	60.00	44.24	L1	OFF	19.7



# EUT Information

Report NO : 800521-02  
 Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Neutral

Full Spectrum

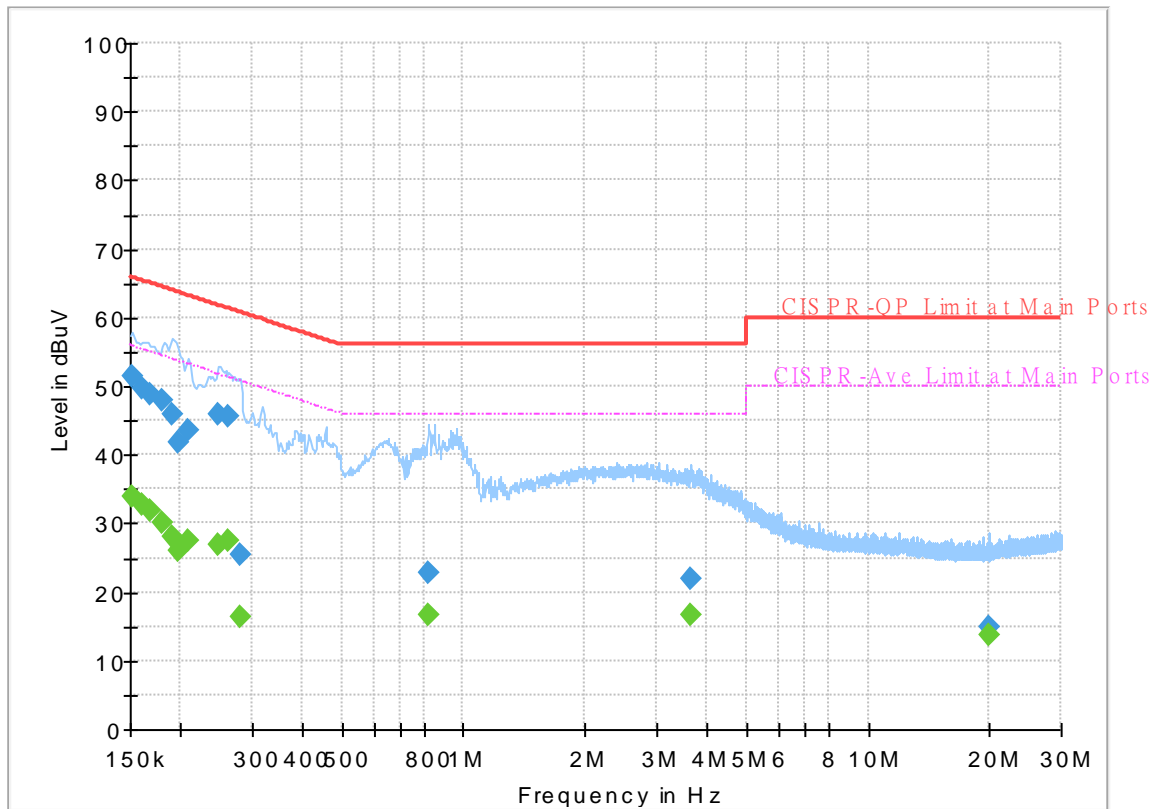

## Final\_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	33.88	55.88	22.00	N	OFF	19.4
0.152250	51.51	---	65.88	14.37	N	OFF	19.4
0.161250	---	32.84	55.40	22.56	N	OFF	19.4
0.161250	49.81	---	65.40	15.59	N	OFF	19.4
0.168000	---	31.83	55.06	23.23	N	OFF	19.4
0.168000	48.85	---	65.06	16.21	N	OFF	19.4
0.179250	---	30.23	54.52	24.29	N	OFF	19.4
0.179250	47.98	---	64.52	16.54	N	OFF	19.4
0.190500	---	28.21	54.02	25.81	N	OFF	19.4
0.190500	46.03	---	64.02	17.99	N	OFF	19.4
0.197250	---	26.08	53.73	27.65	N	OFF	19.4
0.197250	41.86	---	63.73	21.87	N	OFF	19.4
0.208500	---	27.36	53.27	25.91	N	OFF	19.4
0.208500	43.64	---	63.27	19.63	N	OFF	19.4
0.249000	---	27.02	51.79	24.77	N	OFF	19.4
0.249000	45.77	---	61.79	16.02	N	OFF	19.4
0.262500	---	27.59	51.35	23.76	N	OFF	19.4
0.262500	45.60	---	61.35	15.75	N	OFF	19.4
0.280500	---	16.31	50.80	34.49	N	OFF	19.4
0.280500	25.46	---	60.80	35.34	N	OFF	19.4
0.820500	---	16.72	46.00	29.28	N	OFF	19.5

<b>0.820500</b>	<b>22.67</b>	<b>---</b>	<b>56.00</b>	<b>33.33</b>	<b>N</b>	<b>OFF</b>	<b>19.5</b>
<b>3.630750</b>	<b>---</b>	<b>16.63</b>	<b>46.00</b>	<b>29.37</b>	<b>N</b>	<b>OFF</b>	<b>19.5</b>
<b>3.630750</b>	<b>21.88</b>	<b>---</b>	<b>56.00</b>	<b>34.12</b>	<b>N</b>	<b>OFF</b>	<b>19.5</b>
<b>19.981500</b>	<b>---</b>	<b>13.81</b>	<b>50.00</b>	<b>36.19</b>	<b>N</b>	<b>OFF</b>	<b>19.8</b>
<b>19.981500</b>	<b>14.78</b>	<b>---</b>	<b>60.00</b>	<b>45.22</b>	<b>N</b>	<b>OFF</b>	<b>19.8</b>



### Appendix C. Radiated Spurious Emission

Test Engineer :	Jacky Hung, Austin Li and CR Liao	Temperature :	20~25°C
		Relative Humidity :	50~60%

2.4GHz 2400~2483.5MHz

ZIGBEE (Band Edge @ 3m)

ZIGBEE	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
ZIGBEE CH11 2405MHz		2366.28	58.63	-15.37	74	43.29	27.35	18.28	30.29	249	56	P	H
		2366.49	51.09	-2.91	54	35.75	27.35	18.28	30.29	249	56	A	H
	*	2405	115.9	-	-	100.4	27.45	18.33	30.28	249	56	P	H
	*	2405	113.81	-	-	98.31	27.45	18.33	30.28	249	56	A	H
		2366.28	58.18	-15.82	74	42.84	27.35	18.28	30.29	249	69	P	V
		2366.385	50.07	-3.93	54	34.73	27.35	18.28	30.29	249	69	A	V
	*	2405	113.38	-	-	97.88	27.45	18.33	30.28	249	69	P	V
	*	2405	111.17	-	-	95.67	27.45	18.33	30.28	249	69	A	V
ZIGBEE CH17 2435MHz		2356.48	56.58	-17.42	74	41.27	27.33	18.27	30.29	220	35	P	H
		2389.66	44.64	-9.36	54	29.19	27.41	18.32	30.28	220	35	A	H
	*	2435	118.63	-	-	103.02	27.53	18.35	30.27	220	35	P	H
	*	2435	116.4	-	-	100.79	27.53	18.35	30.27	220	35	A	H
		2490.55	56.62	-17.38	74	40.81	27.68	18.38	30.25	220	35	P	H
		2495.73	44.97	-9.03	54	29.14	27.69	18.39	30.25	220	35	A	H
		2385.04	56.37	-17.63	74	40.94	27.4	18.31	30.28	228	73	P	V
		2387.56	44.23	-9.77	54	28.79	27.41	18.31	30.28	228	73	A	V
	*	2435	114.69	-	-	99.08	27.53	18.35	30.27	228	73	P	V
	*	2435	112.44	-	-	96.83	27.53	18.35	30.27	228	73	A	V
		2496.78	56.29	-17.71	74	40.46	27.69	18.39	30.25	228	73	P	V
		2496.15	44.71	-9.29	54	28.88	27.69	18.39	30.25	228	73	A	V



<b>ZIGBEE CH25 2475MHz</b>	*	2475	116.07	-	-	100.32	27.64	18.37	30.26	250	58	P	H
	*	2475	113.9	-	-	98.15	27.64	18.37	30.26	250	58	A	H
		2483.64	63.09	-10.91	74	47.3	27.66	18.38	30.25	250	58	P	H
		2483.52	53.06	-0.94	54	37.27	27.66	18.38	30.25	250	58	A	H
	*	2475	113.89	-	-	98.14	27.64	18.37	30.26	244	75	P	V
	*	2475	111.67	-	-	95.92	27.64	18.37	30.26	244	75	A	V
		2484.12	60.48	-13.52	74	44.69	27.66	18.38	30.25	244	75	P	V
		2483.52	51.03	-2.97	54	35.24	27.66	18.38	30.25	244	75	A	V
<b>ZIGBEE CH26 2480MHz</b>	*	2480	104.41	-	-	88.64	27.65	18.38	30.26	231	59	P	H
	*	2480	102.2	-	-	86.43	27.65	18.38	30.26	231	59	A	H
		2483.56	63.19	-10.81	74	47.4	27.66	18.38	30.25	231	59	P	H
		2483.52	52.81	-1.19	54	37.02	27.66	18.38	30.25	231	59	A	H
	*	2480	102.45	-	-	86.68	27.65	18.38	30.26	245	71	P	V
	*	2480	100.23	-	-	84.46	27.65	18.38	30.26	245	71	A	V
		2483.52	61.75	-12.25	74	45.96	27.66	18.38	30.25	245	71	P	V
		2483.52	51.16	-2.84	54	35.37	27.66	18.38	30.25	245	71	A	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz  
ZIGBEE (Harmonic @ 3m)

ZIGBEE	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
ZIGBEE CH11 2405MHz		4810	46.31	-27.69	74	62.18	32.42	13.81	62.1	100	0	P	H
		7215	54.56	-19.44	74	65.17	37.1	15.37	63.08	226	147	P	H
		7215	47.88	-6.12	54	58.49	37.1	15.37	63.08	226	147	A	H
		4810	48.07	-25.93	74	63.94	32.42	13.81	62.1	100	0	P	V
		7215	52.93	-21.07	74	63.54	37.1	15.37	63.08	147	121	P	V
		7215	44.74	-9.26	54	55.35	37.1	15.37	63.08	147	121	A	V
ZIGBEE CH17 2435MHz		4870	48.89	-25.11	74	64.55	32.54	13.91	62.11	100	0	P	H
		7305	52.28	-21.72	74	62.84	37.23	15.26	63.05	212	146	P	H
		7305	43.86	-10.14	54	54.42	37.23	15.26	63.05	212	146	A	H
		4870	48.87	-25.13	74	64.53	32.54	13.91	62.11	100	0	P	V
		7305	54.88	-19.12	74	65.44	37.23	15.26	63.05	168	112	P	V
		7305	48.34	-5.66	54	58.9	37.23	15.26	63.05	168	112	A	V
ZIGBEE CH25 2475MHz		4950	46.54	-27.46	74	61.91	32.7	14.05	62.12	100	0	P	H
		7425	49.8	-24.2	74	60.17	37.4	15.24	63.01	100	0	P	H
		4950	46.14	-27.86	74	61.51	32.7	14.05	62.12	100	0	P	V
		7425	53.78	-20.22	74	64.15	37.4	15.24	63.01	225	56	P	V
		7425	46.27	-7.73	54	56.64	37.4	15.24	63.01	225	56	A	V
ZIGBEE CH26 2480MHz		4960	43.18	-30.82	74	58.52	32.72	14.06	62.12	100	0	P	H
		7440	46.62	-27.38	74	56.91	37.42	15.29	63	100	0	P	H
		4960	43.4	-30.6	74	58.74	32.72	14.06	62.12	100	0	P	V
		7440	47.54	-26.46	74	57.83	37.42	15.29	63	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz ZIGBEE (LF)

ZIGBEE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
2.4GHz ZIGBEE LF		90.14	26.96	-16.54	43.5	43.58	14.77	0.99	32.38	-	-	P	H
		196.84	29.24	-14.26	43.5	44.91	14.94	1.74	32.35	-	-	P	H
		340.4	36.4	-9.6	46	46	20.1	2.76	32.46	-	-	P	H
		739.07	31.42	-14.58	46	31.42	28.03	4.43	32.46	-	-	P	H
		764.29	31.62	-14.38	46	31.34	28.22	4.48	32.42	-	-	P	H
		894.27	37.26	-8.74	46	35.42	29.01	4.65	31.82	100	0	P	H
		93.05	29.72	-13.78	43.5	46.06	15.03	1.01	32.38	-	-	P	V
		196.84	30.04	-13.46	43.5	45.71	14.94	1.74	32.35	-	-	P	V
		332.64	34.47	-11.53	46	44.35	19.86	2.71	32.45	-	-	P	V
		424.79	32.69	-13.31	46	39.28	22.73	3.2	32.52	-	-	P	V
		613.94	31.98	-14.02	46	34.9	25.85	3.89	32.66	-	-	P	V
	885.54	37.75	-8.25	46	35.99	28.97	4.66	31.87	100	0	P	V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

ZIGBEE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	Limit Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
					( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
ZIGBEE		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 11		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H
2405MHz													

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =  
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
2. Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
2. Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

**Both peak and average measured complies with the limit line, so test result is “PASS”.**





## Appendix D. Radiated Spurious Emission Plots

Test Engineer :	Jacky Hung, Austin Li and CR Liao	Temperature :	20~25°C
		Relative Humidity :	50~60%

### Note symbol





-L	Low channel location
-R	High channel location



2.4GHz 2400~2483.5MHz  
ZIGBEE (Band Edge @ 3m)

ZIGBEE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	ZIGBEE CH11 2405MHz	
	Horizontal	Fundamental
Peak	<p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522 HORIZONTAL Detector : Peak Project : 800521-02 Setting : 16</p>	<p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 HORIZONTAL Detector : Peak Project : 800521-02 Setting : 16</p>
Avg.	<p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522 HORIZONTAL Detector : Peak Project : 800521-02 Setting : 16</p>	<p>Site : 03CH16-HY Condition : AVG_54 3m 91200_1522 HORIZONTAL Detector : Peak Project : 800521-02 Setting : 16</p>

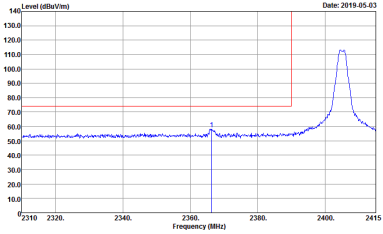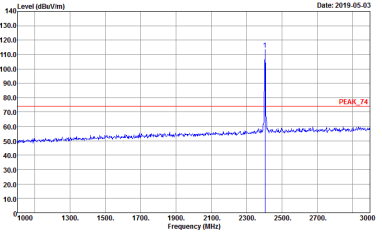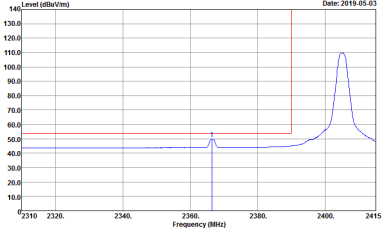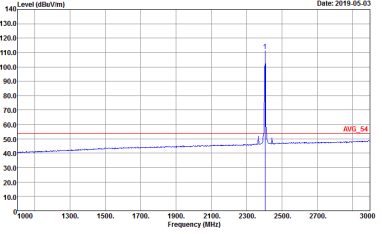

ZIGBEE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	ZIGBEE CH11 2405MHz	
	Vertical	Fundamental
<b>Peak</b>	 <p>Site : 03CH16-HY            Condition : PEAK_BE_74 3m 91200_1522 VERTICAL            Detector : Peak            Project : 800521-02            Setting : 16</p>	 <p>Site : 03CH16-HY            Condition : PEAK_74 3m 91200_1522 VERTICAL            Detector : Peak            Project : 800521-02            Setting : 16</p>
<b>Avg.</b>	 <p>Site : 03CH16-HY            Condition : AVG_BE_54 3m 91200_1522 VERTICAL            Detector : Peak            Project : 800521-02            Setting : 16</p>	 <p>Site : 03CH16-HY            Condition : AVG_54 3m 91200_1522 VERTICAL            Detector : Peak            Project : 800521-02            Setting : 16</p>



ZIGBEE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	ZIGBEE CH17 2435MHz	
	Horizontal	Fundamental
Peak	<p>Site : 03CH16-HY            Condition : PEAK_BE_74 3m 91200_1522 HORIZONTAL            Detector : Peak            Project : 800521-02</p>	<p>Site : 03CH16-HY            Condition : PEAK_74 3m 91200_1522 HORIZONTAL            Detector : Peak            Project : 800521-02</p>
Avg.	<p>Site : 03CH16-HY            Condition : AVG_BE_54 3m 91200_1522 HORIZONTAL            Detector : Peak            Project : 800521-02</p>	<p>Site : 03CH16-HY            Condition : AVG_54 3m 91200_1522 HORIZONTAL            Detector : Peak            Project : 800521-02</p>



ZIGBEE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	ZIGBEE CH17 2435MHz	
	Horizontal	Fundamental
Peak	<p>Site : 03CH16-HY            Condition : PEAK_BE_74 3m 91200_1522 HORIZONTAL            RBW:1000.0000kHz VBW:3000.0000kHz SWT:Auto            Detector : Peak            Project : 800521-02</p>	Left blank
Avg.	<p>Site : 03CH16-HY            Condition : AVG_BE_54 3m 91200_1522 HORIZONTAL            RBW:1000.0000kHz VBW:0.0100kHz SWT:Auto            Detector : Peak            Project : 800521-02</p>	Left blank



ZIGBEE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	ZIGBEE CH17 2435MHz	
	Vertical	Fundamental
Peak	<p>           Site : 03CH16-HY            Condition : PEAK_BE_74 3m 91200_1522 VERTICAL            : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 800521-02         </p>	<p>           Site : 03CH16-HY            Condition : PEAK_74 3m 91200_1522 VERTICAL            : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 800521-02         </p>
Avg.	<p>           Site : 03CH16-HY            Condition : AVG_BE_54 3m 91200_1522 VERTICAL            : RBW:1000.000KHz VBW:0.010KHz SWT:Auto            Detector : Peak            Project : 800521-02         </p>	<p>           Site : 03CH16-HY            Condition : AVG_54 3m 91200_1522 VERTICAL            : RBW:1000.000KHz VBW:0.010KHz SWT:Auto            Detector : Peak            Project : 800521-02         </p>







ZIGBEE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	ZIGBEE CH17 2435MHz	
	Vertical	Fundamental
Peak	<p>           Date: 2019-05-09            PEAK_BE_74         </p> <p>           Site : 03CH16-HY            Condition : PEAK_BE_74 3m 91200_1522 VERTICAL            RBW:1000.0000kHz VBW:3000.0000kHz SWT:Auto            Detector : Peak            Project : 800521-02         </p>	Left link
Avg.	<p>           Date: 2019-05-09            AVG_BE_54         </p> <p>           Site : 03CH16-HY            Condition : AVG_BE_54 3m 91200_1522 VERTICAL            RBW:1000.0000kHz VBW:0.0100kHz SWT:Auto            Detector : Peak            Project : 800521-02         </p>	Left link







ZIGBEE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	ZIGBEE CH25 2475MHz	
	Horizontal	Fundamental
Peak	<p>Site : 03CH16-HY            Condition : PEAK_BE_74 3m 91200_1522 HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 800521-02</p>	<p>Site : 03CH16-HY            Condition : PEAK_74 3m 91200_1522 HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 800521-02</p>
Avg.	<p>Site : 03CH16-HY            Condition : AVG_BE_54 3m 91200_1522 HORIZONTAL            RBW:1000.000KHz VBW:0.010KHz SWT:Auto            Detector : Peak            Project : 800521-02</p>	<p>Site : 03CH16-HY            Condition : AVG_54 3m 91200_1522 HORIZONTAL            RBW:1000.000KHz VBW:0.010KHz SWT:Auto            Detector : Peak            Project : 800521-02</p>



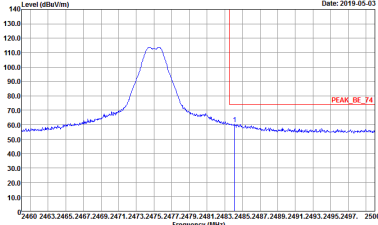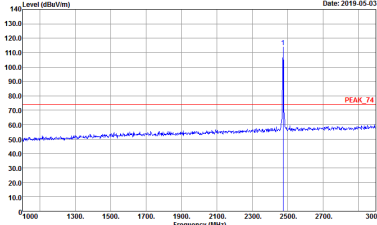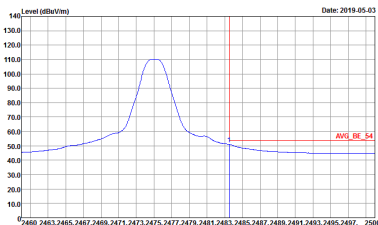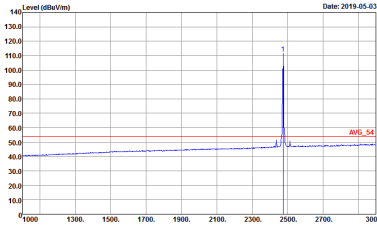

ZIGBEE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	ZIGBEE CH25 2475MHz	
	Vertical	Fundamental
Peak	 <p>Level (dBm/1m) vs Frequency (MHz) plot showing a peak at 2475 MHz. The y-axis ranges from 10.0 to 140.0 dBm/1m, and the x-axis ranges from 2460 to 2500 MHz. A red vertical line marks the peak at 2475 MHz, labeled 'PEAK_BE_74'.</p> <p>Site : 03CH16-HY            Condition : PEAK_BE_74 3m 91200_1522 VERTICAL            RBW:1000.0000kHz VBW:3000.0000kHz SWT:Auto            Detector : Peak            Project : 800521-02</p>	 <p>Level (dBm/1m) vs Frequency (MHz) plot showing a sharp peak at 2475 MHz. The y-axis ranges from 10.0 to 140.0 dBm/1m, and the x-axis ranges from 2400 to 3000 MHz. A red vertical line marks the peak at 2475 MHz, labeled 'PEAK_74'.</p> <p>Site : 03CH16-HY            Condition : PEAK_74 3m 91200_1522 VERTICAL            RBW:1000.0000kHz VBW:3000.0000kHz SWT:Auto            Detector : Peak            Project : 800521-02</p>
Avg.	 <p>Level (dBm/1m) vs Frequency (MHz) plot showing the average spectrum with a peak at 2475 MHz. The y-axis ranges from 10.0 to 140.0 dBm/1m, and the x-axis ranges from 2460 to 2500 MHz. A red vertical line marks the peak at 2475 MHz, labeled 'AVG_BE_54'.</p> <p>Site : 03CH16-HY            Condition : AVG_BE_54 3m 91200_1522 VERTICAL            RBW:1000.0000kHz VBW:0.0100kHz SWT:Auto            Detector : Peak            Project : 800521-02</p>	 <p>Level (dBm/1m) vs Frequency (MHz) plot showing the average spectrum with a sharp peak at 2475 MHz. The y-axis ranges from 10.0 to 140.0 dBm/1m, and the x-axis ranges from 2400 to 3000 MHz. A red vertical line marks the peak at 2475 MHz, labeled 'AVG_54'.</p> <p>Site : 03CH16-HY            Condition : AVG_54 3m 91200_1522 VERTICAL            RBW:1000.0000kHz VBW:0.0100kHz SWT:Auto            Detector : Peak            Project : 800521-02</p>

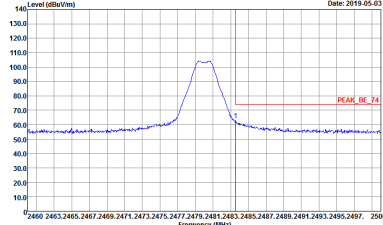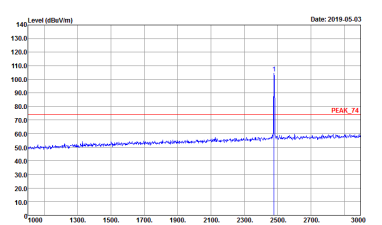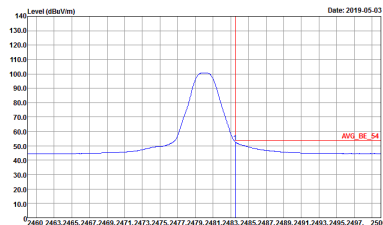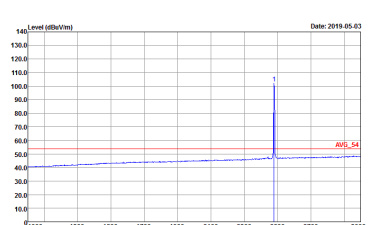



ZIGBEE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	ZIGBEE CH26 2480MHz	
	Horizontal	Fundamental
Peak	 <p>Site : 03CH16-HY            Condition : PEAK_BE_74 3m 91200_1522 HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 800521-02            Setting : 6</p>	 <p>Site : 03CH16-HY            Condition : PEAK_74 3m 91200_1522 HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 800521-02            Setting : 6</p>
Avg.	 <p>Site : 03CH16-HY            Condition : AVG_BE_54 3m 91200_1522 HORIZONTAL            RBW:1000.000KHz VBW:0.010KHz SWT:Auto            Detector : Peak            Project : 800521-02            Setting : 6</p>	 <p>Site : 03CH16-HY            Condition : AVG_54 3m 91200_1522 HORIZONTAL            RBW:1000.000KHz VBW:0.010KHz SWT:Auto            Detector : Peak            Project : 800521-02            Setting : 6</p>



ZIGBEE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	ZIGBEE CH26 2480MHz	
	Vertical	Fundamental
Peak	 <p>Level (dBm/1m) vs Frequency (MHz) plot showing a peak at 2480 MHz. The y-axis ranges from 10.0 to 140.0 dBm/1m, and the x-axis ranges from 2460 to 2500 MHz. A red horizontal line indicates the peak level at approximately 80 dBm/1m.</p> <p>Site : 03CH16-HY            Condition : PEAK_BE_74 3m 91200_1522 VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 800521-02            Setting : 6</p>	 <p>Level (dBm/1m) vs Frequency (MHz) plot showing a sharp peak at 2480 MHz. The y-axis ranges from 10.0 to 140.0 dBm/1m, and the x-axis ranges from 2400 to 3000 MHz. A red horizontal line indicates the peak level at approximately 80 dBm/1m.</p> <p>Site : 03CH16-HY            Condition : PEAK_74 3m 91200_1522 VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 800521-02            Setting : 6</p>
Avg.	 <p>Level (dBm/1m) vs Frequency (MHz) plot showing the average spectrum. The y-axis ranges from 10.0 to 140.0 dBm/1m, and the x-axis ranges from 2460 to 2500 MHz. A red horizontal line indicates the average level at approximately 55 dBm/1m.</p> <p>Site : 03CH16-HY            Condition : AVG_BE_54 3m 91200_1522 VERTICAL            RBW:1000.000KHz VBW:0.010KHz SWT:Auto            Detector : Peak            Project : 800521-02            Setting : 6</p>	 <p>Level (dBm/1m) vs Frequency (MHz) plot showing the average spectrum. The y-axis ranges from 10.0 to 140.0 dBm/1m, and the x-axis ranges from 2400 to 3000 MHz. A red horizontal line indicates the average level at approximately 55 dBm/1m.</p> <p>Site : 03CH16-HY            Condition : AVG_54 3m 91200_1522 VERTICAL            RBW:1000.000KHz VBW:0.010KHz SWT:Auto            Detector : Peak            Project : 800521-02            Setting : 6</p>



2.4GHz 2400~2483.5MHz  
ZIGBEE (Harmonic @ 3m)
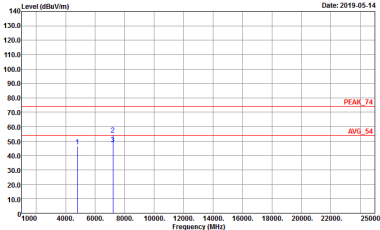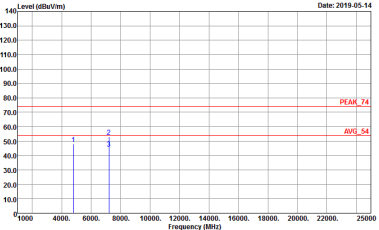
<b>ZIGBEE</b>	<b>2.4GHz 2400~2483.5MHz Harmonic @ 3m</b>	
<b>ZIGBEE CH11 2405MHz</b>		
	<b>Horizontal</b>	<b>Vertical</b>
<b>Peak Avg.</b>	 <p style="font-size: small;">Date: 2019-05-14</p> <p style="font-size: x-small;">Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 HORIZONTAL Detector : Peak Project : 800521-02 Setting : 16</p>	 <p style="font-size: small;">Date: 2019-05-14</p> <p style="font-size: x-small;">Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 VERTICAL Detector : Peak Project : 800521-02 Setting : 16</p>





ZIGBEE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	ZIGBEE CH17 2435MHz	
	Horizontal	Vertical
<b>Peak</b> <b>Avg.</b>	<p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 HORIZONTAL Detector : Peak Project : 800521-02</p>	<p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 VERTICAL Detector : Peak Project : 800521-02</p>



ZIGBEE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	ZIGBEE CH25 2475MHz	
	Horizontal	Vertical
<b>Peak</b> <b>Avg.</b>	<p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 HORIZONTAL Detector : Peak Project : 800521-02</p>	<p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 VERTICAL Detector : Peak Project : 800521-02</p>

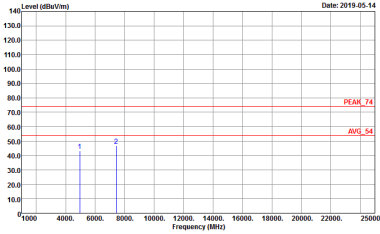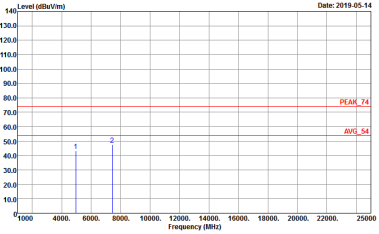

<b>ZIGBEE</b>	<b>2.4GHz 2400~2483.5MHz Harmonic @ 3m</b>	
<b>ZIGBEE CH26 2480MHz</b>		
	<b>Horizontal</b>	<b>Vertical</b>
<b>Peak Avg.</b>	 <p style="font-size: small;">Date: 2019-05-14</p> <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 HORIZONTAL Detector : Peak Project : 800521-02 Setting : 0</p>	 <p style="font-size: small;">Date: 2019-05-14</p> <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 VERTICAL Detector : Peak Project : 800521-02 Setting : 0</p>



Emission below 1GHz  
2.4GHz ZIGBEE(LF)

ZIGBEE	2.4GHz 2400~2483.5MHz	
	ZIGBEE LF	
	Horizontal	Vertical
QP / Peak	<p>Site : 03CH16-HY Condition : QP 3m BILO6_47020406 HORIZONTAL Detector : Peak Project : 800521-02</p>	<p>Site : 03CH16-HY Condition : QP 3m BILO6_47020406 VERTICAL Detector : Peak Project : 800521-02</p>






### Appendix E. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting	Duty Factor(dB)
Zigbee	100	-	-	10Hz	0.00

#### Zigbee

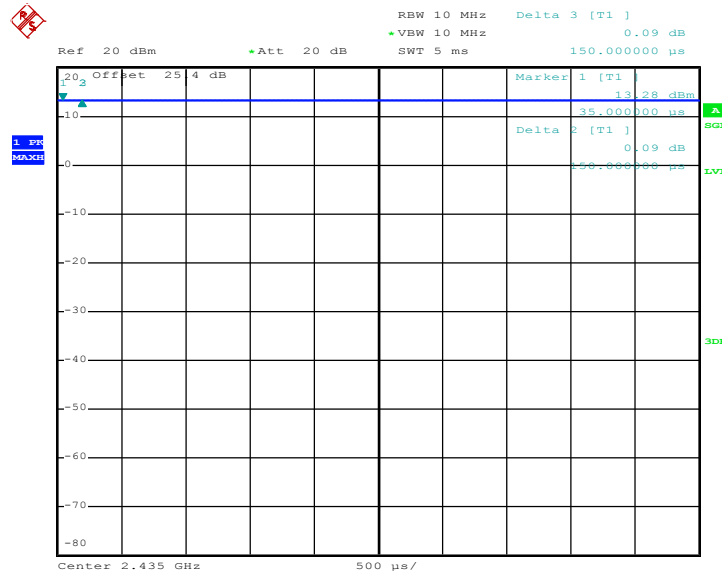

Date: 27.APR.2019 05:20:33

————THE END————