



FCC PART 22H, PART 24E  
MEASUREMENT AND TEST REPORT

For

**Antarus S.A.**

Chemin de la Bruyere 4, 1197 Prangins, Switzerland

**FCC ID: 2ARJFLUCIA1**

<b>Report Type:</b> Original Report	<b>Product Type:</b> Lucia
<b>Report Number:</b> RSZ181017002-00B	
<b>Report Date:</b> 2018-12-26 Rocky Kang	<i>Rocky Kang</i>
<b>Reviewed By:</b> RF Engineer	
<b>Prepared By:</b> Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>	

**Note:** This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA\* or any agency of the Federal Government. \* This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “\*”.

## TABLE OF CONTENTS

<b>GENERAL INFORMATION.....</b>	<b>3</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	3
OBJECTIVE .....	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY .....	3
MEASUREMENT UNCERTAINTY .....	4
TEST FACILITY .....	4
<b>SYSTEM TEST CONFIGURATION .....</b>	<b>5</b>
DESCRIPTION OF TEST CONFIGURATION .....	5
EQUIPMENT MODIFICATIONS .....	5
SUPPORT EQUIPMENT LIST AND DETAILS .....	5
BLOCK DIAGRAM OF TEST SETUP .....	5
<b>SUMMARY OF TEST RESULTS .....</b>	<b>6</b>
<b>TEST EQUIPMENT LIST .....</b>	<b>7</b>
<b>FCC §1.1307(B) &amp; §2.1093 - RF EXPOSURE INFORMATION.....</b>	<b>8</b>
APPLICABLE STANDARD .....	8
TEST RESULT .....	8
<b>FCC §2.1047 - MODULATION CHARACTERISTIC .....</b>	<b>9</b>
<b>FCC § 2.1046, § 22.913 (A) &amp; § 24.232 (C) - RF OUTPUT POWER.....</b>	<b>10</b>
APPLICABLE STANDARD .....	10
TEST PROCEDURE .....	10
TEST DATA .....	10
<b>FCC §2.1049, §22.917, §22.905 &amp; §24.238 - OCCUPIED BANDWIDTH.....</b>	<b>16</b>
APPLICABLE STANDARD .....	16
TEST PROCEDURE .....	16
TEST DATA .....	16
<b>FCC §2.1051, §22.917(A) &amp; §24.238(A) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS .....</b>	<b>23</b>
APPLICABLE STANDARD .....	23
TEST PROCEDURE .....	23
TEST DATA .....	23
<b>FCC § 2.1053; § 22.917 (A);§ 24.238 (A) -SPURIOUS RADIATED EMISSIONS .....</b>	<b>29</b>
APPLICABLE STANDARD .....	29
TEST PROCEDURE .....	29
TEST DATA .....	29
<b>FCC § 22.917 (A); § 24.238 (A) - BAND EDGES.....</b>	<b>32</b>
APPLICABLE STANDARD .....	32
TEST PROCEDURE .....	32
TEST DATA .....	32
<b>FCC § 2.1055; § 22.355; § 24.235 - FREQUENCY STABILITY .....</b>	<b>43</b>
APPLICABLE STANDARD .....	43
TEST PROCEDURE .....	43
TEST DATA .....	44

## GENERAL INFORMATION

---

### Product Description for Equipment under Test (EUT)

The *Antarus S.A.*'s product, model number: *VI (FCC ID: 2ARJFLUCIA1)* or the "EUT" in this report was a *Lucia*, which was measured approximately: 13.5 cm (L) \* 7.2 cm (W) \* 1.8 cm (H), rated with input voltage: DC 3.8 V from battery or DC 5.0V from adapter.

#### Adapter Information:

Model: SMI5-5-K-I38

Input: AC 100-240V, 50/60Hz, 0.2 A

Output: DC 5.0V, 1A

*\*All measurement and test data in this report was gathered from production sample serial number: 181017002. (Assigned by BACL, Shenzhen). The EUT supplied by the applicant was received on 2018-10-17.*

### Objective

This type approval report is prepared on behalf of *Antarus S.A.* in accordance with Part 2, Part 22-Subpart H, Part 24-Subpart E of the Federal Communication Commission's rules.

The objective is to determine the compliance of EUT with FCC rules for output power, modulation characteristic, occupied bandwidth, and spurious emission at antenna terminal, spurious radiated emission, frequency stability, and band edge.

### Related Submittal(s)/Grant(s)

No Related Submittal(s)/Grant(s).

### Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-Part J as well as the following parts:

Part 22 Subpart H - Public Mobile Services

Part 24 Subpart E - Personal Communication Services

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

**Measurement Uncertainty**

Parameter		Uncertainty
Occupied Channel Bandwidth		±5%
RF output power, conducted		±1.5dB
Unwanted Emission, conducted		±1.5dB
Emissions, radiated	Below 1GHz	±4.70dB
	Above 1GHz	±4.80dB
Temperature		±1 °C
Supply voltages		±0.4%

**Test Facility**

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 342867, the FCC Designation No.: CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The EUT was configured for testing according to TIA/EIA-603-D.

The final qualification test was performed with the EUT operating at normal mode.


### Equipment Modifications

No modification was made to the EUT.

### Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891

### Block Diagram of Test Setup

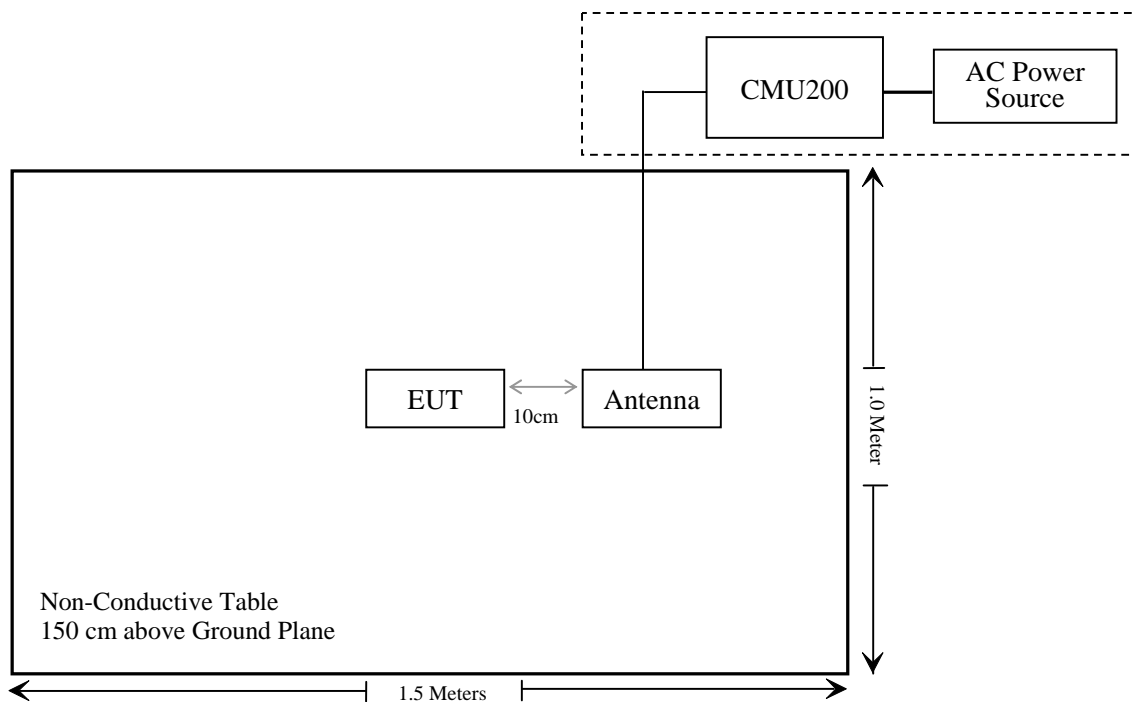

**SUMMARY OF TEST RESULTS**

<b>FCC Rules</b>	<b>Description of Test</b>	<b>Result</b>
§1.1307, §2.1093	RF Exposure (SAR)	Compliance*
§2.1046; § 22.913 (a); § 24.232 (c)	RF Output Power	Compliance
§ 2.1047	Modulation Characteristics	Not Applicable
§ 2.1049; § 22.905; § 22.917; § 24.238	Occupied Bandwidth	Compliance
§ 2.1051; § 22.917 (a); § 24.238 (a)	Spurious Emissions at Antenna Terminal	Compliance
§ 2.1053; § 22.917 (a); § 24.238 (a)	Field Strength of Spurious Radiation	Compliance
§ 22.917 (a); § 24.238 (a)	Band Edge	Compliance
§ 2.1055; § 22.355; § 24.235	Frequency stability	Compliance

Compliance\*: Please refer to SAR report released by BACL, report number: RSZ181017002-20A.

**TEST EQUIPMENT LIST**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
<b>Radiated Emission Test</b>					
Sunol Sciences	Horn Antenna	DRH-118	A052604	2017-12-22	2020-12-21
Rohde & Schwarz	Signal Analyzer	FSEM	845987/005	2018-06-23	2019-06-23
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2017-12-22	2020-12-21
COM-POWER	Pre-amplifier	PA-122	181919	2018-11-12	2019-11-12
Sonoma instrument	Amplifier	310N	186238	2018-11-12	2019-11-12
Anritsu	Signal Generator	68369B	004114	2017-12-24	2018-12-24
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2018-01-11	2019-01-11
COM POWER	Dipole Antenna	AD-100	41000	NCR	NCR
A.H. System	Horn Antenna	SAS-200/571	135	2018-09-01	2021-08-31
Ducommun technologies	RF Cable	UFA147A-2362-100100	MFR64639 231029-003	2018-07-11	2021-07-10
Ducommun technologies	RF Cable	104PEA	218124002	2018-11-12	2019-11-12
Ducommun technologies	RF Cable	RG-214	1	2018-05-21	2019-11-19
Ducommun technologies	RF Cable	RG-214	2	2018-11-12	2019-11-12
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-03	2016-11-18	2019-11-18
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-04	2016-11-18	2019-11-18
Heatsink Required	Amplifier	QLW-18405536-J0	15964001002	2018-11-12	2019-11-12
<b>RF Conducted Test</b>					
Rohde & Schwarz	Spectrum Analyzer	FSU26	200120	2017-12-24	2018-12-24
Rohde & Schwarz	Spectrum Analyzer	FSU26	200120	2018-12-24	2019-12-24
ESPEC	Temperature & Humidity Chamber	EL-10KA	09107726	2017-12-21	2018-12-21
ESPEC	Temperature & Humidity Chamber	EL-10KA	09107726	2018-12-21	2019-12-21
Long Wei	DC Power Supply	TPR-6420D	398363	NCR	NCR
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891	2018-12-14	2019-12-14
Ducommun technologies	RF Cable	RG-214	3	Each Time	
WEINSCHEL	6dB Attenuator	50-6	R4376	Each Time	
Un-known	Power Splitter	1620	129	Each Time	

\* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

---

## **FCC §1.1307(b) & §2.1093 - RF EXPOSURE INFORMATION**

---

### **Applicable Standard**

FCC§1.1310 and §2.1093.

### **Test Result**

Compliance, please refer to the SAR report: RSZ181017002-20A.



---

## **FCC §2.1047 - MODULATION CHARACTERISTIC**

---

According to FCC § 2.1047(d), Part 22H, 24E there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

**FCC § 2.1046, § 22.913 (a) & § 24.232 (c) - RF OUTPUT POWER**

**Applicable Standard**

According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.


According to FCC §2.1046 and §24.232 (C), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB.

**Test Procedure**

*Conducted method:*

The RF output of the transmitter was connected to the CMU200 through sufficient attenuation.



*Radiated method:*

TIA 603-D section 2.2.17

**Test Data**

**Environmental Conditions**

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	52 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Kiki Kong on 2018-12-20.*

**Conducted Power**

**Cellular Band (Part 22H)**

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
GSM	128	824.2	31.75	38.45
	190	836.6	31.71	38.45
	251	848.8	32.28	38.45

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
GPRS	128	824.2	31.23	30.32	28.59	27.31	38.45
	190	836.6	31.20	30.42	28.65	27.40	38.45
	251	848.8	31.33	30.51	28.79	27.52	38.45

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
EGPRS	128	824.2	26.28	25.30	23.60	22.97	38.45
	190	836.6	26.34	25.23	23.69	22.70	38.45
	251	848.8	26.96	25.34	23.80	22.81	38.45

Mode	Test Mode	3GPP Sub Test	Average Output Power (dBm)		
			Low Frequency	Middle Frequency	High Frequency
WCDMA (Band V)	RMC		22.30	22.52	22.25
	HSDPA	1	21.56	21.23	21.05
		2	21.73	21.93	21.34
		3	21.82	22.08	21.43
		4	21.74	21.96	21.35
	HSUPA	1	21.56	21.75	21.21
		2	21.72	21.92	21.26
		3	21.86	22.08	21.43
		4	21.66	21.92	21.27
		5	21.84	22.08	21.42
HSPA+	1	21.25	21.14	21.55	

**PCS Band (Part 24E)**

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
GSM	512	1850.2	30.31	33
	661	1880.0	29.60	33
	810	1909.8	29.30	33

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
GPRS	512	1850.2	27.86	27.48	26.63	25.43	33
	661	1880.0	27.89	27.44	26.73	25.58	33
	810	1909.8	27.84	27.26	26.75	25.74	33

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
EGPRS	512	1850.2	24.40	23.54	21.59	20.61	33
	661	1880.0	24.61	23.82	21.91	20.90	33
	810	1909.8	25.36	24.28	22.68	21.59	33

Mode	Test Mode	3GPP Sub Test	Average Output Power (dBm)		
			Low Frequency	Middle Frequency	High Frequency
WCDMA (Band II)	RMC		22.20	22.45	22.18
	HSDPA	1	21.20	21.43	21.34
		2	20.38	20.33	20.37
		3	20.48	20.38	20.56
		4	20.36	20.35	20.34
	HSUPA	1	21.24	21.45	21.32
		2	20.34	20.39	20.34
		3	20.54	20.31	20.44
		4	20.31	20.36	20.34
		5	20.46	20.42	20.47
	HSPA+	1	20.53	20.45	20.39

**Peak-to-average ratio (PAR)****Cellular Band**

Mode	Channel	PAR (dB)	Limit (dB)
GSM	Low	1.25	13
	Middle	1.16	13
	High	1.21	13

Mode	Channel	PAR (dB)	Limit (dB)
EGPRS	Low	1.18	13
	Middle	1.19	13
	High	1.25	13

Mode	Channel	PAR (dB)	Limit (dB)
WCDMA (BPSK)	Low	3.55	13
	Middle	3.61	13
	High	3.85	13
HSDPA (16QAM)	Low	3.87	13
	Middle	3.66	13
	High	3.86	13
HSUPA (BPSK)	Low	3.68	13
	Middle	3.64	13
	High	3.61	13

**PCS Band**

<b>Mode</b>	<b>Channel</b>	<b>PAR (dB)</b>	<b>Limit (dB)</b>
GSM	Low	1.23	13
	Middle	1.09	13
	High	1.11	13

<b>Mode</b>	<b>Channel</b>	<b>PAR (dB)</b>	<b>Limit (dB)</b>
EGPRS	Low	1.27	13
	Middle	1.05	13
	High	1.33	13

<b>Mode</b>	<b>Channel</b>	<b>PAR (dB)</b>	<b>Limit (dB)</b>
WCDMA (BPSK)	Low	3.64	13
	Middle	3.61	13
	High	3.87	13
HSDPA (16QAM)	Low	3.84	13
	Middle	3.66	13
	High	3.65	13
HSUPA (BPSK)	Low	3.89	13
	Middle	3.63	13
	High	3.85	13

**Radiated Power****GSM Mode:**

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	Level (dBm)	Cable loss (dB)	Antenna Gain (dBi)			
ERP for Cellular Band (Part 22H), Middle Channel										
836.6	84.63	241	1.3	H	25.3	1.9	0.0	23.40	38.45	15.05
836.6	90.84	238	1.7	V	30.8	1.9	0.0	28.90	38.45	9.55
EIRP for PCS Band (Part 24E), Middle Channel										
1880.00	83.47	195	1.7	H	13.2	1.30	9.40	21.30	33	11.70
1880.00	87.10	70	1.2	V	17.1	1.30	9.40	25.20	33	7.80

**EGPRS Mode:**

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	Level (dBm)	Cable loss (dB)	Antenna Gain (dBi)			
ERP for Cellular Band (Part 22H), Middle Channel										
836.6	81.32	239	1.9	H	21.9	1.9	0.0	20.00	38.45	18.45
836.6	85.88	74	1.8	V	25.9	1.9	0.0	24.00	38.45	14.45
EIRP for PCS Band (Part 24E), Middle Channel										
1880.00	85.79	216	1.5	H	15.7	1.30	9.40	23.80	33	9.20
1880.00	87.62	126	2.3	V	17.4	1.30	9.40	25.50	33	7.50

**WCDMA Mode:**

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	Level (dBm)	Cable loss (dB)	Antenna Gain (dBi)			
ERP for WCDMA Band V (Part 22H), Middle Channel										
836.6	78.57	17	2.1	H	18.6	1.9	0.0	16.70	38.45	21.75
836.6	81.66	80	2.3	V	22.3	1.9	0.0	20.40	38.45	18.05
EIRP for WCDMA Band II (Part 24E), Middle Channel										
1880.00	79.36	87	2.3	H	9.1	1.30	9.40	17.20	33	15.80
1880.00	82.14	191	1.8	V	12.1	1.30	9.40	20.20	33	12.80

**Note:**

All above data were tested with no amplifier.

Absolute Level = Substituted Level - Cable loss + Antenna Gain

Margin = Limit - Absolute Level

**FCC §2.1049, §22.917, §22.905 & §24.238 - OCCUPIED BANDWIDTH**


**Applicable Standard**

FCC 47 §2.1049, §22.917, §22.905 and §24.238.

**Test Procedure**

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 5 kHz (GSM) & 100 kHz (WCDMA) and the 26 dB & 99% bandwidth was recorded.

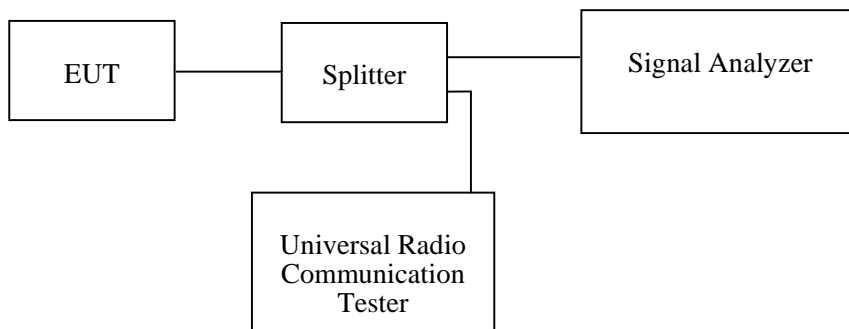

**Test Data**

**Environmental Conditions**

<b>Temperature:</b>	20~25 °C
<b>Relative Humidity:</b>	50~52 %
<b>ATM Pressure:</b>	100.0~101.0 kPa

*The testing was performed by Kiki Kong on 2018-12-20 and 2018-12-25.*

*EUT operation mode: Transmitting*



Test Result: Compliance. Please refer to the following tables and plots.

### Cellular Band (Part 22H)

Mode	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM(GMSK)	836.6	246.8	317.3

Mode	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
EGPRS(GMSK)	836.6	243.6	310.9

Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
RMC (BPSK)	836.6	4.135	4.663
HSUPA (BPSK)	836.6	4.135	4.679
HSDPA (16QAM)	836.6	4.135	4.663

### PCS Band (Part 24E)


Mode	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM(GMSK)	1880	245.2	318.9

Mode	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
EGPRS(GMSK)	1880	243.6	315.7

Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
RMC (BPSK)	1880.0	4.151	4.679
HSUPA (BPSK)	1880.0	4.151	4.679
HSDPA (16QAM)	1880.0	4.151	4.679


Cellular Band (Part 22H)

26 dB Emissions Bandwidth for GSM (GMSK) Mode

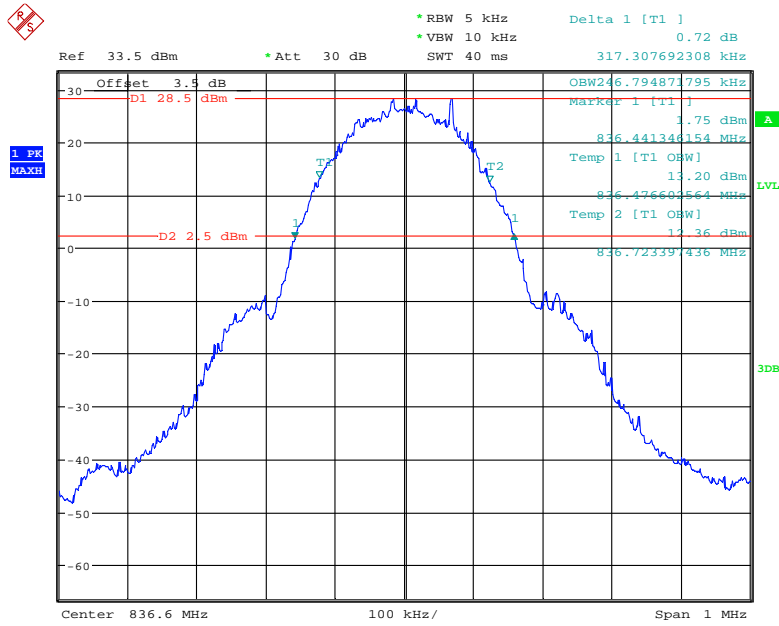


Date: 20.DEC.2018 08:11:56

26 dB Emissions Bandwidth for EGPRS (GMSK) Mode

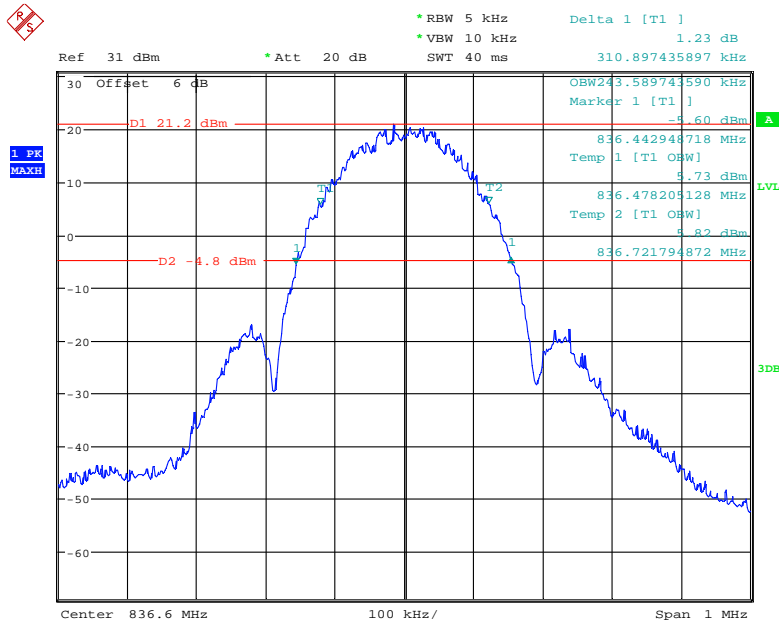


Date: 25.DEC.2018 12:46:52

### 26 dB Emissions Bandwidth for RMC (BPSK) Mode

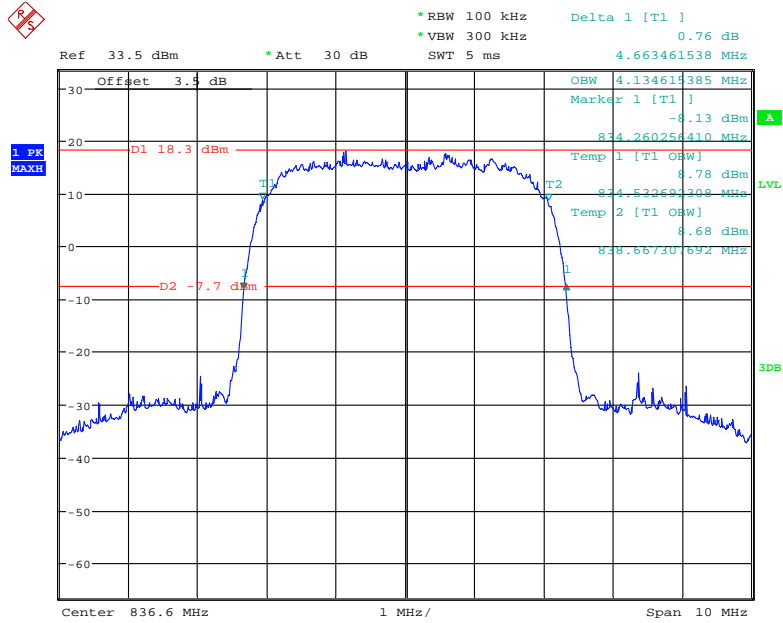


Date: 20.DEC.2018 10:22:00

### 26 dB Emissions Bandwidth for HSUPA (BPSK) Mode

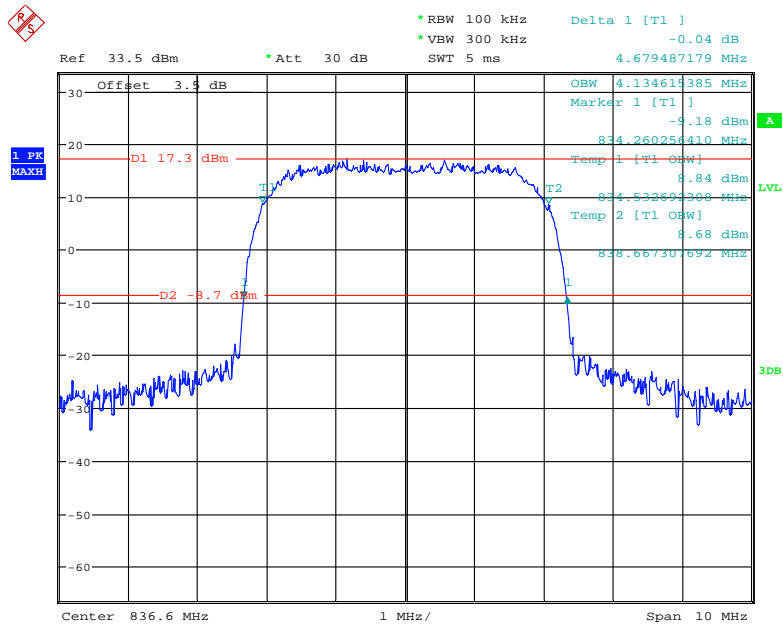

Date: 20.DEC.2018 10:20:02


### 26 dB Emissions Bandwidth for HSDPA (16QAM) Mode

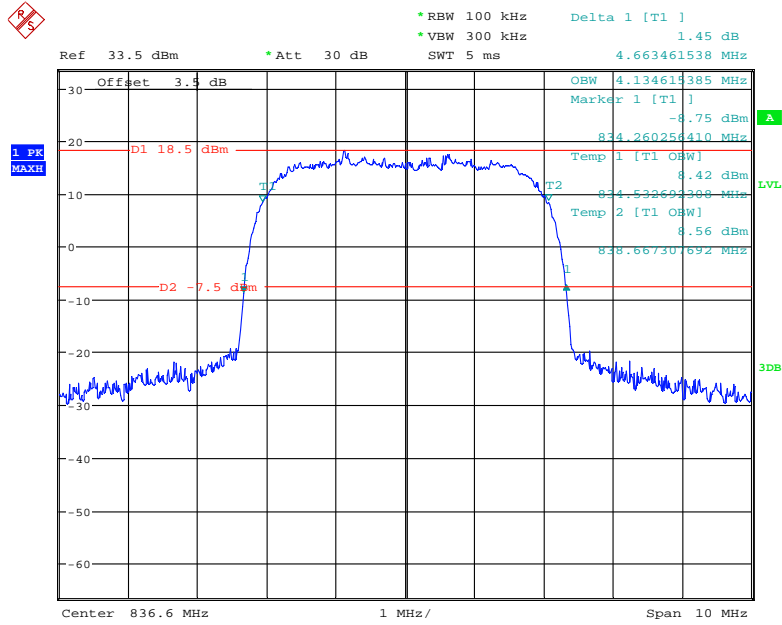

Date: 20.DEC.2018 10:17:21


### PCS Band (Part 24E)

### 26 dB Emissions Bandwidth for GSM (GMSK) Mode

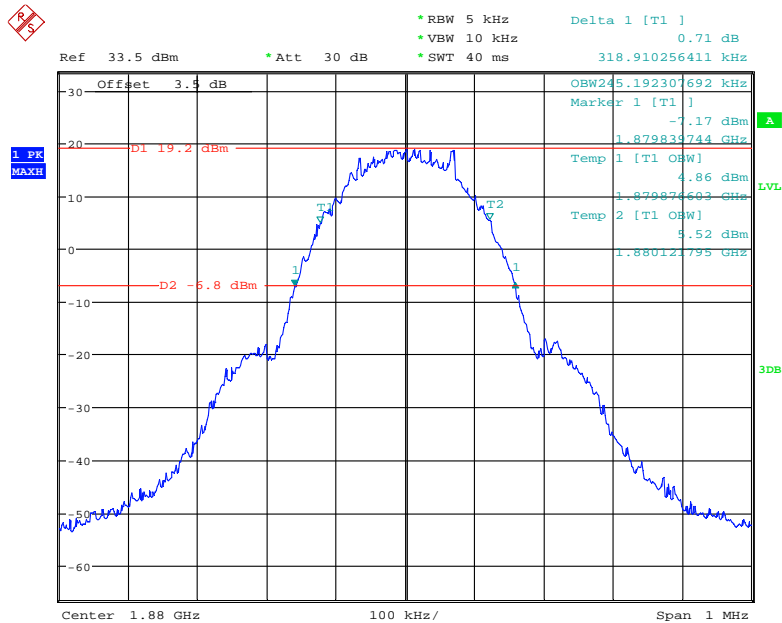


Date: 20.DEC.2018 08:49:27

### 26 dB Emissions Bandwidth for EGPRS (GMSK) Mode

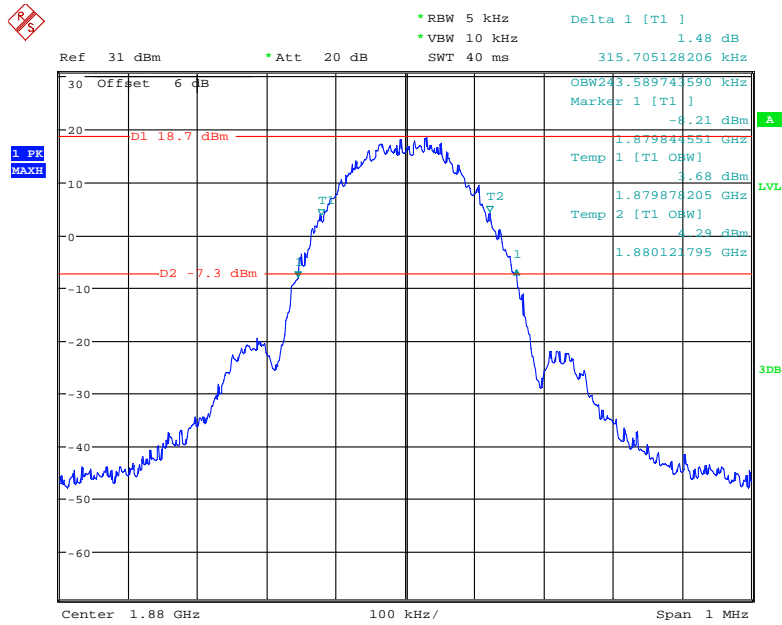


Date: 25.DEC.2018 12:58:38

### 26 dB Emissions Bandwidth for RMC (BPSK) Mode

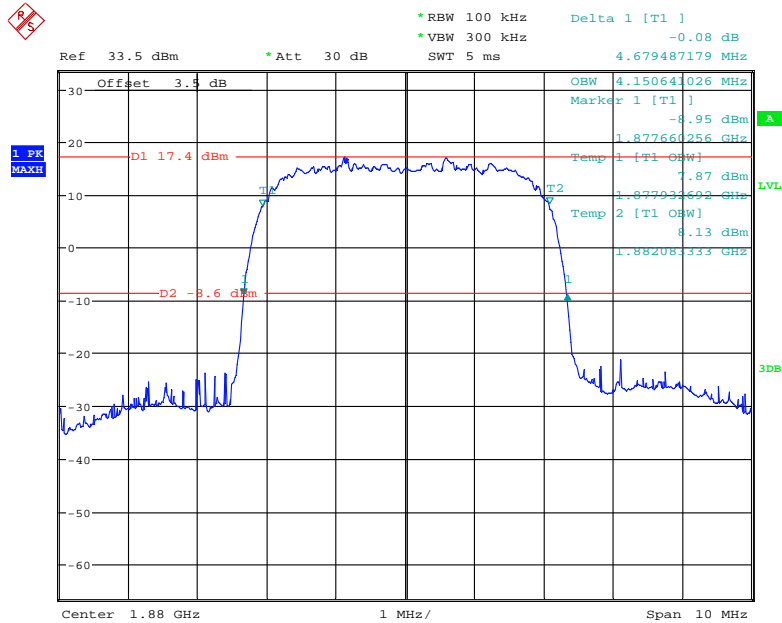


Date: 20.DEC.2018 09:42:44

### 26 dB Emissions Bandwidth for HSUPA (BPSK) Mode

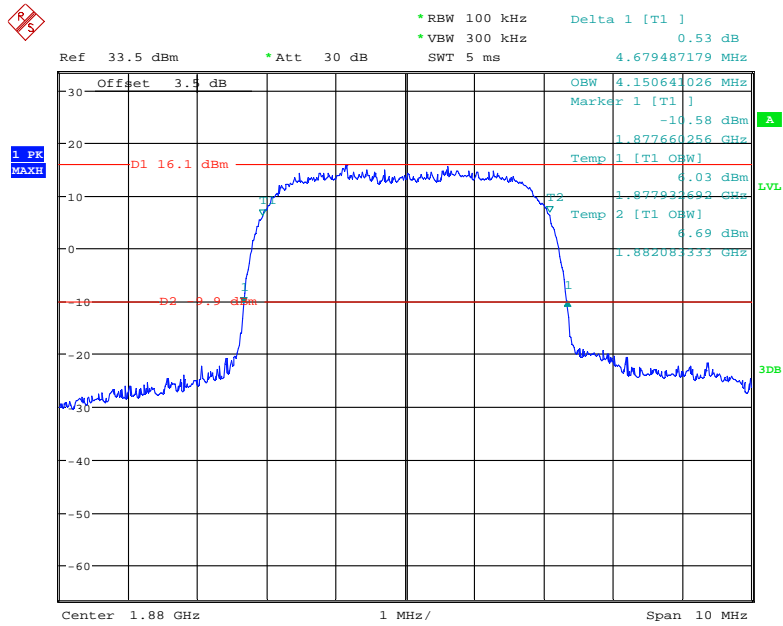

Date: 20.DEC.2018 10:04:26

### 26 dB Emissions Bandwidth for HSDPA (16QAM) Mode

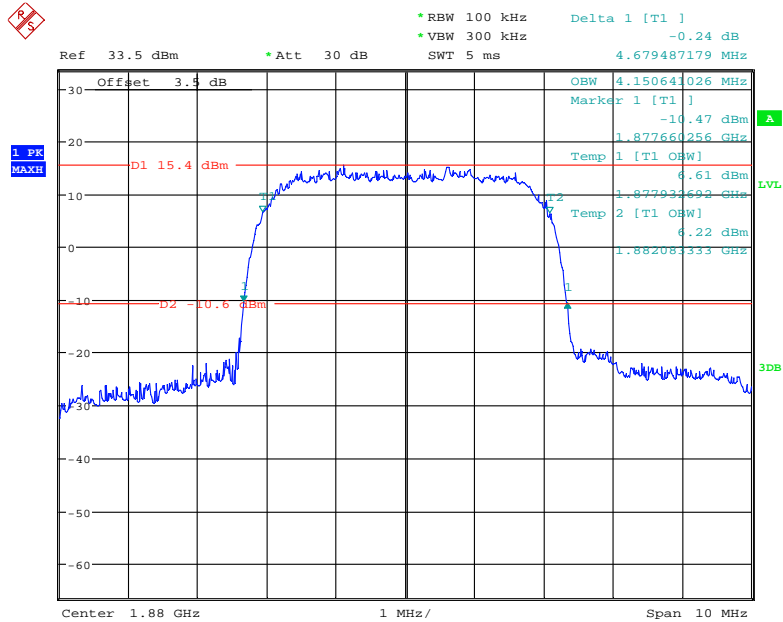

Date: 20.DEC.2018 10:06:27

**FCC §2.1051, §22.917(a) & §24.238(a) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS**


**Applicable Standard**

FCC §2.1051, §22.917(a) and §24.238(a).

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.

**Test Procedure**

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100kHz for below 1GHz and 1MHz for above 1GHz. Sufficient scans were taken to show any out of band emissions up to 10<sup>th</sup> harmonic.

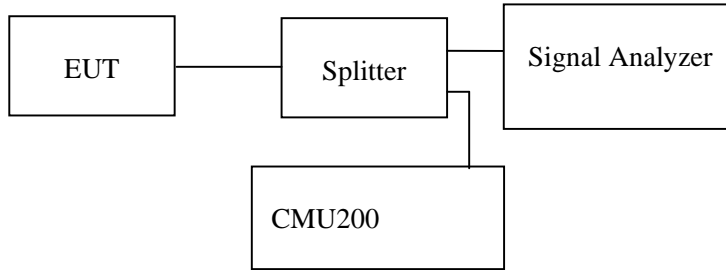

**Test Data**

**Environmental Conditions**

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	52 %
<b>ATM Pressure:</b>	101.0 kPa


*The testing was performed by Kiki Kong on 2018-12-27 and 2018-12-28.*

*EUT operation mode: Transmitting*

*Test result: Compliance, please refer to the following plots.*

Cellular Band (Part 22H)


30 MHz – 1 GHz (GSM Mode)

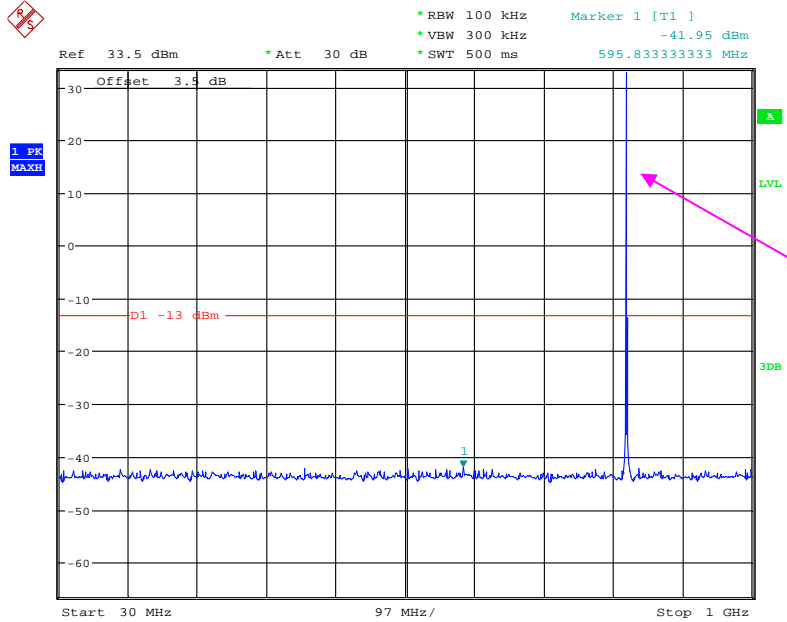

Fundamental test

Date: 27.DEC.2018 14:38:35


1 GHz – 10 GHz (GSM Mode)

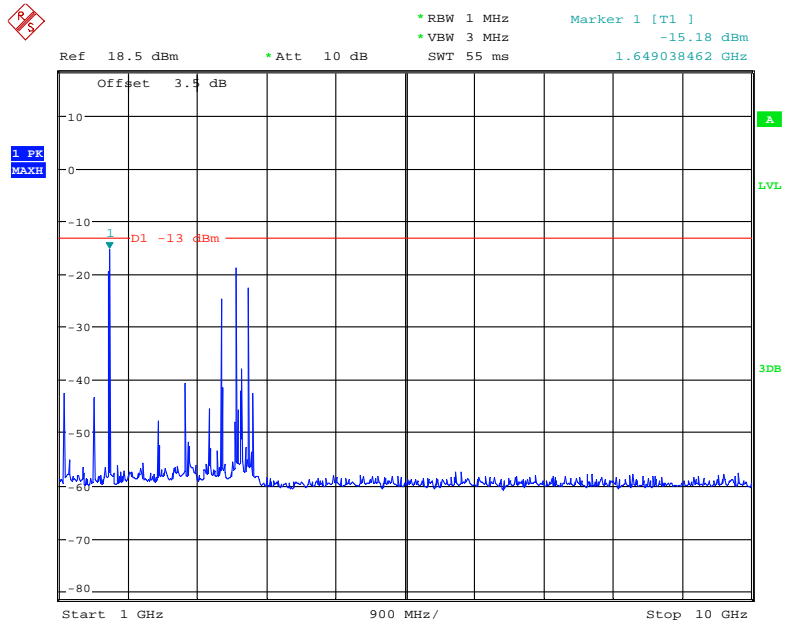

Date: 27.DEC.2018 14:42:04




### 30 MHz – 1 GHz (WCDMA Mode)

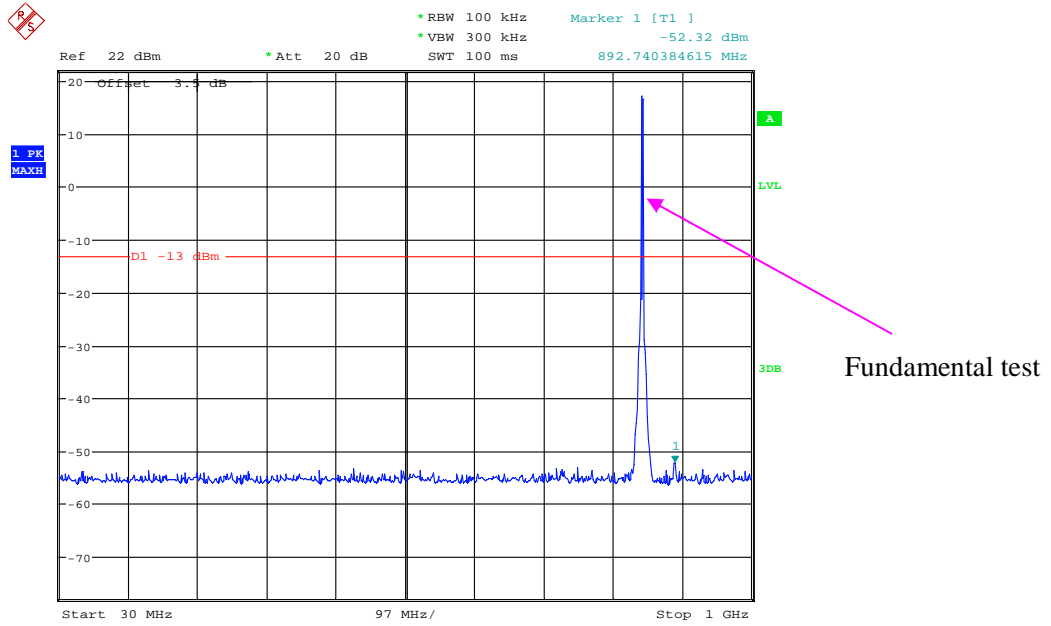

Date: 27.DEC.2018 15:03:42


### 1 GHz – 10GHz (WCDMA Mode)

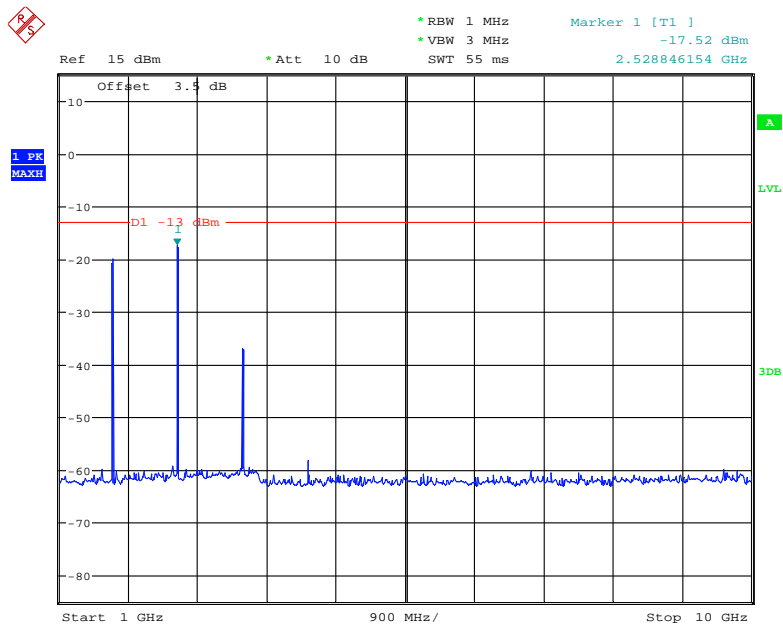

Date: 27.DEC.2018 15:04:39


PCS Band (Part 24E)

30 MHz – 1 GHz (GSM Mode)

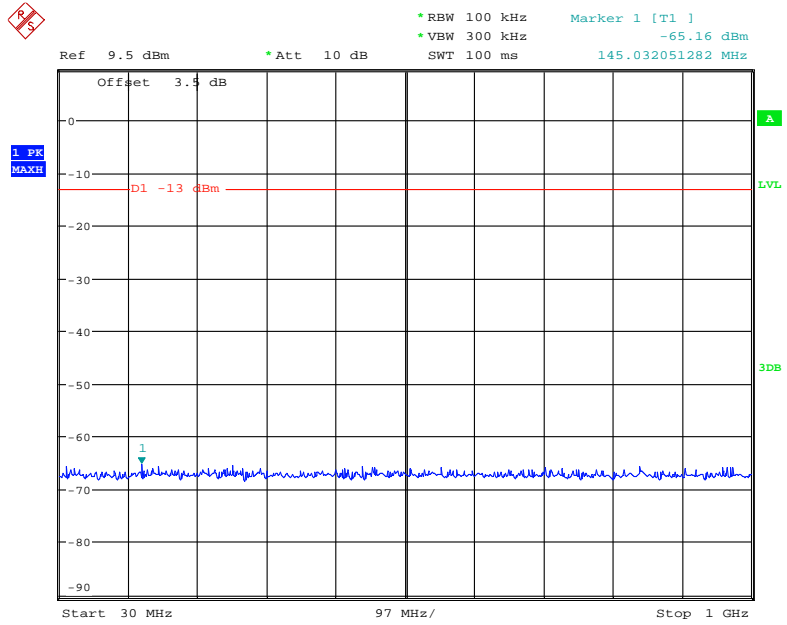

Date: 28.DEC.2018 08:56:14


1 GHz – 2 GHz (GSM Mode)

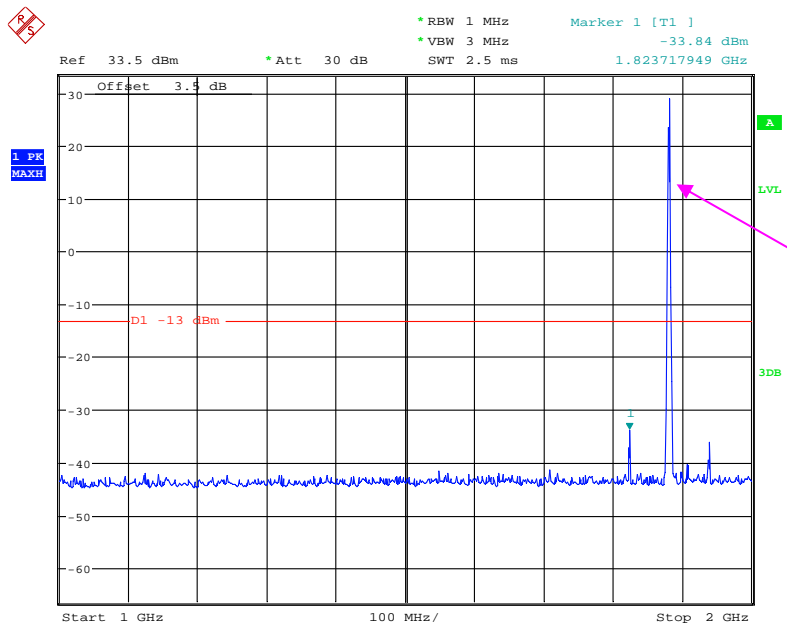

Fundamental test


Date: 27.DEC.2018 15:08:14

### 2 GHz – 20 GHz (GSM Mode)

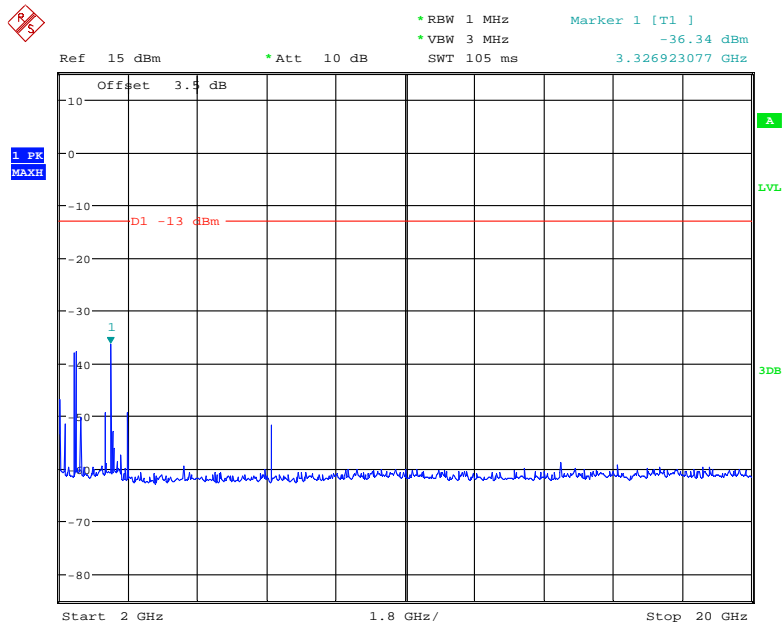


Date: 27.DEC.2018 15:09:41

### 30 MHz – 1 GHz (WCDMA Mode)

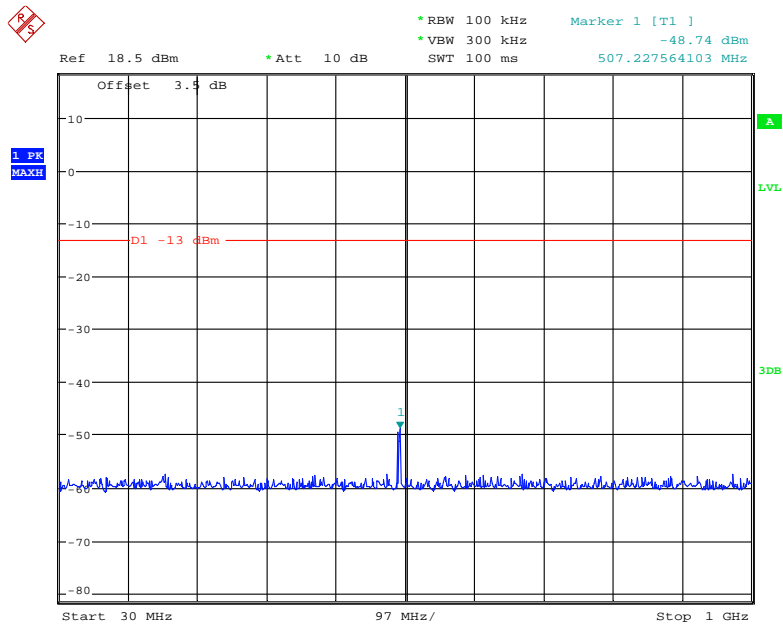


Date: 27.DEC.2018 15:02:07

### 1 GHz – 2 GHz (WCDMA Mode)

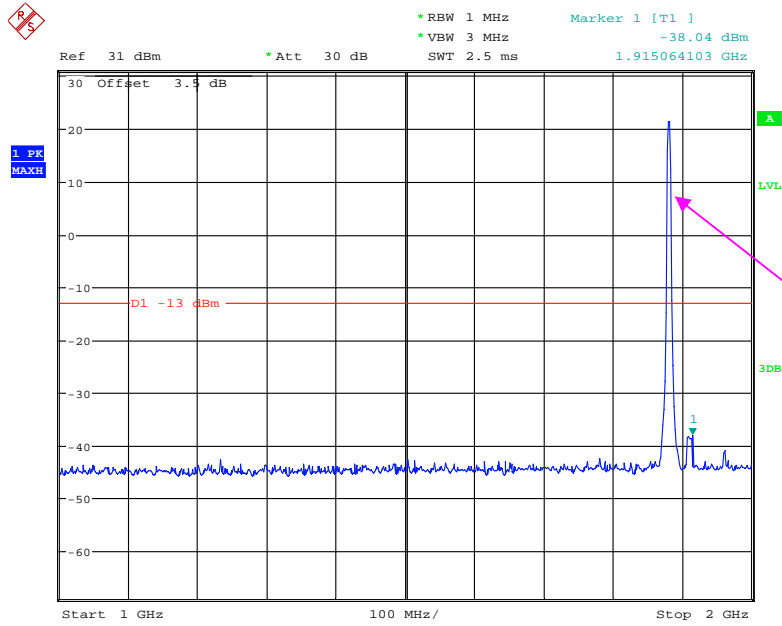

Date: 27.DEC.2018 15:00:36

### 2 GHz – 20 GHz (WCDMA Mode)

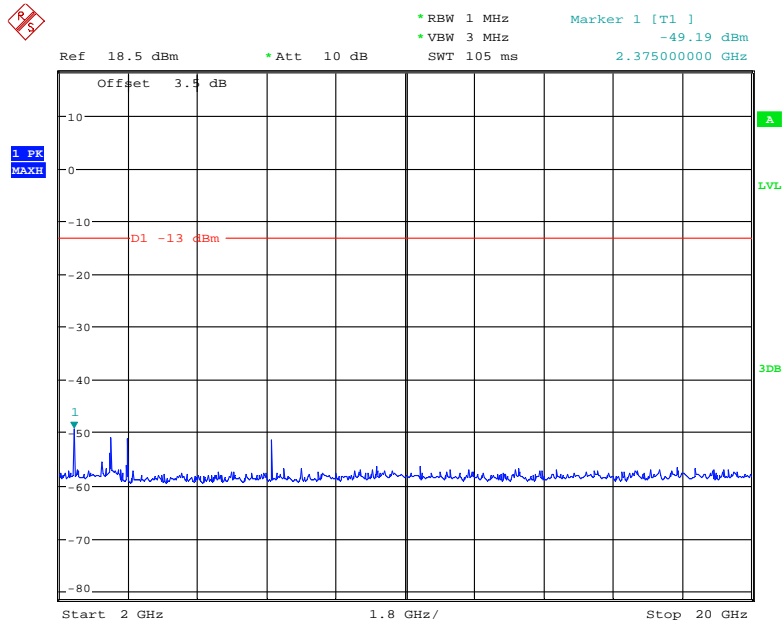

Date: 27.DEC.2018 15:01:23

**FCC § 2.1053; § 22.917 (a); § 24.238 (a) -SPURIOUS RADIATED EMISSIONS****Applicable Standard**

FCC § 2.1053, §22.917(a) and § 24.238(a).

**Test Procedure**

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the receiving antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = 10 lg (TX pwr in Watts/0.001) – the absolute level

Spurious attenuation limit in dB = 43 + 10 Log<sub>10</sub> (power out in Watts)

**Test Data****Environmental Conditions**

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	52 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Kiki Kong on 2018-12-20.*

*EUT operation mode: Transmitting*

Pre-scan with Low, Middle and High channel, the worst case as below:

**30 MHz ~ 10 GHz:**

**Cellular Band (Part 22H)**

Frequency (MHz)	Receiver Reading (dBµV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dBi)			
GSM Mode, Middle channel										
286.39	31.84	82	1.7	H	-65.2	0.34	0	-65.54	-13	52.54
286.39	30.75	141	1.2	V	-66.3	0.34	0	-66.64	-13	53.64
1673.20	69.01	141	1.4	H	-38.1	1.30	8.90	-30.50	-13	17.50
1673.20	70.57	285	1.5	V	-35.9	1.30	8.90	-28.30	-13	15.30
2509.80	62.20	217	2.4	H	-41.3	2.60	10.20	-33.70	-13	20.70
2509.80	58.88	56	1.9	V	-44.0	2.60	10.20	-36.40	-13	23.40
3346.40	48.82	246	1.6	H	-51.5	1.50	11.70	-41.30	-13	28.30
3346.40	45.91	44	1.9	V	-54.5	1.50	11.70	-44.30	-13	31.30
WCDMA Mode, Middle channel										
286.39	32.15	261	1.3	H	-64.9	0.34	0	-65.24	-13	52.24
286.39	31.42	205	1.7	V	-65.6	0.34	0	-65.94	-13	52.94
1673.20	49.44	71	1.2	H	-57.6	1.30	8.90	-50.00	-13	37.00
1673.20	52.81	147	1.8	V	-53.7	1.30	8.90	-46.10	-13	33.10
2509.80	51.07	98	1.6	H	-52.5	2.60	10.20	-44.90	-13	31.90
2509.80	48.03	216	2.2	V	-54.9	2.60	10.20	-47.30	-13	34.30
3346.40	43.85	105	2.4	H	-56.5	1.50	11.70	-46.30	-13	33.30
3346.40	43.53	305	2.1	V	-56.8	1.50	11.70	-46.60	-13	33.60

**30 MHz ~ 20 GHz:**

**PCS Band (Part 24E)**

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dBi)			
GSM Mode, Middle channel										
286.39	32.15	236	1.5	H	-64.9	0.34	0	-65.24	-13	52.24
286.39	31.14	96	2.4	V	-65.9	0.34	0	-66.24	-13	53.24
3760.00	44.21	181	1.5	H	-57.0	1.50	11.80	-46.70	-13	33.70
3760.00	43.18	68	1.3	V	-57.6	1.50	11.80	-47.30	-13	34.30
WCDMA Mode, Middle channel										
286.39	32.86	193	1.2	H	-64.1	0.34	0	-64.44	-13	51.44
286.39	31.91	128	1.5	V	-65.1	0.34	0	-65.44	-13	52.44
3760.00	44.09	316	2.2	H	-57.1	1.50	11.80	-46.80	-13	33.80
3760.00	43.26	279	1.4	V	-57.5	1.50	11.80	-47.20	-13	34.20

**Note:**

- 1) Absolute Level = Substituted Level - Cable loss + Antenna Gain
- 2) Margin = Limit - Absolute Level

**FCC § 22.917 (a); § 24.238 (a) - BAND EDGES**

**Applicable Standard**


According to § 22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

**Test Procedure**

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency

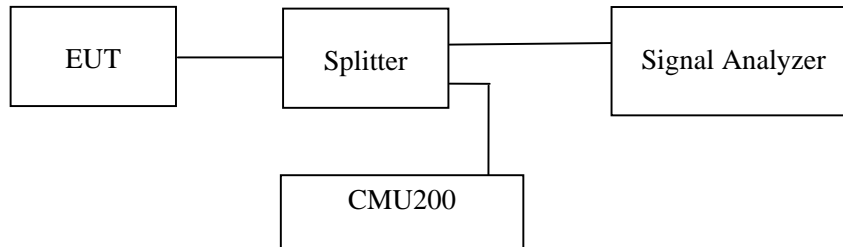

**Test Data**

**Environmental Conditions**

<b>Temperature:</b>	20~25 °C
<b>Relative Humidity:</b>	50~52 %
<b>ATM Pressure:</b>	100.0~101.0 kPa


*The testing was performed by Kiki Kong from 2018-12-20 to 2018-12-27.*

*EUT operation mode: Transmitting*

*Test Result: Compliance. Please refer to the following plots.*




### Cellular Band, Left Band Edge for GSM (GMSK) Mode

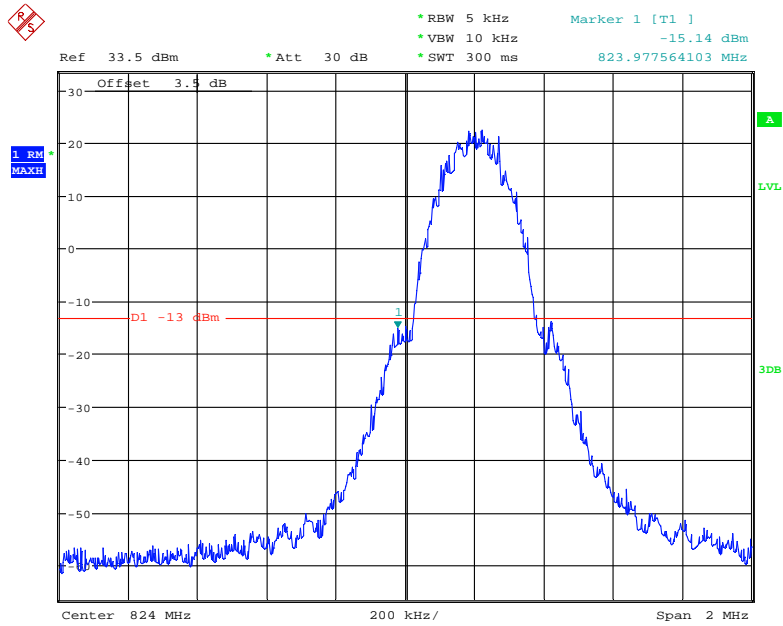


Date: 27.DEC.2018 14:21:56

### Cellular Band, Right Band Edge for GSM (GMSK) Mode

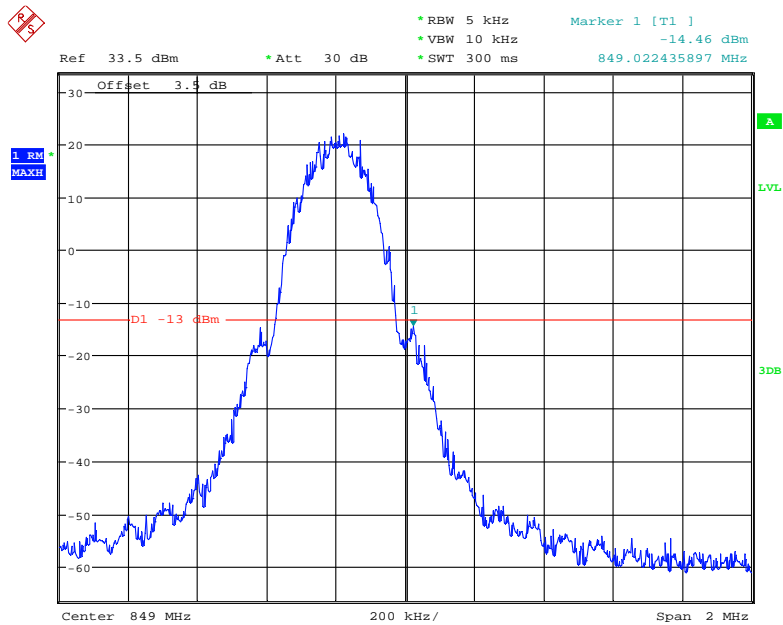


Date: 20.DEC.2018 08:18:48

### Cellular Band, Left Band Edge for EGPRS (GMSK) Mode

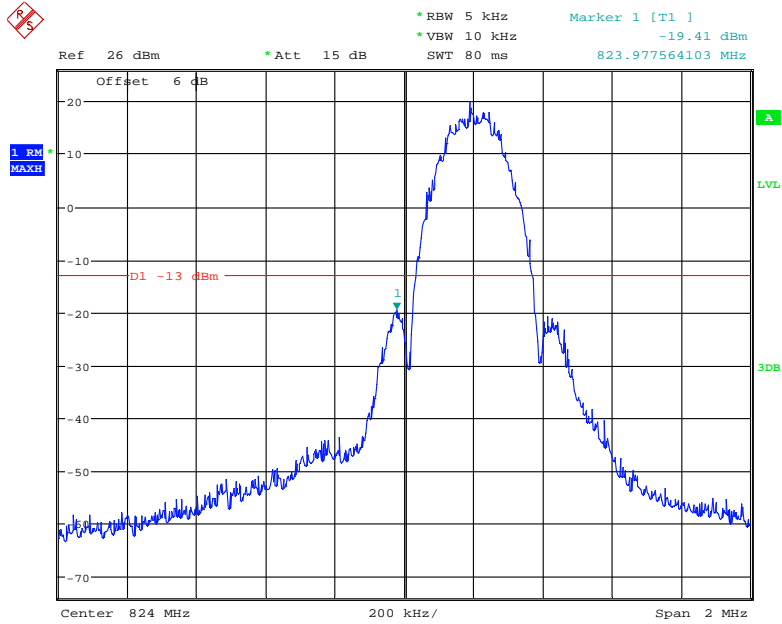


Date: 25.DEC.2018 12:38:31

### Cellular Band, Right Band Edge for EGPRS (GMSK) Mode

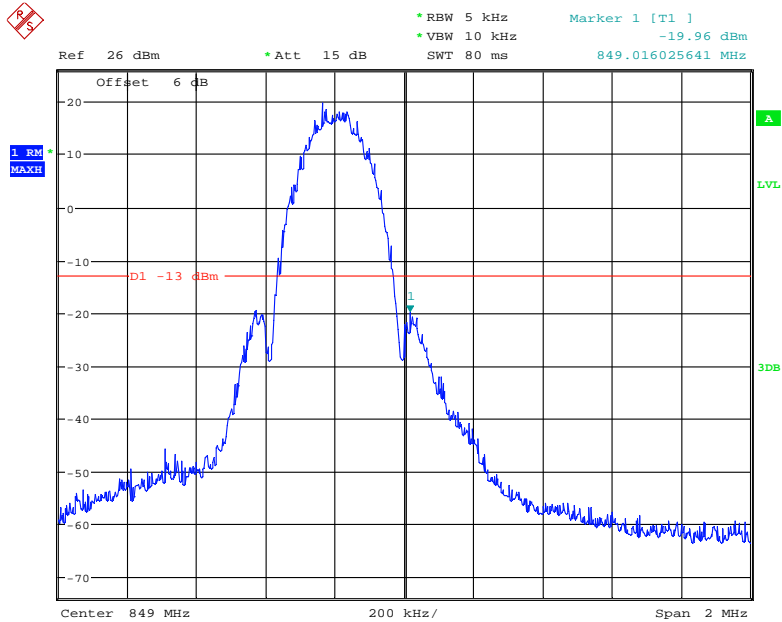


Date: 25.DEC.2018 12:40:21

### Cellular Band, Left Band Edge for WCDMA (BPSK) Mode

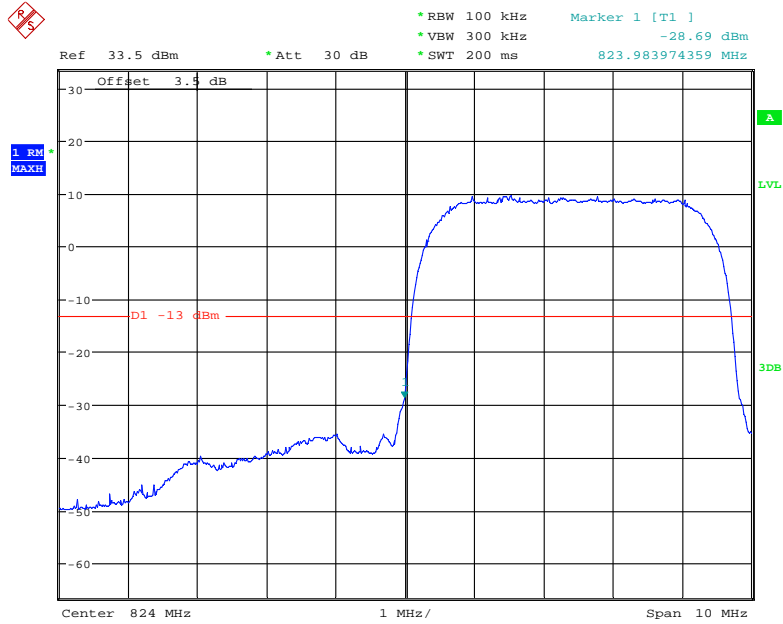


Date: 20.DEC.2018 10:26:06

### Cellular Band, Right Band Edge for WCDMA (BPSK) Mode

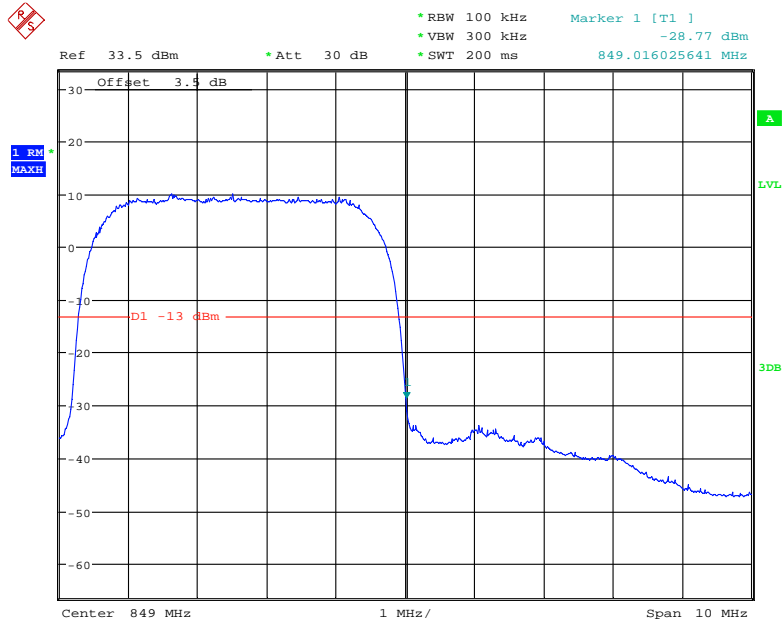


Date: 20.DEC.2018 10:26:54

### Cellular Band, Left Band Edge for HSDPA (16QAM) Mode

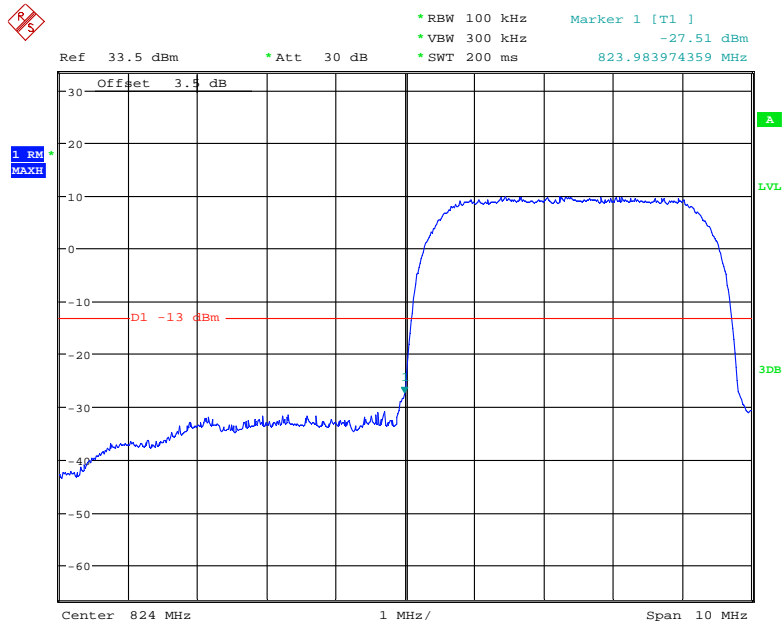


Date: 20.DEC.2018 10:32:31

### Cellular Band, Right Band Edge for HSDPA (16QAM) Mode

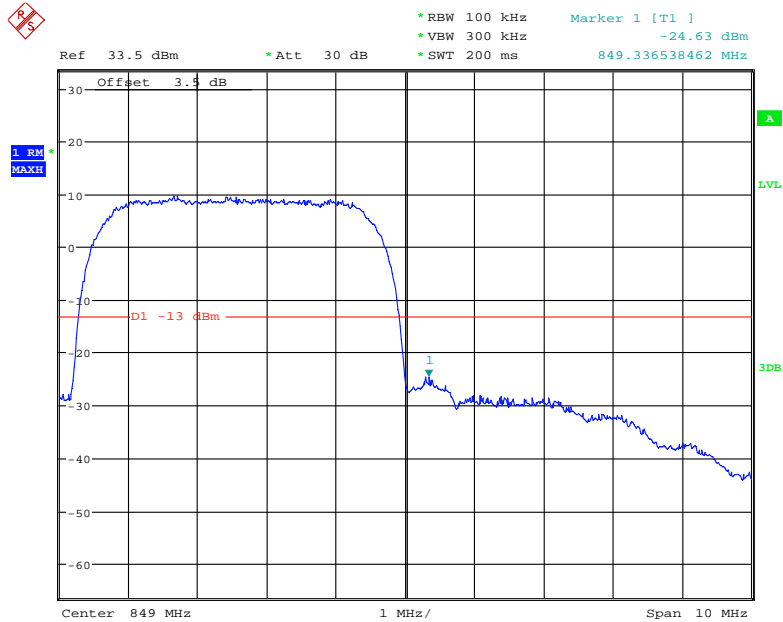


Date: 20.DEC.2018 10:33:09

### Cellular Band, Left Band Edge for HSUPA (BPSK) Mode

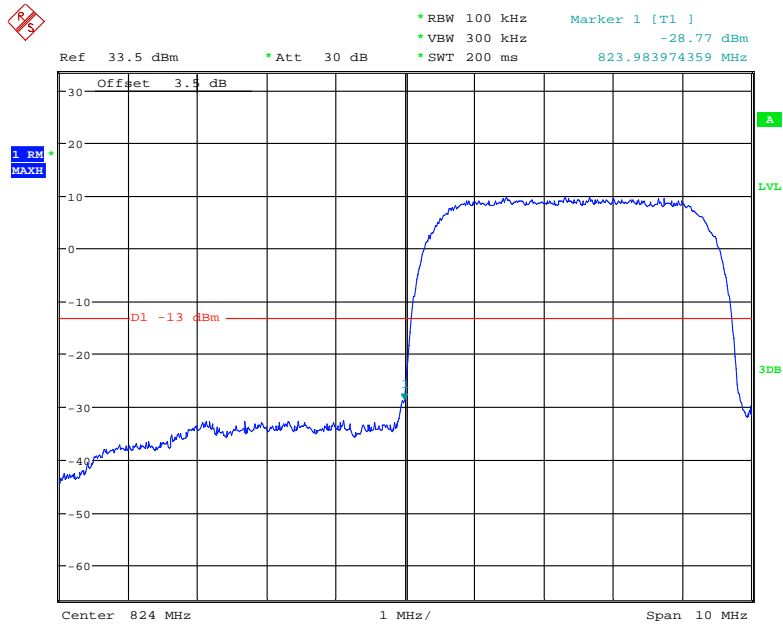


Date: 20.DEC.2018 10:31:18

### Cellular Band, Right Band Edge for HSUPA (BPSK) Mode

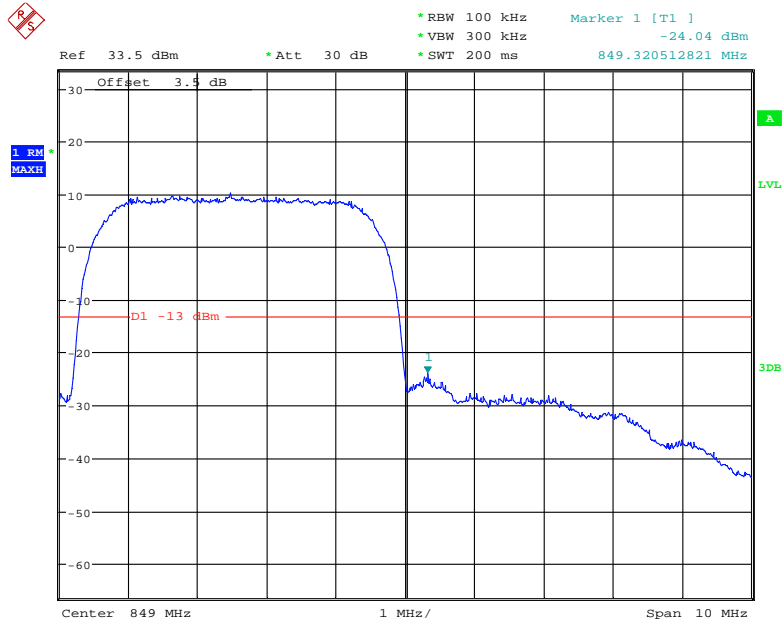


Date: 20.DEC.2018 10:30:21

### PCS Band, Left Band Edge for GSM (GMSK) Mode

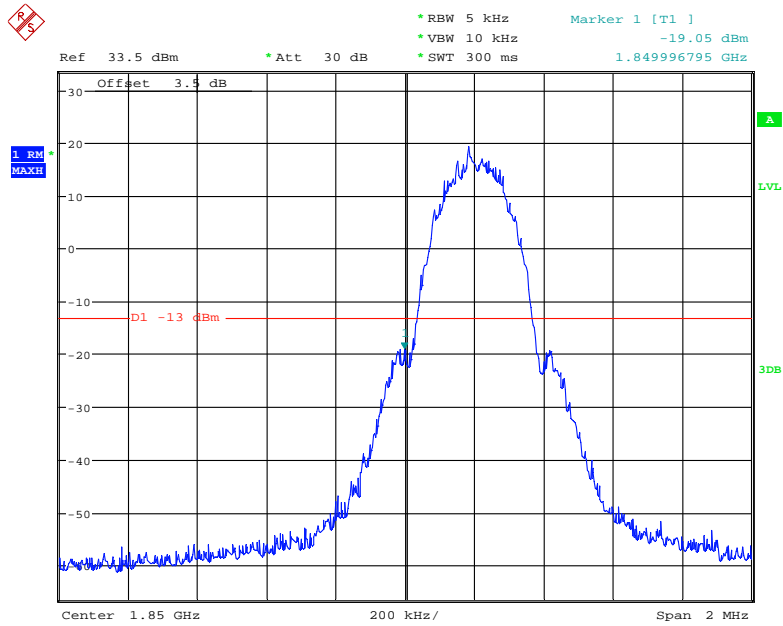


Date: 20.DEC.2018 08:37:43

### PCS Band, Right Band Edge for GSM (GMSK) Mode

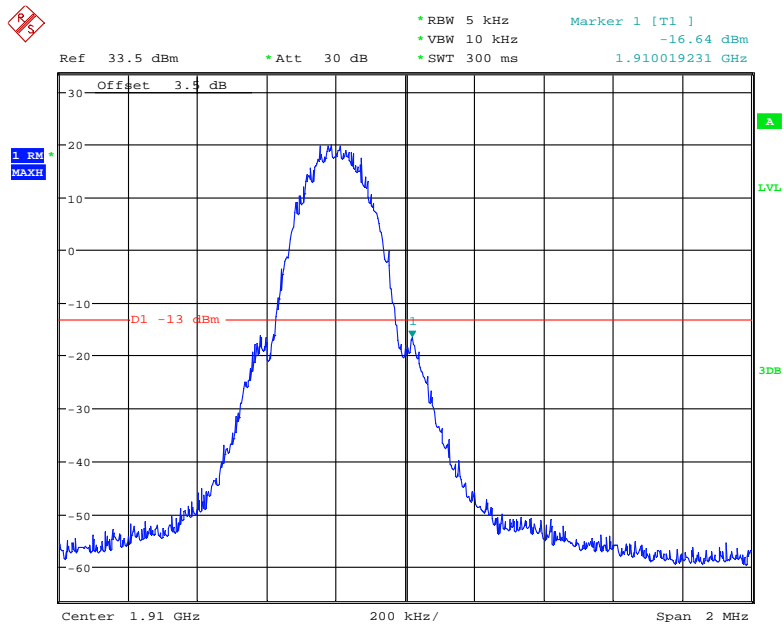


Date: 20.DEC.2018 08:39:37

### PCS Band, Left Band Edge for EGPRS (GMSK) Mode

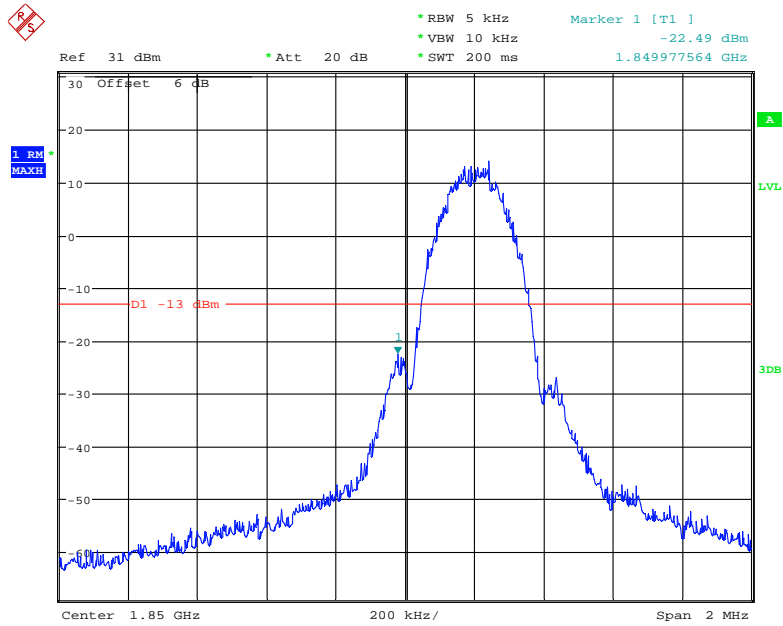


Date: 25.DEC.2018 13:01:20

### PCS Band, Right Band Edge for EGPRS (GMSK) Mode

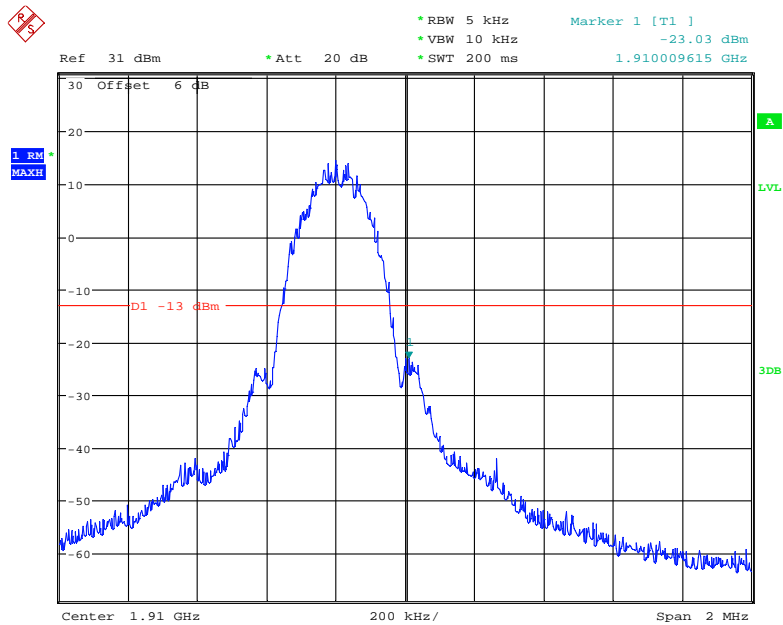


Date: 25.DEC.2018 13:02:39

### PCS Band, Left Band Edge for WCDMA (BPSK) Mode

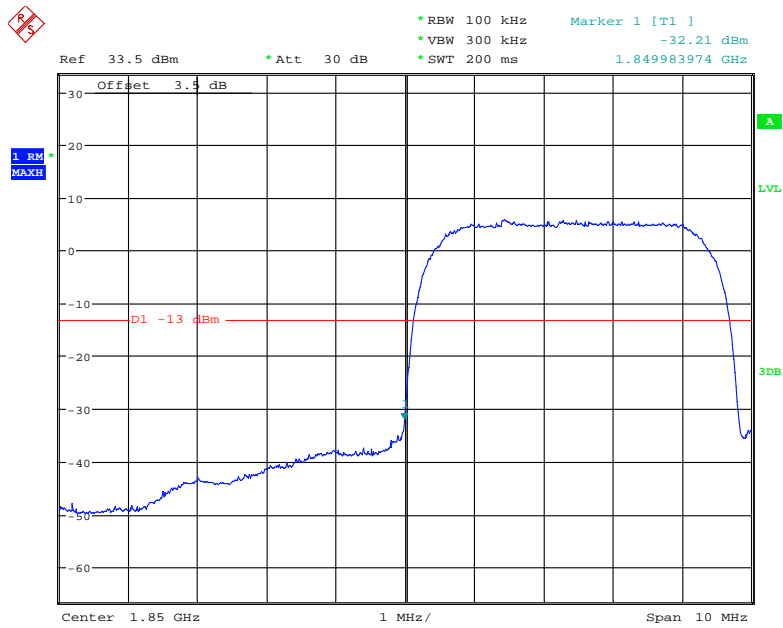

Date: 20.DEC.2018 09:45:26


### PCS Band, Right Band Edge for WCDMA (BPSK) Mode

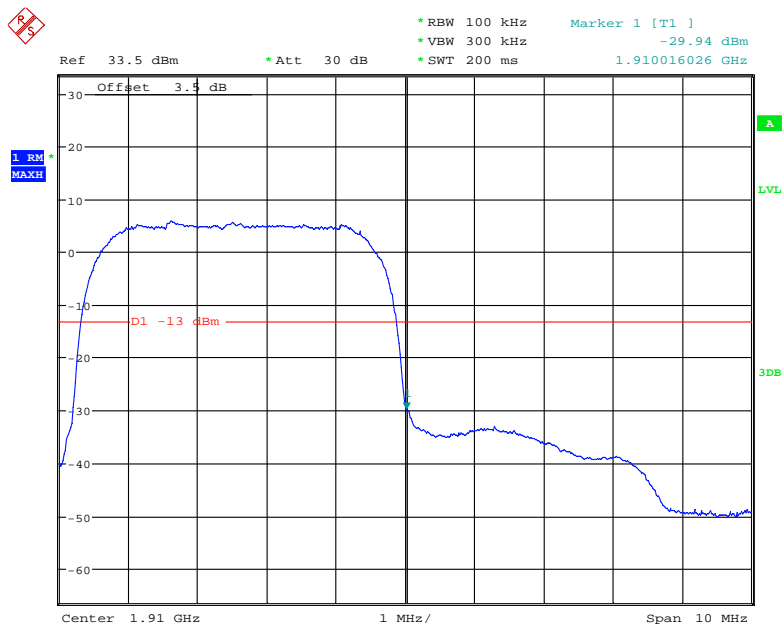

Date: 20.DEC.2018 09:50:00




### PCS Band, Left Band Edge for HSDPA (16QAM) Mode

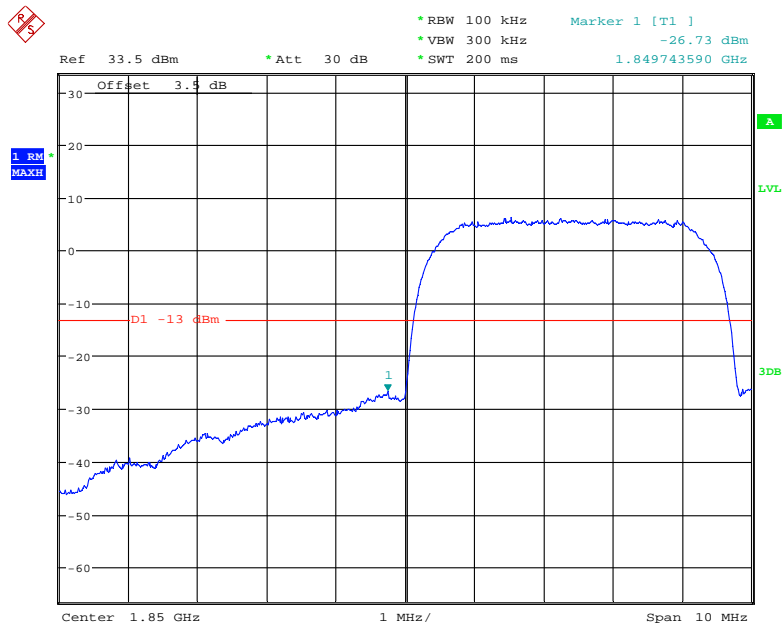


Date: 20.DEC.2018 09:55:18

### PCS Band, Right Band Edge for HSDPA (16QAM) Mode

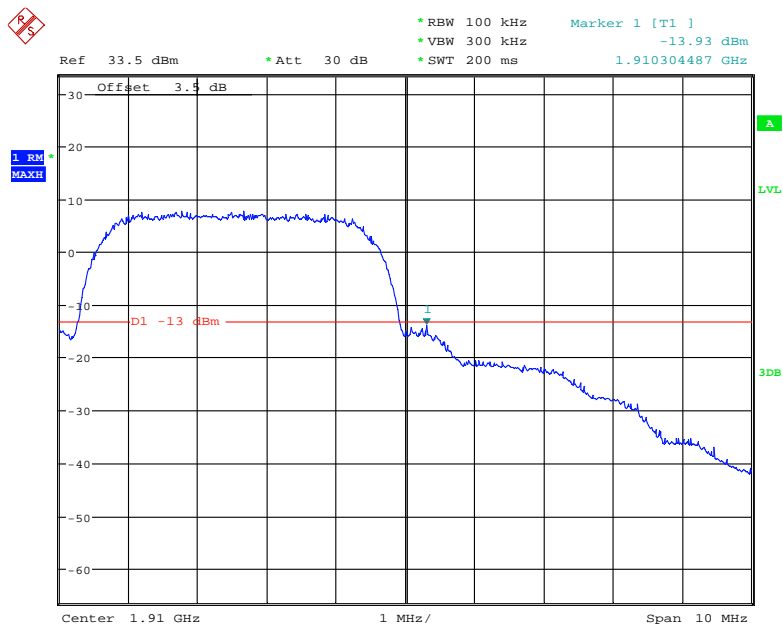


Date: 20.DEC.2018 09:58:41

### PCS Band, Left Band Edge for HSUPA (BPSK) Mode

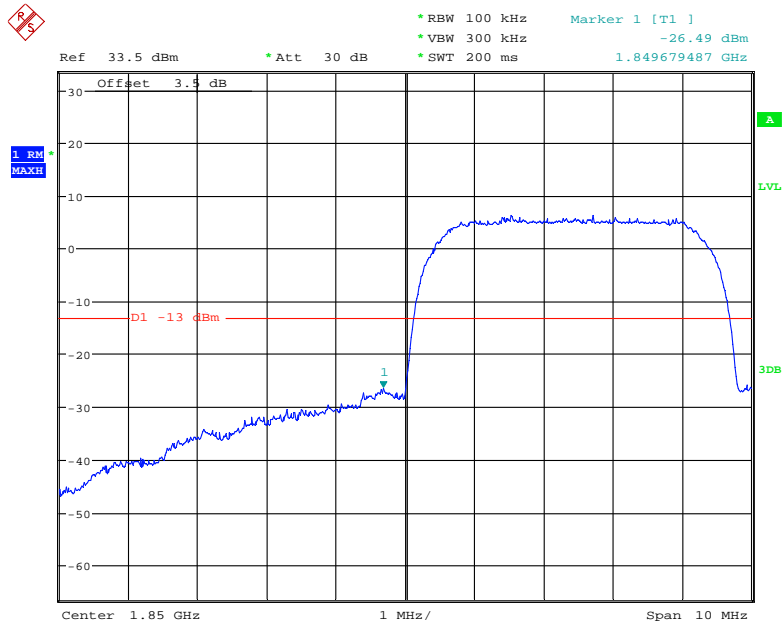

### PCS Band, Right Band Edge for HSUPA (BPSK) Mode

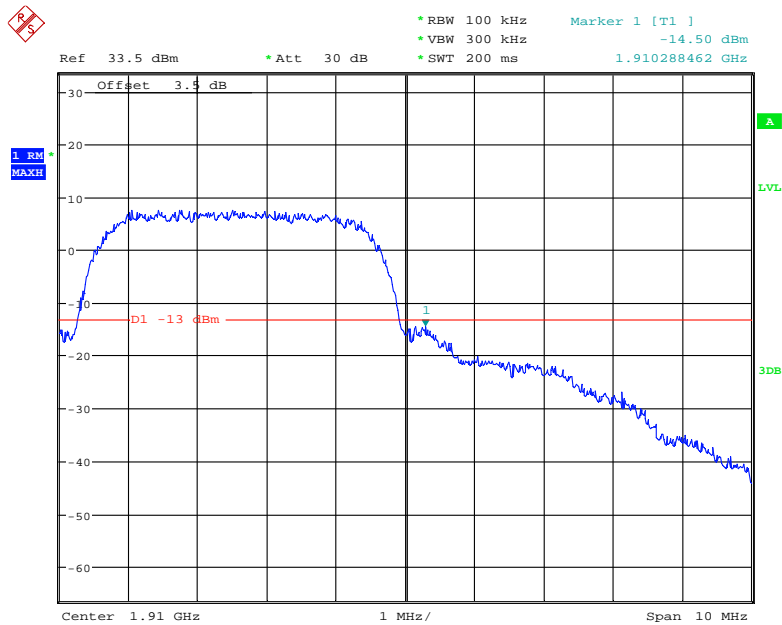

**FCC § 2.1055; § 22.355; § 24.235 - FREQUENCY STABILITY**

**Applicable Standard**

FCC § 2.1055, §22.355 and §24.235.

According to FCC §2.1055, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency Range (MHz)	Base, fixed (ppm)	Mobile ≤ 3 watts (ppm)	Mobile > 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929.	5.0	N/A	N/A
929 to 960.	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A


According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

**Test Procedure**

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: For hand carried, battery powered equipment; reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

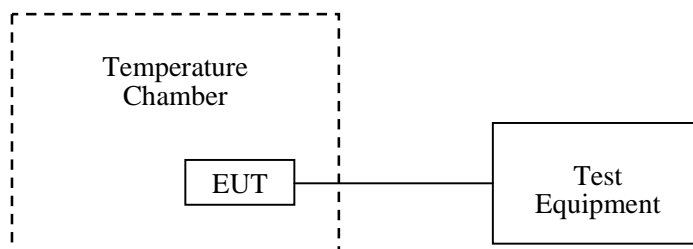

**Test Data**

**Environmental Conditions**

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	52 %
<b>ATM Pressure:</b>	101.0 kPa

The testing was performed by Kiki Kong on 2018-12-20.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to the following tables.

**Cellular Band (Part 22H)**

**GSM Mode**

Middle Channel, $f_0=836.6\text{MHz}$				
Temperature (°C)	Power Supplied (V <sub>DC</sub> )	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.8	-35	-0.04184	2.5
-20		-36	-0.04303	2.5
-10		-38	-0.04542	2.5
0		-34	-0.04064	2.5
10		-36	-0.04303	2.5
20		-38	-0.04542	2.5
30		-39	-0.04662	2.5
40		-35	-0.04184	2.5
50		-35	-0.04184	2.5
20		V min.= 3.6	-32	-0.03825
20	V max.= 4.2	-33	-0.03945	2.5

**EDGE Mode**

Middle Channel, $f_0=836.6\text{MHz}$				
Temperature (°C)	Power Supplied (V <sub>DC</sub> )	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.8	-4	-0.00478	2.5
-20		-7	-0.00837	2.5
-10		-6	-0.00717	2.5
0		-8	-0.00956	2.5
10		-6	-0.00717	2.5
20		-4	-0.00478	2.5
30		-6	-0.00717	2.5
40		-7	-0.00837	2.5
50		-3	-0.00359	2.5
20		V min.= 3.6	-4	-0.00478
20	V max.= 4.2	-3	-0.00359	2.5

**WCDMA Mode**

Middle Channel, $f_0=836.6\text{MHz}$				
Temperature (°C)	Power Supplied (V <sub>DC</sub> )	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.8	-5	-0.005977	2.5
-20		5	0.005977	2.5
-10		-2	-0.002391	2.5
0		-1	-0.001195	2.5
10		2	0.002391	2.5
20		4	0.004781	2.5
30		9	0.010758	2.5
40		6	0.007172	2.5
50		3	0.003586	2.5
20		V min.= 3.6	-7	-0.008367
20	V max.= 4.2	-4	-0.004781	2.5

**PCS Band (Part 24E)**

**GSM Mode**

Middle Channel, $f_0 = 1880.0$ MHz				
Temperature (°C)	Power Supplied (V <sub>DC</sub> )	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.8	-11	-0.00585	pass
-20		-13	-0.00691	pass
-10		-13	-0.00691	pass
0		-12	-0.00638	pass
10		-12	-0.00638	pass
20		-14	-0.00745	pass
30		-14	-0.00745	pass
40		-14	-0.00745	pass
50		-16	-0.00851	pass
20		V min.= 3.6	-11	-0.00585
20	V max.= 4.2	-10	-0.00532	pass

**EGPRS Mode**

Middle Channel, $f_0 = 1880.0$ MHz				
Temperature (°C)	Power Supplied (V <sub>DC</sub> )	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.8	20	0.01064	pass
-20		18	0.00957	pass
-10		18	0.00957	pass
0		20	0.01064	pass
10		19	0.01011	pass
20		21	0.01117	pass
30		21	0.01117	pass
40		24	0.01277	pass
50		22	0.01170	pass
20		V min.= 3.6	23	0.01223
20	V max.= 4.2	24	0.01277	pass

**WCDMA Mode**

<b>Middle Channel, <math>f_0 = 1880.0</math> MHz</b>				
<b>Temperature (°C)</b>	<b>Power Supplied (V<sub>DC</sub>)</b>	<b>Frequency Error (Hz)</b>	<b>Frequency Error (ppm)</b>	<b>Result</b>
-30	3.8	-9	-0.004787	pass
-20		-2	-0.001064	pass
-10		2	0.001064	pass
0		8	0.004255	pass
10		3	0.001596	pass
20		5	0.002660	pass
30		-1	-0.000532	pass
40		-3	-0.001596	pass
50		1	0.000532	pass
20	V min.= 3.6	-6	-0.003191	pass
20	V max.= 4.2	4	0.002128	pass

**\*\*\*\*\* END OF REPORT \*\*\*\*\***