

January 27, 2021

OnAsset Intelligence
8407 Sterling Street
Irving, TX 75063

Dear Mr. Shawn Key,

Enclosed is the EMC Wireless test report for compliance testing of the OnAsset Intelligence, Sentinel 100C as tested to the requirements of Title 47 of the CFR, Ch. 1 (10-1-06 ed.), Part 15 Subpart C for Intentional Radiators.

Thank you for using the services of Eurofins E&E North America. If you have any questions regarding these results or if we can be of further service to you, please feel free to contact me.

Sincerely yours,
EUROFINS E&E NORTH AMERICA



Michelle Tawmging
Documentation Department

Reference: (\OnAsset Intelligence\EMCA109879-FCC247 Rev. 1)

Certificates and reports shall not be reproduced except in full, without the written permission of Eurofins E&E North America. This letter of transmittal is not a part of the attached report.

Eurofins MET Laboratories Inc. (Eurofins E&E North America) is part of the Eurofins Electrical & Electronics (E&E) global compliance network.

Electromagnetic Compatibility Criteria Test Report

for the

**OnAsset Intelligence
Sentinel 100C**

Tested under
the FCC Certification Rules
contained in
15.247 Subpart C for Intentional Radiators

Report: EMCA109879-FCC247 Rev. 1

January 27, 2021

Prepared For:

**OnAsset Intelligence
8407 Sterling Street
Irving, TX 75063**

Prepared By:
Eurofins E&E North America
13501 McCallen Pass,
Austin, TX 78753

Electromagnetic Compatibility Criteria Test Report

for the

**OnAsset Intelligence
Sentinel 100C**

Tested under
the FCC Certification Rules
contained in
15.247 Subpart C for Intentional Radiators

Report: EMCA109879-FCC247 Rev. 1



Adan Arab, Project Engineer
Electromagnetic Compatibility Lab



Michelle Tawmging
Documentation Department

Engineering Statement: The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules Part 15.247 under normal use and maintenance.



Jonathan Tavira,
Manager, Electromagnetic Compatibility Lab

Report Status Sheet

Revision	Report Date	Reason for Revision
∅	November 23, 2020	Initial Issue.
1	January 27, 2021	Implemented TCB-Requested Revisions

Table of Contents

I.	Executive Summary	1
	A. Purpose of Test.....	2
	B. Executive Summary	2
II.	Equipment Configuration.....	3
	A. Overview.....	4
	B. References.....	4
	C. Test Site.....	5
	D. Measurement Uncertainty	5
	E. Description of Test Sample	5
	F. Equipment Configuration.....	5
	G. Support Equipment.....	6
	H. Ports and Cabling Information	6
	I. Mode of Operation	6
	J. Method of Monitoring EUT Operation	6
	K. Modifications	6
	a) Modifications to EUT	6
	b) Modifications to Test Standard.....	6
	L. Disposition of EUT	6
III.	Electromagnetic Compatibility Criteria for Intentional Radiators	7
	§ 15.203 Antenna Requirement	8
	RSS-247 (6.2.4.1) Duty Cycle	9
	§ 15.207(a) Conducted Emissions Limits	10
	§ 15.247(a)(a) 6 dB and 99% Bandwidth	11
	§ 15.247(b) Peak Power Output.....	14
	§ 15.247(d) Radiated Spurious Emissions Requirements and Band Edge.....	17
	§ 15.247(c) Spurious Emissions in Non-restricted Bands	41
	§ 15.247(e) Peak Power Spectral Density.....	46
	§ 15.247(i) Maximum Permissible Exposure	49
IV.	Test Equipment	50
V.	Certification & User’s Manual Information	52
	A. Certification Information.....	53
	B. Label and User’s Manual Information	57

List of Figures

Figure 1: Executive Summary of EMC Part 15.247 Compliance Testing	2
Figure 2: EUT Summary Table	4
Figure 3: References	4
Figure 4: Uncertainty Calculations Summary	5
Figure 5: Block Diagram of Test Configuration	5
Figure 6: Equipment Configuration	5
Figure 7: Support Equipment	6
Figure 8: Ports and Cabling Information	6
Figure 9: Duty Cycle - 100%	9
Figure 10: 6 dB Occupied Bandwidth, Test Results	11
Figure 11: Block Diagram, Occupied Bandwidth Test Setup	11
Figure 12: 6 dB Occupied Bandwidth - 2402 - 741.635 KHz	12
Figure 13: 6 dB Occupied Bandwidth - 2440 - 741.847 KHz	12
Figure 14: 6 dB Occupied Bandwidth - 2480 - 744.308 KHz	13
Figure 15: Output Power Requirements from §15.247(b)	14
Figure 16: Power Output Test Setup	14
Figure 17: Peak Power Output, Test Results	14
Figure 18: Peak Power Output - 2402 MHz - 11.80 dBm	15
Figure 19: Peak Power Output - 2440 MHz - 18.40 dBm	15
Figure 20: Peak Power Output - 2480 MHz - 12.35 dBm	16
Figure 21: Restricted Bands of Operation	17
Figure 22: Radiated Emissions Limits Calculated from FCC Part 15, § 15.209 (a)	17
Figure 23: Radiated Emissions Test Setup	18
Figure 24: Radiated Spurious Emissions - 2402 MHz - 30MHz-1000MHz – Peak - Horizontal	19
Figure 25: Radiated Spurious Emissions - 2402 MHz - 30MHz-1000MHz -Peak - Vertical	19
Figure 26: Radiated Spurious Emissions, 2402 MHz – 30-1000 MHz, Quasi-Peak Data	20
Figure 27: Radiated Spurious Emissions - 2402 MHz - 1-18GHz - Average - Horizontal	20
Figure 28: Radiated Spurious Emissions - 2402 MHz - 1-18GHz - Average - Vertical	21
Figure 29: Radiated Spurious Emissions - 2402 MHz - 1-18GHz - Peak - Horizontal	21
Figure 30: Radiated Spurious Emissions - 2402 MHz - 1-18GHz - Peak - Vertical	22
Figure 31: Radiated Spurious Emissions - 2402 MHz - 18-25 GHz - Average - Horizontal	22
Figure 32: Radiated Spurious Emissions - 2402 MHz - 18-25 GHz - Average - Vertical	23
Figure 33: Radiated Spurious Emissions - 2402 MHz - 18-25 GHz - Peak - Horizontal	23
Figure 34: Radiated Spurious Emissions - 2402 MHz - 18-25 GHz - Peak - Vertical	24
Figure 35: Radiated Spurious Emissions - 2440 MHz - 30MHz-1000MHz – Peak - Horizontal	24
Figure 36: Radiated Spurious Emissions - 2440 MHz - 30MHz-1000MHz – Peak - Vertical	25
Figure 37: Radiated Spurious Emissions, 2440 MHz - 30-1000 MHz, Quasi- Peak Data	25
Figure 38: Radiated Spurious Emissions - 2440 MHz - 1-18GHz - Average - Horizontal	26
Figure 39: Radiated Spurious Emissions - 2440 MHz - 1-18GHz - Average - Vertical	26
Figure 40: Radiated Spurious Emissions - 2440 MHz - 1-18GHz - Peak - Horizontal	27
Figure 41: Radiated Spurious Emissions - 2440 MHz - 1-18GHz - Peak - Vertical	27
Figure 42: Radiated Spurious Emissions - 2440 MHz - 18-25 GHz - Average - Horizontal	28
Figure 43: Radiated Spurious Emissions - 2440 MHz - 18-25 GHz - Average - Vertical	28
Figure 44: Radiated Spurious Emissions - 2440 MHz - 18-25 GHz - Peak - Horizontal	29
Figure 45: Radiated Spurious Emissions - 2440 MHz - 18-25 GHz - Peak - Vertical	29
Figure 46: Radiated Spurious Emissions - 2480 MHz - 30MHz-1000MHz – Peak - Horizontal	30
Figure 47: Radiated Spurious Emissions - 2480 MHz - 30MHz-1000MHz - Peak - Vertical	30
Figure 48: Radiated Spurious Emissions, 2480 MHz - 30-1000 MHz, Quasi-Peak Data	31
Figure 49: Radiated Spurious Emissions - 2480 MHz - 1-18GHz - Average - Horizontal	31
Figure 50: Radiated Spurious Emissions - 2480 MHz - 1-18GHz - Average - Vertical	32
Figure 51: Radiated Spurious Emissions - 2480 MHz - 1-18GHz - Peak - Horizontal	32

Figure 52: Radiated Spurious Emissions - 2480 MHz - 1-18GHz - Peak - Vertical.	33
Figure 53: Radiated Spurious Emissions - 2480 MHz - 18-25 GHz - Average - Horizontal.....	33
Figure 54: Radiated Spurious Emissions - 2480 MHz - 18-25 GHz - Average - Vertical.....	34
Figure 55: Radiated Spurious Emissions - 2480 MHz - 18-25 GHz - Peak - Horizontal.	34
Figure 56: Radiated Spurious Emissions - 2480 MHz - 18-25 GHz - Peak - Vertical.	35
Figure 57: Radiated Bandedge - 2402 MHz - Average - Horizontal.	36
Figure 58: Radiated Bandedge - 2402 MHz - Average - Vertical.	37
Figure 59: Radiated Bandedge - 2402 MHz - Peak - Horizontal.	37
Figure 60: Radiated Bandedge - 2402 MHz - Peak - Vertical.	38
Figure 61: Radiated Bandedge - 2480 MHz - Average - Horizontal.	38
Figure 62: Radiated Bandedge - 2480 MHz - Average - Vertical.	39
Figure 63: Radiated Bandedge - 2480 MHz - Peak - Horizontal.	39
Figure 64: Radiated Bandedge - 2480 MHz - Peak - Vertical.	40
Figure 74: Conducted Spurious Emissions - 2402 MHz - 1GHz-25GHz.....	42
Figure 75: Conducted Spurious Emissions - 2402 MHz - 30MHz-10000MHz.....	42
Figure 76: Conducted Spurious Emissions - 2440 MHz - 1GHz-25GHz.....	43
Figure 77: Conducted Spurious Emissions - 2440 MHz - 30MHz-1000MHz.....	43
Figure 78: Conducted Spurious Emissions - 2480 MHz - 1GHz-25GHz.....	44
Figure 79: Conducted Spurious Emissions - 2480 MHz - 30MHz-10000MHz.....	44
Figure 80: Lower Conducted Bandedge - 2402 MHz.....	45
Figure 81: Upper Conducted Bandedge - 2480 MHz.....	45
Figure 83: Block Diagram, Power Spectral Density Test Setup.....	46
Figure 84: Peak Power Spectral Density, Test Results.....	46
Figure 85: Peak Power Spectral Density - 2402 MHz - 1.29 dBm.....	47
Figure 86: Peak Power Spectral Density - 2440 MHz - 7.775 dBm.....	47
Figure 87: Peak Power Spectral Density - 2480 MHz - 1.675 dBm.....	48
Figure 88: Test Equipment List.....	51

List of Terms and Abbreviations

AC	Alternating Current
ACF	Antenna Correction Factor
Cal	Calibration
<i>d</i>	Measurement Distance
dB	Decibels
dBμA	Decibels above one microamp
dBμV	Decibels above one microvolt
dBμA/m	Decibels above one microamp per meter
dBμV/m	Decibels above one microvolt per meter
DC	Direct Current
E	Electric Field
DSL	Digital Subscriber Line
ESD	Electrostatic Discharge
EUT	Equipment Under Test
<i>f</i>	Frequency
FCC	Federal Communications Commission
GRP	Ground Reference Plane
H	Magnetic Field
HCP	Horizontal Coupling Plane
Hz	Hertz
IEC	International Electrotechnical Commission
kHz	kilohertz
kPa	kilopascal
kV	kilovolt
LISN	Line Impedance Stabilization Network
MHz	Megahertz
μH	microhenry
μ	microfarad
μs	microseconds
NEBS	Network Equipment-Building System
PRF	Pulse Repetition Frequency
RF	Radio Frequency
RMS	Root-Mean-Square
TWT	Traveling Wave Tube
V/m	Volts per meter
VCP	Vertical Coupling Plane

Executive Summary

A. Purpose of Test

An EMC evaluation was performed to determine compliance of the OnAsset Intelligence Sentinel 100C, with the requirements of Part 15, §15.247. All references are to the most current version of Title 47 of the Code of Federal Regulations in effect. In accordance with §2.1033, the following data is presented in support of the Certification of the Sentinel 100C. OnAsset Intelligence should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the Sentinel 100C, has been **permanently** discontinued.

B. Executive Summary

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, §15.247, in accordance with OnAsset Intelligence, purchase order number 6016. All tests were conducted using measurement procedure ANSI C63.4-2014.

FCC Reference 47 CFR Part 15.247:2020	Description	Compliance
Title 47 of the CFR, Part 15 §15.203	Antenna Requirement	Compliant
Title 47 of the CFR, Part 15 §15.207(a)	Conducted Emission Limits	Not Tested/Evaluated at MET
Title 47 of the CFR, Part 15 §15.247(a)(2)	6dB Occupied Bandwidth	Compliant
Title 47 of the CFR, Part 15 §15.247(b)	Peak Power Output	Compliant
Title 47 of the CFR, Part 15 §15.247(d)	Spurious Emissions in Non-restricted Bands	Compliant
Title 47 of the CFR, Part 15 §15.247(d); §15.209; §15.205	Radiated Spurious Emissions Requirements	Compliant
Title 47 of the CFR, Part 15; §15.247(e)	Peak Power Spectral Density	Compliant
Title 47 of the CFR, Part 15 §15.247(i)	Maximum Permissible Exposure (MPE)	Compliant

Figure 1: Executive Summary of EMC Part 15.247 Compliance Testing

Equipment Configuration

A. Overview

Eurofins MET Laboratories, Inc. was contracted by OnAsset Intelligence to perform testing on the Sentinel 100C, under OnAsset Intelligence’s purchase order number 6016.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the OnAsset Intelligence, Sentinel 100C.

The results obtained relate only to the item(s) tested.

Model(s) Tested:	Sentinel 100C	
Model(s) Covered:	Sentinel 100C	
EUT Specifications:	Primary Power:5 VDC	
	FCC ID: 2ARLF-100C	
	Type of Modulations:	GFSK
	Equipment Code:	DTS
	Peak RF Output Power:	18.40 dBm
	EUT Frequency Ranges:	2402 MHz to 2480 MHz
	Channels:	40
	Data Rates:	1 Mbps
	Antenna Type:	Built-In PCB Etched F-type
	Antenna Gain:	-3.0 dBi
	Power setting as tested:	+19 dBm
Firmware Version:	Functional Test Mode 1.0	
Analysis:	The results obtained relate only to the item(s) tested.	
Environmental Test Conditions:	Temperature: 15-35° C	
	Relative Humidity: 30-60%	
	Barometric Pressure: 860-1060 mbar	
Evaluated by:	Adan Arab	
Report Date(s):	January 27, 2021	

Figure 2: EUT Summary Table

B. References

CFR 47, Part 15, Subpart C	Federal Communication Commission, Code of Federal Regulations, Title 47, Part 15: General Rules and Regulations, Allocation, Assignment, and Use of Radio Frequencies
ANSI C63.4:2014	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz
ISO/IEC 17025:2017	General Requirements for the Competence of Testing and Calibration Laboratories
ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
KDB 558074 D01 v05r02	Guidance for Performing Compliance Measurements On Digital Transmission Systems (DTS) Operating Under Section 15.247

Figure 3: References

C. Test Site

All testing was performed at Eurofins MET Laboratories, Inc., 13501 McCallen Pass, Austin, TX 78753. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a 10 meter semi-anechoic chamber (equivalent to an Open Area Test Site). In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories.

D. Measurement Uncertainty

Test Method	Typical Expanded Uncertainty	K	Confidence Level
RF Frequencies	±4.52 Hz	2	95%
RF Power Conducted Spurious Emissions	±2.25 dB	2	95%
RF Power Radiated Emissions	±3.01 dB	2	95%

Figure 4: Uncertainty Calculations Summary

E. Description of Test Sample

The OnAsset Intelligence Sentinel 100C, Equipment Under Test (EUT), acts as a wireless sensor to enable the collection of sensor data from multiple areas within or around your shipment. The Sentinel 100C can independently log any of its sensor data and automatically offload the logs as soon as a SENTRY 500 or mobile device is within range – no manual processes required. The Sentinel 100C supports 1 or 2 external cryogenic probes.

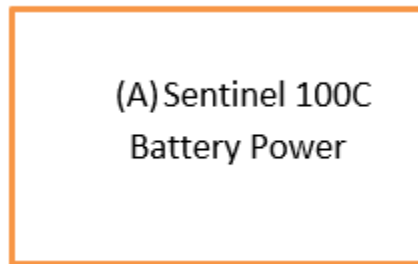


Figure 5: Block Diagram of Test Configuration

F. Equipment Configuration

The EUT was set up as outlined in Figure 5, Block Diagram of Test Setup. All cards, racks, etc., incorporated as part of the EUT is included in the following list.

Ref.ID	Slot#	Name/Description	Model Number	Part Number	Serial Number	Rev. #
A	-	Sentinel 100C	Sentinel 100C	-	-	1

Figure 6: Equipment Configuration

G. Support Equipment

Support equipment necessary for the operation and testing of the EUT is included in the following list.

Ref.ID	Name/Description	Manufacturer	Model Number
1	Sentinel 100C	OnAsset Intelligence, Inc.	Sentinel 100C
2	AC/DC WALL MOUNT ADAPTER 5V 5W	HDP Power	HDP-QB-WUSB-B
3	USB Cables / IEEE 1394 Cables	Qualtek	3025013-06
4	PC	Dell	N/A
5	Silicon Laboratories demo kit	Silicon Labs	N/A

Figure 7: Support Equipment

H. Ports and Cabling Information

Ref.ID	Port Name on EUT	Cable Desc. or reason for none	QTY	Length as tested (m)	Max Length (m)	Shielded?	Termination Box ID & Port Name
1	USB Cable	USB Cables / IEEE 1394 Cables	1	2 meters	6 meters	Yes	(1) USB Cable

Figure 8: Ports and Cabling Information

I. Mode of Operation

Sentinel 100C EUT is battery powered and transmits BLE advertisements every 300 ms. The advertisement includes a sequence counter that is monitored by a Sentinel 100S receiver. The Sentinel 100S Receiver analyzes the messages and calculates the packet error rate and prints a report to the terminal. Sentinel 100S EUT is USB powered and transmits BLE advertisements every 300 ms. The advertisement includes a sequence counter that is monitored by a Sentinel 100S receiver. The Sentinel 100S Receiver analyzes the messages and calculates the packet error rate and prints a report to the terminal.

EUT Software (Internal to EUT): 1.0 (all EUT models)

J. Method of Monitoring EUT Operation

Silicon Laboratories demo kit and Simplicity Commander Software are used to flash the EUT with modulated and un-modulated hex files which tunes the EUT into the desired mode (modulated and un-modulated) and operating test frequency of test (Low 2402 MHz, Mid 2440 MHz and 2480 MHz).

K. Modifications

a) Modifications to EUT

No modifications were made to the EUT.

b) Modifications to Test Standard

No modifications were made to the test standard.

L. Disposition of EUT

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to OnAsset Intelligence upon completion of testing.

Electromagnetic Compatibility Criteria for Intentional Radiators

Electromagnetic Compatibility Criteria for Intentional Radiators**§ 15.203 Antenna Requirement**

Test Requirement: § 15.203: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The structure and application of the EUT were analyzed to determine compliance with Section 15.203 of the Rules. Section 15.203 states that the subject device must meet at least one of the following criteria:

- a.) Antenna must be permanently attached to the unit.
- b.) Antenna must use a unique type of connector to attach to the EUT.
- c.) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

Results: The EUT as tested is compliant to the criteria of §15.203. The Sentinel 100C Sensor uses a PCB etched F-Type antenna of antenna gain -3 dBi, that is permanently attached. The Sentinel 100C satisfies all requirements in 15.203.

Test Engineer(s): Adan Arab

Test Date(s): October 26, 2020

Electromagnetic Compatibility Criteria for Intentional Radiators

ANSI C63.10-2013 (11.6) Duty Cycle:

Test Procedure: The EUT was connected to a spectrum analyzer and was ran at the maximum achievable duty cycle for all modes. The duty cycle was measured in accordance with section 11.6 of ANSI C63.10-2013.

Test Engineer(s): Adan Arab

Test Date(s): October 26, 2020

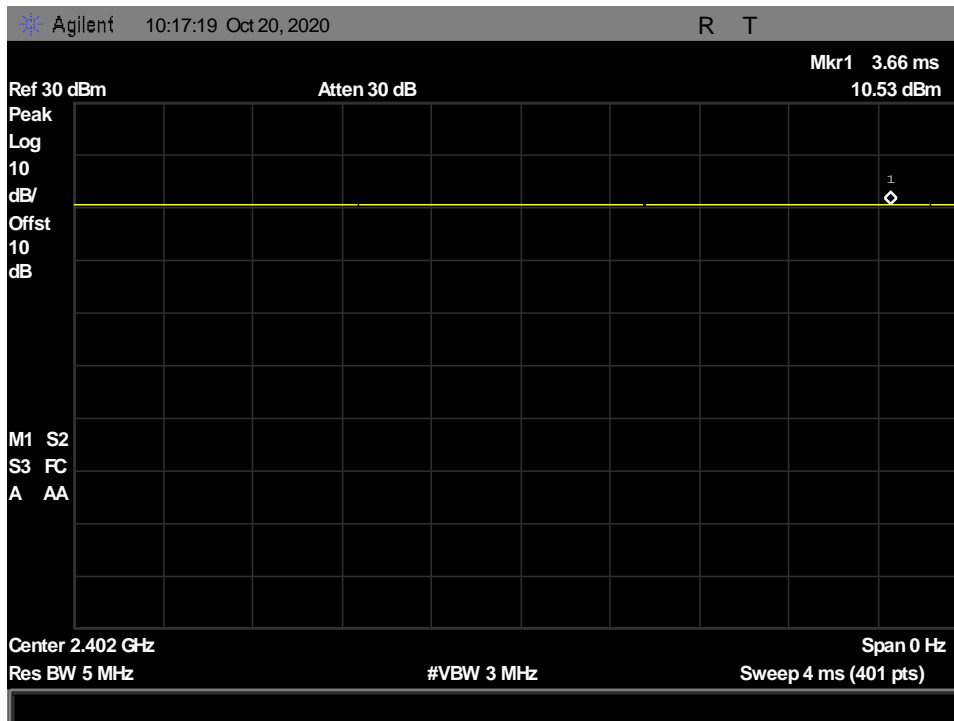


Figure 9: Duty Cycle - 100%

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.207(a) Conducted Emissions Limits

Test Results: Not tested/evaluated at MET.

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(a)(2) 6 dB Bandwidth

Test Requirements: § 15.247(a)(2): Operation under the provisions of this section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

For systems using digital modulation techniques, the EUT may operate in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

Test Procedure: The transmitter was on and transmitting at the highest output power. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using a RBW = 100kHz, VBW = 3*RBW. The 6 dB Bandwidth was measured and recorded. The measurements were performed on the low, mid and high channels.

Test Results The EUT was compliant with § 15.247 (a)(2).

The 6 dB Bandwidth was determined from the plots on the following pages.

Test Engineer(s): Adan Arab

Test Date(s): October 20, 2020

Occupied Bandwidth Test Results:

Occupied Bandwidth			
Mode	Channel (MHz)	6 dB Bandwidth (KHz)	Limit (KHz)
1 Mbps	2402	741.635	≥500
1 Mbps	2440	741.847	≥500
1 Mbps	2480	744.308	≥500

Figure 10: 6 dB Occupied Bandwidth, Test Results

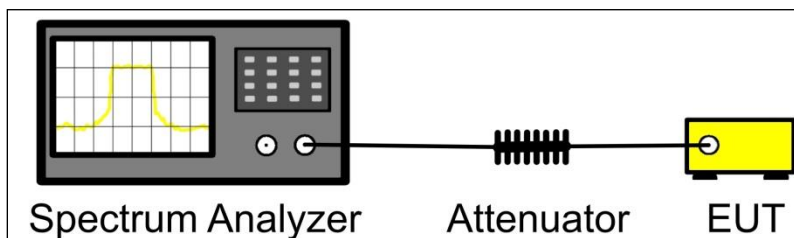


Figure 11: Block Diagram, Occupied Bandwidth Test Setup

Occupied Bandwidth Test Results

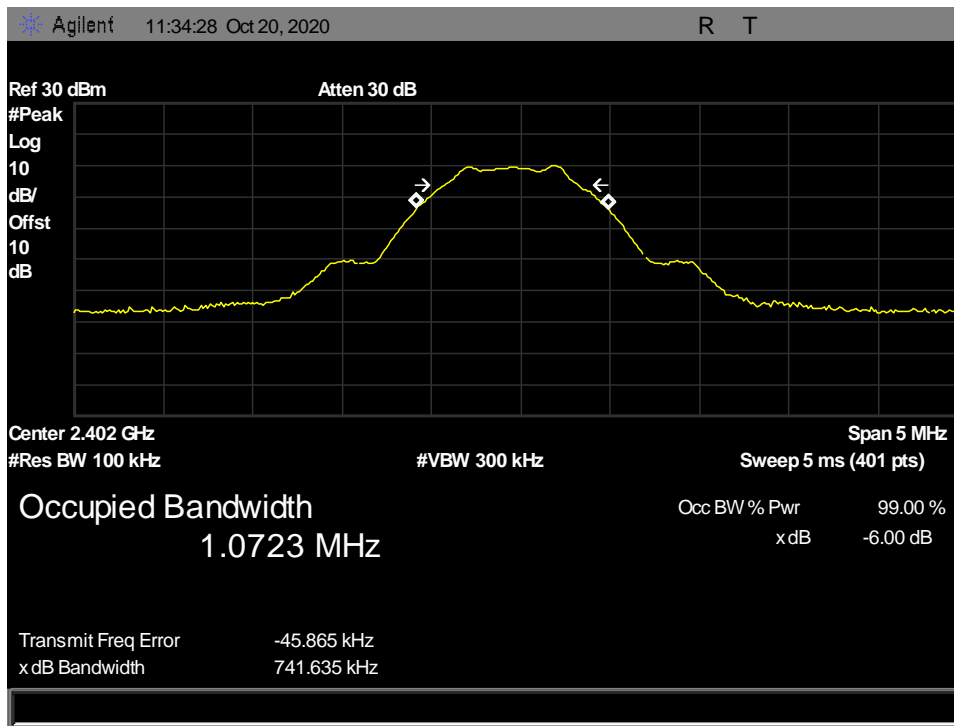


Figure 12: 6 dB Occupied Bandwidth - 2402 - 741.635 KHz

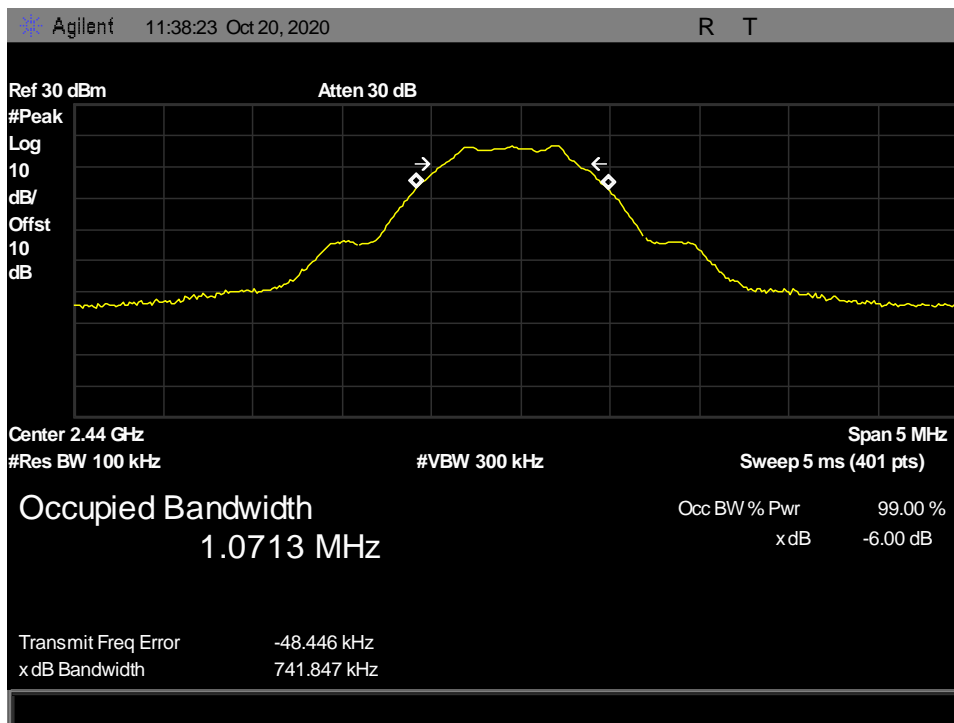


Figure 13: 6 dB Occupied Bandwidth - 2440 - 741.847 KHz

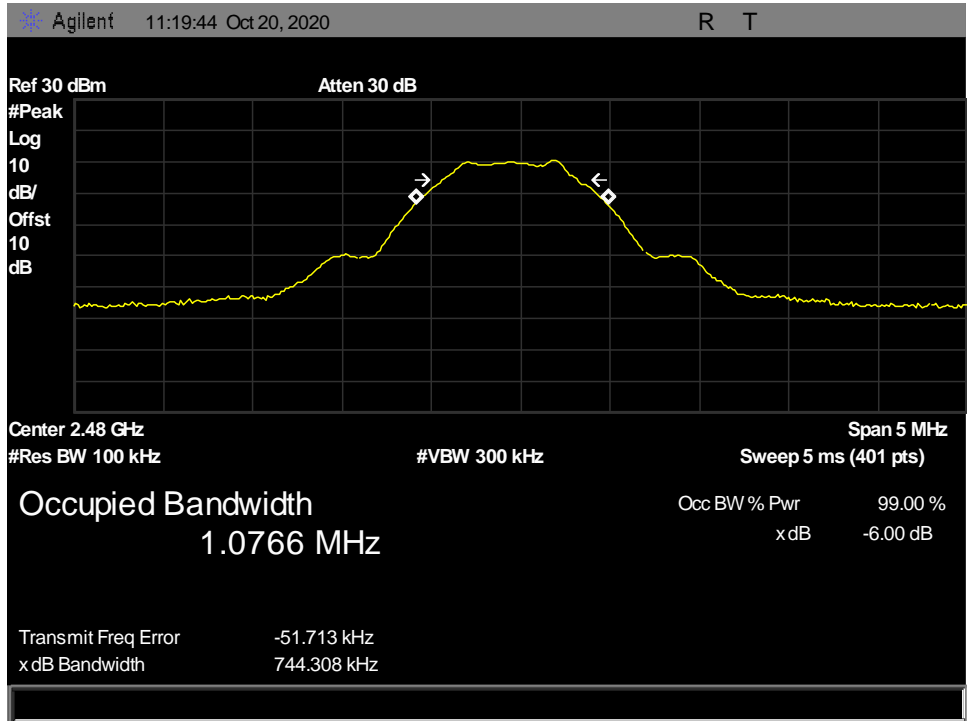


Figure 14: 6 dB Occupied Bandwidth - 2480 - 744.308 KHz

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(b) Peak Power Output

Test Requirements: §15.247(b): The maximum peak output power of the intentional radiator shall not exceed the following:

Digital Transmission Systems (MHz)	Output Limit (Watts)
2400–2483.5	1.000

Figure 15: Output Power Requirements from §15.247(b)

§15.247(c): if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in the 9, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Procedure: The EUT was measured at the low, mid and high channels of each band at the maximum power level. Measurements were performed on a radiated setup, with the receive antenna placed 1m away from the EUT.

Test Results: The EUT was compliant with the Peak Power Output limits of §15.247(b). No anomalies noted.

Test Engineer(s): Adan Arab

Test Date(s): October 20, 2020

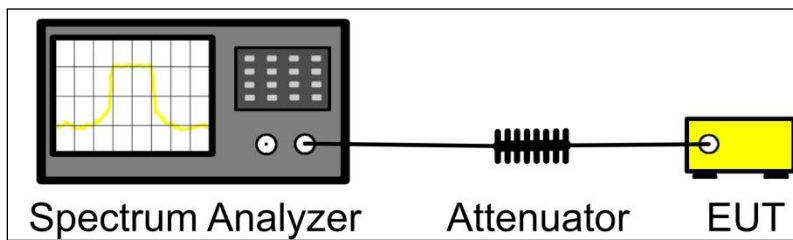


Figure 16: Power Output Test Setup

Peak Power Output Test Results:

Peak Conducted Output Power			
Mode	Channel (MHz)	Peak Output Power (dBm)	Limit (dBm)
1 Mbps	2402	11.80	30
1 Mbps	2440	18.40	30
1 Mbps	2480	12.35	30

Figure 17: Peak Power Output, Test Results

Peak Power Output Test Results

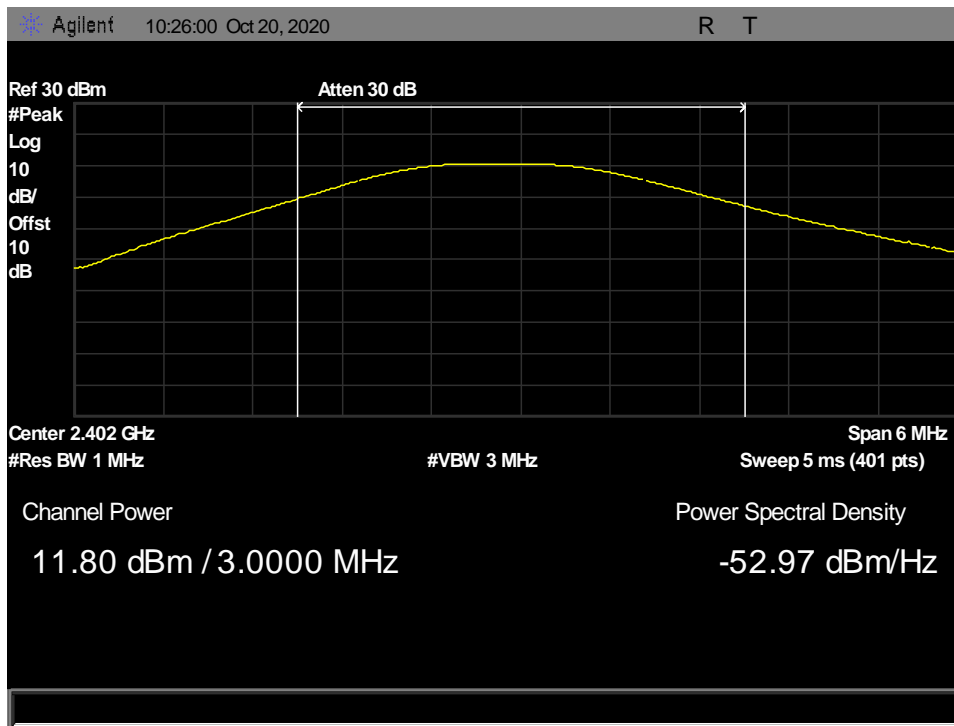


Figure 18: Peak Power Output - 2402 MHz - 11.80 dBm

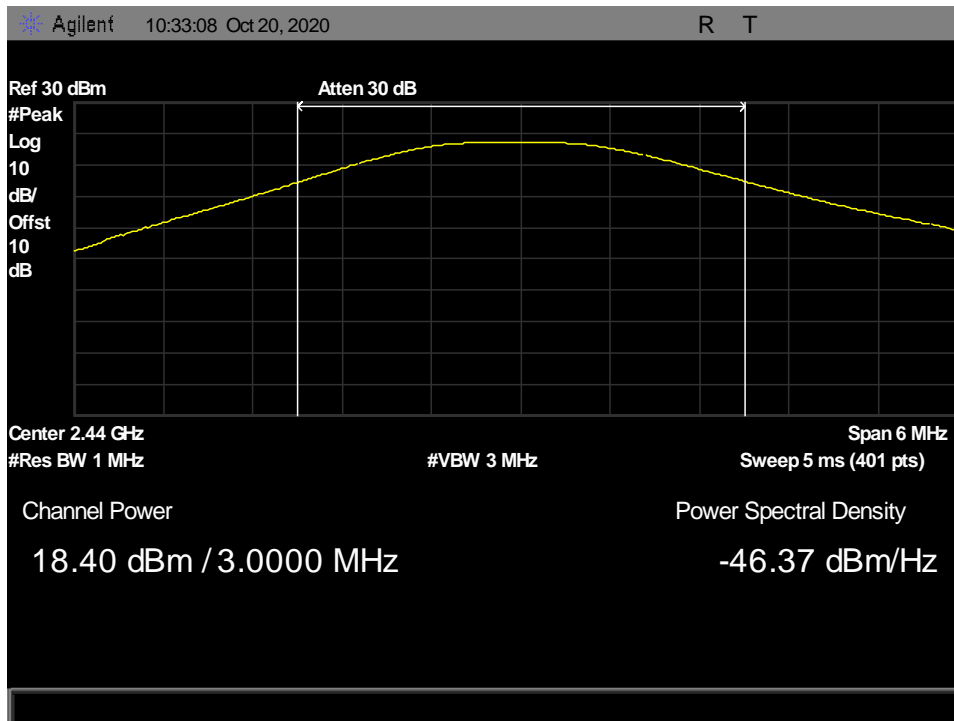


Figure 19: Peak Power Output - 2440 MHz - 18.40 dBm

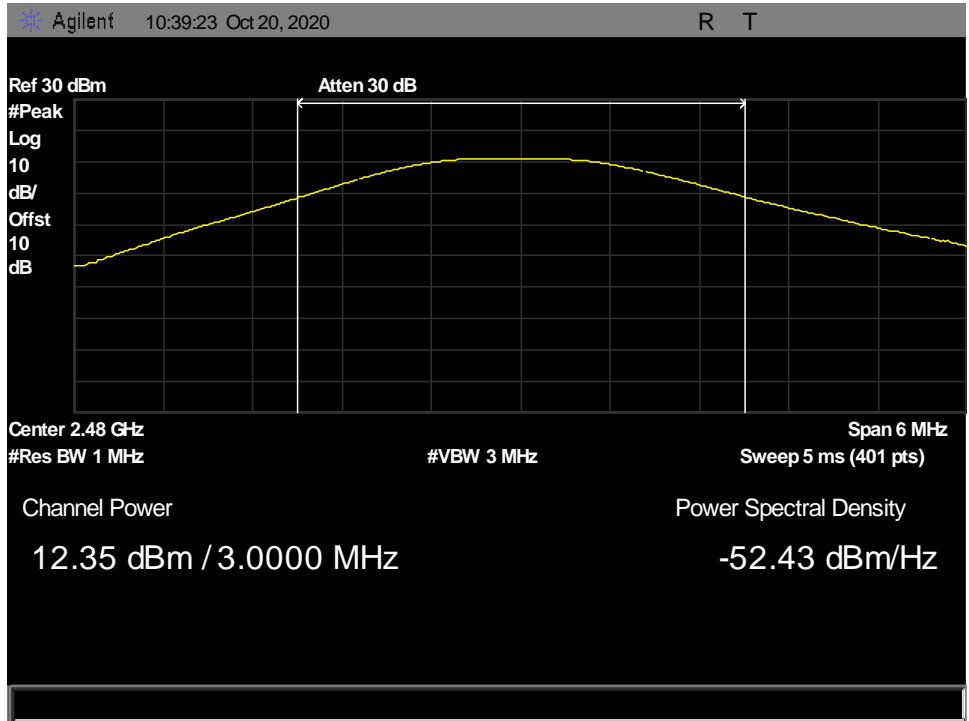


Figure 20: Peak Power Output - 2480 MHz - 12.35 dBm

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.209 Radiated Spurious Emissions Requirements and Band Edge

Test Requirements: §15.247(d); §15.205: Emissions outside the frequency band.

§15.205(a): Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090–0.110-----	16.42–16.423	399.9–410	4.5–5.15
¹ 0.495–0.505-----	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905-----	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128-----	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775-----	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775-----	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218-----	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825-----	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225-----	123–138	2200–2300	14.47–14.5
8.291–8.294-----	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366-----	156.52475– 156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675-----	156.7–156.9	2655–2900	22.01–23.12
8.41425–8.41475-----	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293-----	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025-----	240–285	3345.8–3358 36.	43–36.5
12.57675–12.57725-----	322–335.4	3600–4400	(²)

Figure 21: Restricted Bands of Operation

¹ Until February 1, 1999, this restricted band shall be 0.490 – 0.510 MHz.

² Above 38.6

Test Requirement(s): § 15.209 (a): Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in Figure 22:

Frequency (MHz)	§ 15.209(a), Radiated Emission Limits (dBμV) @ 3m
30 - 88	40.00
88 - 216	43.50
216 - 960	46.00
Above 960	54.00

Figure 22: Radiated Emissions Limits Calculated from FCC Part 15, § 15.209 (a)

Test Procedures: The transmitter was turned on. Measurements were performed of the low, mid and high Channels. The EUT was rotated orthogonally through all three axes. Plots shown are corrected for both antenna correction factor and distance and compared to a 3 m limit line.

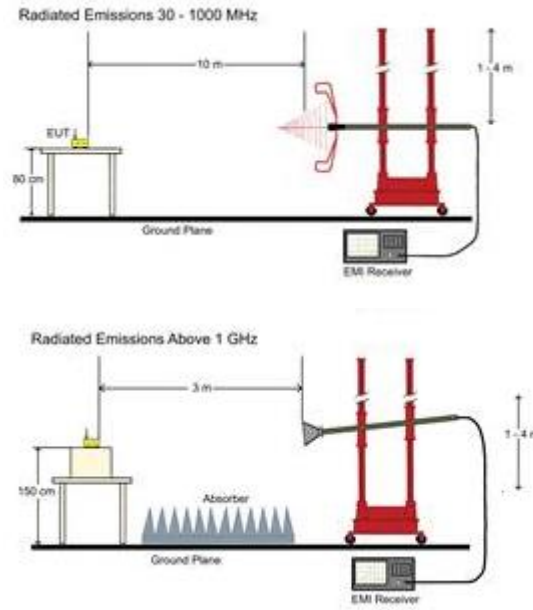


Figure 23: Radiated Emissions Test Setup

Test Results: The EUT was compliant with the Radiated Spurious Emission limits of § 15.247(d) and § 15.209.

Test Engineer(s): Adan Arab

Test Date(s): October 20, 2020

Radiated Spurious Emissions, Test Results

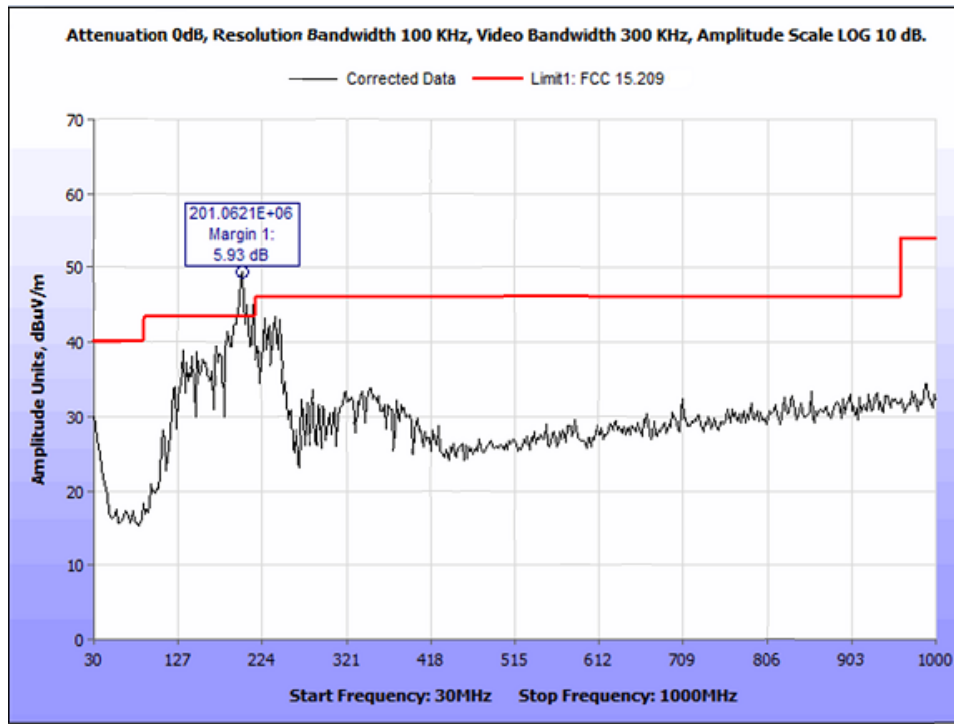


Figure 24: Radiated Spurious Emissions - 2402 MHz - 30MHz-1000MHz - Peak - Horizontal.

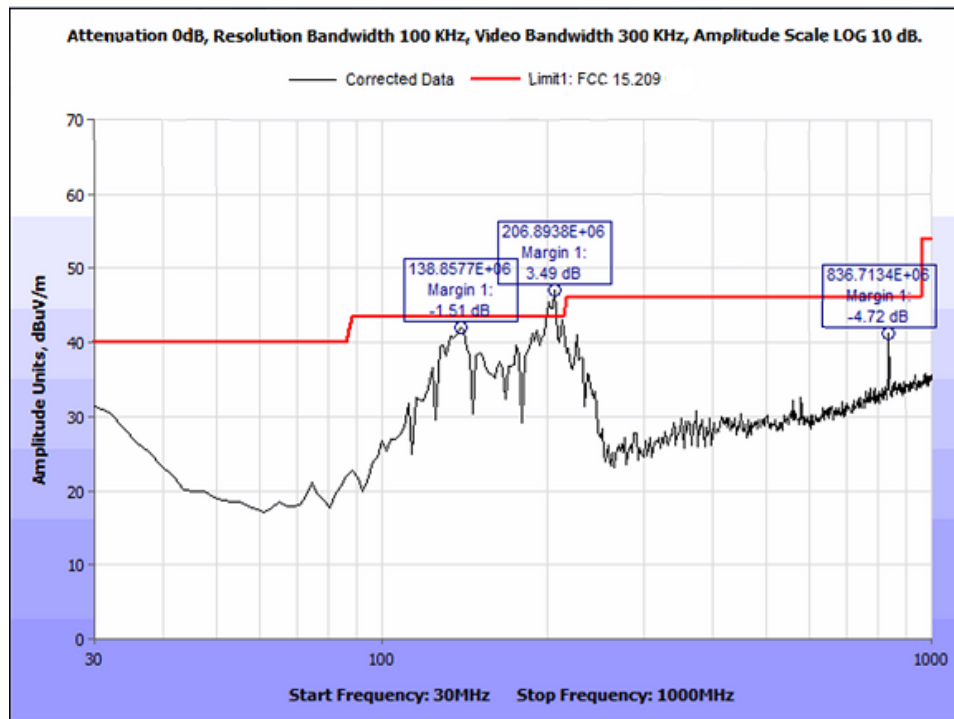


Figure 25: Radiated Spurious Emissions - 2402 MHz - 30MHz-1000MHz -Peak - Vertical

Frequency (MHz)	Uncorrected Amplitude (dBuV)	Antenna polarity	Detector	RBW (KHz)	Distance Correction Factor (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Corrected Amplitude dBuV/m	Limit, 15.209 QP (dBuV/m)	Margin (dB)	Comment
206.8938	37.5	V	QP	100	10.46	14.93	-22.87	40.02	43.5	-3.48	
836.7134	13.8	V	QP	100	10.46	25.8	-20.05	30.01	46	-15.99	
138.8577	29.7	V	QP	100	10.46	17.01	-23.41	33.76	43.5	-9.74	
201.0621	39	H	QP	100	10.46	16.48	-23.01	43.93	43.5	-0.57	

Note* These emissions are digital emission not related to the transmitter and are a subject to the requirements of digital devices
FCC 15B Class A Limits.

Figure 26: Radiated Spurious Emissions, 2402 MHz – 30-1000 MHz, Quasi-Peak Data

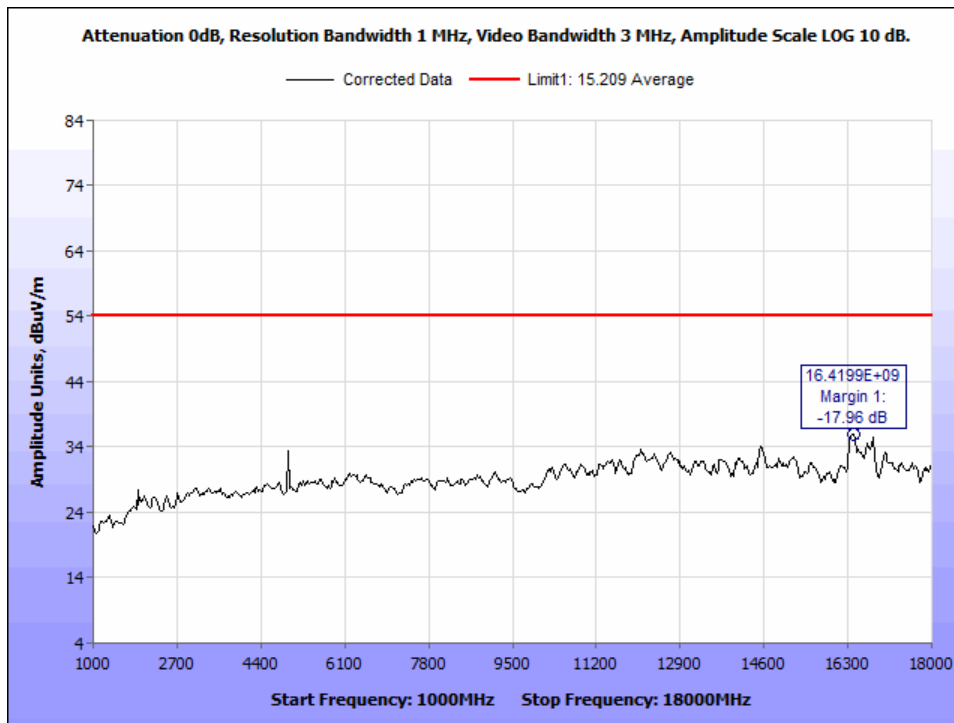


Figure 27: Radiated Spurious Emissions - 2402 MHz - 1-18GHz - Average - Horizontal.

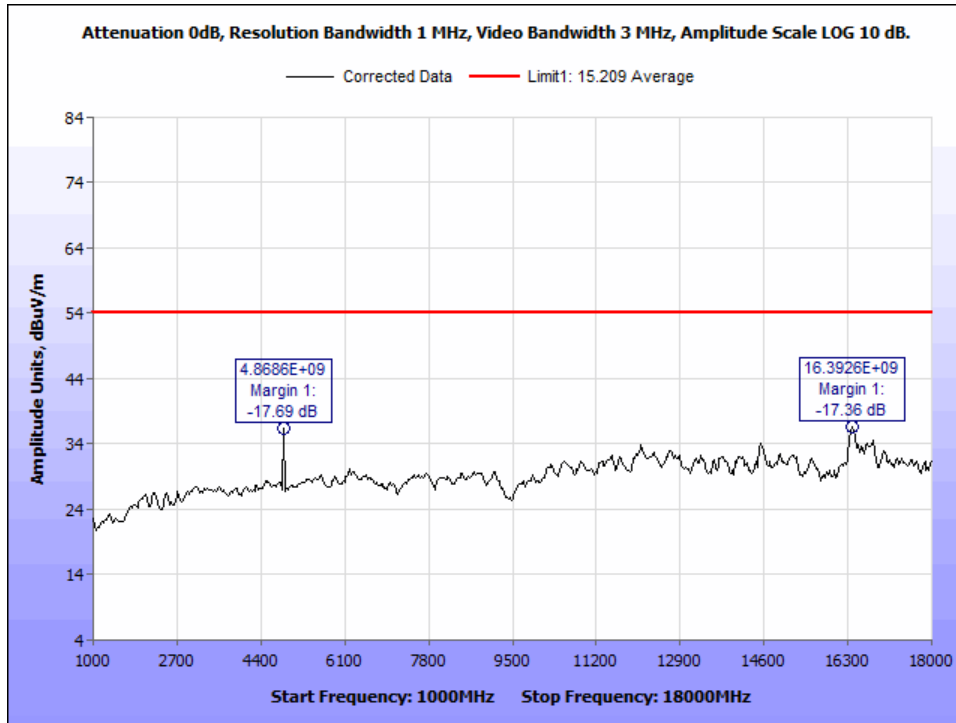


Figure 28: Radiated Spurious Emissions - 2402 MHz - 1-18GHz - Average - Vertical.

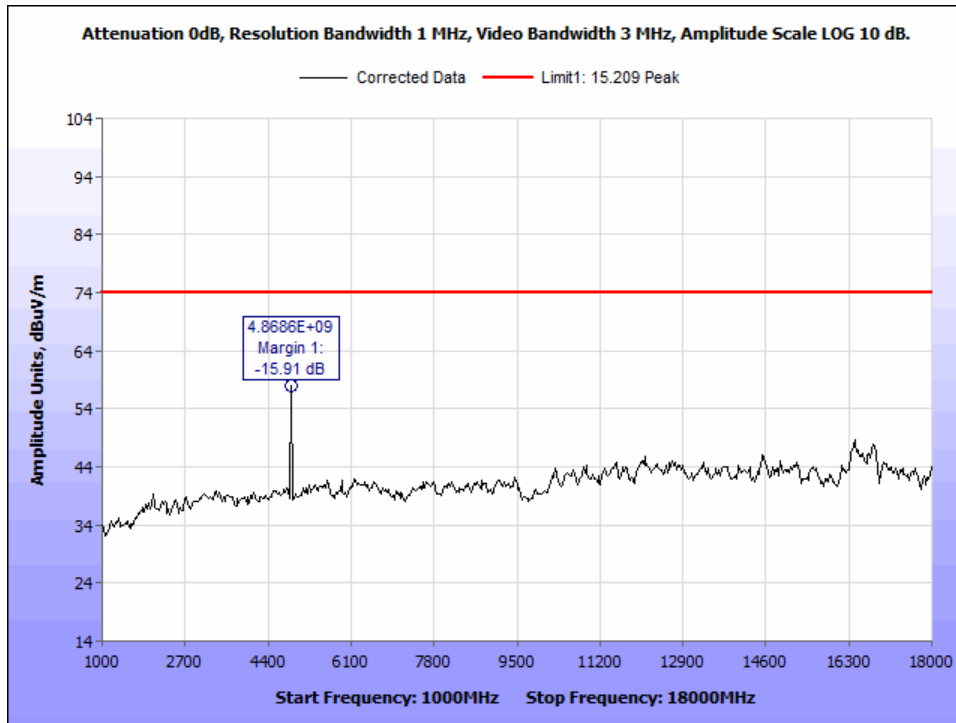


Figure 29: Radiated Spurious Emissions - 2402 MHz - 1-18GHz - Peak - Horizontal.

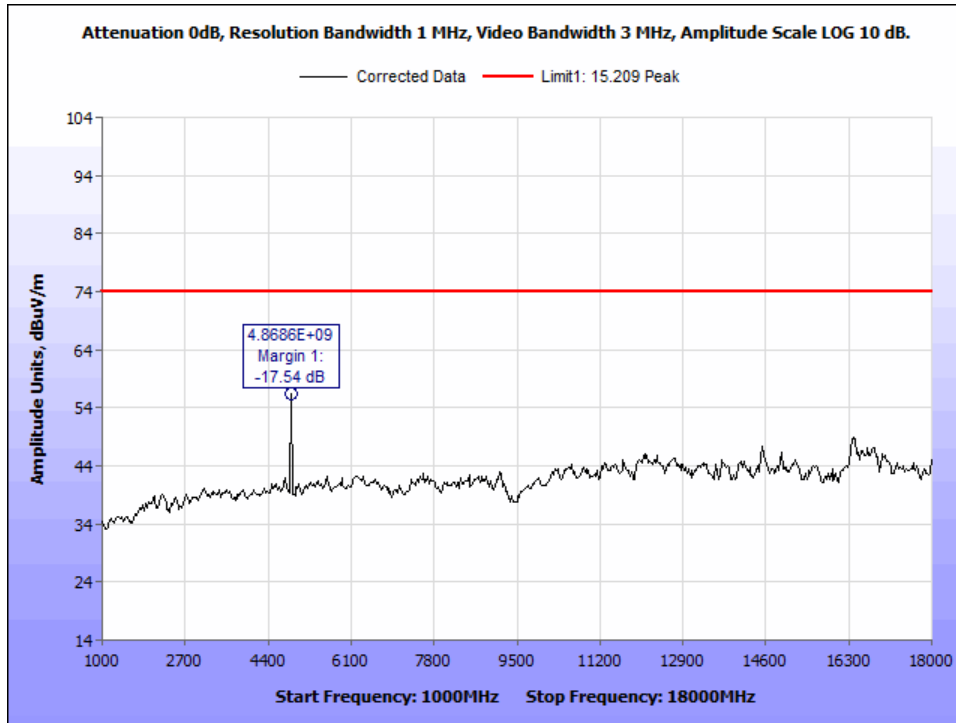


Figure 30: Radiated Spurious Emissions - 2402 MHz - 1-18GHz - Peak - Vertical.

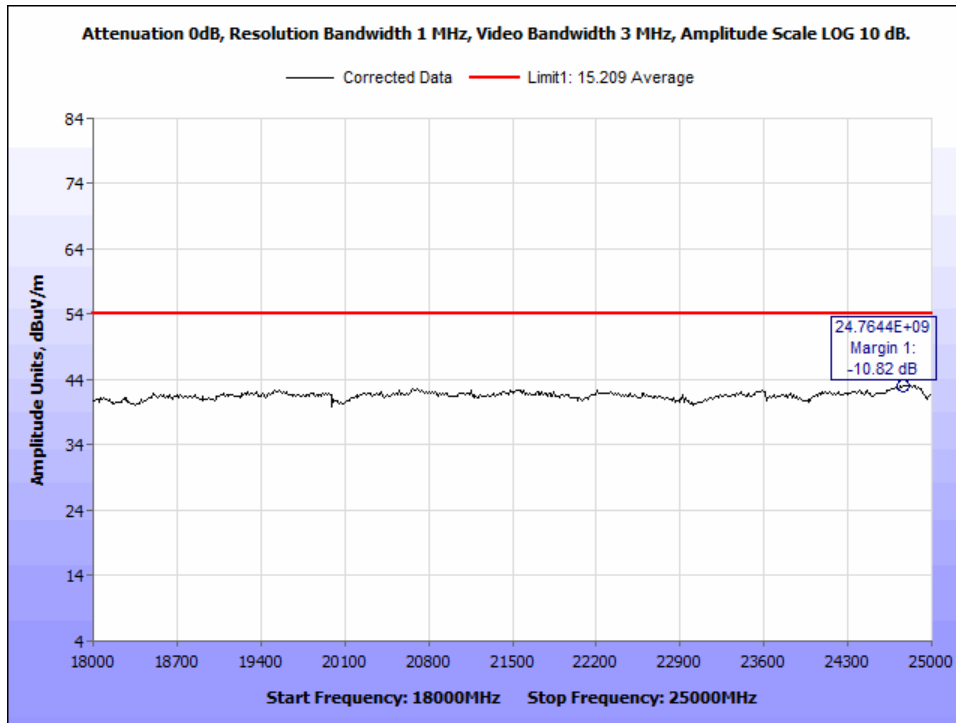


Figure 31: Radiated Spurious Emissions - 2402 MHz - 18-25 GHz - Average - Horizontal.

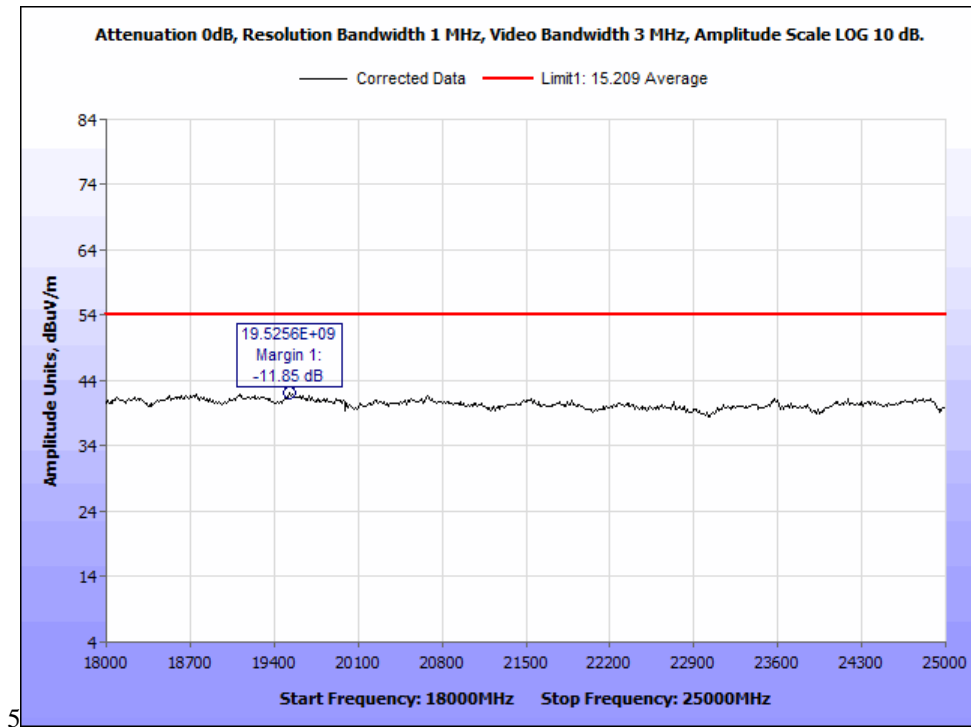


Figure 32: Radiated Spurious Emissions - 2402 MHz - 18-25 GHz - Average - Vertical.

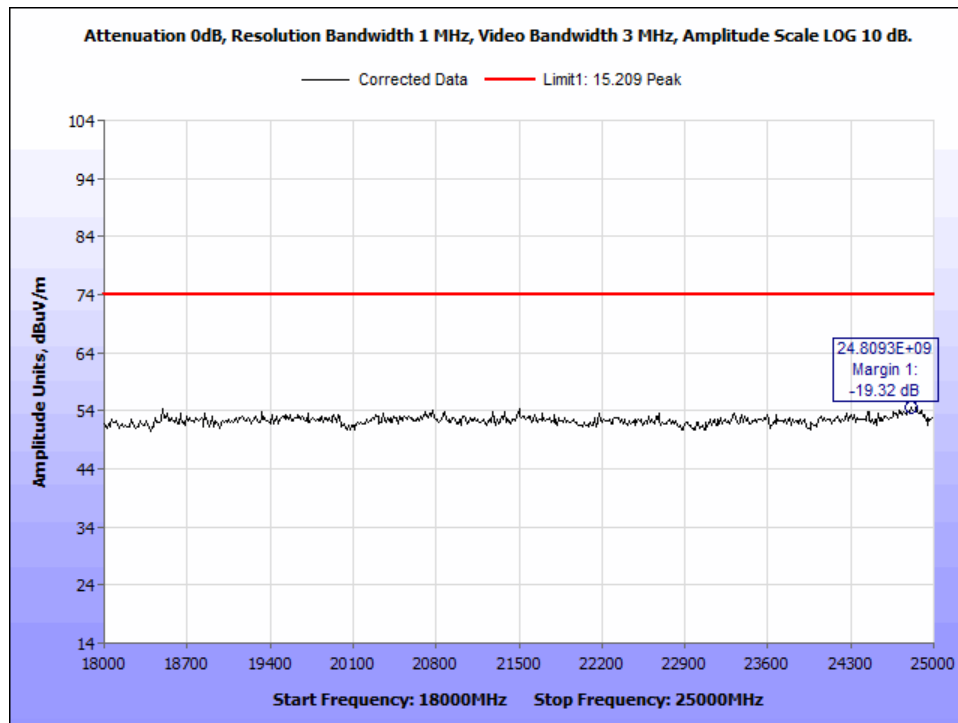


Figure 33: Radiated Spurious Emissions - 2402 MHz - 18-25 GHz - Peak - Horizontal.

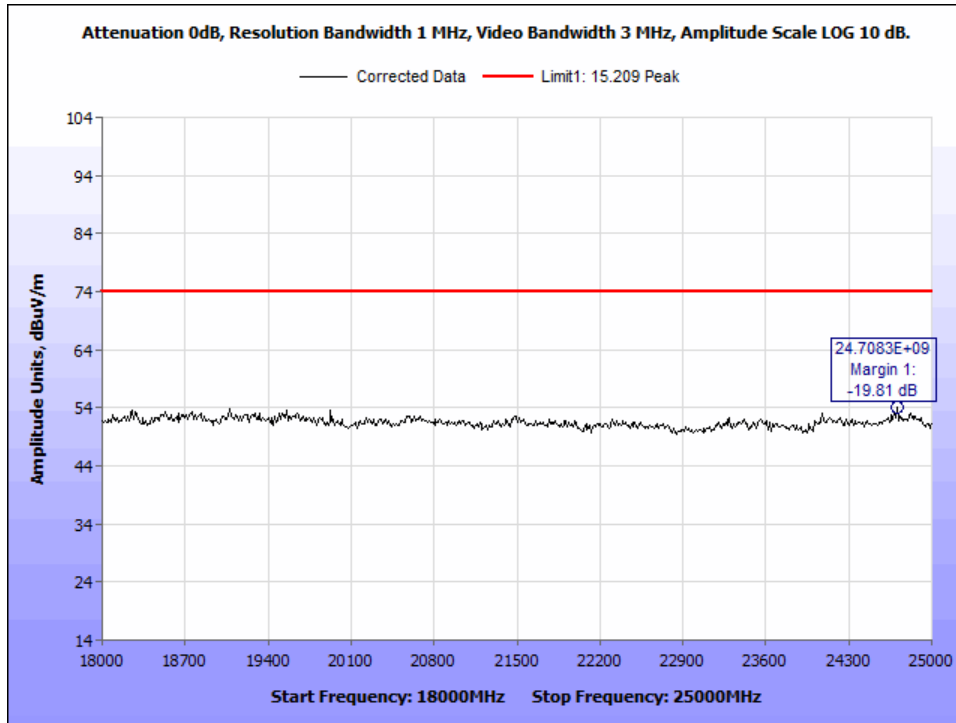


Figure 34: Radiated Spurious Emissions - 2402 MHz - 18-25 GHz - Peak - Vertical.

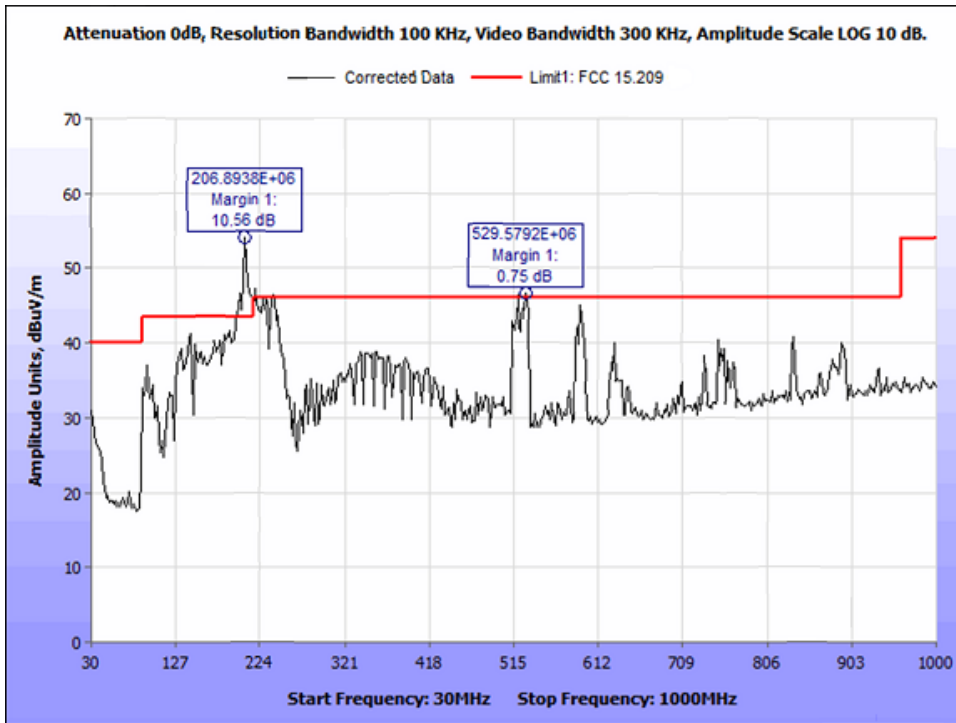


Figure 35: Radiated Spurious Emissions - 2440 MHz - 30MHz-1000MHz - Peak - Horizontal.

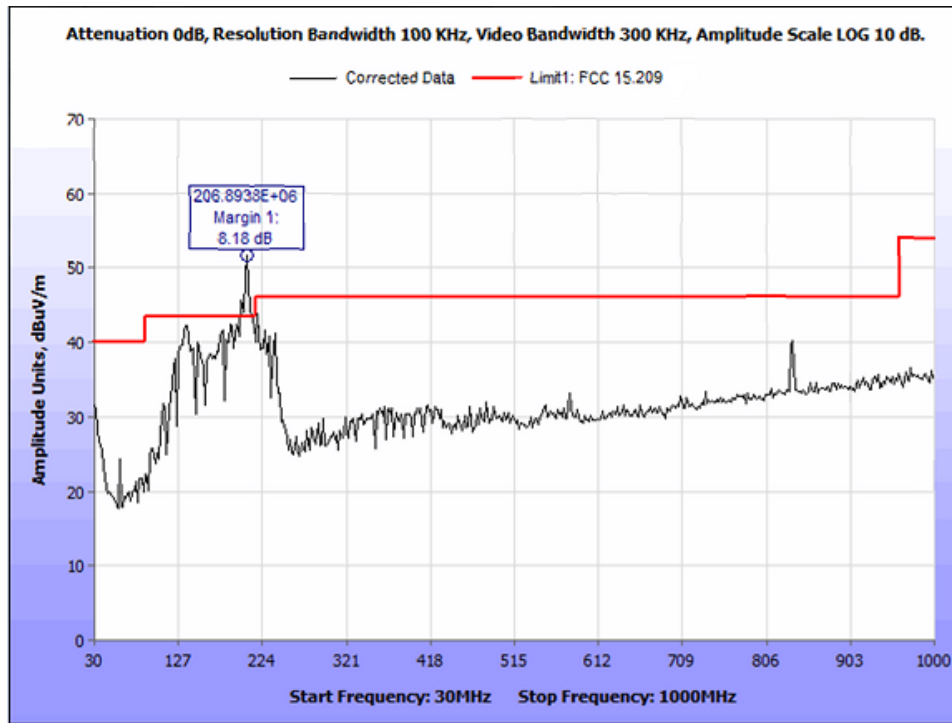


Figure 36: Radiated Spurious Emissions - 2440 MHz - 30MHz-1000MHz – Peak - Vertical.

Frequency (MHz)	Uncorrected Amplitude (dBuV)	Antenna polarity	Detector	RBW (KHz)	Distance Correction Factor (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Corrected Amplitude dBuV/m	Limit, 15.209 QP (dBuV/m)	Margin (dB)	Comment
206.8938	46.3	H	QP	100	10.46	14.32	-22.87	48.21	43.5	4.71	See Note*
529.5792	31.2					21.86	-21.57	41.95	46	-4.05	
206.8938	43.2	V	QP	100	10.46	14.93	-22.87	51.68	43.5	2.22	See Note*

See Note* These emissions are digital emission not related to the transmitter and are a subject to the requirements of digital devices FCC 15B Class A Limits.

Figure 37: Radiated Spurious Emissions, 2440 MHz - 30-1000 MHz, Quasi- Peak Data

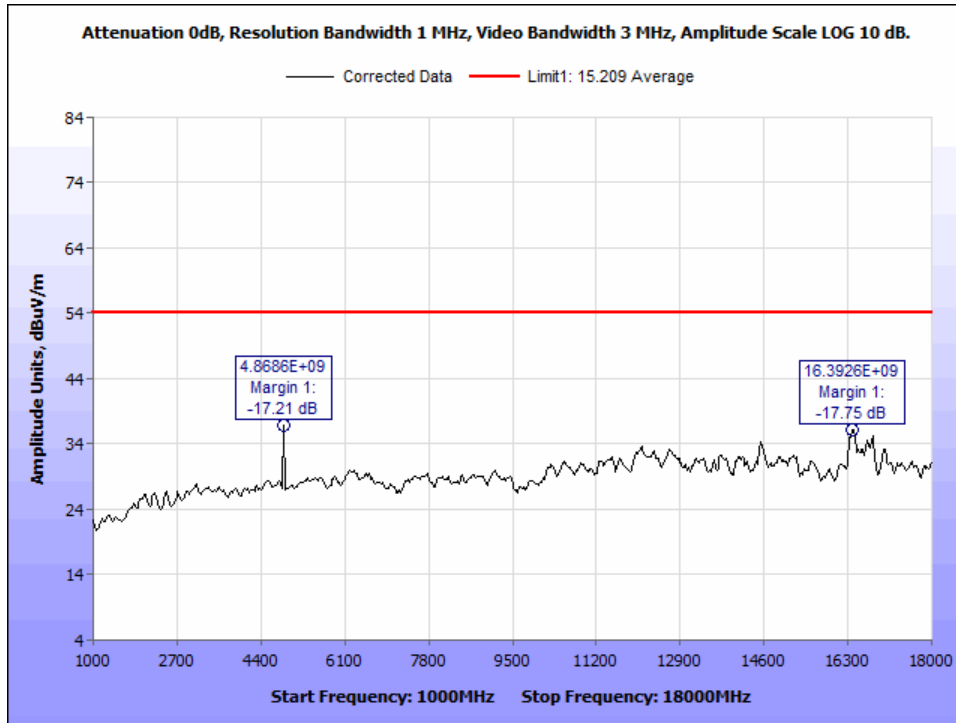


Figure 38: Radiated Spurious Emissions - 2440 MHz - 1-18GHz - Average - Horizontal.

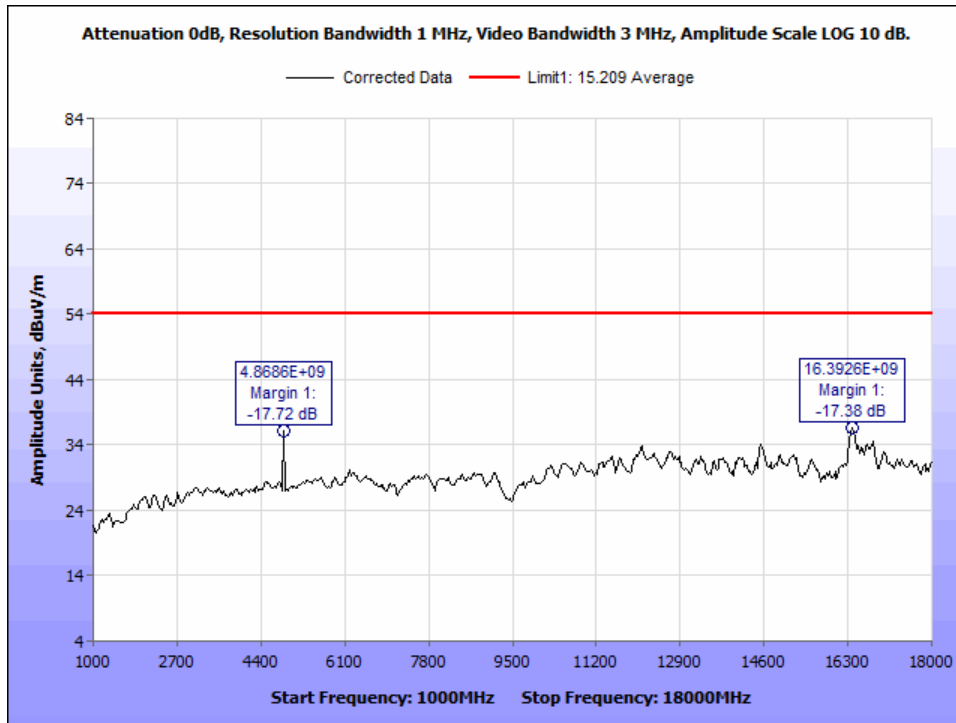


Figure 39: Radiated Spurious Emissions - 2440 MHz - 1-18GHz - Average - Vertical.

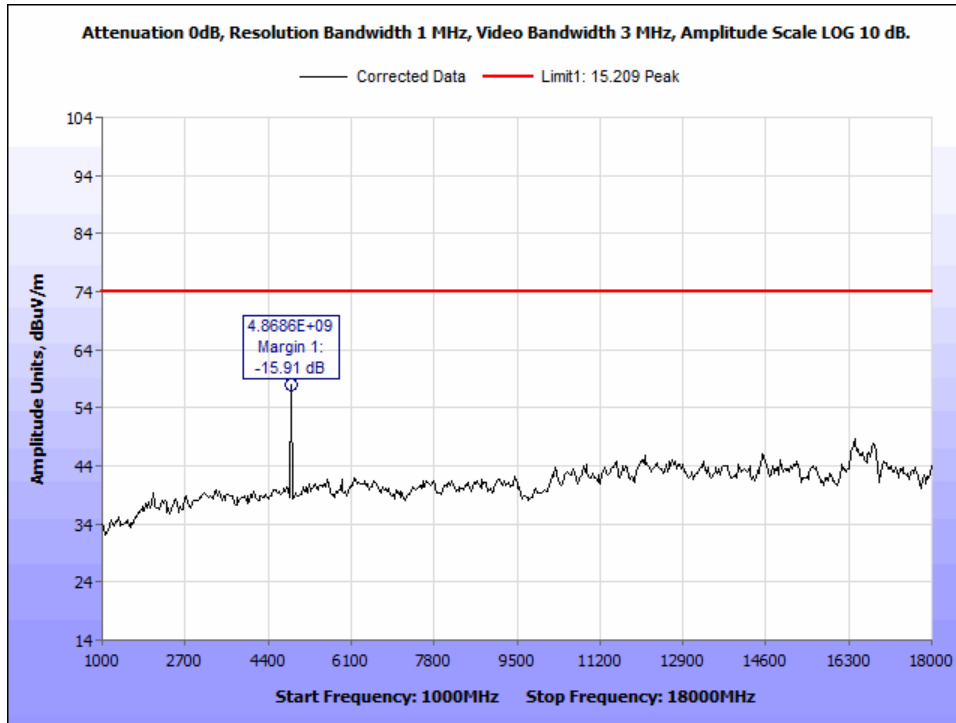


Figure 40: Radiated Spurious Emissions - 2440 MHz - 1-18GHz - Peak - Horizontal.

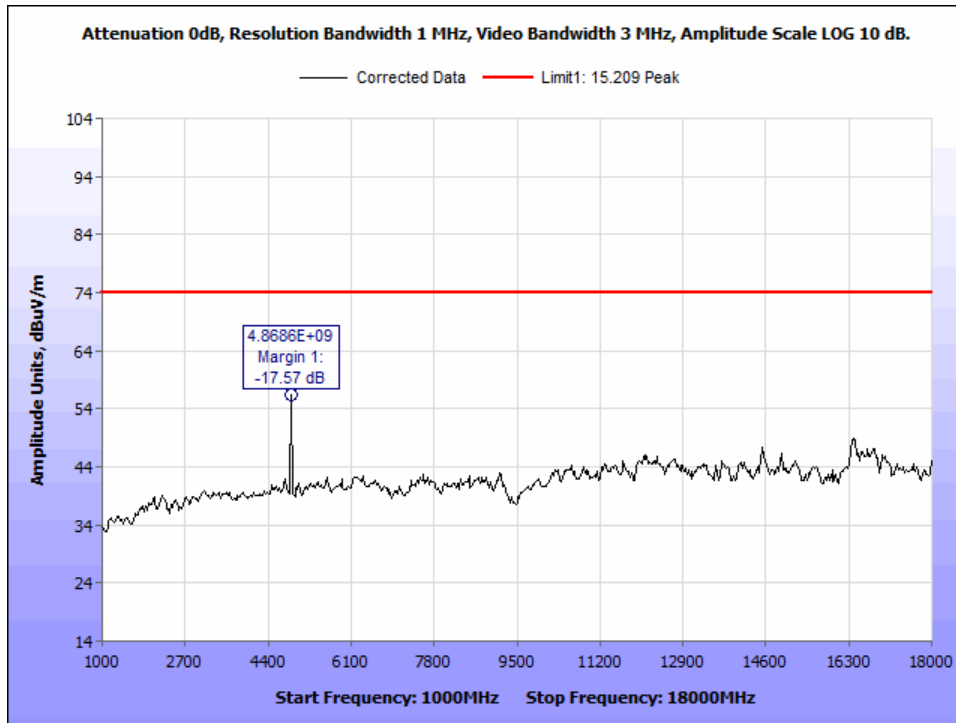


Figure 41: Radiated Spurious Emissions - 2440 MHz - 1-18GHz - Peak - Vertical.

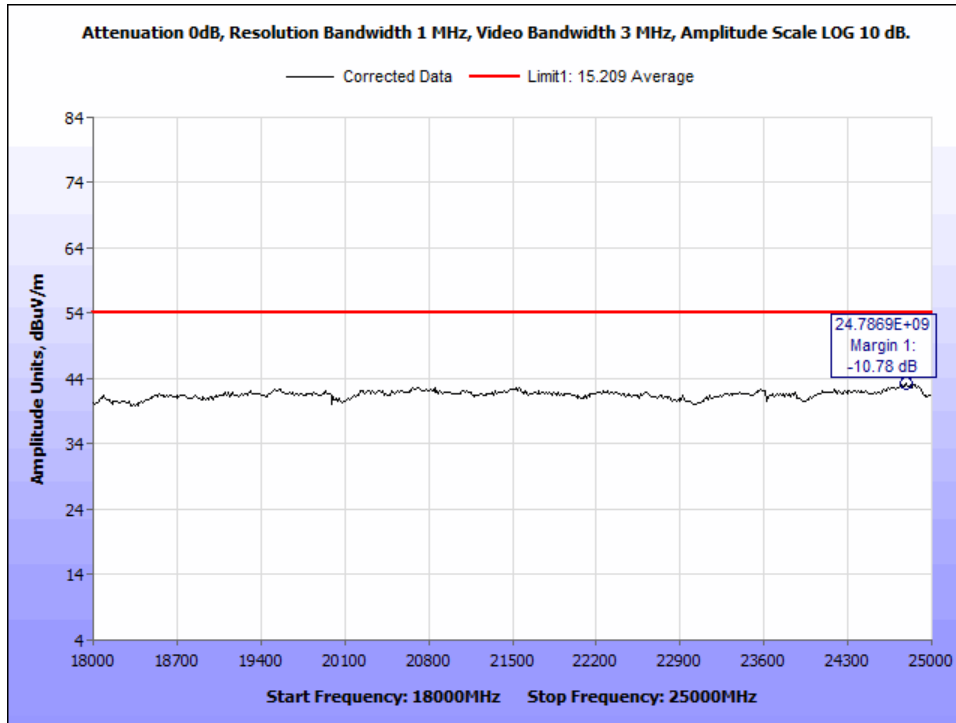


Figure 42: Radiated Spurious Emissions - 2440 MHz - 18-25 GHz - Average - Horizontal.

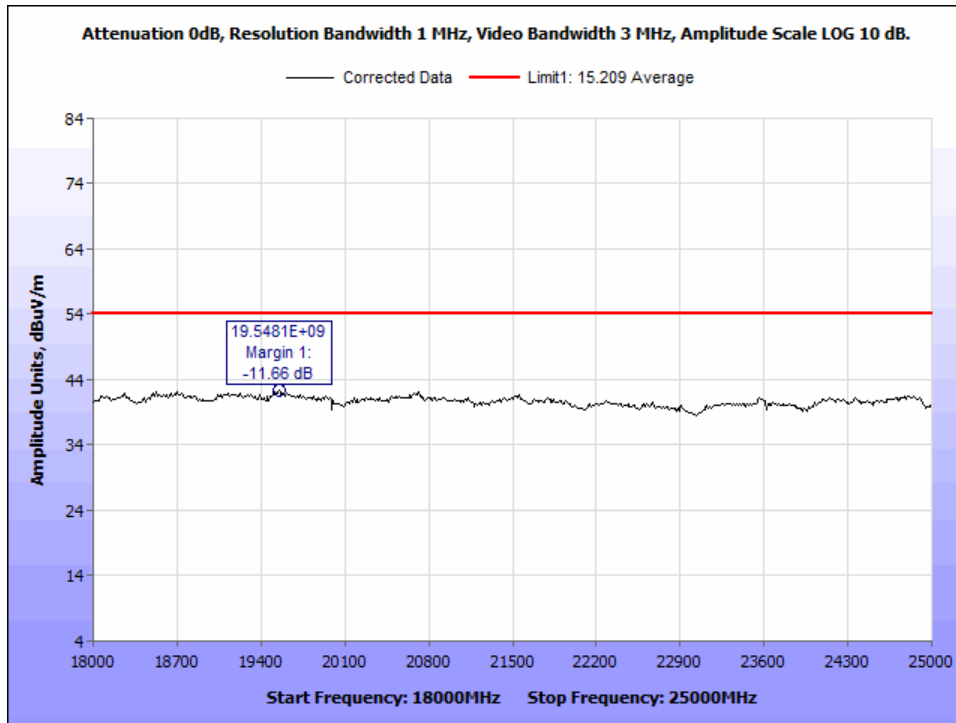


Figure 43: Radiated Spurious Emissions - 2440 MHz - 18-25 GHz - Average - Vertical.

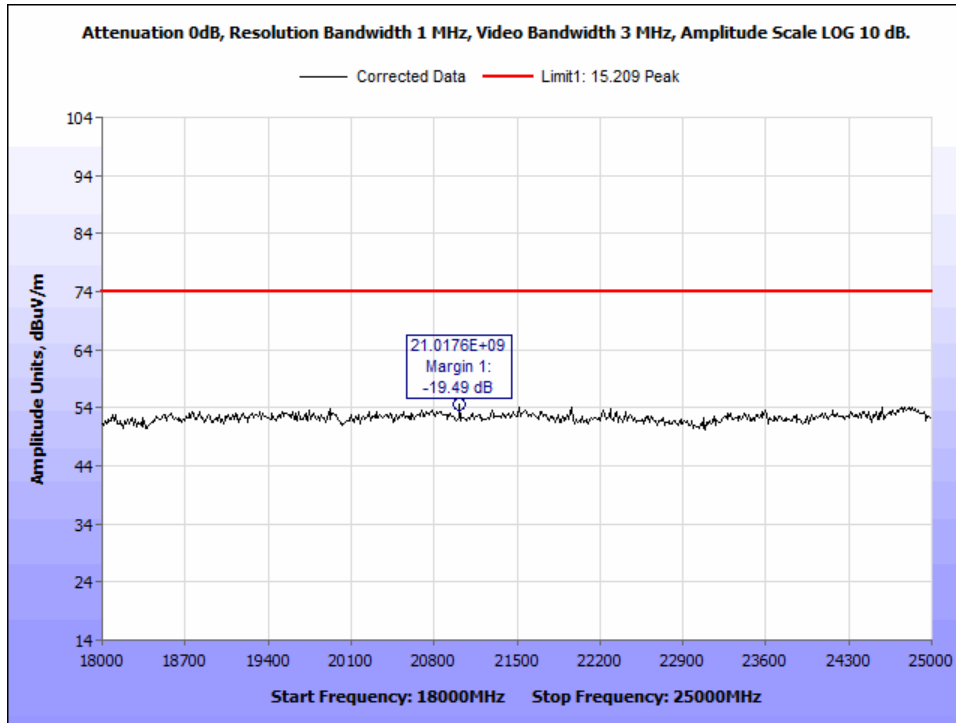


Figure 44: Radiated Spurious Emissions - 2440 MHz - 18-25 GHz - Peak - Horizontal.

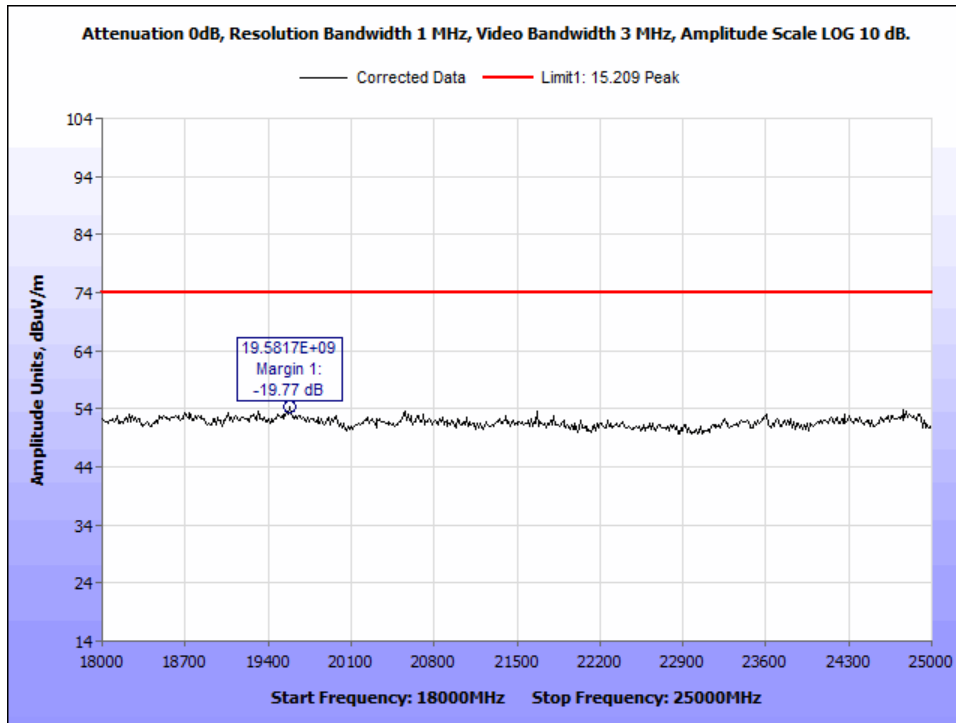


Figure 45: Radiated Spurious Emissions - 2440 MHz - 18-25 GHz - Peak - Vertical.

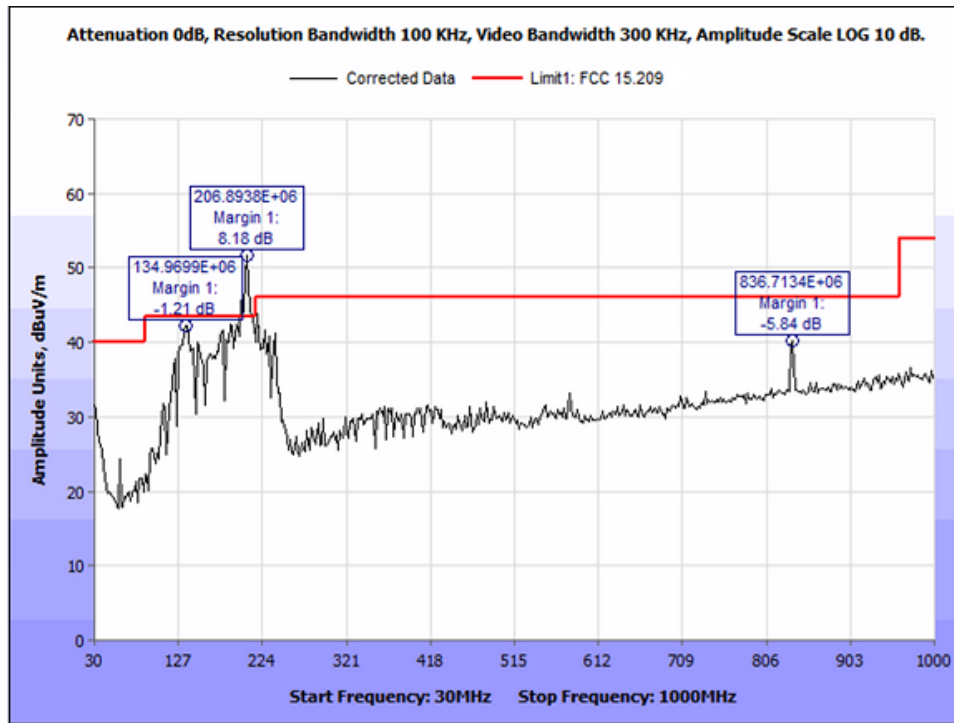


Figure 46: Radiated Spurious Emissions - 2480 MHz - 30MHz-1000MHz – Peak - Horizontal.

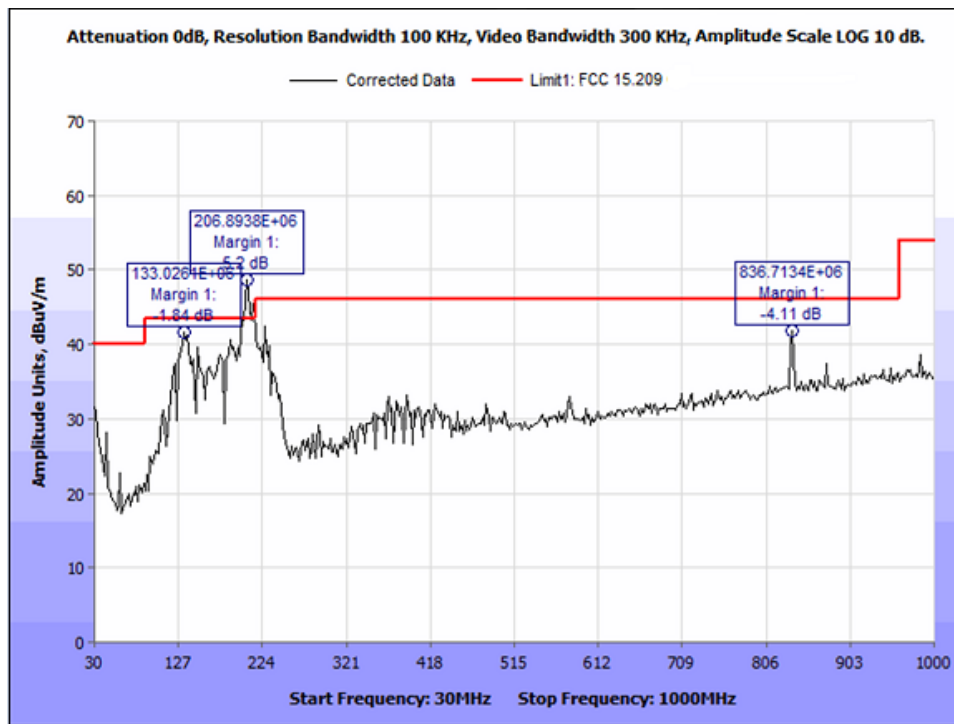


Figure 47: Radiated Spurious Emissions - 2480 MHz - 30MHz-1000MHz - Peak - Vertical.

Frequency (MHz)	Uncorrected Amplitude (dBuV)	Antenna polarity	Detector	RBW (KHz)	Distance Correction Factor (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Corrected Amplitude dBuV/m	Limit, 15.209 QP (dBuV/m)	Margin (dB)	Comment
206.8938	43.18	V	QP	100	10.46	14.93	-22.87	45.7	43.5	2.2	See Note*
204.9499	38.74	V	QP	100	10.46	15.52	-22.92	41.8	43.5	-1.7	
212.7255	39.2	V	QP	100	10.46	14.7	-22.82	41.54	43.5	-1.96	
206.8938	44.98	H	QP	100	10.46	14.93	-22.87	47.5	43.5	4	See Note*
204.9499	39.2	H	QP	100	10.46	15.52	-22.92	42.26	43.5	-1.24	
199.1182	37.48	H	QP	100	10.46	16.61	-23.02	41.53	43.5	-1.97	

See Note* These emissions are digital emission not related to the transmitter and are a subject to the requirements of digital devices FCC 15B Class A Limits.

Figure 48: Radiated Spurious Emissions, 2480 MHz - 30-1000 MHz, Quasi-Peak Data

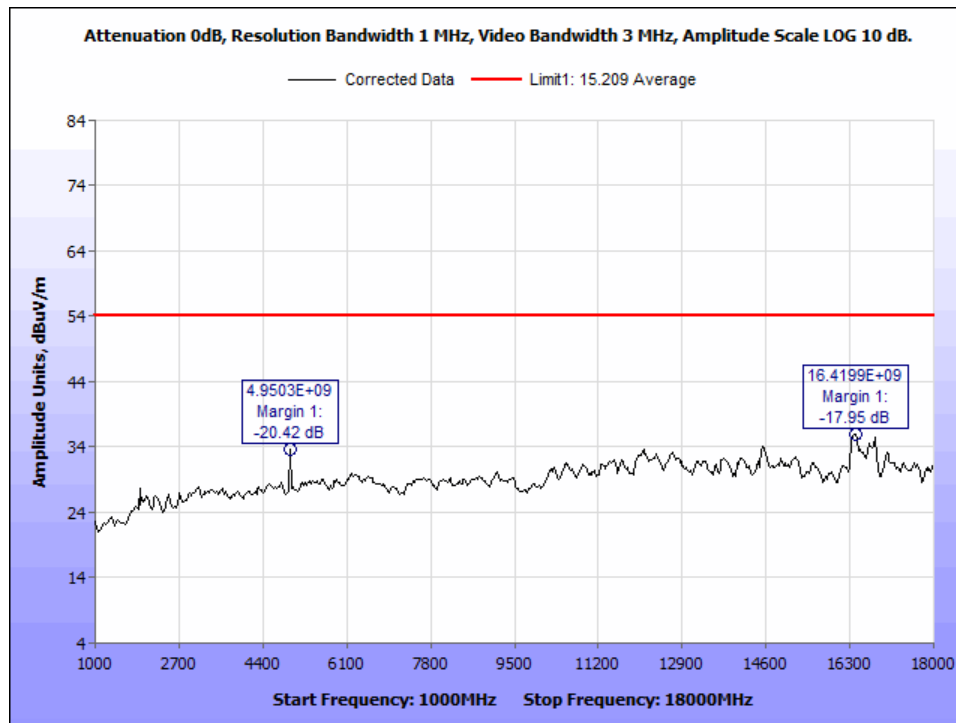


Figure 49: Radiated Spurious Emissions - 2480 MHz - 1-18GHz - Average - Horizontal.

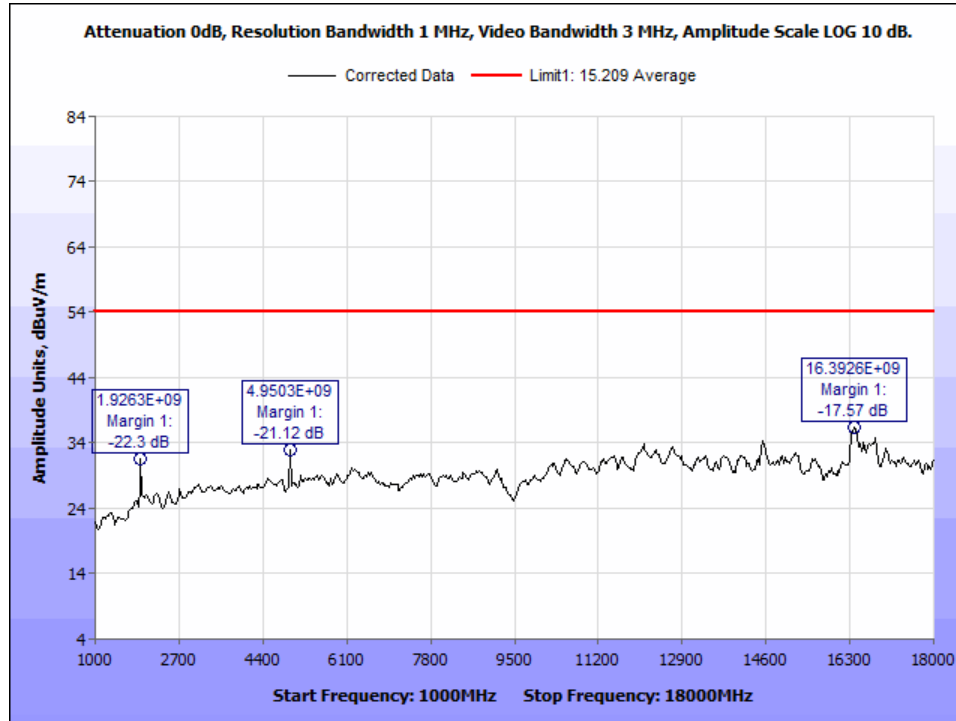


Figure 50: Radiated Spurious Emissions - 2480 MHz - 1-18GHz - Average - Vertical.

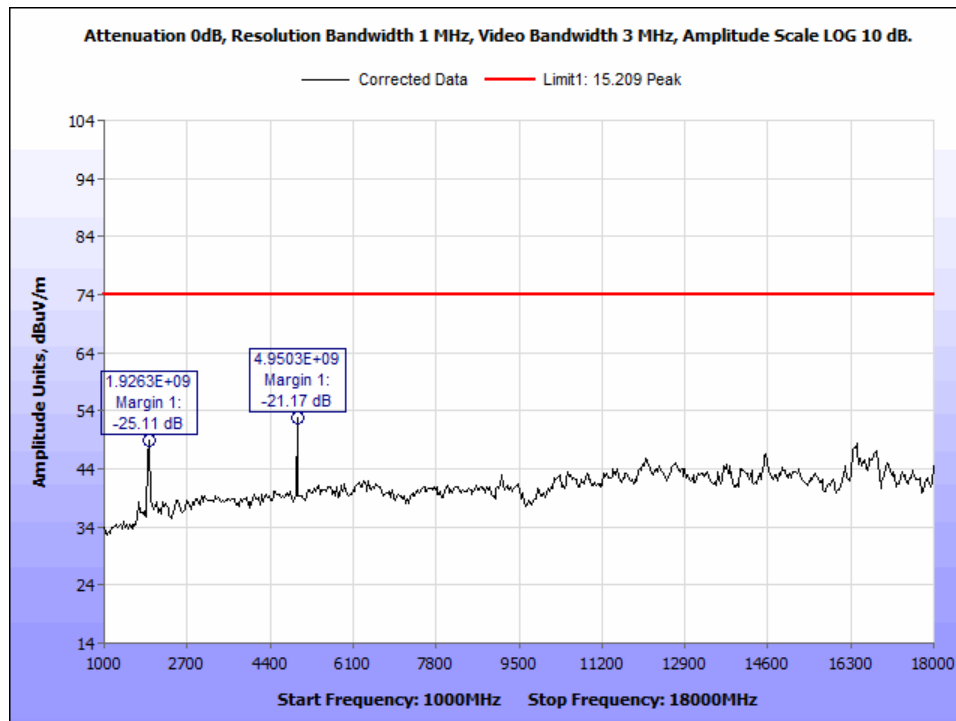


Figure 51: Radiated Spurious Emissions - 2480 MHz - 1-18GHz - Peak - Horizontal.

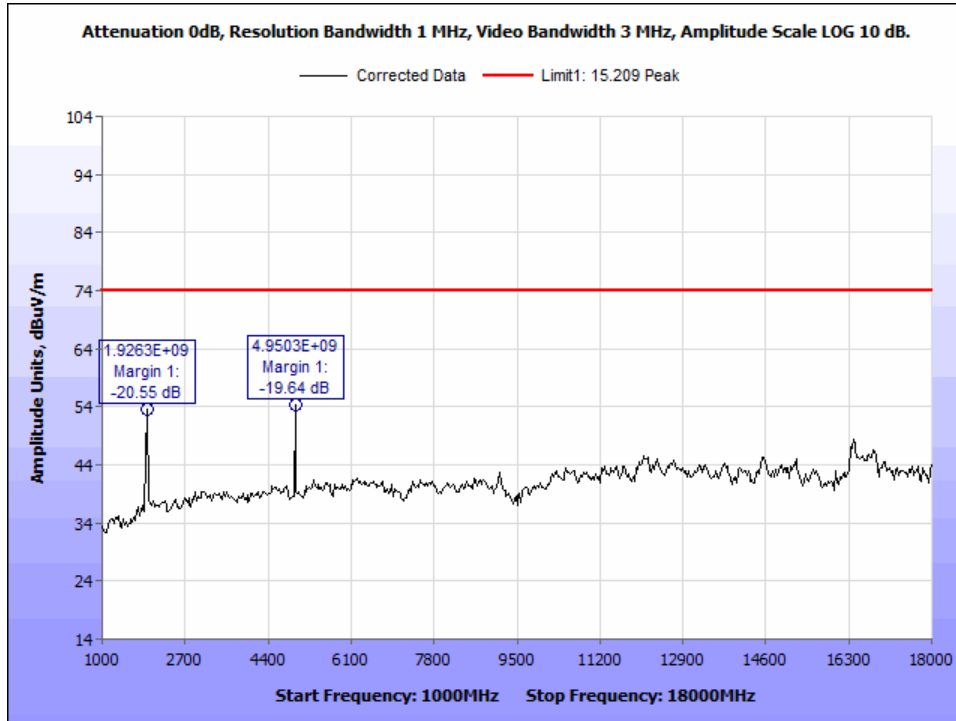


Figure 52: Radiated Spurious Emissions - 2480 MHz - 1-18GHz - Peak - Vertical.

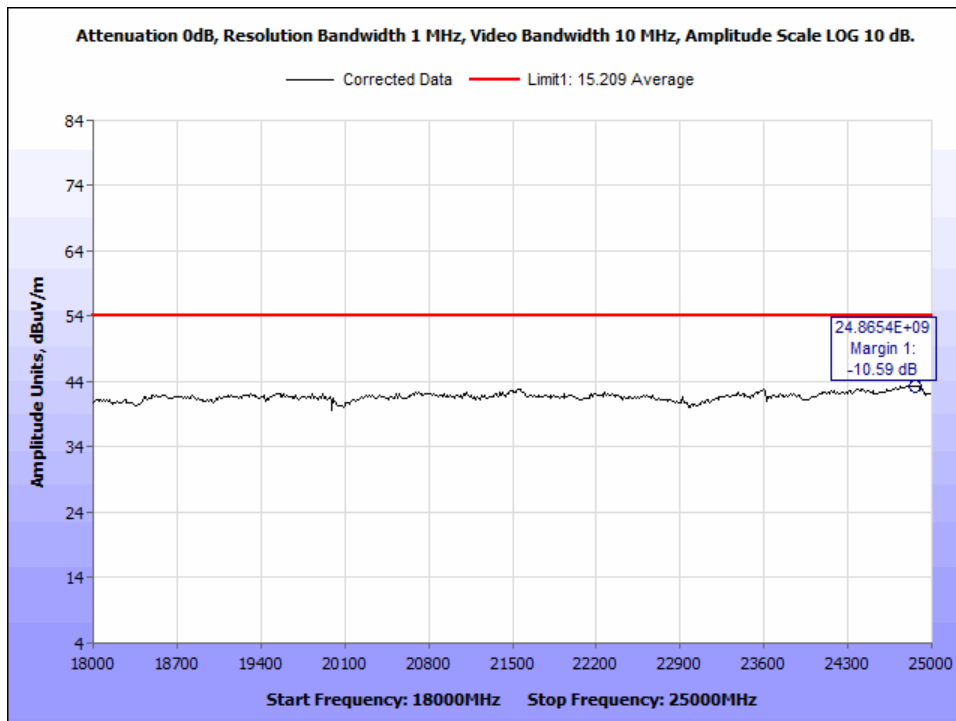


Figure 53: Radiated Spurious Emissions - 2480 MHz - 18-25 GHz - Average - Horizontal.

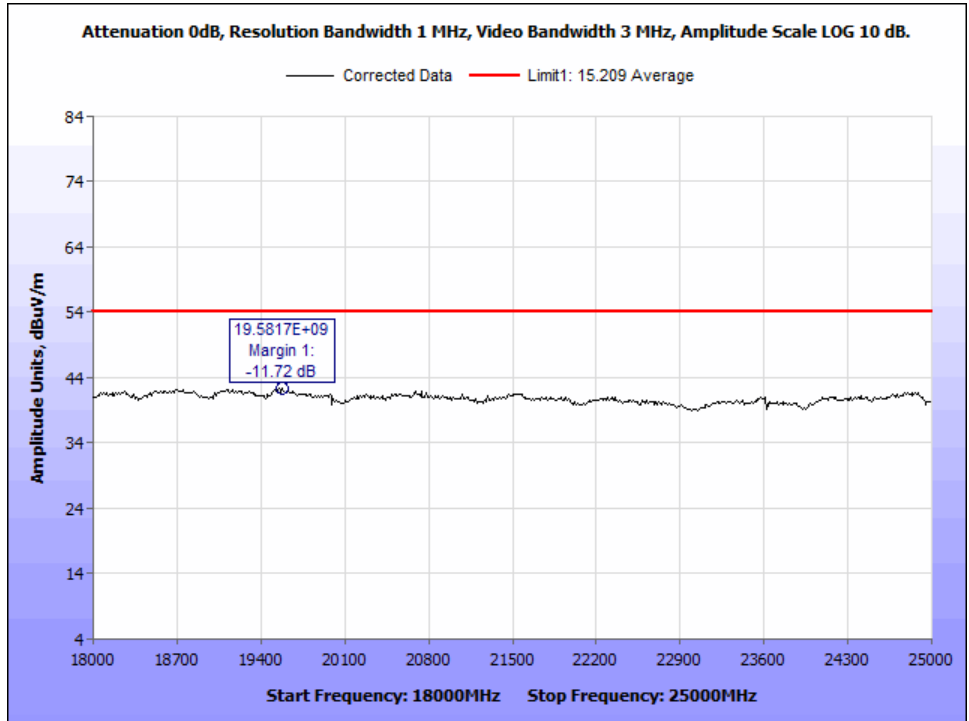


Figure 54: Radiated Spurious Emissions - 2480 MHz - 18-25 GHz - Average - Vertical.

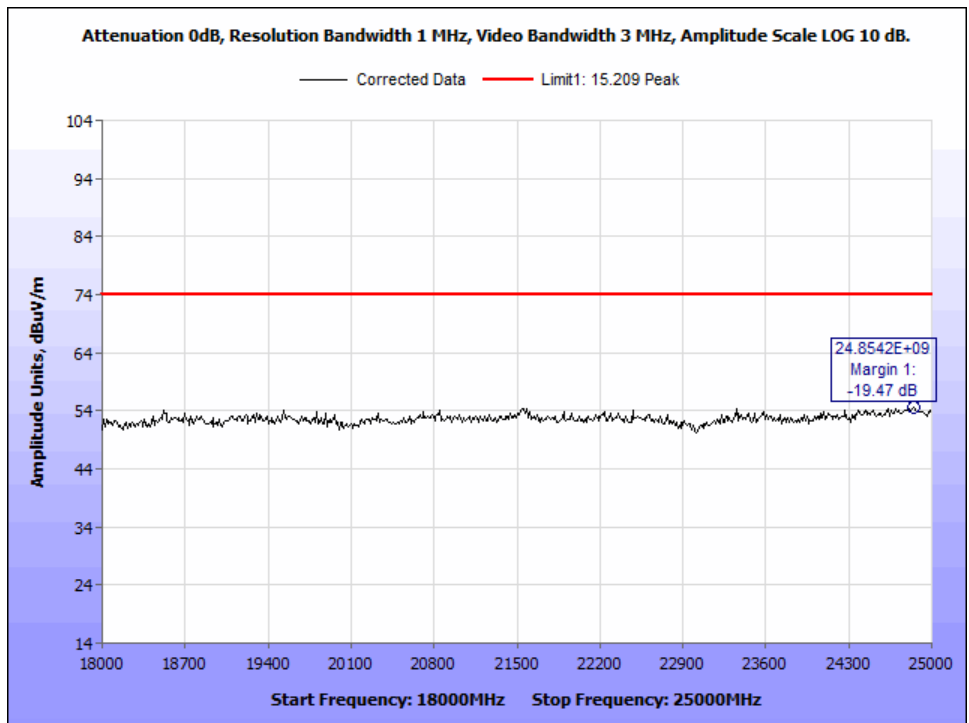


Figure 55: Radiated Spurious Emissions - 2480 MHz - 18-25 GHz - Peak - Horizontal.

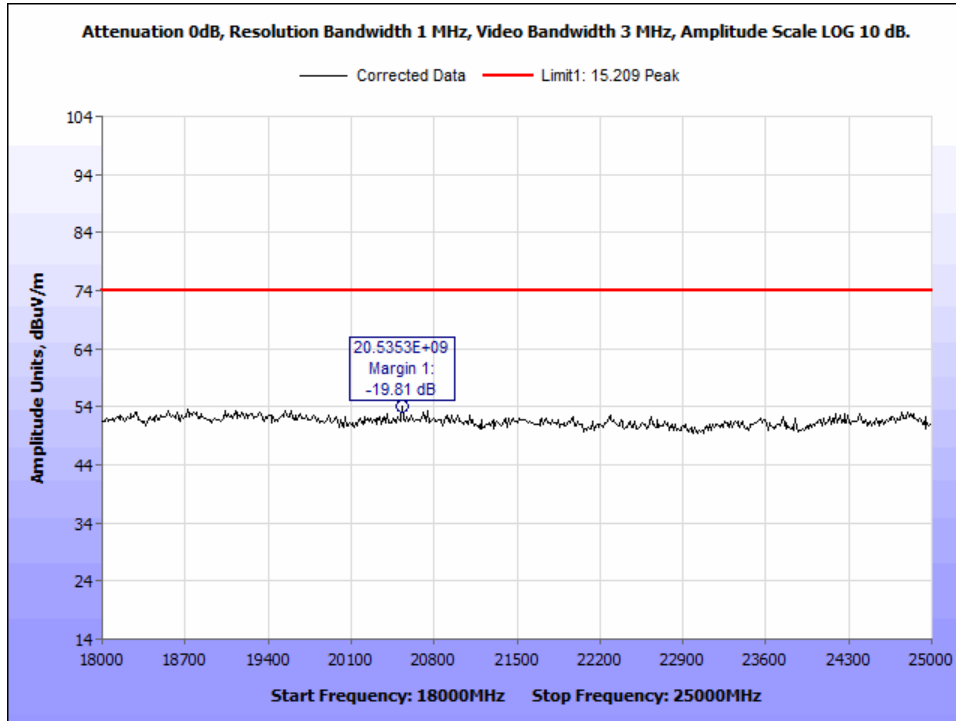


Figure 56: Radiated Spurious Emissions - 2480 MHz - 18-25 GHz - Peak - Vertical.

Radiated Band Edge Measurements

Test Procedures: The transmitter was turned on. Measurements were performed of the low and high Channels. The EUT was rotated orthogonally through all three axes. Plots shown are corrected for both antenna correction factor and distance and compared to a 3 m limit line.

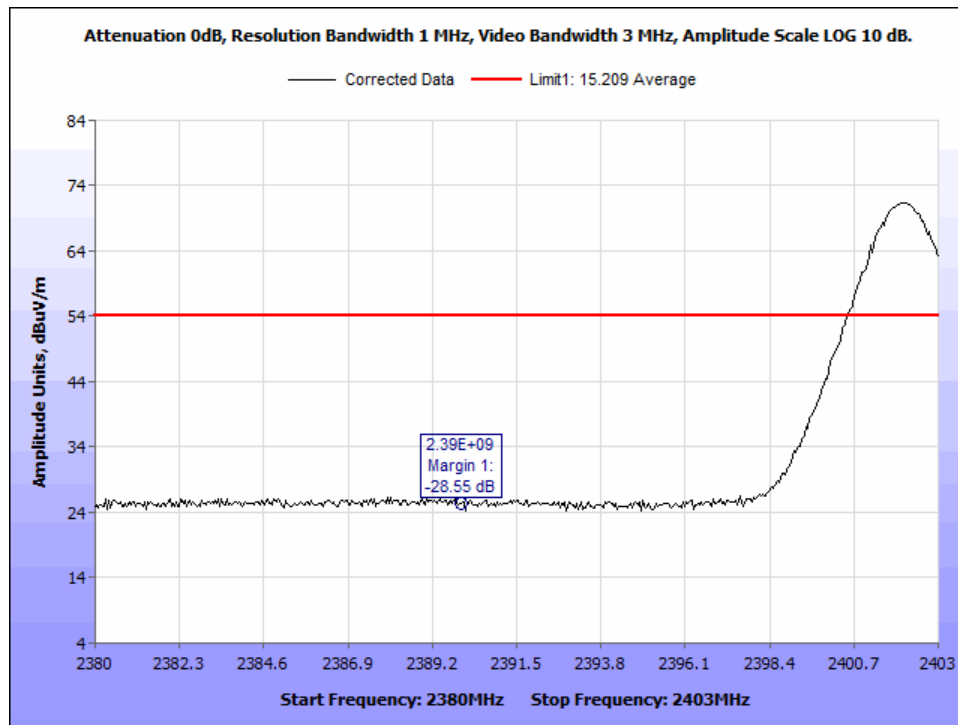


Figure 57: Radiated Bandedge - 2402 MHz - Average - Horizontal.

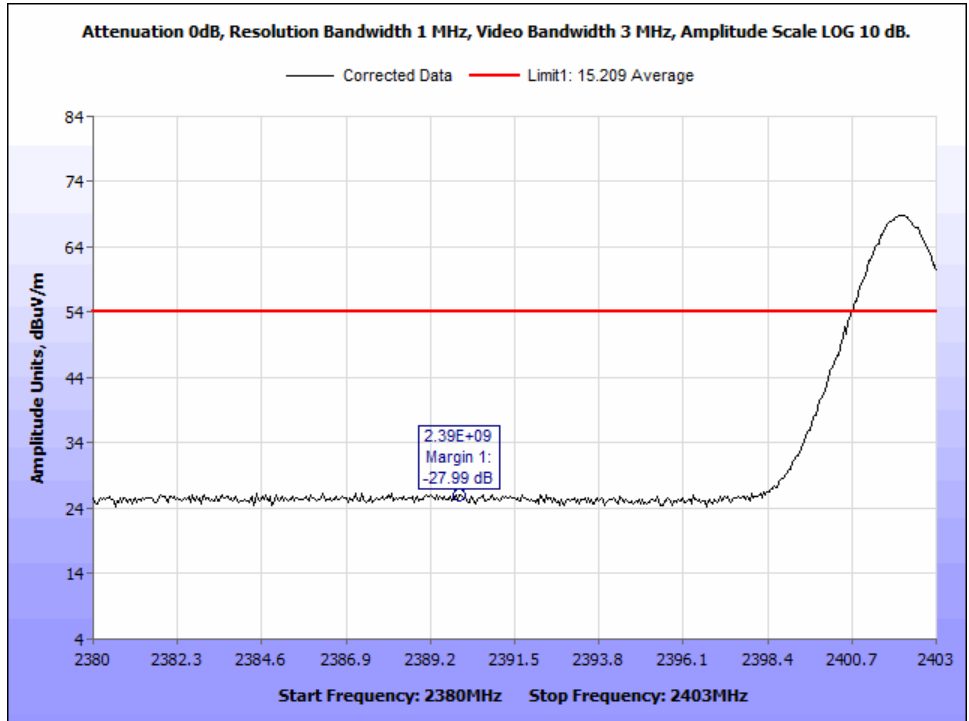


Figure 58: Radiated Bandedge - 2402 MHz - Average - Vertical.

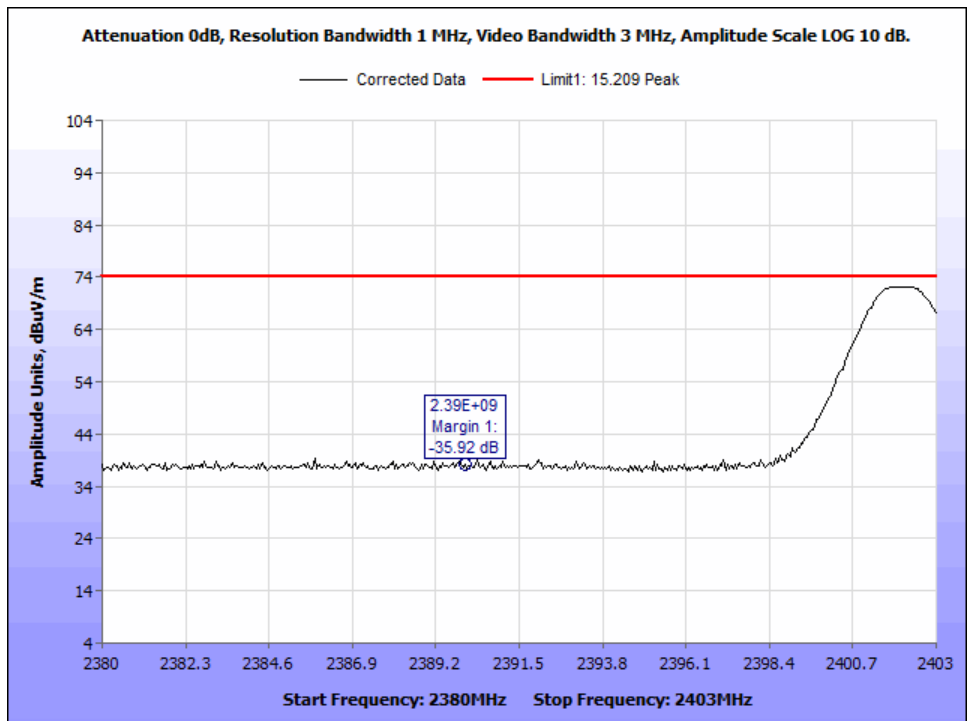


Figure 59: Radiated Bandedge - 2402 MHz - Peak - Horizontal.

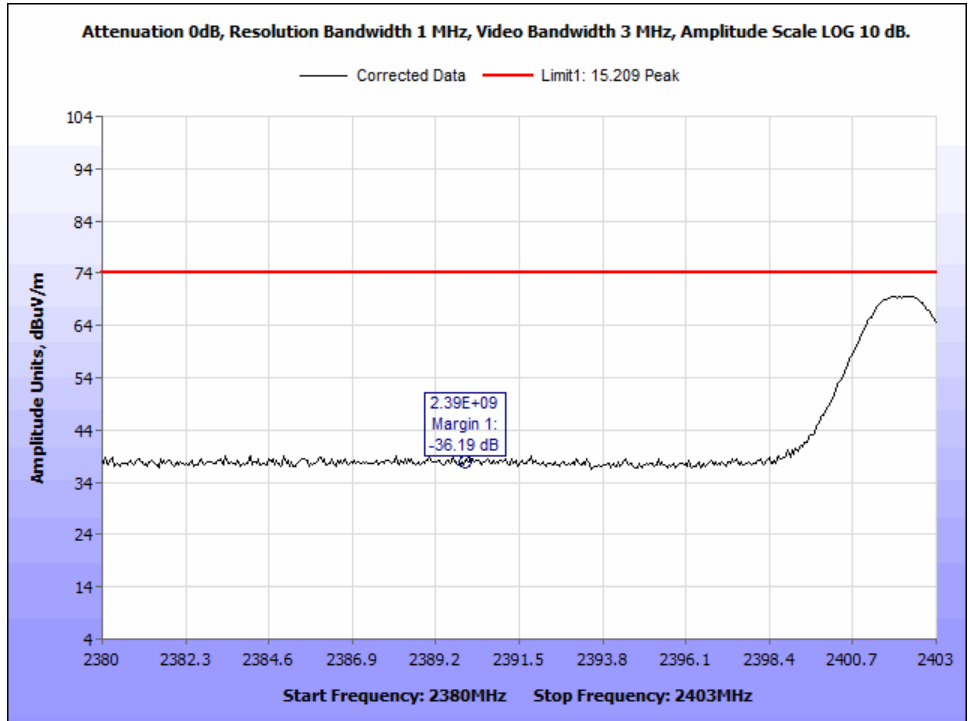


Figure 60: Radiated Bandedge - 2402 MHz - Peak - Vertical.

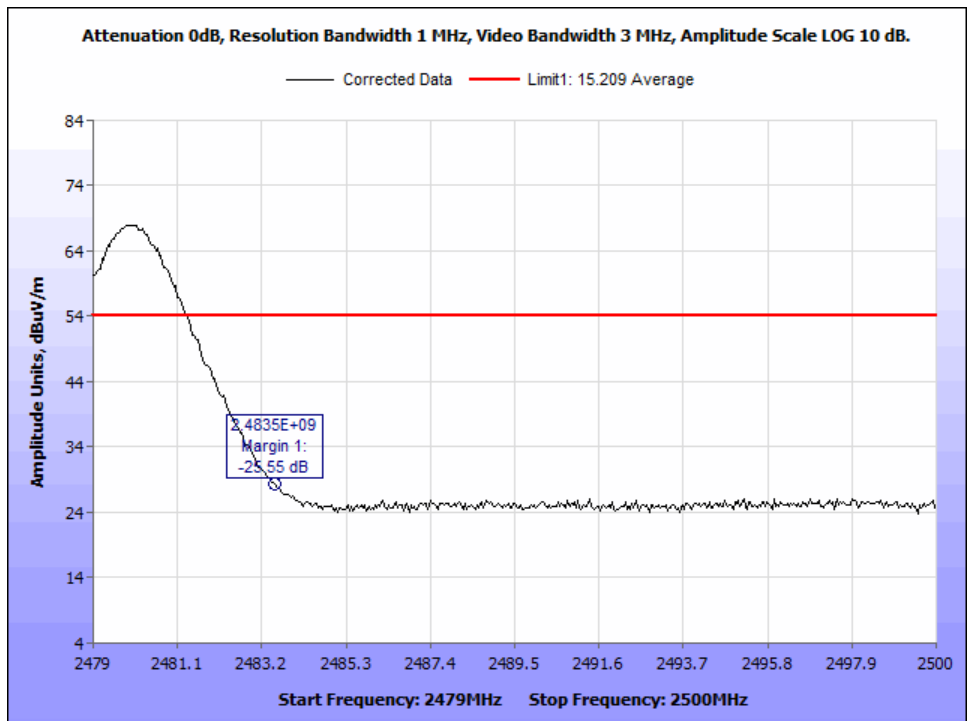


Figure 61: Radiated Bandedge - 2480 MHz - Average - Horizontal.

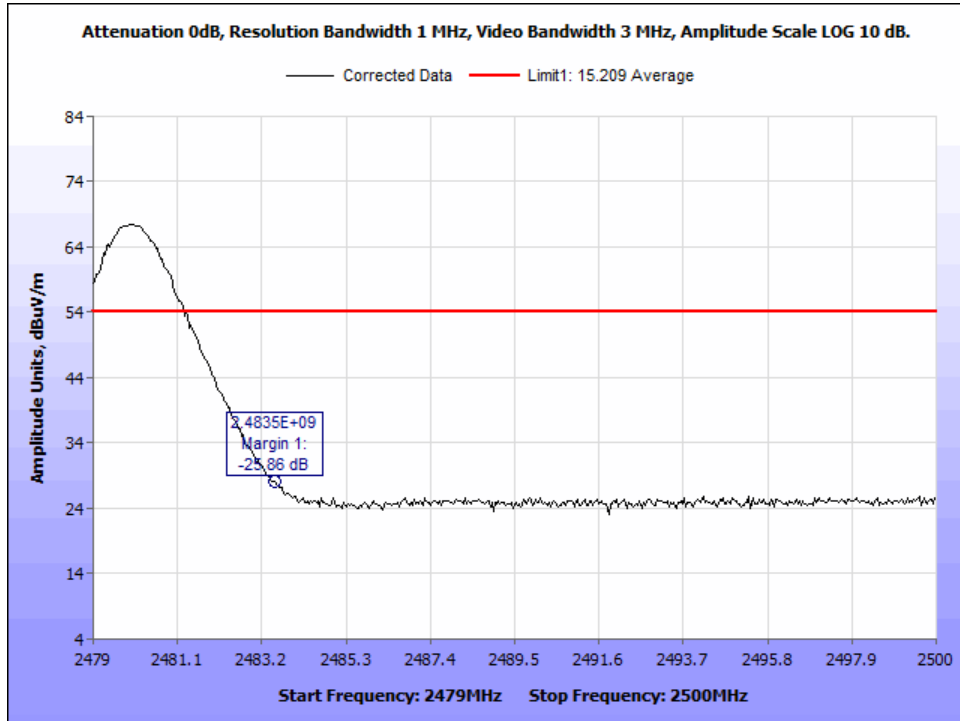


Figure 62: Radiated Bandedge - 2480 MHz - Average - Vertical.

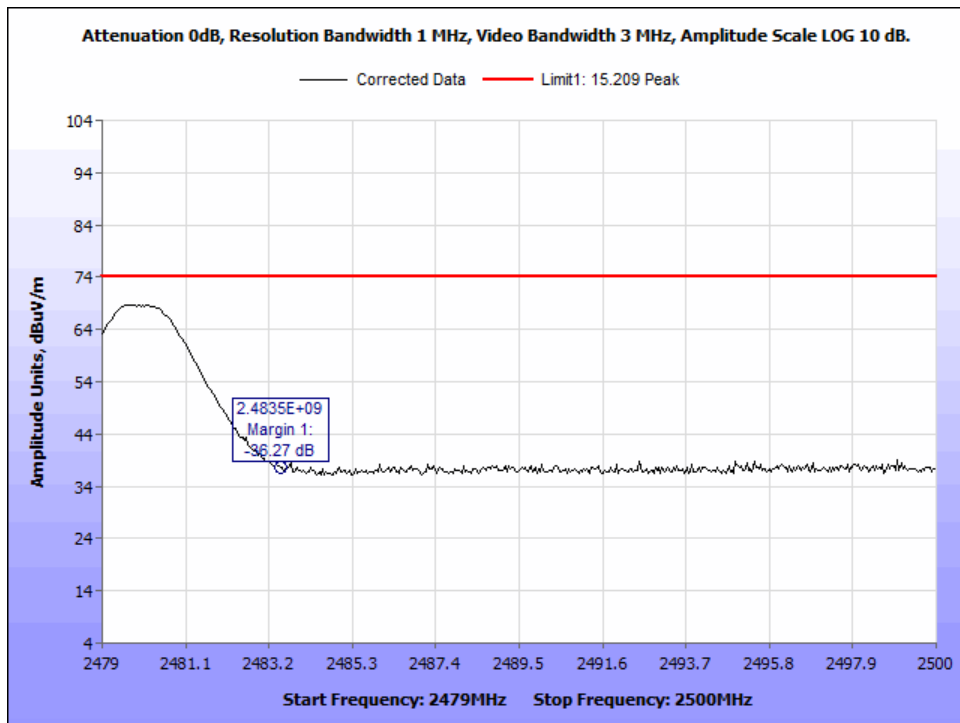


Figure 63: Radiated Bandedge - 2480 MHz - Peak - Horizontal.

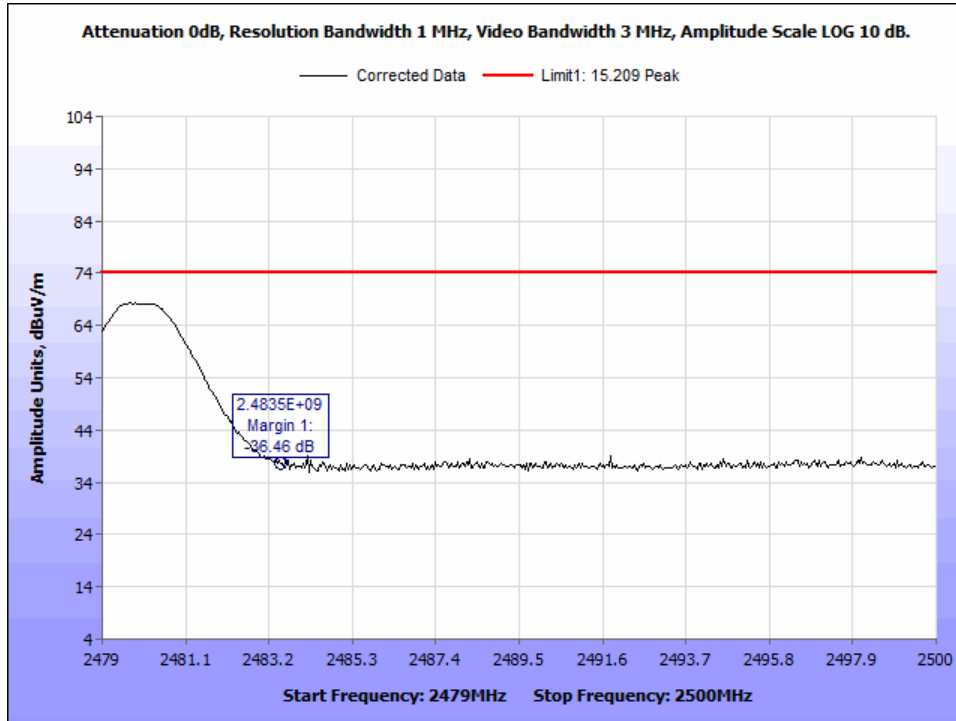


Figure 64: Radiated Bandedge - 2480 MHz - Peak - Vertical.

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(d) Spurious Emissions in Non-restricted Bands

Test Requirement: **15.247(d)** In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Test Procedure: For intentional radiators with a digital device portion which operates below 10 GHz, the spectrum was investigated as per §15.33(a)(1) and §15.33(a)(4); i.e., the lowest RF signal generated or used in the device up to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

Since the EUT had an integral antenna, conducted measurements could not be performed. Measurements needed to be taken radiated. An antenna was located 1 m away from the EUT and plots were taken. The EUT was rotated through all three orthogonal axes. The plots were corrected for both antenna correction factor and cable loss.

Test Results: The EUT was compliant with the Spurious Emission limits of §15.247(d). No anomalies noted.

Test Engineer(s): Adan Arab

Test Date(s): October 20, 2020

Spurious Emissions in Non-restricted Bands, Test Results

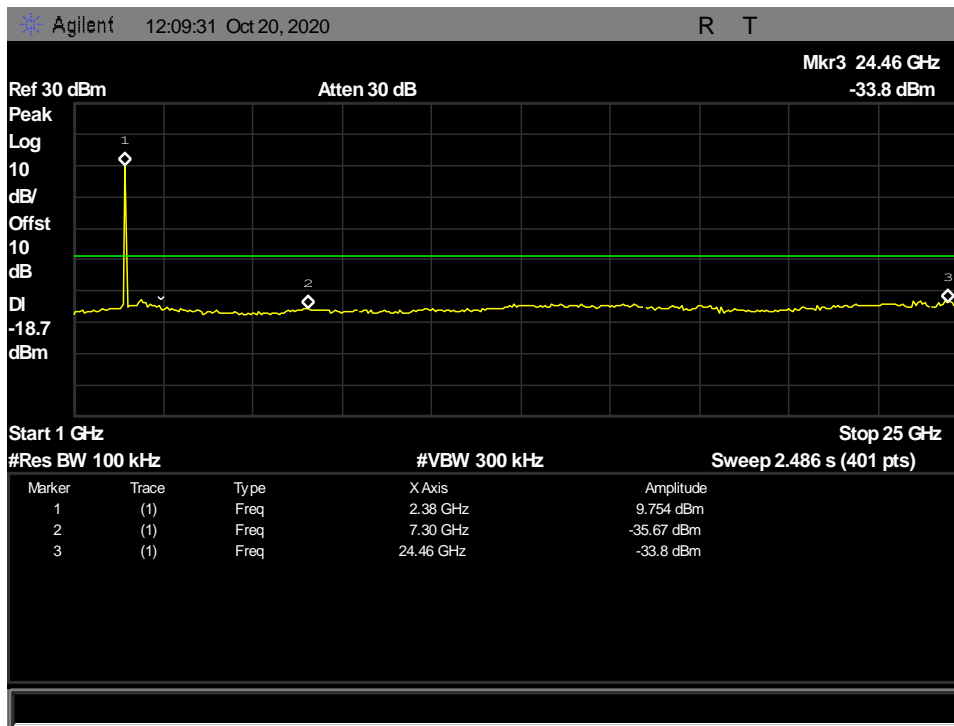


Figure 65: Conducted Spurious Emissions - 2402 MHz - 1GHz-25GHz

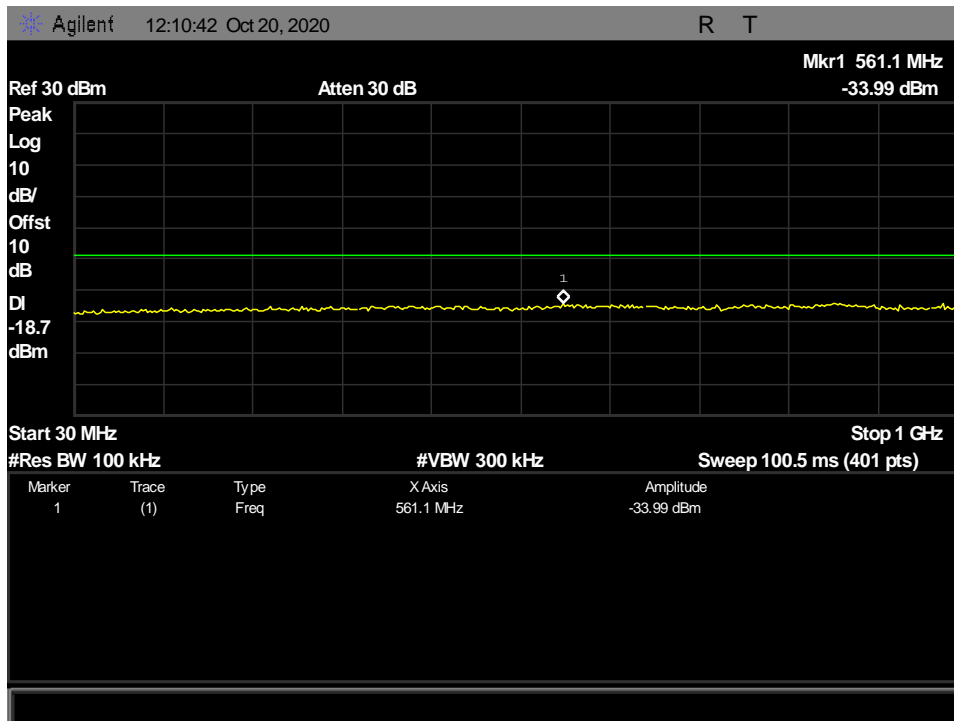


Figure 66: Conducted Spurious Emissions - 2402 MHz - 30MHz-10000MHz

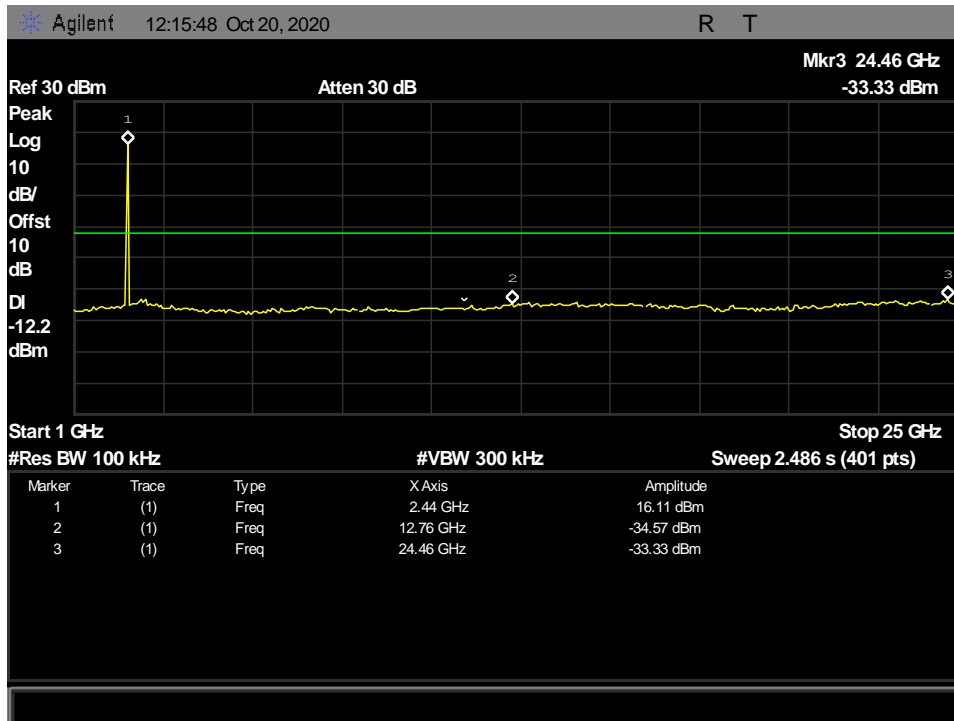


Figure 67: Conducted Spurious Emissions - 2440 MHz - 1GHz-25GHz

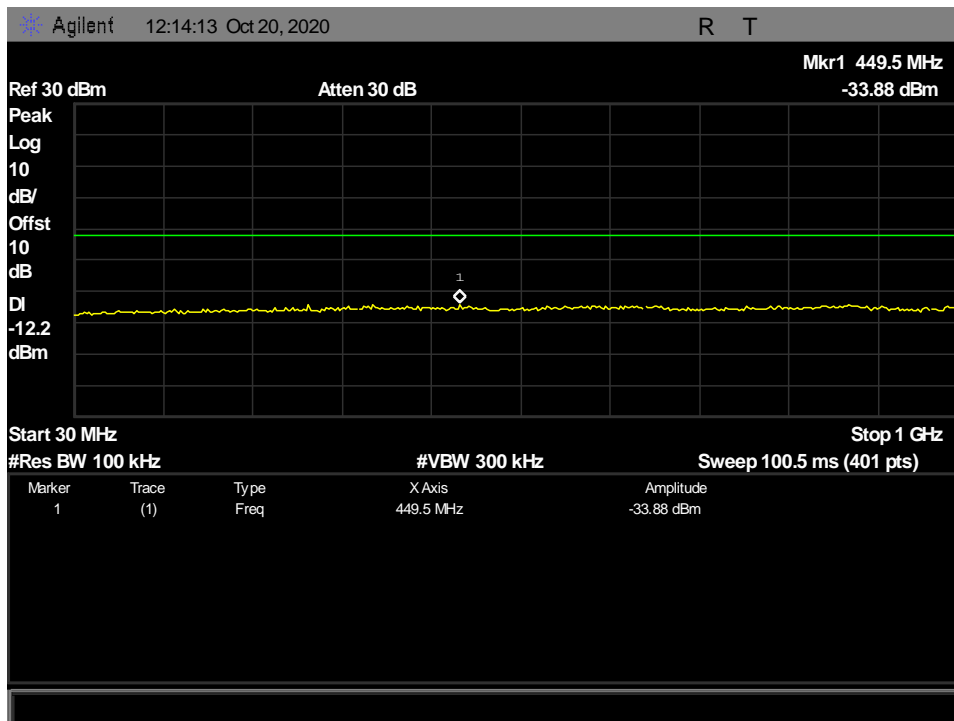


Figure 68: Conducted Spurious Emissions - 2440 MHz - 30MHz-1000MHz

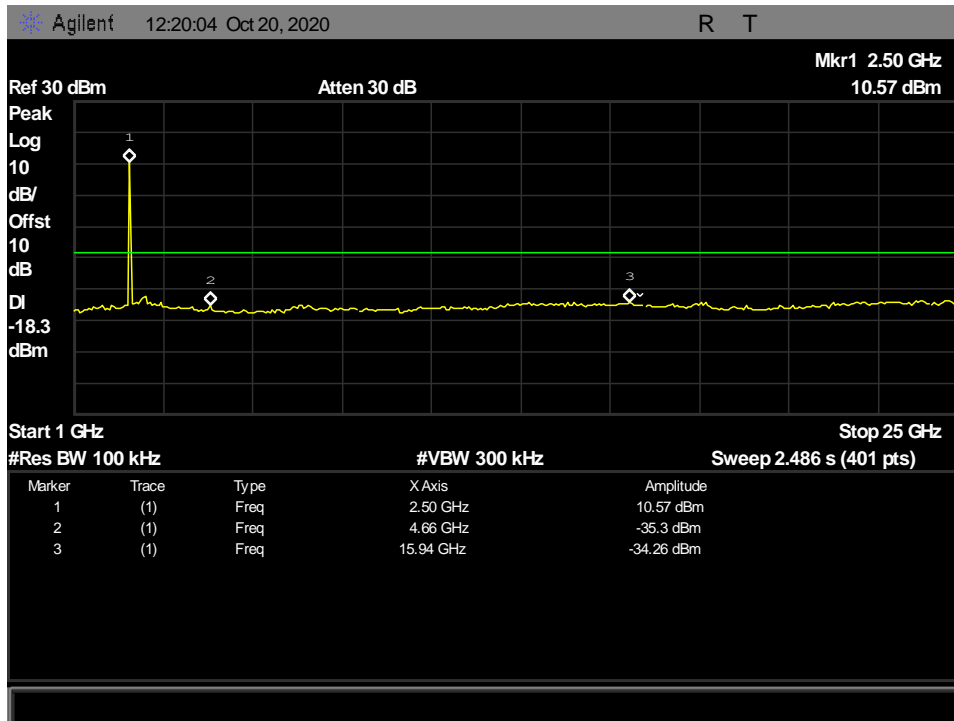


Figure 69: Conducted Spurious Emissions - 2480 MHz - 1GHz-25GHz

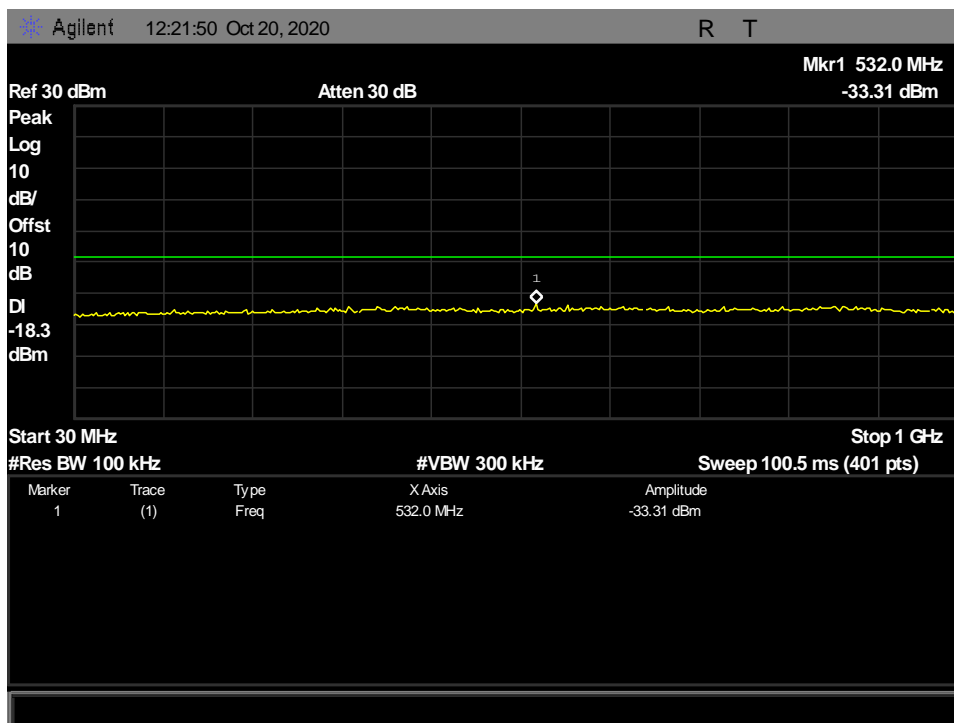


Figure 70: Conducted Spurious Emissions - 2480 MHz - 30MHz-10000MHz

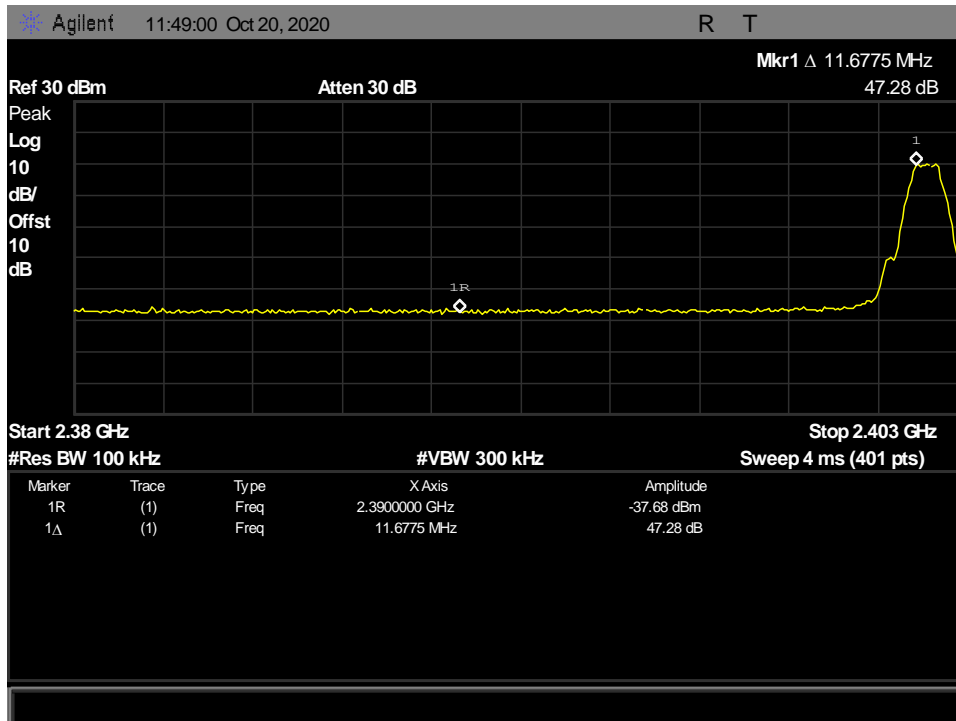


Figure 71: Lower Conducted Bandedge - 2402 MHz

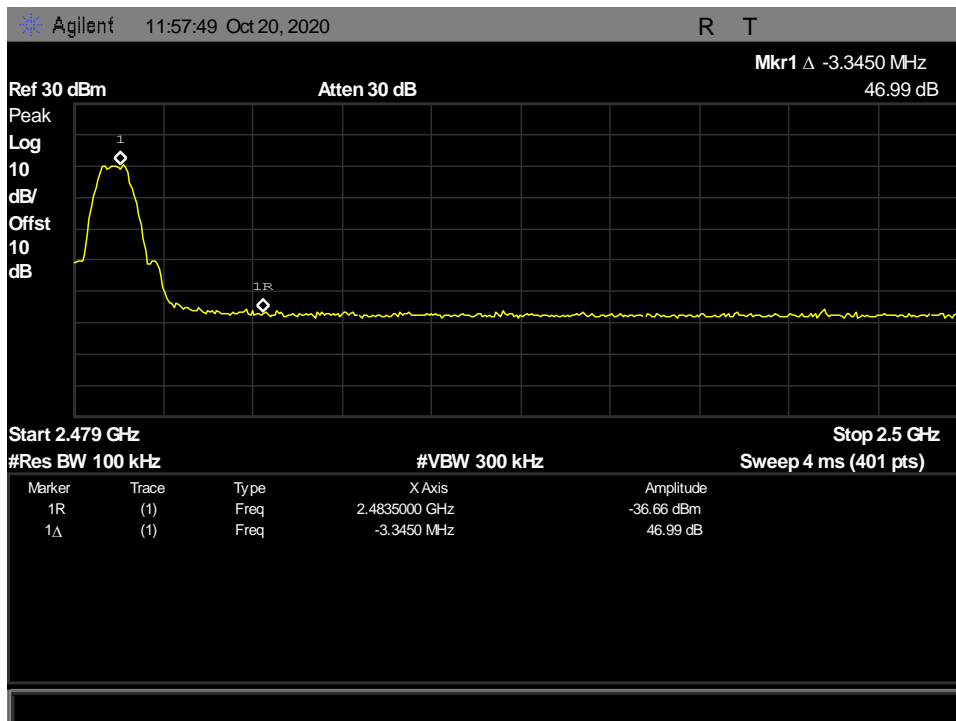


Figure 72: Upper Conducted Bandedge - 2480 MHz

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(e) Peak Power Spectral Density

Test Requirements: §15.247(e): For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

Test Procedure: The power level was set to the maximum level throughout each of the 100 sweeps of power averaging. The RBW was set to 3 kHz and a VBW set to 9 kHz or greater. The spectrum analyzer was set to an auto sweep time and a peak detector was used. Measurements were carried out at the low, mid and high channels. Measurements were performed on a radiated setup, with the receive antenna placed 1m away from the EUT.

Test Results: The EUT was compliant with the peak power spectral density limits of § 15.247 (e). No anomalies noted.

The peak power spectral density was determined from plots on the following page(s).

Test Engineer: Adan Arab

Test Date(s): October 20, 2020

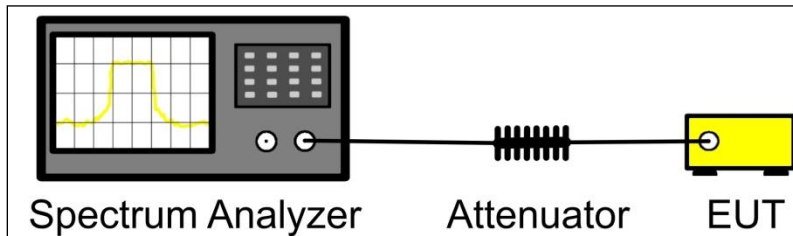


Figure 73: Block Diagram, Power Spectral Density Test Setup

Peak Power Spectral Density Test Results:

Mode	Channel (MHz)	Power Density (dBm)	Limit (dBm/3KHz)
1 Mbps	2402	1.290	8
1 Mbps	2440	7.775	8
1 Mbps	2480	1.675	8

Figure 74: Peak Power Spectral Density, Test Results

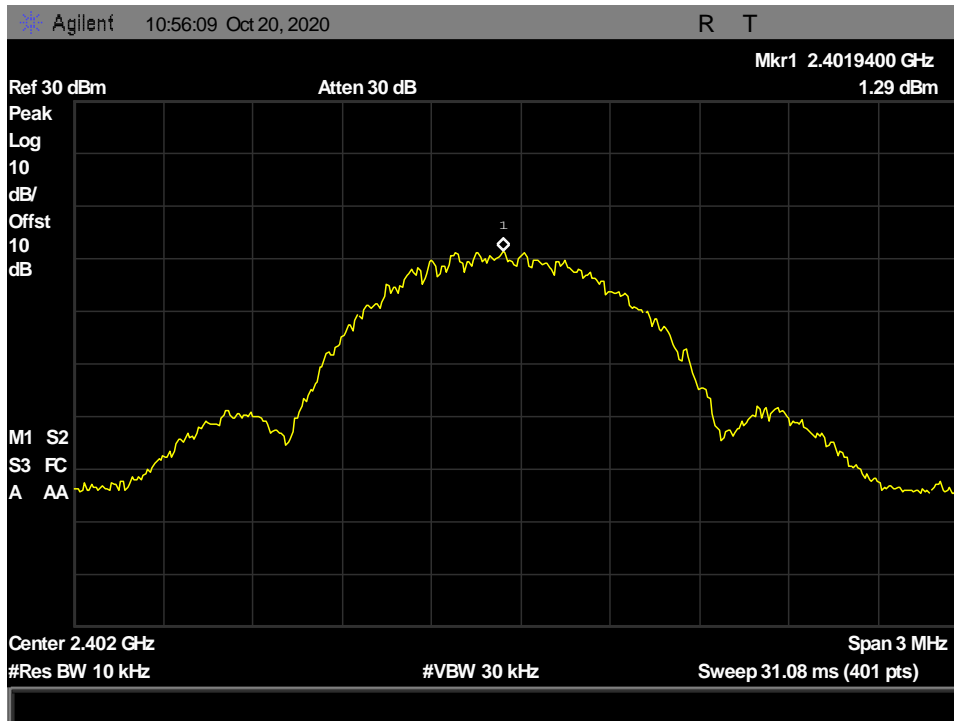


Figure 75: Peak Power Spectral Density - 2402 MHz - 1.29 dBm

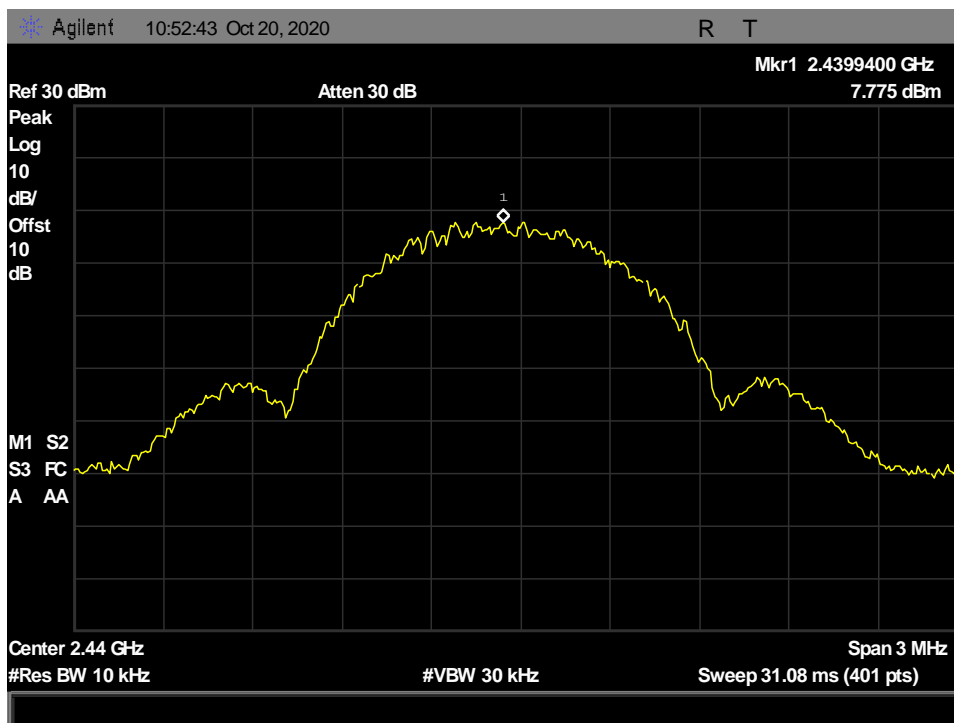


Figure 76: Peak Power Spectral Density - 2440 MHz - 7.775 dBm

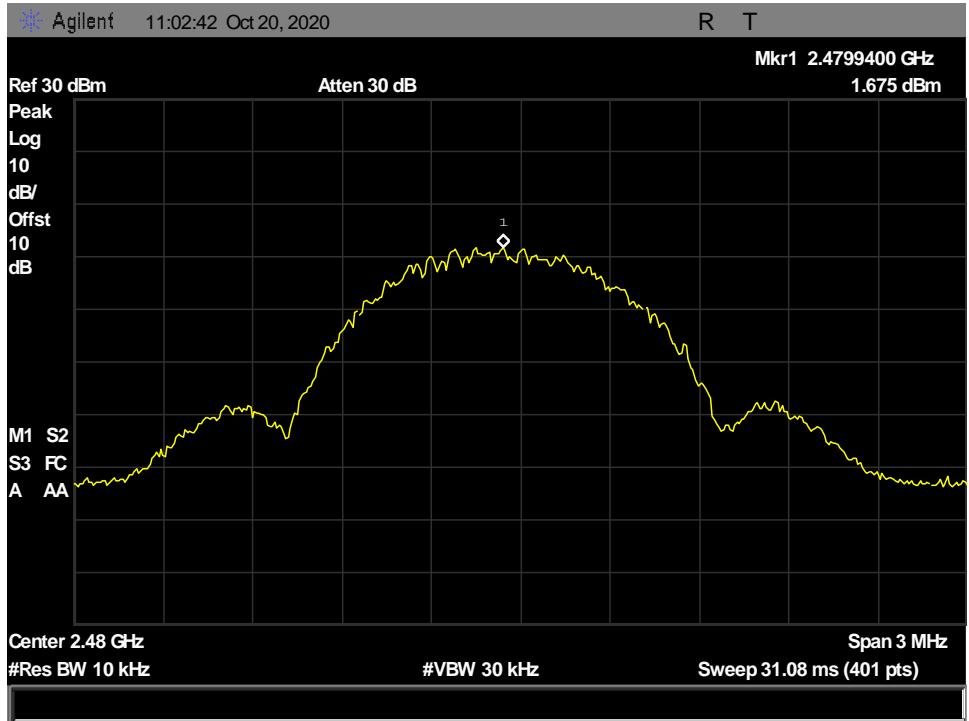


Figure 77: Peak Power Spectral Density - 2480 MHz - 1.675 dBm

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(i) Maximum Permissible Exposure

RF Exposure Requirements: §1.1307(b)(1) and §1.1307(b)(2): Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission’s guidelines.

RF Radiation Exposure Limit: §1.1310: As specified in this section, the Maximum Permissible Exposure (MPE) Limit shall be used to evaluate the environmental impact of human exposure to radiofrequency (RF) radiation as specified in Sec. 1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of Sec. 2.1093 of this chapter.

MPE Limit: EUT’s operating frequencies @ 2400-2483.5 MHz; **Limit for Uncontrolled exposure: 1 mW/cm² or 10 W/m²**

Equation from page 18 of OET 65, Edition 97-01

$$S = PG / 4\pi R^2 \quad \text{or} \quad R = \sqrt{PG / 4\pi S}$$

where, S = Power Density (mW/cm²)
P = Power Input to antenna (mW)
G = Antenna Gain (numeric value)

FCC												
Frequency (MHz)	Measured Conducted Power (dBm)	Expected power Level (dBm)	Tune-up Tolerance (± dB)	Expected Power + Tune-up (dBm)	Expected Power + Tune-up (mW)	Antenna Gain (dBi)	Antenna Gain Numeric	Power Density (mW/cm2)	Limit (mW/cm2)	Margin	Distance (cm)	Result
2440	18.40	19	1.5	21.50	141.254	-3	0.501	0.01408	1	0.98592	20	Pass

Figure: RF Human Exposure, Test Results

The safe distance where Power Density is less than the MPE Limit listed above was found to be 20 cm.

Test Equipment

Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2005.

ASSET #	EQUIPMENT	MANUFACTURER	MODEL	LAST CAL	CAL DUE
1A1191	TEMP, HUMIDITY, AND PRESSURE RECORDER	OMEGA	OM-CP-PRHTEMP2000	1/31/2020	1/31/2021
1A1184	SPECTRUM ANALYZER	AGILENT TECHNOLOGIES	E4407B	08/24/2020	08/24/2021
1A1083	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESU40	10/16/2020	10/16/2021
1A1147	BILOG ANTENNA (30-1000 MHZ)	SUNOL SCIENCES CORP	JB3	06/05/2019	12/05/2020
1A1183	DOUBLE RIDGED WAVEGUIDE ANTENNA (1-18 GHZ)	ETS LINDGREN	3117	06/01/2020	06/01/2022
1A1161	DRG HORN ANTENNA	ETS LINDGREN	3116C-PA	06/03/2020	06/03/2022
1A1099	1A1099	GENERATOR	COM-POWER CORP	SEE NOTE	
1A1044	1A1044	GENERATOR	COM-POWER CORP	SEE NOTE	
1A1088	PRE-AMP	ROHDE & SCHWARZ	TS-PR1	SEE NOTE	
1A1080	MULTI-DEVICE CONTROLLER	ETS-EMCO	2090	SEE NOTE	
1A1073	MULTI-DEVICE CONTROLLER	ETS-EMCO	2090	SEE NOTE	
1A1180	PRE-AMP	MITEQ	AMF-7D-01001800-22-10P	SEE NOTE	
1A1106	10M SEMI-ANECHOIC CHAMBER	LINDGREN	N/A	SEE NOTE	

Figure 78: Test Equipment List

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.

Certification & User's Manual Information

Certification & User's Manual Information

M. Certification Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart I — Marketing of Radio frequency devices:

§ 2.801 Radio-frequency device defined.

As used in this part, a radio-frequency device is any device which in its operation is capable of Emitting radio-frequency energy by radiation, conduction, or other means. Radio- frequency devices include, but are not limited to:

- (a) The various types of radio communication transmitting devices described throughout this chapter.
- (b) *The incidental, unintentional and intentional radiators defined in Part 15 of this chapter.*
- (c) The industrial, scientific, and medical equipment described in Part 18 of this chapter.
- (d) Any part or component thereof which in use emits radio-frequency energy by radiation, conduction, or other means.

§ 2.803 Marketing of radio frequency devices prior to equipment authorization.

- (a) Except as provided elsewhere in this chapter, no person shall sell or lease, or offer for sale or lease (including advertising for sale or lease), or import, ship or distribute for the purpose of selling or leasing or offering for sale or lease, any radio frequency device unless:
 - (1) In the case of a device subject to certification, such device has been authorized by the Commission in accordance with the rules in this chapter and is properly identified and labeled as required by §2.925 and other relevant sections in this chapter; or
 - (2) In the case of a device that is not required to have a grant of equipment authorization issued by the Commission, but which must comply with the specified technical standards prior to use, such device also complies with all applicable administrative (including verification of the equipment or authorization under a Declaration of Conformity, where required), technical, labeling and identification requirements specified in this chapter.
- (d) Notwithstanding the provisions of paragraph (a) of this section, the offer for sale solely to business, commercial, industrial, scientific or medical users (but not an offer for sale to other parties or to end users located in a residential environment) of a radio frequency device that is in the conceptual, developmental, design or pre-production stage is permitted prior to equipment authorization or, for devices not subject to the equipment authorization requirements, prior to a determination of compliance with the applicable technical requirements *provided* that the prospective buyer is advised in writing at the time of the offer for sale that the equipment is subject to the FCC rules and that the equipment will comply with the appropriate rules before delivery to the buyer or to centers of distribution.

- (e)(1) Notwithstanding the provisions of paragraph (a) of this section, prior to equipment authorization or determination of compliance with the applicable technical requirements any radio frequency device may be operated, but not marketed, for the following purposes and under the following conditions:
- (i) *Compliance testing;*
 - (ii) Demonstrations at a trade show provided the notice contained in paragraph (c) of this section is displayed in a conspicuous location on, or immediately adjacent to, the device;
 - (iii) Demonstrations at an exhibition conducted at a business, commercial, industrial, scientific or medical location, but excluding locations in a residential environment, provided the notice contained in paragraphs (c) or (d) of this section, as appropriate, is displayed in a conspicuous location on, or immediately adjacent to, the device;
 - (iv) Evaluation of product performance and determination of customer acceptability, provided such operation takes place at the manufacturer's facilities during developmental, design or pre-production states; or
 - (v) Evaluation of product performance and determination of customer acceptability where customer acceptability of a radio frequency device cannot be determined at the manufacturer's facilities because of size or unique capability of the device, provided the device is operated at a business, commercial, industrial, scientific or medical user's site, but not at a residential site, during the development, design or pre-production stages.
- (e)(2) For the purpose of paragraphs (e)(1)(iv) and (e)(1)(v) of this section, the term *manufacturer's facilities* includes the facilities of the party responsible for compliance with the regulations and the manufacturer's premises, as well as the facilities of other entities working under the authorization of the responsible party in connection with the development and manufacture, but not the marketing, of the equipment.
- (f) For radio frequency devices subject to verification and sold solely to business, commercial, industrial, scientific and medical users (excluding products sold to other parties or for operation in a residential environment), parties responsible for verification of the devices shall have the option of ensuring compliance with the applicable technical specifications of this chapter at each end user's location after installation, provided that the purchase or lease agreement includes a proviso that such a determination of compliance be made and is the responsibility of the party responsible for verification of the equipment.

Certification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart J — Equipment Authorization Procedures:

§ 2.901 Basis and Purpose

- (a) In order to carry out its responsibilities under the Communications Act and the various treaties and international regulations, and in order to promote efficient use of the radio spectrum, the Commission has developed technical standards for radio frequency equipment and parts or components thereof. The technical standards applicable to individual types of equipment are found in that part of the rules governing the service wherein the equipment is to be operated.¹ *In addition to the technical standards provided, the rules governing the service may require that such equipment be verified by the manufacturer or importer, be authorized under a Declaration of Conformity, or receive an equipment authorization from the Commission by one of the following procedures: certification or registration.*
- (b) The following sections describe the verification procedure, the procedure for a Declaration of Conformity, and the procedures to be followed in obtaining certification from the Commission and the conditions attendant to such a grant.

§ 2.907 Certification.

- (a) Certification is an equipment authorization issued by the Commission, based on representation and test data submitted by the applicant.
- (b) Certification attaches to all units subsequently marketed by the grantee which are identical (see Section 2.908) to the sample tested except for permissive changes or other variations authorized by the Commission pursuant to Section 2.1043.

¹ In this case, the equipment is subject to the rules of Part 15. More specifically, the equipment falls under Subpart B (of Part 15), which deals with unintentional radiators.

Certification & User's Manual Information

§ 2.948 Description of measurement facilities.

- (a) Each party making measurements of equipment that is subject to an equipment authorization under Part 15 or Part 18 of this chapter, regardless of whether the measurements are filed with the Commission or kept on file by the party responsible for compliance of equipment marketed within the U.S. or its possessions, shall compile a description of the measurement facilities employed.
- (1) If the measured equipment is subject to the verification procedure, the description of the measurement facilities shall be retained by the party responsible for verification of the equipment.
- (i) *If the equipment is verified through measurements performed by an independent laboratory, it is acceptable for the party responsible for verification of the equipment to rely upon the description of the measurement facilities retained by or placed on file with the Commission by that laboratory. In this situation, the party responsible for the verification of the equipment is not required to retain a duplicate copy of the description of the measurement facilities.*
- (ii) If the equipment is verified based on measurements performed at the installation site of the equipment, no specific site calibration data is required. It is acceptable to retain the description of the measurement facilities at the site at which the measurements were performed.
- (2) If the equipment is to be authorized by the Commission under the certification procedure, the description of the measurement facilities shall be filed with the Commission's Laboratory in Columbia, Maryland. The data describing the measurement facilities need only be filed once but must be updated as changes are made to the measurement facilities or as otherwise described in this section. At least every three years, the organization responsible for filing the data with the Commission shall certify that the data on file is current.

Certification & User's Manual Information

1. Label and User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart A — General:

§ 15.19 Labeling requirements.

(a) *In addition to the requirements in Part 2 of this chapter, a device subject to certification or verification shall be labeled as follows:*

- (1) Receivers associated with the operation of a licensed radio service, e.g., FM broadcast under Part 73 of this chapter, land mobile operation under Part 90, etc., shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

- (2) A stand-alone cable input selector switch, shall bear the following statement in a conspicuous location on the device:

This device is verified to comply with Part 15 of the FCC Rules for use with cable television service.

- (3) All other devices shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

- (4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified under paragraph (a) of this section is required to be affixed only to the main control unit.

- (5) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

§ 15.21 Information to user.

The user's manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Verification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart B — Unintentional Radiators:

§ 15.105 Information to the user.

- (a) For a Class A digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at own expense.

- (b) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

End of Report