

FCC Part 15, Subpart B, Class B

TEST REPORT

Shenzhen Jiayz photo industrial., Ltd

2.4G wireless microphone

Test Model: BY-WM4 PRO RXU

Additional Model No.: BY-WM4 PRO-K5, BY-WM4 PRO-K6

Prepared for : Shenzhen Jiayz photo industrial., Ltd  
Address : A16 Building, Intelligent Terminal Industrial Park of  
Silicon Valley Power, Guanla, Longhua District,  
Shenzhen, China

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.  
Address : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park  
Shajing Street, Baoan District, Shenzhen, China  
Tel : (+86)755-82591330  
Fax : (+86)755-82591332  
Web : www.LCS-cert.com  
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : April 02, 2020  
Number of tested samples : 1  
Serial number : Prototype  
Date of Test : April 02, 2020 ~ April 07, 2020  
Date of Report : April 14, 2020

## FCC TEST REPORT FCC Part 15, Subpart B, Class B

**Report Reference No.** ..... : **LCS200301011AEA**

**Date Of Issue** ..... : April 14, 2020

**Testing Laboratory Name** .... : **Shenzhen LCS Compliance Testing Laboratory Ltd.**

**Address** ..... : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Shajing Street, Baoan District, Shenzhen, China

**Testing Location/ Procedure...** : Full application of Harmonised standards   
 Partial application of Harmonised standards   
 Other standard testing method

**Applicant's Name**..... : **Shenzhen Jiayz photo industrial., Ltd**

**Address** ..... : A16 Building, Intelligent Terminal Industrial Park of Silicon Valley Power, Guanla, Longhua District, Shenzhen, China

**Test Specification**

**Standard**..... : FCC Part 15, Subpart B, Class B, ANSI C63.4 -2014

**Test Report Form No.**..... : LCSEMC-1.0

**TRF Originator**..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

**Master TRF**..... : Dated 2011-03

**SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD. is acknowledged as copyright owner and source of the material. SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Test Item Description**..... : **2.4G wireless microphone**


**Trade Mark** ..... : BOYA

**Test Model**..... : BY-WM4 PRO RXU

**Ratings** ..... : Input: DC 5V, 0.5W


**Result** ..... : **Positive**

**Compiled by:**



Ray Yang / File administrators

**Supervised by:**



Jin Wang / Technique principal

**Approved by:**



Gavin Liang/ Manager

## FCC -- TEST REPORT

<b>Test Report No. :    LCS200301011AEA</b>	<u>April 14, 2020</u> Date of issue
---	--

Test Model ..... : BY-WM4 PRO RXU
EUT..... : 2.4G wireless microphone
<b>Applicant..... : Shenzhen Jiayz photo industrial., Ltd</b> Address..... : A16 Builing, Intelligent Terminal Industrial Park of Sililcon Valley Power, Guanla, Longhua District, Shenzhen, China Telephone..... : / Fax..... : /
<b>Manufacturer..... : Shenzhen Jiayz photo industrial., Ltd</b> Address..... : A16 Builing, Intelligent Terminal Industrial Park of Sililcon Valley Power, Guanla, Longhua District, Shenzhen, China Telephone..... : / Fax..... : /
<b>Factory..... : /</b> Address..... : / Telephone..... : / Fax..... : /

<b>Test Result</b> according to the standards on page 6: <b>Positive</b>
--

The test report merely corresponds to the test sample.  
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## Revision History

Revision	Issue Date	Revisions	Revised By
000	April 14, 2020	Initial Issue	Gavin Liang

## TABLE OF CONTENTS

Test Report Description	Page
<b>1. SUMMARY OF STANDARDS AND RESULTS .....</b>	<b>6</b>
<b>1.1. Description of Standards and Results .....</b>	<b>6</b>
<b>2. GENERAL INFORMATION .....</b>	<b>7</b>
2.1. Description of Device (EUT).....	7
2.2. Support Equipment List.....	7
2.3. Description of Test Facility .....	7
2.4. Statement of the Measurement Uncertainty .....	8
2.5. Measurement Uncertainty.....	8
<b>3. TEST RESULTS .....</b>	<b>9</b>
3.1. POWER LINE CONDUCTED EMISSION MEASUREMENT .....	9
3.2. Radiated emission Measurement .....	13
<b>4. TEST SETUP PHOTOGRAPHS OF EUT .....</b>	<b>18</b>
<b>5. EXTERIOR PHOTOGRAPHS OF THE EUT .....</b>	<b>18</b>
<b>6. INTERIOR PHOTOGRAPHS OF THE EUT.....</b>	<b>18</b>

# 1. SUMMARY OF STANDARDS AND RESULTS

## 1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION			
Description of Test Item	Standard	Limits	Results
Conducted disturbance at mains terminals	FCC Part 15, Subpart B, Class B, ANSI C63.4 -2014	Class B	PASS
Radiated disturbance	FCC Part 15, Subpart B, Class B, ANSI C63.4 -2014	Class B	PASS
N/A is an abbreviation for Not Applicable.			

There was 2 test Modes. TM1 to TM2 were shown below:

TM1 : Operate in 2.4G Receive mode;

TM2 : Idle mode

\*\*\*Note:

1. All test modes were tested, but we only recorded the worst case in this report.

## 2. GENERAL INFORMATION

### 2.1. Description of Device (EUT)

EUT : 2.4G wireless microphone

Trade Mark : BY

List Model No. : BY-WM4 PRO-K5, BY-WM4 PRO-K6

Model Declaration : PCB board, structure and internal of these model(s) are the same, So no additional models were tested.

Test Model : BY-WM4 PRO RXU

Power Supply : Input: DC 5V, 0.5W

Highest internal frequency (Fx)	Highest measured frequency
Fx ≤ 108 MHz	1 GHz
108 MHz < Fx ≤ 500 MHz	2 GHz
500 MHz < Fx ≤ 1 GHz	5 GHz
Fx > 1 GHz	5 × Fx up to a maximum of 6 GHz

NOTE 1 For FM and TV broadcast receivers, Fx is determined from the highest frequency generated or used excluding the local oscillator and tuned frequencies.  
Where Fx is unknown, the radiated emission measurements shall be performed up to 6 GHz.

### 2.2. Support Equipment List

Name	Manufacturers	M/N	S/N
--	--	--	--

### 2.3. Description of Test Facility

Site Description  
EMC Lab. : FCC Registration Number is 254912.

Industry Canada Registration Number is 9642A.

ESMD Registration Number is ARCB0108.

UL Registration Number is 100571-492.

TUV SUD Registration Number is SCN1081.

TUV RH Registration Number is UA 50296516-001.

NVLAP Registration Code is 600167-0.

## 2.4. Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

## 2.5. Measurement Uncertainty

Test	Parameters	Expanded Uncertainty (U <sub>lab</sub> )	Expanded Uncertainty (U <sub>cispr</sub> )
Conducted Emission	Level accuracy (9kHz to 150kHz) (150kHz to 30MHz)	± 2.63 dB ± 2.35 dB	± 3.8 dB ± 3.4 dB
Radiated Emission	Level accuracy (30MHz to 1000MHz)	± 3.48 dB	± 5.3 dB
Radiated Emission	Level accuracy (above 1000MHz)	± 3.90 dB	± 5.2 dB

(1) Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus.

(2) The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor of k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.



### 3. TEST RESULTS


#### 3.1. POWER LINE CONDUCTED EMISSION MEASUREMENT

##### 3.1.1. Test Equipment

The following test equipments are used during the power line conducted measurement:

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI Test Software	EZ	EZ-EMC	/	N/A
2	EMI Test Receiver	R&S	ESPI	101840	2019-06-11
3	Artificial Mains	R&S	ENV216	101288	2019-06-12
4	10dB Attenuator	SCHWARZBECK	MTS-IMP-136	261115-001 -0032	2019-06-11

##### 3.1.2. Block Diagram of Test Setup

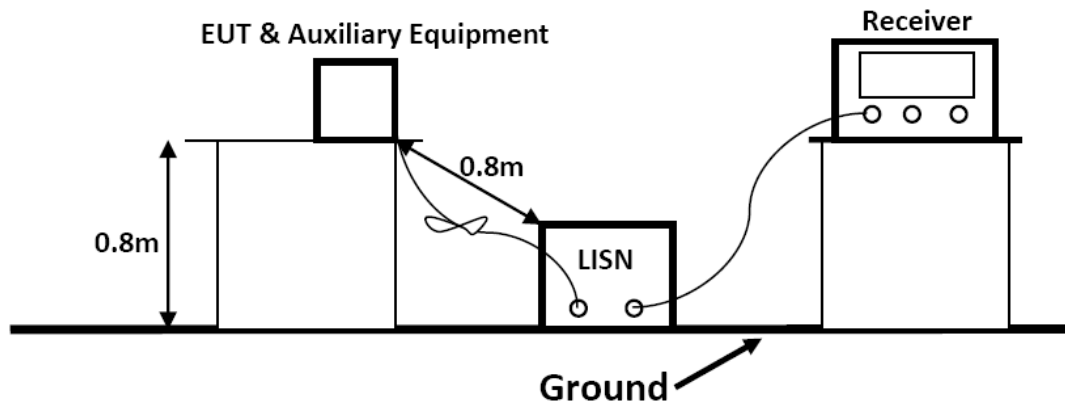

##### 3.1.3. Test Standard

###### Power Line Conducted Emission Limits (Class B)

Frequency (MHz)			Limit (dB $\mu$ V)	
			Quasi-peak Level	Average Level
0.15	~	0.50	66.0 ~ 56.0 *	56.0 ~ 46.0 *
0.50	~	5.00	56.0	46.0
5.00	~	30.00	60.0	50.0

NOTE1-The lower limit shall apply at the transition frequencies.

NOTE2-The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

##### 3.1.4. EUT Configuration on Test

The following equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner, which tends to maximize its emission characteristics in a normal application.

### 3.1.5. Operating Condition of EUT

3.1.5.1. Setup the EUT as shown on Section 3.1.2

3.1.5.2. Turn on the power of all equipments.

3.1.5.3. Let the EUT work in measuring Mode 1 and measure it.

### 3.1.6. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC/ANSI C63.4-2014 on Conducted Emission Measurement.

The bandwidth of the test receiver is set at 9kHz.


The frequency range from 150kHz to 30MHz is investigated

### 3.1.7. Test Results

**PASS.**

The test result please refer to the next page.


<b>Test Model</b>	BY-WM4 PRO RXU	<b>Test Mode</b>	Mode 1
<b>Environmental Conditions</b>	23.3°C, 53.7% RH	<b>Test Engineer</b>	Diamond Lu
<b>Pol</b>	Line	<b>Test Voltage</b>	AC 120V/60Hz

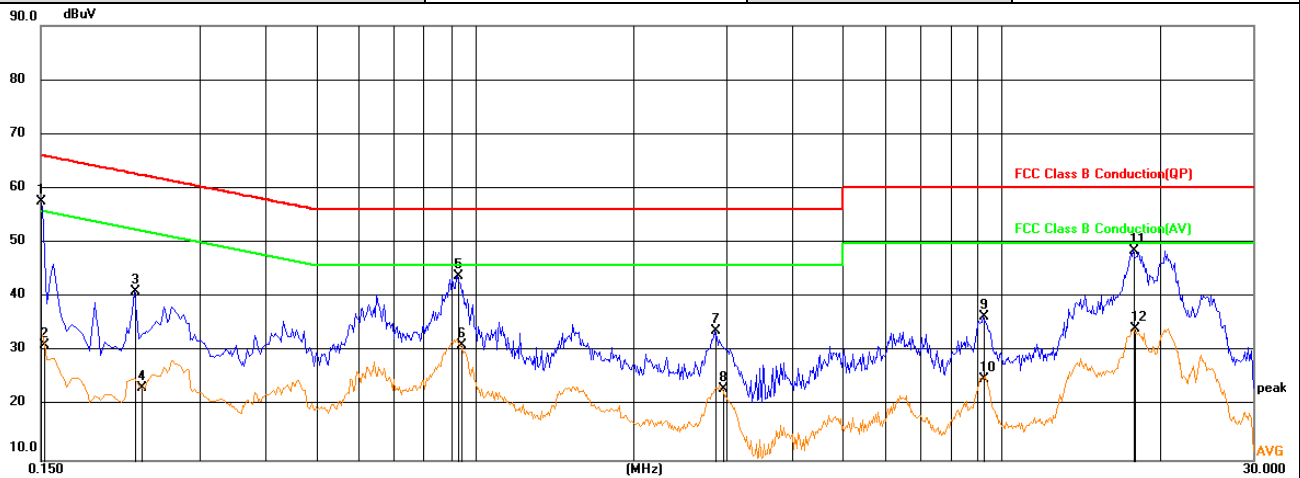

Temp.( )/Hum.(%RH):	23.3 / 53.7	Probe:	L1
Standard:	FCC Class B Conduction(QP)		
Test item:	Conduction Test		
Note:			

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1	0.1500	38.56	19.14	57.70	66.00	-8.30	QP
2	0.1524	12.18	19.14	31.32	55.87	-24.55	AVG
3	0.2265	21.97	19.21	41.18	62.58	-21.40	QP
4	0.2329	4.29	19.21	23.50	52.35	-28.85	AVG
5	0.9330	24.71	19.28	43.99	56.00	-12.01	QP
6	0.9420	11.92	19.28	31.20	46.00	-14.80	AVG
7	2.8680	14.42	19.45	33.87	56.00	-22.13	QP
8	2.9490	3.65	19.46	23.11	46.00	-22.89	AVG
9	9.2490	16.88	19.66	36.54	60.00	-23.46	QP
10	9.2490	5.43	19.66	25.09	50.00	-24.91	AVG
11	17.8260	28.56	20.13	48.69	60.00	-11.31	QP
12	17.9250	14.09	20.13	34.22	50.00	-15.78	AVG

<b>Test Model</b>	BY-WM4 PRO RXU	<b>Test Mode</b>	Mode 1
<b>Environmental Conditions</b>	23.3°C, 53.7% RH	<b>Test Engineer</b>	Diamond Lu
<b>Pol</b>	Neutral	<b>Test Voltage</b>	AC 120V/60Hz

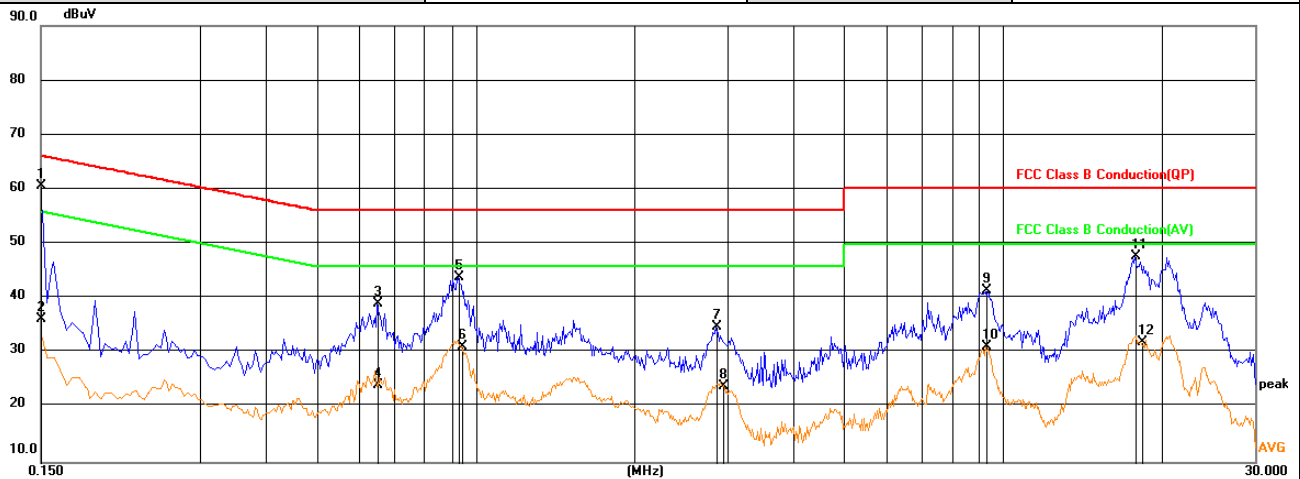

<b>Temp.( )/Hum.(%RH):</b>	23.3 / 53.7	<b>Probe:</b>	N
<b>Standard:</b>	FCC Class B Conduction(QP)		
<b>Test item:</b>	Conduction Test		
<b>Note:</b>			

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1500	41.56	19.14	60.70	66.00	-5.30	QP
2	0.1500	17.21	19.14	36.35	56.00	-19.65	AVG
3	0.6540	19.90	19.23	39.13	56.00	-16.87	QP
4	0.6543	4.95	19.23	24.18	46.00	-21.82	AVG
5	0.9330	24.71	19.28	43.99	56.00	-12.01	QP
6	0.9420	11.92	19.28	31.20	46.00	-14.80	AVG
7	2.8680	15.42	19.45	34.87	56.00	-21.13	QP
8	2.9400	4.46	19.46	23.92	46.00	-22.08	AVG
9	9.2580	21.77	19.67	41.44	60.00	-18.56	QP
10	9.2580	11.49	19.67	31.16	50.00	-18.84	AVG
11	17.8260	27.56	20.13	47.69	60.00	-12.31	QP
12	18.2715	11.88	20.12	32.00	50.00	-18.00	AVG

Note: Pre-Scan all mode, Thus record worse case mode result in this report.


### 3.2. Radiated emission Measurement

#### 3.2.1. Test Equipment

The following test equipments are used during the radiated emission measurement:

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI Test Software	EZ	EZ-EMC	/	N/A
2	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	2019-06-12
3	Positioning Controller	MF	MF-7082	/	2019-06-12
4	By-log Antenna	SCHWARZBECK	VULB9163	9163-470	2019-07-25
5	Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1925	2019-07-01
6	EMI Test Receiver	R&S	ESR 7	101181	2019-06-12
7	RS SPECTRUM ANALYZER	R&S	FSP40	100503	2019-11-14
8	Broadband Preamplifier	/	BP-01M18G	P190501	2019-07-01
9	RF Cable-R03m	Jye Bao	RG142	CB021	2019-06-12
10	RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	2019-06-12

#### 3.2.2. Block Diagram of Test Setup

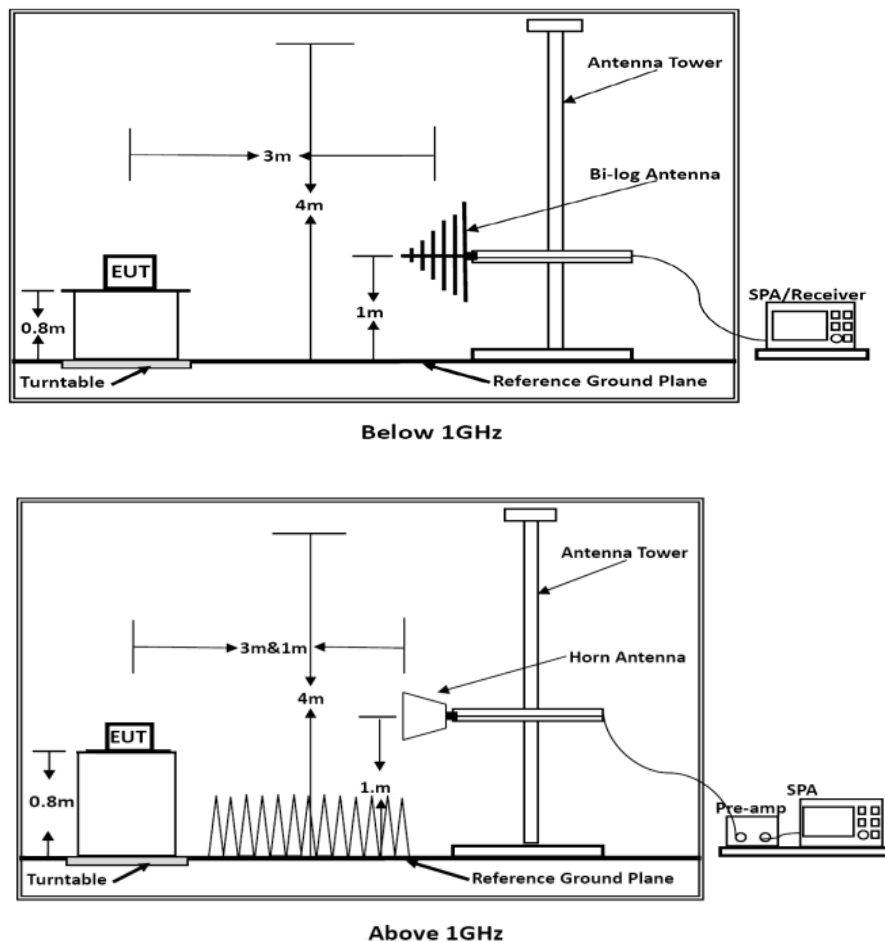

### 3.2.3. Radiated Emission Limit (Class B)

Limits for Radiated Disturbance Below 1GHz

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
30 ~ 88	3	100	40
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46
960 ~ 1000	3	500	54

Remark : (1) Emission level (dB)μV = 20 log Emission level μV/m  
 (2) The smaller limit shall apply at the cross point between two frequency bands.  
 (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

Limits for Radiated Emission Above 1GHz

Frequency (MHz)	Distance (Meters)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)
Above 1000	3	74	54

\*\*\*Note: The lower limit applies at the transition frequency.

### 3.2.4. EUT Configuration on Measurement

The following equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 3.2.5. Operating Condition of EUT

3.2.5.1. Setup the EUT as shown in Section 3.2.2.

3.2.5.2. Let the EUT work in test Mode 1 and measure it.

### 3.2.6. Test Procedure

EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated by-log antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna is set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4-2014 on radiated emission measurement.

The bandwidth of the EMI test receiver is set at 120kHz, 300kHz.

The frequency range from 30MHz to 1000MHz is checked.

The bandwidth of the EMI test receiver is set at 1MHz, 3MHz.


The frequency range from 1GHz to 13GHz is checked.

### 3.2.7. Radiated Emission Noise Measurement Result

**PASS.**


The scanning waveforms please refer to the next page.

<b>Test Model</b>	BY-WM4 PRO RXU	<b>Test Mode</b>	Mode 1
<b>Environmental Conditions</b>	24.6°C, 54.1% RH	<b>Detector Function</b>	Quasi-peak
<b>Pol</b>	Vertical	<b>Distance</b>	3m
<b>Test Engineer</b>	Diamond Lu	<b>Test Voltage</b>	DC 5V

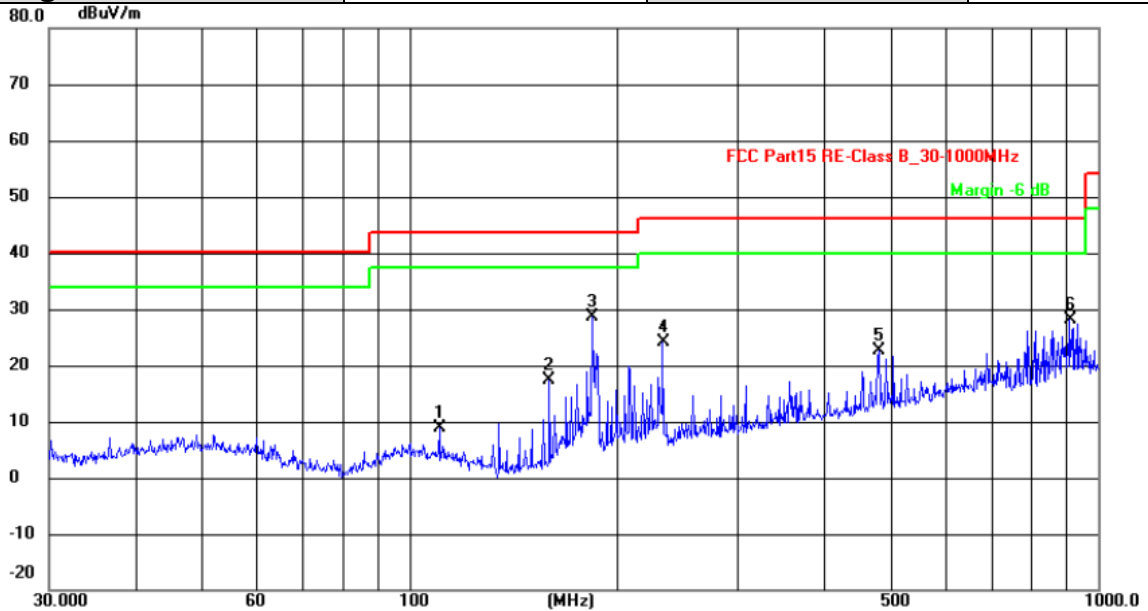

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	110.5687	27.35	-18.47	8.88	43.50	-34.62	QP
2	159.7844	38.54	-21.26	17.28	43.50	-26.22	QP
3	184.4898	48.31	-19.71	28.60	43.50	-14.90	QP
4	233.3487	41.33	-17.26	24.07	46.00	-21.93	QP
5	480.5276	34.52	-11.86	22.66	46.00	-23.34	QP
6	909.6667	33.64	-5.60	28.04	46.00	-17.96	QP

<b>Test Model</b>	BY-WM4 PRO RXU	<b>Test Mode</b>	Mode 1
<b>Environmental Conditions</b>	24.6°C, 54.1% RH	<b>Detector Function</b>	Quasi-peak
<b>Pol</b>	Horizontal	<b>Distance</b>	3m
<b>Test Engineer</b>	Diamond Lu	<b>Test Voltage</b>	DC 5V

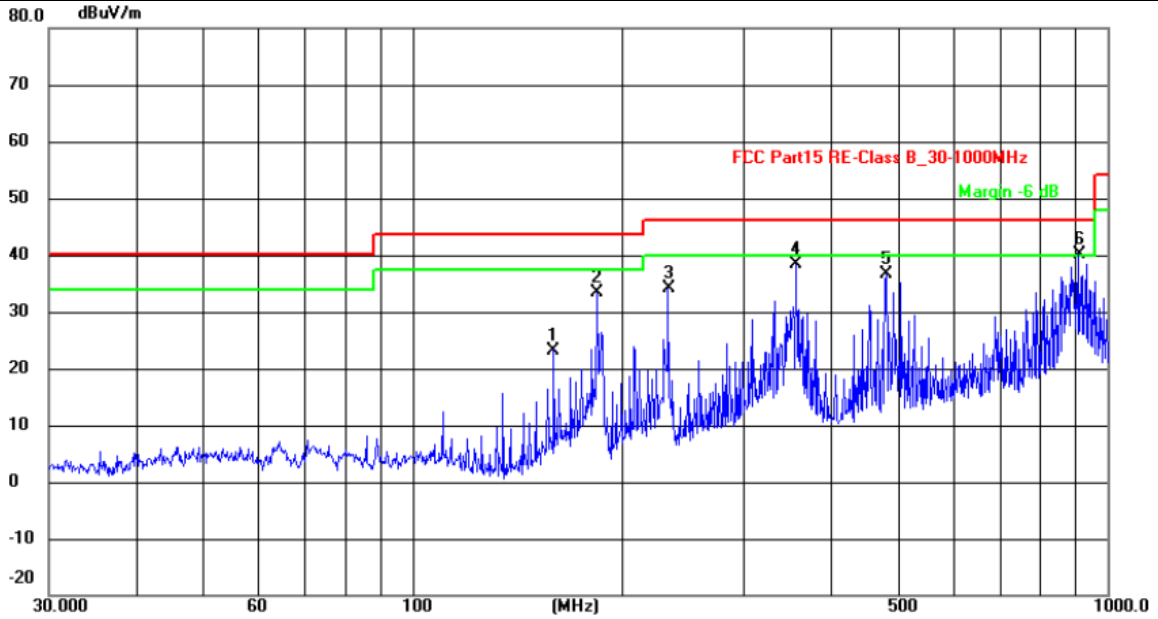

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	159.7844	44.51	-21.26	23.25	43.50	-20.25	QP
2	184.4898	53.09	-19.71	33.38	43.50	-10.12	QP
3	233.3487	51.43	-17.26	34.17	46.00	-11.83	QP
4	356.6758	52.69	-14.28	38.41	46.00	-7.59	QP
5	480.5276	48.57	-11.86	36.71	46.00	-9.29	QP
6	909.6667	45.62	-5.60	40.02	46.00	-5.98	QP

Note: Pre-Scan all mode, Thus record worse case mode result in this report.



## Radiated Emission Above 1GHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
1697.60	49.51	33.16	35.15	3.96	51.48	74.00	-22.52	Peak	Horizontal
1697.60	40.82	33.16	35.15	3.96	42.79	54.00	-11.21	Average	Horizontal
2546.40	51.71	33.26	35.17	3.98	53.78	74.00	-20.22	Peak	Horizontal
2546.40	42.61	33.26	35.17	3.98	44.68	54.00	-9.32	Average	Horizontal
3424.80	50.94	33.16	35.15	3.96	52.91	74.00	-21.09	Peak	Horizontal
3424.80	35.01	33.16	35.15	3.96	36.98	54.00	-17.02	Average	Horizontal

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
1673.20	51.36	33.26	35.14	3.98	53.46	74.00	51.36	Peak	Vertical
1673.20	39.62	33.26	35.14	3.98	41.72	54.00	39.62	Average	Vertical
3815.20	49.54	33.36	35.16	4.00	51.74	74.00	49.54	Peak	Vertical
3815.20	39.05	33.36	35.16	4.00	41.25	54.00	39.05	Average	Vertical
5722.80	51.59	33.26	35.14	3.98	53.69	74.00	51.59	Peak	Vertical
5722.80	37.58	33.26	35.14	3.98	39.68	54.00	37.58	Average	Vertical

#### **4. TEST SETUP PHOTOGRAPHS OF EUT**

Please refer to separated files for Test Setup Photos of the EUT.

#### **5. EXTERIOR PHOTOGRAPHS OF THE EUT**

Please refer to separated files for External Photos of the EUT.

#### **6. INTERIOR PHOTOGRAPHS OF THE EUT**

Please refer to separated files for Internal Photos of the EUT.

-----THE END OF TEST REPORT-----