

Report on the FCC and IC Testing of the  
 FMTEC GmbH  
 Access Point. Model: AP500  
 In accordance with FCC 47 CFR Part 15C and  
 ISED Canada RSS-210 and ISED Canada RSS-  
 GEN



Product Service

Choose certainty.  
 Add value.

Prepared for: FMTEC GmbH  
 Austrasse 59e  
 6700 Bludenz  
 AUSTRIA

FCC ID: 2ARNI-19AP500X002  
 IC: 24508-19AP500X002

COMMERCIAL-IN-CONFIDENCE

Date: 2019-08-20  
 Document Number: TR-35329-30371-07 | Issue: 03

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Project Management	Michael Ingerl	2019-08-20	<i>M. Ingerl</i>
Authorised Signatory	Martin Steindl	2019-08-20	<i>Steindl Martin</i>

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD Product Service document control rules.

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC 47 CFR Part 15C and ISED Canada RSS-210 and ISED Canada RSS-GEN. The sample tested was found to comply with the requirements defined in the applied rules.

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Testing	Michael Ingerl	2019-08-20	<i>M. Ingerl</i>

Laboratory Accreditation      Laboratory recognition      ISED Canada test site registration  
 DAkkS Reg. No. D-PL-11321-11-02      Registration No. BNetzA-CAB-16/21-15      3050A-2  
 DAkkS Reg. No. D-PL-11321-11-03

EXECUTIVE SUMMARY

A sample of this product was tested and found to be compliant with FCC 47 CFR Part 15C, ISED Canada RSS-210 and ISED Canada RSS-GEN:2016, Issue 09 (08-2016) and Issue 04 (11-2014).

DISCLAIMER AND COPYRIGHT

This non-binding report has been prepared by TÜV SÜD Product Service with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD Product Service. No part of this document may be reproduced without the prior written approval of TÜV SÜD Product Service. © 2019 TÜV SÜD Product Service.

ACCREDITATION

Our BNetzA Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our BNetzA Accreditation. Results of tests not covered by our BNetzA Accreditation Schedule are marked NBA (Not BNetzA Accredited).

Trade Register Munich  
 HRB 85742  
 VAT ID No. DE129484267  
 Information pursuant to Section 2(1)  
 DL-InfoV (Germany) at  
 www.tuev-sued.com/i

Managing Directors:  
 Dr. Peter Havel (CEO)  
 Dr. Jens Butenandt

Phone: +49 (0) 9421 55 22-0  
 Fax: +49 (0) 9421 55 22-99  
 www.tuev-sued.de

TÜV SÜD Product Service GmbH  
 Äußere Frühlingsstraße 45  
 94315 Straubing  
 Germany



## Contents

<b>1</b>	<b>Report Summary .....</b>	<b>2</b>
1.1	Report Modification Record .....	2
1.2	Introduction .....	2
1.3	Brief Summary of Results .....	3
1.4	Product Information .....	4
1.5	Deviations from the Standard .....	4
1.6	EUT Modification Record .....	4
1.7	Test Location .....	4
<b>2</b>	<b>Test Details.....</b>	<b>5</b>
2.1	Authorised Band Edges.....	5
2.2	Field Strength of Fundamental .....	8
2.3	Field Strength of any Emission.....	10
2.4	Restricted Band Edges.....	21
2.5	20 dB Bandwidth.....	22
2.6	AC Power Line Conducted Emissions .....	25
2.7	Exposure of Humans to RF Fields and SAR exclusion threshold .....	29
<b>3</b>	<b>Photographs.....</b>	<b>34</b>
3.1	Equipment Under Test (EUT) .....	34
<b>4</b>	<b>Measurement Uncertainty .....</b>	<b>35</b>



# 1 Report Summary

## 1.1 Report Modification Record

Alterations and additions to this report will be issued to the holders of each copy in the form of a complete document.

Issue	Description of Change	Date of Issue
1	First Issue	2018-06-26
2	FCC ID and IC ID added to test report	2019-05-06
3	Added the test "Exposure of Humans to RF Fields and SAR exclusion threshold"	2019-08-20

**Table 1**

## 1.2 Introduction

Applicant	FMTec GmbH
Manufacturer	FMTec GmbH
Model Number(s)	AP500
Serial Number(s)	4 000 999 001
Hardware Version(s)	3.4
Software Version(s)	Rf2.11
Number of Samples Tested	1
Test Specification/Issue/Date	FCC 47 CFR Part 15C, ISED Canada RSS-210 and ISED Canada RSS-GEN:2016, Issue 09 (08-2016) and Issue 04 (11-2014), FCC rule Part 2.1093, KDB 447498 D01, RSS-102 Issue 5
Test Plan/Issue/Date	---
Order Number	---
Date	2018-06-20
Date of Receipt of EUT	2018-04-27
Start of Test	2018-05-22
Finish of Test	2018-08-19
Name of Engineer(s)	Matthias Stumpe, Michael Ingerl
Related Document(s)	ANSI C63.10 (2013)



### 1.3 Brief Summary of Results

A brief summary of the tests carried out in accordance with FCC 47 CFR Part 15C and ISED Canada RSS-210 and ISED Canada RSS-GEN is shown below.

Section	Specification Clause	Test Description	Result	Comments/Base Standard
Configuration and Mode: UHF Transmitting, with modulated				
2.1	15.249 (a), B.10(b) and N/A.	Authorised Band Edges	Pass	ANSI C63.10 (2013)
2.2	15.249 (a), B.10 (a) and N/A.	Field Strength of Fundamental	Pass	ANSI C63.10 (2013)
2.3	15.209, 4.3 and 6.13	Field Strength of any Emission	Pass	ANSI C63.10 (2013)
2.4	15.205, 4.1 and 8.10	Restricted Band Edges	Pass	ANSI C63.10 (2013)
2.5	15.215 (c), N/A and 6.6	20 dB Bandwidth	Pass	ANSI C63.10 (2013)
2.6	15.207, N/A and 8.8	AC Power Line Conducted Emissions	Pass	ANSI C63.10 (2013)
2.7	15.107 and 6.1	Exposure of Humans to RF Fields and SAR exclusion threshold	Pass	ANSI C63.4: 2014

**Table 2**

## 1.4 Product Information

### 1.4.1 Technical Description

EUT is a Access Point for Data Communication with a Security Lock on 919 MHz.

EUT has configured for testing as follows:

- Mode: Continuous Transmission of Random Packet Data
- RF-Power: -2.5 dBm
- Frequency: 919 MHz (FCC-Testing)
- Packet Length: 60 Bytes

### 1.5 Deviations from the Standard

---

### 1.6 EUT Modification Record

The table below details modifications made to the EUT during the test programme.  
The modifications incorporated during each test are recorded on the appropriate test pages.

Modification State	Description of Modification still fitted to EUT	Modification Fitted By	Date Modification Fitted
0	As supplied by the customer	Not Applicable	Not Applicable

**Table 3**

### 1.7 Test Location

TÜV SÜD Product Service conducted the following tests at our Straubing Test Laboratory.

Test Name	Name of Engineer(s)
Configuration and Mode: UHF Transmitting, with modulated	
Authorised Band Edges	Matthias Stumpe
Field Strength of Fundamental	Matthias Stumpe
Field Strength of any Emission	Matthias Stumpe
Restricted Band Edges	Matthias Stumpe
20 dB Bandwidth	Matthias Stumpe
Field Strength of any Emission	Matthias Stumpe
Frequency Tolerance Under Temperature Variations	Matthias Stumpe
Exposure of Humans to RF Fields and SAR exclusion threshold	Matthias Stumpe, Michael Ingerl

**Table 4**

Office Address:

Äußere Frühlingstraße 45  
94315 Straubing  
Germany

## 2 Test Details

### 2.1 Authorised Band Edges

#### 2.1.1 Specification Reference

FCC 47 CFR Part 15C, ISED Canada RSS-210 and ISED Canada RSS-GEN, Clause 15.249 (a), B.10(b) and N/A.

#### 2.1.2 Equipment Under Test and Modification State

AP500, S/N: 4 000 999 001 - Modification State 0

#### 2.1.3 Date of Test

2018-05-22

#### 2.1.4 Test Method

The test was performed in accordance with ANSI C63.10, clause 6.3, 6.5 and 6.6.

#### 2.1.5 Environmental Conditions

Ambient Temperature	23.0 °C
Relative Humidity	44.0 %

## 2.1.6 Test Results

### UHF Transmitting, with modulation

No emission above -50 dBc or above § 15.209 limit detected at band edges. See chapter 2.3 “Field Strength of any Emission”

### FCC 47 CFR Part 15, Limit Clause 15.249 (d)

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation.

### FCC 47 CFR Part 15, Limit Clause 15.209

Frequency (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ at 3 m)
30 to 88	100
88 to 216	150
216 to 960	200
Above 960	500

**Table 5**

### ISED Canada RSS-210, Limit Clause B.10 (b)

Emissions radiated outside of the specified frequency bands, except for harmonic emissions, shall be attenuated by at least 50 dB below the level of the fundamental emissions or to the general field strength limits listed in RSS-Gen, whichever is less stringent.

### ISED Canada RSS-GEN, Limit Clause 8.9

Frequency (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ at 3 m)
30 to 88	100
88 to 216	150
216 to 960	200
Above 960	500

**Table 6**

### 2.1.7 Test Location and Test Equipment Used

This test was carried out in Semi anechoic room - cabin no. 8.

Instrument	Manufacturer	Type No	T-ID	Calibration Period (months)	Calibration Due
Double ridged horn antenna	Rohde & Schwarz	HF907	2073	24	2019-06-30
TRILOG Antenna	Schwarzbeck	VULB 9163	19691	24	2020-12-31
EMI test receiver	Rohde & Schwarz	ESW26	28268	12	2018-06-30

**Table 7**

TU - Traceability Unscheduled  
O/P Mon – Output Monitored using calibrated equipment  
N/A - Not Applicable



## 2.2 Field Strength of Fundamental

### 2.2.1 Specification Reference

FCC 47 CFR Part 15C, ISED Canada RSS-210 and ISED Canada RSS-GEN, Clause 15.249 (a), B.10 (a) and N/A.

### 2.2.2 Equipment Under Test and Modification State

AP500, S/N: 4 000 999 001 - Modification State 0

### 2.2.3 Date of Test

2018-05-22

### 2.2.4 Test Method

The test was performed in accordance with ANSI C63.10, clause 6.3, 6.4 and 6.5.

### 2.2.5 Environmental Conditions

Ambient Temperature 23.0 °C  
Relative Humidity 44.0 %

### 2.2.6 Test Results

UHF Transmitting, with modulation

Frequency MHz	Field Strength
919 MHz	92.9 dB $\mu$ V/m (equal to 44.3 mV/m)

**Table 8**

FCC 47 CFR Part 15, Limit Clause 15.249 (a)

Fundamental Frequency (MHz)	Field Strength of Fundamental (mV/m)
902 to 928	50
2400 to 2483.5	50
5725 to 5875	50
24000 to 24250	250

**Table 9**

ISED Canada RSS-210, Limit Clause B.10 (a)

The field strength of fundamental and harmonic emissions, measured at 3 m, shall not exceed 50 mV/m and 0.5 mV/m respectively.

### 2.2.7 Test Location and Test Equipment Used

This test was carried out in Semi anechoic room - cabin no. 8.

Instrument	Manufacturer	Type No	T-ID	Calibration Period (months)	Calibration Due
Double ridged horn antenna	Rohde & Schwarz	HF907	2073	24	2019-06-30
TRILOG Antenna	Schwarzbeck	VULB 9163	19691	24	2020-12-31
EMI test receiver	Rohde & Schwarz	ESW26	28268	12	2018-06-30

**Table 10**

TU - Traceability Unscheduled  
O/P Mon – Output Monitored using calibrated equipment  
N/A - Not Applicable

## **2.3 Field Strength of any Emission**

### **2.3.1 Specification Reference**

FCC 47 CFR Part 15C, ISED Canada RSS-210 and ISED Canada RSS-GEN, Clause 15.209, 4.3 and 6.13

### **2.3.2 Equipment Under Test and Modification State**

AP500, S/N: 4 000 999 001 - Modification State 0

### **2.3.3 Date of Test**

2018-05-25 to 2018-06-20

### **2.3.4 Test Method**

This test was performed in accordance with ANSI C63.10, clause 6.3, 6.4 and 6.5. and ISED Canada RSS-Gen clause 6.13.

Measurements were made at a distance of 3 m. The limit lines shown on the plot were extrapolated from either 300 m or 30 m to the measurement distance of 3 m in accordance with ANSI C63.10 Clause 6.4.4.2.


For any emissions detected within 20 dB of the limit, a final measurement was made and recorded in the table below. The detector used for these measurements was a quasi-peak detector except for emissions within the bands 9 kHz to 90 kHz and 110 kHz to 490 kHz where a CISPR average detector was used.

### **2.3.5 Environmental Conditions**

Ambient Temperature	25.0 °C
Relative Humidity	50.0 %

### 2.3.6 Test Results


#### UHF Transmitting, with modulation – 1. Orthogonal axis

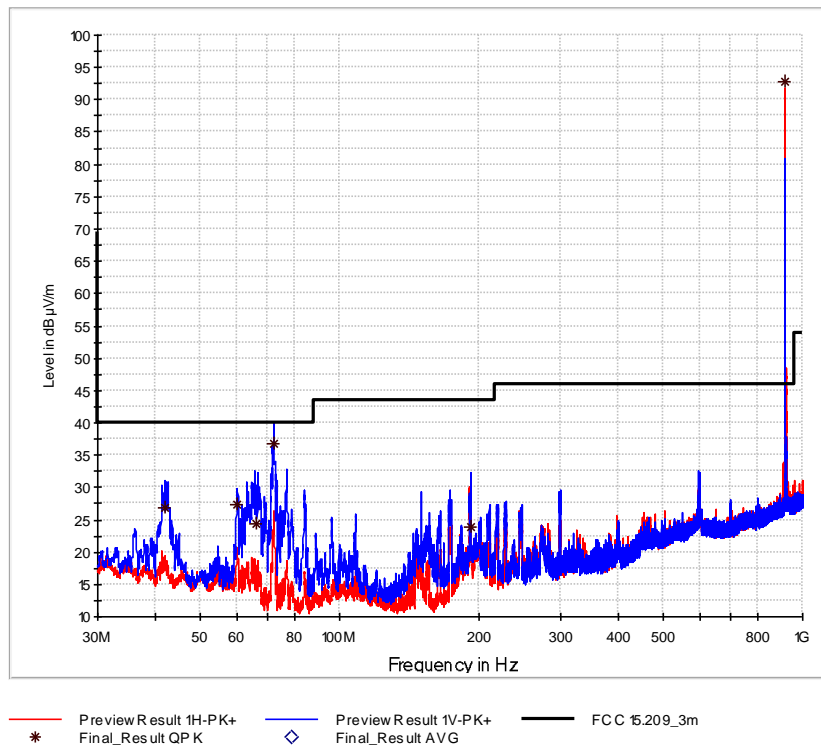

#### Final Results:


Frequency MHz	QuasiPeak dBµV/m	Average dBµV/m	Limit dBµV/m	Margin dB	Meas. Time ms	Bandwidth kHz	Height cm	Pol	Azimuth deg	Corr. dB
41.935000	26.98	---	40.00	13.02	1000.0	120.000	107.0	V	-140.0	14.6
60.060000	27.34	---	40.00	12.66	1000.0	120.000	104.0	V	-32.0	13.0
66.000000	24.40	---	40.00	15.60	1000.0	120.000	144.0	V	-121.0	11.5
72.110000	36.67	---	40.00	3.33	1000.0	120.000	142.0	V	-193.0	10.6
192.275000	23.88	---	43.50	19.62	1000.0	120.000	103.0	V	173.0	12.4
919.020000	92.82	---	NA #1	NA #1	1000.0	120.000	100.0	H	103.0	25.6

#1: Intentional Radiation.

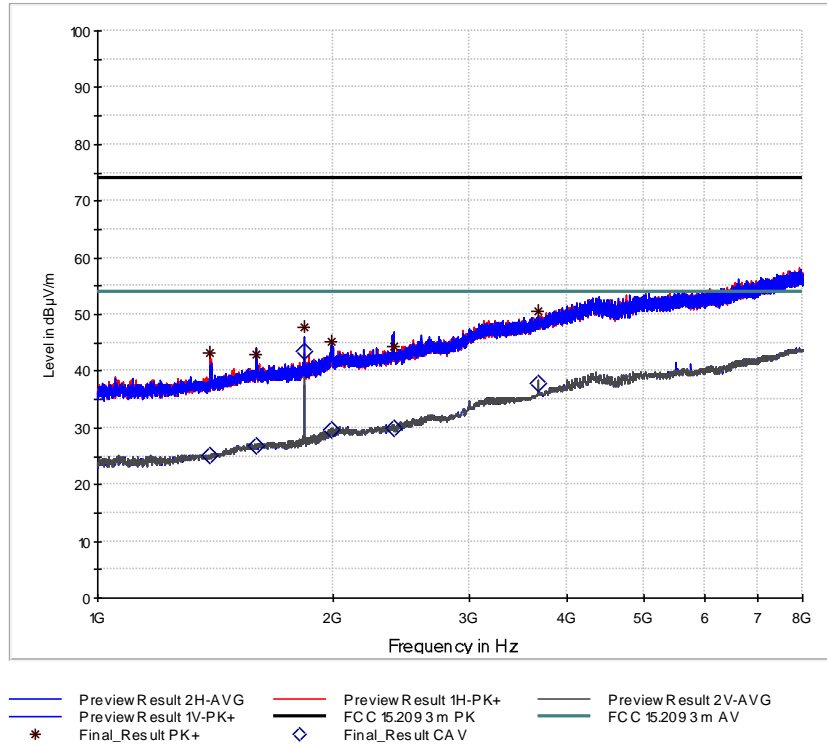

**Final Results:**


Frequency MHz	MaxPeak dBµV/m	CAverage dBµV/m	Limit dBµV/m	Margin dB	Meas. Time ms	Bandwidth kHz	Height cm	Pol	Azimuth deg	Corr. dB
1392.750000	43.29	---	73.97	30.68	1000.0	1000.000	200.0	H	-118.0	29.1
1392.750000	---	25.20	53.98	28.78	1000.0	1000.000	200.0	H	-118.0	29.1
1599.000000	42.96	---	73.97	31.01	1000.0	1000.000	213.0	V	-14.0	30.9
1599.000000	---	26.90	53.98	27.08	1000.0	1000.000	213.0	V	-14.0	30.9
1838.000000	47.87	---	73.97	26.10	1000.0	1000.000	225.0	V	15.0	31.9
1838.000000	---	43.39	53.98	10.59	1000.0	1000.000	225.0	V	15.0	31.9
1989.750000	---	29.57	53.98	24.41	1000.0	1000.000	208.0	V	-147.0	33.4
1989.750000	45.27	---	73.97	28.70	1000.0	1000.000	208.0	V	-147.0	33.4
2392.000000	44.34	---	73.97	29.63	1000.0	1000.000	187.0	V	-189.0	34.1
2392.000000	---	30.07	53.98	23.91	1000.0	1000.000	187.0	V	-189.0	34.1
3676.000000	---	37.99	53.98	15.99	1000.0	1000.000	180.0	V	129.0	39.4
3676.000000	50.48	---	73.97	23.49	1000.0	1000.000	180.0	V	129.0	39.4

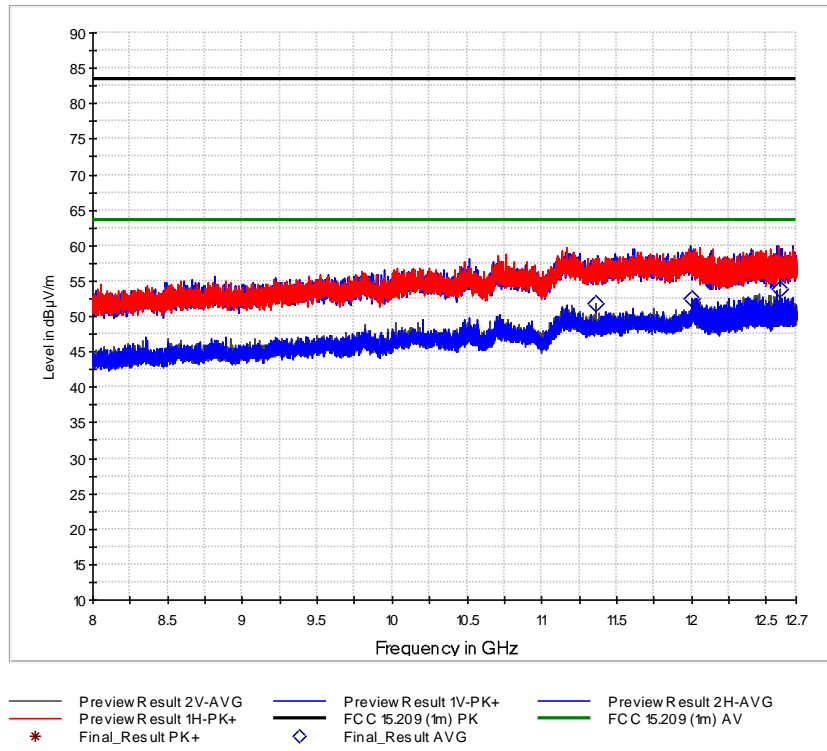

**Final Results:**

Frequency MHz	MaxPeak dBµV/m	Average dBµV/m	Limit dBµV/m	Margin dB	Meas. Time ms	Bandwidth kHz	Pol	Azimuth deg	Corr. dB
11366.000000	---	51.83	63.50	11.67	2.5	1000.000	V	297.0	17.8
12005.775000	---	52.59	63.50	10.91	2.5	1000.000	H	145.0	19.1
12595.000000	---	53.88	63.50	9.63	2.5	1000.000	V	154.0	19.5


UHF Transmitting, with modulation – 2. Orthogonal axis

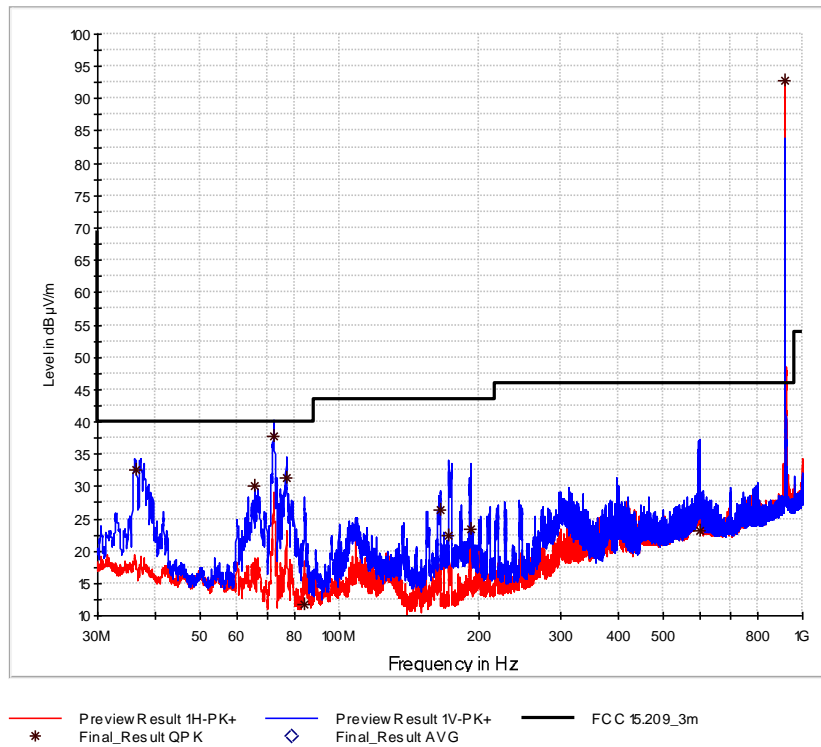

**Final Results:**

Frequency MHz	QuasiPeak dBµV/m	Average dBµV/m	Limit dBµV/m	Margin dB	Meas. Time ms	Bandwidth kHz	Height cm	Pol	Azimuth deg	Corr. dB
36.195000	32.50	---	40.00	7.50	1000.0	120.000	100.0	V	126.0	14.6
65.545000	30.02	---	40.00	9.98	1000.0	120.000	107.0	V	175.0	11.5
71.990000	37.68	---	40.00	2.32	1000.0	120.000	111.0	V	-93.0	10.6
76.840000	31.30	---	40.00	8.70	1000.0	120.000	118.0	V	73.0	10.5
83.995000	11.73	---	40.00	28.27	1000.0	120.000	106.0	V	74.0	10.9
164.775000	26.44	---	43.50	17.06	1000.0	120.000	111.0	V	-106.0	10.6
172.420000	22.49	---	43.50	21.01	1000.0	120.000	107.0	V	145.0	11.0
192.315000	23.48	---	43.50	20.02	1000.0	120.000	108.0	V	-168.0	12.4
599.225000	23.13	---	46.00	22.87	1000.0	120.000	104.0	V	-78.0	21.6
919.020000	92.92	---	NA #1	NA #1	1000.0	120.000	145.0	H	26.0	25.6


#1: Intentional Radiation.

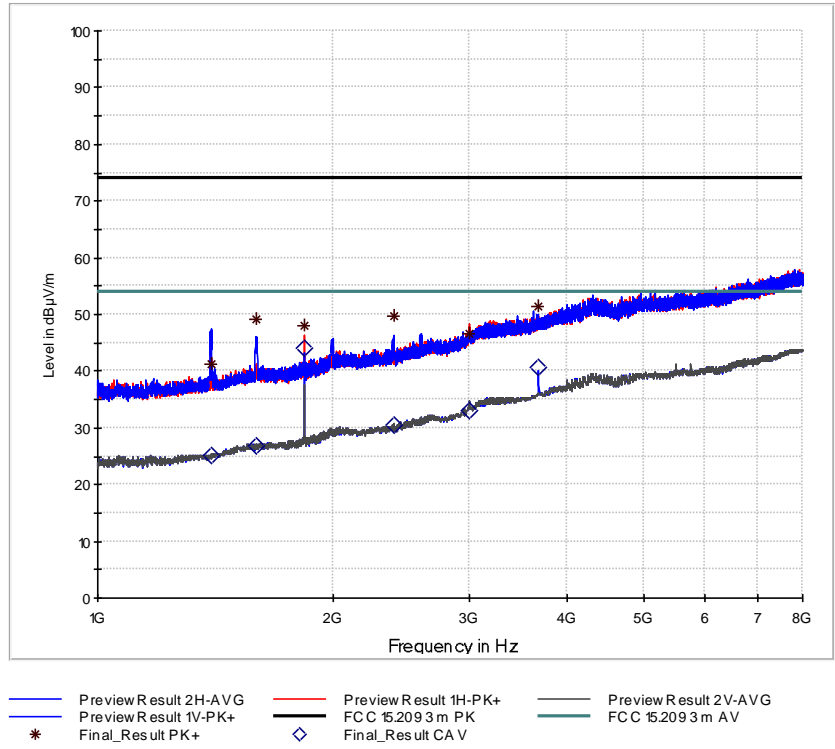

**Final Results:**

Frequency MHz	MaxPeak dBµV/m	CAverage dBµV/m	Limit dBµV/m	Margin dB	Meas. Time ms	Bandwidth kHz	Height cm	Pol	Azimuth deg	Corr. dB
1399.000000	41.32	---	73.97	32.65	1000.0	1000.000	206.0	V	64.0	29.1
1399.000000	---	25.06	53.98	28.92	1000.0	1000.000	206.0	V	64.0	29.1
1597.500000	---	26.72	53.98	27.26	1000.0	1000.000	186.0	V	-84.0	30.9
1597.500000	49.27	---	73.97	24.70	1000.0	1000.000	186.0	V	-84.0	30.9
1838.000000	---	44.02	53.98	9.96	1000.0	1000.000	155.0	H	89.0	31.9
1838.000000	48.16	---	73.97	25.81	1000.0	1000.000	155.0	H	89.0	31.9
2391.750000	49.66	---	73.97	24.31	1000.0	1000.000	183.0	V	-94.0	34.1
2391.750000	---	30.41	53.98	23.57	1000.0	1000.000	183.0	V	-94.0	34.1
2995.250000	---	33.00	53.98	20.98	1000.0	1000.000	218.0	H	103.0	36.8
2995.250000	46.53	---	73.97	27.44	1000.0	1000.000	218.0	H	103.0	36.8
3676.000000	---	40.58	53.98	13.40	1000.0	1000.000	199.0	H	135.0	39.4
3676.000000	51.41	---	73.97	22.56	1000.0	1000.000	199.0	H	135.0	39.4




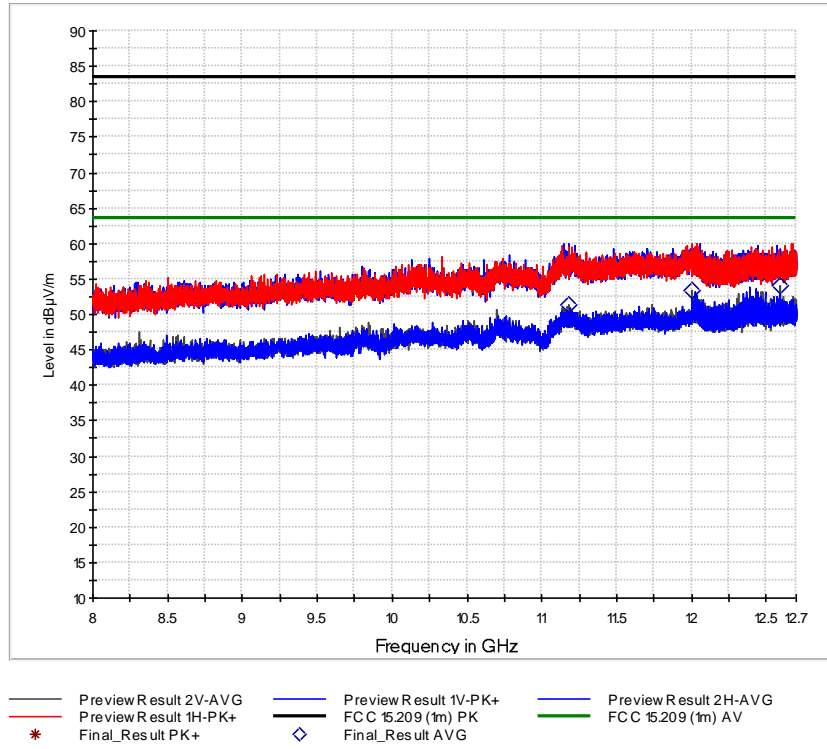

**Final Results:**

Frequency MHz	MaxPeak dBµV/m	Average dBµV/m	Limit dBµV/m	Margin dB	Meas. Time ms	Bandwidth kHz	Pol	Azimuth deg	Corr. dB
11184.500000	---	51.41	63.50	12.09	2.5	1000.000	V	89.0	18.7
12000.000000	---	53.33	63.50	10.17	2.5	1000.000	V	297.0	19.2
12592.375000	---	54.12	63.50	9.38	2.5	1000.000	V	56.0	19.5


UHF Transmitting, with modulation – 3. Orthogonal axis

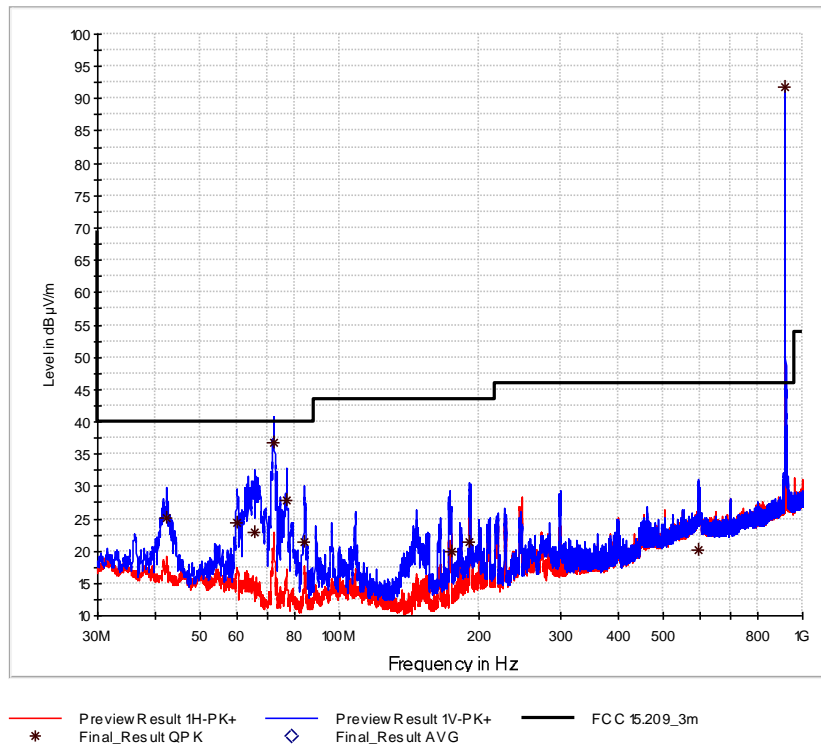

**Final Results:**


Frequency MHz	QuasiPeak dBµV/m	Average dBµV/m	Limit dBµV/m	Margin dB	Meas. Time ms	Bandwidth kHz	Height cm	Pol	Azimuth deg	Corr. dB
42.240000	25.12	---	40.00	14.88	1000.0	120.000	100.0	V	-118.0	14.6
60.040000	24.45	---	40.00	15.55	1000.0	120.000	100.0	V	-8.0	13.1
65.550000	22.88	---	40.00	17.12	1000.0	120.000	143.0	V	-119.0	11.5
71.990000	36.74	---	40.00	3.26	1000.0	120.000	103.0	V	-129.0	10.6
76.620000	27.78	---	40.00	12.22	1000.0	120.000	136.0	V	-84.0	10.5
84.095000	21.46	---	40.00	18.54	1000.0	120.000	135.0	V	-187.0	10.9
173.920000	19.97	---	43.50	23.53	1000.0	120.000	125.0	V	170.0	11.1
190.625000	21.38	---	43.50	22.12	1000.0	120.000	126.0	V	185.0	12.3
596.890000	20.27	---	46.00	25.73	1000.0	120.000	108.0	V	-77.0	21.6
919.020000	91.86	---	NA #1	NA #1	1000.0	120.000	149.0	V	119.0	25.6

#1: Intentional Radiation.

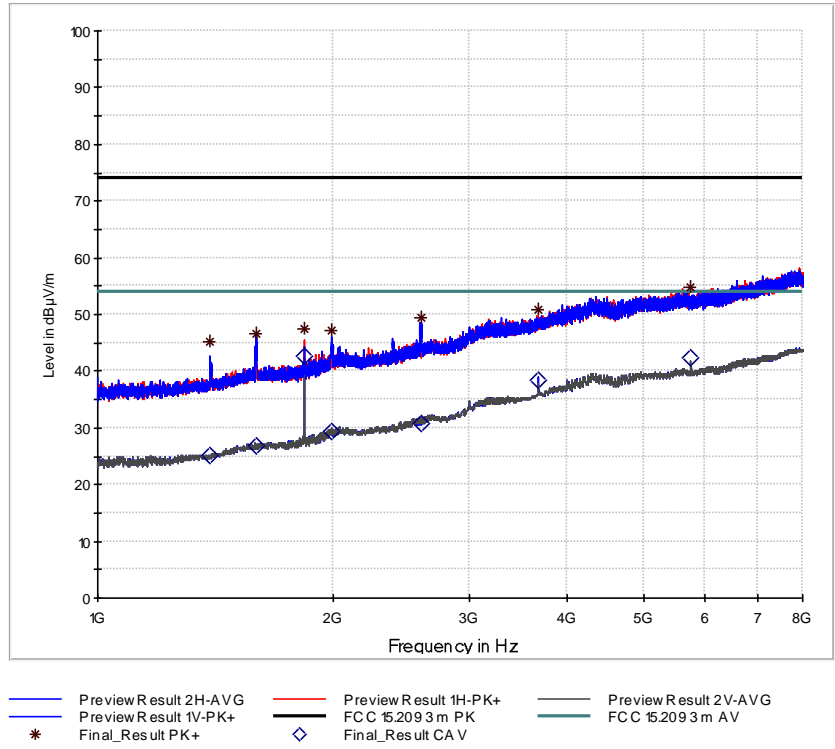

**Final Results:**

Frequency MHz	MaxPeak dBµV/m	CAverage dBµV/m	Limit dBµV/m	Margin dB	Meas. Time ms	Bandwidth kHz	Height cm	Pol	Azimuth deg	Corr. dB
1393.250000	45.29	---	73.97	28.68	1000.0	1000.000	185.0	V	-45.0	29.1
1393.250000	---	25.28	53.98	28.70	1000.0	1000.000	185.0	V	-45.0	29.1
1595.500000	46.70	---	73.97	27.27	1000.0	1000.000	216.0	V	-83.0	30.9
1595.500000	---	26.79	53.98	27.19	1000.0	1000.000	216.0	V	-83.0	30.9
1838.000000	---	42.79	53.98	11.19	1000.0	1000.000	103.0	H	-136.0	31.9
1838.000000	47.48	---	73.97	26.49	1000.0	1000.000	103.0	H	-136.0	31.9
1991.000000	---	29.26	53.98	24.72	1000.0	1000.000	167.0	V	27.0	33.4
1991.000000	47.31	---	73.97	26.66	1000.0	1000.000	167.0	V	27.0	33.4
2596.000000	---	30.70	53.98	23.28	1000.0	1000.000	165.0	V	-103.0	35.4
2596.000000	49.49	---	73.97	24.48	1000.0	1000.000	165.0	V	-103.0	35.4
3676.000000	---	38.39	53.98	15.59	1000.0	1000.000	125.0	H	-86.0	39.4
3676.000000	50.85	---	73.97	23.12	1000.0	1000.000	125.0	H	-86.0	39.4
5760.000000	---	42.26	53.98	11.72	1000.0	1000.000	178.0	V	97.0	43.3
5760.000000	54.77	---	73.97	19.20	1000.0	1000.000	178.0	V	97.0	43.3

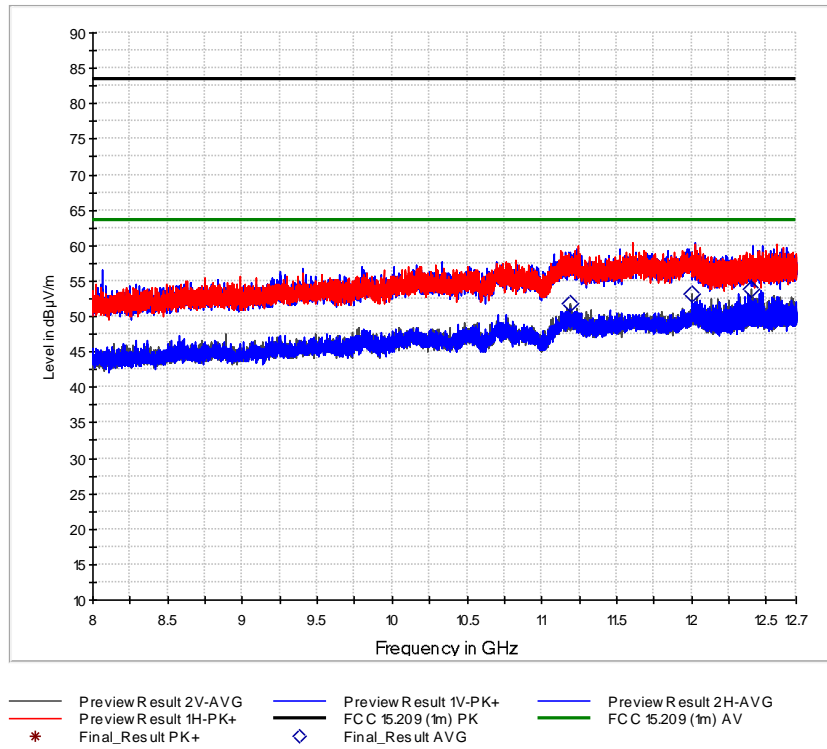

**Final Results:**

Frequency MHz	MaxPeak dBµV/m	Average dBµV/m	Limit dBµV/m	Margin dB	Meas. Time ms	Bandwidth kHz	Pol	Azimuth deg	Corr. dB
11195.000000	---	51.92	63.50	11.58	2.5	1000.000	V	317.0	18.8
12000.525000	---	53.06	63.50	10.44	2.5	1000.000	V	234.0	19.2
12395.500000	---	53.95	63.50	9.55	2.5	1000.000	V	149.0	19.0

FCC 47 CFR Part 15, Limit Clause 15.209

Frequency (MHz)	Field Strength (µV/m)	Measurement Distance (m)
0.009 to 0.490	2400/F (kHz)	300
0.490 to 1.705	24000/F (kHz)	30
1705 to 30	30	30
30 to 88	100**	3
88 to 216	150**	3
216 to 960	200**	3
Above 960	500	3

**Table 11 - FCC Limit**

NOTE: The level of any unwanted emissions from an intentional radiator operating under these general provisions shall not exceed the level of the fundamental emission.

ISED Canada RSS-210, Limit Clause 4.4

Under no circumstance shall the level of any unwanted emissions exceed the level of the fundamental emissions.

ISED Canada RSS-Gen, Limit Clause 8.9

Frequency (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ )	Measurement Distance (m)
0.009 to 0.490	2400/F (kHz)	300
0.490 to 1.705	24000/F (kHz)	30
1705 to 30	30	30

**Table 12 - IC Limit, Below 30 MHz**

Frequency (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ at 3 metres)
30 to 88	100
88 to 216	150
216 to 960	200
Above 960	500

**Table 13 - IC Limit, Above 30 MHz**

**2.3.7 Test Location and Test Equipment Used**

This test was carried out in Semi anechoic room - cabin no. 8.

Instrument	Manufacturer	Type No	T-ID	Calibration Period (months)	Calibration Due
Double ridged horn antenna	Rohde & Schwarz	HF907	2073	24	2019-06-30
TRILOG Antenna	Schwarzbeck	VULB 9163	19691	24	2020-12-31
EMI test receiver	Rohde & Schwarz	ESW26	28268	12	2018-06-30

**Table 14**

TU - Traceability Unscheduled  
 O/P Mon – Output Monitored using calibrated equipment  
 N/A - Not Applicable

## **2.4 Restricted Band Edges**

### **2.4.1 Specification Reference**

FCC 47 CFR Part 15C, ISED Canada RSS-210 and ISED Canada RSS-GEN, Clause 15.205, 4.1 and 8.10

### **2.4.2 Equipment Under Test and Modification State**

AP500, S/N: 4 000 999 001 - Modification State 0

### **2.4.3 Date of Test**

2018-05-22

### **2.4.4 Test Method**

This test was performed in accordance with ANSI C63.10, clause 11.13.1.

### **2.4.5 Environmental Conditions**

Ambient Temperature	22.0 °C
Relative Humidity	45.0 %

### **2.4.6 Test Results**

No emission above FCC 47 CFR §15.209 found outside of operational frequency band 902 MHz to 928 MHz. See chapter 2.3 'Field Strength of any Emission'.

**2.5 20 dB Bandwidth**

**2.5.1 Specification Reference**

FCC 47 CFR Part 15C, ISED Canada RSS-210 and ISED Canada RSS-GEN, Clause 15.215 (c), N/A and 6.6

**2.5.2 Equipment Under Test and Modification State**

AP500, S/N: 4 000 999 001 - Modification State 0

**2.5.3 Date of Test**

2018-06-20

**2.5.4 Test Method**

The test was performed in accordance with ANSI C63.10, clause 6.9.1.

**2.5.5 Environmental Conditions**


Ambient Temperature 25.0 °C  
Relative Humidity 50.0 %

**2.5.6 Test Results**

UHF Transmitting, with modulation


Frequency (MHz)	20 dB Bandwidth	99% Occupied Bandwidth	F <sub>LOWER</sub> of 20dB BW	F <sub>UPPER</sub> of 20dB BW
919 MHz	234 kHz	226 kHz	918.897 MHz	919.131 MHz

**Table 15**

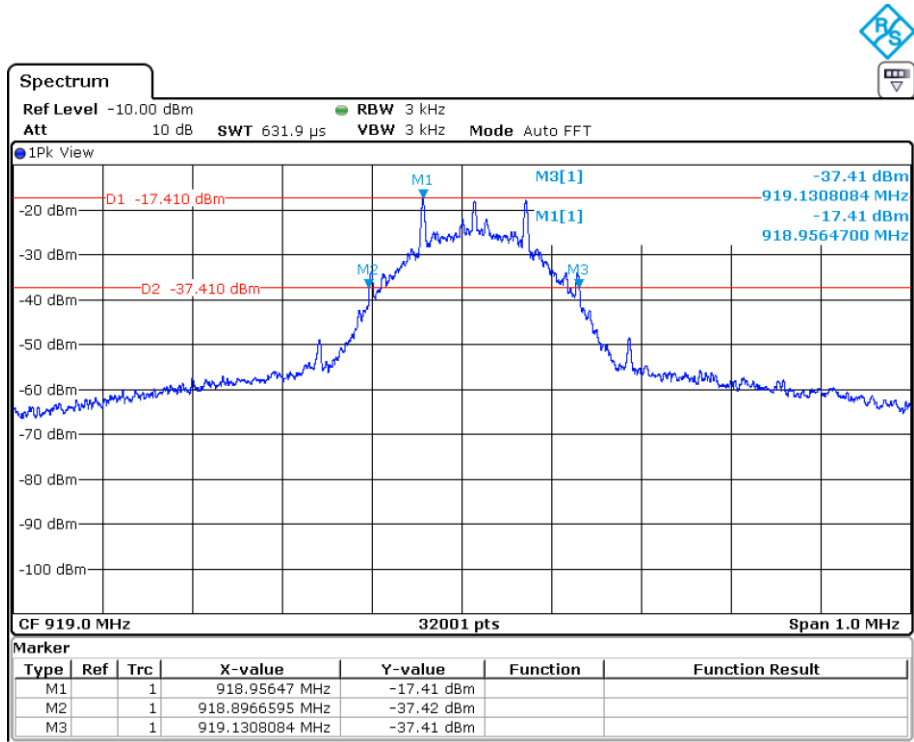

Date: 28 JUN 2018 09:35:06

### 6 dB Bandwidth

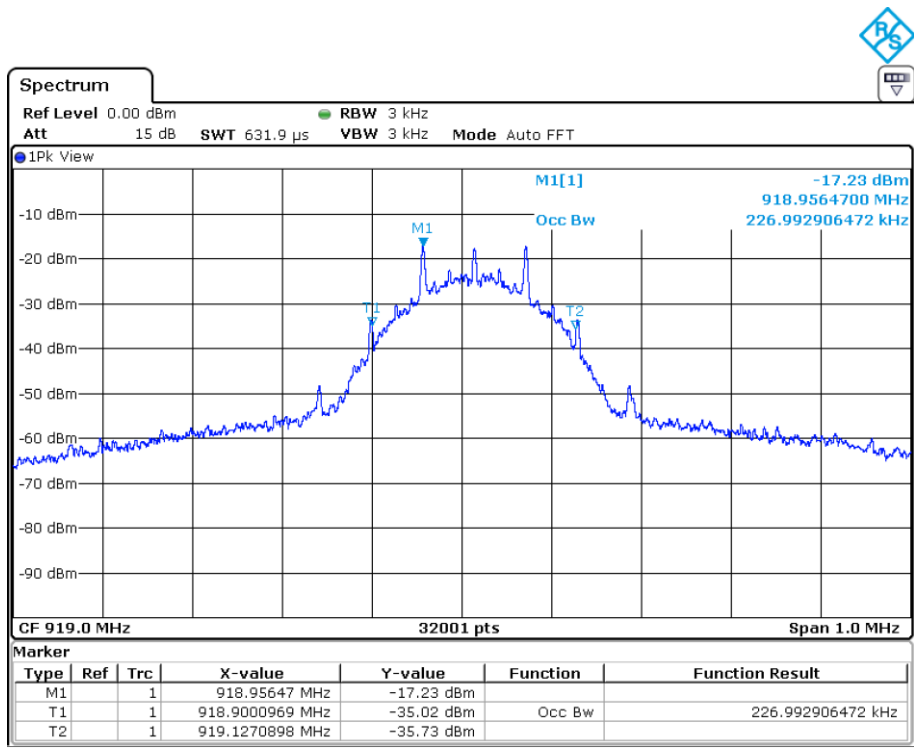

Date: 28 JUN 2018 09:38:06

### 99% Occupied Bandwidth



FCC 47 CFR Part 15, Limit Clause 15.215 (c)

The 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

ISED Canada RSS 210 and ISED Canada RSS GEN, Limit Clause

None specified.

**2.5.7 Test Location and Test Equipment Used**

This test was carried out in Semi anechoic room - cabin no. 8.

Instrument	Manufacturer	Type No	T-ID	Calibration Period (months)	Calibration Due
Double ridged horn antenna	Rohde & Schwarz	HF907	2073	24	2019-06-30
TRILOG Antenna	Schwarzbeck	VULB 9163	19691	24	2020-12-31
EMI test receiver	Rohde & Schwarz	ESW26	28268	12	2018-06-30

**Table 16**

TU - Traceability Unscheduled

O/P Mon – Output Monitored using calibrated equipment

N/A - Not Applicable

## **2.6 AC Power Line Conducted Emissions**

### **2.6.1 Specification Reference**

FCC 47 CFR Part 15C, ISED Canada RSS-210 and ISED Canada RSS-GEN, Clause 15.207, N/A and 8.8

### **2.6.2 Equipment Under Test and Modification State**

AP500, S/N: 4 000 999 001 - Modification State 0

### **2.6.3 Date of Test**


2018-06-13

### **2.6.4 Environmental Conditions**

Ambient Temperature	25.0 °C
Relative Humidity	47.0 %

### 2.6.5 Test Results


#### UHF Transmitting, with modulation

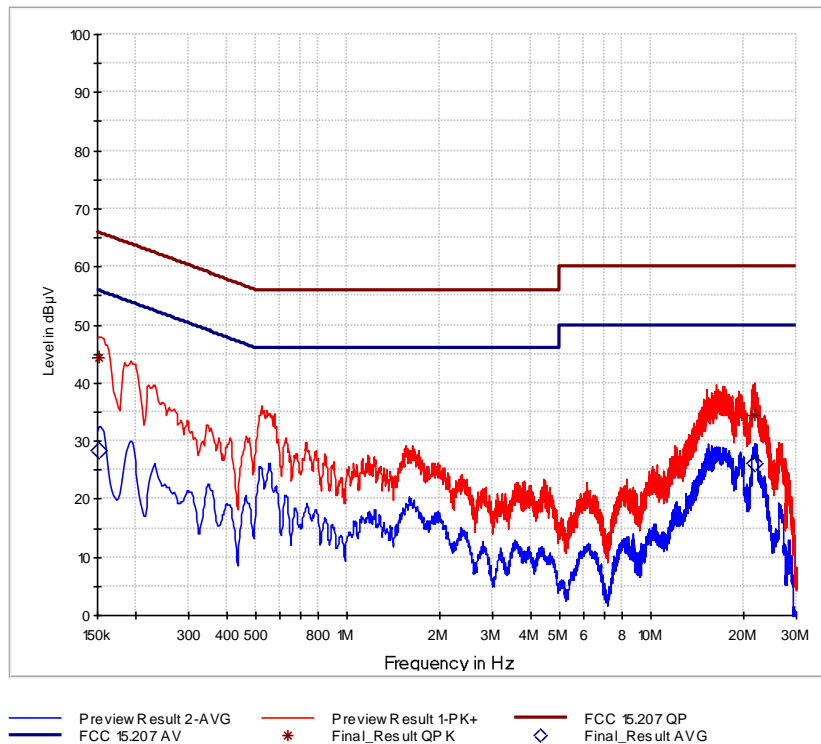

Live Line - 150 kHz to 30 MHz

#### Final Results:

Frequency MHz	QuasiPeak dBµV	Average dBµV	Limit dBµV	Margin dB	Meas. Time ms	Bandwidth kHz	Line	PE	Corr. dB
0.152250	---	28.37	55.88	27.51	1000.0	9.000	L1	GND	0.0
0.152250	44.40	---	65.88	21.48	1000.0	9.000	L1	GND	0.0
21.770250	34.41	---	60.00	25.59	1000.0	9.000	L1	GND	0.2
21.979500	---	26.30	50.00	23.70	1000.0	9.000	L1	GND	0.2

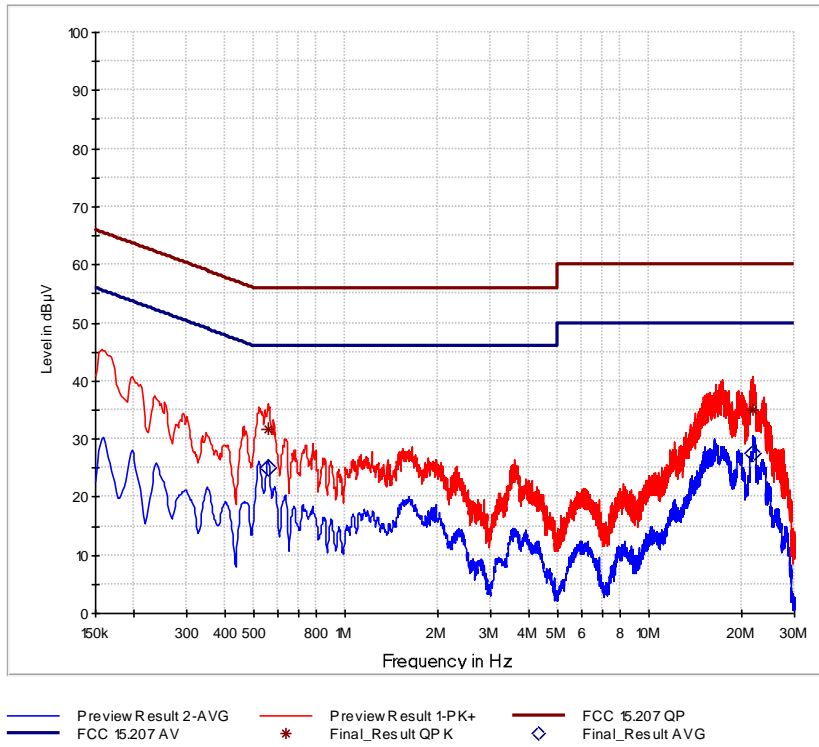

**Live Line - 150 kHz to 30 MHz**

**Final Results 1:**

Frequency MHz	QuasiPeak dBµV	Average dBµV	Limit dBµV	Margin dB	Meas. Time ms	Bandwidth kHz	Line	PE	Corr. dB
0.555000	31.79	---	56.00	24.21	1000.0	9.000	L1	GND	0.0
0.555000	---	25.01	46.00	20.99	1000.0	9.000	L1	GND	0.0
21.822000	35.08	---	60.00	24.92	1000.0	9.000	L1	GND	0.2
21.993000	---	27.48	50.00	22.52	1000.0	9.000	L1	GND	0.2

FCC 47 CFR Part 15, Limit Clause 15.207 and ISED Canada RSS-GEN, Limit Clause 8.8

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-Peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5	56	46
5 to 30	60	50

**Table 17**

\*Decreases with the logarithm of the frequency.

**2.6.6 Test Location and Test Equipment Used**

This test was carried out in Shielded room - cabin no. 9.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
EMI test receiver	Rohde & Schwarz	100008	19730	12	2018-10-31
V-network	Rohde & Schwarz	894785/005	18919	36	2019-10-31

**Table 18**

TU - Traceability Unscheduled  
 O/P Mon – Output Monitored using calibrated equipment  
 N/A - Not Applicable

**2.7 Exposure of Humans to RF Fields and SAR exclusion threshold**

**2.7.1 Specification Reference**

IC RSS-GEN Issue 4, section 3.2 and  
IC RSS-102, Issue 5, section 2.5  
KDB 447498 D01 V06, section 4.3.1 a)

**2.7.2 Guide**

IC RSS-102 Issue 5, section 2.5

**2.7.3 Equipment Under Test and Modification State**

SL1001, S/N: SL1001 0000005503 - Modification State 0

**2.7.4 Date of Test**

2019-08-19

**2.7.5 Test Results**

Exposure of Humans to RF Fields	Applicable	Declared by applicant	Measured	Exemption
The antenna is				
<input checked="" type="checkbox"/> detachable				
The conducted output power (CP in watts) is measured at the antenna connector: $CP = \dots\dots\dots \text{ W}$			<input type="checkbox"/>	
The effective isotropic radiated power (EIRP in watts) is calculated using <input type="checkbox"/> the numerical antenna gain: $G = \dots\dots\dots$ $EIRP = G \cdot CP \Rightarrow EIRP = \dots\dots\dots \text{ W}$		<input type="checkbox"/>		
<input checked="" type="checkbox"/> the field strength <sup>1</sup> in V/m: $FS = 0.034 \text{ V/m}$ $EIRP = \frac{(FS \cdot D)^2}{30} \Rightarrow EIRP = 0.35 \text{ mW}$			<input checked="" type="checkbox"/>	
with: Distance between the antennas in m: $D = 3$			<input checked="" type="checkbox"/>	
<input type="checkbox"/> not detachable				
A field strength measurement is used to determine the effective isotropic radiated power (EIRP in watts) given by:				
$EIRP = \frac{(FS \cdot D)^2}{30} \Rightarrow EIRP =$				
with: Field strength in V/m: $FS =$ Distance between the two antennas in m: $D =$			<input type="checkbox"/>	
Selection of output power				
The output power TP is the higher of the conducted or effective isotropic radiated power (e.i.r.p.): $TP = 0.35 \text{ mW}$				

<sup>1</sup> The conversion formula is valid only for properly matched antennas. In other cases the transmitter output power may have to be measured by a terminated measurement when applying the exemption clauses.

If an open area test site is used for field strength measurement, the effect due to the metal ground reflecting plane should be subtracted from the maximum field strength value in order to reference it to free space, before calculating TP.

Exposure of Humans to RF Fields (continued)											Applicable	Declared by applicant	Measured	Exemption																																																																																																		
Separation distance between the user and the transmitting device is																																																																																																																
<input checked="" type="checkbox"/> less than or equal to 20 cm <input type="checkbox"/> greater than 20 cm												<input type="checkbox"/>																																																																																																				
Transmitting device is																																																																																																																
<input type="checkbox"/> in the vicinity of the human head <input type="checkbox"/> body-worn												<input type="checkbox"/>																																																																																																				
SAR evaluation																																																																																																																
SAR evaluation is required if the separation distance between the user and/or bystander and the antenna and/or radiating element of the device is less than or equal to 20 cm, except when the device operates at or below the applicable output power level (adjusted for tune-up tolerance) for the specified separation distance defined in the table. For controlled use devices where the 8 W/kg for 1 gram of tissue applies, the exemption limits for routine evaluation in the table are multiplied by a factor of 5. For limb-worn devices where the 10 gram value applies, the exemption limits for routine evaluation in the table are multiplied by a factor of 2.5. If the operating frequency of the device is between two frequencies located in the table, linear interpolation shall be applied for the applicable separation distance. For test separation distance less than 5 mm, the exemption limits for a separation distance of 5 mm can be applied to determine if a routine evaluation is required. For medical implants devices, the exemption limit for routine evaluation is set at 1 mW. The output power of a medical implants device is defined as the higher of the conducted or e.i.r.p to determine whether the device is exempt from the SAR evaluation.																																																																																																																
<table border="1"> <thead> <tr> <th rowspan="2">Frequency (MHz)</th> <th colspan="10">Exemption limits (mW)<sup>2</sup> at separation distance of</th> </tr> <tr> <th>≤5 mm</th> <th>10 mm</th> <th>15 mm</th> <th>20 mm</th> <th>25 mm</th> <th>30 mm</th> <th>35 mm</th> <th>40 mm</th> <th>45 mm</th> <th>≥50 mm</th> </tr> </thead> <tbody> <tr> <td>≤300<sup>3</sup></td> <td>71</td> <td>101</td> <td>132</td> <td>162</td> <td>193</td> <td>223</td> <td>254</td> <td>284</td> <td>315</td> <td>345</td> </tr> <tr> <td>450</td> <td>52</td> <td>70</td> <td>88</td> <td>106</td> <td>123</td> <td>141</td> <td>159</td> <td>177</td> <td>195</td> <td>213</td> </tr> <tr> <td>835</td> <td>17</td> <td>30</td> <td>42</td> <td>55</td> <td>67</td> <td>80</td> <td>92</td> <td>105</td> <td>117</td> <td>130</td> </tr> <tr> <td>1900</td> <td>7</td> <td>10</td> <td>18</td> <td>34</td> <td>60</td> <td>99</td> <td>153</td> <td>225</td> <td>316</td> <td>431</td> </tr> <tr> <td>2450</td> <td>4</td> <td>7</td> <td>15</td> <td>30</td> <td>52</td> <td>83</td> <td>123</td> <td>173</td> <td>235</td> <td>309</td> </tr> <tr> <td>3500</td> <td>2</td> <td>6</td> <td>16</td> <td>32</td> <td>55</td> <td>86</td> <td>124</td> <td>170</td> <td>225</td> <td>290</td> </tr> <tr> <td>5800</td> <td>1</td> <td>6</td> <td>15</td> <td>27</td> <td>41</td> <td>56</td> <td>71</td> <td>85</td> <td>97</td> <td>106</td> </tr> </tbody> </table>											Frequency (MHz)	Exemption limits (mW) <sup>2</sup> at separation distance of										≤5 mm	10 mm	15 mm	20 mm	25 mm	30 mm	35 mm	40 mm	45 mm	≥50 mm	≤300 <sup>3</sup>	71	101	132	162	193	223	254	284	315	345	450	52	70	88	106	123	141	159	177	195	213	835	17	30	42	55	67	80	92	105	117	130	1900	7	10	18	34	60	99	153	225	316	431	2450	4	7	15	30	52	83	123	173	235	309	3500	2	6	16	32	55	86	124	170	225	290	5800	1	6	15	27	41	56	71	85	97	106				
Frequency (MHz)	Exemption limits (mW) <sup>2</sup> at separation distance of																																																																																																															
	≤5 mm	10 mm	15 mm	20 mm	25 mm	30 mm	35 mm	40 mm	45 mm	≥50 mm																																																																																																						
≤300 <sup>3</sup>	71	101	132	162	193	223	254	284	315	345																																																																																																						
450	52	70	88	106	123	141	159	177	195	213																																																																																																						
835	17	30	42	55	67	80	92	105	117	130																																																																																																						
1900	7	10	18	34	60	99	153	225	316	431																																																																																																						
2450	4	7	15	30	52	83	123	173	235	309																																																																																																						
3500	2	6	16	32	55	86	124	170	225	290																																																																																																						
5800	1	6	15	27	41	56	71	85	97	106																																																																																																						
Carrier frequency: $f$ = <b>919 MHz</b>																																																																																																																
Distance: $d$ = <b>5 mm</b>																																																																																																																
Transmitter output power: $TP$ = <b>0.35 mW</b>																																																																																																																
Limit: $TP_{limit}$ = <b>7 mW</b>														<input checked="" type="checkbox"/>																																																																																																		
<input type="checkbox"/> SAR evaluation is documented in test report no. ...																																																																																																																

<sup>2</sup> The exemption limit in the table are based on measurements and simulations on half-wave dipole antennas at separation distances of 5 mm to 25 mm from a flat phantom, providing a SAR value of approximately 0.4 W/kg for 1 g of tissue. For low frequencies (300 MHz to 835 MHz), the exemption limits are derived from a linear fit. For high frequencies (1900 MHz and above), the exemption limits are derived from a third order polynomial fit.

<sup>3</sup> Transmitters operating between 3 kHz and 10 MHz, meeting the exemption from routine SAR evaluation, shall demonstrate compliance to the instantaneous limits in IC RSS-102, issue 5, section 4.



<i>Specifications:</i>	RSS-102, Issue 5, Section 4, Table 4, Uncontrolled Environment SPR-002, Issue 1
<i>Operation mode:</i>	UHF Transmitting with modulation
<i>Comment:</i>	---

<i>Test procedure:</i>	IEC 62236-1, Section 4.2 "Measurement to show accordance to the reference levels"			
<i>Test distance:</i>	Direct contact to EUT			
<i>Limit:</i>	<i>Frequency Range (MHz)</i>	<i>Electric Field (V/m<sub>rms</sub>)</i>	<i>Magnetic Field (A/m<sub>rms</sub>)</i>	<i>Reference Periode (min)</i>
	300-6000	3.142 f <sup>0.3417</sup>	0.008335 f <sup>0.3417</sup>	6
	<i>f in MHz</i>			
<i>Test positions:</i>	All surfaces: The antenna was moved all over the equipment under test using a test distance as stated above.			

<i>Measured maximum value (V/m)</i>	<i>Maximum Limit at 919 MHz (V/m)</i>	<i>Margin to reference value (V/m)</i>
5.46	32.34	26.88

<i>Measured maximum value (A/m)</i>	<i>Maximum Limit at 21.85 kHz (A/m)</i>	<i>Margin to reference value (A/m)</i>
0.0145	0.0858	0.0713

**SAR Exclusion threshold**

Maximum Radiated Fields Strength: 92.82 dBµV/m  
 (see chapter 2.1.6 of this test report) (at 3 m distance and 919 MHz)

Calculated Equivalent Radiated Power: 0.35 mW (e.i.r.p.) < 1 mW

Minimum separation distance: 5 mm (≤ 50 mm)

1-g numeric threshold: (10 mW / 5 mm) · √(0.919 GHz) = 1.92

1-g numeric threshold limit: 3.0

Note 1: For test distances below 5 mm according to 4.3.1 a) the test distance is fixed to 5 mm.

$$EIRP = \frac{(FS \cdot D)^2}{30}$$

**2.7.6 Test Location and Test Equipment Used**

This test was carried out in a non-shielded room.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Electromagnetic radiation meter	Narda Safety	EMR-200	19590	36	2019-10-31
Electric field probe	Narda Safety	Type 8.3	19591	36	2019-10-31
Magnetic field probe	Narda Safety	Type 12.1	19592	36	2019-10-31

**Table 19**

### 3 Photographs

#### 3.1 Equipment Under Test (EUT)



Figure 1



Figure 2

## 4 Measurement Uncertainty

For a 95% confidence level, the measurement uncertainties for defined systems are:

Radio Testing			
Test Name	kp	Expanded Uncertainty	Note
Occupied Bandwidth	2.0	±1.14 %	2
RF-Frequency error	1.96	±1 · 10 <sup>-7</sup>	7
RF-Power, conducted carrier	2	±0.079 dB	2
RF-Power uncertainty for given BER	1.96	+0.94 dB / -1.05	7
RF power, conducted, spurious emissions	1.96	+1.4 dB / -1.6 dB	7
RF power, radiated			
25 MHz – 4 GHz	1.96	+3.6 dB / -5.2 dB	8
1 GHz – 18 GHz	1.96	+3.8 dB / -5.6 dB	8
18 GHz – 26.5 GHz	1.96	+3.4 dB / -4.5 dB	8
40 GHz – 170 GHz	1.96	+4.2 dB / -7.1 dB	8
Spectral Power Density, conducted	2.0	±0.53 dB	2
Maximum frequency deviation			
300 Hz – 6 kHz	2	±2,89 %	2
6 kHz – 25 kHz	2	±0.2 dB	2
Maximum frequency deviation for FM	2	±2,89 %	2
Adjacent channel power 25 MHz – 1 GHz	2	±2.31 %	2
Temperature	2	±0.39 K	4
(Relative) Humidity	2	±2.28 %	2
DC- and low frequency AC voltage			
DC voltage	2	±0.01 %	2
AC voltage up to 1 kHz	2	±1.2 %	2
Time	2	±0.6 %	2

**Table 20**

Radio Interference Emission Testing			
Test Name	kp	Expanded Uncertainty	Note
Conducted Voltage Emission			
9 kHz to 150 kHz (50Ω/50μH AMN)	2	± 3.8 dB	1
150 kHz to 30 MHz (50Ω/50μH AMN)	2	± 3.4 dB	1
100 kHz to 200 MHz (50Ω/5μH AMN)	2	± 3.6 dB	1
Discontinuous Conducted Emission			
9 kHz to 150 kHz (50Ω/50μH AMN)	2	± 3.8 dB	1
150 kHz to 30 MHz (50Ω/50μH AMN)	2	± 3.4 dB	1
Conducted Current Emission			
9 kHz to 200 MHz	2	± 3.5 dB	1
Magnetic Fieldstrength			
9 kHz to 30 MHz (with loop antenna)	2	± 3.9 dB	1
9 kHz to 30 MHz (large-loop antenna 2 m)	2	± 3.5 dB	1
Radiated Emission			
Test distance 1 m (ALSE)			
9 kHz to 150 kHz	2	± 4.6 dB	1
150 kHz to 30 MHz	2	± 4.1 dB	1
30 MHz to 200 MHz	2	± 5.2 dB	1
200 MHz to 2 GHz	2	± 4.4 dB	1
2 GHz to 3 GHz	2	± 4.6 dB	1
Test distance 3 m			
30 MHz to 300 MHz	2	± 4.9 dB	1
300 MHz to 1 GHz	2	± 5.0 dB	1
1 GHz to 6 GHz	2	± 4.6 dB	1
Test distance 10 m			
30 MHz to 300 MHz	2	± 4.9 dB	1
300 MHz to 1 GHz	2	± 4.9 dB	1
Radio Interference Power			
30 MHz to 300 MHz	2	± 3.5 dB	1
Harmonic Current Emissions			
			4
Voltage Changes, Voltage Fluctuations and Flicker			
			4

**Table 21**

Immunity Testing			
Test Name	kp	Expanded Uncertainty	Note
Electrostatic Discharges			4
Radiated RF-Field			
Pre-calibrated field level	2	+32.2 / -24.3 %	5
Dynamic feedback field level	2.05	+21.2 / -17.5 %	3
Electrical Fast Transients (EFT) / Bursts			4
Surges			4
Conducted Disturbances, induced by RF-Fields			
via CDN	2	+15.1 / -13.1 %	6
via EM clamp	2	+42.6 / -29.9 %	6
via current clamp	2	+43.9 / -30.5 %	6
Power Frequency Magnetic Field	2	+20.7 / -17.1 %	2
Pulse Magnetic Field			4
Voltage Dips, Short Interruptions and Voltage Variations			4
Oscillatory Waves			4
Conducted Low Frequency Disturbances			
Voltage setting	2	± 0.9 %	2
Frequency setting	2	± 0.1 %	2
Electrical Transient Transmission in Road Vehicles			4

**Table 22**

Note 1:

The expanded uncertainty reported according to CISPR 16-4-2:2003-11 is based on a standard uncertainty multiplied by a coverage factor of  $k_p = 2$ , providing a level of confidence of  $p = 95.45\%$

Note 2:

The expanded uncertainty reported according to UKAS Lab 34 (Edition 1, 2002-08) is based on a standard uncertainty multiplied by a coverage factor of  $k_p = 2$ , providing a level of confidence of  $p = 95.45\%$

Note 3:

The expanded uncertainty reported according to UKAS Lab 34 (Edition 1, 2002-08) is based on a standard uncertainty multiplied by a coverage factor of  $k_p = 2.05$ , providing a level of confidence of  $p = 95.45\%$

Note 4:

It has been demonstrated that the used test equipment meets the specified requirements in the standard with at least a 95% confidence.

Note 5:

The expanded uncertainty reported according to IEC 61000-4-3 is based on a standard uncertainty multiplied by a coverage factor of  $k_p = 2$ , providing a level of confidence of  $p = 95.45\%$

Note 6:

The expanded uncertainty reported according to IEC 61000-4-6 is based on a standard uncertainty multiplied by a coverage factor of  $k_p = 2$ , providing a level of confidence of  $p = 95.45\%$

Note 7:

The expanded uncertainty reported according to ETSI TR 100 028 V1.4.1 (all parts) is based on a standard uncertainty multiplied by a coverage factor of  $k_p = 1.96$ , providing a level of confidence of  $p = 95.45\%$

Note 8:

The expanded uncertainty reported according to ETSI TR 102 273 V1.2.1 (all parts) is based on a standard uncertainty multiplied by a coverage factor of  $k_p = 1.96$ , providing a level of confidence of  $p = 95.45\%$