

# FCC Part 15C Measurement and Test Report

For

Worldwide telecom limited

2F Block C; Shenfang Building, Zhen Hualu, Futian, Shenzhen.

**FCC ID: 2ARO3-WS055**

**FCC Rule(s):** FCC Part 15.247

**Product Description:** Smart phone

**Tested Model:** WS056

**Report No.:** WTX19X06041464W-2

**Sample Receipt Date:** 2019-06-24

**Tested Date:** 2019-06-24 to 2019-07-04

**Issued Date:** 2019-07-04

**Tested By:** Jason Su / Engineer

**Reviewed By:** Silin Chen / EMC Manager

**Approved & Authorized By:** Jandy So / PSQ Manager

**Prepared By:**

*Jason Su*  
*Silin Chen*  
*Jandy So*

**Shenzhen SEM Test Technology Co., Ltd.**

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,  
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM Test Technology Co., Ltd.

---

**TABLE OF CONTENTS**

<b>1. GENERAL INFORMATION.....</b>	<b>3</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS.....	4
1.3 TEST METHODOLOGY.....	4
1.4 TEST FACILITY.....	4
1.5 EUT SETUP AND TEST MODE.....	5
1.6 MEASUREMENT UNCERTAINTY.....	6
1.7 TEST EQUIPMENT LIST AND DETAILS.....	7
<b>2. SUMMARY OF TEST RESULTS.....</b>	<b>8</b>
<b>3. RF EXPOSURE.....</b>	<b>9</b>
3.1 STANDARD APPLICABLE.....	9
3.2 TEST RESULT.....	9
<b>4. ANTENNA REQUIREMENT.....</b>	<b>10</b>
4.1 STANDARD APPLICABLE.....	10
4.2 EVALUATION INFORMATION.....	10
<b>5. FIELD STRENGTH OF SPURIOUS EMISSIONS.....</b>	<b>11</b>
5.1 STANDARD APPLICABLE.....	11
5.2 TEST PROCEDURE.....	11
5.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	12
5.4 SUMMARY OF TEST RESULTS/PLOTS.....	12
<b>6. OUT OF BAND EMISSIONS.....</b>	<b>20</b>
6.1 STANDARD APPLICABLE.....	20
6.2 TEST PROCEDURE.....	20
6.3 SUMMARY OF TEST RESULTS/PLOTS.....	21

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: Worldwide telecom limited  
 Address of applicant: 2F Block C; Shenfang Building, Zhen Hualu, Futian, Shenzhen.

Manufacturer: Worldwide telecom limited  
 Address of manufacturer: 2F Block C; Shenfang Building, Zhen Hualu, Futian, Shenzhen.

General Description of EUT	
Product Name:	Smart phone
Trade Name:	WOLKI
Model No.:	WS056
Adding Model(s):	/
Rated Voltage:	DC 3.7V
Adapter Model:	Model: WCH05 Input:AC100-240V 50/60Hz 0.15A Output:DC5V 1000mA
<i>Note: The test data is gathered from a production sample provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	802.11b, 802.11g, 802.11n
Frequency Range:	2412-2462MHz for 802.11b/g/n-HT20 2422-2452MHz for 802.11n-HT40
RF Output Power:	16.40dBm (Conducted)
Type of Modulation:	CCK, OFDM, QPSK, BPSK, 16QAM, 64QAM
Data Rate:	1-11Mbps, 6-54Mbps, up to 150Mbps
Quantity of Channels:	11 for 802.11b/g/n-HT20 7 for 802.11n-HT40
Channel Separation:	5MHz
Type of Antenna:	Integral Antenna
Antenna Gain:	1.35dBi
Lowest Internal Frequency of EUT:	26 MHz

## 1.2 Test Standards

The tests were performed according to following standards:

**FCC Rules Part 15.247:** Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

**558074 D01 15.247 Meas Guidance v05:** Guidance For Compliance Measurements On Digital Transmission System, Frequency Hopping Spread Spectrum System, And Hybrid System Devices Operating Under Section 15.247 Of The Fcc Rules

**ANSI C63.10-2013:** American National Standard for Testing Unlicensed Wireless Devices.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

## 1.4 Test Facility

### **FCC – Registration No.: 125990**

Shenzhen SEM Test Technology Co., Ltd. Laboratory has been recognized to perform compliance testing on equipment subject to the Commissions Declaration Of Conformity (DOC). The Designation Number is CN5010, and Test Firm Registration Number is 125990.

### **Industry Canada (IC) Registration No.: 11464A**

The 3m Semi-anechoic chamber of Shenzhen SEM Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

## 1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11b	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM2	802.11g	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM3	802.11n-HT20	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM4	802.11n-HT40	Low:2422MHz, Middle:2437MHz,High:2452MHz

Note: All test modes (different data rate and different modulation) are performed, but only the worst case is recorded in this report.

Test Conditions	
Temperature:	22~25 °C
Relative humidity	50~56 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
USB Cable	1.0	Unshielded	Without Ferrite
Earphone Cable	1.0	Unshielded	Without Ferrite

Accessories Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

## 1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

## 1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2019-04-30	2020-04-29
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2019-04-30	2020-04-29
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2019-04-30	2020-04-29
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2019-04-30	2020-04-29
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2019-04-30	2020-04-29
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2019-05-05	2021-05-04
SEMT-1042	Horn Antenna	ETS	3117	00086197	2019-05-05	2021-05-04
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2019-05-05	2021-05-04
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2019-05-05	2021-05-04
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2019-04-30	2020-04-29
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2019-04-30	2020-04-29
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2019-04-30	2020-04-29
SEMT-1168	Pre-amplifier	Direction Systems Inc.	PAP-0126	14141-12838	2019-04-30	2020-04-29
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2019-04-30	2020-04-29
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2019-04-30	2020-04-29
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2019-05-05	2021-05-04
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2019-04-30	2020-04-29
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2019-04-30	2020-04-29
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2019-04-30	2020-04-29
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2019-03-18	2020-03-17
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2019-03-18	2020-03-17
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2019-03-18	2020-03-17
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2019-03-18	2020-03-17
SEMT-C005	Cable	Zheng DI	1M0RFC	/	2019-03-18	2020-03-17
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2019-03-18	2020-03-17

## 2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 2.1093	RF Exposure	Compliant
§ 15.203; § 15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§ 15.207(a)	Conducted Emission	N/A
§ 15.247(e)	Power Spectral Density	N/A
§ 15.247(a)(2)	DTS Bandwidth	N/A
§ 15.247(b)(3)	RF Output Power	N/A
§ 15.209(a)	Radiated Emission	Compliant
§ 15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: not applicable

Note: Report is for C2PC only. The test data includes Antenna Requirement, Radiated Emission and Band Edge (Out of Band Emissions). Those not tested mark with N/A (not effected by the C2PC).



### **3. RF Exposure**

---

#### **3.1 Standard Applicable**

According to § 1.1307 and § 2.1093, the portable transmitter must comply the RF exposure requirements.

#### **3.2 Test Result**

This product complied with the requirement of the RF exposure, please see the SAR Report.

## **4. Antenna Requirement**

---

### **4.1 Standard Applicable**

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

### **4.2 Evaluation Information**

This product has an Integral antenna, fulfill the requirement of this section.

## 5. Field Strength of Spurious Emissions

### 5.1 Standard Applicable


According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).


The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

### 5.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

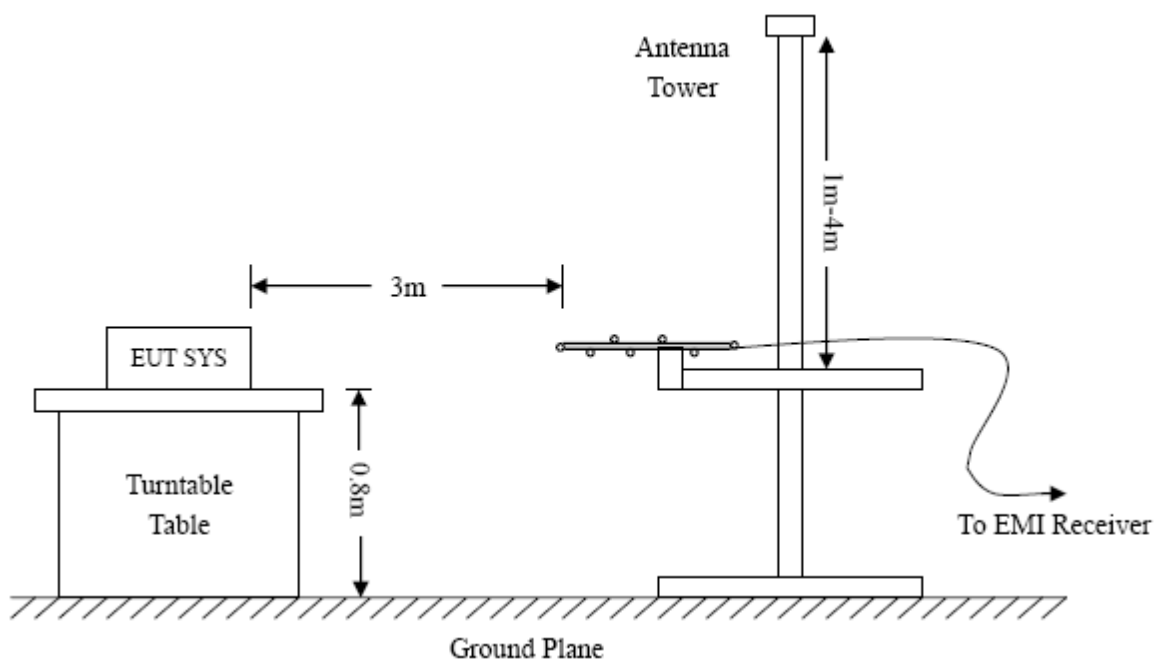

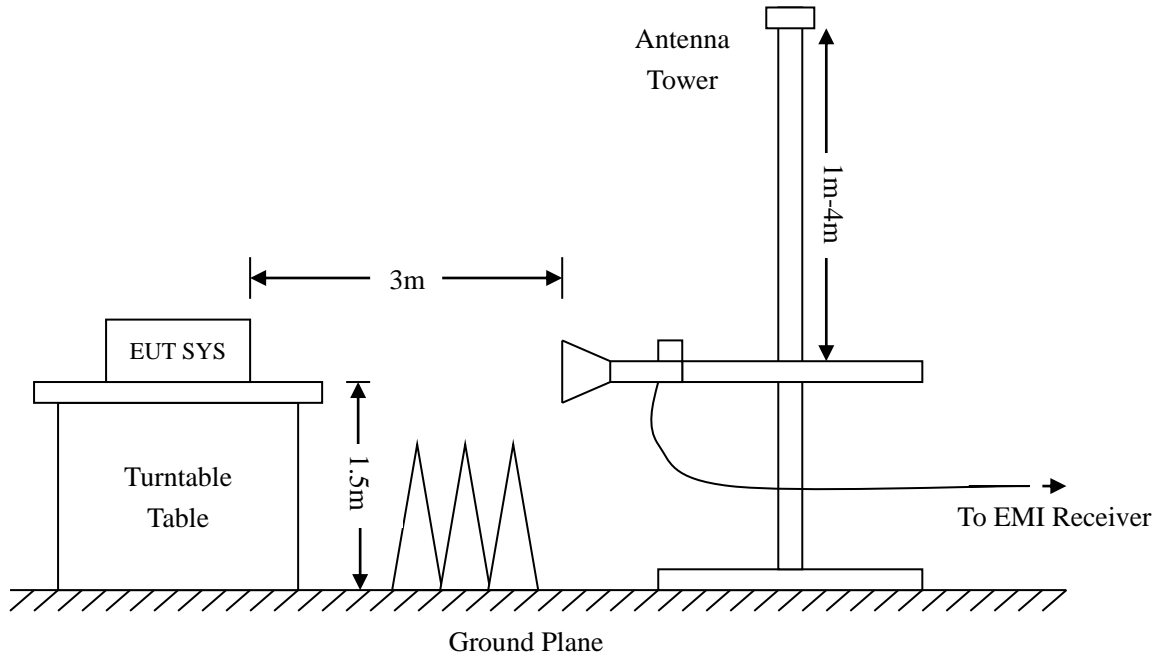

Frequency :9kHz-30MHz

RBW=10KHz,

VBW =30KHz

Sweep time= Auto

Trace = max hold

Detector function = peak

Frequency :30MHz-1GHz

RBW=120KHz,

VBW=360KHz

Sweep time= Auto

Trace = max hold

Detector function = peak, QP

Frequency :Above 1GHz

RBW=1MHz,

VBW=3MHz(Peak), 10Hz(AV)

Sweep time= Auto

Trace = max hold

Detector function = peak, AV

### 5.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB $\mu$ V means the emission is 6dB $\mu$ V below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$


### 5.4 Summary of Test Results/Plots

*Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.*

*All test modes (different data rate and different modulation) are performed, but only the worst case is recorded in this report.*


➤ Spurious Emissions Below 1GHz

802.11b_11Mbps			
Test Channel	Low	Polarity:	Horizontal

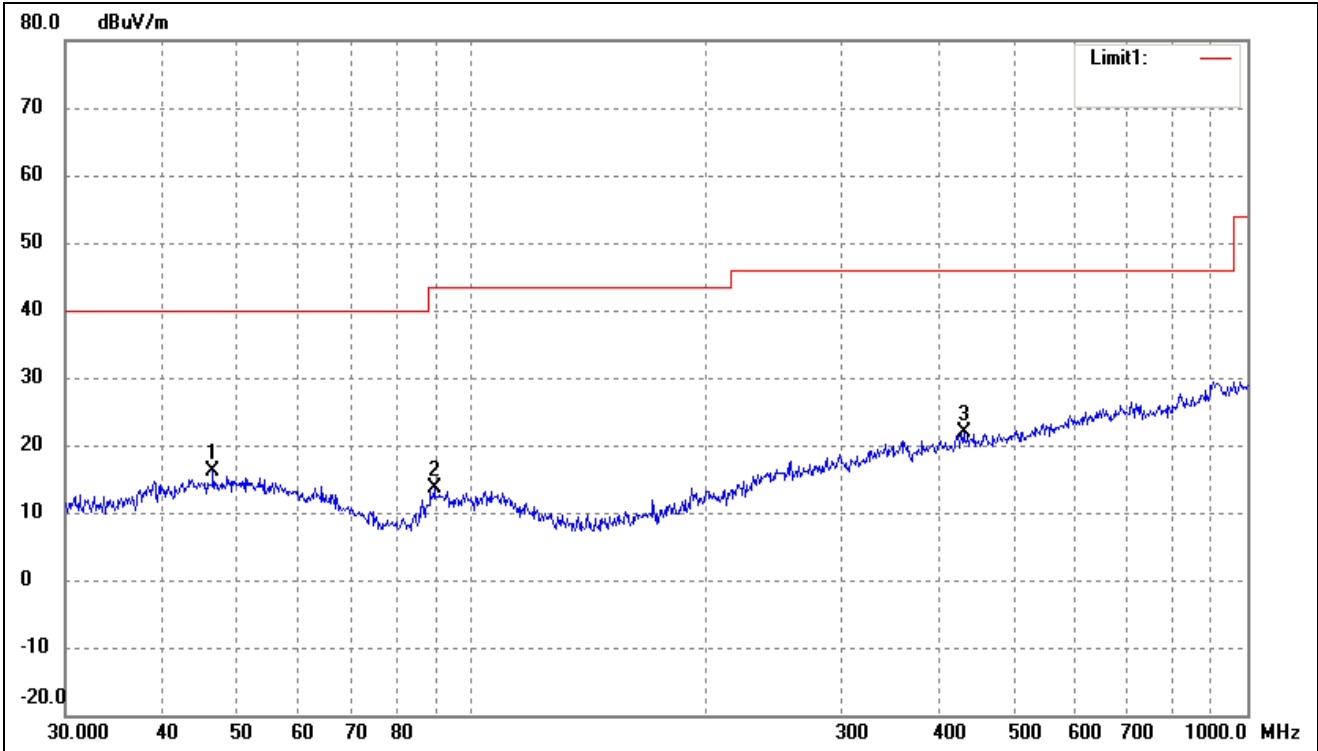


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	46.5030	27.93	-11.77	16.16	40.00	-23.84	167	100	peak
2	89.5900	27.31	-13.72	13.59	43.50	-29.91	128	100	peak
3	431.0316	27.83	-6.06	21.77	46.00	-24.23	108	100	peak

802.11b_11Mbps			
Test Channel	Low	Polarity:	Vertical

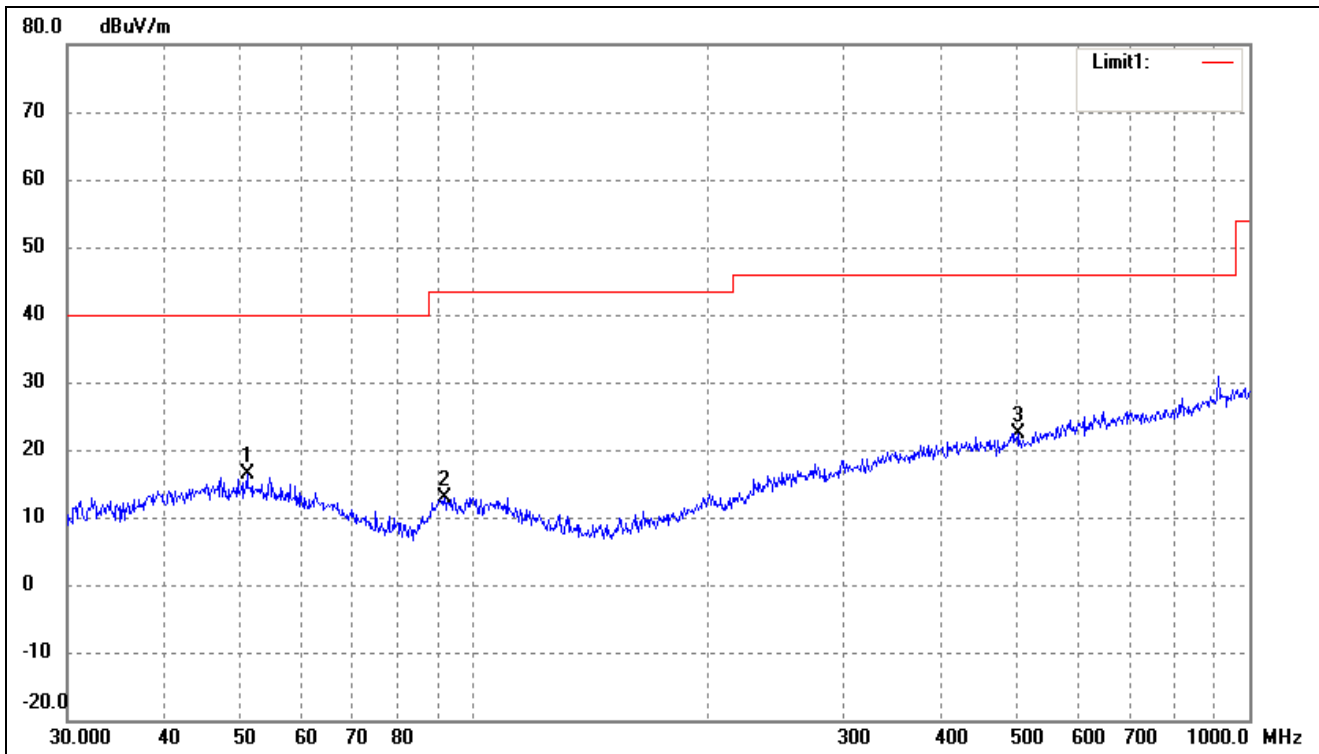


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	51.1209	28.02	-11.59	16.43	40.00	-23.57	325	100	peak
2	91.8163	26.71	-13.76	12.95	43.50	-30.55	111	100	peak
3	502.9395	27.79	-5.45	22.34	46.00	-23.66	81	100	peak

802.11b_11Mbps			
Test Channel	Middle	Polarity:	Horizontal

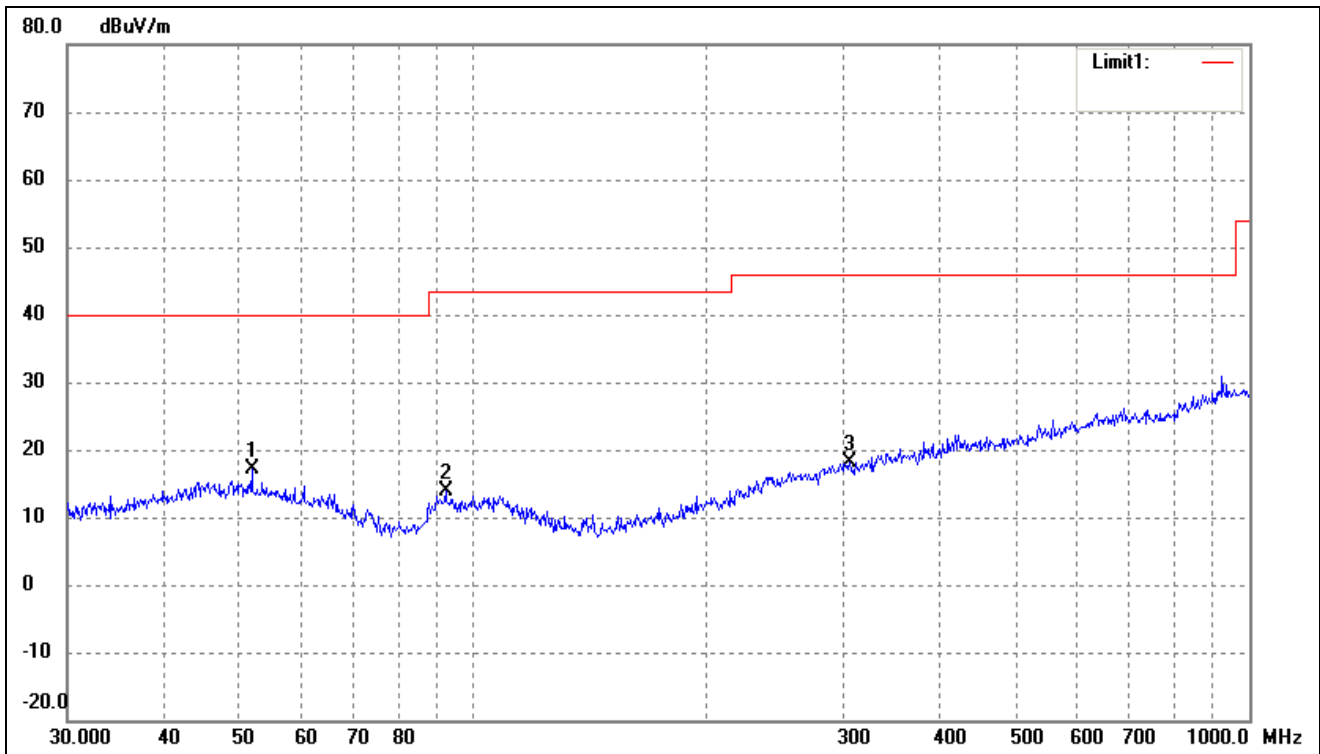

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	51.8430	28.65	-11.59	17.06	40.00	-22.94	95	100	peak
2	92.1388	27.78	-13.83	13.95	43.50	-29.55	164	100	peak
3	305.6800	26.25	-8.24	18.01	46.00	-27.99	104	100	peak


802.11b_11Mbps			
Test Channel	Middle	Polarity:	Vertical

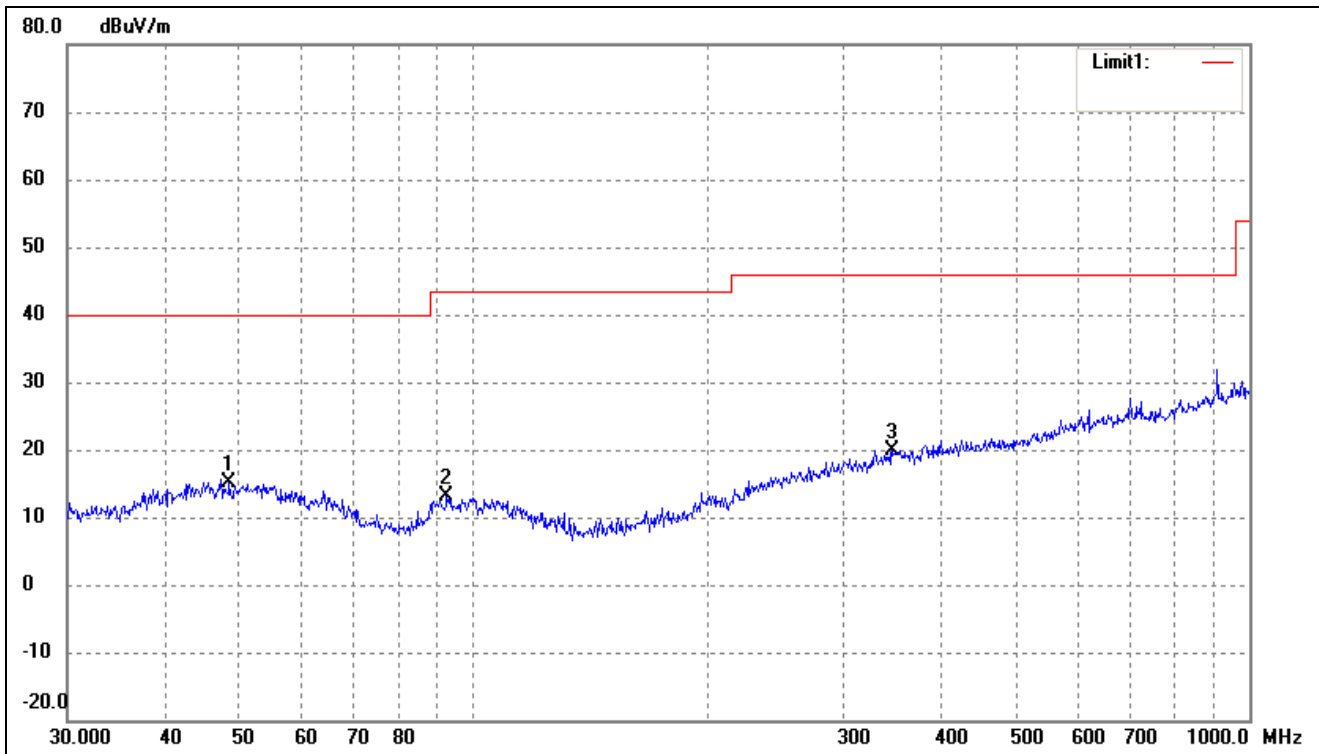

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	48.5016	26.85	-11.64	15.21	40.00	-24.79	314	100	peak
2	92.4624	27.06	-13.89	13.17	43.50	-30.33	195	100	peak
3	346.8092	26.91	-7.01	19.90	46.00	-26.10	134	100	peak




802.11b_11Mbps			
Test Channel	High	Polarity:	Horizontal

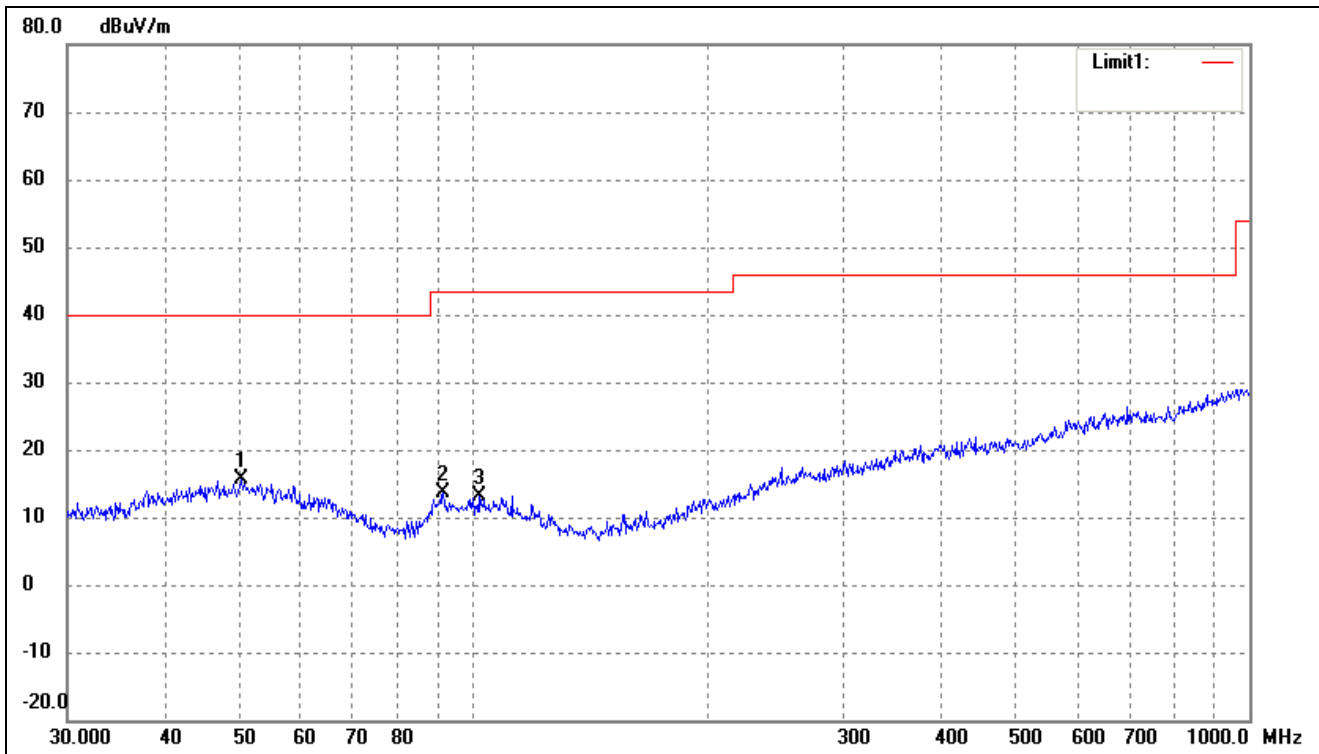

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	50.2325	27.24	-11.60	15.64	40.00	-24.36	88	100	peak
2	91.4949	27.25	-13.70	13.55	43.50	-29.95	264	100	peak
3	101.6443	26.80	-13.66	13.14	43.50	-30.36	74	100	peak

802.11b_11Mbps			
Test Channel	High	Polarity:	Vertical

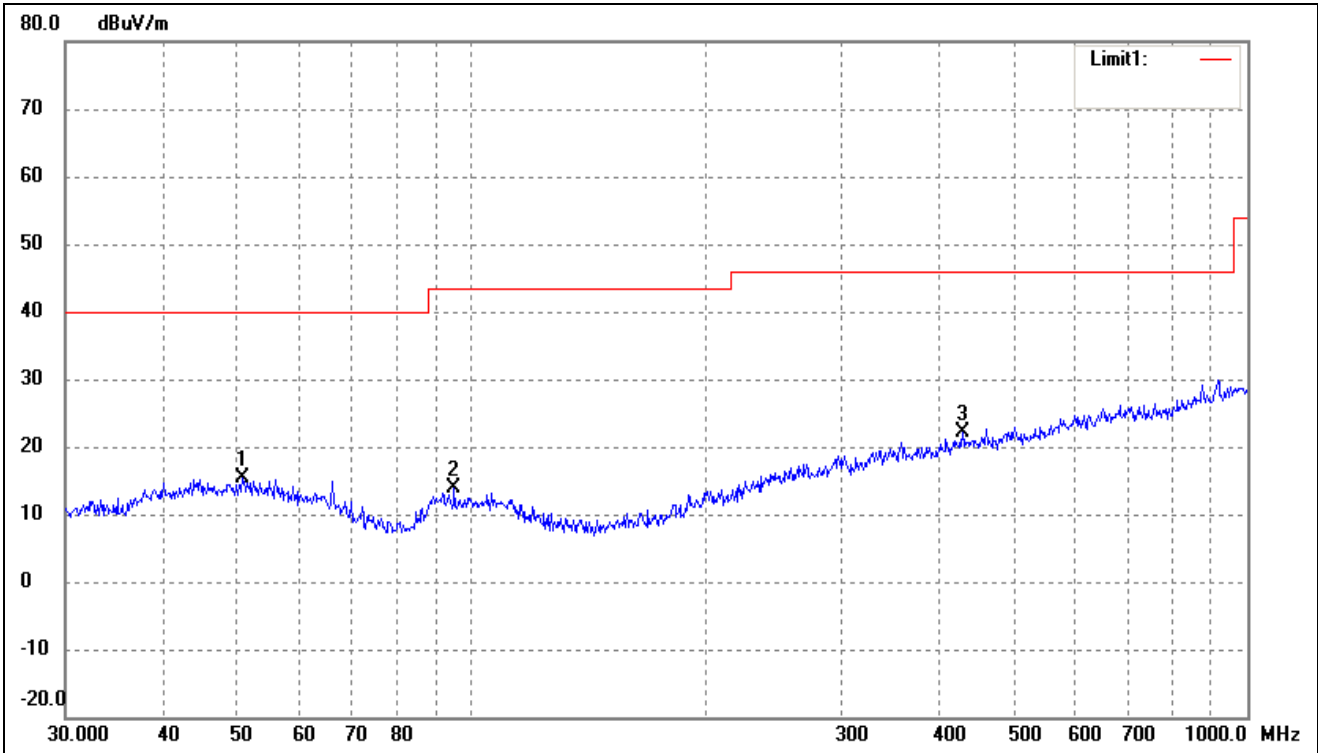

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	50.7637	26.95	-11.59	15.36	40.00	-24.64	258	100	peak
2	95.0930	28.30	-14.39	13.91	43.50	-29.59	98	100	peak
3	429.5228	28.07	-6.06	22.01	46.00	-23.99	349	100	peak

- Spurious Emissions Below 1GHz
- Test Mode: 802.11b\_11Mbps (worst case)

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2412MHz							
4824.000	61.17	-3.86	57.31	74	-16.69	H	PK
4824.000	42.58	-3.86	38.72	54	-15.28	H	AV
7236.000	53.2	1.1	54.3	74	-19.7	H	PK
7236.000	38.5	1.1	39.6	54	-14.4	H	AV
4824.000	61	-3.86	57.14	74	-16.86	V	PK
4824.000	43.08	-3.86	39.22	54	-14.78	V	AV
7236.000	54.73	1.1	55.83	74	-18.17	V	PK
7236.000	38.08	1.1	39.18	54	-14.82	V	AV
Middle Channel-2437MHz							
4874.000	60.33	-3.74	56.59	74	-17.41	H	PK
4874.000	42.79	-3.74	39.05	54	-14.95	H	AV
7311.000	54.64	1.47	56.11	74	-17.89	H	PK
7311.000	39.2	1.47	40.67	54	-13.33	H	AV
4874.000	60.22	-3.74	56.48	74	-17.52	V	PK
4874.000	42.49	-3.74	38.75	54	-15.25	V	AV
7311.000	52.76	1.47	54.23	74	-19.77	V	PK
7311.000	39.02	1.47	40.49	54	-13.51	V	AV
High Channel-2462MHz							
4924.000	59.61	-3.63	55.98	74	-18.02	H	PK
4924.000	41.05	-3.63	37.42	54	-16.58	H	AV
7386.000	55.08	1.62	56.7	74	-17.3	H	PK
7386.000	40.22	1.62	41.84	54	-12.16	H	AV
4924.000	58.75	-3.63	55.12	74	-18.88	V	PK
4924.000	42.62	-3.63	38.99	54	-15.01	V	AV
7386.000	52.92	1.62	54.54	74	-19.46	V	PK
7386.000	39.82	1.62	41.44	54	-12.56	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

## 6. Out of Band Emissions

---

### 6.1 Standard Applicable

According to §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

### 6.2 Test Procedure

According to the KDB 558074D01 v05 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.11, the Emissions in nonrestricted frequency bands test method as follows:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW  $\geq [3 \times \text{RBW}]$ .
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

According to the KDB 558074 D01 v05 Subclause 8.5 and ANSI C63.10-2013 Subclause 11.12, the Emissions in restricted frequency bands test method as follows:

#### A. Radiated emission measurements:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement KDB publication number: 913591 may be used for the radiated bandedge measurements.

## B. Antenna-port conducted measurements

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 9/
- b) VBW  $\geq [3 \times \text{RBW}]$ .
- c) Detector = peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be lengthened for low-duty-cycle applications.)

**Table 9—RBW as a function of frequency**

Frequency	RBW
9 kHz to 150 kHz	200 Hz to 300 Hz
0.15 MHz to 30 MHz	9 kHz to 10 kHz
30 MHz to 1000 MHz	100 kHz to 120 kHz
>1000 MHz	1 MHz


If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

## 6.3 Summary of Test Results/Plots


## ➤ Radiated test

802.11b_11Mbps			
Test Channel	Low	Polarity:	Horizontal(worst case)

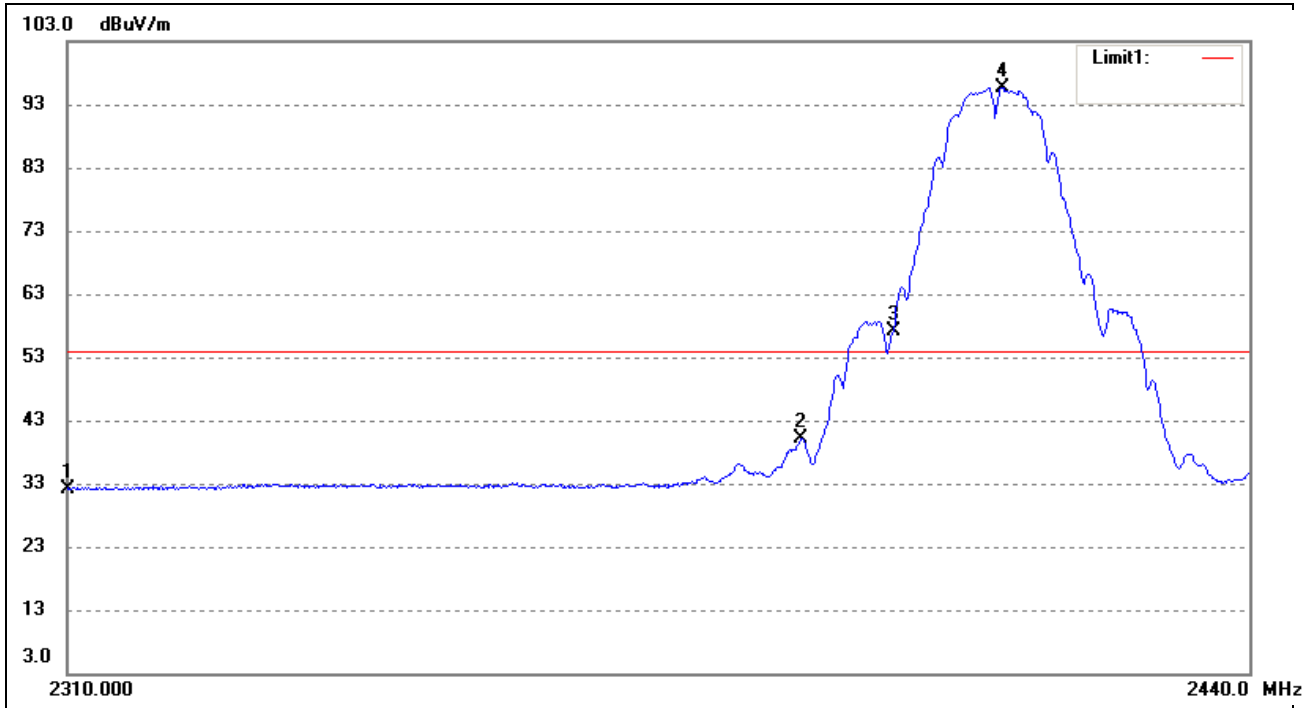


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	39.33	-7.09	32.24	54.00	-21.76	Average Detector
	2310.000	51.06	-7.09	43.97	74.00	-30.03	Peak Detector
2	2390.000	46.86	-6.78	40.08	54.00	-13.92	Average Detector
	2390.000	55.47	-6.78	48.69	74.00	-25.31	Peak Detector
3	2400.000	63.85	-6.74	57.11	Delta=38.6dBc		Average Detector
4	2412.239	102.40	-6.69	95.71			Average Detector

802.11b_11Mbps			
Test Channel	High	Polarity:	Horizontal(worst case)

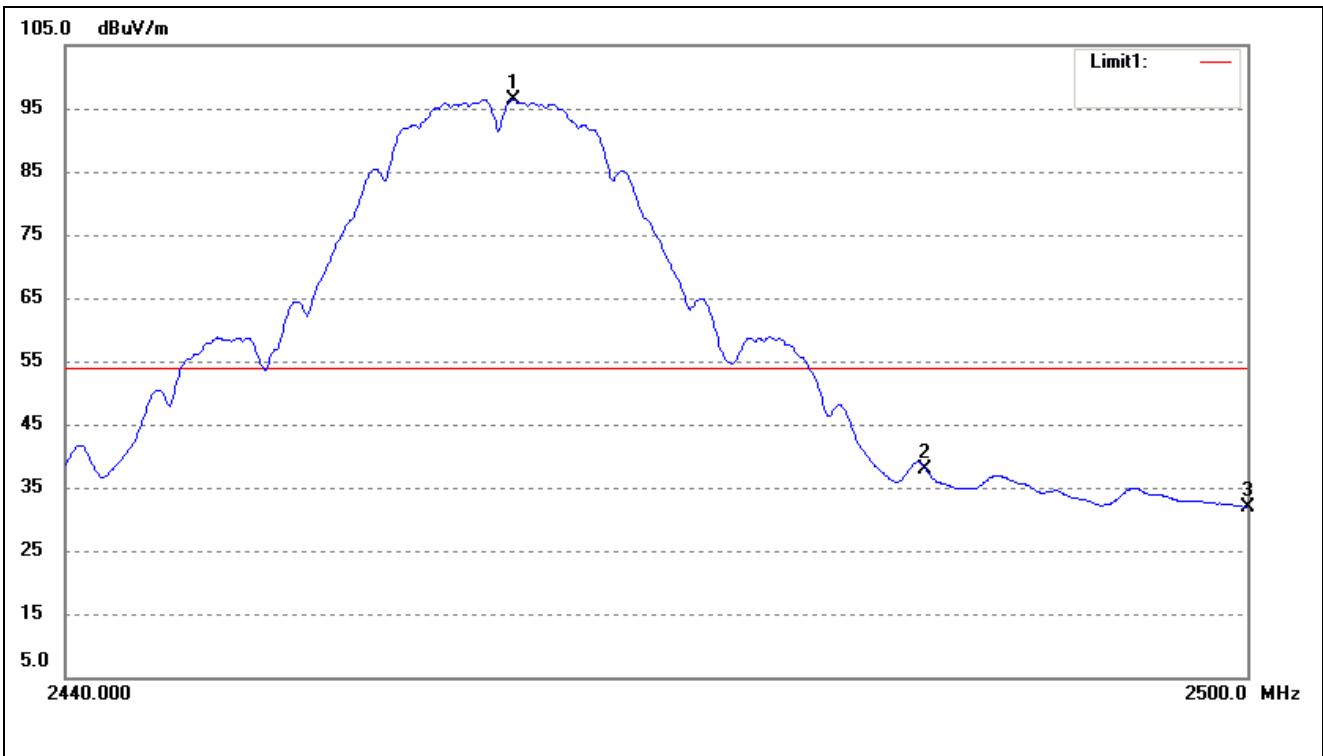

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2462.569	102.98	-6.49	96.49	/	/	Average Detector
	2463.227	107.79	-6.49	101.30	/	/	Peak Detector
2	2483.500	44.30	-6.41	37.89	54.00	-16.11	Average Detector
	2483.500	54.07	-6.41	47.66	74.00	-26.34	Peak Detector
3	2500.000	38.25	-6.34	31.91	54.00	-22.09	Average Detector
	2500.000	50.07	-6.34	43.73	74.00	-30.27	Peak Detector


802.11g_54Mbps			
Test Channel	Low	Polarity:	Horizontal(worst case)

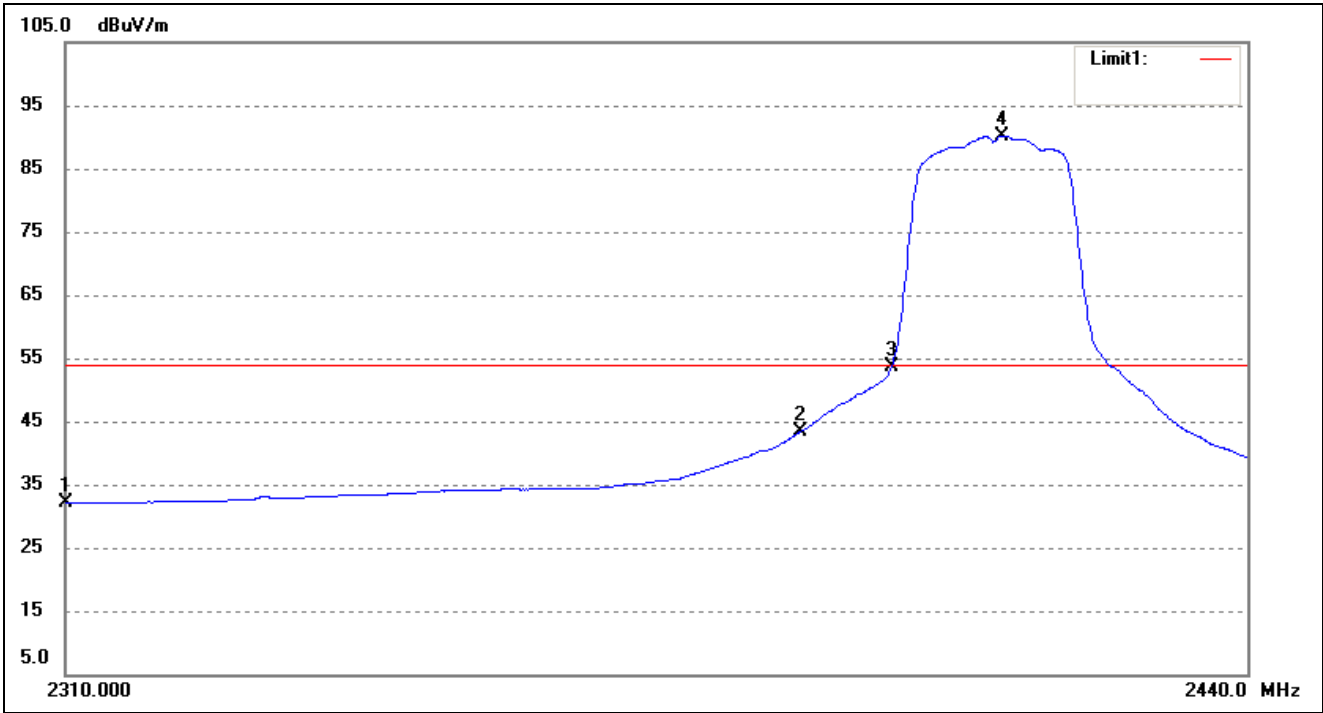

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	39.18	-7.09	32.09	54.00	-21.91	Average Detector
	2310.000	50.92	-7.09	43.83	74.00	-30.17	Peak Detector
2	2390.000	50.18	-6.78	43.40	54.00	-10.60	Average Detector
	2390.000	69.42	-6.78	62.64	74.00	-11.36	Peak Detector
3	2400.000	60.31	-6.74	53.57	Delta=36.65dBc		Average Detector
4	2412.371	96.91	-6.69	90.22			Average Detector




802.11g_54Mbps			
Test Channel	High	Polarity:	Horizontal(worst case)

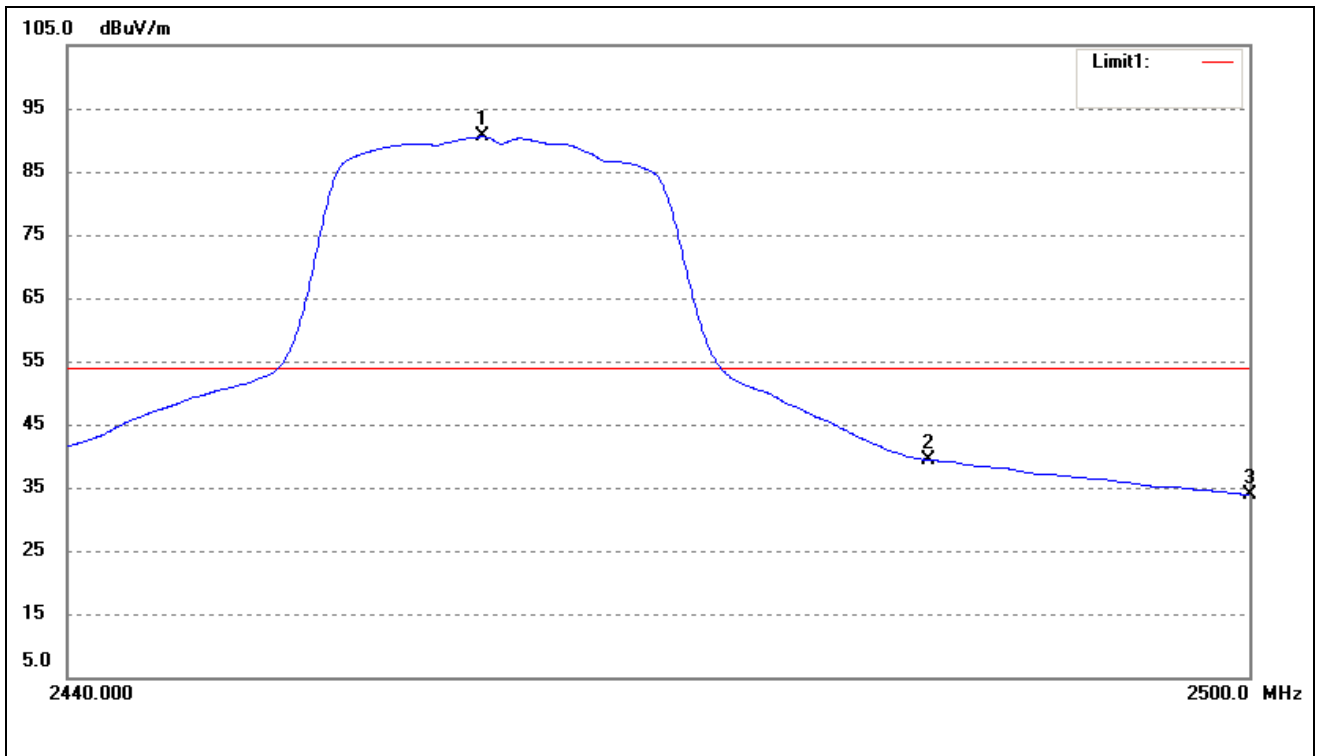


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2460.894	97.02	-6.49	90.53	/	/	Average Detector
	2463.287	108.04	-6.49	101.55	/	/	Peak Detector
2	2483.500	45.90	-6.41	39.49	54.00	-14.51	Average Detector
	2483.500	64.79	-6.41	58.38	74.00	-15.62	Peak Detector
3	2500.000	40.20	-6.34	33.86	54.00	-20.14	Average Detector
	2500.000	52.71	-6.34	46.37	74.00	-27.63	Peak Detector

802.11n-HT20_MCS7			
Test Channel	Low	Polarity:	Horizontal(worst case)

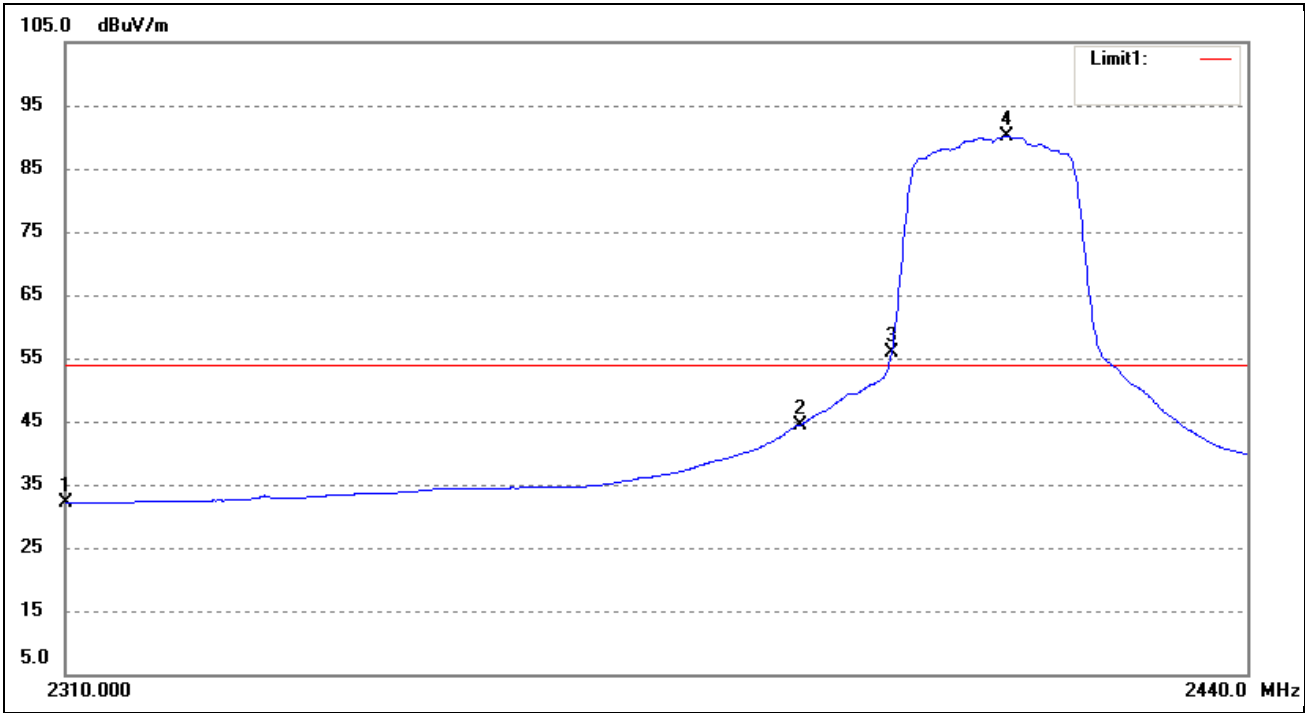


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	39.24	-7.09	32.15	54.00	-21.85	Average Detector
	2310.000	52.12	-7.09	45.03	74.00	-28.97	Peak Detector
2	2390.000	51.25	-6.78	44.47	54.00	-9.53	Average Detector
	2390.000	70.33	-6.78	63.55	74.00	-10.45	Peak Detector
3	2400.000	62.53	-6.74	55.79	Delta=34.39dBc		Average Detector
4	2412.899	96.87	-6.69	90.18			Average Detector

802.11n-HT20_MCS7			
Test Channel	High	Polarity:	Horizontal(worst case)

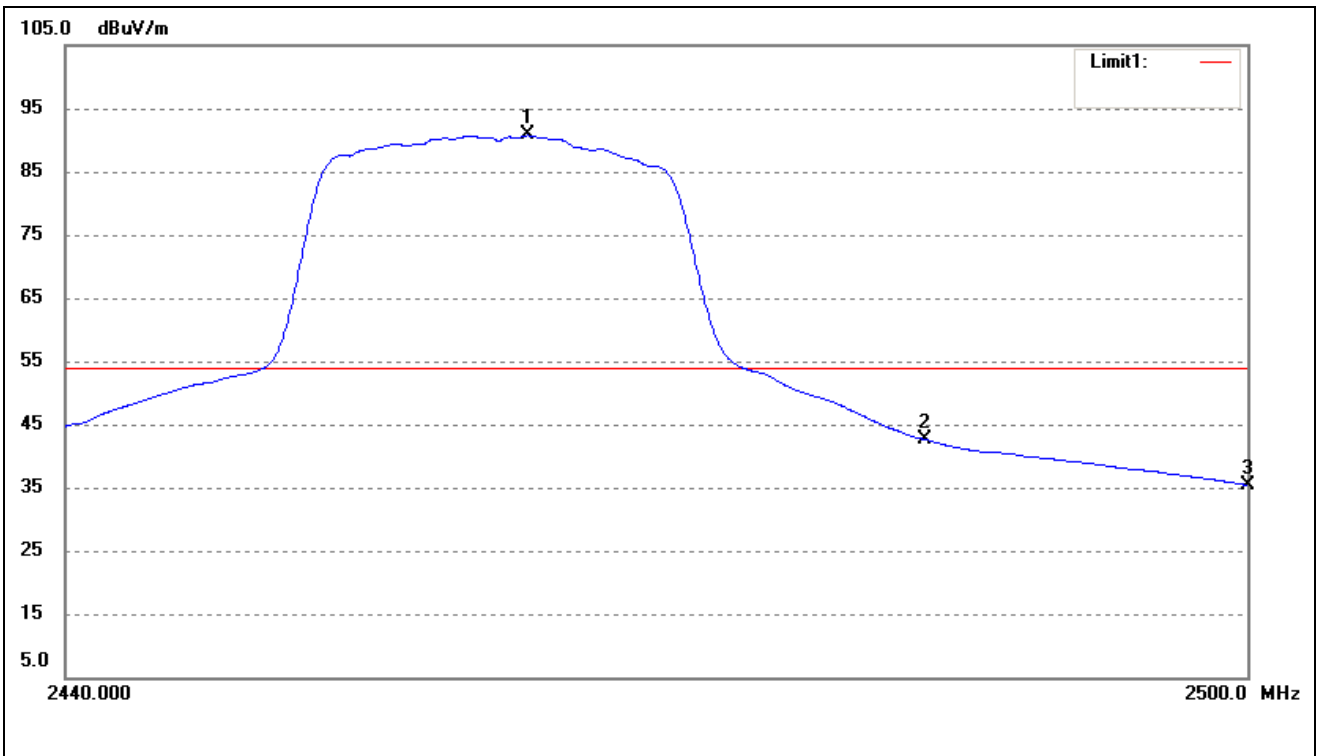


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2463.287	97.25	-6.49	90.76	/	/	Average Detector
	2459.759	107.89	-6.49	101.40	/	/	Peak Detector
2	2483.500	49.03	-6.41	42.62	54.00	-11.38	Average Detector
	2483.500	70.13	-6.41	63.72	74.00	-10.28	Peak Detector
3	2500.000	41.79	-6.34	35.45	54.00	-18.55	Average Detector
	2500.000	57.09	-6.34	50.75	74.00	-23.25	Peak Detector

802.11n-HT40_MCS7			
Test Channel	Low	Polarity:	Horizontal(worst case)

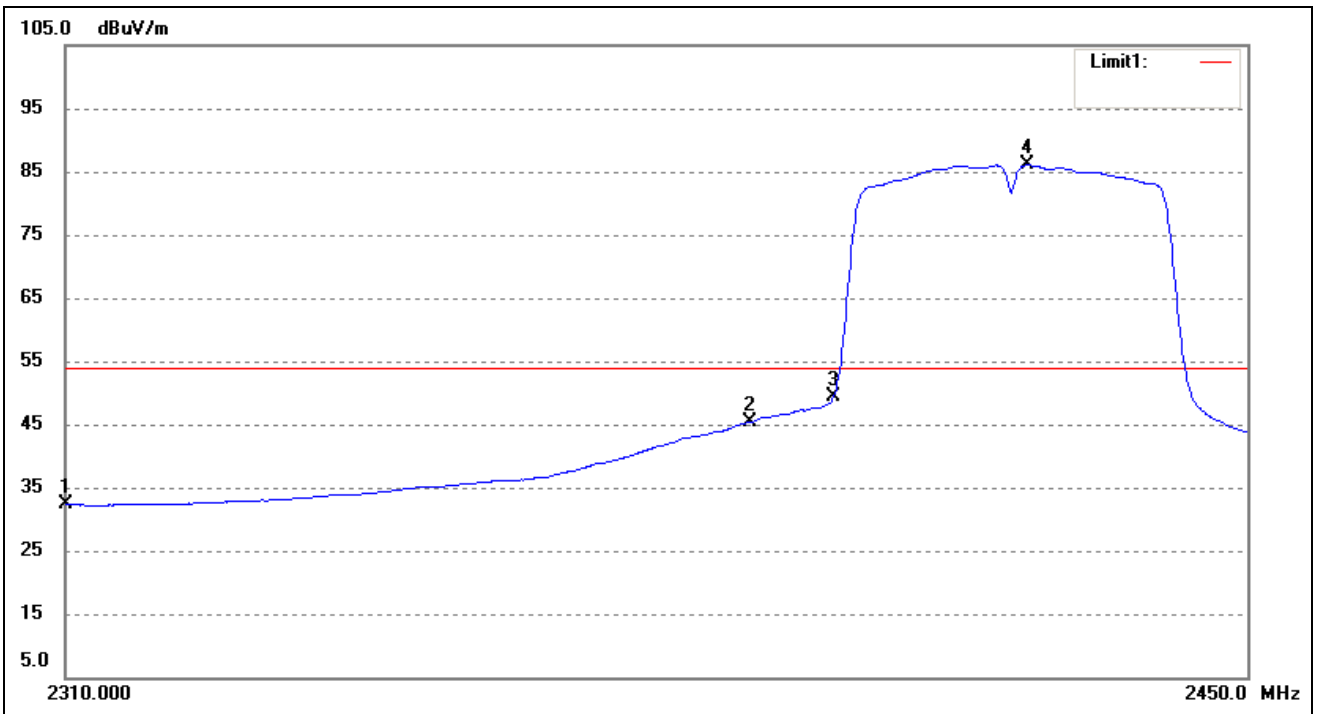

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	39.38	-7.09	32.29	54.00	-21.71	Average Detector
	2310.000	51.54	-7.09	44.45	74.00	-29.55	Peak Detector
2	2390.000	52.20	-6.78	45.42	54.00	-8.58	Average Detector
	2390.000	69.29	-6.78	62.51	74.00	-11.49	Peak Detector
3	2400.000	56.09	-6.74	49.35	Delta=36.71 dBc		Average Detector
4	2423.333	92.70	-6.64	86.06		Average Detector	

802.11n-HT40_MCS7			
Test Channel	High	Polarity:	Horizontal(worst case)

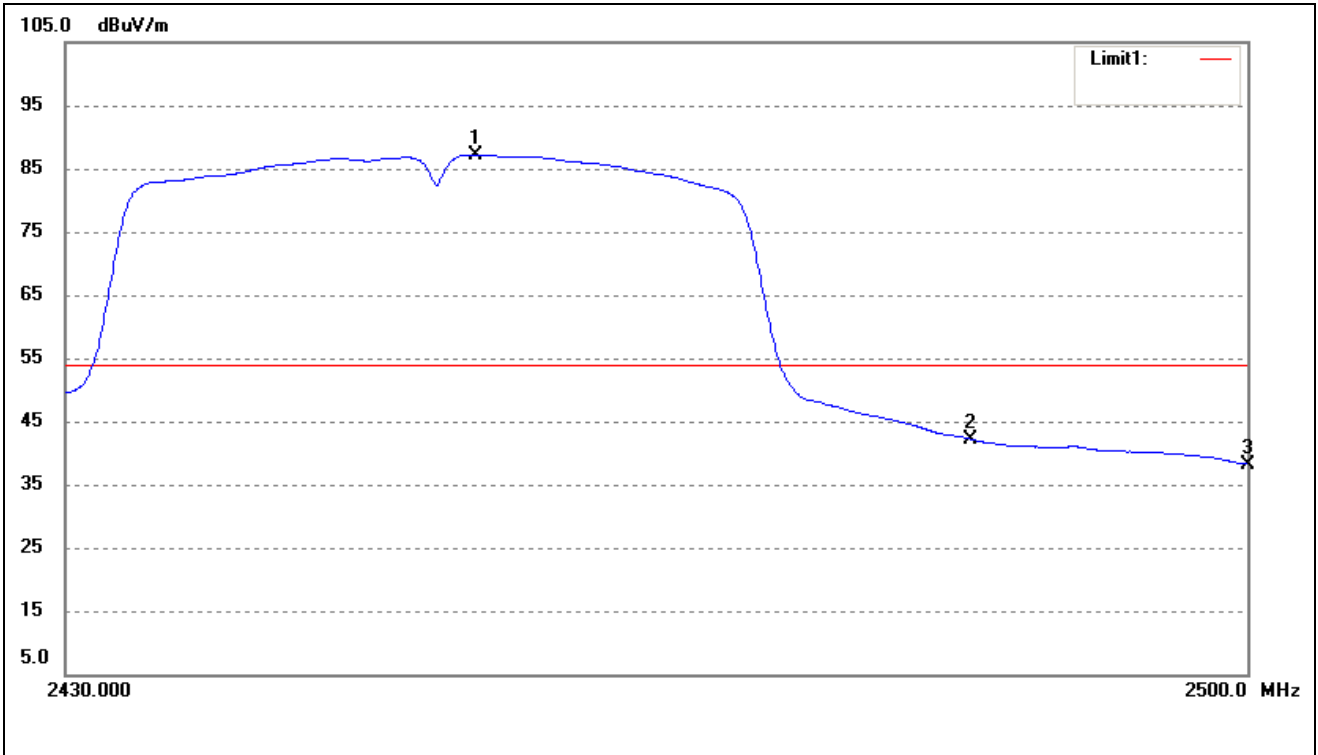

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2454.065	93.77	-6.52	87.25	/	/	Average Detector
	2454.623	104.60	-6.52	98.08	/	/	Peak Detector
2	2483.500	48.61	-6.41	42.20	54.00	-11.80	Average Detector
	2483.500	69.26	-6.41	62.85	74.00	-11.15	Peak Detector
3	2500.000	44.57	-6.34	38.23	54.00	-15.77	Average Detector
	2500.000	62.07	-6.34	55.73	74.00	-18.27	Peak Detector

\*\*\*\*\* END OF REPORT \*\*\*\*\*