

TEST REPORT

Reference No..... : WTX22X01005985W-1
FCC ID : 2ARO3-WW180
Applicant : Worldwide Telecom Limited.
Address..... : 2F Block C,Shenfang Building,Zhen Hualu,Futian ,Shenzhen.
Product Name : Smartwatch
Test Model. : WW1.80
Standards : FCC Part 15.247
Date of Receipt sample : Jan. 12, 2022
Date of Test..... : Jan. 12, 2022 to Jan. 20, 2022
Date of Issue : Jan. 20, 2022
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308

Fax.: +86-755-33663309

Tested by:

Reviewed By:

Approved & Authorized By:

Jack Huang

Jason Su

Silin Chen

Jack Huang / Project Engineer

Jason Su / RF Manager

Silin Chen / Manager

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
1.2 TEST STANDARDS	5
1.3 TEST METHODOLOGY	5
1.4 TEST FACILITY	5
1.5 EUT SETUP AND TEST MODE	6
1.6 MEASUREMENT UNCERTAINTY	7
1.7 TEST EQUIPMENT LIST AND DETAILS	8
2. SUMMARY OF TEST RESULTS	10
3. ANTENNA REQUIREMENT	11
3.1 STANDARD APPLICABLE	11
3.2 EVALUATION INFORMATION	11
4. POWER SPECTRAL DENSITY	12
4.1 STANDARD APPLICABLE	12
4.2 TEST SETUP BLOCK DIAGRAM	12
4.3 TEST PROCEDURE	12
4.4 SUMMARY OF TEST RESULTS/PLOTS	12
5. DTS BANDWIDTH	13
5.1 STANDARD APPLICABLE	13
5.2 TEST SETUP BLOCK DIAGRAM	13
5.3 TEST PROCEDURE	13
5.4 SUMMARY OF TEST RESULTS/PLOTS	13
6. RF OUTPUT POWER	14
6.1 STANDARD APPLICABLE	14
6.2 TEST SETUP BLOCK DIAGRAM	14
6.3 TEST PROCEDURE	14
6.4 SUMMARY OF TEST RESULTS/PLOTS	14
7. FIELD STRENGTH OF SPURIOUS EMISSIONS	15
7.1 STANDARD APPLICABLE	15
7.2 TEST PROCEDURE	15
7.3 CORRECTED AMPLITUDE & MARGIN CALCULATION	17
7.4 SUMMARY OF TEST RESULTS/PLOTS	17
8. OUT OF BAND EMISSIONS	23
8.1 STANDARD APPLICABLE	23
8.2 TEST PROCEDURE	23
8.3 SUMMARY OF TEST RESULTS/PLOTS	24
9. CONDUCTED EMISSIONS	29
9.1 TEST PROCEDURE	29
9.2 BASIC TEST SETUP BLOCK DIAGRAM	29
9.3 TEST RECEIVER SETUP	29
9.4 SUMMARY OF TEST RESULTS/PLOTS	29
APPENDIX SUMMARY	32
APPENDIX A	33
APPENDIX B	36
APPENDIX C	39
APPENDIX D	42
APPENDIX PHOTOGRAPHS	46

Report version

Version No.	Date of issue	Description
Rev.00	Jan. 20, 2022	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Worldwide Telecom Limited.
 Address of applicant: 2F Block C,Shenfang Building,Zhen Hualu,Futian,
 Shenzhen.

Manufacturer: Worldwide Telecom Limited.
 Address of manufacturer: 2F Block C,Shenfang Building,Zhen Hualu,Futian,
 Shenzhen.

General Description of EUT	
Product Name:	Smartwatch
Trade Name	WOLKI
Model No.:	WW1.80
Adding Model(s):	/
Rated Voltage:	Battery DC 3.7V
Battery Capacity:	180mAh
Power Adapter:	/
<i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Bluetooth Version:	V5.0 (BLE mode)
Frequency Range:	2402-2480MHz
RF Output Power:	1Mbps: 4.408dBm (Conducted) 2Mbps: 4.341dBm (Conducted)
Data Rate:	1Mbps, 2Mbps
Modulation:	GFSK
Quantity of Channels:	40
Channel Separation:	2MHz
Type of Antenna:	Integral Antenna
Antenna Gain:	1.2dBi
<i>Note: The Antenna Gain is provided by the customer.</i>	

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.

558074 D01 15.247 Meas Guidance v05r02: Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under section 15.247 of the Fcc rules.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02.

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	Low	2402MHz
TM2	Middle	2440MHz
TM3	High	2480MHz

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	45~55 %
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
USB Cable	0.85	Unshielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Mobile phone	HUAWEI	VOG-AL00	/
Notebook	Lenovo	E445	EB12648265
Adapter	FUSHIGANG	AS1201A-0502000USU	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-26GHz $\pm 3.92\text{dB}$

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
SEMT-1075	Communication Tester	Rohde & Schwarz	CMW500	148650	2021-03-27	2022-03-26
SEMT-1063	GSM Tester	Rohde & Schwarz	CMU200	114403	2021-03-27	2022-03-26
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2021-03-27	2022-03-26
SEMT-1079	Spectrum Analyzer	Agilent	N9020A	US47140102	2021-03-27	2022-03-26
SEMT-1080	Signal Generator	Agilent	83752A	3610A01453	2021-03-27	2022-03-26
SEMT-1081	Vector Signal Generator	Agilent	N5182A	MY47070202	2021-03-27	2022-03-26
SEMT-1028	Power Divider	Weinschel	1506A	PM204	2021-03-27	2022-03-26
SEMT-1082	Power Divider	RF-Lambda	RFLT4W5M18G	14110400027	2021-03-27	2022-03-26
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	/	/
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	/	/
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	/	/
SEMT-C004	Cable	Zheng DI	2M0RFC	/	/	/
SEMT-C005	Cable	Zheng DI	1M0RFC	/	/	/
SEMT-C006	Cable	Zheng DI	1M0RFC	/	/	/
<input checked="" type="checkbox"/> Chamber A: Below 1GHz						
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2021-03-27	2022-03-26
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2021-03-27	2022-03-26
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2021-04-12	2022-04-11
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-19	2023-03-18
SEMT-1068	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2021-03-19	2023-03-18
<input checked="" type="checkbox"/> Chamber A: Above 1GHz						
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2021-03-27	2022-03-26
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2021-03-27	2022-03-26
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2021-04-12	2022-04-11
SEMT-1042	Horn Antenna	ETS	3117	00086197	2021-03-19	2023-03-18
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA91705	2021-04-27	2023-04-26

				82		
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-1415 3	2021-04-27	2022-04-26
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2021-03-27	2022-03-26
SEMT-1166	Power Limiter	Agilent	N9356B	MY4545037 6	2021-03-27	2022-03-26
<input type="checkbox"/> Chamber B: Below 1GHz						
SEMT-1068	Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2021-04-09	2023-04-08
SEMT-1067	Amplifier	Agilent	8447D	2944A10179	2021-04-12	2022-04-11
SEMT-1066	EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2021-05-06	2022-05-05
<input type="checkbox"/> Chamber C: Below 1GHz						
SEMT-1319	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2021-12-03	2022-12-02
SEMT-1343	Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2021-05-28	2023-05-27
SEMT-1333	Amplifier	HP	8447F	2944A03869	2021-04-15	2022-04-14
<input checked="" type="checkbox"/> Conducted Room 1#						
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2021-04-12	2022-04-11
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2021-04-15	2022-04-14
SEMT-1003	AC LISN	Schwarz beck	NSLK8126	8126-224	2021-04-12	2022-04-11
<input type="checkbox"/> Conducted Room 2#						
SEMT-1334	EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2021-04-12	2022-04-11
SEMT-1336	LISN	Rohde & Schwarz	ENV 216	100097	2021-04-12	2022-04-11

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing.

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§15.203; §15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§15.207(a)	Conducted Emission	Compliant
§15.247(e)	Power Spectral Density	Compliant
§15.247(a)(2)	DTS Bandwidth	Compliant
§15.247(b)(3)	RF Output Power	Compliant
§15.209(a)	Radiated Emission	Compliant
§15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: Not applicable.

3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Evaluation Information

This product has a Integral antenna, fulfill the requirement of this section.

4. Power Spectral Density

4.1 Standard Applicable

According to 15.247(a)(1)(iii), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

4.2 Test Setup Block Diagram



4.3 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.10.2, the test method of power spectral density as below:

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$.
- d) Set the VBW $\geq 3 \times \text{RBW}$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3kHz) and repeat.

4.4 Summary of Test Results/Plots


Please refer to Appendix A

5. DTS Bandwidth

5.1 Standard Applicable

According to 15.247(a)(2), systems using digital modulation techniques may operate in the 902–928MHz, 2400–2483.5MHz, and 5725–5850 MHz bands. The minimum 6dB bandwidth shall be at least 500kHz.

5.2 Test Setup Block Diagram

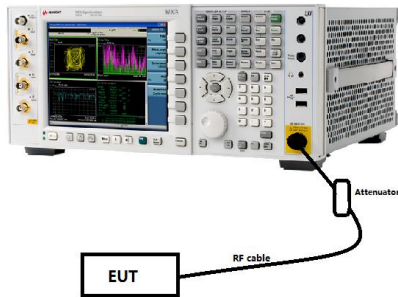

5.3 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.2 and ANSI C63.10-2013 Subclause 11.8.1, the test method of DTS Bandwidth as below:

- a) Set RBW = 100kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

5.4 Summary of Test Results/Plots


Please refer to Appendix B

6. RF Output Power

6.1 Standard Applicable

According to 15.247(b)(3), for systems using digital modulation in the 902–928MHz, 2400–2483.5MHz, and 5725–5850MHz bands: 1 Watt.

6.2 Test Setup Block Diagram

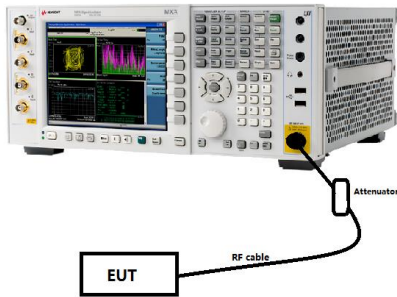

6.3 Test Procedure

According to the KDB-558074 D01 v05r02 Subclause 8.3.1.1 and ANSI C63.10-2013 Subclause 11.9.1.1, this procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- a) Set the RBW \geq DTS bandwidth.
- b) Set VBW $\geq 3 \times$ RBW.
- c) Set span $\geq 3 \times$ RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

6.4 Summary of Test Results/Plots

Please refer to Appendix C

7. Field Strength of Spurious Emissions

7.1 Standard Applicable

According to §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.


7.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.


The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle.

The spacing between the peripherals was 10cm.


The test setup for emission measurement below 30MHz.

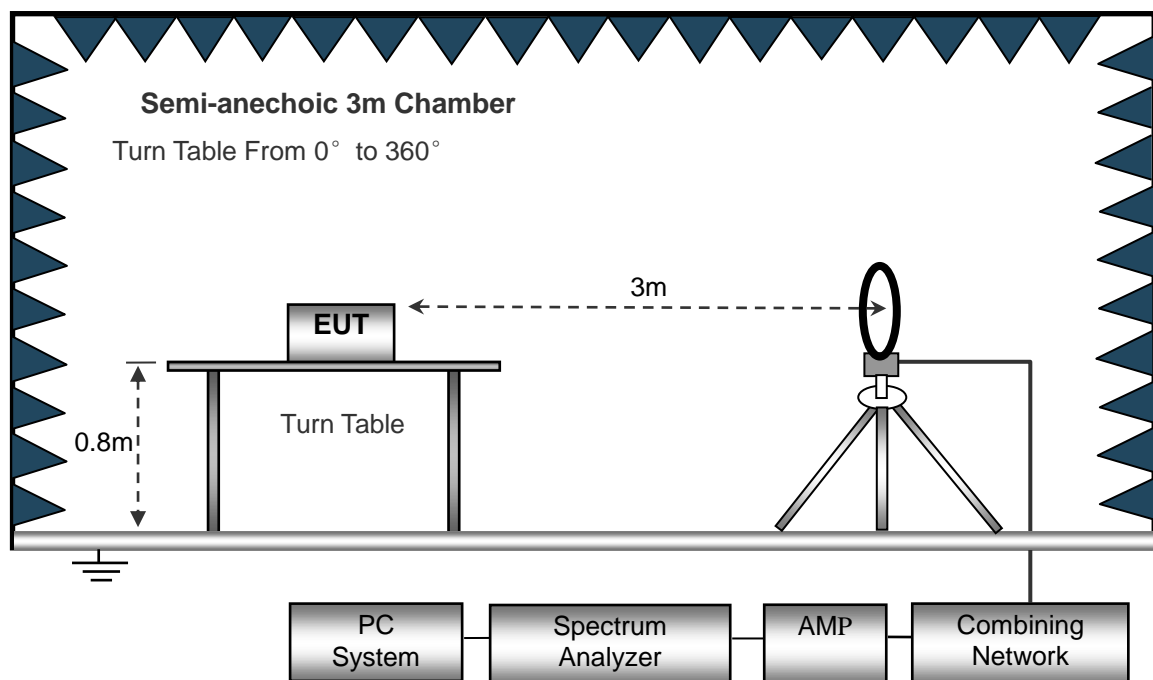

The test setup for emission measurement from 30MHz to 1GHz.

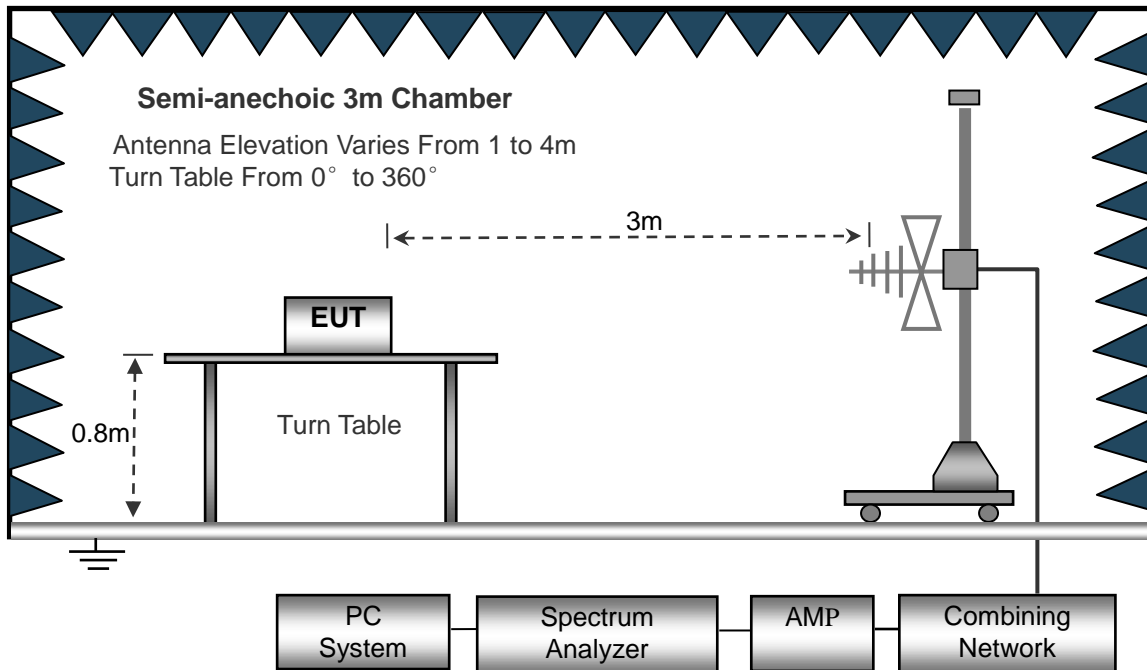

The test setup for emission measurement above 1GHz.

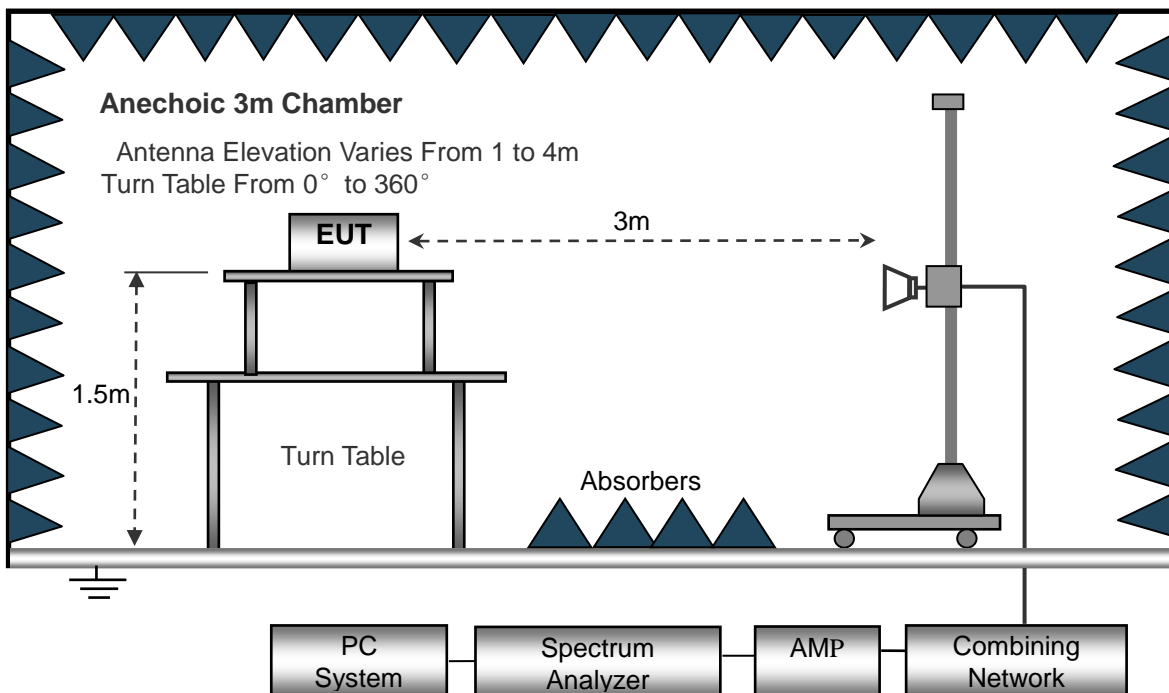

Frequency :9kHz-30MHz
 RBW=10KHz,
 VBW =30KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak

Frequency :30MHz-1GHz
 RBW=120KHz,
 VBW=300KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, QP

Frequency :Above 1GHz
 RBW=1MHz,
 VBW=3MHz(Peak), 10Hz(AV)
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, AV

7.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

7.4 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.


- Spurious Emissions Below 1GHz
- BLE 1Mbps

Test Channel	Low(worst case)	Polarity:	Horizontal
--------------	-----------------	-----------	------------

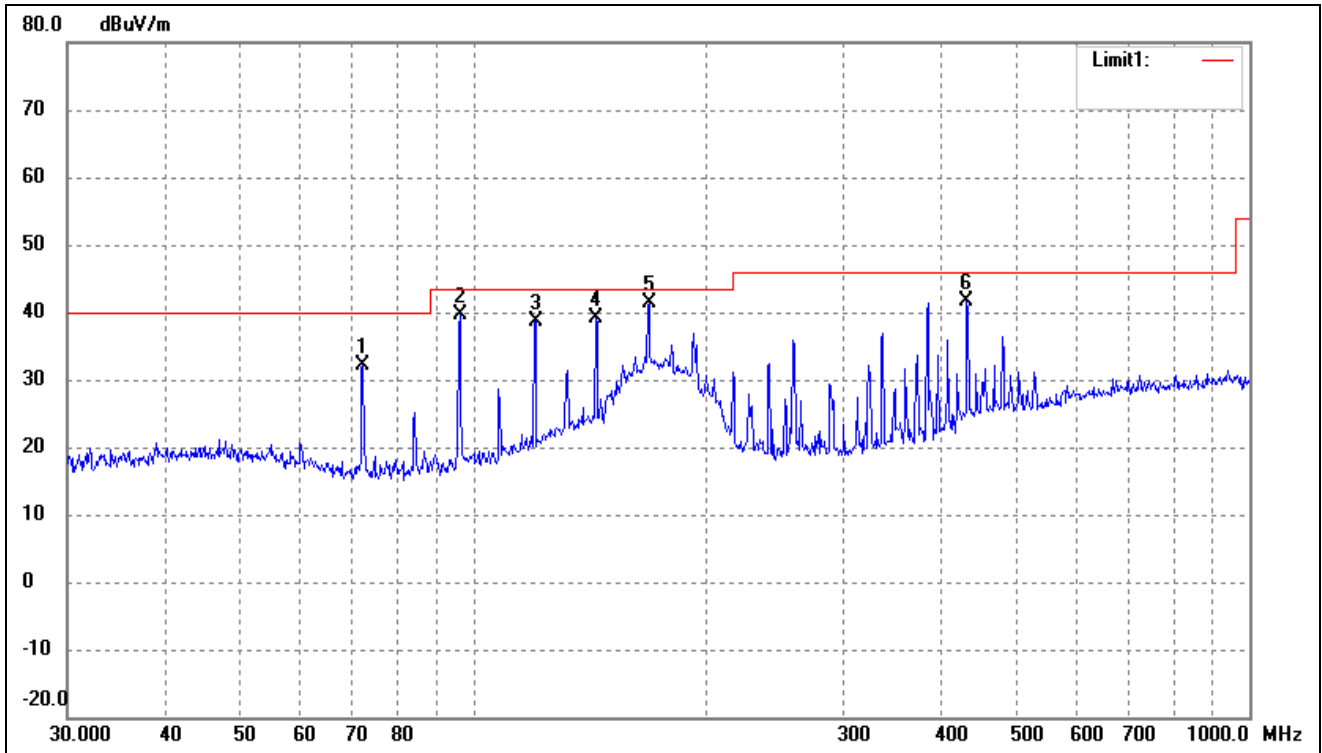

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	72.0842	42.32	-10.29	32.03	40.00	-7.97	-	-	peak
2	96.0986	49.13	-9.45	39.68	43.50	-3.82	-	-	peak
3	120.2766	48.28	-9.65	38.63	43.50	-4.87	-	-	peak
4	143.8294	51.46	-12.40	39.06	43.50	-4.44	-	-	peak
5	168.4138	53.07	-11.79	41.28	43.50	-2.22	-	-	peak
6	432.5457	44.55	-3.02	41.53	46.00	-4.47	-	-	peak


Test Channel	Low(worst case)	Polarity:	Vertical
--------------	-----------------	-----------	----------

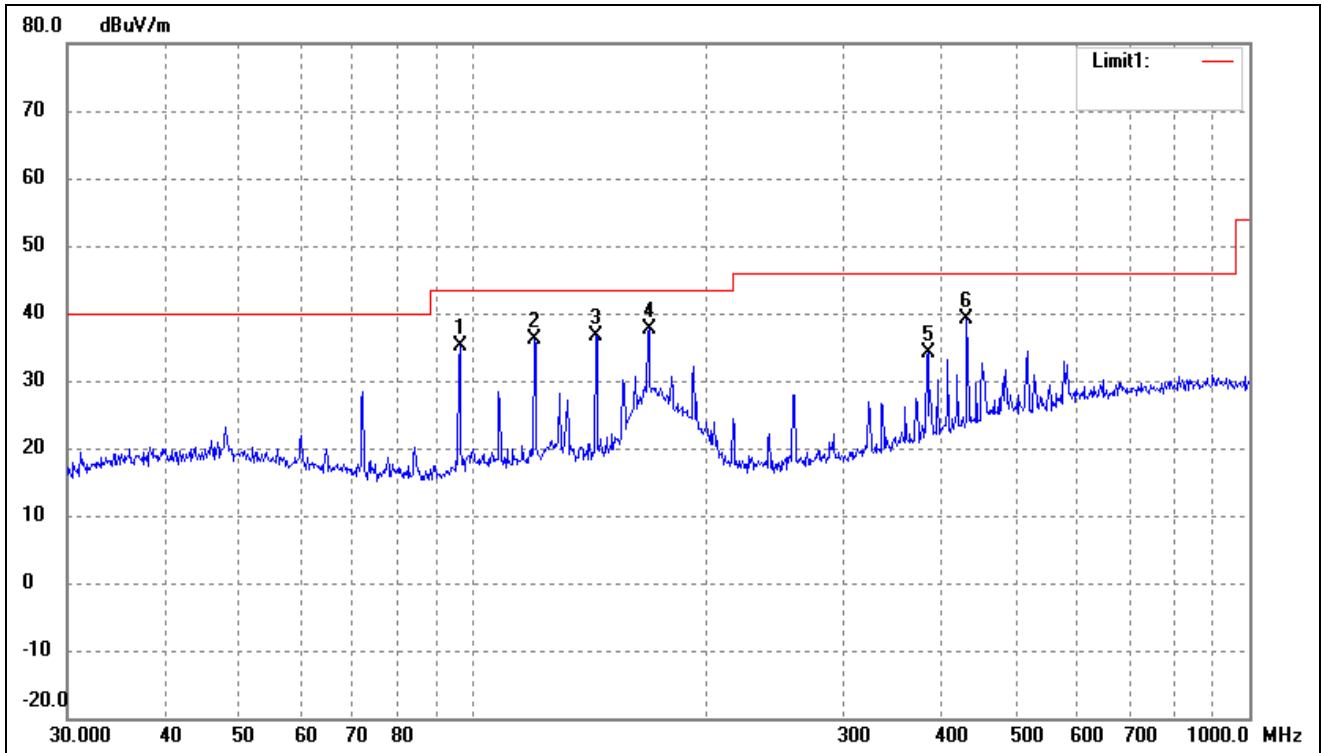

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	96.0986	44.59	-9.45	35.14	43.50	-8.36	-	-	peak
2	119.8556	45.62	-9.59	36.03	43.50	-7.47	-	-	peak
3	143.8295	49.05	-12.40	36.65	43.50	-6.85	-	-	peak
4	168.4138	49.48	-11.79	37.69	43.50	-5.81	-	-	peak
5	385.2805	38.35	-4.33	34.02	46.00	-11.98	-	-	peak
6	432.5457	42.19	-3.02	39.17	46.00	-6.83	-	-	peak


➤ BLE 2Mbps

Test Channel	Low(worst case)	Polarity:	Horizontal
--------------	-----------------	-----------	------------

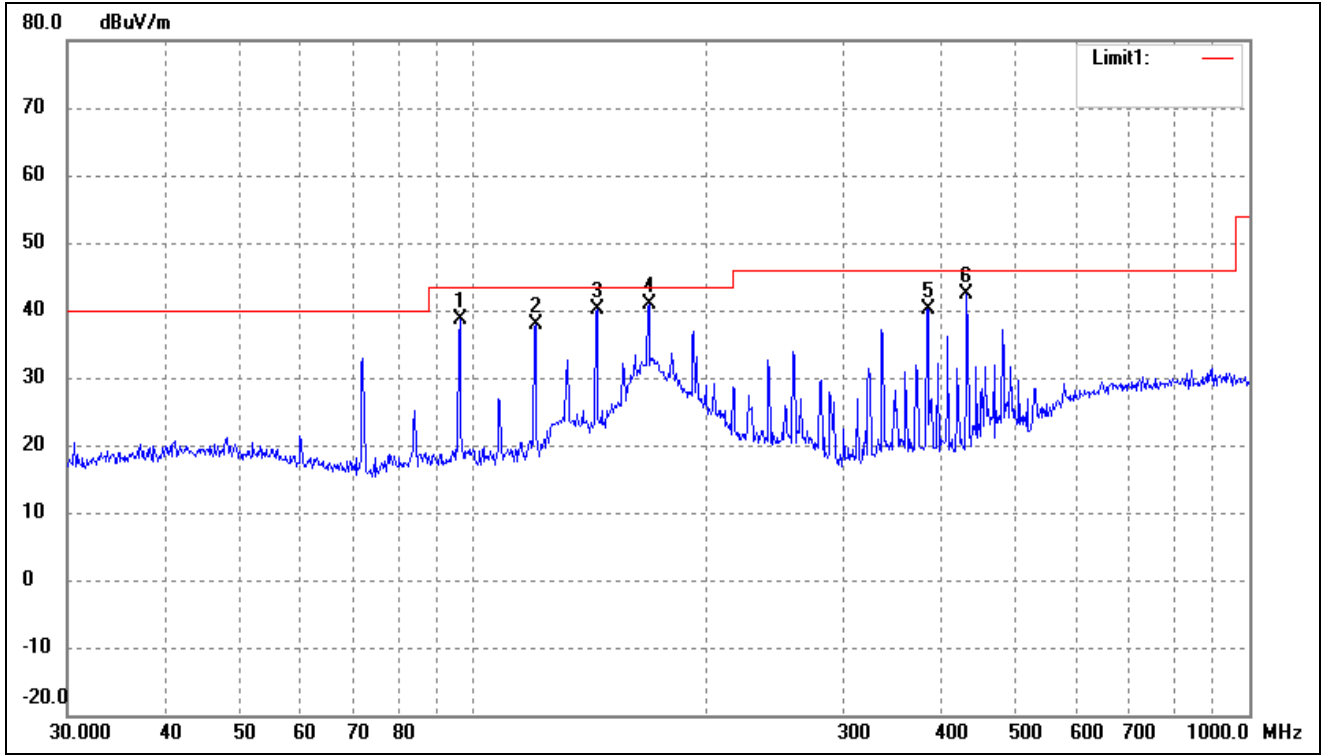

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	96.0986	48.04	-9.45	38.59	43.50	-4.91	-	-	peak
2	120.2766	47.59	-9.65	37.94	43.50	-5.56	-	-	peak
3	144.3348	52.53	-12.41	40.12	43.50	-3.38	-	-	peak
4	168.4138	52.60	-11.79	40.81	43.50	-2.69	-	-	peak
5	385.2805	44.47	-4.33	40.14	46.00	-5.86	-	-	peak
6	432.5457	45.39	-3.02	42.37	46.00	-3.63	-	-	peak

Test Channel	Low(worst case)	Polarity:	Vertical
--------------	-----------------	-----------	----------

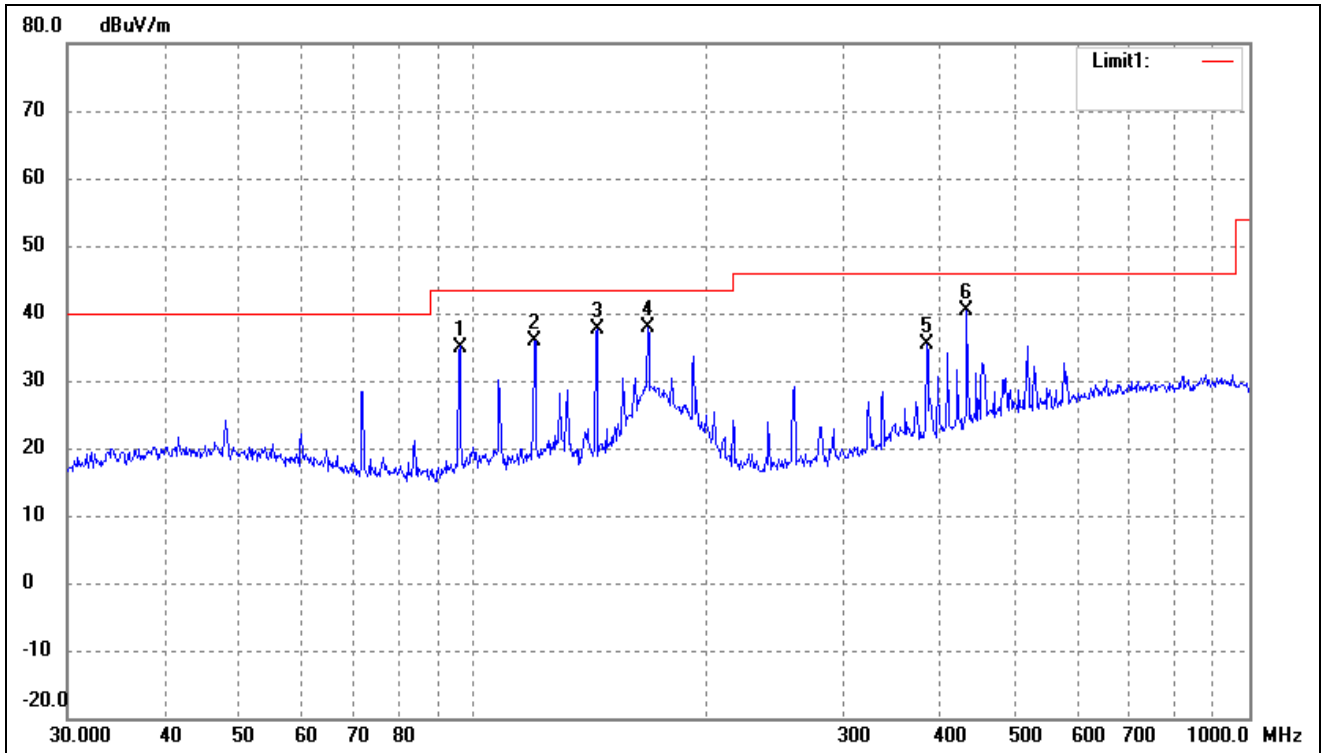

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	96.0986	44.45	-9.45	35.00	43.50	-8.50	-	-	peak
2	119.8556	45.52	-9.59	35.93	43.50	-7.57	-	-	peak
3	144.3348	50.02	-12.41	37.61	43.50	-5.89	-	-	peak
4	167.8243	49.59	-11.82	37.77	43.50	-5.73	-	-	peak
5	383.9318	39.72	-4.38	35.34	46.00	-10.66	-	-	peak
6	432.5457	43.48	-3.02	40.46	46.00	-5.54	-	-	peak

Remark: ‘-’ Means’ the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

- Spurious Emissions Above 1GHz
- BLE 1Mbps

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2402MHz							
4804.000	51.33	-6.13	45.20	74.00	-28.80	H	PK
7206.000	50.03	-1.64	48.39	74.00	-25.61	H	AV
4804.000	51.67	-6.13	45.54	74.00	-28.46	V	PK
7206.000	49.71	-1.64	48.07	74.00	-25.93	V	AV
Middle Channel-2440MHz							
4880.000	50.52	-5.93	44.59	74.00	-29.41	H	PK
7320.000	48.76	-1.58	47.18	74.00	-26.82	H	AV
4880.000	50.73	-5.93	44.80	74.00	-29.20	V	PK
7320.000	48.08	-1.58	46.50	74.00	-27.50	V	AV
High Channel-2480MHz							
4960.000	49.96	-5.71	44.25	74.00	-29.75	H	PK
7440.000	49.11	-1.52	47.59	74.00	-26.41	H	AV
4960.000	50.20	-5.71	44.49	74.00	-29.51	V	PK
7440.000	48.80	-1.52	47.28	74.00	-26.72	V	AV

- BLE 2Mbps

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2402MHz							
4804.000	50.67	-6.13	44.54	74.00	-29.46	H	PK
7206.000	49.49	-1.64	47.85	74.00	-26.15	H	AV
4804.000	50.95	-6.13	44.82	74.00	-29.18	V	PK
7206.000	49.03	-1.64	47.39	74.00	-26.61	V	AV
Middle Channel-2440MHz							
4880.000	50.49	-5.93	44.56	74.00	-29.44	H	PK
7320.000	49.08	-1.58	47.50	74.00	-26.50	H	AV
4880.000	50.35	-5.93	44.42	74.00	-29.58	V	PK
7320.000	47.64	-1.58	46.06	74.00	-27.94	V	AV
High Channel-2480MHz							
4960.000	49.88	-5.71	44.17	74.00	-29.83	H	PK
7440.000	48.99	-1.52	47.47	74.00	-26.53	H	AV
4960.000	49.90	-5.71	44.19	74.00	-29.81	V	PK
7440.000	48.45	-1.52	46.93	74.00	-27.07	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

8. Out of Band Emissions

8.1 Standard Applicable

According to §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

8.2 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.11, the Emissions in nonrestricted frequency bands test method as follows:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100kHz.
- c) Set the VBW $\geq [3 \times \text{RBW}]$.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

According to the KDB 558074 D01 v05r02 Subclause 8.5 and ANSI C63.10-2013 Subclause 11.12, the Emissions in restricted frequency bands test method as follows:

A. Radiated emission measurements:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement

KDB publication number: 913591 may be used for the radiated bandedge measurements.

B. Antenna-port conducted measurements

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 9.
- b) VBW $\geq [3 \times \text{RBW}]$.
- c) Detector = peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be lengthened for low-duty-cycle applications.)

RBW as a function of frequency

Frequency	RBW
9kHz to 150kHz	200Hz to 300Hz
0.15MHz to 30MHz	9kHz to 10kHz
30MHz to 1000MHz	100kHz to 120kHz
>1000MHz	1MHz

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.


Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

8.3 Summary of Test Results/Plots

➤ Radiated test


BLE 1Mbps

Test Channel	Low	Polarity:	Horizontal (worst case)
--------------	-----	-----------	-------------------------

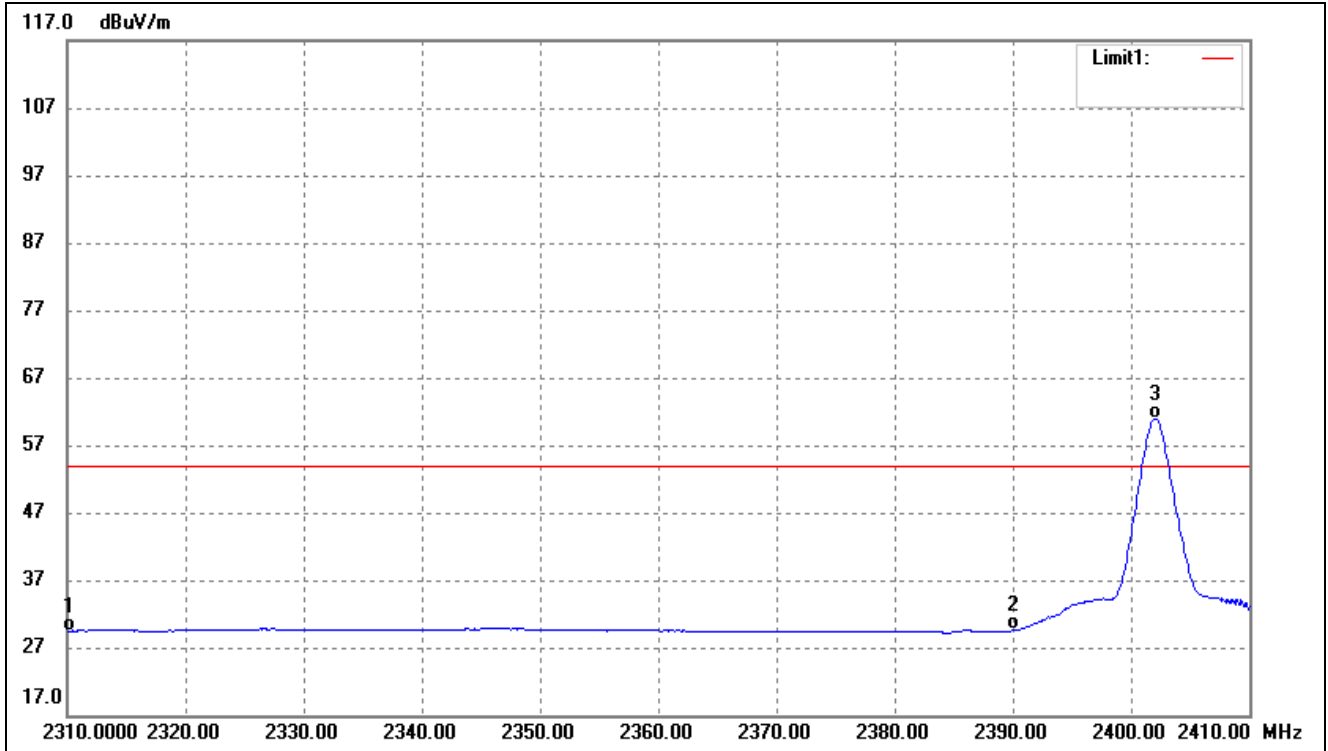

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	40.25	-10.82	29.43	54.00	-24.57	Average Detector
	2310.000	53.15	-10.82	42.33	74.00	-31.67	Peak Detector
2	2390.000	40.23	-10.70	29.53	54.00	-24.47	Average Detector
	2390.000	52.71	-10.70	42.01	74.00	-31.99	Peak Detector
3	2402.000	71.61	-10.69	60.92	/	/	Average Detector
	2402.000	88.38	-10.69	77.69	/	/	Peak Detector


Test Channel	High	Polarity:	Horizontal (worst case)
--------------	------	-----------	-------------------------

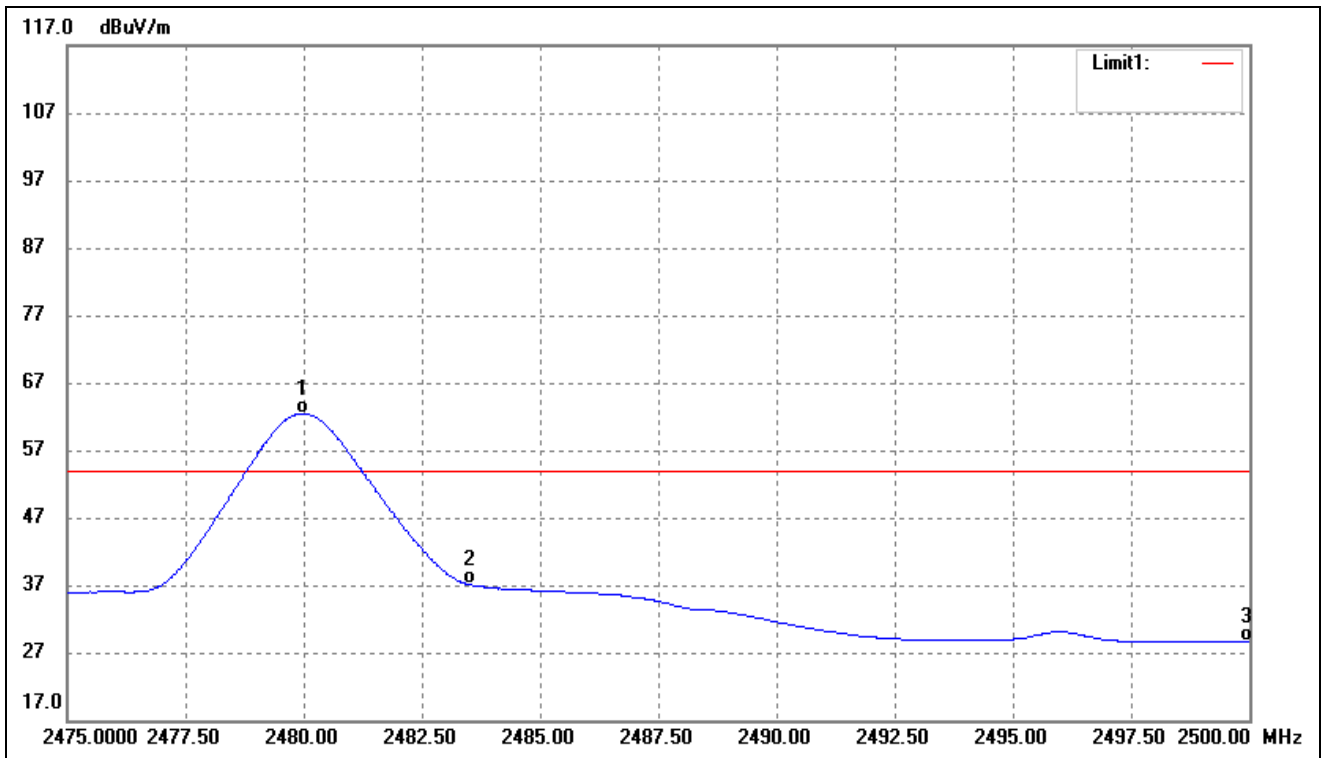

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.975	73.06	-10.58	62.48	/	/	Average Detector
	2479.950	90.82	-10.58	80.24	/	/	Peak Detector
2	2483.500	47.68	-10.58	37.10	54.00	-16.90	Average Detector
	2483.500	61.99	-10.58	51.41	74.00	-22.59	Peak Detector
3	2500.000	39.15	-10.55	28.60	54.00	-25.40	Average Detector
	2500.000	51.48	-10.55	40.93	74.00	-33.07	Peak Detector


BLE 2Mbps

Test Channel	Low	Polarity:	Horizontal (worst case)
--------------	-----	-----------	-------------------------

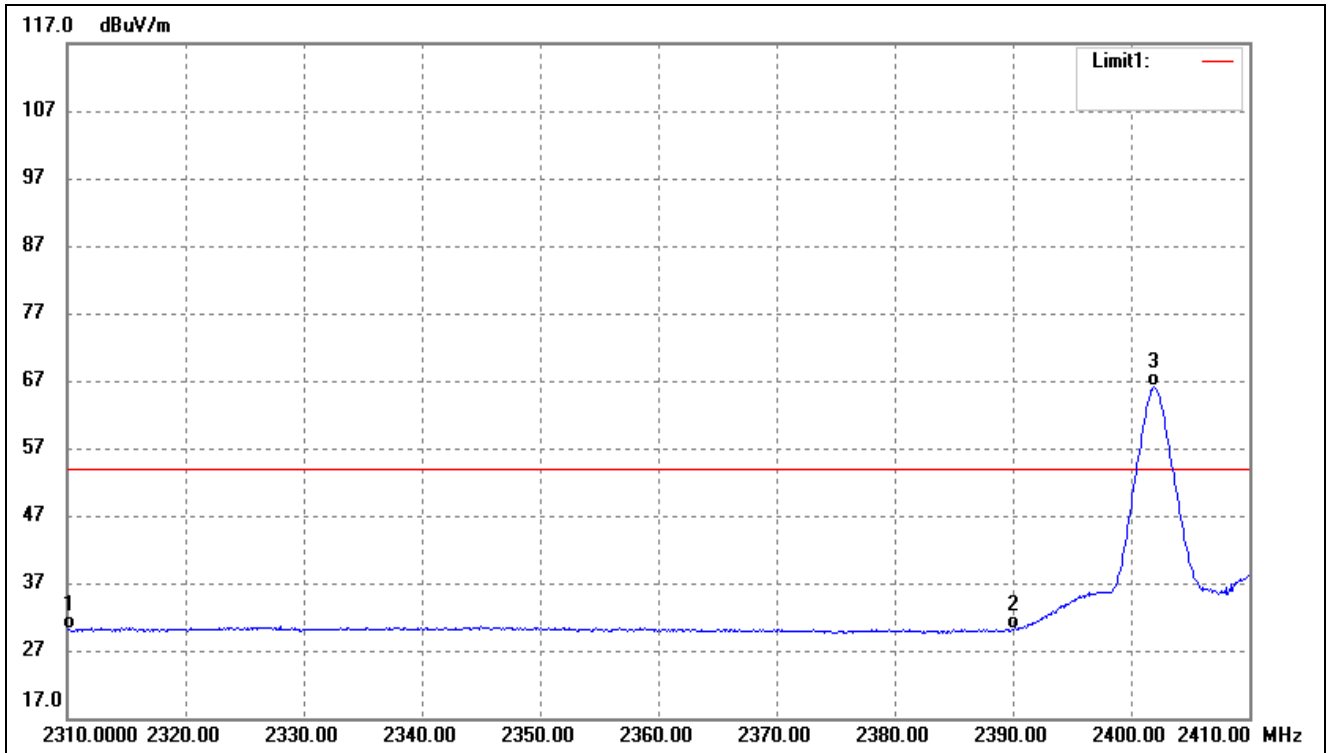

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	40.91	-10.82	30.09	54.00	-23.91	Average Detector
		52.79	-10.82	41.97	74.00	-32.03	Peak Detector
2	2390.000	40.87	-10.70	30.17	54.00	-23.83	Average Detector
		53.25	-10.70	42.55	74.00	-31.45	Peak Detector
3	2401.900	76.71	-10.69	66.02	/	/	Average Detector
		88.59	-10.69	77.90	/	/	Peak Detector

Test Channel	High	Polarity:	Horizontal (worst case)
--------------	------	-----------	-------------------------

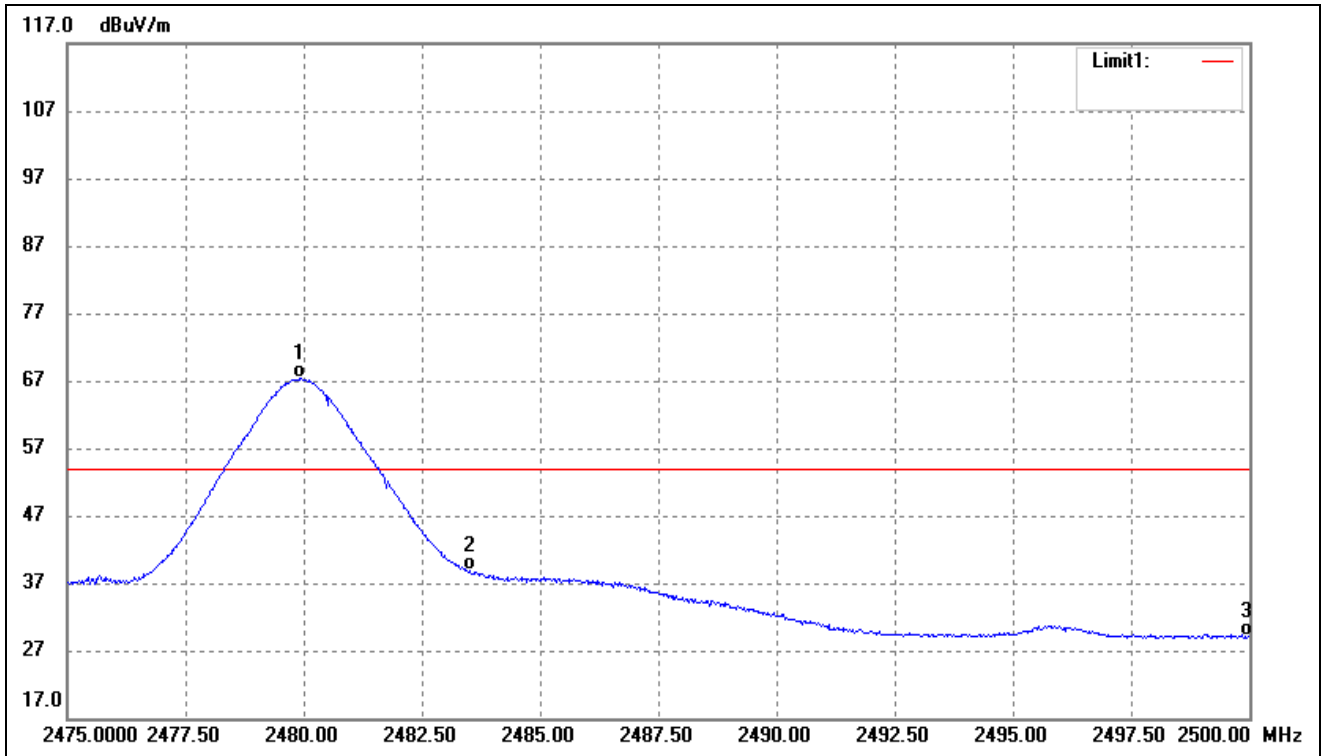

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.900	77.88	-10.58	67.30	/	/	Average Detector
	2480.450	90.70	-10.58	80.12	/	/	Peak Detector
2	2483.500	49.42	-10.58	38.84	54.00	-15.16	Average Detector
	2483.500	63.43	-10.58	52.85	74.00	-21.15	Peak Detector
3	2500.000	39.66	-10.55	29.11	54.00	-24.89	Average Detector
	2500.000	52.13	-10.55	41.58	74.00	-32.42	Peak Detector

➤ Conducted test

Please refer to Appendix D

9. Conducted Emissions


9.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle.

The spacing between the peripherals was 10cm.

9.2 Basic Test Setup Block Diagram

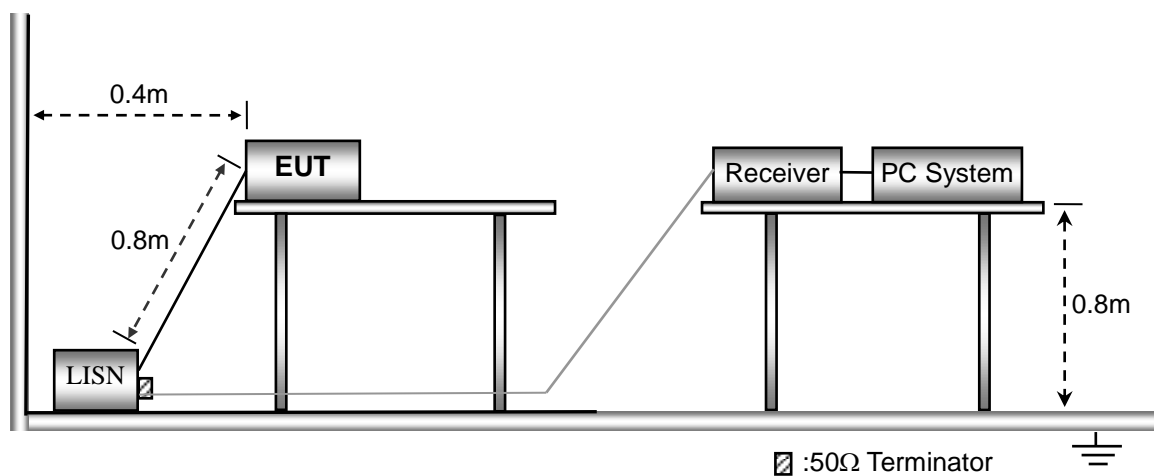


9.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150kHz
Stop Frequency	30MHz
Sweep Speed	Auto
IF Bandwidth.....	10kHz
Quasi-Peak Adapter Bandwidth	9kHz
Quasi-Peak Adapter Mode	Normal


9.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

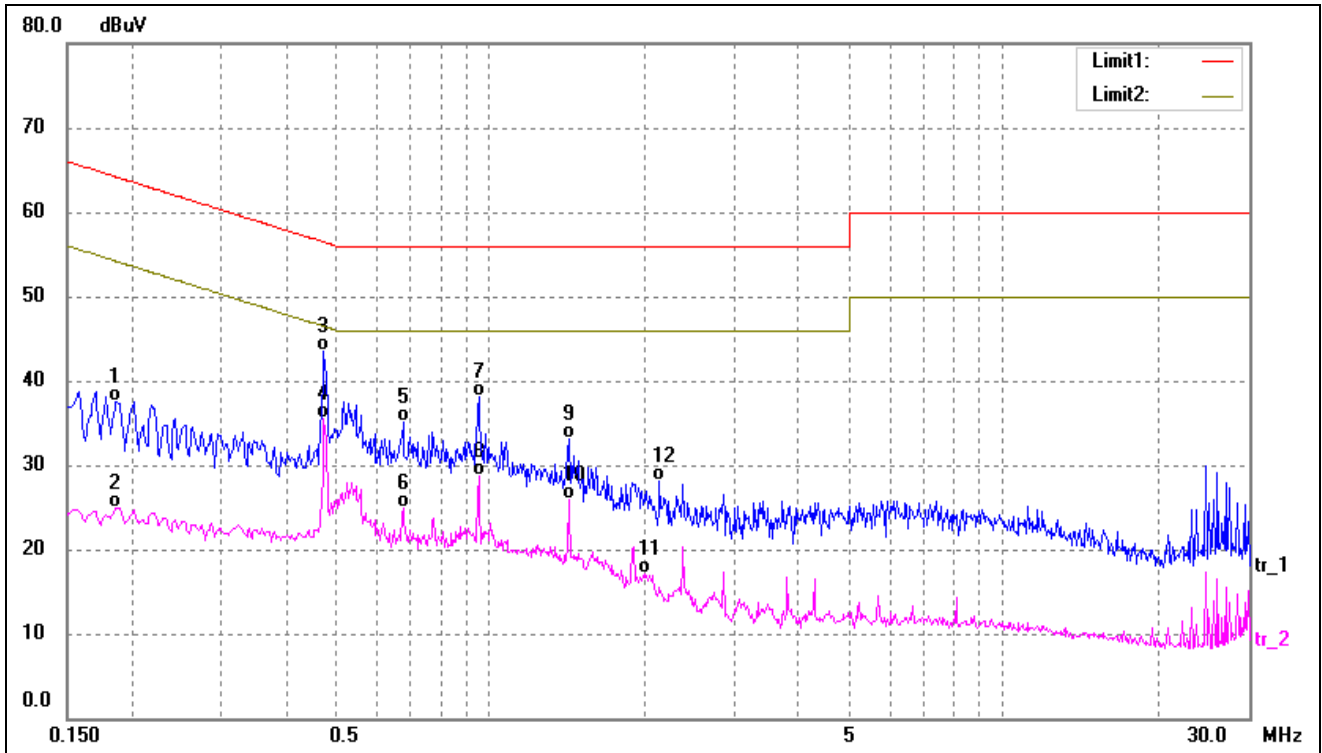

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1860	27.11	10.37	37.48	64.21	-26.73	QP
2	0.1860	14.49	10.37	24.86	54.21	-29.35	AVG
3	0.4740	33.27	10.27	43.54	56.44	-12.90	QP
4*	0.4740	25.24	10.27	35.51	46.44	-10.93	AVG
5	0.6780	24.68	10.37	35.05	56.00	-20.95	QP
6	0.6780	14.47	10.37	24.84	46.00	-21.16	AVG
7	0.9500	27.54	10.53	38.07	56.00	-17.93	QP
8	0.9500	18.16	10.53	28.69	46.00	-17.31	AVG
9	1.4220	22.71	10.38	33.09	56.00	-22.91	QP
10	1.4220	15.49	10.38	25.87	46.00	-20.13	AVG
11	1.9940	6.97	10.13	17.10	46.00	-28.90	AVG
12	2.1420	17.95	10.12	28.07	56.00	-27.93	QP

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

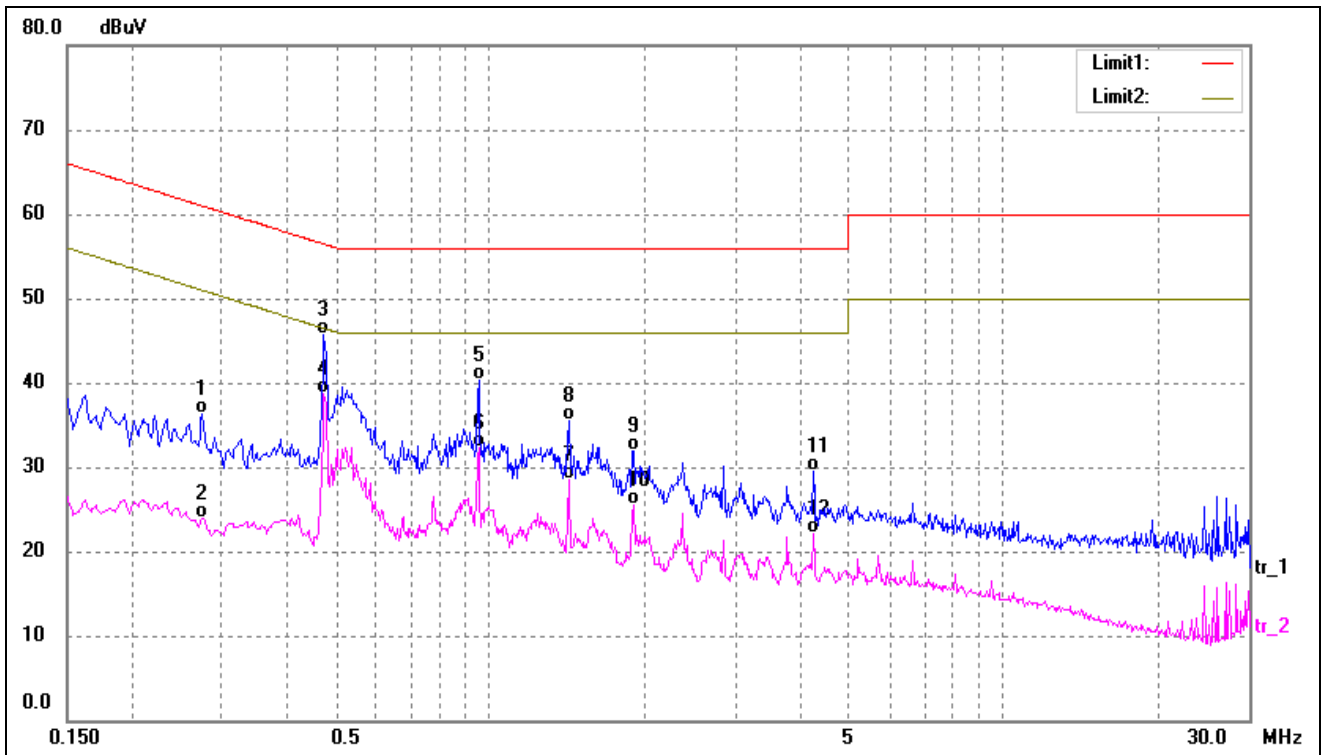

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2740	26.02	10.35	36.37	60.99	-24.62	QP
2	0.2740	13.55	10.35	23.90	50.99	-27.09	AVG
3	0.4740	35.43	10.27	45.70	56.44	-10.74	QP
4*	0.4740	28.48	10.27	38.75	46.44	-7.69	AVG
5	0.9500	29.86	10.53	40.39	56.00	-15.61	QP
6	0.9500	21.79	10.53	32.32	46.00	-13.68	AVG
7	1.4220	18.06	10.38	28.44	46.00	-17.56	AVG
8	1.4260	25.09	10.38	35.47	56.00	-20.53	QP
9	1.8940	21.81	10.17	31.98	56.00	-24.02	QP
10	1.8980	15.38	10.17	25.55	46.00	-20.45	AVG
11	4.2660	19.53	10.03	29.56	56.00	-26.44	QP
12	4.2660	12.13	10.03	22.16	46.00	-23.84	AVG

APPENDIX SUMMARY




Project No.	WTX22X01005985W	Test Engineer	Dashan
Start date	2022/01/14	Finish date	2022/01/14
Temperature	24.6°C	Humidity	46%

APPENDIX	Description of Test Item	Result
A	Power Spectral Density	Compliant
B	DTS Bandwidth	Compliant
C	RF Output Power	Compliant
D	Conducted Out of Band Emissions	Compliant

APPENDIX A




Power Spectral Density			
Test Mode	Test Channel	Power Spectral Density dBm/3kHz	Limit dBm/3kHz
BLE-GFSK-1Mbps	Low	-10.20	8
	Middle	-9.854	8
	High	-9.753	8
BLE-GFSK-2Mbps	Low	-12.69	8
	Middle	-12.37	8
	High	-11.93	8

<p>Low-1Mbps</p>	
<p>Middle-1Mbps</p>	
<p>High-1Mbps</p>	
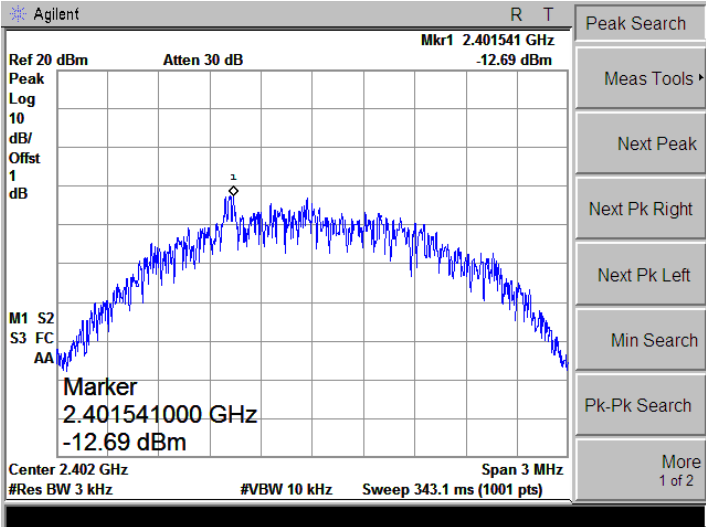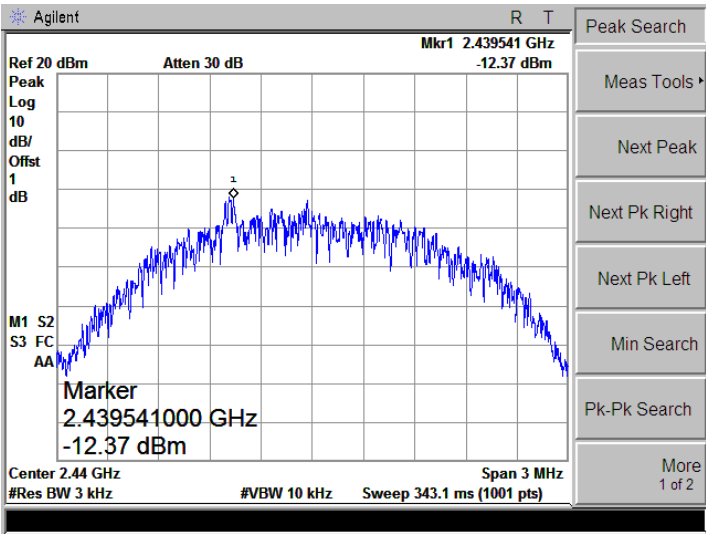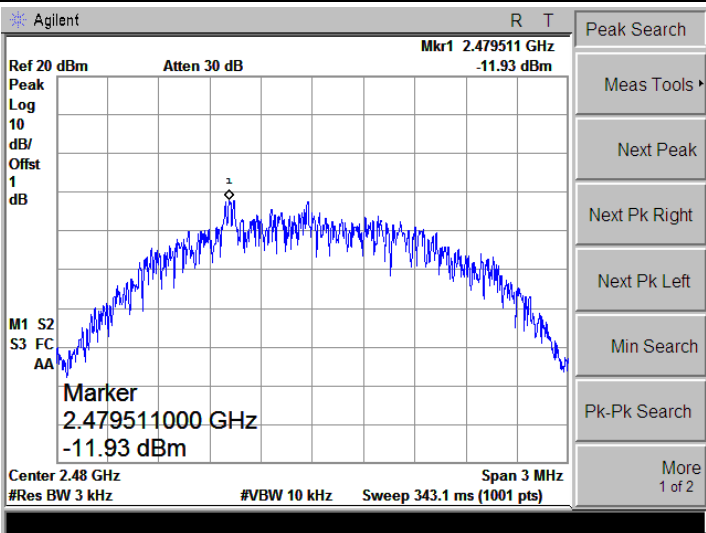
<p>Low-2Mbps</p>	 <p>Agilent R T Ref 20 dBm Atten 30 dB Mkr1 2.401541 GHz -12.69 dBm Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2 Center 2.402 GHz Span 3 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 343.1 ms (1001 pts)</p>
<p>Middle-2Mbps</p>	 <p>Agilent R T Ref 20 dBm Atten 30 dB Mkr1 2.439541 GHz -12.37 dBm Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2 Center 2.44 GHz Span 3 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 343.1 ms (1001 pts)</p>
<p>High-2Mbps</p>	 <p>Agilent R T Ref 20 dBm Atten 30 dB Mkr1 2.479511 GHz -11.93 dBm Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2 Center 2.48 GHz Span 3 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 343.1 ms (1001 pts)</p>

APPENDIX B




Test Mode	Test Channel	6 dB Bandwidth kHz	Limit kHz
BLE-GFSK-1Mbps	Low	706.6	≥ 500
	Middle	719.4	≥ 500
	High	707.3	≥ 500
BLE-GFSK-2Mbps	Low	1169	≥ 500
	Middle	1185	≥ 500
	High	1191	≥ 500

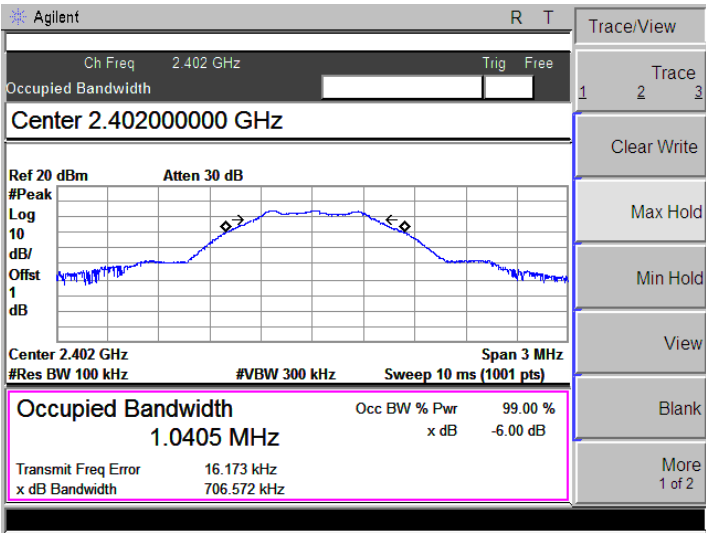
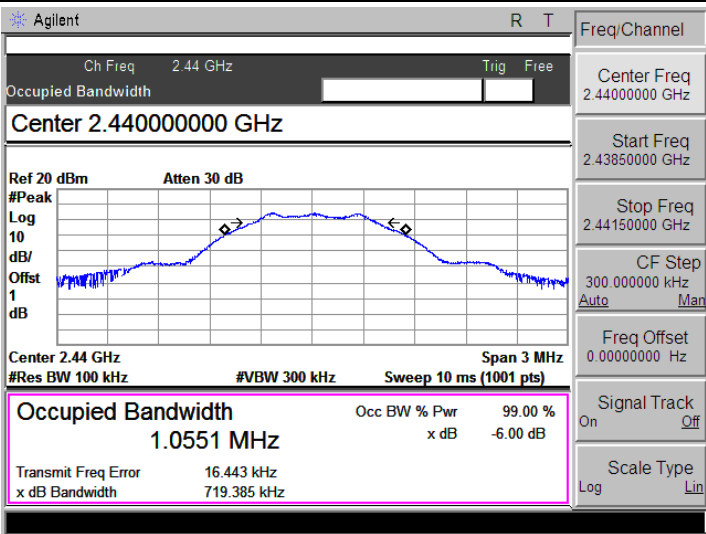
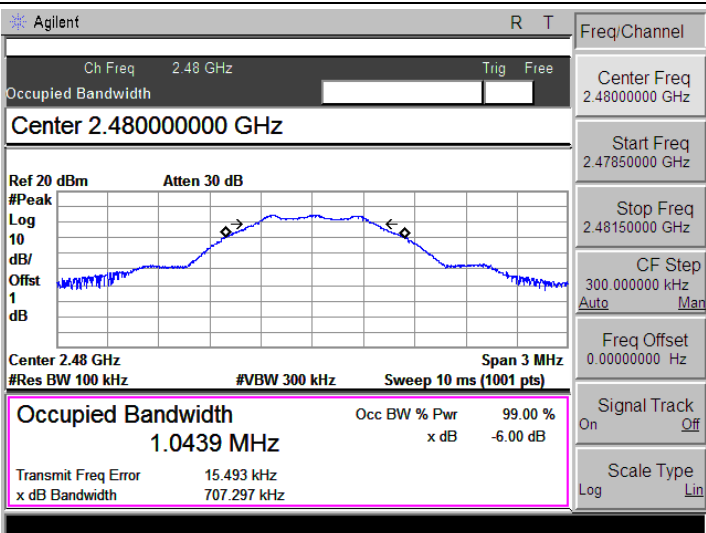
<p>Low-1Mbps</p>	 <p>Agilent R T</p> <p>Ch Freq 2.402 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.40200000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 2.402 GHz Span 3 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth Occ BW % Pwr 99.00 % 1.0405 MHz x dB -6.00 dB</p> <p>Transmit Freq Error 16.173 kHz x dB Bandwidth 706.572 kHz</p> <p>Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2</p>
<p>Middle-1Mbps</p>	 <p>Agilent R T</p> <p>Ch Freq 2.44 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.44000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 2.44 GHz Span 3 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth Occ BW % Pwr 99.00 % 1.0551 MHz x dB -6.00 dB</p> <p>Transmit Freq Error 16.443 kHz x dB Bandwidth 719.385 kHz</p> <p>Freq/Channel Center Freq 2.44000000 GHz Start Freq 2.43850000 GHz Stop Freq 2.44150000 GHz CF Step 300.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin</p>
<p>High-1Mbps</p>	 <p>Agilent R T</p> <p>Ch Freq 2.48 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.48000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 2.48 GHz Span 3 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth Occ BW % Pwr 99.00 % 1.0439 MHz x dB -6.00 dB</p> <p>Transmit Freq Error 15.493 kHz x dB Bandwidth 707.297 kHz</p> <p>Freq/Channel Center Freq 2.48000000 GHz Start Freq 2.47850000 GHz Stop Freq 2.48150000 GHz CF Step 300.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin</p>

<p>Low-2Mbps</p>	<p>Agilent R T</p> <p>Ch Freq 2.402 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.40200000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 2.402 GHz Span 5 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 2.0350 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 23.157 kHz x dB Bandwidth 1.169 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.40200000 GHz</p> <p>Start Freq 2.39950000 GHz</p> <p>Stop Freq 2.40450000 GHz</p> <p>CF Step 500.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>Middle-2Mbps</p>	<p>Agilent R T</p> <p>Ch Freq 2.44 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.44000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 2.44 GHz Span 5 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 2.0402 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 24.440 kHz x dB Bandwidth 1.185 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.44000000 GHz</p> <p>Start Freq 2.43750000 GHz</p> <p>Stop Freq 2.44250000 GHz</p> <p>CF Step 500.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>High-2Mbps</p>	<p>Agilent R T</p> <p>Ch Freq 2.48 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.48000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 2.48 GHz Span 5 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 2.0488 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 26.698 kHz x dB Bandwidth 1.191 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.48000000 GHz</p> <p>Start Freq 2.47750000 GHz</p> <p>Stop Freq 2.48250000 GHz</p> <p>CF Step 500.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

APPENDIX C




RF Output Power			
Test Mode	Test Channel	Reading dBm	Limit dBm
BLE-GFSK-1Mbps	Low	4.040	30.00
	Middle	4.239	30.00
	High	4.408	30.00
BLE-GFSK-2Mbps	Low	3.951	30.00
	Middle	4.137	30.00
	High	4.341	30.00

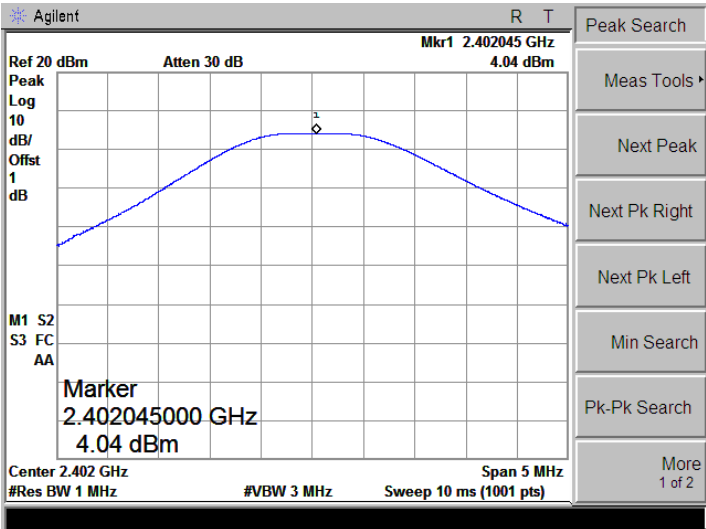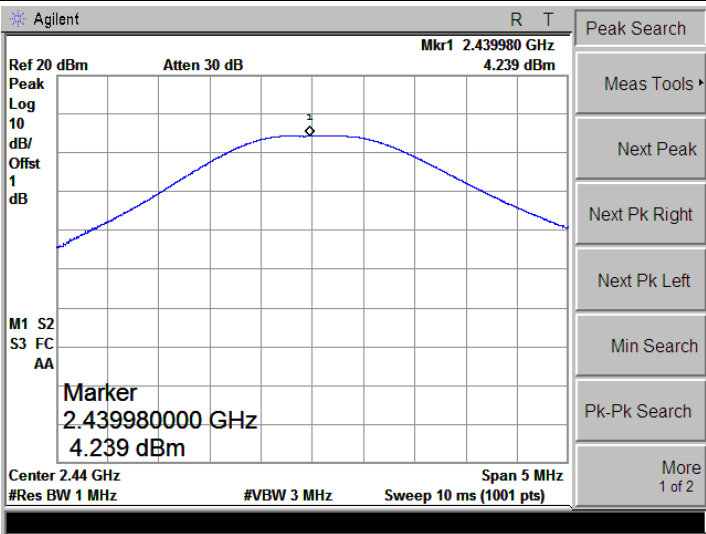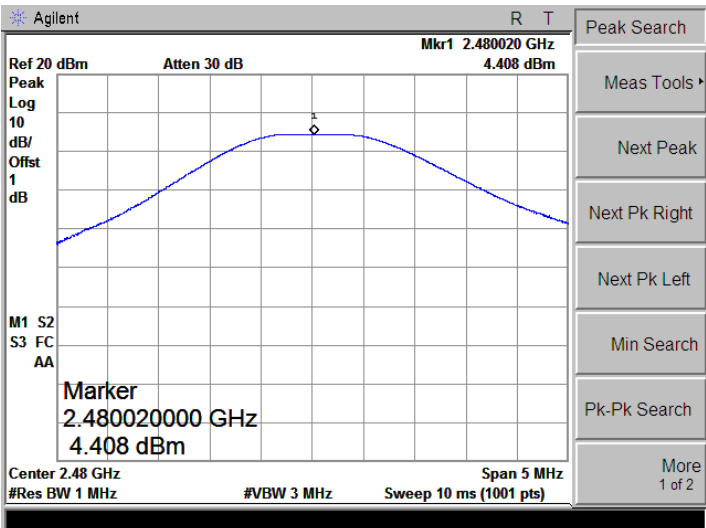
<p>Low-1Mbps</p>	
<p>Middle-1Mbps</p>	
<p>High-1Mbps</p>	

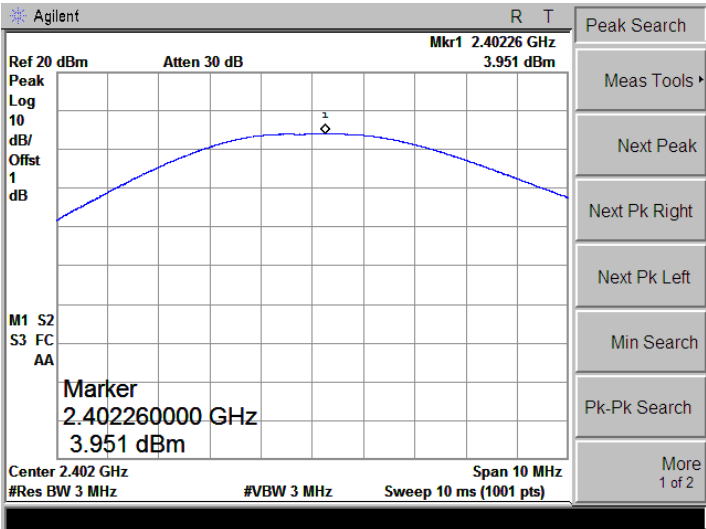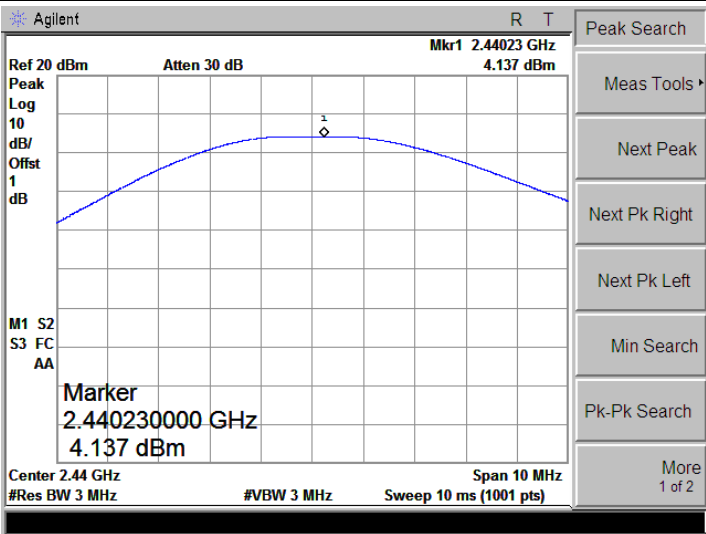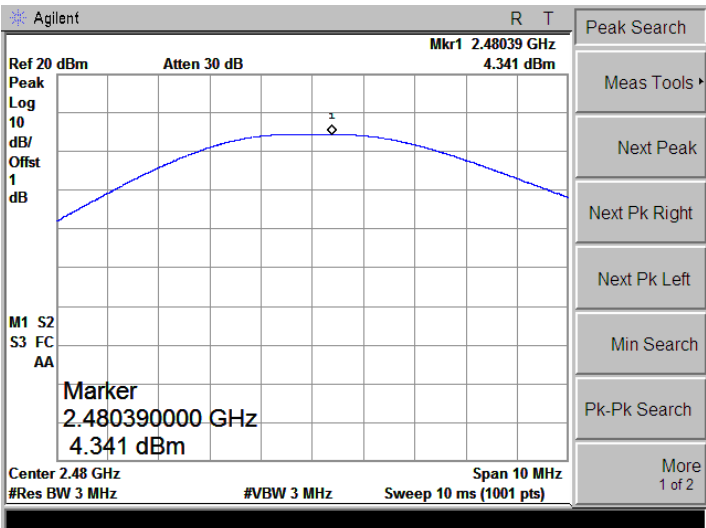
<p>Low-2Mbps</p>	
<p>Middle-2Mbps</p>	
<p>High-2Mbps</p>	


APPENDIX D

Conducted Out of Band Emissions
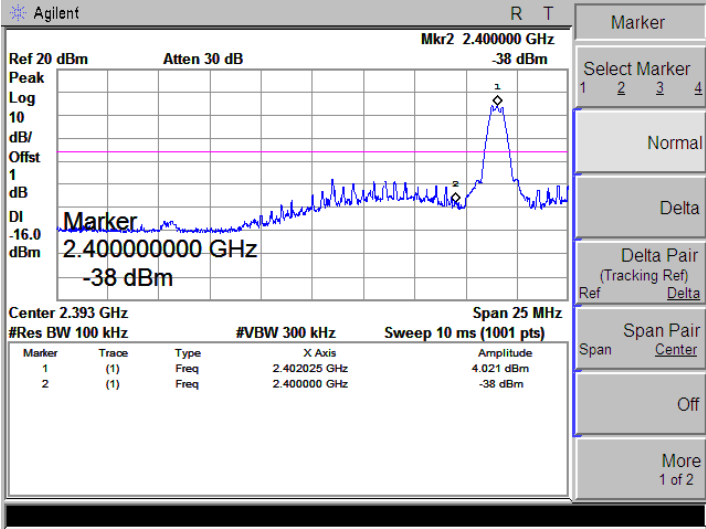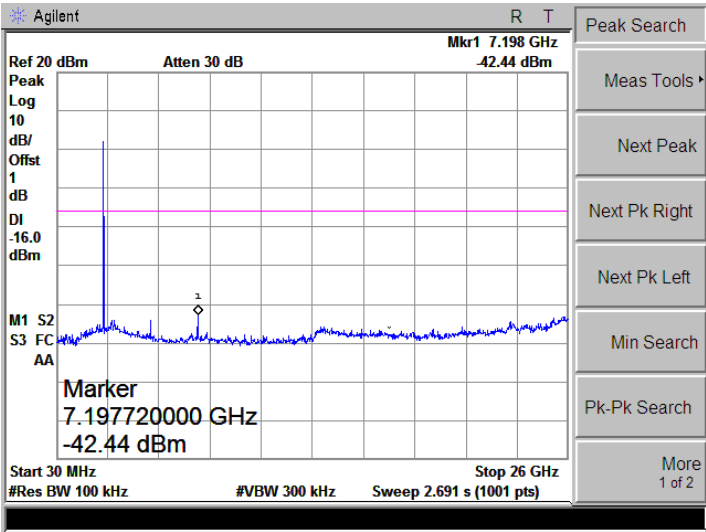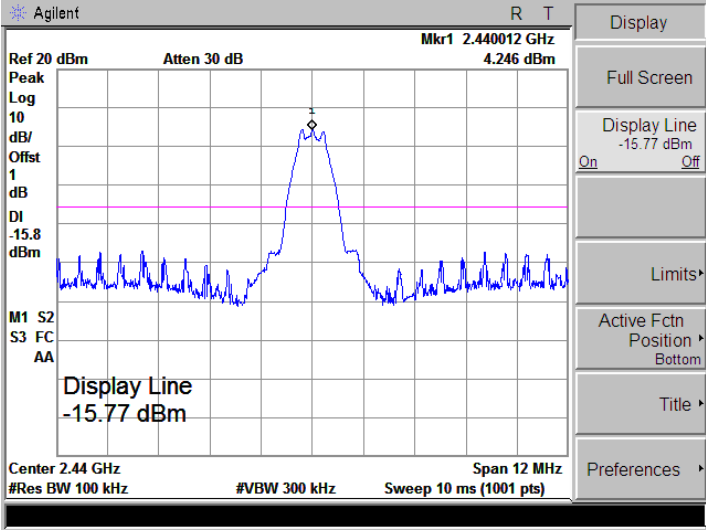
<p>Low-1Mbps</p>	
<p>Middle-1Mbps</p>	
<p>High-1Mbps</p>	

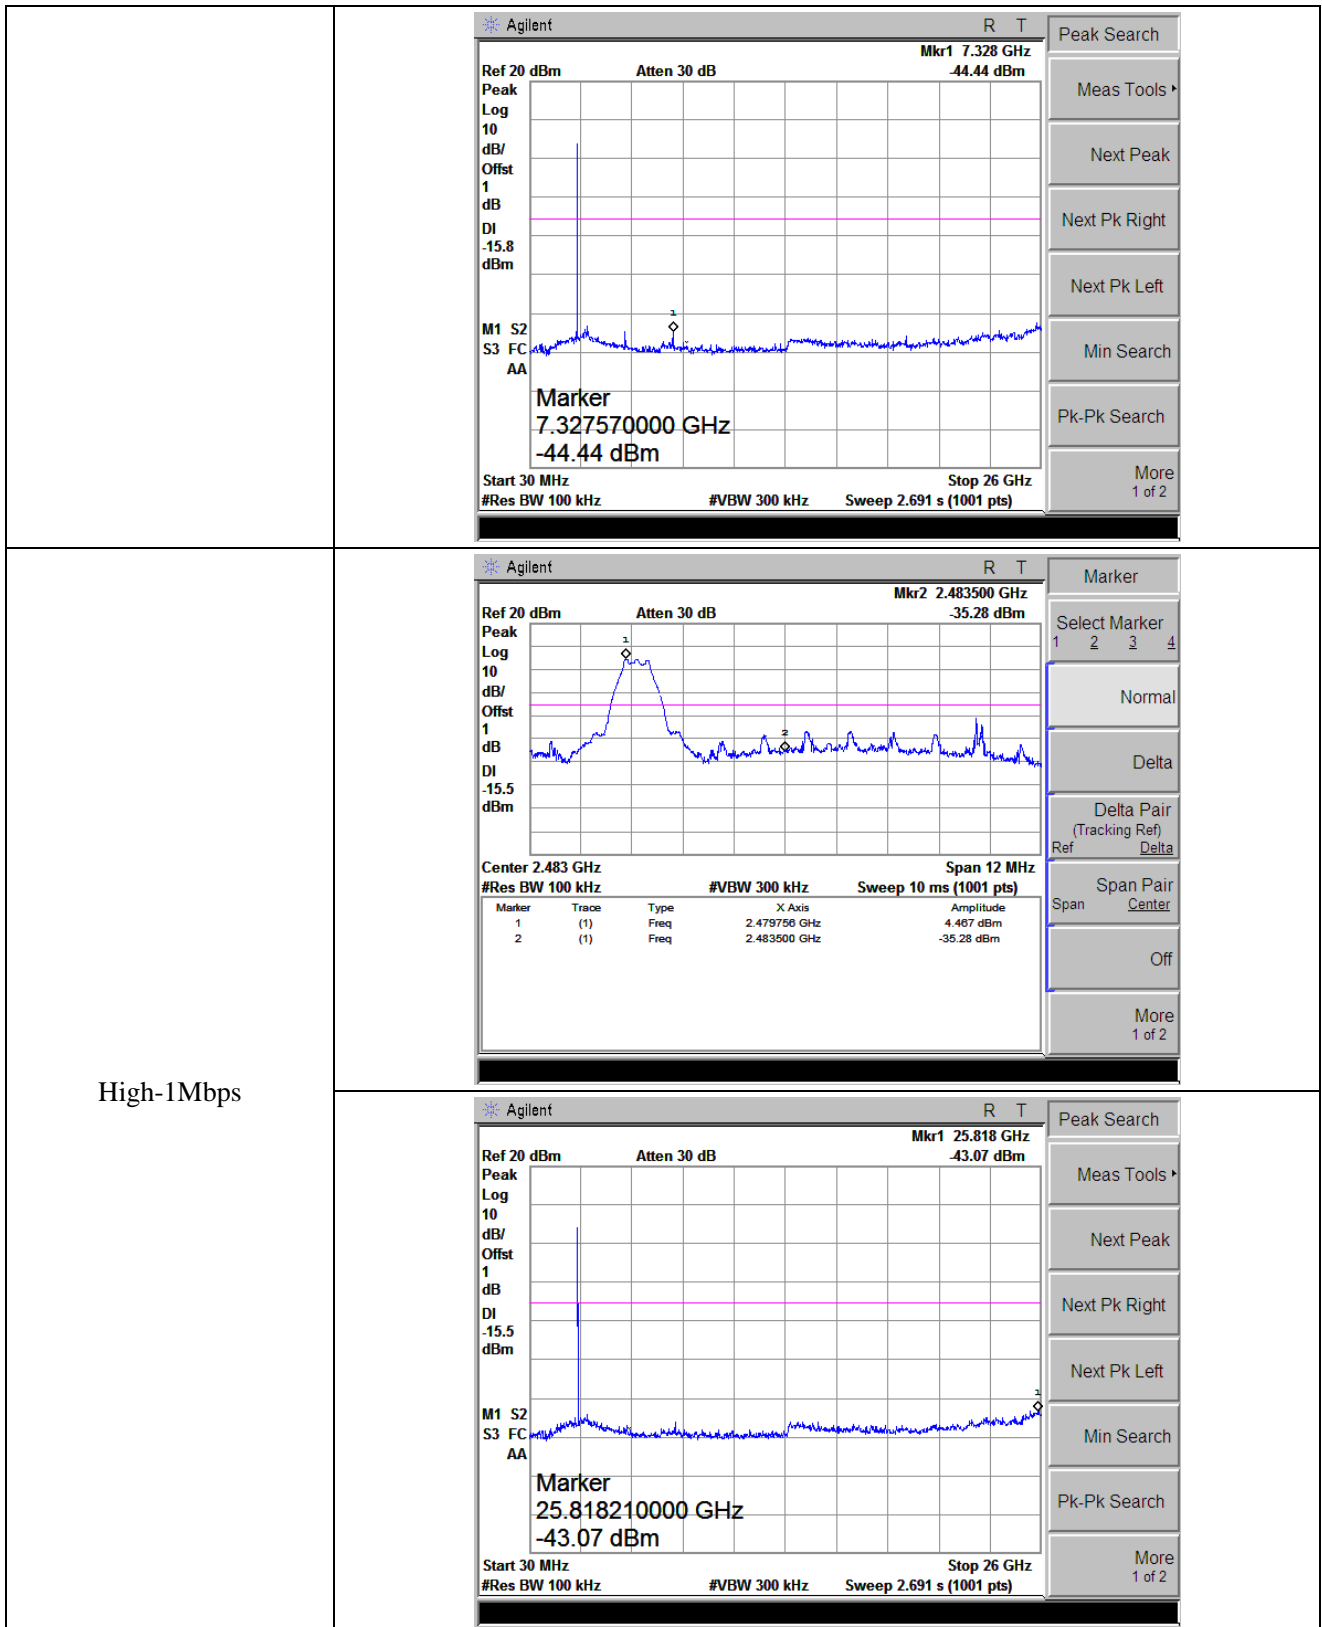

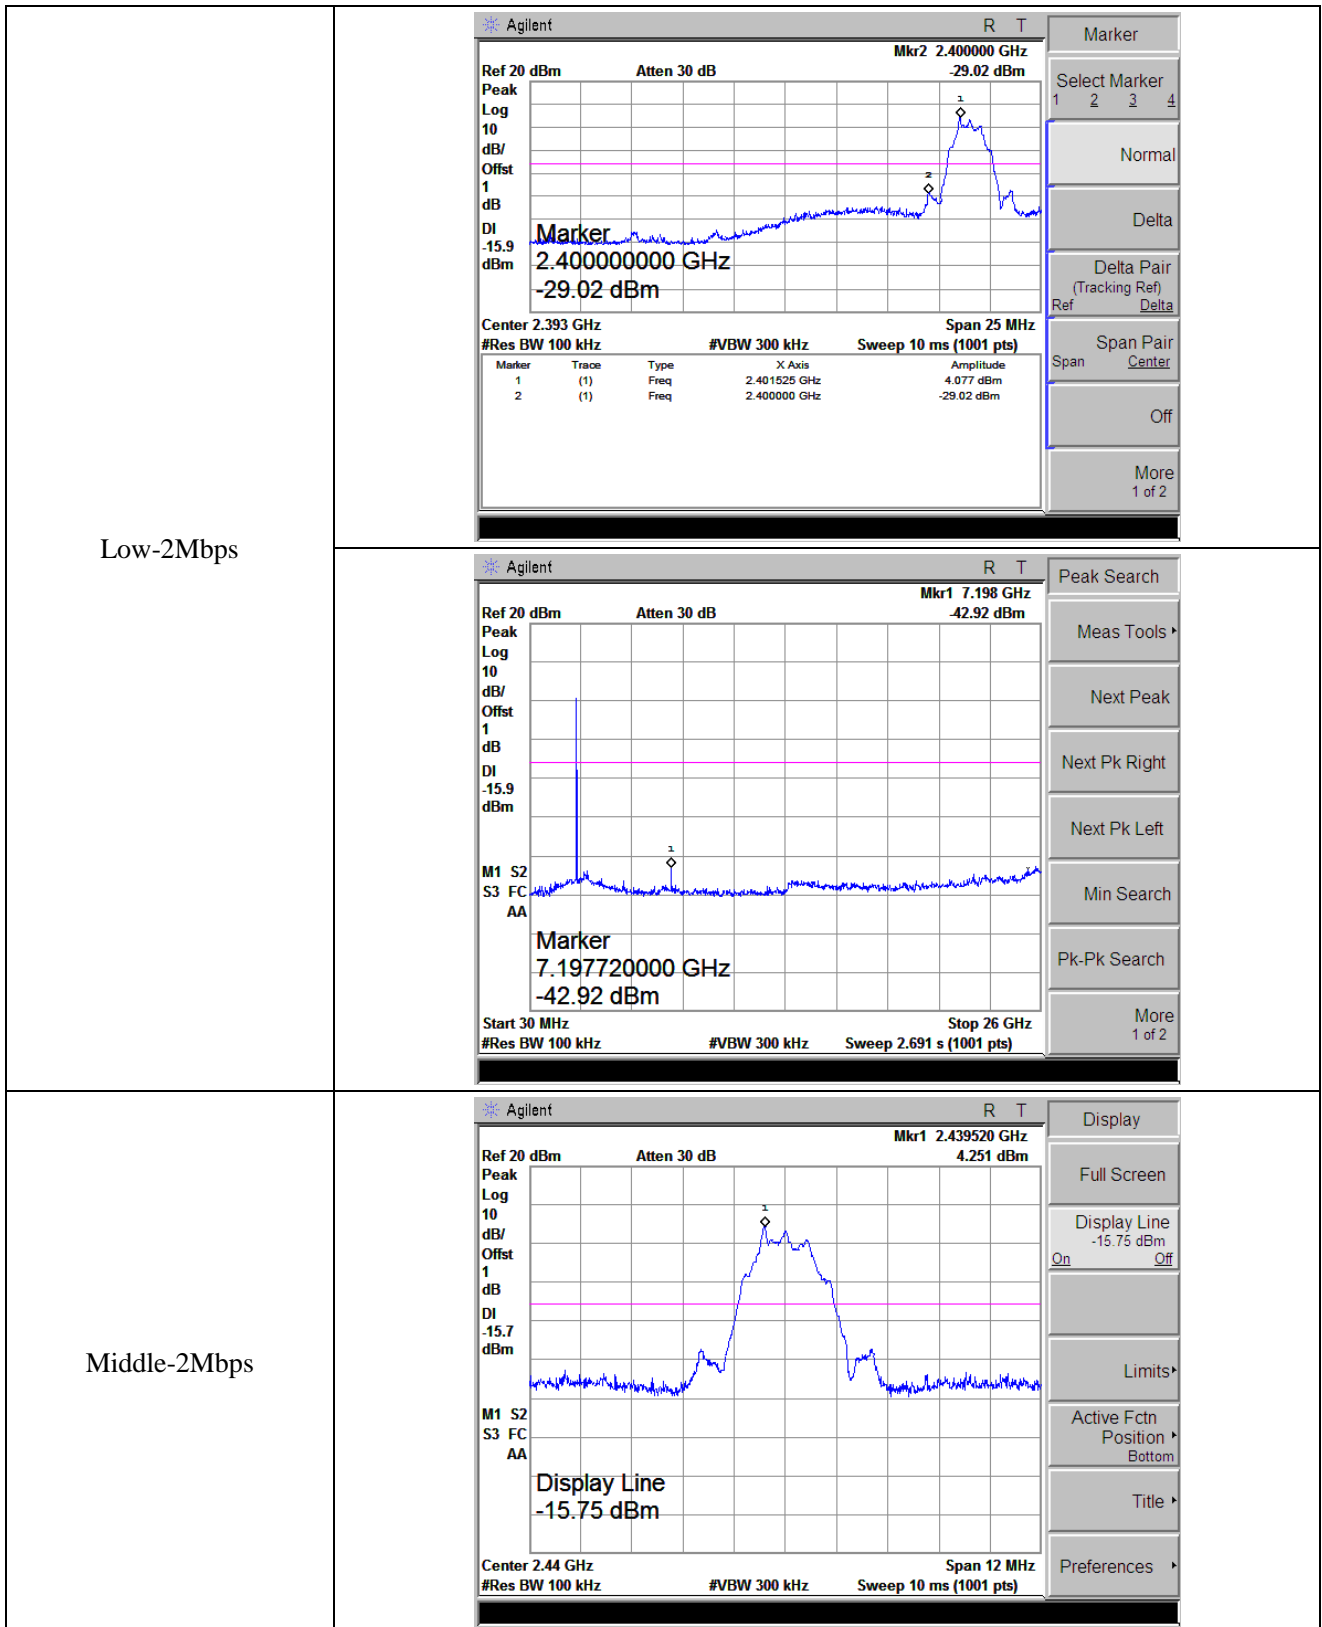

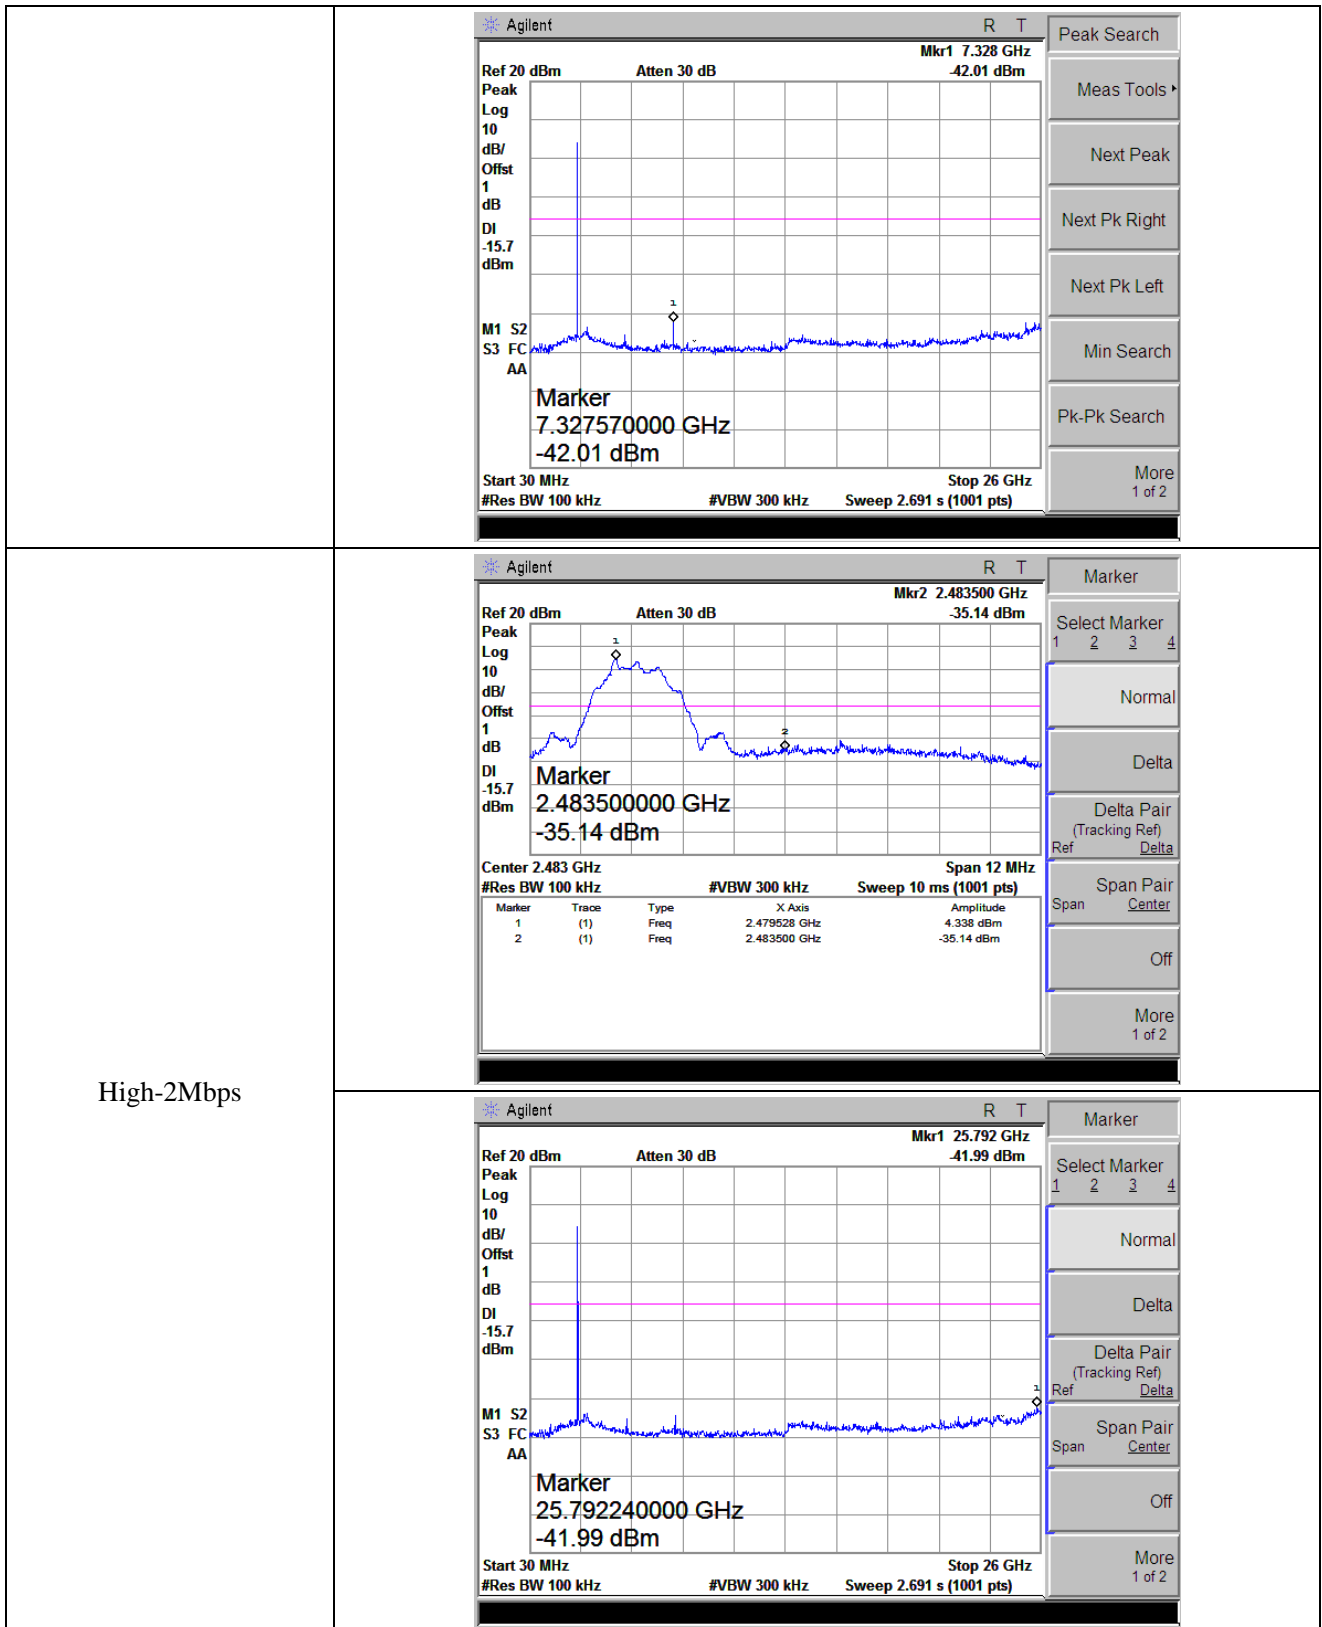

APPENDIX PHOTOGRAPHS

Please refer to “ANNEX”

******* END OF REPORT *******