

# TEST REPORT

Reference No..... : WTX21X05042530W-1  
FCC ID ..... : 2ARO3-WWATCH  
Applicant ..... : Worldwide telecom limited  
Address ..... : 2F Block C; Shenfang Building, Zhen Hualu, Futian, Shenzhen.  
Product Name ..... : Smartwacth  
Test Model. .... : WW1.75  
Standards ..... : FCC Part 15.247  
Date of Receipt sample .... : May.06, 2021  
Date of Test..... : May.06, 2021 to May.17, 2021  
Date of Issue ..... : May.17, 2021  
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

**Prepared By:**

**Waltek Testing Group (Shenzhen) Co., Ltd.**

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,  
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308


Fax.: +86-755-33663309

Tested by:



Jason Su / Project Engineer

Reviewed By:

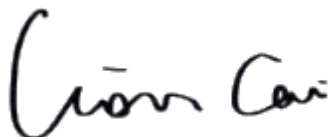

Lion Cai / RF Manager

Approved & Authorized By:



Silin Chen / Manager

**TABLE OF CONTENTS**

<b>1. GENERAL INFORMATION.....</b>	<b>4</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
1.2 TEST STANDARDS.....	5
1.3 TEST METHODOLOGY.....	5
1.4 TEST FACILITY.....	5
1.5 EUT SETUP AND TEST MODE.....	6
1.6 MEASUREMENT UNCERTAINTY.....	7
1.7 TEST EQUIPMENT LIST AND DETAILS.....	7
<b>2. SUMMARY OF TEST RESULTS.....</b>	<b>9</b>
<b>3. ANTENNA REQUIREMENT.....</b>	<b>10</b>
3.1 STANDARD APPLICABLE.....	10
3.2 EVALUATION INFORMATION.....	10
<b>4. POWER SPECTRAL DENSITY.....</b>	<b>11</b>
4.1 STANDARD APPLICABLE.....	11
4.2 TEST SETUP BLOCK DIAGRAM.....	11
4.3 TEST PROCEDURE.....	11
4.4 SUMMARY OF TEST RESULTS/PLOTS.....	11
<b>5. DTS BANDWIDTH.....</b>	<b>12</b>
5.1 STANDARD APPLICABLE.....	12
5.2 TEST SETUP BLOCK DIAGRAM.....	12
5.3 TEST PROCEDURE.....	12
5.4 SUMMARY OF TEST RESULTS/PLOTS.....	12
<b>6. RF OUTPUT POWER.....</b>	<b>13</b>
6.1 STANDARD APPLICABLE.....	13
6.2 TEST SETUP BLOCK DIAGRAM.....	13
6.3 TEST PROCEDURE.....	13
6.4 SUMMARY OF TEST RESULTS/PLOTS.....	13
<b>7. FIELD STRENGTH OF SPURIOUS EMISSIONS.....</b>	<b>14</b>
7.1 STANDARD APPLICABLE.....	14
7.2 TEST PROCEDURE.....	14
7.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	16
7.4 SUMMARY OF TEST RESULTS/PLOTS.....	16
<b>8. OUT OF BAND EMISSIONS.....</b>	<b>31</b>
8.1 STANDARD APPLICABLE.....	31
8.2 TEST PROCEDURE.....	31
8.3 SUMMARY OF TEST RESULTS/PLOTS.....	32
<b>9. CONDUCTED EMISSIONS.....</b>	<b>37</b>
9.1 TEST PROCEDURE.....	37
9.2 BASIC TEST SETUP BLOCK DIAGRAM.....	37
9.3 TEST RECEIVER SETUP.....	37
9.4 SUMMARY OF TEST RESULTS/PLOTS.....	37
<b>APPENDIX SUMMARY.....</b>	<b>40</b>
<b>APPENDIX A.....</b>	<b>41</b>
<b>APPENDIX B.....</b>	<b>44</b>
<b>APPENDIX C.....</b>	<b>47</b>
<b>APPENDIX D.....</b>	<b>50</b>
<b>APPENDIX PHOTOGRAPHS.....</b>	<b>54</b>

**Report version**

Version No.	Date of issue	Description
Rev.00	May.17, 2021	Original
/	/	/

## 1. GENERAL INFORMATION

---

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: Worldwide telecom limited  
 Address of applicant: 2F Block C; Shenfang Building, Zhen Hualu, Futian, Shenzhen.

Manufacturer: Worldwide telecom limited  
 Address of manufacturer: 2F Block C; Shenfang Building, Zhen Hualu, Futian, Shenzhen.

General Description of EUT	
Product Name:	Smartwath
Trade Name	WOLKI
Model No.:	WW1.75
Adding Model(s):	/
Rated Voltage:	DC3.7V
Power Adapter:	/
Software Version:	/
Hardware Version:	/
<i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Bluetooth Version:	V5.0 (BLE mode)
Frequency Range:	2402-2480MHz
RF Output Power:	1.098dBm (Conducted)
Data Rate:	1Mbps
Modulation:	GFSK
Quantity of Channels:	40
Channel Separation:	2MHz
Type of Antenna:	Integral Antenna
Antenna Gain:	1.2dBi

## 1.2 Test Standards

The tests were performed according to following standards:

**FCC Rules Part 15.247**: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

**558074 D01 15.247 Meas Guidance v05r02**: Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under section 15.247 of the Fcc rules.

**ANSI C63.10-2013**: American National Standard for Testing Unlicensed Wireless Devices.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02.

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

## 1.4 Test Facility

### **Address of the test laboratory**

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

### **FCC – Registration No.: 125990**

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

### **Industry Canada (IC) Registration No.: 11464A**

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

### 1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

<b>Test Mode List</b>		
Test Mode	Description	Remark
TM1	Low	2402MHz
TM2	Middle	2440MHz
TM3	High	2480MHz

<b>Test Conditions</b>	
Temperature:	22~25 °C
Relative Humidity:	50~55 %
ATM Pressure:	1019 mbar

<b>EUT Cable List and Details</b>			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
USB Cable	0.6	Unshielded	Without Ferrite

<b>Special Cable List and Details</b>			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

<b>Auxiliary Equipment List and Details</b>			
Description	Manufacturer	Model	Serial Number
Adapter	Wolki	WCH05	/

## 1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-26GHz $\pm 3.92\text{dB}$

## 1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1075	Communication Tester	Rohde & Schwarz	CMW500	148650	2021-03-27	2022-03-26
SEMT-1063	GSM Tester	Rohde & Schwarz	CMU200	114403	2021-03-27	2022-03-26
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2021-03-27	2022-03-26
SEMT-1079	Spectrum Analyzer	Agilent	N9020A	US47140102	2021-03-27	2022-03-26
SEMT-1080	Signal Generator	Agilent	83752A	3610A01453	2021-03-27	2022-03-26
SEMT-1081	Vector Signal Generator	Agilent	N5182A	MY47070202	2021-03-27	2022-03-26
SEMT-1028	Power Divider	Weinschel	1506A	PM204	2021-03-27	2022-03-26
SEMT-1082	Power Divider	RF-Lambda	RFLT4W5M18G	14110400027	2021-03-27	2022-03-26
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2021-03-27	2022-03-26
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2021-03-27	2022-03-26
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2021-04-12	2022-04-11
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2021-04-12	2022-04-11
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-19	2023-03-18
SEMT-1068	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2021-03-19	2023-03-18
SEMT-1042	Horn Antenna	ETS	3117	00086197	2021-03-19	2023-03-18

SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2021-04-27	2023-04-26
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2021-04-27	2022-04-26
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2021-03-27	2022-03-26
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2021-03-27	2022-03-26
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2021-03-19	2023-03-18
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	/	/
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	/	/
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	/	/
SEMT-C004	Cable	Zheng DI	2M0RFC	/	/	/
SEMT-C005	Cable	Zheng DI	1M0RFC	/	/	/
SEMT-C006	Cable	Zheng DI	1M0RFC	/	/	/

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

\*Remark: indicates software version used in the compliance certification testing



## 2. SUMMARY OF TEST RESULTS

---

<b>FCC Rules</b>	<b>Description of Test Item</b>	<b>Result</b>
§15.203; §15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§15.207(a)	Conducted Emission	Compliant
§15.247(e)	Power Spectral Density	Compliant
§15.247(a)(2)	DTS Bandwidth	Compliant
§15.247(b)(3)	RF Output Power	Compliant
§15.209(a)	Radiated Emission	Compliant
§15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: Not applicable

Note: Report is for C2PC only. The test data includes Antenna Requirement, Radiated Emission and Band Edge (Out of Band Emissions). Those not tested mark with N/A (not effected by the C2PC).

### **3. Antenna Requirement**

---

#### **3.1 Standard Applicable**

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### **3.2 Evaluation Information**

This product has an Integral antenna, fulfill the requirement of this section.


## 4. Power Spectral Density

---

### 4.1 Standard Applicable

According to 15.247(a)(1)(iii), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 4.2 Test Setup Block Diagram

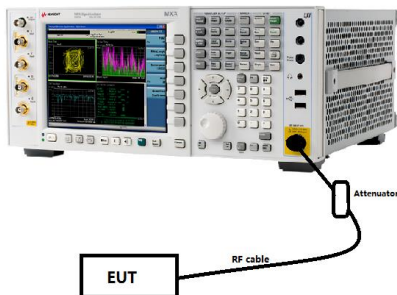

### 4.3 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.10.2, the test method of power spectral density as below:

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- Set the VBW  $\geq 3 \times \text{RBW}$ .
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.
- If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 4.4 Summary of Test Results/Plots

Please refer to Appendix A


## 5. DTS Bandwidth

---

### 5.1 Standard Applicable

According to 15.247(a)(2), systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 5.2 Test Setup Block Diagram

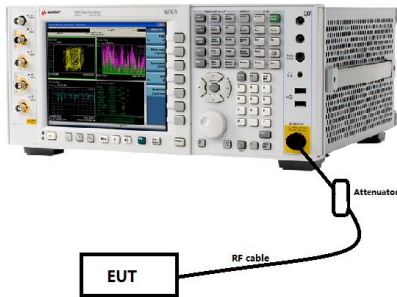

### 5.3 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.2 and ANSI C63.10-2013 Subclause 11.8.1, the test method of DTS Bandwidth as below:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 5.4 Summary of Test Results/Plots

Please refer to Appendix B


## 6. RF Output Power

---

### 6.1 Standard Applicable

According to 15.247(b)(3), for systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

### 6.2 Test Setup Block Diagram

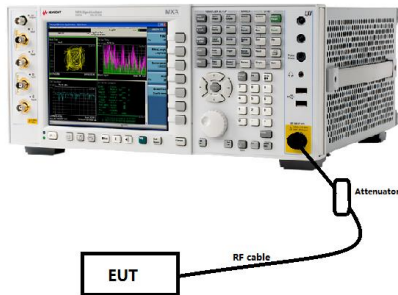

### 6.3 Test Procedure

According to the KDB-558074 D01 v05r02 Subclause 8.3.1.1 and ANSI C63.10-2013 Subclause 11.9.1.1, this procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- a) Set the RBW  $\geq$  DTS bandwidth.
- b) Set VBW  $\geq 3 \times$  RBW.
- c) Set span  $\geq 3 \times$  RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

### 6.4 Summary of Test Results/Plots

Please refer to Appendix C

## 7. Field Strength of Spurious Emissions

### 7.1 Standard Applicable

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.


### 7.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.


The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.


The test setup for emission measurement below 30MHz..

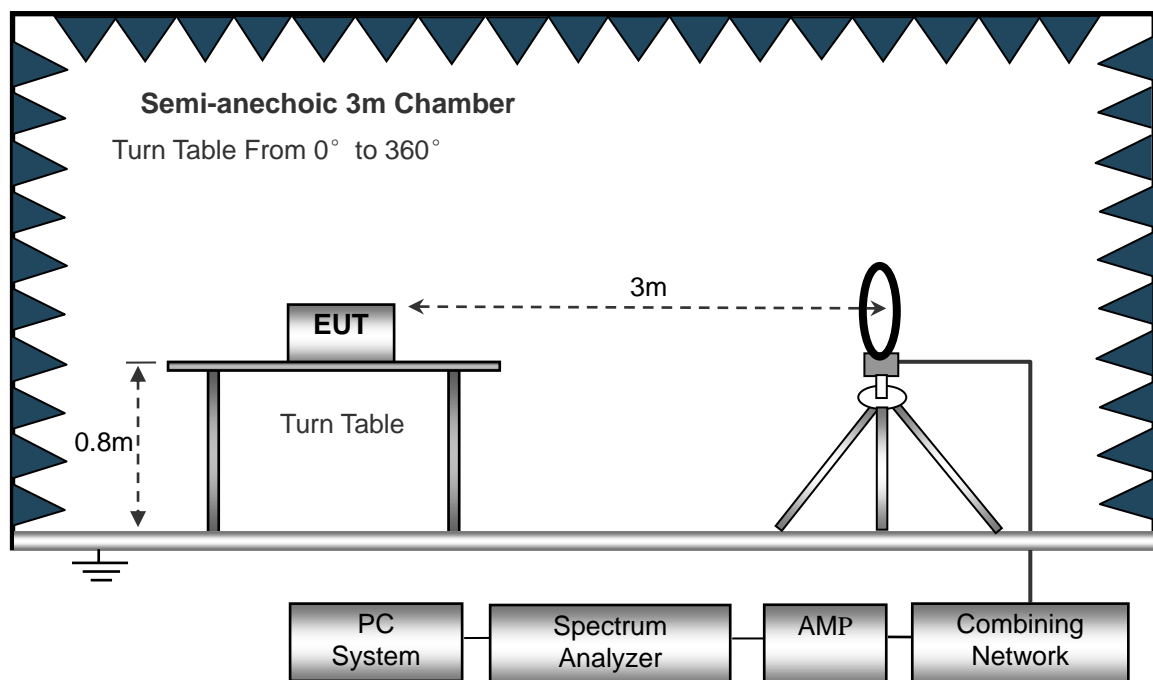

The test setup for emission measurement from 30 MHz to 1 GHz..

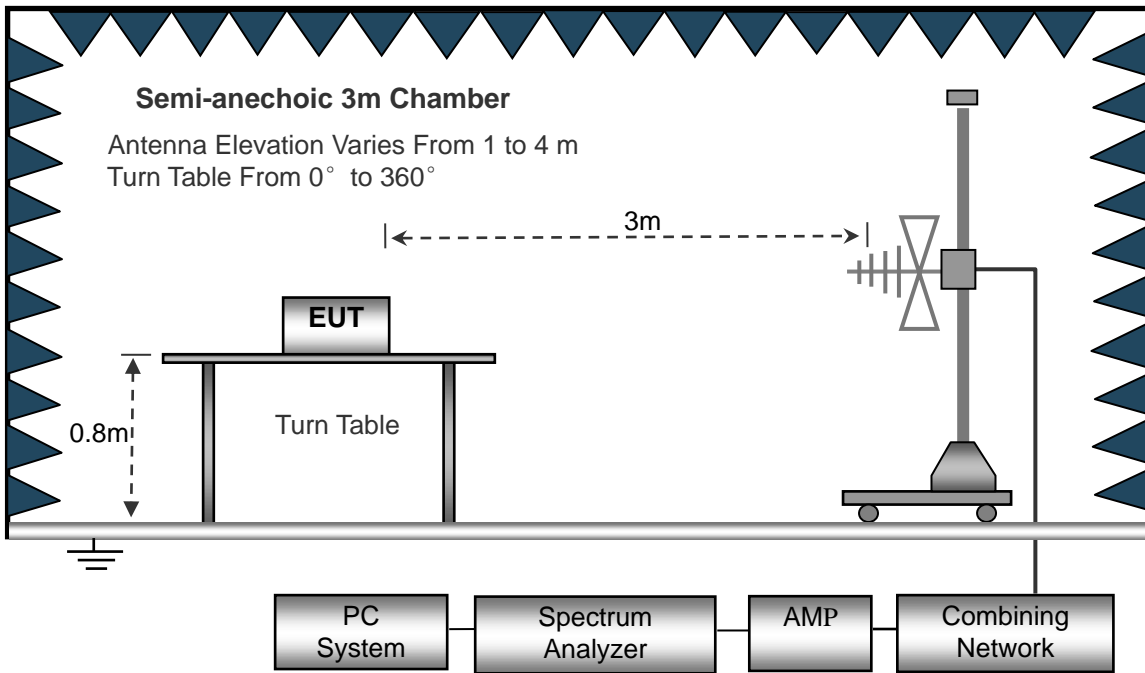

The test setup for emission measurement above 1 GHz..

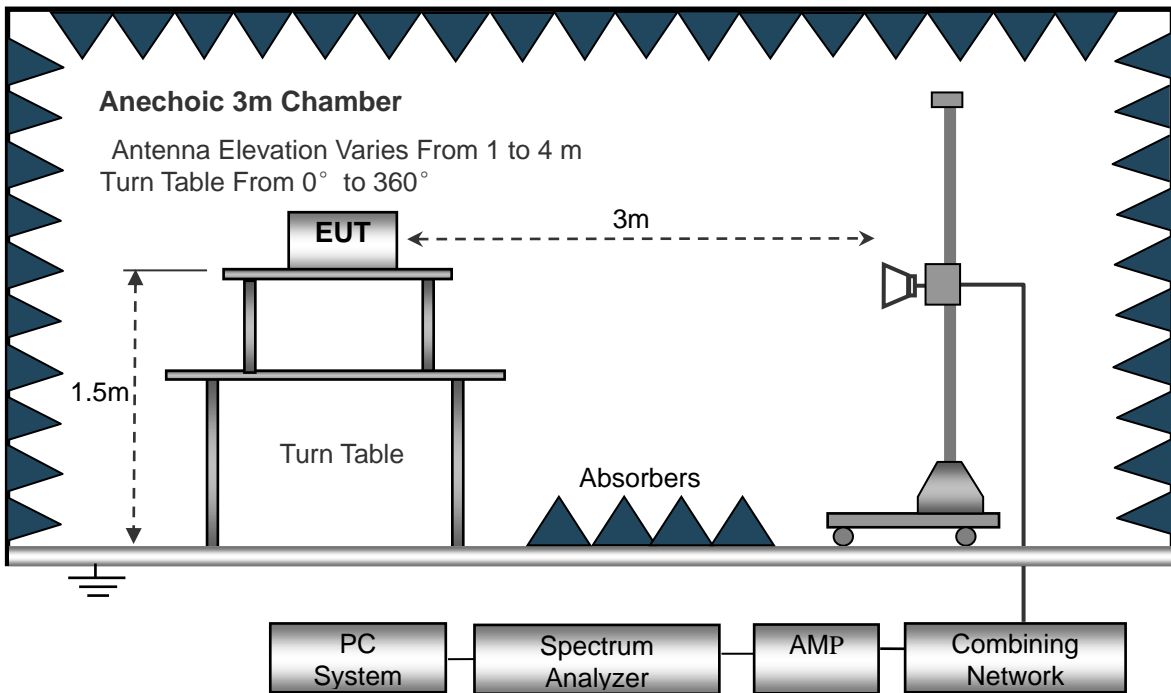

Frequency :9kHz-30MHz

RBW=10KHz,

VBW =30KHz

Sweep time= Auto

Trace = max hold

Detector function = peak

Frequency :30MHz-1GHz

RBW=120KHz,

VBW=300KHz

Sweep time= Auto

Trace = max hold

Detector function = peak, QP

Frequency :Above 1GHz

RBW=1MHz,

VBW=3MHz(Peak), 10Hz(AV)

Sweep time= Auto

Trace = max hold

Detector function = peak, AV

### 7.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB $\mu$ V means the emission is 6dB $\mu$ V below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$


### 7.4 Summary of Test Results/Plots

*Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.*




- Spurious Emissions Below 1GHz
- 1Mbps

Test Channel	Low	Polarity:	Horizontal
--------------	-----	-----------	------------

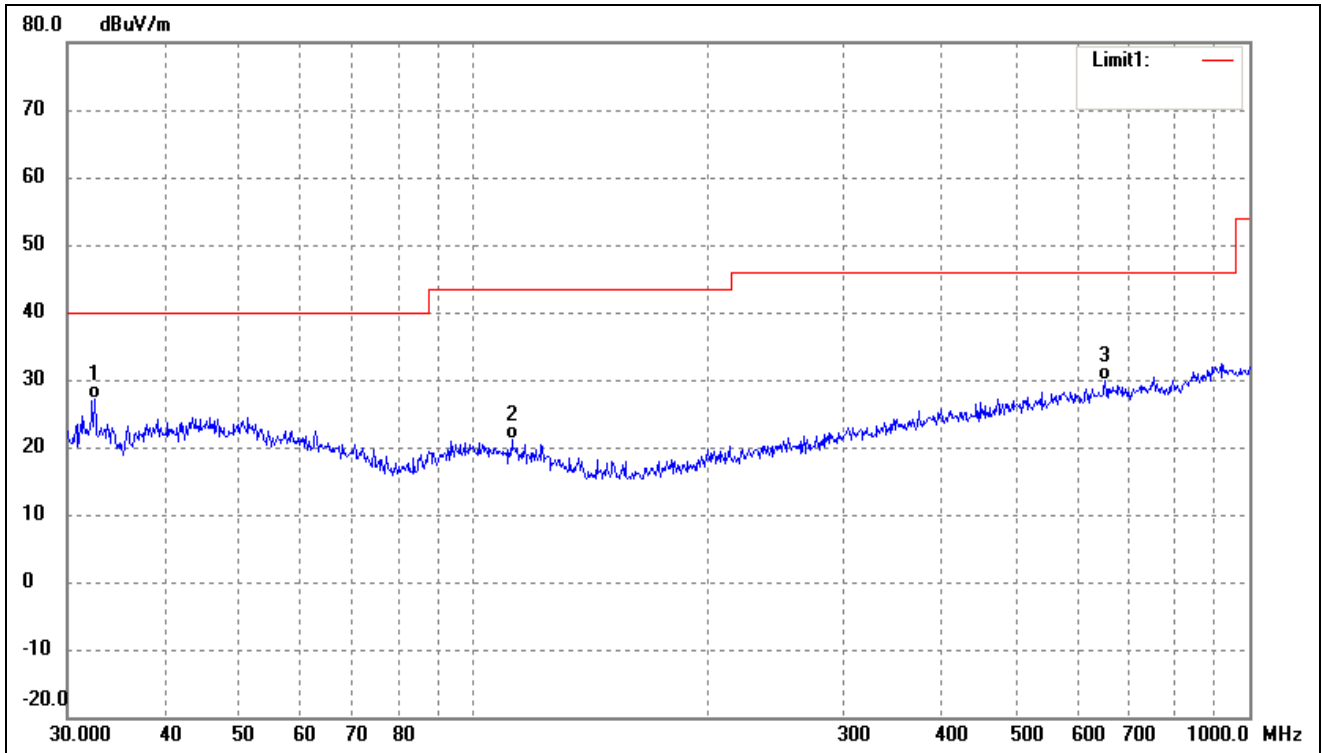


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	32.5198	41.09	-14.01	27.08	40.00	-12.92	-	-	QP
2	112.1305	34.65	-13.52	21.13	43.50	-22.37	-	-	QP
3	651.9417	32.25	-2.33	29.92	46.00	-16.08	-	-	QP

Test Channel	Low	Polarity:	Vertical
--------------	-----	-----------	----------

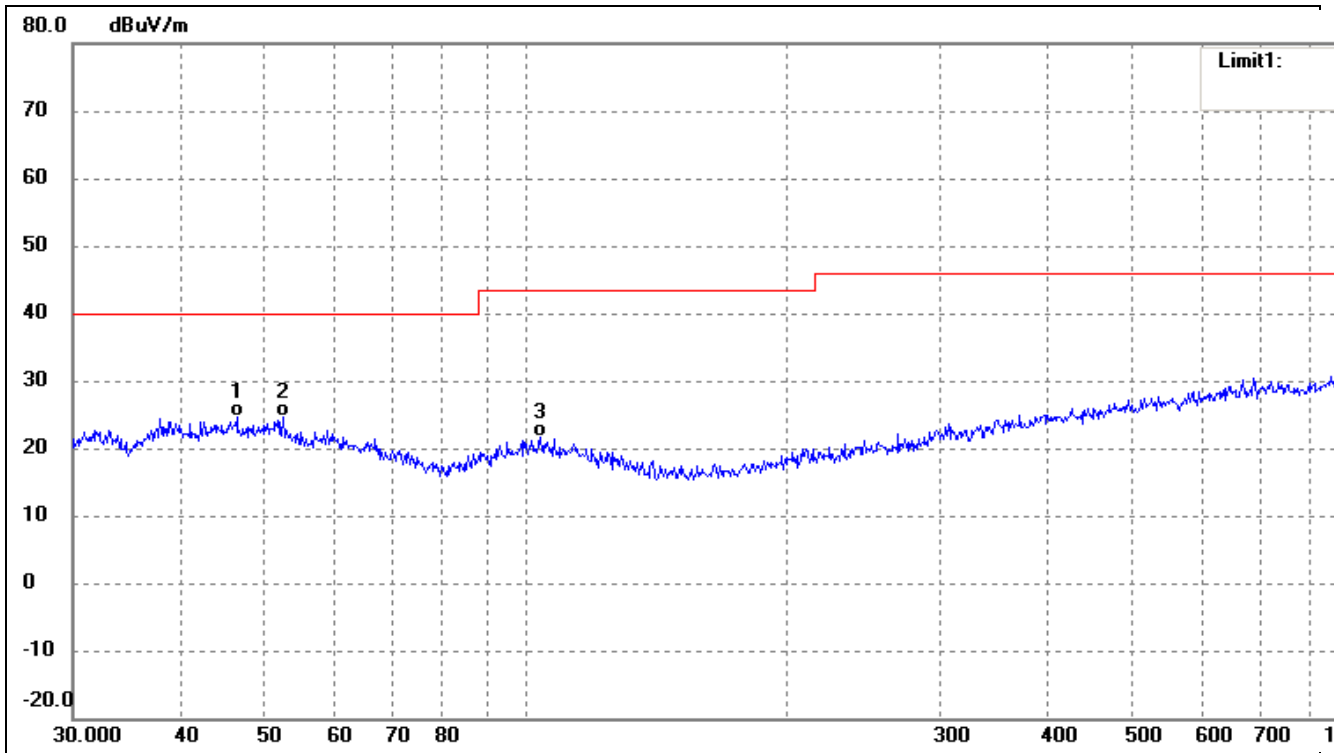


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	46.3402	36.42	-11.73	24.69	40.00	-15.31	-	-	QP
2	52.3913	36.95	-12.20	24.75	40.00	-15.25	-	-	QP
3	103.8055	34.85	-13.32	21.53	43.50	-21.97	-	-	QP

Test Channel	Middle	Polarity:	Horizontal
--------------	--------	-----------	------------

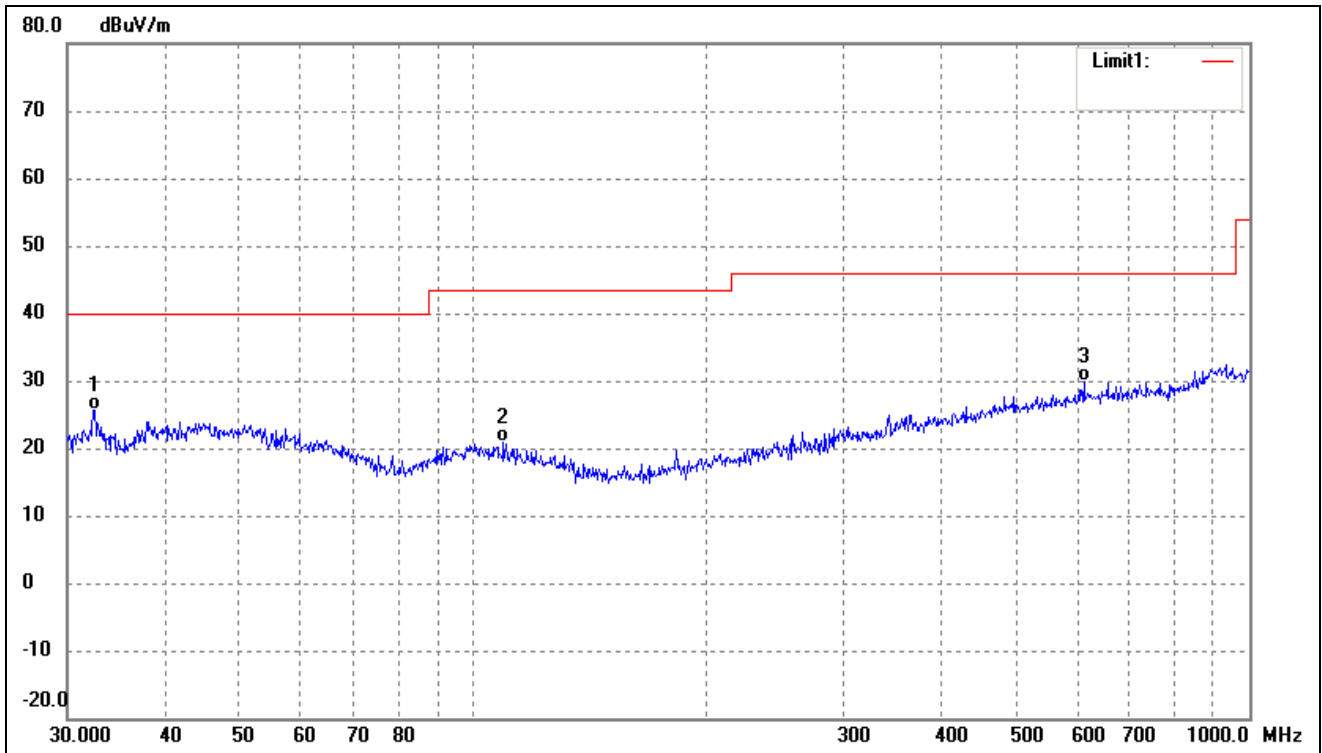


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	32.5198	39.71	-14.01	25.70	40.00	-14.30	-	-	QP
2	109.4116	34.20	-13.31	20.89	43.50	-22.61	-	-	QP
3	612.0642	31.81	-2.04	29.77	46.00	-16.23	-	-	QP

Test Channel	Middle	Polarity:	Vertical
--------------	--------	-----------	----------

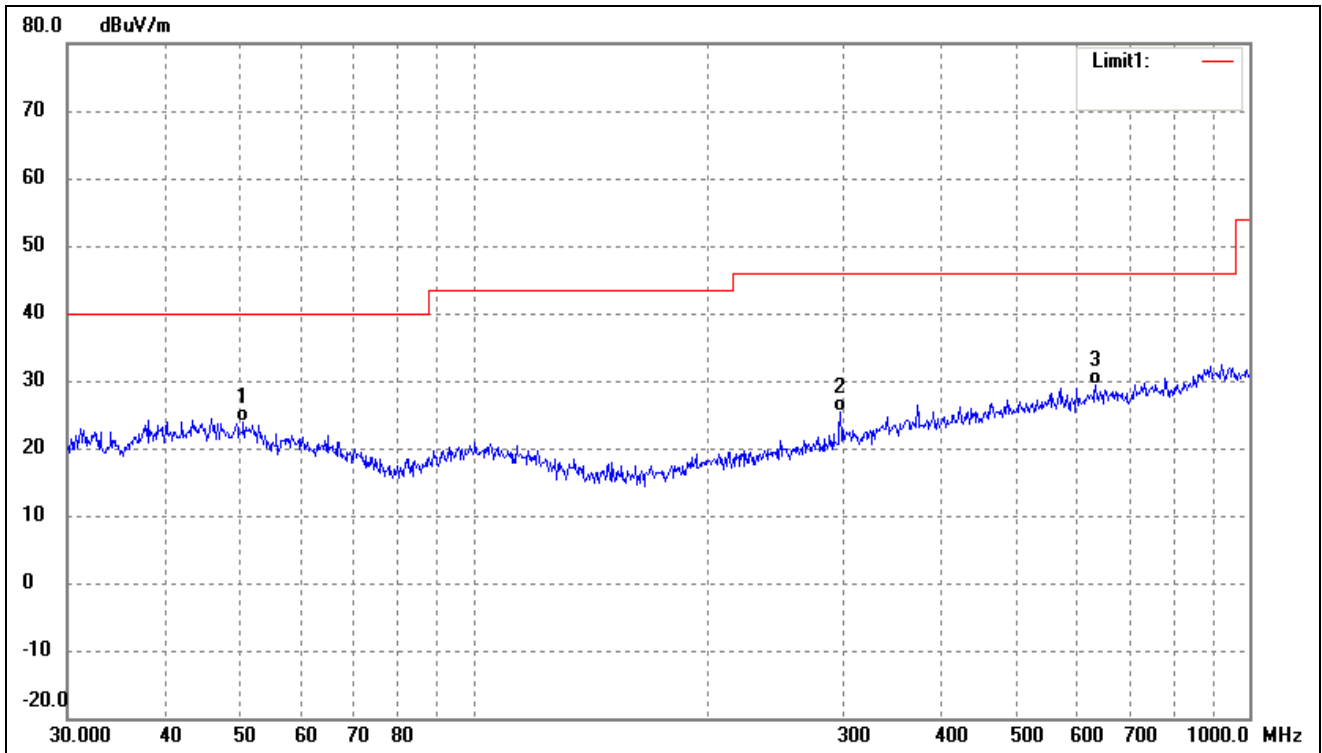


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	50.5860	35.49	-11.69	23.80	40.00	-16.20	-	-	QP
2	297.2241	34.51	-9.13	25.38	46.00	-20.62	-	-	QP
3	633.9073	31.64	-2.23	29.41	46.00	-16.59	-	-	QP

Test Channel	High	Polarity:	Horizontal
--------------	------	-----------	------------

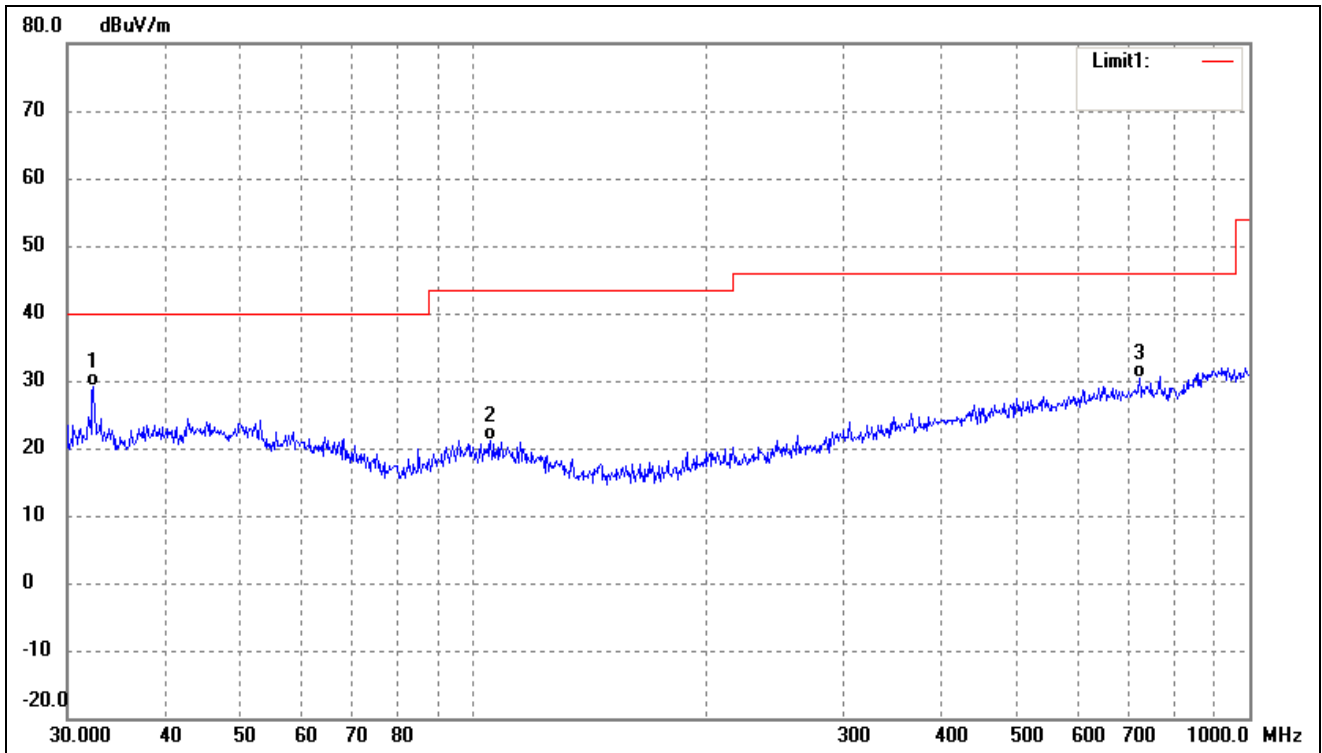

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	32.4059	43.07	-14.02	29.05	40.00	-10.95	-	-	QP
2	105.2718	34.41	-13.32	21.09	43.50	-22.41	-	-	QP
3	721.7259	31.43	-1.10	30.33	46.00	-15.67	-	-	QP


Test Channel	High	Polarity:	Vertical
--------------	------	-----------	----------

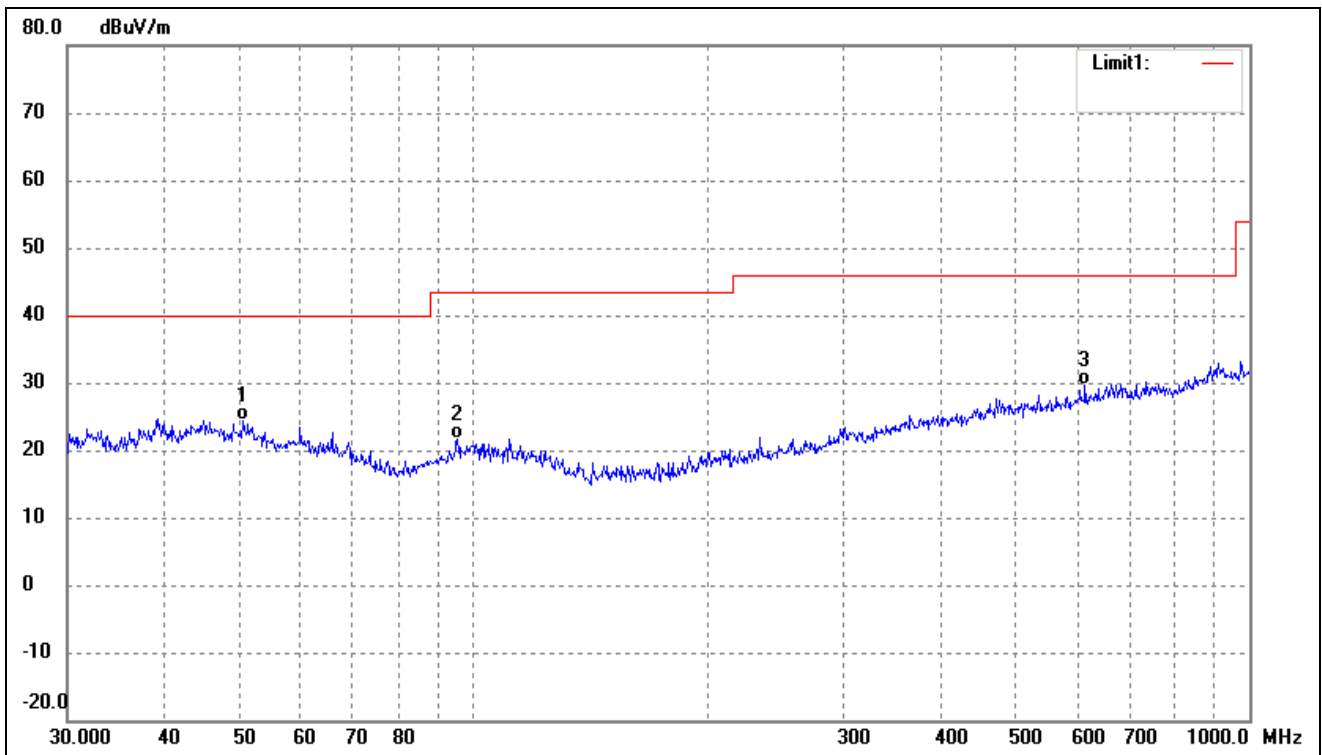

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	50.5860	35.99	-11.69	24.30	40.00	-15.70	-	-	QP
2	95.4270	35.82	-14.08	21.74	43.50	-21.76	-	-	QP
3	614.2142	31.78	-2.05	29.73	46.00	-16.27	-	-	QP


➤ 2Mbps

Test Channel	Low	Polarity:	Horizontal
--------------	-----	-----------	------------

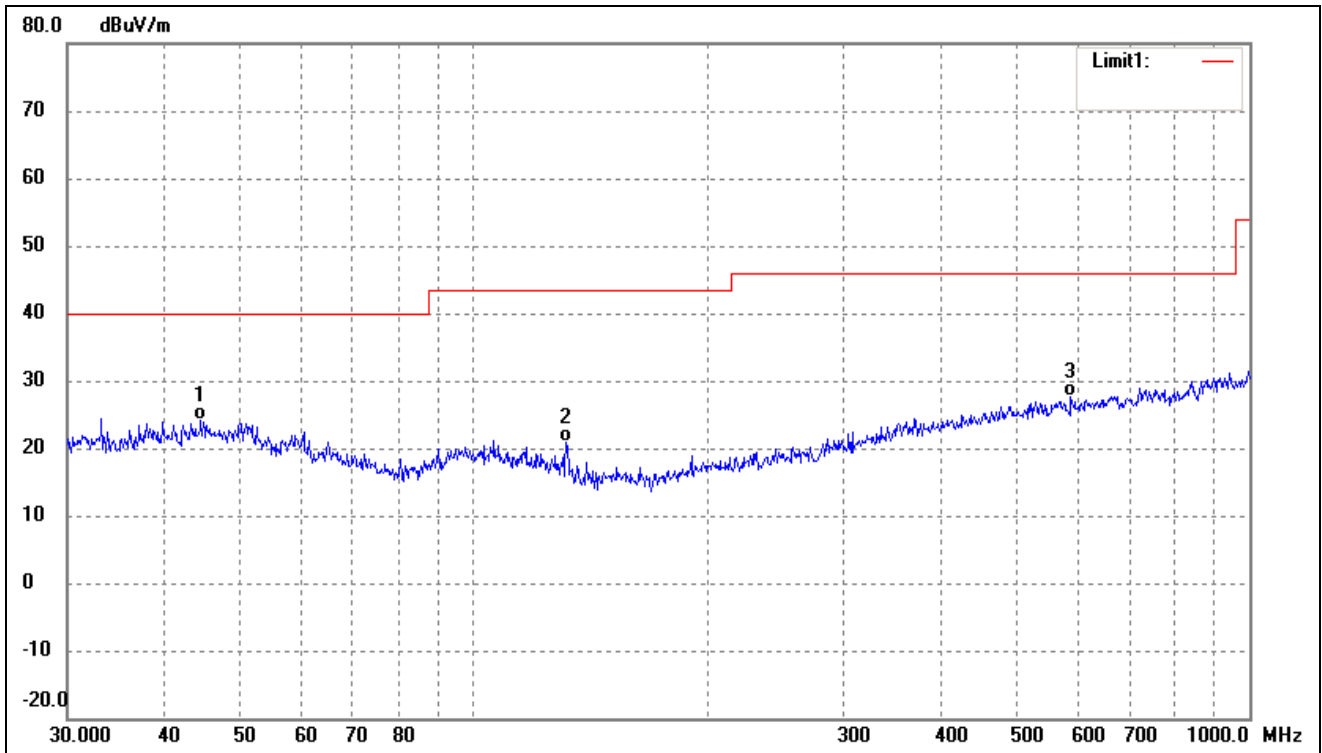

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	44.5868	36.00	-11.82	24.18	40.00	-15.82	-	-	QP
2	131.7577	37.69	-16.83	20.86	43.50	-22.64	-	-	QP
3	588.9051	29.73	-2.22	27.51	46.00	-18.49	-	-	QP


Test Channel	Low	Polarity:	Vertical
--------------	-----	-----------	----------

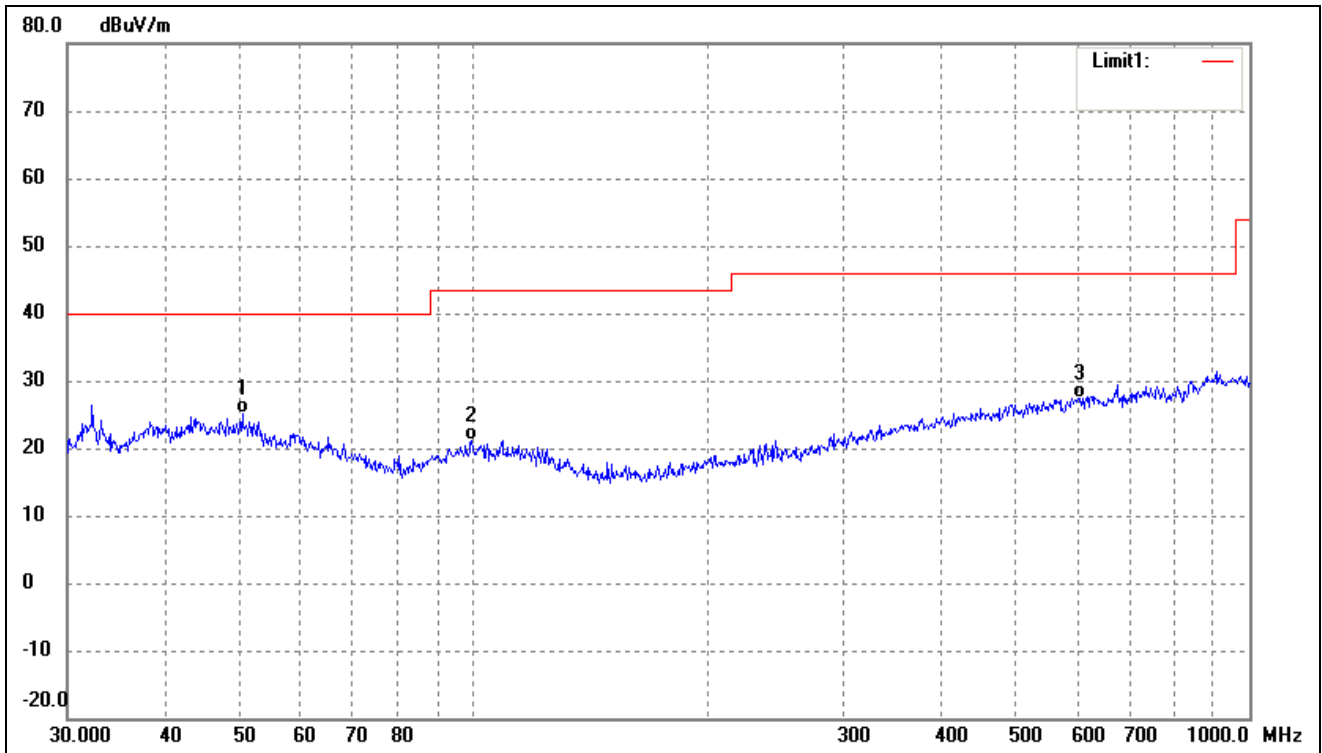

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	50.4089	36.70	-11.65	25.05	40.00	-14.95	-	-	QP
2	99.5281	34.61	-13.39	21.22	43.50	-22.28	-	-	QP
3	605.6592	29.40	-1.98	27.42	46.00	-18.58	-	-	QP




Test Channel	Middle	Polarity:	Horizontal
--------------	--------	-----------	------------

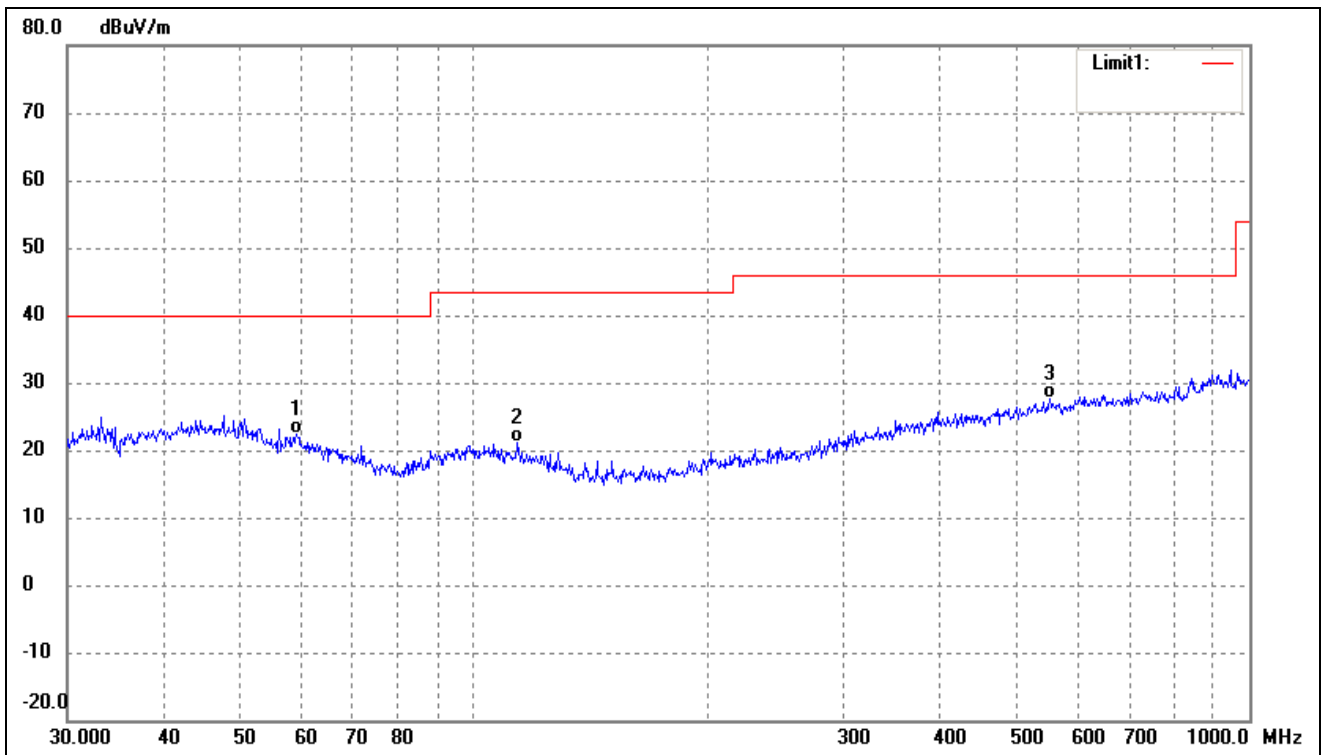


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	59.2325	35.39	-12.98	22.41	40.00	-17.59	-	-	QP
2	114.1138	34.75	-13.72	21.03	43.50	-22.47	-	-	QP
3	552.8832	31.31	-3.65	27.66	46.00	-18.34	-	-	QP

Test Channel	Middle	Polarity:	Vertical
--------------	--------	-----------	----------

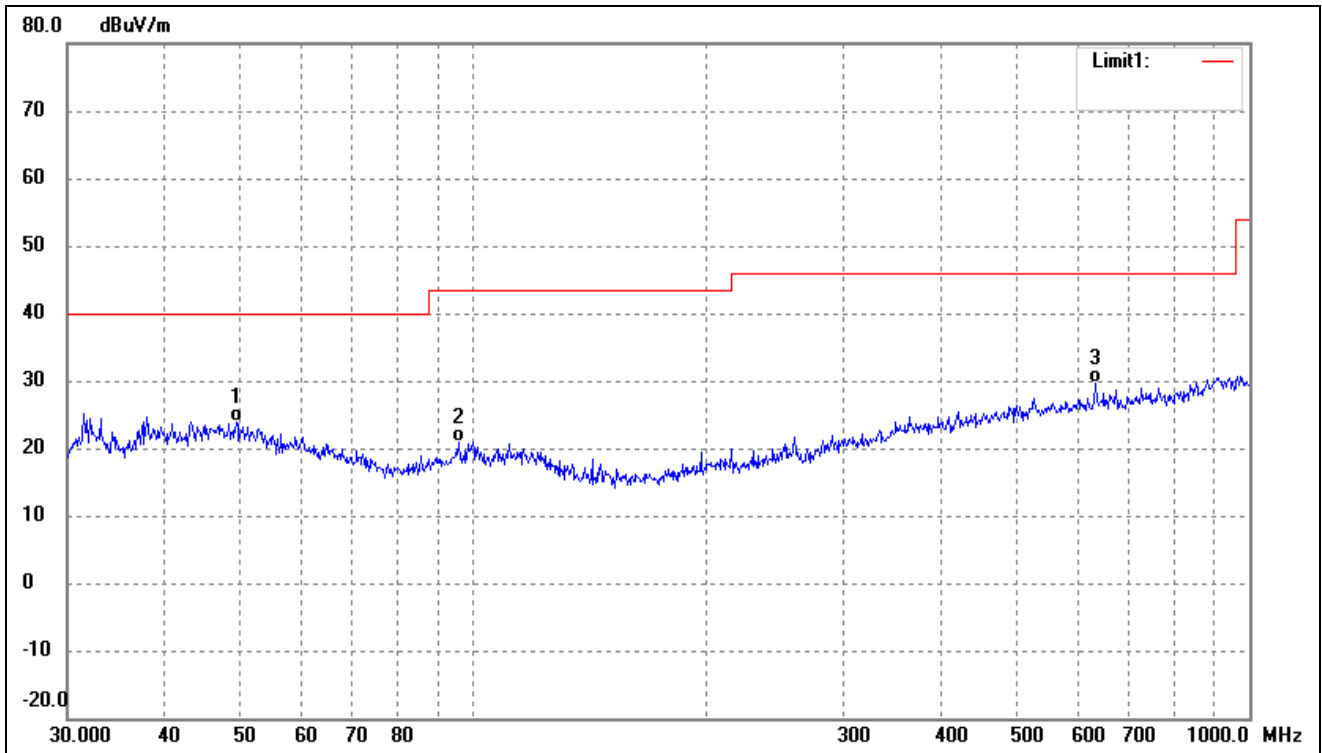


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	49.5328	35.41	-11.56	23.85	40.00	-16.15	-	-	QP
2	95.7622	34.98	-14.03	20.95	43.50	-22.55	-	-	QP
3	633.9073	31.83	-2.23	29.60	46.00	-16.40	-	-	QP

Test Channel	High	Polarity:	Horizontal
--------------	------	-----------	------------

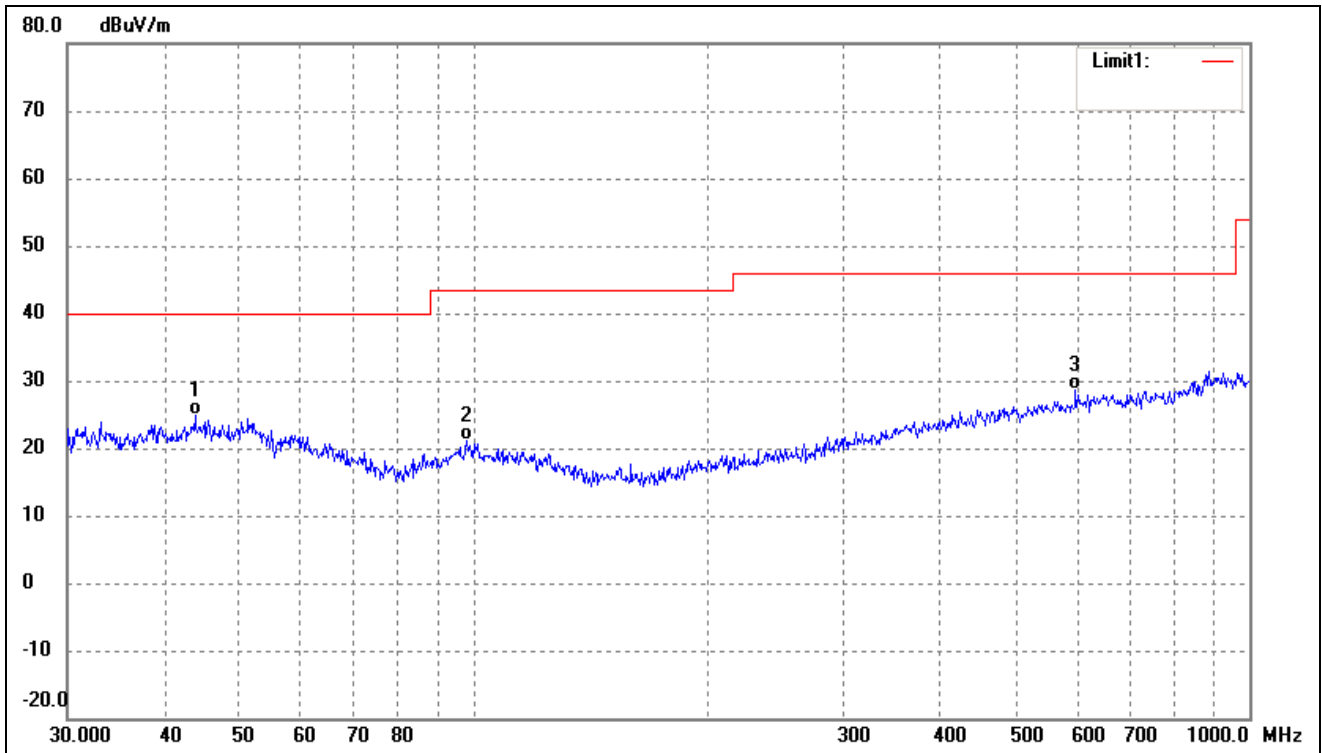

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	43.8119	36.73	-11.84	24.89	40.00	-15.11	-	-	QP
2	98.1419	34.81	-13.62	21.19	43.50	-22.31	-	-	QP
3	597.2234	30.75	-2.01	28.74	46.00	-17.26	-	-	QP

Test Channel	High	Polarity:	Vertical
--------------	------	-----------	----------

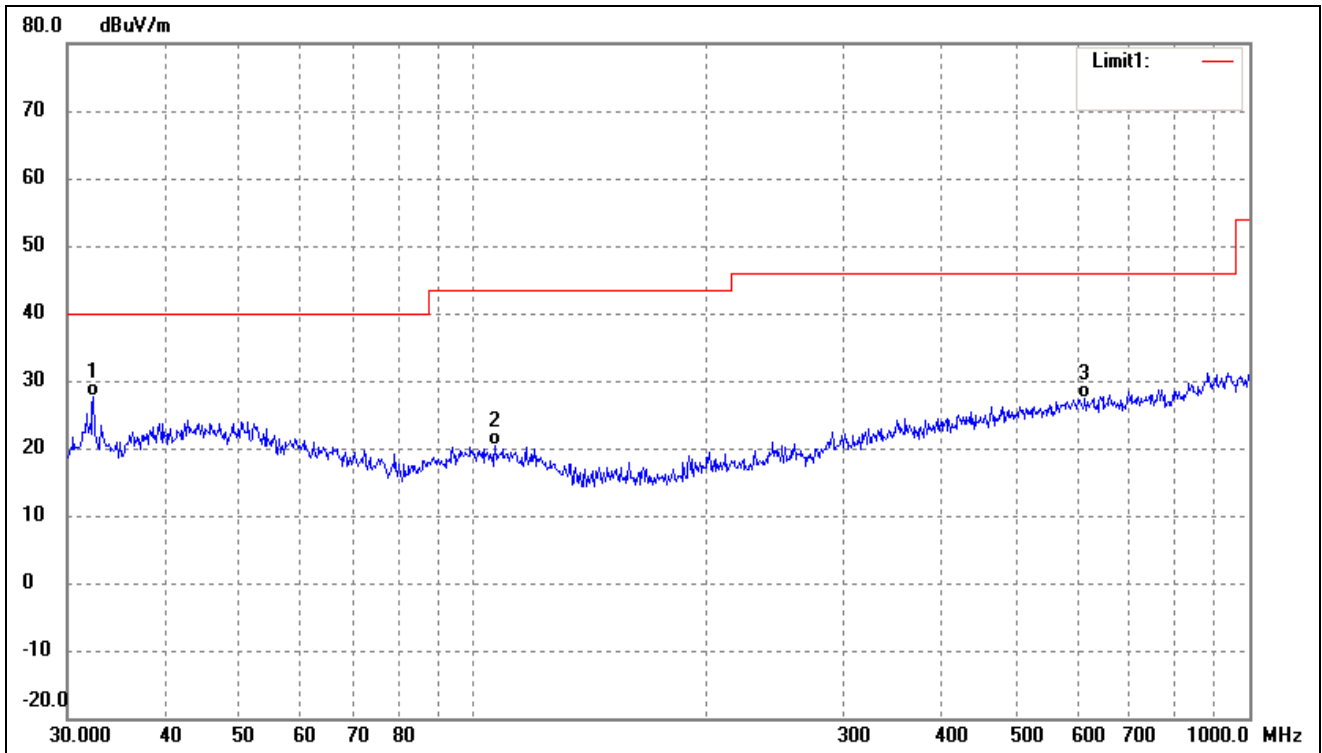

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	32.4059	41.72	-14.02	27.70	40.00	-12.30	-	-	QP
2	106.7587	33.68	-13.32	20.36	43.50	-23.14	-	-	QP
3	614.2142	29.35	-2.05	27.30	46.00	-18.70	-	-	QP

Remark: '-' Means 'the test Degree and Height are not recorded by the test software and only show the worst case in the test report.'

- Spurious Emissions Above 1GHz
- 1Mbps

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2402MHz							
4804	59.21	-3.59	55.62	74	-18.38	H	PK
4804	41.53	-3.59	37.94	54	-16.06	H	AV
7206	55.54	-0.52	55.02	74	-18.98	H	PK
7206	41.2	-0.52	40.68	54	-13.32	H	AV
4804	57.67	-3.59	54.08	74	-19.92	V	PK
4804	38.24	-3.59	34.65	54	-19.35	V	AV
7206	58.2	-0.52	57.68	74	-16.32	V	PK
7206	41.81	-0.52	41.29	54	-12.71	V	AV
Middle Channel-2440MHz							
4880	58.78	-3.49	55.29	74	-18.71	H	PK
4880	39.54	-3.49	36.05	54	-17.95	H	AV
7320	59.27	-0.47	58.8	74	-15.2	H	PK
7320	38.21	-0.47	37.74	54	-16.26	H	AV
4880	60.93	-3.49	57.44	74	-16.56	V	PK
4880	39.41	-3.49	35.92	54	-18.08	V	AV
7320	58.38	-0.47	57.91	74	-16.09	V	PK
7320	39.62	-0.47	39.15	54	-14.85	V	AV
High Channel-2480MHz							
4960	60.34	-3.41	56.93	74	-17.07	H	PK
4960	38.19	-3.41	34.78	54	-19.22	H	AV
7440	59.01	-0.42	58.59	74	-15.41	H	PK
7440	39.62	-0.42	39.2	54	-14.80	H	AV
4960	60.71	-3.41	57.3	74	-16.70	V	PK
4960	40.83	-3.41	37.42	54	-16.58	V	AV
7440	59.90	-0.42	59.48	74	-14.52	V	PK
7440	41.37	-0.42	40.95	54	-13.05	V	AV

## ➤ 2Mbps

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2402MHz							
4804	59.66	-3.59	56.07	74	-17.93	H	PK
4804	41.6	-3.59	38.01	54	-15.99	H	AV
7206	58.58	-0.52	58.06	74	-15.94	H	PK
7206	39.97	-0.52	39.45	54	-14.55	H	AV
4804	58.58	-3.59	54.99	74	-19.01	V	PK
4804	41.37	-3.59	37.78	54	-16.22	V	AV
7206	55.15	-0.52	54.63	74	-19.37	V	PK
7206	41.49	-0.52	40.97	54	-13.03	V	AV
Middle Channel-2440MHz							
4880	60.26	-3.49	56.77	74	-17.23	H	PK
4880	40.86	-3.49	37.37	54	-16.63	H	AV
7320	59.18	-0.47	58.71	74	-15.29	H	PK
7320	41.04	-0.47	40.57	54	-13.43	H	AV
4880	59.26	-3.49	55.77	74	-18.23	V	PK
4880	40.41	-3.49	36.92	54	-17.08	V	AV
7320	61.33	-0.47	60.86	74	-13.14	V	PK
7320	38.35	-0.47	37.88	54	-16.12	V	AV
High Channel-2480MHz							
4960	61.5	-3.41	58.09	74	-15.91	H	PK
4960	41.8	-3.41	38.39	54	-15.61	H	AV
7440	59	-0.42	58.58	74	-15.42	H	PK
7440	38.07	-0.42	37.65	54	-16.35	H	AV
4960	61.19	-3.41	57.78	74	-16.22	V	PK
4960	41.67	-3.41	38.26	54	-15.74	V	AV
7440	60.25	-0.42	59.83	74	-14.17	V	PK
7440	39.41	-0.42	38.99	54	-15.01	V	AV

*Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*

## 8. Out of Band Emissions

---

### 8.1 Standard Applicable

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

### 8.2 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.11, the Emissions in nonrestricted frequency bands test method as follows:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW  $\geq [3 \times \text{RBW}]$ .
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

According to the KDB 558074 D01 v05r02 Subclause 8.5 and ANSI C63.10-2013 Subclause 11.12, the Emissions in restricted frequency bands test method as follows:

#### A. Radiated emission measurements:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement

KDB publication number: 913591 may be used for the radiated bandedge measurements.

#### B. Antenna-port conducted measurements

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 9.
- b) VBW  $\geq$   $[3 \times \text{RBW}]$ .
- c) Detector = peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be lengthened for low-duty-cycle applications.)

RBW as a function of frequency

Frequency	RBW
9kHz to 150kHz	200Hz to 300Hz
0.15MHz to 30MHz	9kHz to 10kHz
30MHz to 1000MHz	100kHz to 120kHz
>1000MHz	1MHz

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.


Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

### 8.3 Summary of Test Results/Plots




- Radiated test
- 1Mbps

Test Channel	Low	Polarity:	Vertical(worst case)
--------------	-----	-----------	----------------------

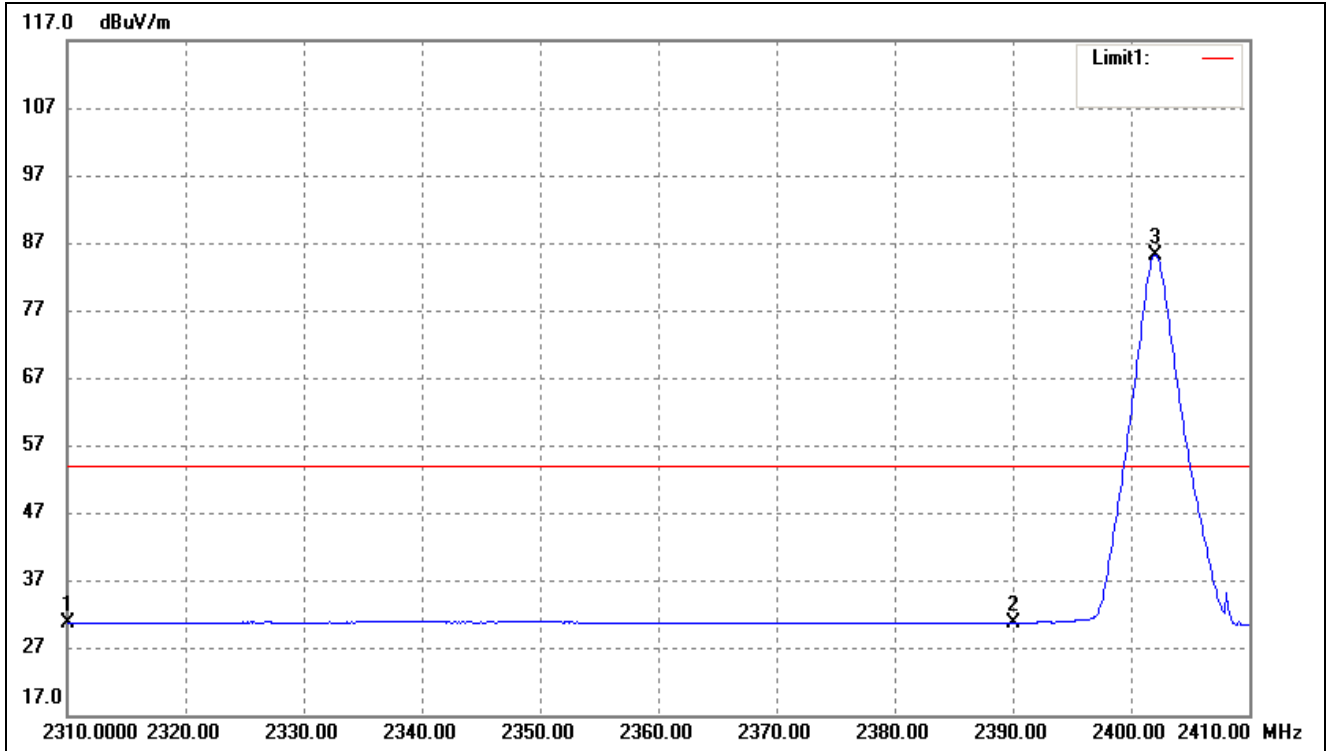

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	40.20	-9.66	30.54	54.00	-23.46	Average Detector
	2310.000	53.52	-9.66	43.86	74.00	-30.14	Peak Detector
2	2390.000	40.16	-9.50	30.66	54.00	-23.34	Average Detector
	2390.000	59.36	-9.50	49.86	74.00	-24.14	Peak Detector
3	2402.000	94.68	-9.47	85.21	/	/	Average Detector
	2402.300	103.58	-9.47	94.11	/	/	Peak Detector


Test Channel	High	Polarity:	Vertical(worst case)
--------------	------	-----------	----------------------

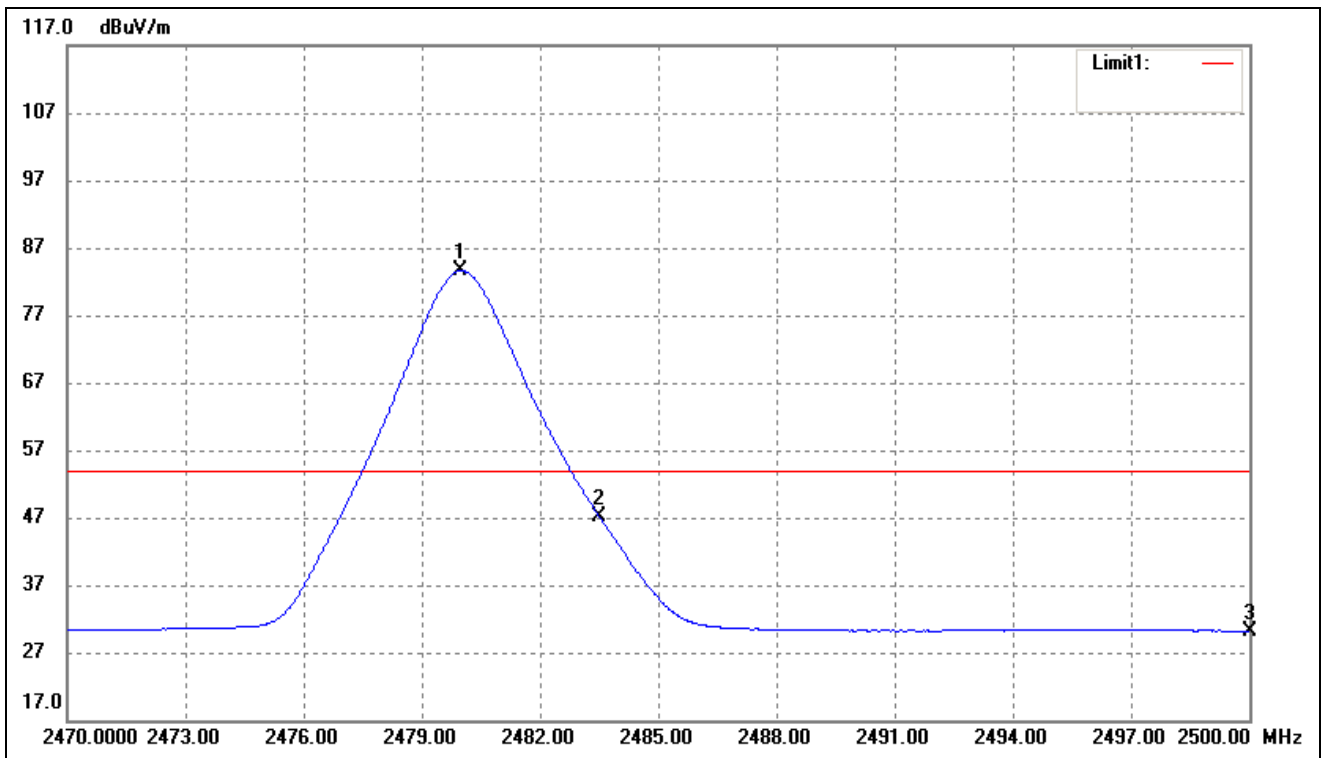

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.990	92.95	-9.32	83.63	/	/	Average Detector
	2480.080	101.14	-9.32	91.82	/	/	Peak Detector
2	2483.500	56.46	-9.31	47.15	54.00	-6.85	Average Detector
	2483.500	63.06	-9.31	53.75	74.00	-20.25	Peak Detector
3	2500.000	39.46	-9.28	30.18	54.00	-23.82	Average Detector
	2500.000	52.01	-9.28	42.73	74.00	-31.27	Peak Detector


➤ 2Mbps

Test Channel	Low	Polarity:	Vertical(worst case)
--------------	-----	-----------	----------------------

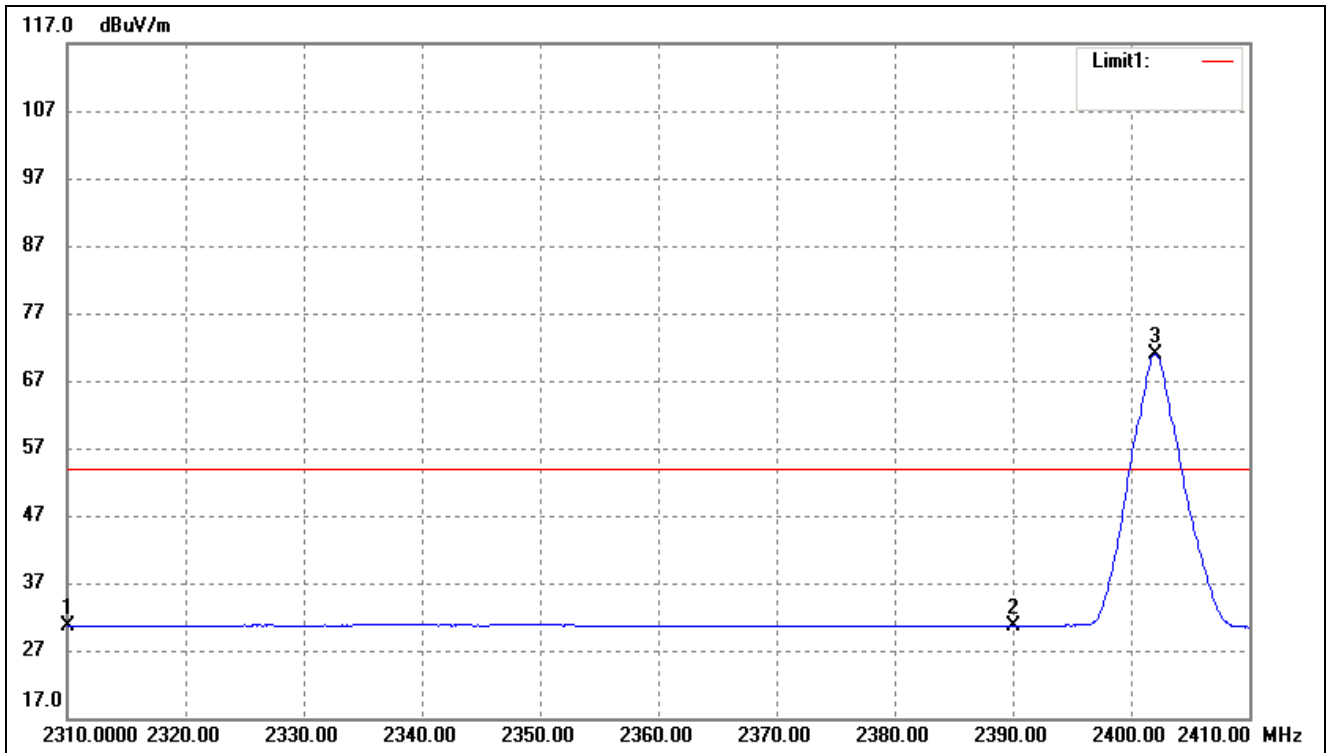

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	40.22	-9.66	30.56	54.00	-23.44	Average Detector
	2310.000	52.02	-9.66	42.36	74.00	-31.64	Peak Detector
2	2390.000	40.09	-9.50	30.59	54.00	-23.41	Average Detector
	2390.000	58.34	-9.50	48.84	74.00	-25.16	Peak Detector
3	2402.000	80.37	-9.47	70.90	/	/	Average Detector
	2401.600	100.88	-9.48	91.40	/	/	Peak Detector

Test Channel	High	Polarity:	Vertical(worst case)
--------------	------	-----------	----------------------

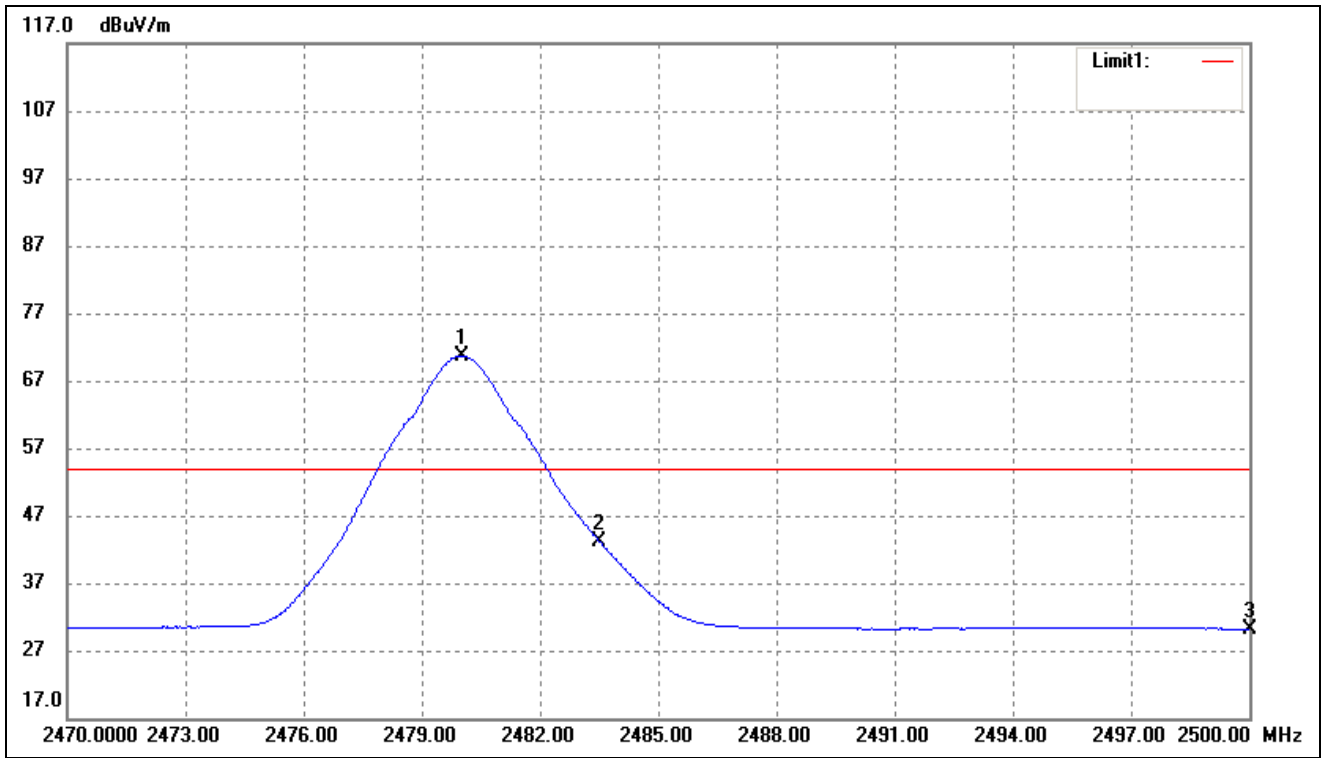

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.020	80.07	-9.32	70.75	/	/	Average Detector
	2479.510	101.13	-9.32	91.81	/	/	Peak Detector
2	2483.500	52.56	-9.31	43.25	54.00	-10.75	Average Detector
	2483.500	67.16	-9.31	57.85	74.00	-16.15	Peak Detector
3	2500.000	39.47	-9.28	30.19	54.00	-23.81	Average Detector
	2500.000	51.64	-9.28	42.36	74.00	-31.64	Peak Detector

➤ Conducted test

**Please refer to Appendix D**


## 9. Conducted Emissions

### 9.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

### 9.2 Basic Test Setup Block Diagram

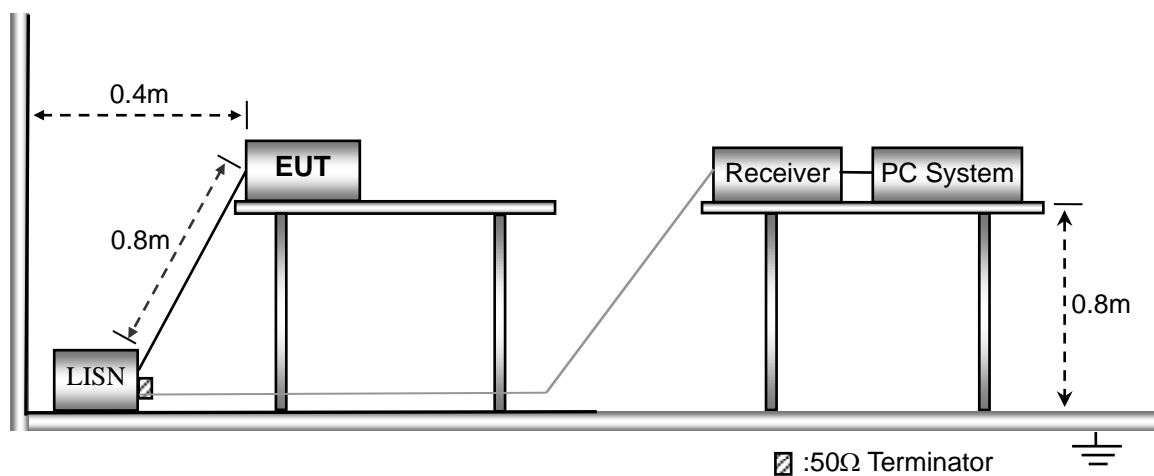


### 9.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency .....	150 kHz
Stop Frequency .....	30 MHz
Sweep Speed .....	Auto
IF Bandwidth.....	10 kHz
Quasi-Peak Adapter Bandwidth .....	9 kHz
Quasi-Peak Adapter Mode .....	Normal


### 9.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

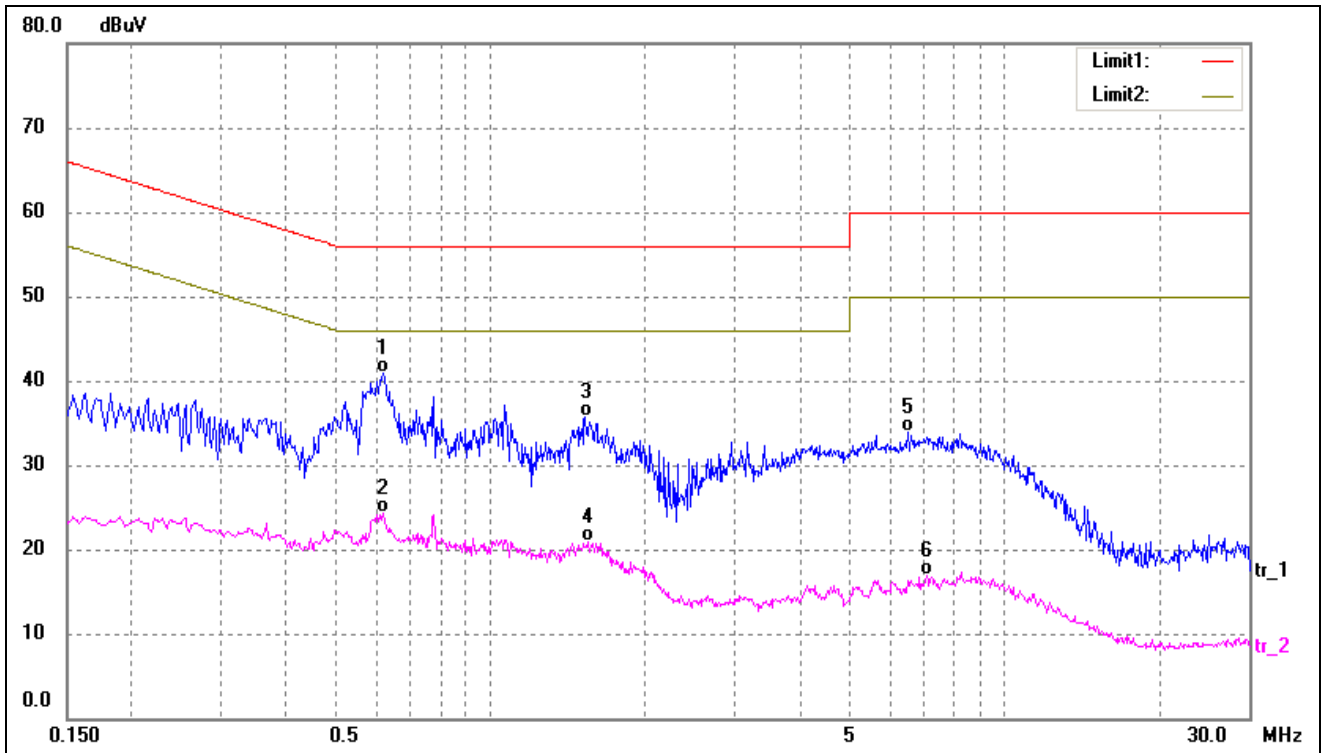

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.6180	30.73	10.20	40.93	56.00	-15.07	QP
2	0.6180	14.19	10.20	24.39	46.00	-21.61	AVG
3	1.5300	25.56	10.23	35.79	56.00	-20.21	QP
4	1.5580	10.71	10.24	20.95	46.00	-25.05	AVG
5	6.5140	23.71	10.24	33.95	60.00	-26.05	QP
6	7.0860	6.70	10.25	16.95	50.00	-33.05	AVG

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

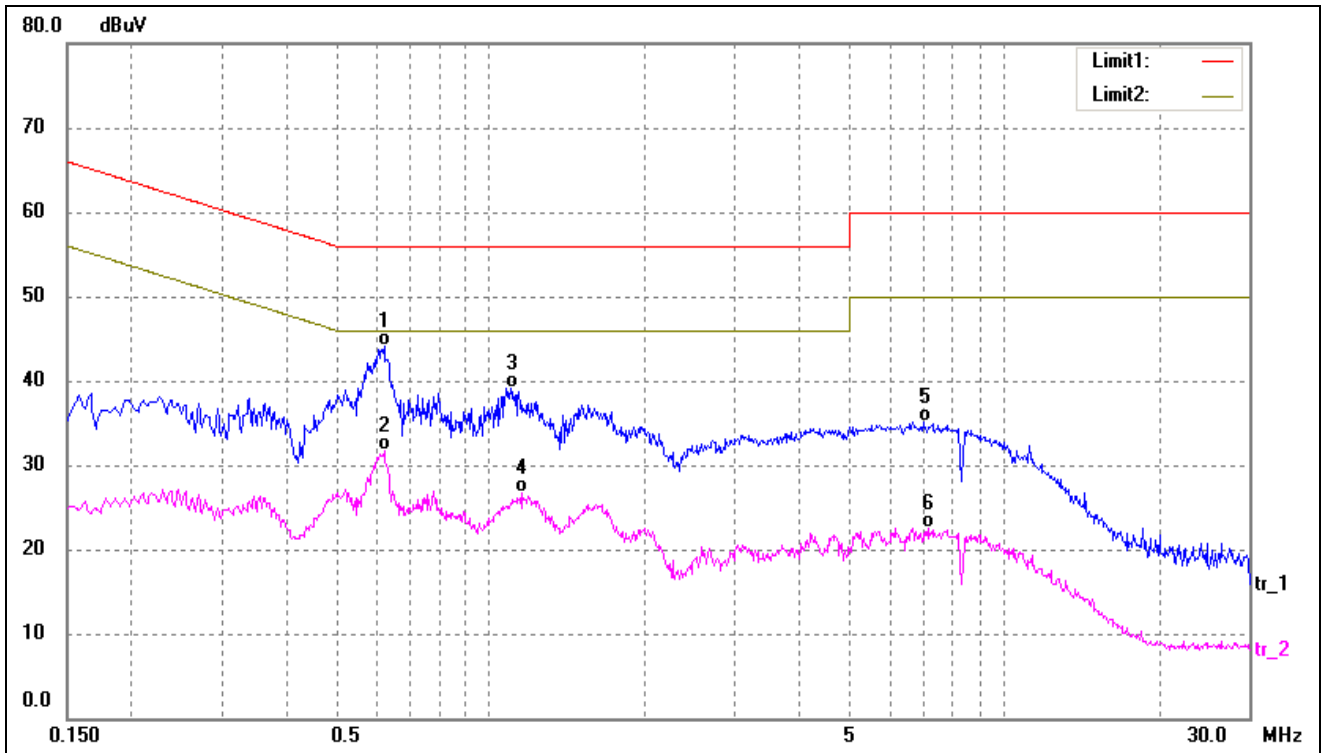

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.6220	33.88	10.20	44.08	56.00	-11.92	QP
2	0.6220	21.47	10.20	31.67	46.00	-14.33	AVG
3	1.0940	28.96	10.21	39.17	56.00	-16.83	QP
4	1.1540	16.51	10.22	26.73	46.00	-19.27	AVG
5	6.9860	24.90	10.25	35.15	60.00	-24.85	QP
6	7.1380	12.19	10.25	22.44	50.00	-27.56	AVG

**APPENDIX SUMMARY**

---

Project No.	WTX21X05042530W	Test Engineer	Combat Chen
Start date	2021/05/10	Finish date	2021/05/11
Temperature	23°C	Humidity	51%
RF specifications	BT-BLE		


<b>APPENDIX</b>	<b>Description of Test Item</b>	<b>Result</b>
A	Power Spectral Density	Compliant
B	DTS Bandwidth	Compliant
C	RF Output Power	Compliant
D	Conducted Out of Band Emissions	Compliant






**APPENDIX A**

---

Power Spectral Density			
Test Mode	Test Channel	Power Spectral Density dBm/3kHz	Limit dBm/3kHz
BLE(1Mbps)	Low	-12.93	8
	Middle	-13.26	8
	High	-12.88	8
BLE(2Mbps)	Low	-16.30	8
	Middle	-15.65	8
	High	-15.24	8

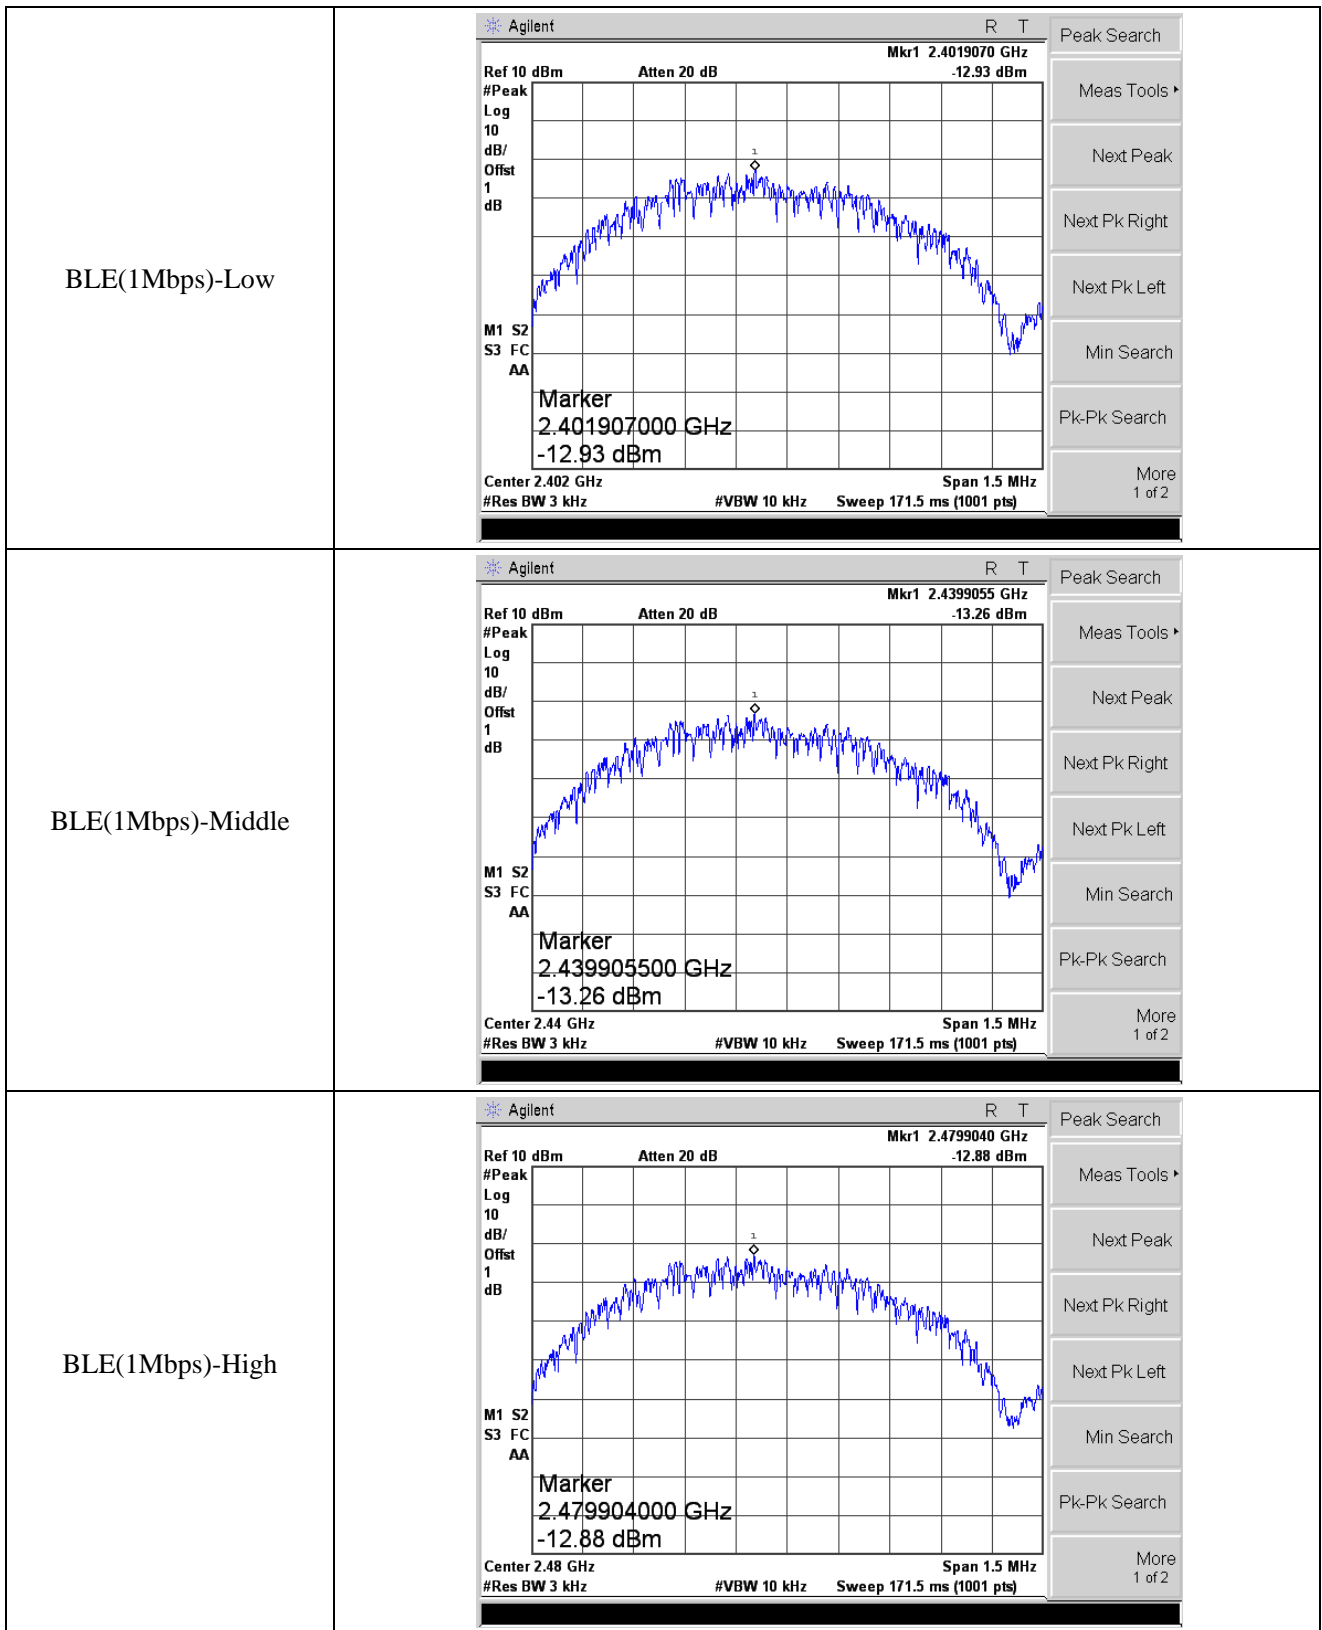
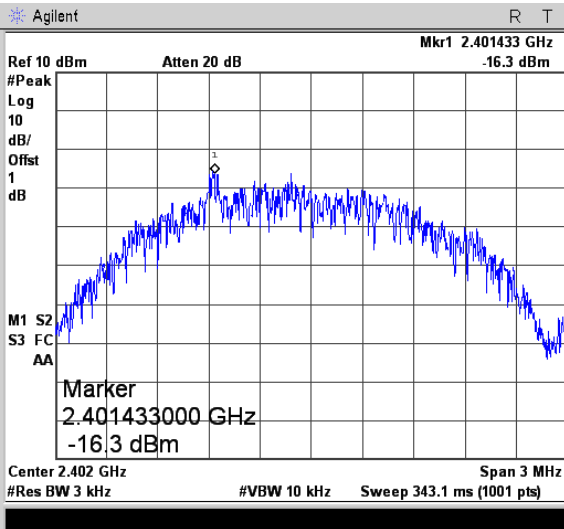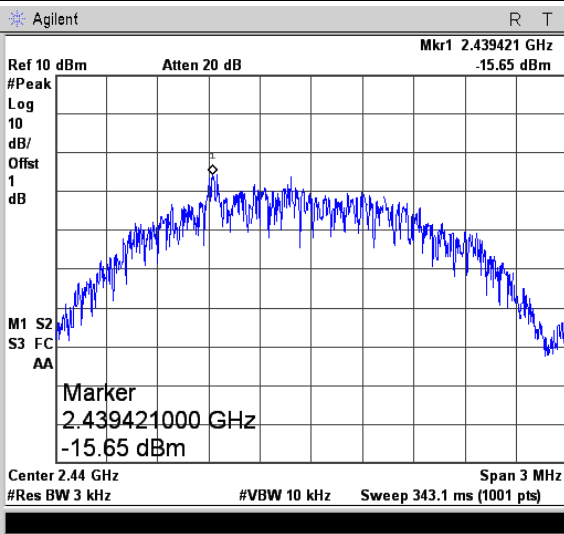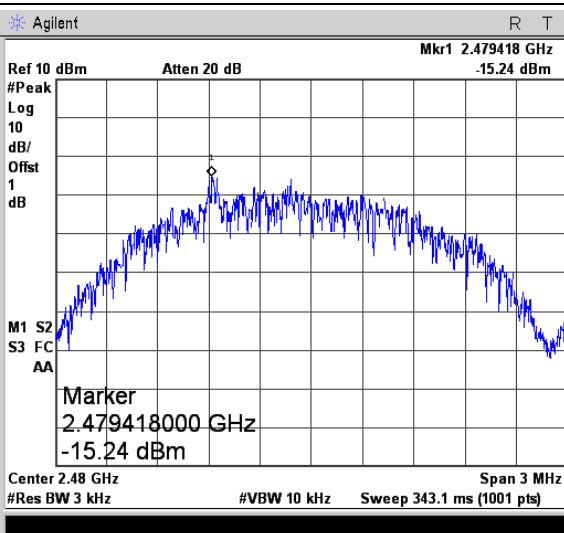
<p>BLE(2Mbps)-Low</p>	 <p>Agilent R T          Ref 10 dBm Atten 20 dB Mkr1 2.401433 GHz -16.3 dBm          #Peak          Log          10          dB/          Offst          1          dB          M1 S2          S3 FC          AA          Marker          2.401433000 GHz          -16.3 dBm          Center 2.402 GHz Span 3 MHz          #Res BW 3 kHz #VBW 10 kHz Sweep 343.1 ms (1001 pts)</p>
<p>BLE(2Mbps)-Middle</p>	 <p>Agilent R T          Ref 10 dBm Atten 20 dB Mkr1 2.439421 GHz -15.65 dBm          #Peak          Log          10          dB/          Offst          1          dB          M1 S2          S3 FC          AA          Marker          2.439421000 GHz          -15.65 dBm          Center 2.44 GHz Span 3 MHz          #Res BW 3 kHz #VBW 10 kHz Sweep 343.1 ms (1001 pts)</p>
<p>BLE(2Mbps)-High</p>	 <p>Agilent R T          Ref 10 dBm Atten 20 dB Mkr1 2.479418 GHz -15.24 dBm          #Peak          Log          10          dB/          Offst          1          dB          M1 S2          S3 FC          AA          Marker          2.479418000 GHz          -15.24 dBm          Center 2.48 GHz Span 3 MHz          #Res BW 3 kHz #VBW 10 kHz Sweep 343.1 ms (1001 pts)</p>

**APPENDIX B**

---

Test Mode	Test Channel	6 dB Bandwidth kHz	Limit kHz
BLE(1Mbps)	Low	713.738	$\geq 500$
	Middle	704.079	$\geq 500$
	High	689.412	$\geq 500$
BLE(2Mbps)	Low	1160	$\geq 500$
	Middle	1160	$\geq 500$
	High	1175	$\geq 500$




<p>BLE(1Mbps)-Low</p>	<p>Agilent R T</p> <p>Ch Freq 2.402 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.402 GHz Span 3 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth 1.0492 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -73.913 kHz</p> <p>x dB Bandwidth 713.738 kHz</p> <p>Freq/Channel</p> <p>Center Freq 2.40200000 GHz</p> <p>Start Freq 2.40050000 GHz</p> <p>Stop Freq 2.40350000 GHz</p> <p>CF Step 300.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>BLE(1Mbps)-Middle</p>	<p>Agilent R T</p> <p>Ch Freq 2.44 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.44000000 GHz</p> <p>Ref 10 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.44 GHz Span 3 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth 1.0448 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -74.010 kHz</p> <p>x dB Bandwidth 704.079 kHz</p> <p>Freq/Channel</p> <p>Center Freq 2.44000000 GHz</p> <p>Start Freq 2.43850000 GHz</p> <p>Stop Freq 2.44150000 GHz</p> <p>CF Step 300.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>BLE(1Mbps)-High</p>	<p>Agilent R T</p> <p>Ch Freq 2.48 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.48000000 GHz</p> <p>Ref 10 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.48 GHz Span 3 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth 1.0459 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -76.757 kHz</p> <p>x dB Bandwidth 689.412 kHz</p> <p>Freq/Channel</p> <p>Center Freq 2.48000000 GHz</p> <p>Start Freq 2.47850000 GHz</p> <p>Stop Freq 2.48150000 GHz</p> <p>CF Step 300.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

<p>BLE(2Mbps)-Low</p>	<p>Agilent R T</p> <p>Ch Freq 2.402 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.40200000 GHz</p> <p>Ref 10 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 2.402 GHz Span 6 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 2.0385 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -62.379 kHz x dB Bandwidth 1.160 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.40200000 GHz</p> <p>Start Freq 2.39900000 GHz</p> <p>Stop Freq 2.40500000 GHz</p> <p>CF Step 600.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>BLE(2Mbps)-Middle</p>	<p>Agilent R T</p> <p>Ch Freq 2.44 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.44000000 GHz</p> <p>Ref 10 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 2.44 GHz Span 6 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 2.0493 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -62.777 kHz x dB Bandwidth 1.160 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.44000000 GHz</p> <p>Start Freq 2.43700000 GHz</p> <p>Stop Freq 2.44300000 GHz</p> <p>CF Step 600.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>BLE(2Mbps)-High</p>	<p>Agilent R T</p> <p>Ch Freq 2.48 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Span 6.000000000 MHz</p> <p>Ref 10 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 2.48 GHz Span 6 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 2.0459 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -65.103 kHz x dB Bandwidth 1.175 MHz</p> <p>Span</p> <p>Span 6.000000000 MHz</p> <p>Span Zoom</p> <p>Full Span</p> <p>Zero Span</p> <p>Last Span</p> <p>Zone ▶</p>




**APPENDIX C**

---

RF Output Power			
Test Mode	Test Channel	Reading dBm	Limit dBm
BLE(1Mbps)	Low	0.97	30.00
	Middle	0.973	30.00
	High	1.053	30.00
BLE(2Mbps)	Low	0.911	30.00
	Middle	1.01	30.00
	High	1.098	30.00
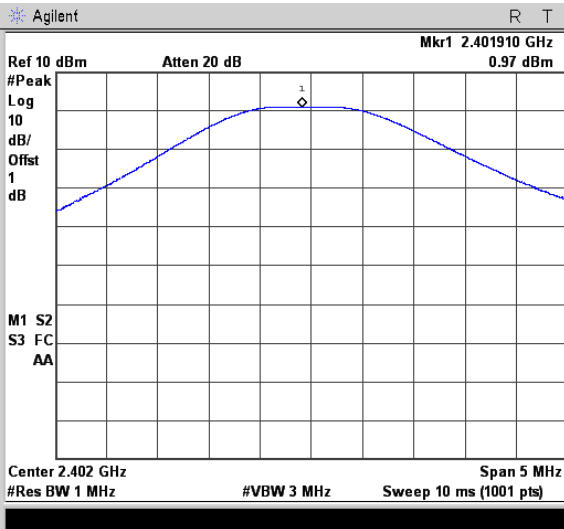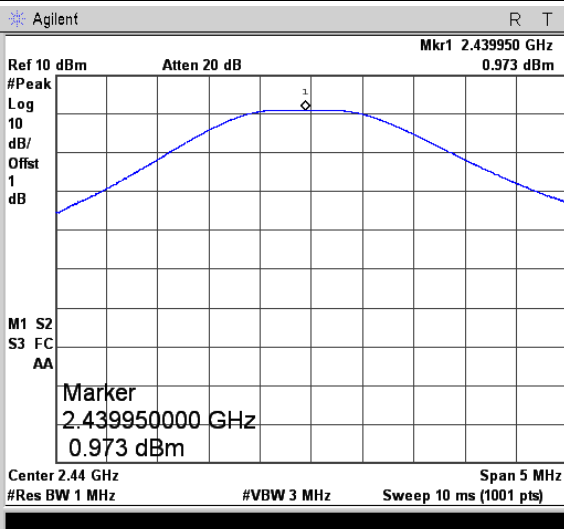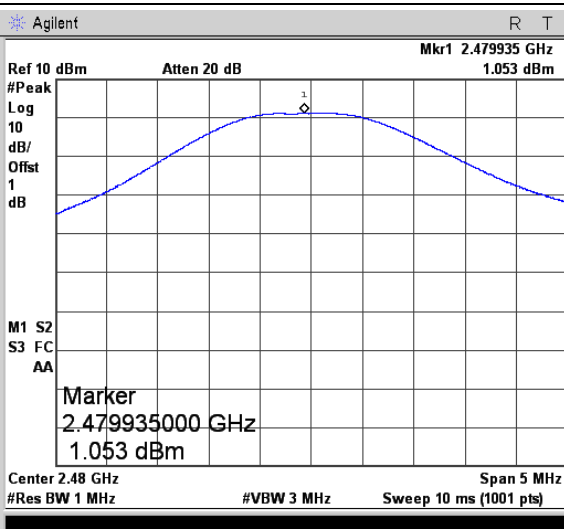
<p>BLE(1Mbps)-Low</p>	 <p>Agilent R T          Ref 10 dBm Atten 20 dB Mkr1 2.401910 GHz 0.97 dBm          #Peak Log 10 dB/Offst 1 dB          M1 S2 S3 FC AA          Center 2.402 GHz Span 5 MHz          #Res BW 1 MHz #VBW 3 MHz Sweep 10 ms (1001 pts)</p>
<p>BLE(1Mbps)-Middle</p>	 <p>Agilent R T          Ref 10 dBm Atten 20 dB Mkr1 2.439950 GHz 0.973 dBm          #Peak Log 10 dB/Offst 1 dB          M1 S2 S3 FC AA          Marker 2.439950000 GHz 0.973 dBm          Center 2.44 GHz Span 5 MHz          #Res BW 1 MHz #VBW 3 MHz Sweep 10 ms (1001 pts)</p>
<p>BLE(1Mbps)-High</p>	 <p>Agilent R T          Ref 10 dBm Atten 20 dB Mkr1 2.479935 GHz 1.053 dBm          #Peak Log 10 dB/Offst 1 dB          M1 S2 S3 FC AA          Marker 2.479935000 GHz 1.053 dBm          Center 2.48 GHz Span 5 MHz          #Res BW 1 MHz #VBW 3 MHz Sweep 10 ms (1001 pts)</p>

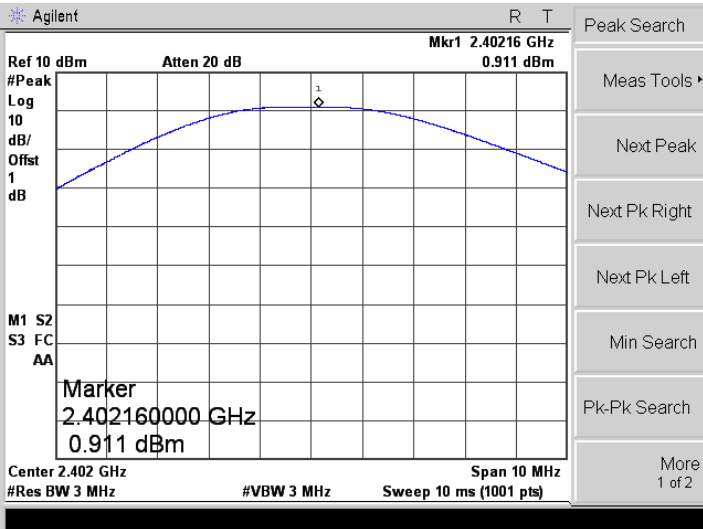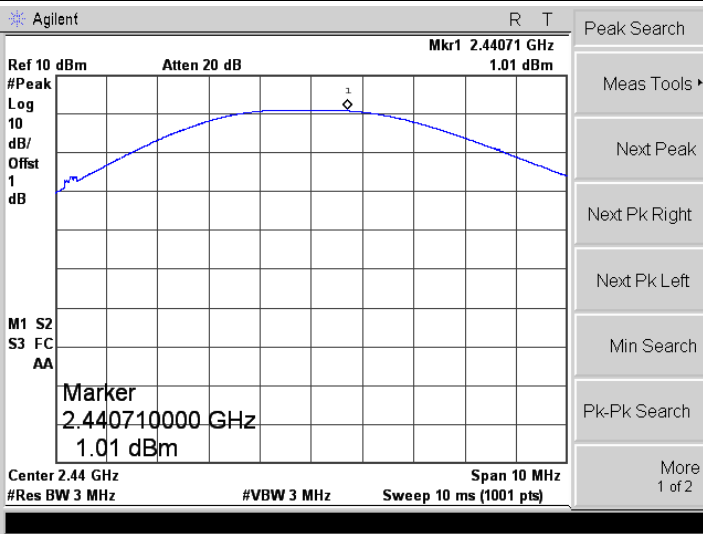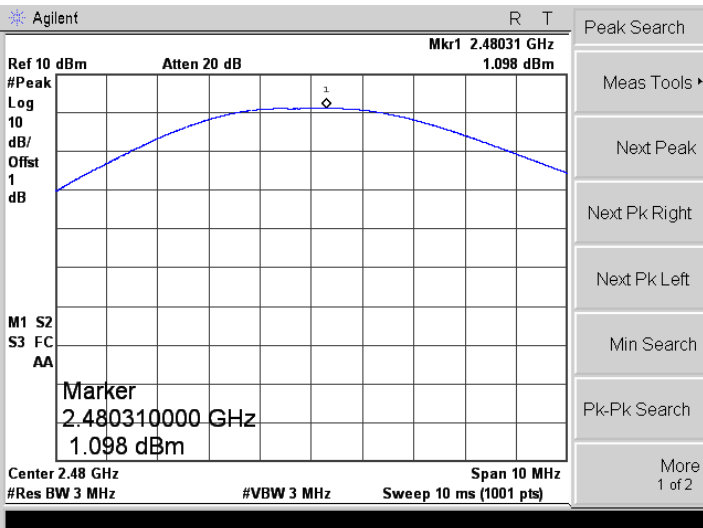


<p>BLE(2Mbps)-Low</p>	
<p>BLE(2Mbps)-Middle</p>	
<p>BLE(2Mbps)-High</p>	

## APPENDIX D



### Conducted Out of Band Emissions

<p>BLE(1Mbps)-Low</p>	<p>Agilent R T</p> <p>Ref 10 dBm Atten 20 dB Mkr1 2.401925 GHz 0.97 dBm</p> <p>#Peak Log 10 dB/Offst 1 dB DI -19.0 dBm</p> <p>Center 2.393 GHz Span 25 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>2.401925 GHz</td> <td>0.97 dBm</td> </tr> <tr> <td>2</td> <td>(1)</td> <td>Freq</td> <td>2.399975 GHz</td> <td>-43.98 dBm</td> </tr> </tbody> </table> <p>Display Line -19.03 dBm</p> <p>Display Full Screen</p> <p>Display Line -19.03 dBm On Off</p> <p>Limits</p> <p>Active Fctn Position Bottom</p> <p>Title</p> <p>Preferences</p>	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	2.401925 GHz	0.97 dBm	2	(1)	Freq	2.399975 GHz	-43.98 dBm
Marker	Trace	Type	X Axis	Amplitude												
1	(1)	Freq	2.401925 GHz	0.97 dBm												
2	(1)	Freq	2.399975 GHz	-43.98 dBm												
	<p>Agilent R T</p> <p>Ref 10 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/Offst 1 dB DI -19.0 dBm</p> <p>M1 S2 S3 FC AA</p> <p>Start 30 MHz Stop 26 GHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 2.691 s (1001 pts)</p> <p>Marker</p> <p>Select Marker 1 2 3 4</p> <p>Normal</p> <p>Delta</p> <p>Delta Pair (Tracking Ref) Ref Delta</p> <p>Span Pair Span Center</p> <p>Off</p> <p>More 1 of 2</p>															
<p>BLE(1Mbps)-Middle</p>	<p>Agilent R T</p> <p>Ref 10 dBm Atten 20 dB Mkr1 2.439928 GHz 0.948 dBm</p> <p>#Peak Log 10 dB/Offst 1 dB DI -19.1 dBm</p> <p>Center 2.44 GHz Span 12 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Display Line -19.05 dBm</p> <p>Display Full Screen</p> <p>Display Line -19.05 dBm On Off</p> <p>Limits</p> <p>Active Fctn Position Bottom</p> <p>Title</p> <p>Preferences</p>															

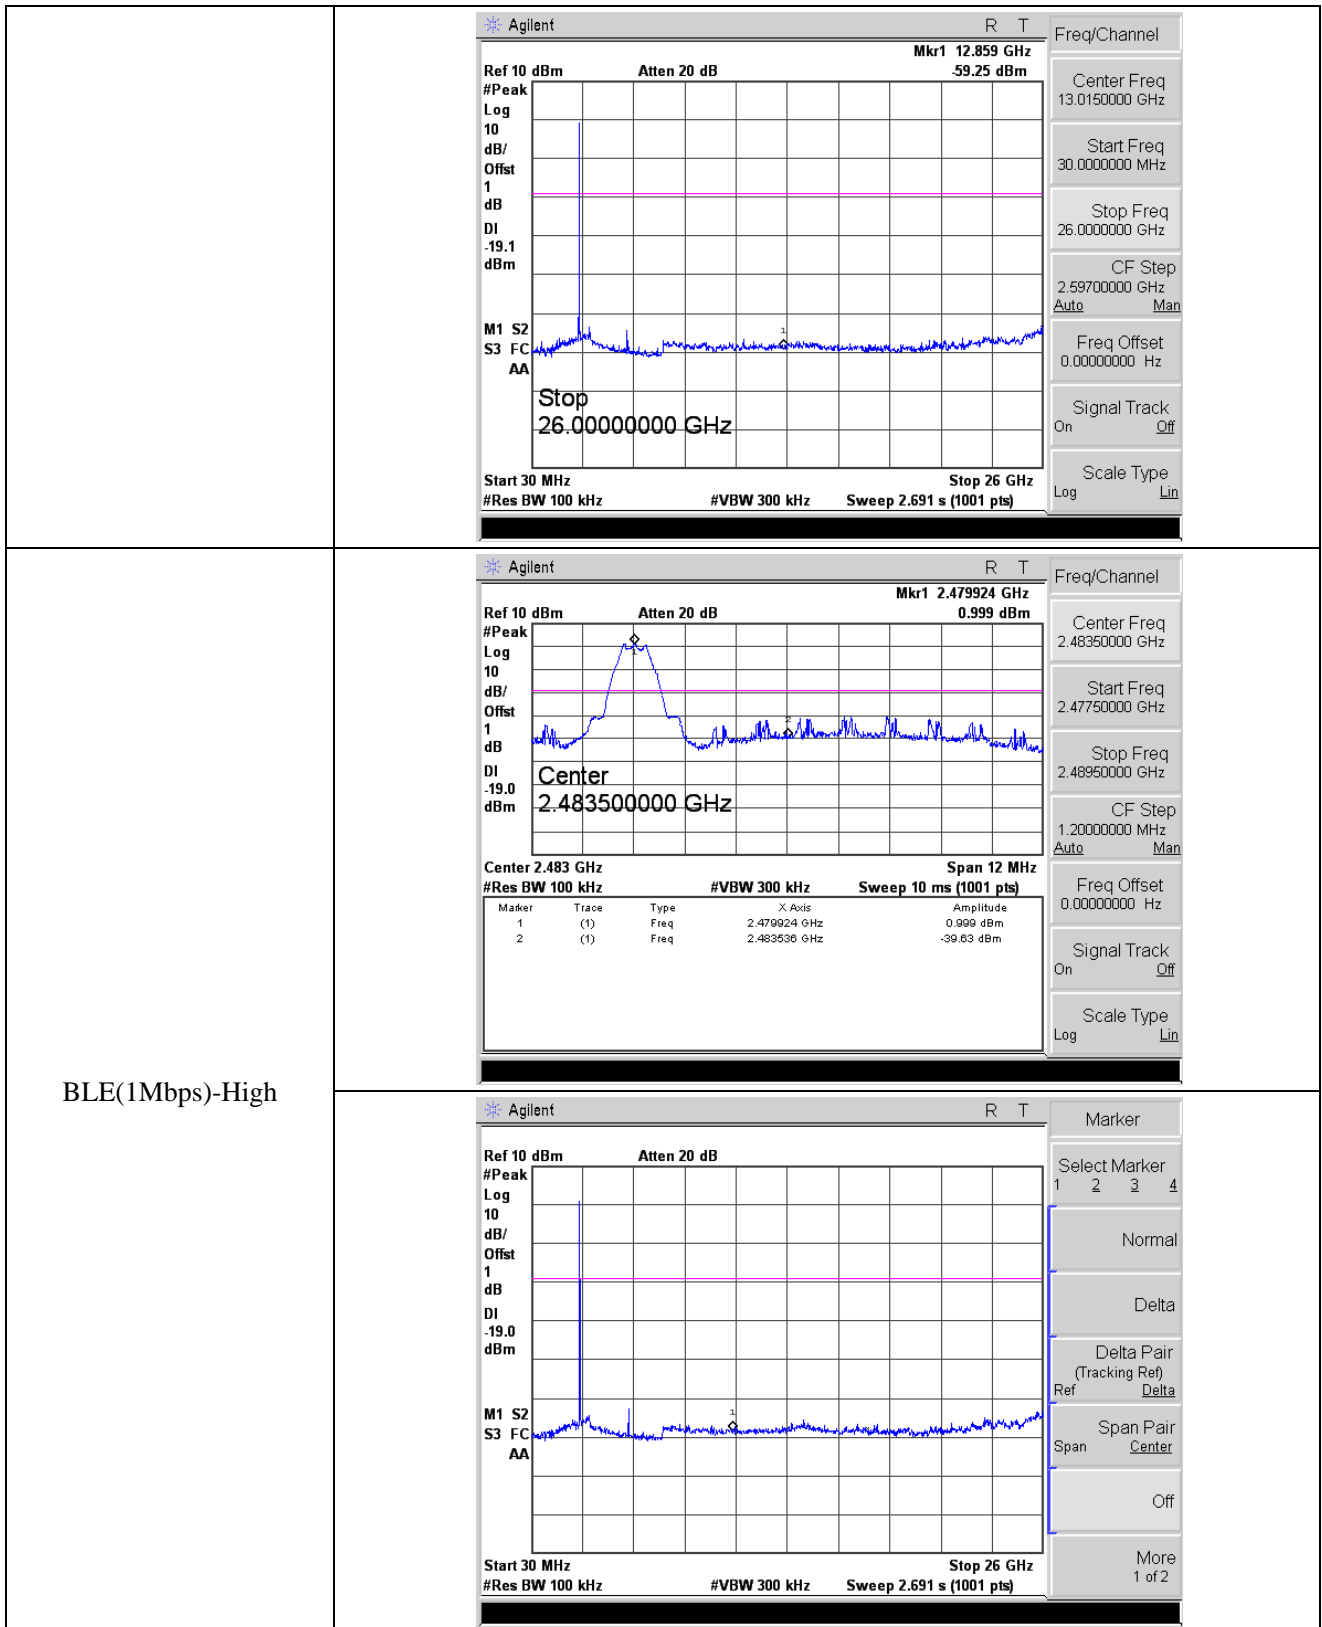


BLE(1Mbps)-High

BLE(2Mbps)-Low

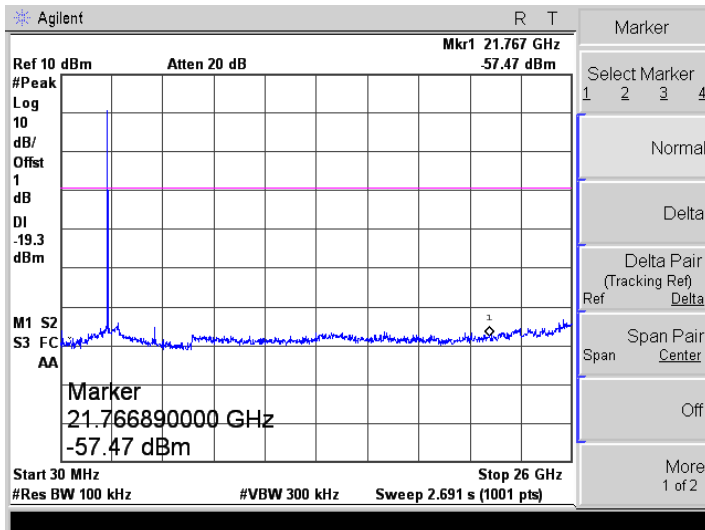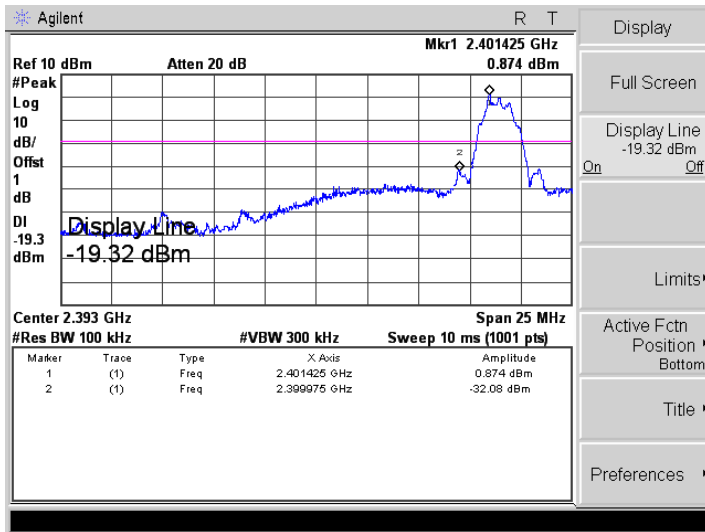

BLE(2Mbps)-Middle

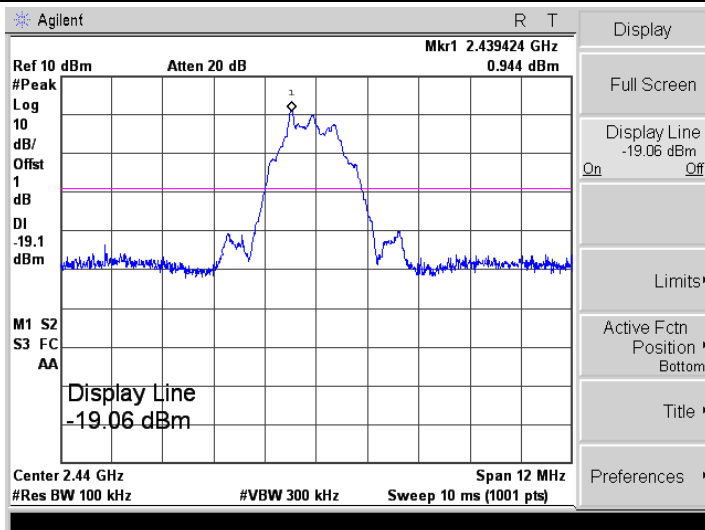

	<p>Agilent R T</p> <p>Ref 10 dBm Atten 20 dB Mkr1 11.768 GHz 58.29 dBm</p> <p>#Peak Log 10 dB/Offst 1 dB DI -19.1 dBm</p> <p>M1 S2 S3 FC AA</p> <p>Stop 26.00000000 GHz</p> <p>Start 30 MHz Stop 26 GHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 2.691 s (1001 pts)</p> <p>Trace/View: 1 2 3, Clear Write, Max Hold, Min Hold, View, Blank, More 1 of 2</p>															
<p>BLE(2Mbps)-High</p>	<p>Agilent R T</p> <p>Ref 10 dBm Atten 20 dB Mkr1 2.479420 GHz 1.055 dBm</p> <p>#Peak Log 10 dB/Offst 1 dB DI -19.0 dBm</p> <p>Display Line -18.97 dBm</p> <p>Center 2.483 GHz Span 12 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>2.479420 GHz</td> <td>1.055 dBm</td> </tr> <tr> <td>2</td> <td>(1)</td> <td>Freq</td> <td>2.483536 GHz</td> <td>-37.15 dBm</td> </tr> </tbody> </table> <p>Display: Display Line -18.97 dBm, On Off, Limits, Active Fcn Position Bottom, Title, Preferences</p>	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	2.479420 GHz	1.055 dBm	2	(1)	Freq	2.483536 GHz	-37.15 dBm
Marker	Trace	Type	X Axis	Amplitude												
1	(1)	Freq	2.479420 GHz	1.055 dBm												
2	(1)	Freq	2.483536 GHz	-37.15 dBm												
	<p>Agilent R T</p> <p>Ref 10 dBm Atten 20 dB Mkr1 11.768 GHz 58.29 dBm</p> <p>#Peak Log 10 dB/Offst 1 dB DI -19.0 dBm</p> <p>M1 S2 S3 FC AA</p> <p>Stop 26.00000000 GHz</p> <p>Start 30 MHz Stop 26 GHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 2.691 s (1001 pts)</p> <p>Marker: Select Marker 1 2 3 4, Normal, Delta, Delta Pair (Tracking Ref) Ref Delta, Span Pair Span Center, Off, More 1 of 2</p>															

## **APPENDIX PHOTOGRAPHS**

---

**Please refer to “ANNEX”**

**\*\*\*\*\* END OF REPORT \*\*\*\*\***