

## TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL





Report No.: AGC09264201202FE05

Page 42 of 82

## 11. RADIATED EMISSION


#### 11.1. MEASUREMENT PROCEDURE

- The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.




# 11.2. TEST SETUP


# Radiated Emission Test-Setup Frequency Below 30MHz

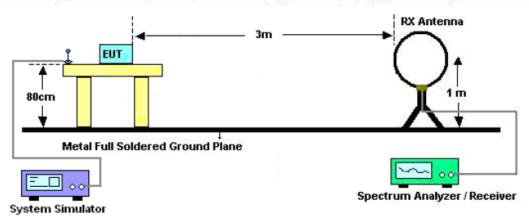

### RADIATED EMISSION TEST SETUP 30MHz-1000MHz

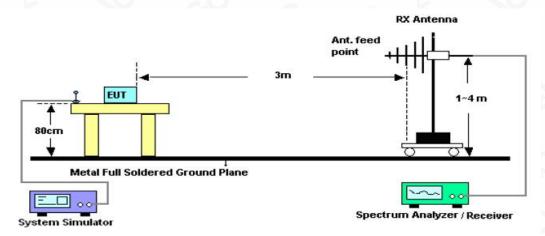

# RADIATED EMISSION TEST SETUP ABOVE 1000MHz

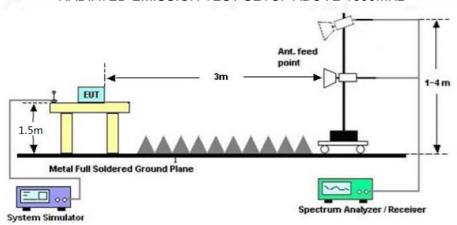

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the coefficient of stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Report No.: AGC09264201202FE05

Page 44 of 82

### 11.3. LIMITS AND MEASUREMENT RESULT

15.209(a) Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)		
0.009~0.490	2400/F(KHz)	300		
0.490~1.705	24000/F(KHz)	30		
1.705~30.0	30	30		
30~88	100	3		
88~216	150	3		
216~960	200	3		
Above 960	500	3		

Note: All modes were tested For restricted band radiated emission, the test records reported below are the worst result compared to other modes.

## 11.4. TEST RESULT


### **RADIATED EMISSION BELOW 30MHZ**

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.



# **RADIATED EMISSION BELOW 1GHZ**

EUT	Smart Large Display Radio Clock	Model Name	SAFW004S
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHZ	Antenna	Horizontal

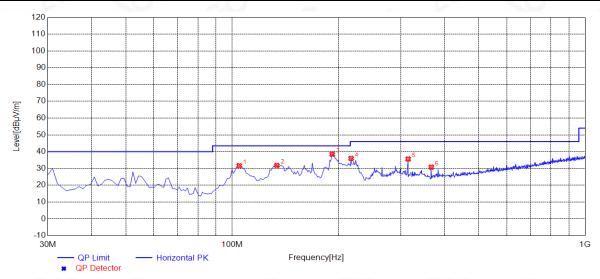

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	104.6900	31.66	11.86	43.50	11.84	200	4	Horizontal
2	133.7900	31.79	14.42	43.50	11.71	200	359	Horizontal
3	191.9900	38.48	12.43	43.50	5.02	200	359	Horizontal
4	217.2100	35.99	13.11	46.00	10.01	200	190	Horizontal
5	315.1800	35.63	16.48	46.00	10.37	100	339	Horizontal
6	366.5900	30.77	18.50	46.00	15.23	200	253	Horizontal

**RESULT: PASS** 


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Psychological Psycholo

/Inspection The test results

he test report.



EUT	Smart Large Display Radio Clock	Model Name	SAFW004S
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHZ	Antenna	Vertical

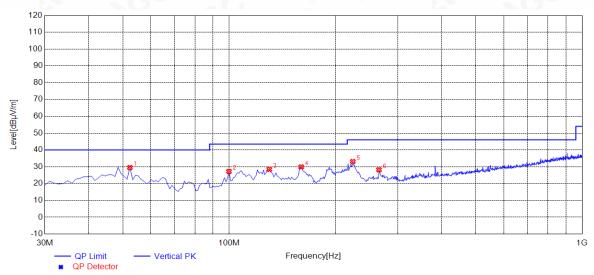


				100					
9	NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
	1	52.3100	29.48	11.49	40.00	10.52	100	292	Vertical
	2	99.8400	27.20	11.30	43.50	16.30	100	285	Vertical
	3	129.9100	28.42	14.14	43.50	15.08	100	178	Vertical
	4	159.9800	29.91	14.94	43.50	13.59	100	342	Vertical
	5	224.0000	33.10	13.59	46.00	12.90	100	70	Vertical
	6	265.7100	28.21	15.04	46.00	17.79	100	6	Vertical

## **RESULT: PASS**

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Limit-Level.

- 2. The "Factor" value can be calculated automatically by software of measurement system.
- 3. All test modes had been pre-tested. The 802.11b at low channel is the worst case and recorded in the report.






**RADIATED EMISSION ABOVE 1GHZ** 

EUT	Smart Large Display Radio Clock	Model Name	SAFW004S
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHZ	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4824.000	56.37	0.08	56.45	74	-17.55	peak
4824.000	46.25	0.08	46.33	54	-7.67	AVG
7236.000	50.16	2.21	52.37	74	-21.63	peak
7236.000	40.95	2.21	43.16	54	-10.84	AVG
		8				
			(0)			
emark:					@	
actor = Ante	enna Factor + Ca	ble Loss -	Pre-amplifier.			®

EUT	Smart Large Display Radio Clock	Model Name	SAFW004S
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHZ	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4824.000	56.77	0.08	56.85	74	-17.15	peak
4824.000	47.35	0.08	47.43	54	-6.57	aVG
7236.000	51.58	2.21	53.79	74	-20.21	peak
7236.000	41.04	2.21	43.25	54	-10.75	AVG
8			- G	8		
Remark:		3				
actor = Ante	enna Factor + Ca	ble Loss -	Pre-amplifier.			



g/Inspection The test results




EUT	Smart Large Display Radio Clock	Model Name	SAFW004S
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2437MHZ	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4874.000	56.38	0.14	56.52	74	-17.48	peak
4874.000	46.23	0.14	46.37	54	-7.63	AVG
7311.000	50.45	2.36	52.81	74	-21.19	peak
7311.000	40.37	2.36	42.73	54	-11.27	AVG
,0				-60		
Remark:			8			
actor = Ante	enna Factor + C	able Loss –	Pre-amplifier.	@		

EUT	Smart Large Display Radio Clock	Model Name	SAFW004S
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2437MHZ	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4874.000	55.39	0.14	55.53	74	-18.47	peak
4874.000	46.13	0.14	46.27	54	-7.73	AVG
7311.000	50.28	2.36	52.64	74	-21.36	peak
7311.000	40.35	2.36	42.71	54	-11.29	AVG
<u>®</u>		30	-0	0		
emark:	0				>	®
actor = Ante	enna Factor + Ca	hle Loss -	Pre-amplifier			





EUT	Smart Large Display Radio Clock	Model Name	SAFW004S
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2462MHZ	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4924.000	57.35	0.22	57.57	74	-16.43	peak
4924.000	46.97	0.22	47.19	54	-6.81	AVG
7386.000	52.39	2.64	55.03	74	-18.97	peak
7386.000	41.43	2.64	44.07	54	-9.93	AVG
			8		10	1.00
Remark:			7.0		(0)	
actor = Ante	enna Factor + C	able Loss – I	Pre-amplifier.			®

EUT	Smart Large Display Radio Clock	Model Name	SAFW004S
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2462MHZ	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4924.000	57.95	0.22	58.17	74	-15.83	peak
4924.000	45.19	0.22	45.41	54	-8.59	AVG
7386.000	52.37	2.64	55.01	74	-18.99	peak
7386.000	41.28	2.64	43.92	54	-10.08	AVG
<u> </u>					®	
					G	®
Remark:	100	8				
actor = Ante	enna Factor + Ca	ble Loss – P	re-amplifier.	®		

## **RESULT: PASS**

#### Note:

The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

All test modes had been pre-tested. The 802.11b mode is the worst case and recorded in the report.



Report No.: AGC09264201202FE05

Page 50 of 82

## 12. BAND EDGE EMISSION

### 12.1. MEASUREMENT PROCEDURE

Radiated restricted band edge measurements

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting

## 12.2. TEST SET-UP

same as 11.2

#### Note:


- 1. Factor=Antenna Factor + Cable loss Amplifier gain. Field Strength=Factor + Reading level
- 2. The factor had been edited in the "Input Correction" of the Spectrum Analyzer. So the Amplitude of test plots is equal to Reading level plus the Factor in dB. Use the A dB( $\mu$ V) to represent the Amplitude. Use the F dB( $\mu$ V /m) to represent the Field Strength. So A=F.



### 12.3. TEST RESULT

EUT	Smart Large Display Radio Clock	Model Name	SAFW004S
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2412MHZ	Antenna	Horizontal

PK

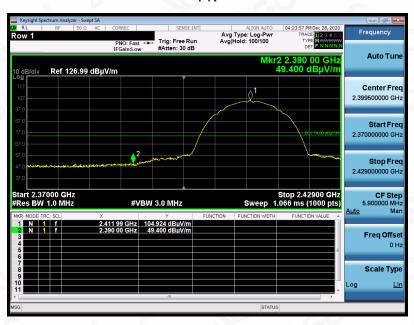


ΑV



### **RESULT: PASS**



EUT	Smart Large Display Radio Clock	Model Name	SAFW004S
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2412MHZ	Antenna	Vertical

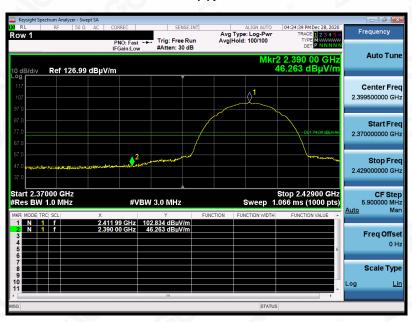

### AV



## **RESULT: PASS**



EUT	Smart Large Display Radio Clock	Model Name	SAFW004S
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2462MHZ	Antenna	Horizontal



### AV




## **RESULT: PASS**


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the content of the report is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



EUT	Smart Large Display Radio Clock	Model Name	SAFW004S
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2462MHZ	Antenna	Vertical

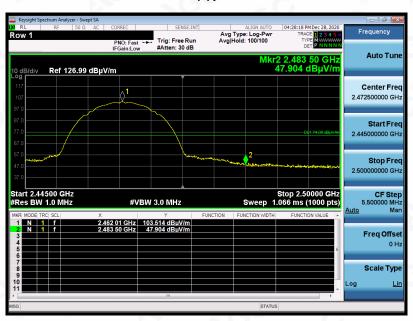

## ΑV

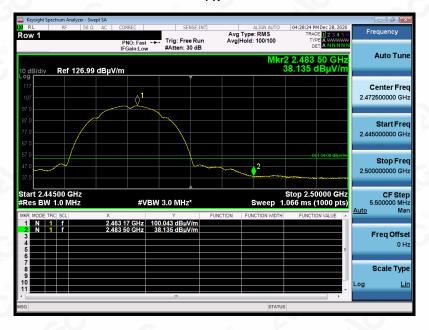

## **RESULT: PASS**


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated restriction. Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



EUT	Smart Large Display Radio Clock	Model Name	SAFW004S
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2412MHZ	Antenna	Horizontal



ΑV

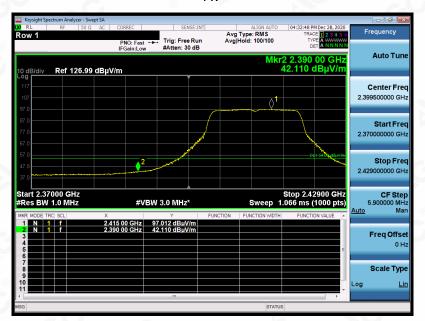


### **RESULT: PASS**



EUT	Smart Large Display Radio Clock	Model Name	SAFW004S
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2412MHZ	Antenna	Vertical



ΑV

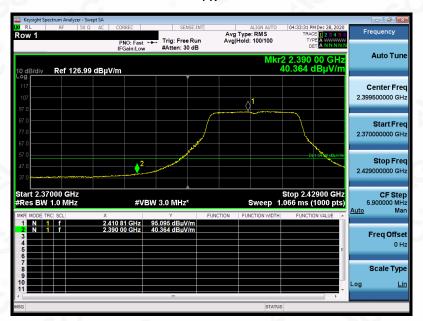

### **RESULT: PASS**



EUT	Smart Large Display Radio Clock	Model Name	SAFW004S
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2462MHZ	Antenna	Horizontal



## ΑV




### **RESULT: PASS**



EUT	Smart Large Display Radio Clock	Model Name	SAFW004S		
Temperature	25°C	Relative Humidity	60%		
Pressure	960hPa	Test Voltage	Normal Voltage		
Test Mode	802.11g with data rate 6 2462MHZ	Antenna	Vertical		



## ΑV

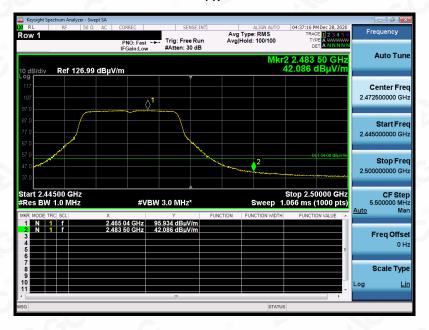

### **RESULT: PASS**


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Festivo/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC he test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



EUT	Smart Large Display Radio Clock	Model Name	SAFW004S		
Temperature	25°C	Relative Humidity	60%		
Pressure	960hPa	Test Voltage	Normal Voltage		
Test Mode	802.11n 20 with data rate 6.5 2412MHZ	Antenna	Horizontal		



ΑV

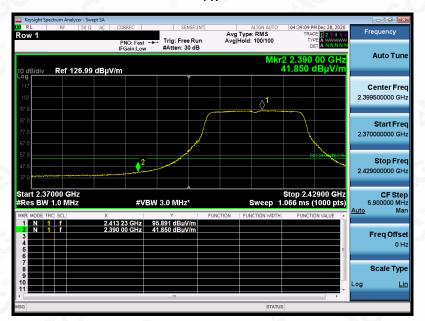

### **RESULT: PASS**


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written portionization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



EUT	Smart Large Display Radio Clock	Model Name	SAFW004S			
Temperature	25°C	Relative Humidity	60%			
Pressure	960hPa	Test Voltage	Normal Voltage			
Test Mode	802.11n 20 with data rate 6.5 2412MHZ	Antenna	Vertical			



## ΑV

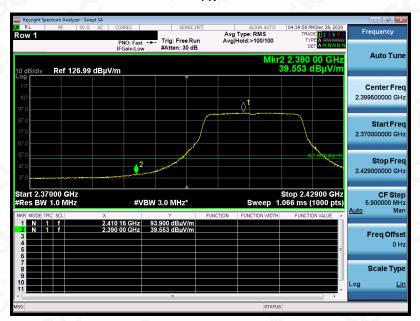


### **RESULT: PASS**



EUT	Smart Large Display Radio Clock	Model Name	SAFW004S		
Temperature	25°C	Relative Humidity	60%		
Pressure	960hPa	Test Voltage	Normal Voltage		
Test Mode	802.11n 20 with data rate 6.5 2462MHZ	Antenna	Horizontal		



## ΑV

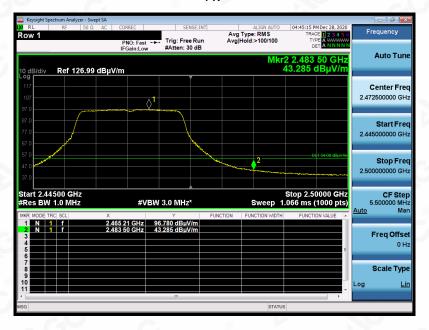

# **RESULT: PASS**


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated restriction. Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



EUT	Smart Large Display Radio Clock	Model Name	SAFW004S		
Temperature	25°C	Relative Humidity	60%		
Pressure	960hPa	Test Voltage	Normal Voltage		
Test Mode	802.11n 20 with data rate 6.5 2462MHZ	Antenna	Vertical		



ΑV

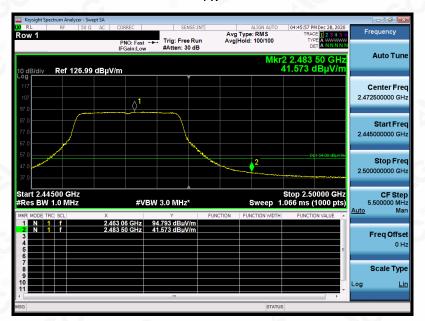

### **RESULT: PASS**



# 13. FCC LINE CONDUCTED EMISSION TEST


### 13.1. LIMITS OF LINE CONDUCTED EMISSION TEST


F	Maximum RF Line Voltage						
Frequency	Q.P.( dBuV)	Average( dBuV)					
150kHz~500kHz	66-56	56-46					
500kHz~5MHz	56	46					
5MHz~30MHz	60	50					

### Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

# 13.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

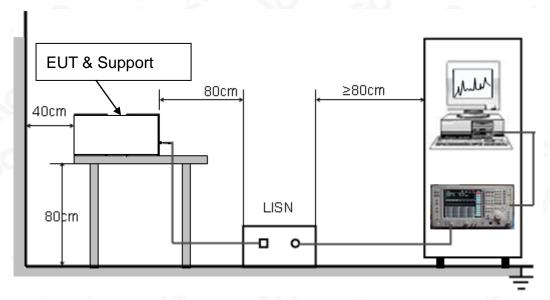





#### 13.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipments received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from PC which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.


### 13.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.



# 13.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

## Line Conducted Emission Test Line 1-L

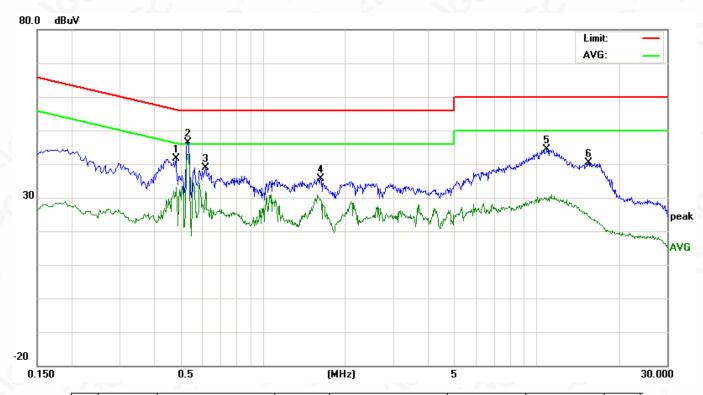


No. Freq. (MHz)	_	ı	ading_L (dBuV)		Correct Factor	Me	easuren (dBuV)		Limit (dBuV)		Margin (dB)		P/F	
	(MHZ)	Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG		
	1	0.4820	27.81	N/A	19.38	13.70	41.51	N/A	33.08	56.30	46.30	-14.79	-13.22	Р
	2	0.5340	32.62	30.78	28.43	13.77	46.39	44.55	42.20	56.00	46.00	-11.45	-3.80	Р
	3	0.6180	25.13	N/A	17.93	13.82	38.95	N/A	31.75	56.00	46.00	-17.05	-14.25	Р
	4	1.6300	22.01	N/A	15.65	13.73	35.74	N/A	29.38	56.00	46.00	-20.26	-16.62	Р
	5	10.9420	31.40	N/A	16.88	12.91	44.31	N/A	29.79	60.00	50.00	-15.69	-20.21	Р
	6	15.4860	27.21	N/A	11.12	13.24	40.45	N/A	24.36	60.00	50.00	-19.55	-25.64	Р

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated restriction. Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



## Line Conducted Emission Test Line 2-N

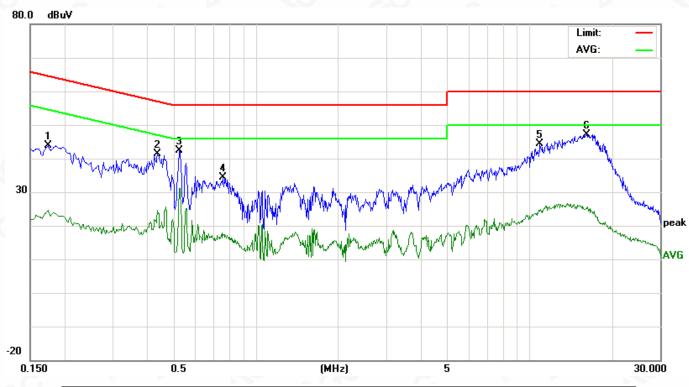

No.	Freq.	req. (dBuV) Fac		Correct Factor				Limit (dBuV)		Margin (dB)		P/F	
	(MHz)	Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG	
1	0.1740	30.98	N/A	11.81	12.82	43.80	N/A	24.63	64.76	54.76	-20.96	-30.13	Р
2	0.4380	27.73	N/A	11.06	13.60	41.33	N/A	24.66	57.10	47.10	-15.77	-22.44	Р
3	0.5260	28.55	N/A	17.40	13.76	42.31	N/A	31.16	56.00	46.00	-13.69	-14.84	Р
4	0.7620	20.46	N/A	3.62	13.80	34.26	N/A	17.42	56.00	46.00	-21.74	-28.58	Р
5	10.9460	31.48	N/A	11.56	12.91	44.39	N/A	24.47	60.00	50.00	-15.61	-25.53	Р
6	16.1420	33.84	N/A	11.76	13.25	47.09	N/A	25.01	60.00	50.00	-12.91	-24.99	Р

### **RESULT: PASS**

Note: All the test modes had been tested. The 802.11b at low channel is the worst case and recorded in the report



# **APPENDIX A: PHOTOGRAPHS OF TEST SETUP**


FCC RADIATED EMISSION TEST SETUP BELOW 1GHZ



FCC RADIATED EMISSION TEST SETUP ABOVE 1GHZ



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuence of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





# CONDUCTED EMISSION TEST SETUP





# **APPENDIX B: PHOTOGRAPHS OF EUT**

ALL VIEW OF EUT



TOP VIEW OF EUT



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated restriction. Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written appropriation of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



# **BOTTOM VIEW OF EUT**



FRONT VIEW OF EUT



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated resting/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



## **BACK VIEW OF EUT**



LEFT VIEW OF EUT



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated resting/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.