



TEST REPORT

| | | |
|--|--|---|
| <p>KCTL Inc. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr</p> | <p>Report No.: KR19-SRF0142-B Page (1) of (11)</p> |  |
|--|--|---|

1. Client

- Name : HOIMYUNG ICT Corporation
- Address : 1203, 8th Daeryungtechnotown, 96, Gamasan-ro, Geumcheon-gu, Seoul, Republic of Korea
- Date of Receipt : 2019-06-03

2. Use of Report : -

3. Name of Product and Model : Telematics mangement Terminal / DTM-02W

4. Manufacturer and Country of Origin : HOIMYUNG ICT Corporation / Korea



5. FCC ID : 2ARPKDTM-02W

6. IC Certification : 24504-DTM02W

7. Date of Test : 2019-06-25 to 2019-08-22

8. Test Standards : 47 CFR Part 1.1310
 RSS-102 Issue 5 Mar. 2015

9. Test Results : Refer to the test result in the test report

| | | |
|-------------|--|---|
| Affirmation | Tested by | Technical Manager |
| | Name : Heesu Ahn  (Signature) | Name : Jaehyong Lee  (Signature) |

2019-10-04

KCTL Inc.

As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by KCTL Inc.

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR19-SRF0142-B

Page (2) of (11)

**Report revision history**

| Date | Revision | Page No |
|------------|-------------------------------|---------|
| 2019-09-18 | Initial report | - |
| 2019-09-24 | Updated measurement equipment | 11 |
| 2019-10-04 | Added simultaneous data | 10 |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |

This report shall not be reproduced except in full, without the written approval of KCTL Inc. This document may be altered or revised by KCTL Inc. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KCTL Inc. will constitute fraud and shall nullify the document. This test report is a General report that does not use the KOLAS accreditation mark and is not related to KOLAS accreditation.



CONTENTS

| | | |
|------|-----------------------------------|----|
| 1. | General information | 4 |
| 2. | Device information | 4 |
| 2.1. | Frequency/channel operations..... | 5 |
| 3. | Measurement uncertainty | 5 |
| 4. | RF Exposure..... | 6 |
| 4.1. | Test results..... | 9 |
| 5. | Measurement Equipment..... | 11 |



KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR19-SRF0142-B

Page (4) of (11)



1. General information

Client : HOIMYUNG ICT Corporation
Address : 1203, 8th Daeryungtechnotown, 96, Gamasan-ro, Geumcheon-gu, Seoul, Republic of Korea
Manufacturer : HOIMYUNG ICT Corporation
Address : 1203, 8th Daeryungtechnotown, 96, Gamasan-ro, Geumcheon-gu, Seoul, Republic of Korea
Laboratory : KCTL Inc.
Address : 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea
Accreditations : FCC Site Designation No: KR0040, FCC Site Registration No: 687132
VCCI Registration No. : R-3327, G-198, C-3706, T-1849
Industry Canada Registration No. : 8035A
KOLAS No.: KT231

2. Device information

Equipment under test : Telematics mangement Terminal
Model : DTM-02W
Frequency range : Bluetooth Low Energy_2 402 MHz ~ 2 480 MHz
802.11b/g/n HT20_2 412 MHz ~ 2 462 MHz
Modulation technique : Bluetooth Low Energy_GFSK
802.11b/g/n HT20_DSSS, OFDM
Number of channels : Bluetooth Low Energy _40 ch
802.11b/g/n HT20_11 ch
Power source : DC 12 V, DC 24 V
Antenna specification : Bluetooth Low Energy _Chip Antenna
WIFI_PCB Antenna
Antenna gain : 3.50 dBi (Bluetooth Low Energy)
3.29 dBi (WIFI)
Software version : Ver1.0.1
Hardware version : LIGHTTMS_WIFI_R1.0
Operation temperature : -30 °C ~ 70 °C

2.1. Frequency/channel operations

This device contains the following capabilities:

Bluetooth Low Energy, 802.11b/g/n HT20

| Ch. | Frequency (MHz) |
|-----|-----------------|
| 00 | 2 402 |
| ⋮ | ⋮ |
| 19 | 2 440 |
| ⋮ | ⋮ |
| 39 | 2 480 |

Table 2.1.1. Bluetooth Low Energy

| Ch. | Frequency (MHz) |
|-----|-----------------|
| 01 | 2 412 |
| ⋮ | ⋮ |
| 06 | 2 437 |
| ⋮ | ⋮ |
| 11 | 2 462 |

Table 2.1.2. 802.11b/g/n HT20 mode

3. Measurement uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and thus, can be compared directly to specified limits to determine compliance.

| Parameter | Expanded uncertainty (\pm) |
|--------------------|--------------------------------|
| Conducted RF power | 1.76 dB |

4. RF Exposure

FCC

Regulation

This document is prepared to show compliance with the RF Exposure requirements as required in §1.1310 of the FCC rules and Regulations.

The limit for Maximum Permissible Exposure (MPE), specified in FCC §1.1310, is listed in Table 1-1. According to FCC §1.1310: the criteria listed in the following table shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b).

Table 1 – Limits for Maximum Permissible Exposure (MPE)

| Frequency Range (MHz) | Electric Field Strength [V/m] | Magnetic Field Strength [A/m] | Power Density [mW/cm ²] | Averaging Time [minute] |
|---|-------------------------------------|-------------------------------------|--|-------------------------------|
| (A) Limits for Occupational / Controlled Exposure | | | | |
| 0.3 ~ 3.0 | 614 | 1.63 | *100 | 6 |
| 3.0 ~ 30 | 1842/f | 4.89/f | *900/f ² | 6 |
| 30 ~ 300 | 61.4 | 0.163 | 1.0 | 6 |
| 300 ~ 1 500 | / | / | f/300 | 6 |
| 1 500 ~ 15 000 | / | / | 5 | 6 |
| (B) Limits for General Population / Uncontrolled Exposure | | | | |
| 0.3 ~ 1.34 | 614 | 1.63 | *100 | 30 |
| 1.34 ~ 30 | 824/f | 2.19/f | *180/f ² | 30 |
| 30 ~ 300 | 27.5 | 0.073 | 0.2 | 30 |
| 300 ~ 1 500 | / | / | f/1 500 | 30 |
| 1 500 ~ 15 000 | / | / | 1.0 | 30 |

f=frequency in MHz, *=*plane-wave equivalent power density*

IC

RF Field Strength Limits for Devices Used by the General Public (Uncontrolled Environment)

According to RSS-102 Issue 5, Paragraph "4. Exposure Limits", Industry of Canada has adopted the RF field strength limits established in Health Canada's RF exposure guideline, Safety code 6:

| Frequency Range (MHz) | Electric Field (V/m rms) | Magnetic Field (A/m rms) | Power Density (W/m ²) | Reference Period (minutes) |
|------------------------|--|---|--|---------------------------------|
| 0.003-10 ²¹ | 83 | 90 | - | Instantaneous* |
| 0.1-10 | - | 0.73/ <i>f</i> | - | 6** |
| 1.1-10 | 87/ <i>f</i> ^{0.5} | - | - | 6** |
| 10-20 | 27.46 | 0.0728 | 2 | 6 |
| 20-48 | 58.07/ <i>f</i> ^{0.25} | 0.1540/ <i>f</i> ^{0.25} | 8.944/ <i>f</i> ^{0.5} | 6 |
| 48-300 | 22.06 | 0.05852 | 1.291 | 6 |
| <u>300-6000</u> | <u>3.142 <i>f</i>^{0.3417}</u> | <u>0.008335 <i>f</i>^{0.3417}</u> | <u>0.02619 <i>f</i>^{0.6834}</u> | <u>6</u> |
| 6000-15000 | 61.4 | 0.163 | 10 | 6 |
| 15000-150000 | 61.4 | 0.163 | 10 | 616000/ <i>f</i> ^{1.2} |
| 150000-300000 | 0.158 <i>f</i> ^{0.5} | 4.21 x 10 ⁻⁴ <i>f</i> ^{0.5} | 6.67 x 10 ⁻⁵ <i>f</i> | 616000/ <i>f</i> ^{1.2} |


Note: *f* is frequency in MHz.
 *Based on nerve stimulation (NS).
 ** Based on specific absorption rate (SAR).

Exemption Limits for Routine Evaluation – RF Exposure Evaluation

According to RSS-102 Issue 5 section 2.5.2, RF exposure evaluation is required if the separation distance between the user and/or bystander and the device's radiating element is greater than 20 cm, except when the device operates as follows:

- Below 20 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 1W (adjusted for tune-up tolerance);
- At or above 20 MHz and below 48 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than $4.49/f^{0.5}$ W (adjusted for tune-up tolerance), where f is in MHz;
- At or above 48 MHz and below 300 MHz and the source-bands, time-averaged maximum e.i.r.p. of the device is equal to or less than 0.6 W (adjusted for tune-up tolerance);
- At or above 300 MHz and below 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than $1.31 \times 10^{-2} f^{0.6834}$ W (adjusted for tune-up tolerance), where f is in MHz;
- At or above 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 5 W (adjusted for tune-up tolerance.)

In these cases, the information contained in the RF exposure technical brief may be limited to information that demonstrates how the e.i.r.p. was derived.

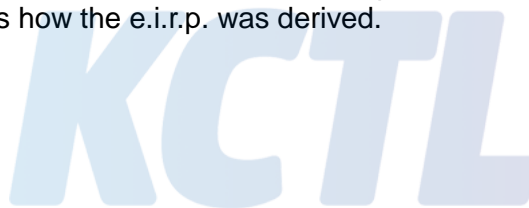

4.1. Test results

FCC

MPE (Maximum Permissible Exposure) Prediction

Predication of MPE limit at a given distance: Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2 \quad (\Rightarrow R = \sqrt{PG/4\pi S})$$

S = power density [mW/cm²]

P = Power input to antenna [mW]

G = Power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna [cm]

IC

RF Exposure evaluation

At or above 300 MHz and below 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than $1.31 \times 10^{-2} f^{0.6834}$ W (adjusted for tune-up tolerance), where f is in MHz;

RF Exposure Compliance Issue

The information should be included in the user's manual:

This appliance and its antenna must not be co-located or operation is conjunction with any other antenna or transmitter. A minimum separation distance of 20 cm must be maintained between the antenna and the person for this appliance to satisfy the RF exposure requirements.

Calculation Result of RF exposure (FCC)

Maximum tune-up tolerance

| Mode | Frequency [MHz] | Max Tune-up Power [dBm] | Max Tune-up Power [mW] | Ant Gain [dBi] | Ant Gain [mW] | Power density at 20 cm [mW/cm ²] | Limit [mW/cm ²] |
|----------------|-----------------|-------------------------|------------------------|----------------|---------------|--|-----------------------------|
| BLE / 1 Mbps | 2 402 | 5.00 | 3.16 | 3.50 | 2.24 | 0.001 41 | 1.000 00 |
| WiFi / 802.11b | 2 462 | 23.00 | 199.53 | 3.29 | 2.13 | 0.084 67 | 1.000 00 |

Note.

- The power density P_d (5th column) at a distance of 20 cm calculated from the friis transmission Formula is far below the limit of 1 mW/cm².

Calculation Results of Simultaneous Transmission(FCC)

Base on the test results, both of results were summed. And the final result is lower than FCC limit (1 mW/cm²).

$$\Sigma \text{ of Maximum tune up power(Bluetooth LE + WiFi 802.11b)} = 0.001 41 \text{ mW/cm}^2 + 0.084 67 \text{ mW/cm}^2 = 0.086 08 \text{ mW/cm}^2.$$

Calculation Results of RF exposure (IC)

Maximum tune-up tolerance

| Mode | Frequency [MHz] | Max Tune-up Power [dBm] | Ant Gain [dBi] | E.I.R.P | | Limit [W] |
|----------------|-----------------|-------------------------|----------------|---------|---------|-----------|
| | | | | [dBm] | [W] | |
| BLE / 1 Mbps | 2 402 | 5.00 | 3.50 | 8.50 | 0.003 1 | 2.68 |
| WiFi / 802.11b | 2 462 | 23.00 | 3.29 | 26.29 | 0.199 5 | 2.72 |

Calculation Results of Simultaneous Transmission(IC)

Base on the test results, both of results were summed. And the final result is lower than IC limit (2.68 W).

$$\Sigma \text{ of Maximum tune up power(Bluetooth LE + WiFi 802.11b)} = 0.003 1 \text{ W} + 0.199 5 \text{ W} = 0.202 6 \text{ W}.$$

5. Measurement Equipment

| Equipment Name | Manufacturer | Model No. | Serial No. | Cal. Date | Next Cal. Date |
|-----------------------|--------------|---|------------|-----------|----------------|
| Wideband Power Sensor | R&S | NRP-Z81 | 102398 | 19.01.25 | 20.01.25 |
| ATTENUATOR | R&S | DNF Dämpfungsglied 10 dB in N-50 Ohm | 31212 | 19.05.13 | 20.05.13 |

End of test report

