



FCC TEST REPORT

FCC ID: 2ARQ3-MTA42328

On Behalf of

By TechDesign SL

Door control system

Model No.: MTA 42328, MTA 42272

Prepared for : By TechDesign SL
Address : Calle Tomas Edison 5, Arganda del Rey, Madrid, Spain

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
Shenzhen, Guangdong, China

Report Number : T1881562 02
Date of Receipt : September 25, 2018
Date of Test : September 25, 2018 – November 13, 2018
Date of Report : November 13, 2018
Version Number : REV0

TABLE OF CONTENTS

Description	Page
1. Summary of Standards And Results-----	6
1.1. Description of Standards and Results -----	6
2. General Information -----	7
2.1. Description of Device (EUT)-----	7
2.2. Accessories of Device (EUT) -----	8
2.3. Tested Supporting System Details -----	8
2.4. Block Diagram of connection between EUT and simulators -----	8
2.5. Test Mode Description -----	8
2.6. Test Conditions -----	8
2.7. Additional instructions -----	9
2.8. Test Facility -----	10
2.9. Measurement Uncertainty -----	10
2.10. Test Equipment List -----	11
3. Spurious Emission-----	12
3.1. Test Limits -----	12
3.2. Test Procedure -----	12
3.3. Test Setup -----	13
3.4. Test Results -----	14
4. Power Line Conducted Emission-----	23
4.1. Test Limits -----	23
4.2. Test Procedure -----	23
4.3. Test Setup -----	23
4.4. Test Results -----	24
5. Conducted Maximum Output Power -----	26
5.1. Test limits -----	26
5.2. Test Procedure -----	26
5.3. Test Setup -----	26
5.4. Test Results -----	26
6. Peak Power Spectral Density-----	27
6.1. Test limits -----	27
6.2. Test Procedure -----	27
6.3. Test Setup -----	27
6.4. Test Results -----	27
7. Bandwidth-----	29
7.1. Test limits -----	29
7.2. Test Procedure -----	29
7.3. Test Setup -----	29
7.4. Test Results -----	29
8. Band Edge Check-----	31
8.1. Test limits -----	31
8.2. Test Procedure -----	31
8.3. Test Results -----	31
9. Antenna Requirement -----	37
9.1. Standard Requirement -----	37
9.2. Antenna Connected Construction-----	37

9.3. Results -----	37
10. RF Exposure evaluation -----	38
11. Test setup photo -----	39
11.1. Photos of Radiated emission -----	39
11.2. Photos of Conducted Emission test-----	40
12. EUT photo-----	41

TEST REPORT DECLARATION

Applicant : By TechDesign SL
 Address : Calle Tomas Edison 5, Arganda del Rey, Madrid, Spain
 Manufacturer : By TechDesign SL
 Address : Calle Tomas Edison 5, Arganda del Rey, Madrid, Spain
 Model Name : Door control system
 (A) Model No. : MTA 42328, MTA 42272
 (B) Trademark : by

Measurement Standard Used:

**FCC Rules and Regulations Part 15 Subpart C Section 15.247: 2017,
ANSI C63.10-2013**

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....: Reak Yang
 Project Engineer 

Approved by (name + signature).....: Simple Guan
 Project Manager 

Date of issue..... : November 13, 2018

Revision History

Revision	Issue Date	Revisions	Revised By
00	November 13, 2018	Initial released Issue	Simple Guan

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Test Item	Test Requirement	Standards Paragraph	Result
Conducted Emission	FCC PART 15:2017	15.207	P
6dB Bandwidth	FCC PART 15:2017	15.247 (a)(2)	P
Output Power	FCC PART 15:2017	15.247 (b)(3)	P
Radiated Spurious Emission	FCC PART 15:2017	15.247 (c)	P
Conducted Spurious & Band Edge Emission	FCC PART 15:2017	15.247 (d)	P
Power Spectral Density	FCC PART 15:2017	15.247 (e)	P
Radiated Band Edge Emission	FCC PART 15:2017	15.205	P
Antenna Requirement	FCC PART 15:2017	15.203	P
RF Exposure Evaluation	KDB447498 D01V06	4.1(f), 4.3.1(a)	P
Note:	1. P is an abbreviation for Pass. 2. F is an abbreviation for Fail. 3. N/A is an abbreviation for Not Applicable.		

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

Description	: The product is built with Bluetooth module and 13.56MHz module.
Model Name	: Door control system
Model Number	: MTA 42328, MTA 42272
Diff	: Both models are the same, except the appearance color, the results in this report belong to model MTA 42328.
Trademark	: by
Test Voltage	: DC 24V from Host
Bluetooth Version	: Bluetooth 4.0 BLE
Operation frequency	: 2402-2480MHz
Channel No.	: 40 Channels
Modulation type	: GFSK
Antenna Type	: PCB antenna, Maximum Gain is 2dBi
Software version	: 1.0.8.0
Hardware version	: V0
Product Size	: Length: 10.5cm Width: 10.5cm Height: 5cm


2.2. Accessories of Device (EUT)

Accessories1 : /
 Manufacturer : /
 Model : /

2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification or sDOC
1	POWER SUPPLY	TP-LINK	HKI-D06-500	N/A	N/A
2	POE SWITCH	TP-LINK	POE31004P	N/A	N/A
3	Door control system(Host)	By TechDesign SL	MTA42209	N/A	sDOC

2.4. Block Diagram of connection between EUT and simulators



2.5. Test Mode Description

Tested mode, channel, and data rate information		
Mode	Channel	Frequency (MHz)
GFSK	Low :CH0	2402
	Middle: CH19	2440
	High: CH39	2480

2.6. Test Conditions


Items	Required	Actual
Temperature range:	15-35°C	25°C
Humidity range:	25-75%	56%
Pressure range:	86-106kPa	98kPa

2.7. Additional instructions

Software (Used for test) from client

Mode	Special software is used. The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.		
Power level setup in software			
Test Software Name	nRFgo Studio		
Test Software Version	1.15.1		
Mode	Channel	Frequency (MHz)	Soft Set
GFSK	CH0	2402	TX level is set as defaults value.
	CH19	2440	
	CH39	2480	

Run Software

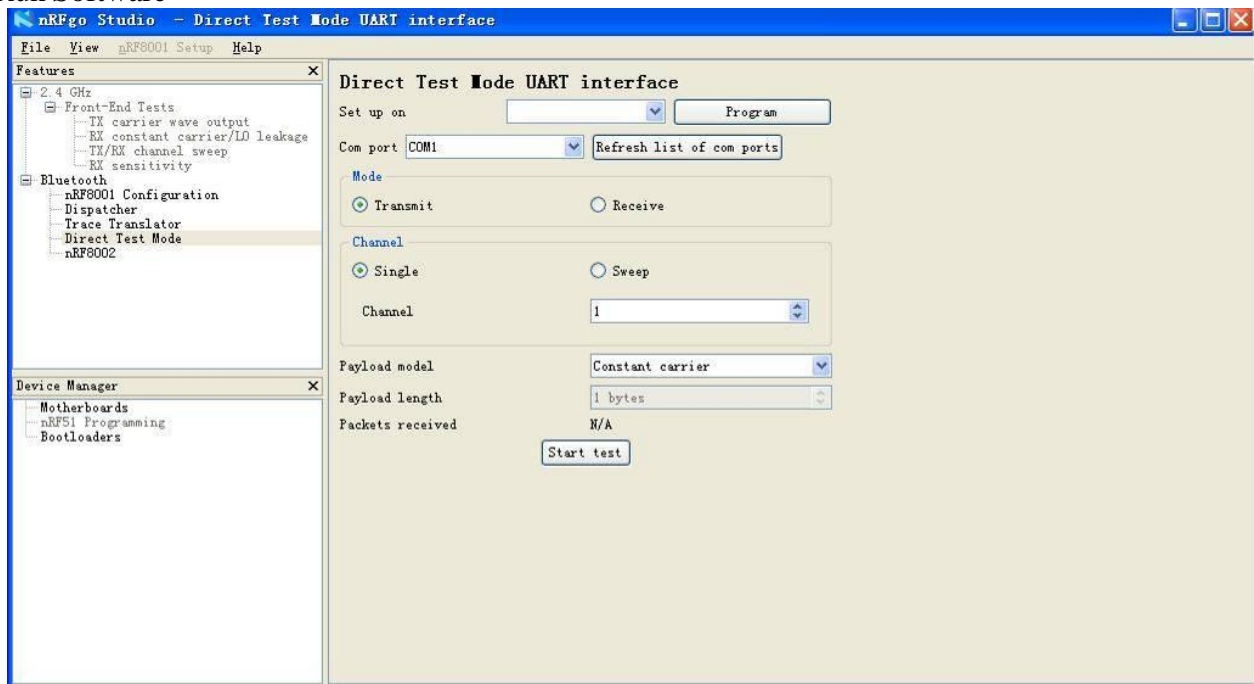

2.8. Test Facility

Shenzhen Alpha Product Testing Co., Ltd
 Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
 Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission
 Registration Number: 293961
 Designation Number: CN1236

July 25, 2017 Certificated by IC
 Registration Number: 12135A

2.9. Measurement Uncertainty

(95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	2.74dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	2.13 dB(Polarize: V)
	2.57dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.77dB(Polarize: V)
	3.80dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	4.16dB(Polarize: H)
	4.13dB(Polarize: V)
Uncertainty for radio frequency	5.8×10^{-8}
Uncertainty for conducted RF Power	0.37dB
Uncertainty for temperature	0.2°C
Uncertainty for humidity	%
Uncertainty for DC and low frequency voltages	0.06%

2.10. Test Equipment List

Equipment	Manufacturer	Model No.	Serial No.	Last cal.	Cal. Due day
Bilog Antenna	SCHWARZBECK	VULB 9168	9168-438	2018.04.13	2020.04.12
Spectrum analyzer	Agilent	E4407B	MY49510055	2018.09.21	2019.09.20
Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D(1201)	2018.04.13	2020.04.12
Filter	KANGMAI	ZLPF-LDC-1000-1959	1209002075	2018.09.21	2019.09.20
Filter	WAINWRIGHT	WHKX2.80/18G-12SS	SN1	2018.09.21	2019.09.20
RF Cable	Resenberger	Cable 4	N/A	2018.09.21	2019.09.20
Signal Analyzer	Agilent	N9020A	MY499100060	2018.09.11	2019.09.10
vector Signal Generator	Agilent	N5182A	MY49060042	2018.09.11	2019.09.10
vector Signal Generator	Agilent	E4438C	US44271917	2018.09.11	2019.09.10
Amplifier	HP	HP8347A	2834A00455	2018.09.21	2019.09.20
Amplifier	Agilent	8449B	3008A02664	2018.04.13	2020.04.12
Filter	WAINWRIGHT	WHKX1.0G/15G-10SS	SN40	2018.09.21	2019.09.20
Test Receiver	ROHDE&SCHWARZ	ESR	1316.3003K03-102082-Wa	2018.09.21	2019.09.20
9*6*6 anechoic chamber	CHENYU	9*6*6	N/A	2016.07.21	2020.07.20
RF Cable	Resenberger	Cable 1	N/A	2018.09.21	2019.09.20
RF Cable	Resenberger	Cable 2	N/A	2018.09.21	2019.09.20
RF Cable	Resenberger	Cable 3	N/A	2018.09.21	2019.09.20
Loop Antenna	SCHWARZBECK	FMZB 1519B	00005	2018.09.26	2020.09.25
Attenuator	HP	8494B	DC-18G	2018.09.21	2019.09.20
Attenuator	HP	8496B	DC-18G	2018.09.21	2019.09.20
20dB Attenuator	ICPROBING	IATS1	82347	2018.09.21	2019.09.20
L.I.S.N.#1	Schwarzbeck	NSLK8126	8126466	2018.09.21	2019.09.20
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA 9170294	2017.02.22	2019.02.21

3. SPURIOUS EMISSION

3.1. Test Limits

Frequencies (MHz)	Field Strength (microrvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Harmonic emissions limits comply with below 54 dBuV/m at 3m. Other emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or comply with the radiated emissions limits specified in section 15.209(a) limit in the table below has to be followed.

NOTE:

- a) The tighter limit applies at the band edges.
- b) Emission Level(dB uV/m)=20log Emission Level(uV/m)

3.2. Test Procedure

The measuring distance of 3m shall be used for measurements at frequency up to 1GH and above 1GHz, The EUT was placed on a rotating 0.8 m high above ground for below 1GHz and 1.5m high for above 1GHz testing, the table was rotated 360 degrees to determine the position of the highest radiation


The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set of make measurement.

The initial step in collecting conducted emission data is a spectrum analyzer Peak detector mode pre-scanning the measurement frequency range. Significant Peaks are then marked. and then Qusia Peak Detector mode premeasured


If Peak value comply with QP limit Below 1GHz. The EUT deemed to comply with QP limit. But the Peak value and average value both need to comply with applicable limit above 1GHz.

For the actual test configuration, please see the test setup photo.


3.3. Test Setup

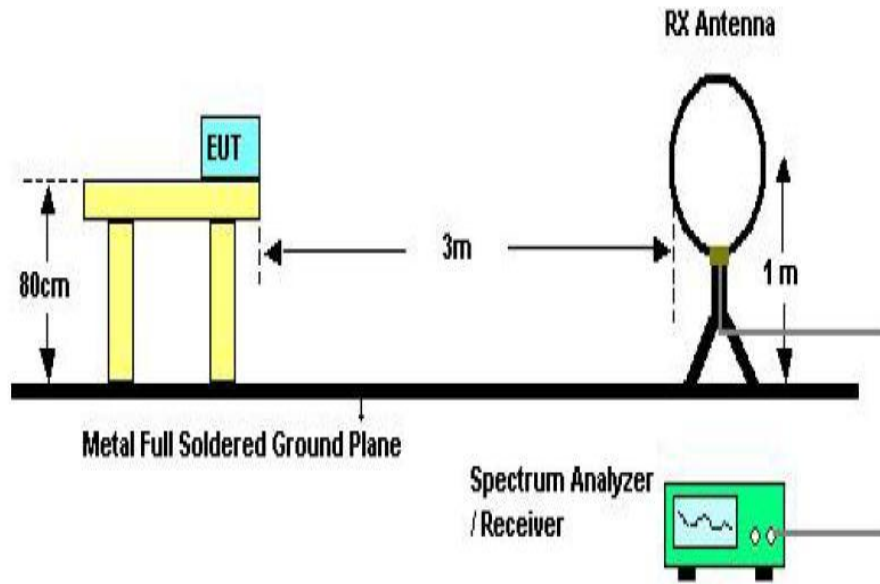

Below 30MHz Test Setup

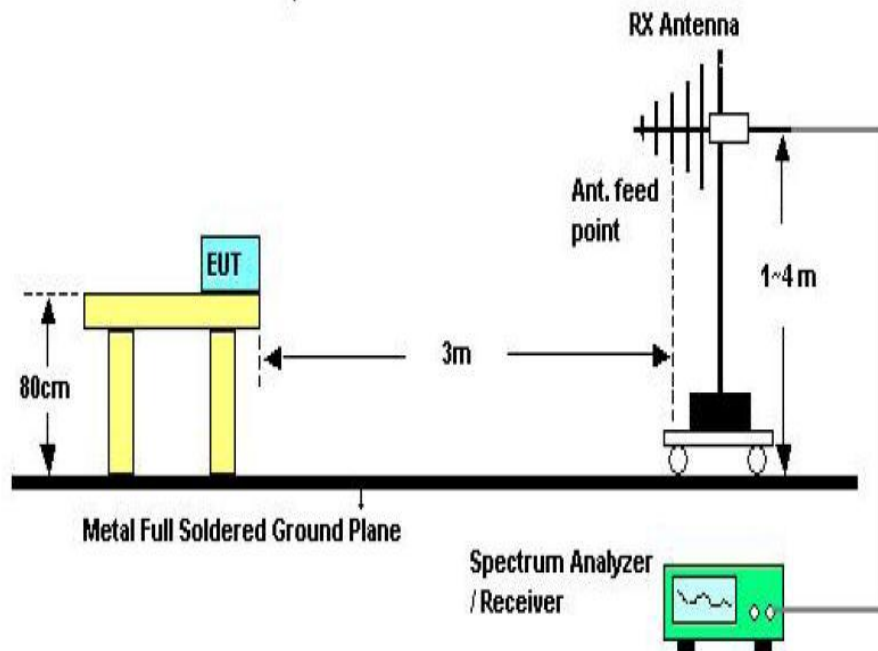

Above 30MHz Test Setup

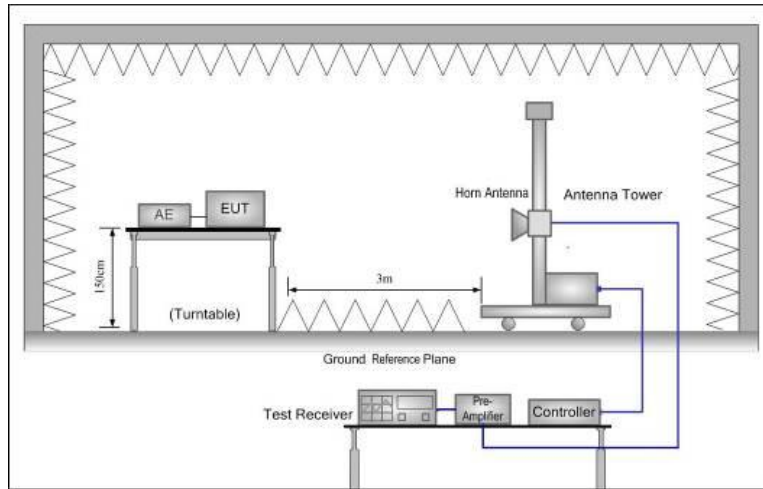

Above 1GHz Test Setup

3.4. Test Results

Test Condition

Continually Transmitting in maximum power.

9KHz~150KHz	RBW200Hz	VBW1KHz
150KHz~30MHz	RBW9KHz	VBW 30KHz
30MHz~1GHz	RBW120KHz	VBW 300KHz
Above1GHz	RBW1MHz	VBW 3MHz

We have scanned the 10th harmonic from 9 kHz to the EUT.


Detailed information please see the following page.

From 9KHz to 30MHz: Conclusion: PASS

Note: 1. If the amplitude of the spurious emission is more than 20dB above the allowable value, it's considered too low relative to the limit value, no necessary to report.

2. For above 1GHz test, if peak Result comply with AV limit, AV Result is deemed to comply with AV limit, no necessary to report.

Temperature:	26 °C	Relative Humidity:	58%
Pressure:	1010hPa	Phase :	Vertical
Test Voltage:	DC 24V From Host with POE supply		
Test Mode:	TX 2402MHz		

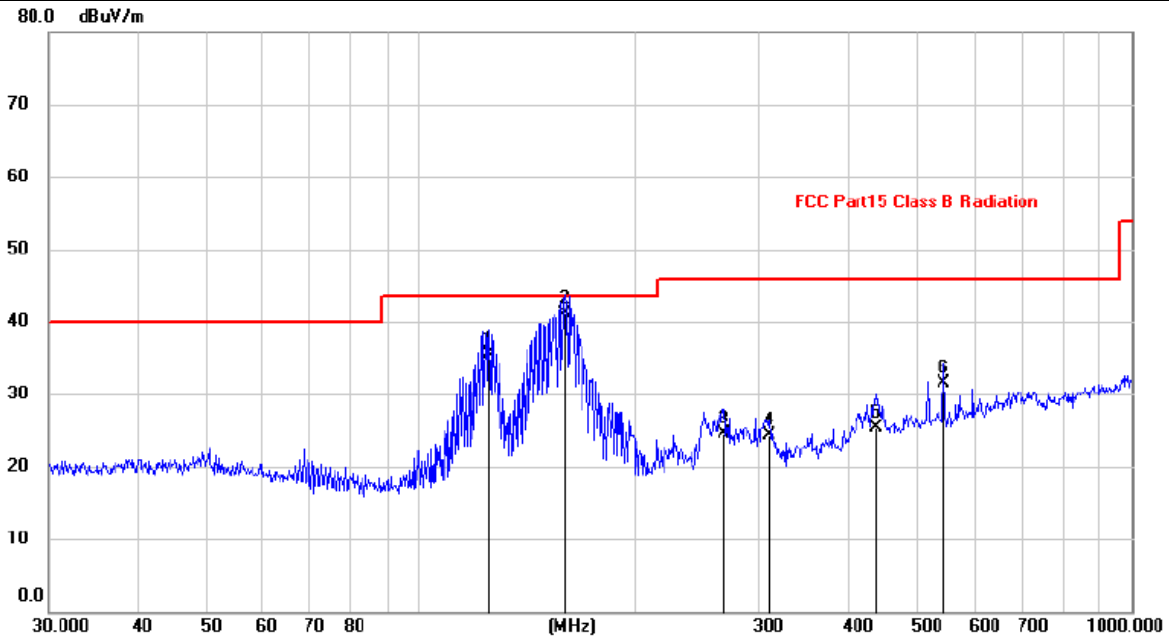


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		124.5690	22.53	12.89	35.42	43.50	-8.08	QP	100	0	
2	*	159.5008	26.48	14.58	41.06	43.50	-2.44	QP	100	0	
3		266.6089	11.88	12.63	24.51	46.00	-21.49	QP	100	360	
4		308.9126	10.74	13.62	24.36	46.00	-21.64	QP	100	0	
5		435.5898	8.81	16.42	25.23	46.00	-20.77	QP	100	360	
6		543.2742	13.40	18.20	31.60	46.00	-14.40	QP	100	0	

Note:1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Temperature:	26 °C	Relative Humidity:	58%
Pressure:	1010hPa	Phase :	Horizontal
Test Voltage:	DC 24V From Host with POE supply		
Test Mode:	TX 2402MHz		

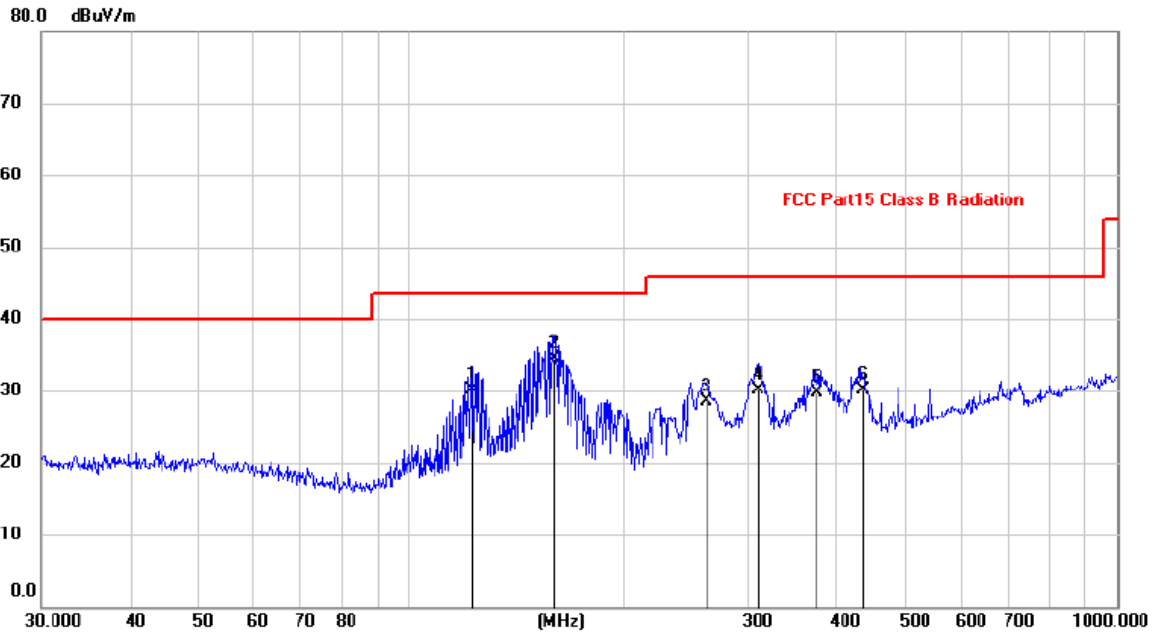


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		122.4040	17.45	12.75	30.20	43.50	-13.30	100	0	
2	*	159.2251	19.93	14.58	34.51	43.50	-8.99	100	360	
3		261.9753	16.18	12.42	28.60	46.00	-17.40	100	360	
4		309.9977	16.48	13.64	30.12	46.00	-15.88	100	0	
5		375.9385	14.31	15.31	29.62	46.00	-16.38	100	360	
6		434.0651	13.74	16.37	30.11	46.00	-15.89	100	0	

Note:1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Notes: Above is below 1GHz test data. This report only shall the worst case mode for TX 2402MHz.

Temperature:	26 °C	Relative Humidity:	58%
Pressure:	1010hPa	Phase :	Horizontal
Test Voltage:	DC 24V From Host with POE supply		
Test Mode:	TX 2402MHz		

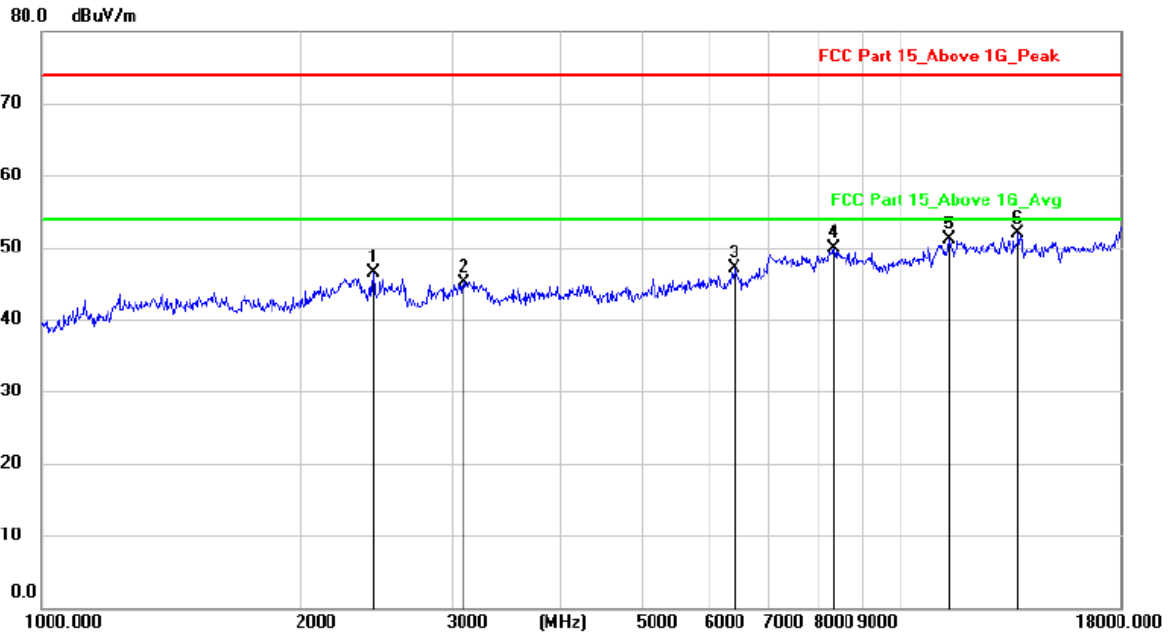


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1		2428.671	49.98	-3.40	46.58	74.00	-27.42	100	360
2		3096.075	47.23	-2.06	45.17	74.00	-28.83	100	0
3		6395.654	46.85	0.31	47.16	74.00	-26.84	100	0
4		8343.918	46.45	3.36	49.81	74.00	-24.19	100	0
5		11335.19	45.29	5.76	51.05	74.00	-22.95	100	360
6	*	13677.96	45.46	6.43	51.89	74.00	-22.11	100	0

Note: 1. *:Maximum data; x:Over limit; !:over margin.

2. Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Temperature:	26 °C	Relative Humidity:	58%
Pressure:	1010hPa	Phase :	Vertical
Test Voltage:	DC 24V From Host with POE supply		
Test Mode:	TX 2402MHz		

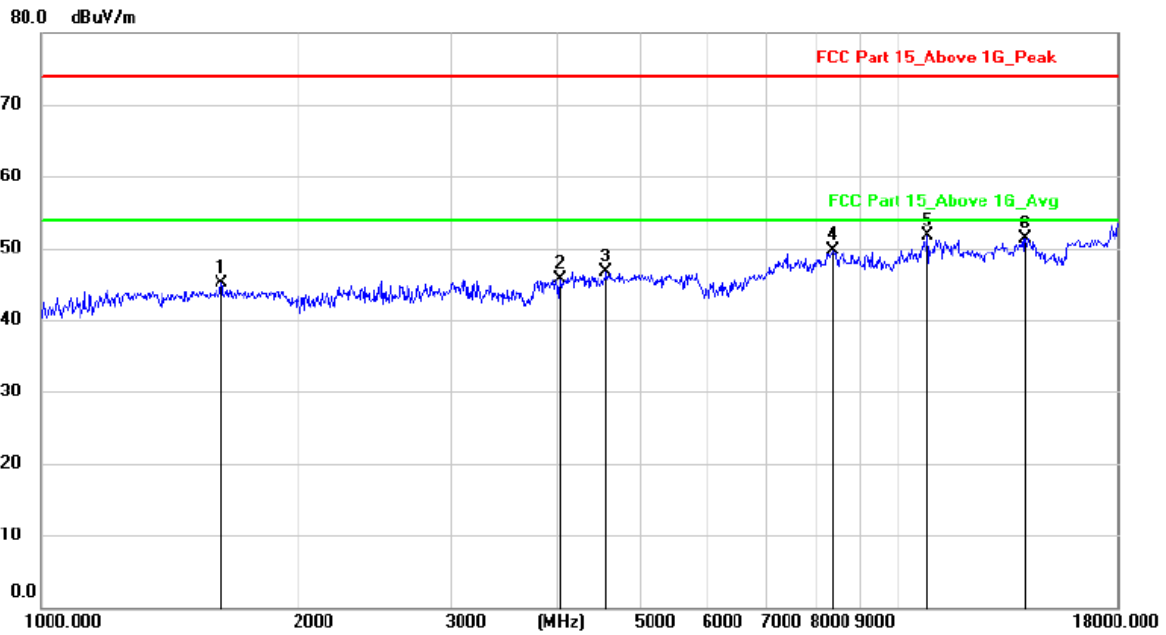


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Comment
1		1620.431	51.86	-6.83	45.03	74.00	-28.97	peak	100	0
2		4027.554	50.69	-4.99	45.70	74.00	-28.30	peak	100	0
3		4560.559	50.44	-3.68	46.76	74.00	-27.24	peak	100	0
4		8368.070	46.40	3.37	49.77	74.00	-24.23	peak	100	0
5	*	10791.68	46.07	5.56	51.63	74.00	-22.37	peak	100	0
6		14038.44	44.23	7.05	51.28	74.00	-22.72	peak	100	360

Note:1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Temperature:	26 °C	Relative Humidity:	58%
Pressure:	1010hPa	Phase :	Vertical
Test Voltage:	DC 24V From Host with POE supply		
Test Mode:	TX 2440MHz		

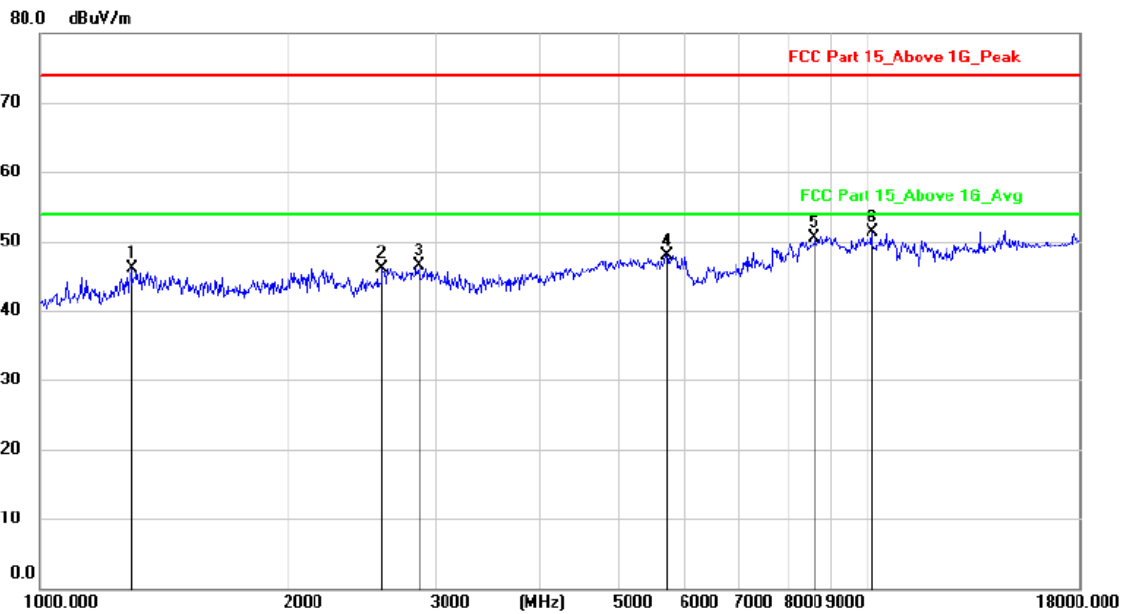


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		1289.627	53.45	-7.42	46.03	74.00	-27.97	peak	100	360	
2		2588.122	49.30	-3.16	46.14	74.00	-27.86	peak	100	360	
3		2863.645	49.19	-2.68	46.51	74.00	-27.49	peak	100	360	
4		5713.856	49.23	-1.34	47.89	74.00	-26.11	peak	100	360	
5		8613.467	46.69	3.91	50.60	74.00	-23.40	peak	100	0	
6	*	10097.59	46.56	4.67	51.23	74.00	-22.77	peak	100	0	

Note:1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Temperature:	26 °C	Relative Humidity:	58%
Pressure:	1010hPa	Phase :	Horizontal
Test Voltage:	DC 24V From Host with POE supply		
Test Mode:	TX 2440MHz		

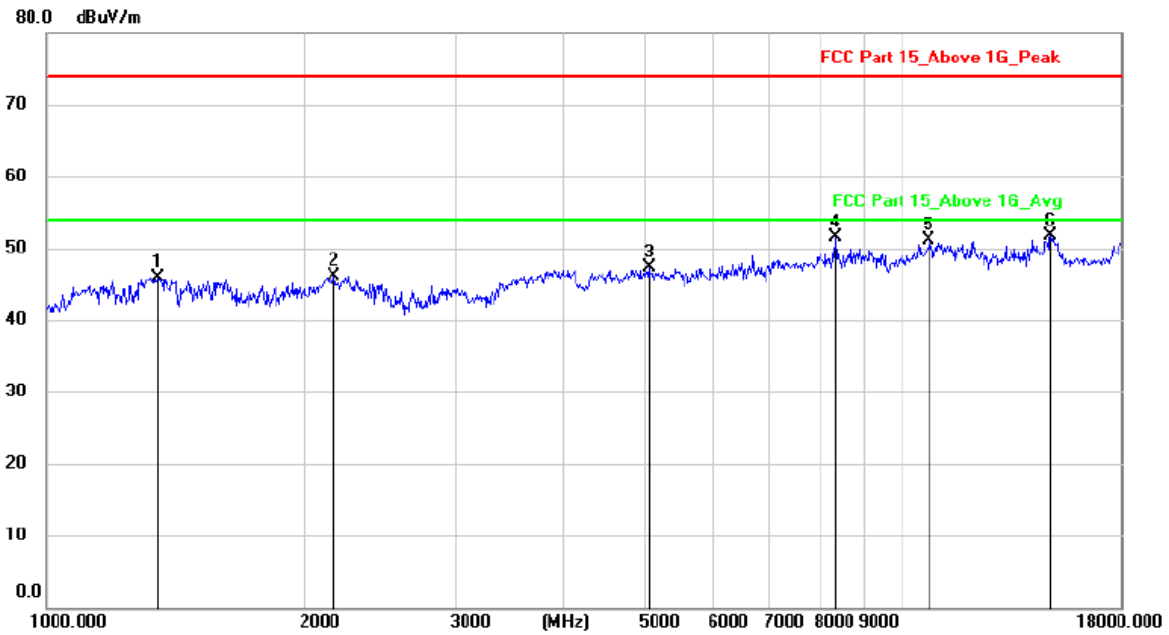


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Comment
1		1346.769	53.12	-7.18	45.94	74.00	-28.06	peak	100	0
2		2163.504	49.80	-3.62	46.18	74.00	-27.82	peak	100	0
3		5046.062	49.65	-2.41	47.24	74.00	-26.76	peak	100	360
4		8343.918	48.07	3.36	51.43	74.00	-22.57	peak	100	0
5		10729.48	45.53	5.48	51.01	74.00	-22.99	peak	100	0
6	*	14873.88	43.88	7.89	51.77	74.00	-22.23	peak	100	0

Note:1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Temperature:	26 °C	Relative Humidity:	58%
Pressure:	1010hPa	Phase :	Horizontal
Test Voltage:	DC 24V From Host with POE supply		
Test Mode:	TX 2480MHz		

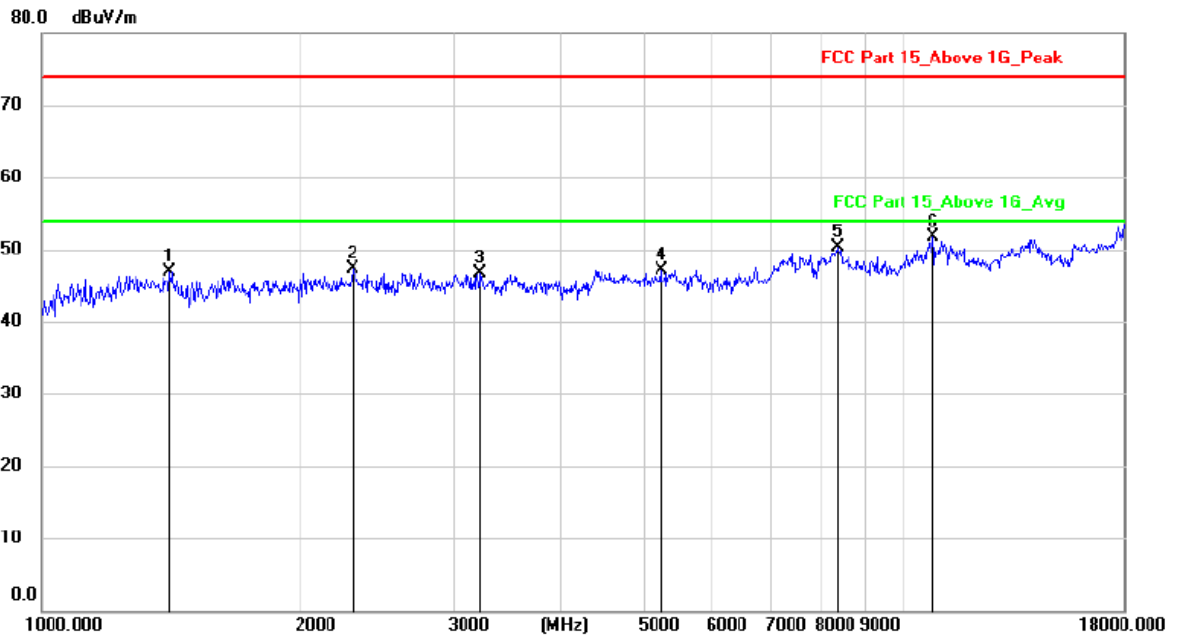


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Comment
1		1406.443	53.94	-7.01	46.93	74.00	-27.07	100	0	peak
2		2292.256	50.61	-3.32	47.29	74.00	-26.71	100	360	peak
3		3223.928	48.97	-2.23	46.74	74.00	-27.26	100	360	peak
4		5224.153	49.25	-2.15	47.10	74.00	-26.90	100	0	peak
5		8368.070	46.90	3.37	50.27	74.00	-23.73	100	360	peak
6	*	10791.68	46.07	5.56	51.63	74.00	-22.37	100	0	peak

Note: 1. *:Maximum data; x:Over limit; !:over margin.

2. Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Temperature:	26 °C	Relative Humidity:	58%
Pressure:	1010hPa	Phase :	Vertical
Test Voltage:	DC 24V From Host with POE supply		
Test Mode:	TX 2480MHz		

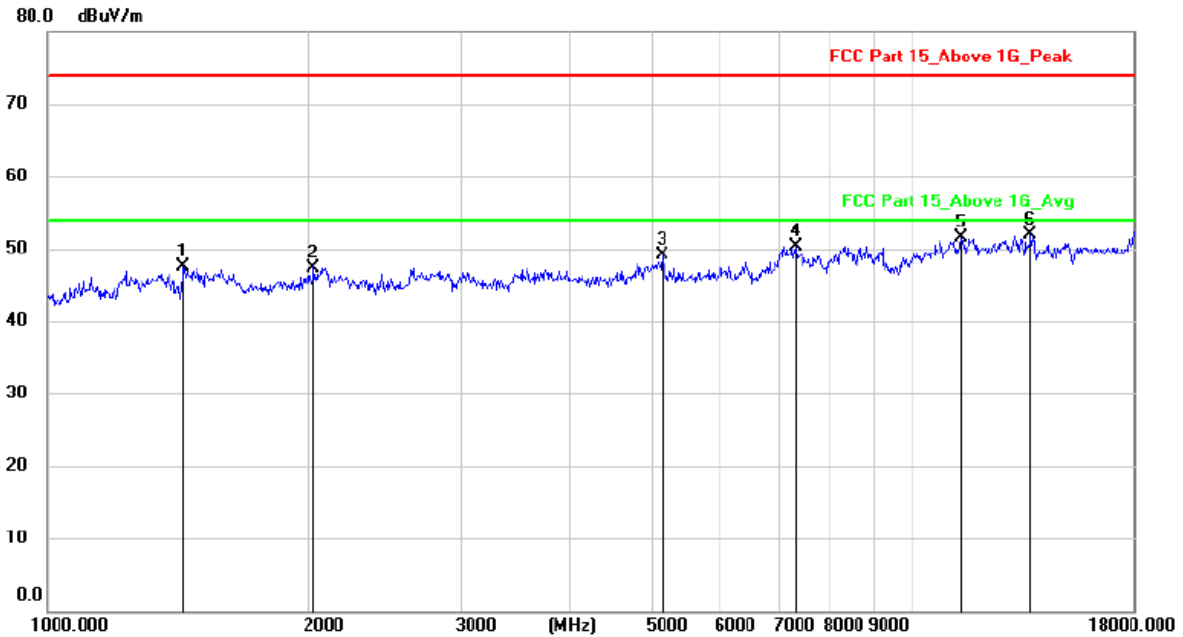

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		1435.189	54.45	-7.00	47.45	74.00	-26.55	peak	100	0	
2		2030.214	52.44	-5.04	47.40	74.00	-26.60	peak	100	360	
3		5134.335	51.43	-2.28	49.15	74.00	-24.85	peak	100	360	
4		7305.122	46.95	3.45	50.40	74.00	-23.60	peak	100	360	
5		11335.19	45.79	5.76	51.55	74.00	-22.45	peak	100	360	
6	*	13677.96	45.46	6.43	51.89	74.00	-22.11	peak	100	0	

Note:1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

The data for 18G-25GHz is very low, so not be shown

4. Power Line Conducted Emission

4.1. Test Limits

Frequency MHz	Limits dB(μ V)	
	Quasi-peak Level	Average Level
0.15 -0.50	66 -56*	56 - 46*
0.50 -5.00	56	46
5.00 -30.00	60	50


- Notes: 1. *Decreasing linearly with logarithm of frequency.
 2. The lower limit shall apply at the transition frequencies.
 3. The limit decreases in line with the logarithm of the frequency in rang of 0.15 to 0.50 MHz.

4.2. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10:2013 on Conducted Emission Measurement.


The bandwidth of test receiver is set at 9 kHz.

4.3. Test Setup

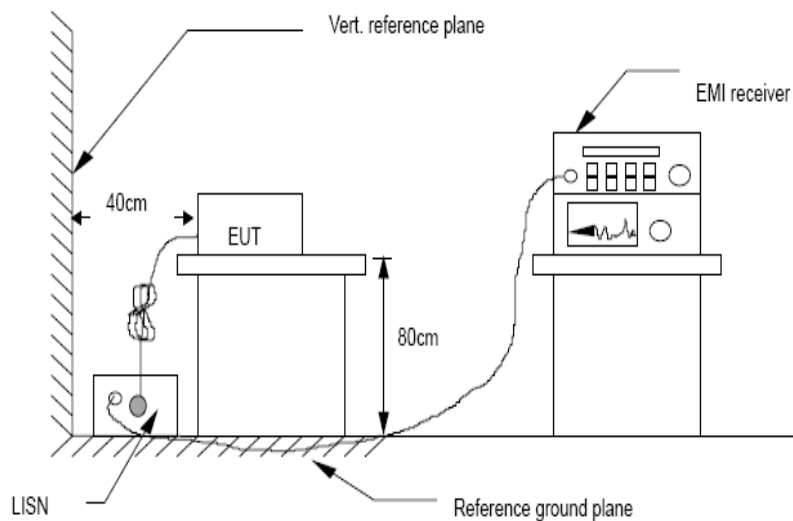

4.4. Test Results

Temperature:	24 °C	Relative Humidity:	57%
Pressure:	1010hPa	Phase :	N
Test Voltage:	DC 24V From Host with POE supply		
Test Mode:	BT Link		

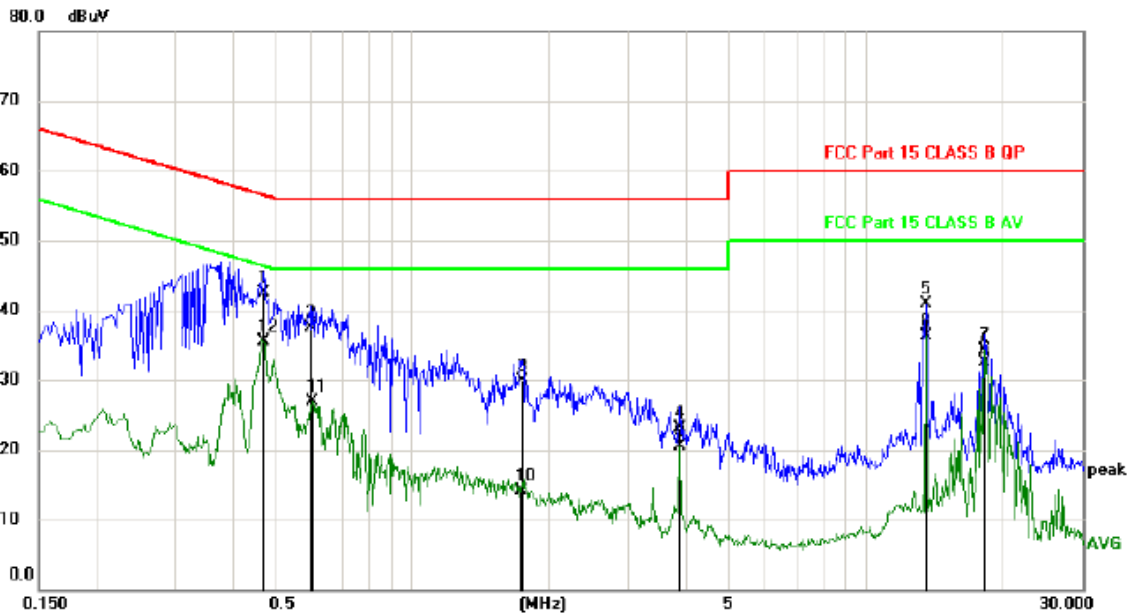

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.4707	32.82	9.71	42.53	56.50	-13.97	QP	
2		0.5967	27.85	9.72	37.57	56.00	-18.43	QP	
3		1.7485	19.98	9.85	29.83	56.00	-26.17	QP	
4		3.8849	13.10	10.07	23.17	56.00	-32.83	QP	
5		13.5600	30.59	10.35	40.94	60.00	-19.06	QP	
6		18.2456	22.00	10.43	32.43	60.00	-27.57	QP	
7		18.2456	23.86	10.43	34.29	50.00	-15.71	AVG	
8		13.5600	25.99	10.35	36.34	50.00	-13.66	AVG	
9		3.8849	10.38	10.07	20.45	46.00	-25.55	AVG	
10		1.7369	4.30	9.85	14.15	46.00	-31.85	AVG	
11		0.6028	17.13	9.72	26.85	46.00	-19.15	AVG	
12	*	0.4707	25.70	9.71	35.41	46.50	-11.09	AVG	

*:Maximum data x:Over limit !:over margin

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Temperature:	24 °C	Relative Humidity:	57%
Pressure:	1010hPa	Phase :	L
Test Voltage:	DC 24V From Host with POE supply		
Test Mode:	BT Link		



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.4707	33.07	9.71	42.78	56.50	-13.72	QP	
2		0.5907	30.76	9.72	40.48	56.00	-15.52	QP	
3		1.7009	17.64	9.85	27.49	56.00	-28.51	QP	
4		3.8879	12.22	10.07	22.29	56.00	-33.71	QP	
5		13.5630	37.96	10.35	48.31	60.00	-11.69	QP	
6		18.2457	22.02	10.43	32.45	60.00	-27.55	QP	
7		18.2457	23.00	10.43	33.43	50.00	-16.57	AVG	
8	*	13.5630	37.67	10.35	48.02	50.00	-1.98	AVG	
9		3.8879	9.86	10.07	19.93	46.00	-26.07	AVG	
10		1.7129	3.11	9.85	12.96	46.00	-33.04	AVG	
11		0.6000	17.62	9.72	27.34	46.00	-18.66	AVG	
12		0.4680	26.79	9.71	36.50	46.55	-10.05	AVG	

*:Maximum data x:Over limit !:over margin

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Remark: All modes and channels have been tested and only listed BT link mode that is worst data

5. CONDUCTED MAXIMUM OUTPUT POWER

5.1. Test limits

Please refer section 15.247.

5.2. Test Procedure


Details see the KDB558074 D01 Meas Guidance V05

5.2.1 Place the EUT on the table and set it in transmitting mode.

5.2.2 Measure out each mode and each bands peak output power of EUT.

Note: The cable loss and attenuator loss were offset into measure device as amplitude offset.

5.3. Test Setup



5.4. Test Results

Channel	Frequency (MHz)	PK Output Power (dBm)	PK Output Power (mW)	Limit (dBm)
CH0	2402	-3.807	0.42	30
CH19	2440	-3.895	0.41	30
CH39	2480	-3.464	0.45	30
Conclusion: PASS				

6. PEAK POWER SPECTRAL DENSITY

6.1. Test limits

6.1.1 Please refer section 15.247.

6.1.2 For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

6.1.3 The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

6.2. Test Procedure

Details see the KDB558074 D01 Meas Guidance V05

6.2.1 Place the EUT on the table and set it in transmitting mode.


6.2.2 Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

6.2.3 Set the spectrum analyzer as RBW = 3kHz(Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$), VBW = 10kHz(Set the VBW $\geq 3 \times \text{RBW}$), span= $1.5 \times \text{DTS bandwidth}$., detail see the test plot.

6.2.4 Record the max reading.

6.2.5 Repeat the above procedure until the measurements for all frequencies are completed.


6.3. Test Setup




6.4. Test Results

Channel	Frequency (MHz)	Power Spectral Density (dBm)	Limit (dBm)	Result
CH0	2402	-19.351	8	PASS
CH19	2440	-19.515	8	PASS
CH39	2480	-19.135	8	PASS
Conclusion: PASS				


Low channel-2402MHz

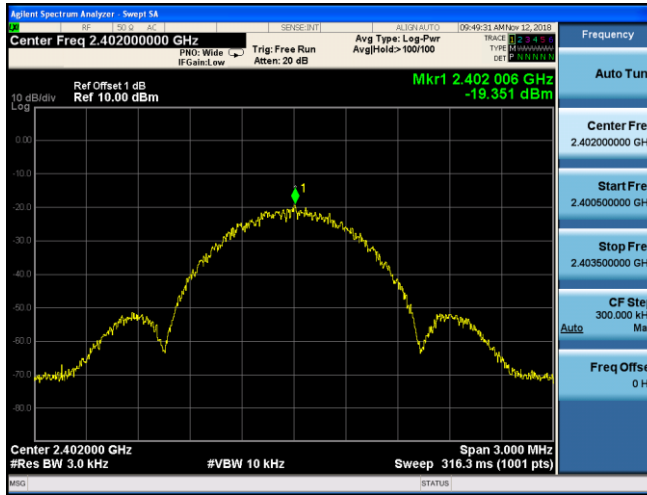

Middle channel-2440MHz

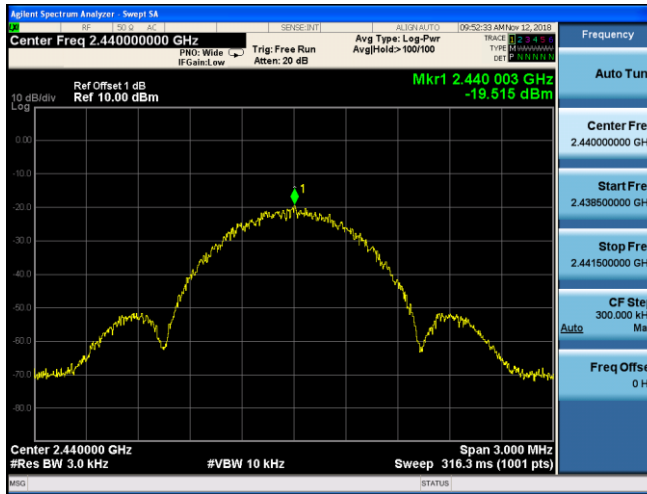

High channel-2480MHz

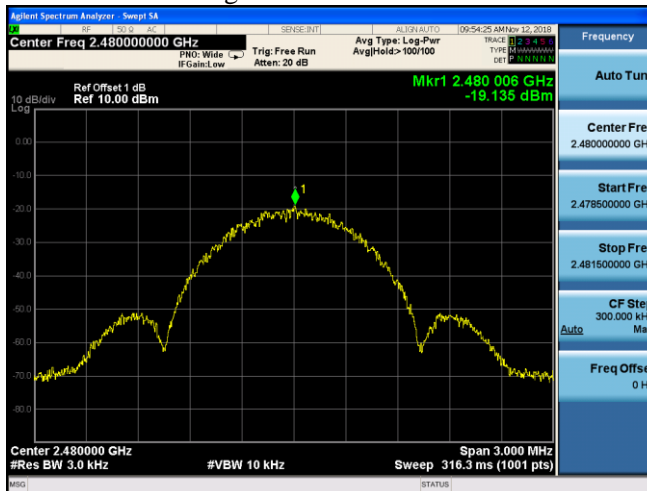

7. BANDWIDTH

7.1. Test limits

Please refer section 15.247

For direct sequence systems, the minimum 6dB bandwidth shall be at least 500 kHz.


7.2. Test Procedure

Details see the KDB558074 D01 Meas Guidance V05

a) The bandwidth is measured at an amplitude level reduced 20dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

b) The test receiver set RBW = 100kHz, VBW $\geq 3 \cdot$ RBW = 300kHz, Sweep time set auto, detail see the test plot.

7.3. Test Setup




7.4. Test Results

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
CH0	2402	0.620	0.5	PASS
CH19	2440	0.621	0.5	PASS
CH39	2480	0.611	0.5	PASS


Low channel-2402MHz



Middle channel-2440MHz

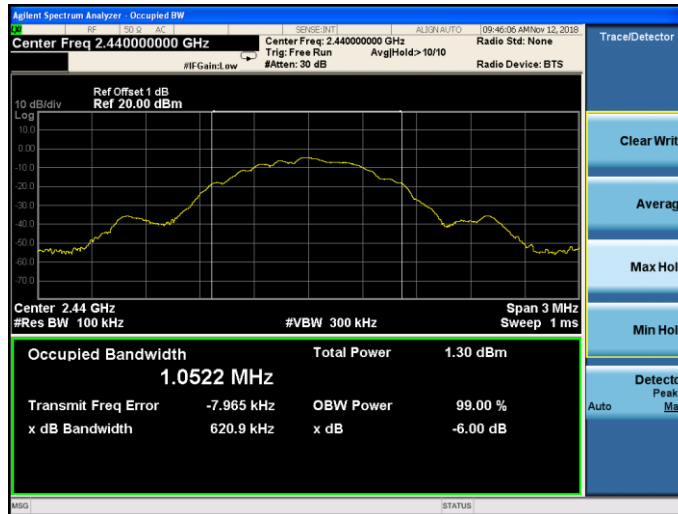

High channel-2480MHz

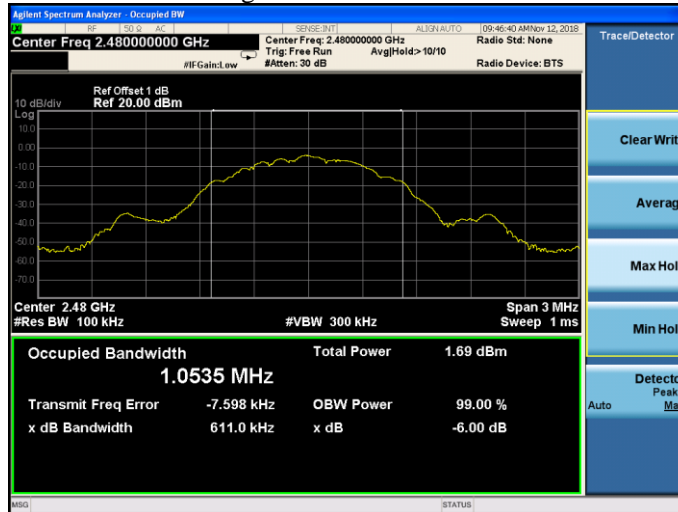

8. BAND EDGE CHECK

8.1. Test limits

Please refer section 15.247.

8.2. Test Procedure

Details see the KDB558074 D01 Meas Guidance V05

8.2.1 Put the EUT on a 1.5m high table, power on the EUT. Emissions were scanned and measured rotating the EUT to 360 degrees, Find the maximum Emission

8.2.2 Check the spurious emissions out of band.

8.2.3 Both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RBW is set at 1MHz, VBW is set at 10Hz for Average measure. Test Setup Same as 5.2.2.


8.3. Test Results

We have scanned the 10th harmonic from 9KHz to the EUT's highest frequency..
Detailed information please see the following page.

From 9KHz to 30MHz: Conclusion: PASS


Note: 1. The amplitude of the spurious emission is more than 20dB above the allowable value, it's considered too low relative to the limit value, no necessary to report.
2. For above 1GHz test, if peak Result comply with AV limit, AV Result is deemed to comply with AV limit, no necessary to report.

Radiated Method:
TX 2402MHz Horizontal

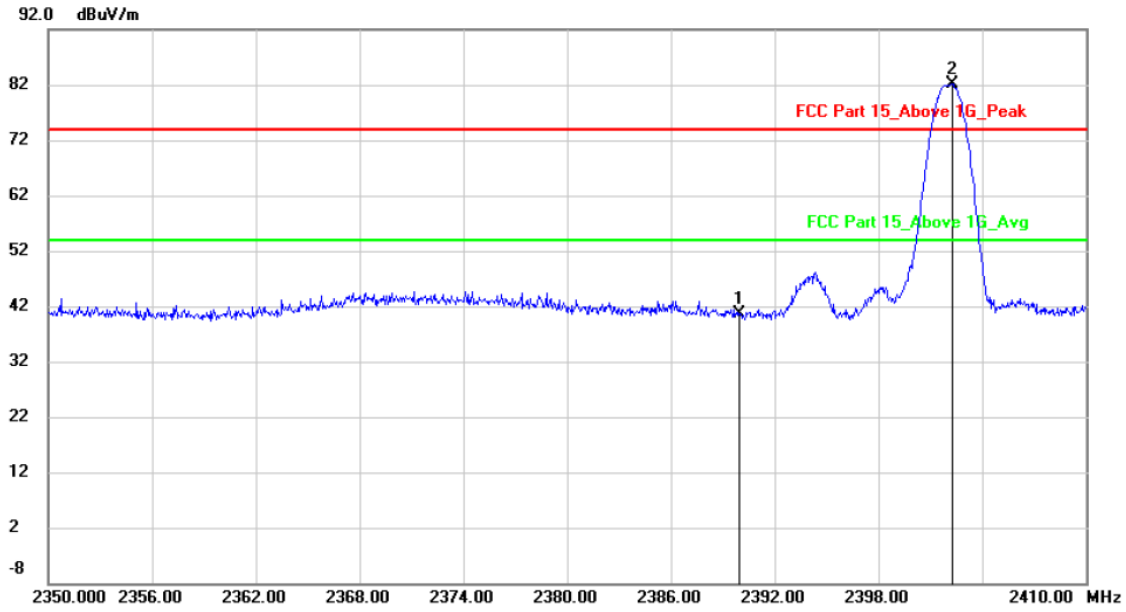


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		2390.000	44.07	-3.40	40.67	74.00	-33.33	peak			
2	*	2402.260	85.47	-3.41	82.06	74.00	8.06	peak			

TX 2402MHz Vertical

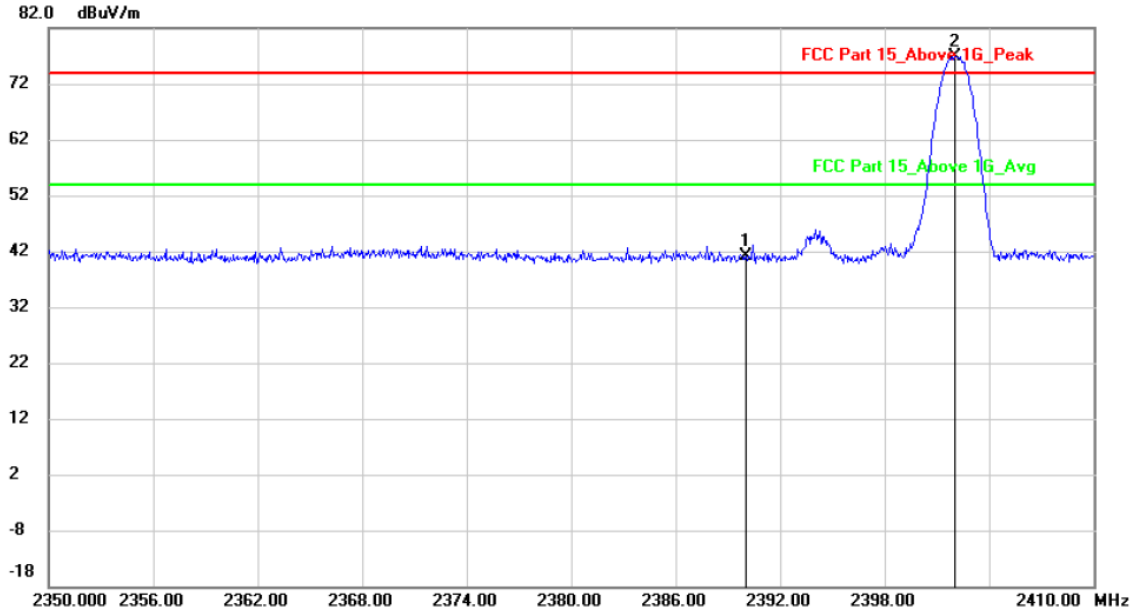


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2390.000	44.44	-3.40	41.04	74.00	-32.96			peak
2	*	2402.020	80.33	-3.41	76.92	74.00	2.92			peak

TX 2480MHz Horizontal

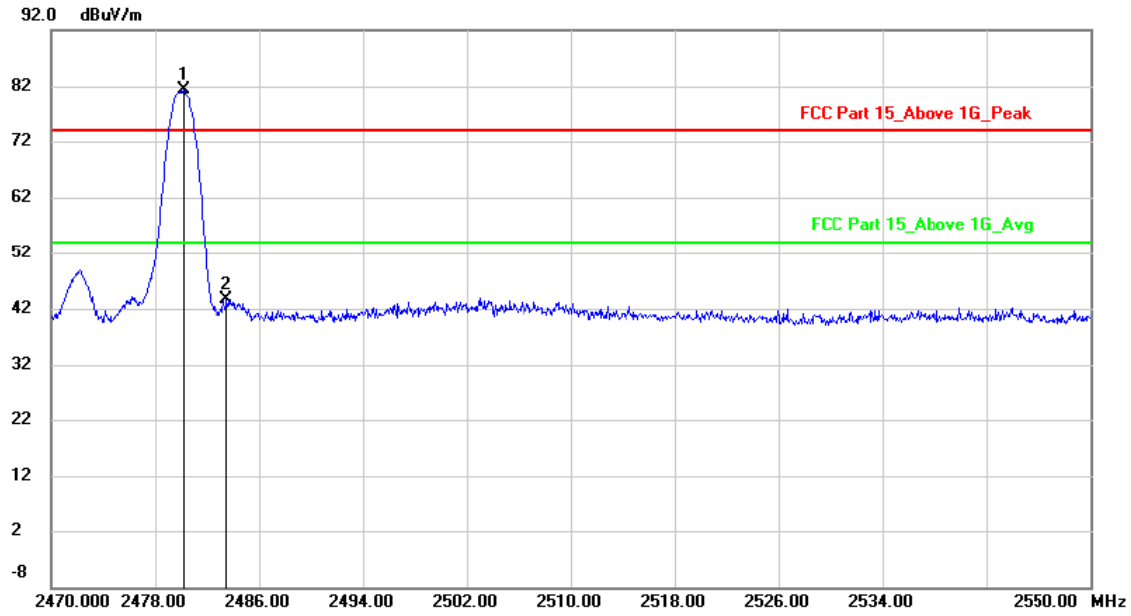

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	*	2480.160	84.69	-3.38	81.31	74.00	7.31	peak			
2		2483.500	46.89	-3.38	43.51	74.00	-30.49	peak			

TX 2480MHz Vertical

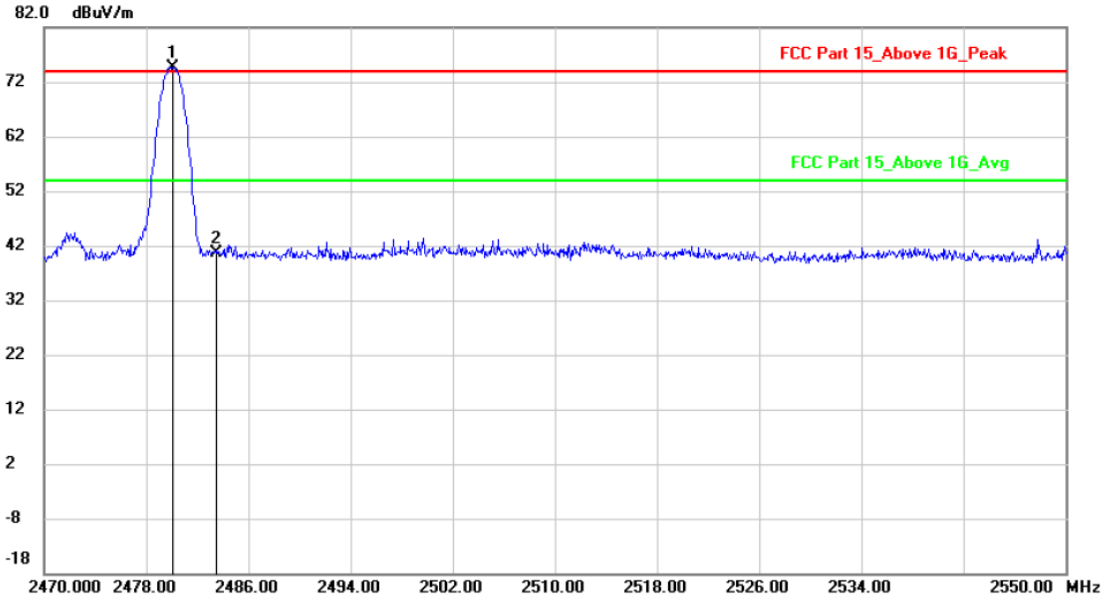

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Comment
1	*	2480.080	77.98	-3.38	74.60	74.00	0.60			peak
2		2483.500	44.07	-3.38	40.69	74.00	-33.31			peak

Note: If peak Result comply with AV limit, QP and AV Result is deemed to comply with AV limit

9. ANTENNA REQUIREMENT

9.1. Standard Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

9.2. Antenna Connected Construction

The antenna is internal antenna and no consideration of replacement. Please see EUT photo for details.

9.3. Results

The EUT antenna is an internal Coaxial Antenna. It complies with the standard requirement.

10. RF EXPOSURE EVALUATION

According to 447498 D01 General RF Exposure Guidance v06

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by the following:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR, and ≤ 7.5 for 10-g extremity SAR, where

$f(\text{GHz})$ is the RF channel transmit frequency in GHz

Power and distance are rounded to the nearest mW and mm before calculation

The result is rounded to one decimal place for comparison


Worse case value = $P_{\text{max}} / \text{Distance}_{5\text{mm}} \cdot \sqrt{f(\text{GHz})} = 0.45 / 5 \cdot \sqrt{2.48} = 0.1417 < 3.0$ for 1-g SAR

Then the SAR test is exempted

11. TEST SETUP PHOTO

11.1. Photos of Radiated emission

RE below 1G

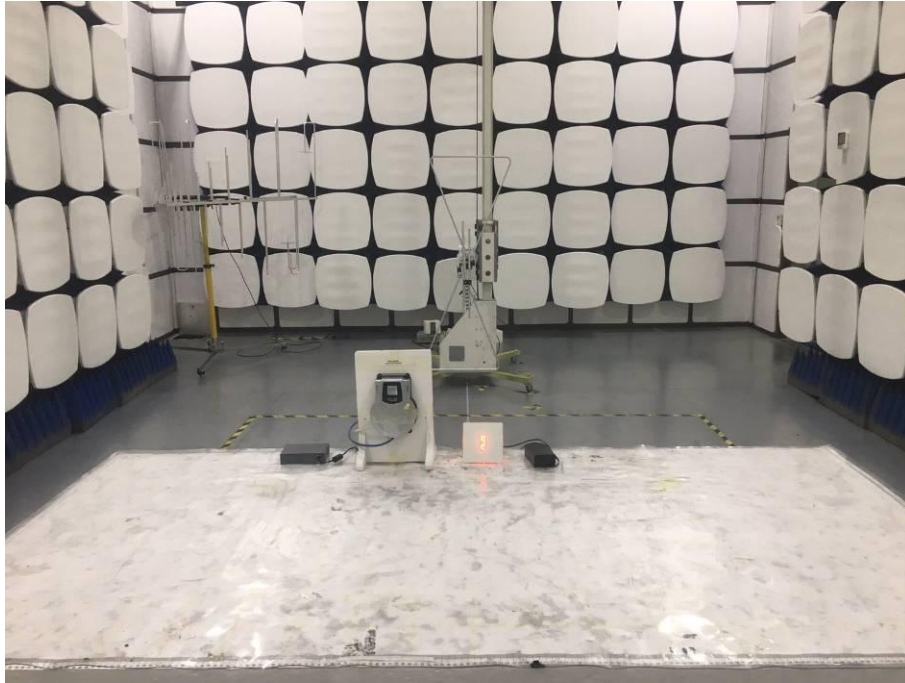


RE above 1G







11.2.Photos of Conducted Emission test





12.EUT PHOTO


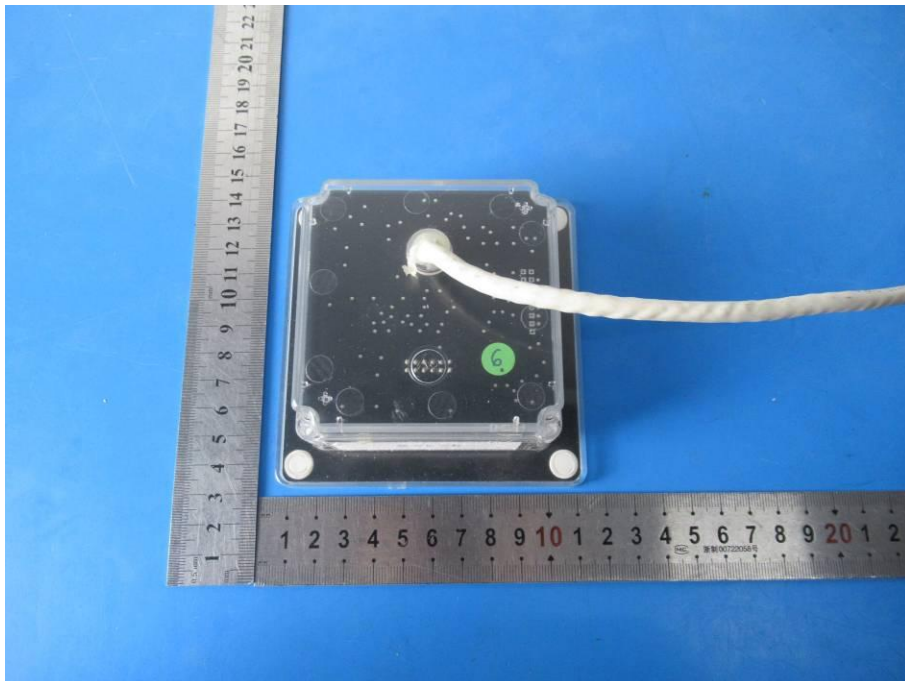


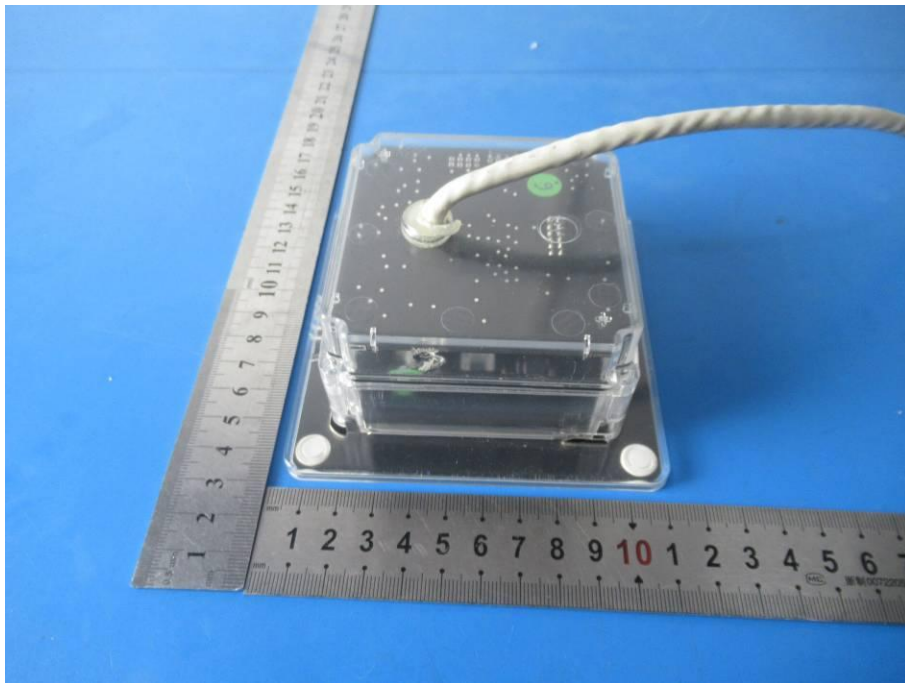
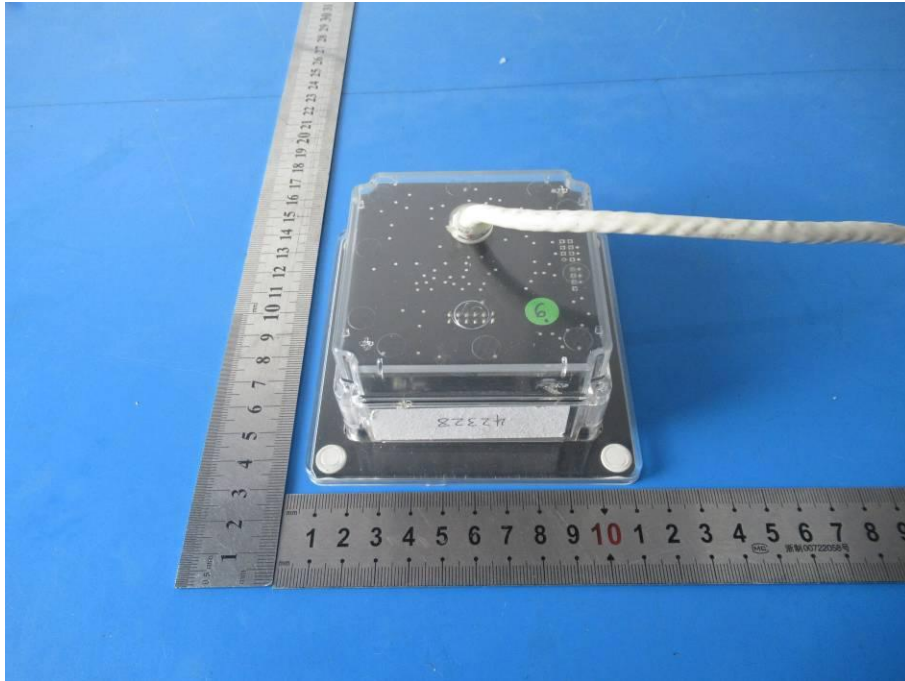


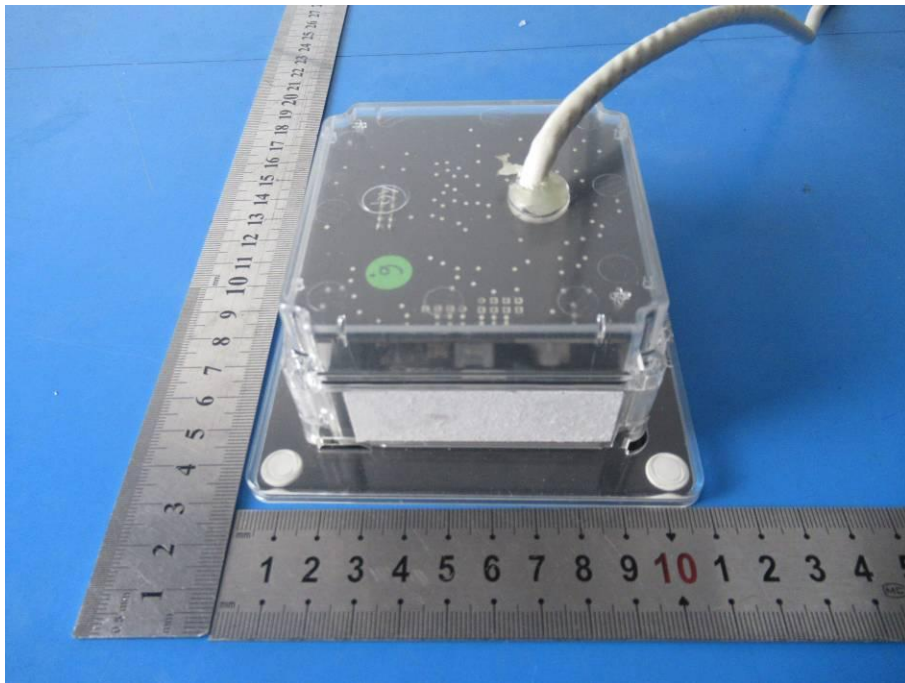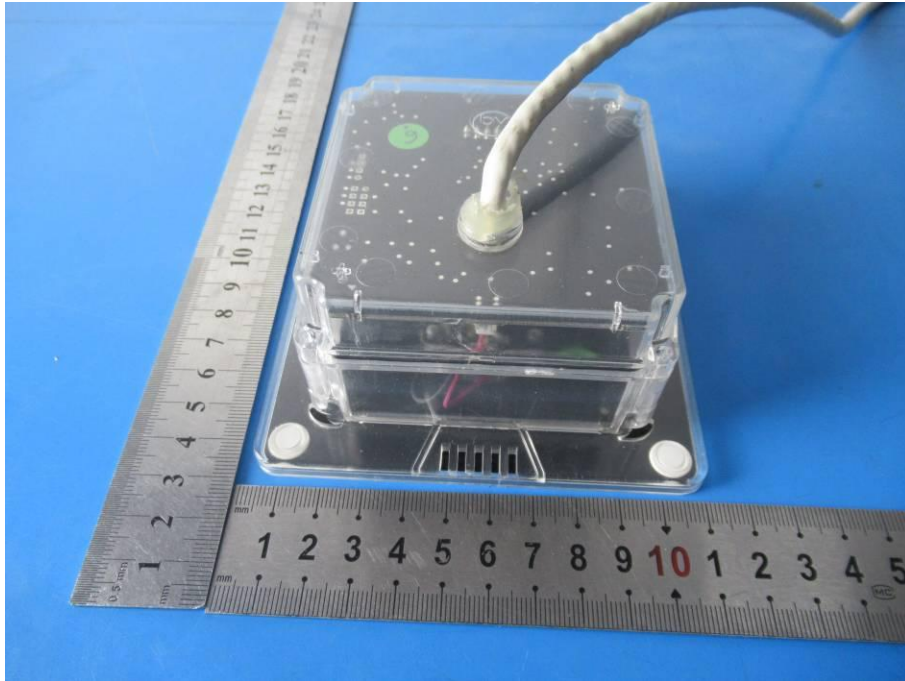


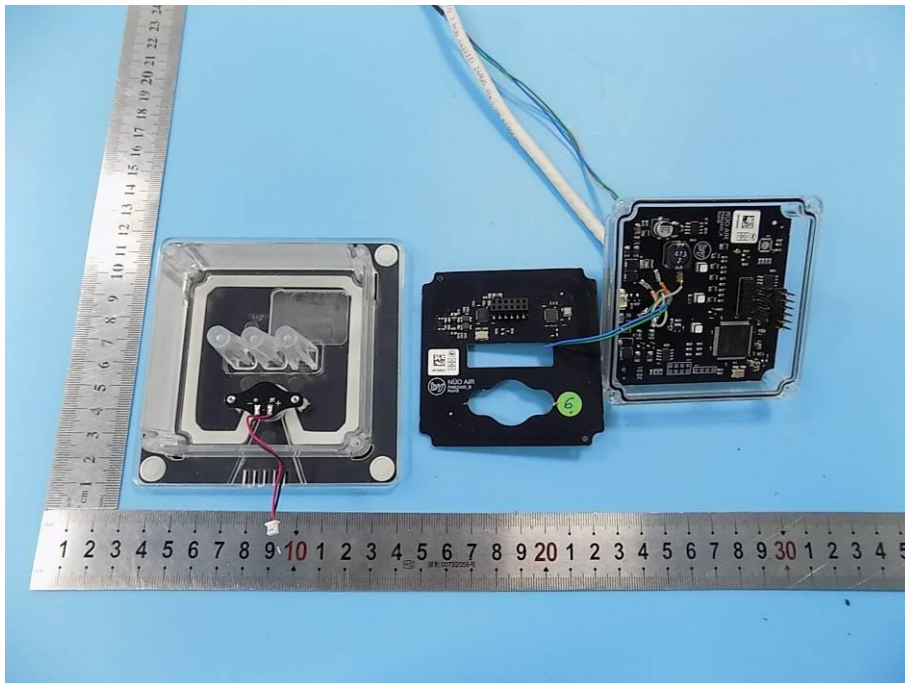

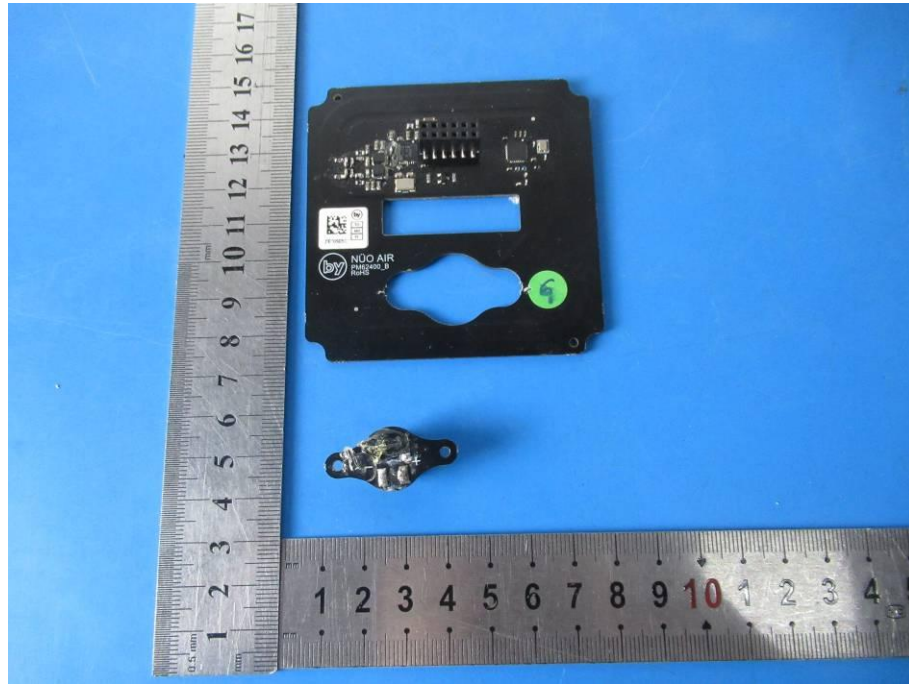

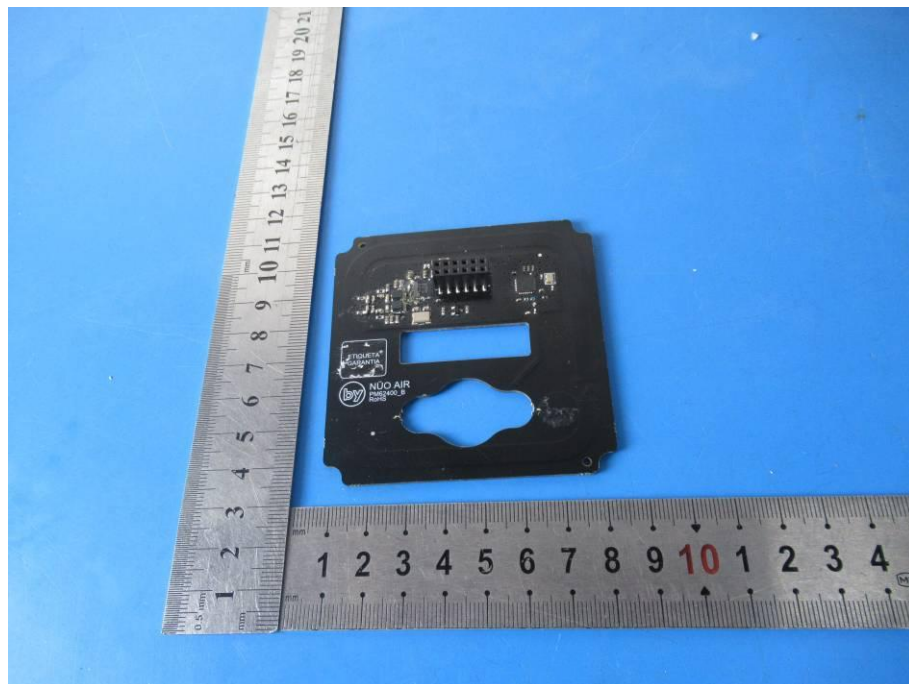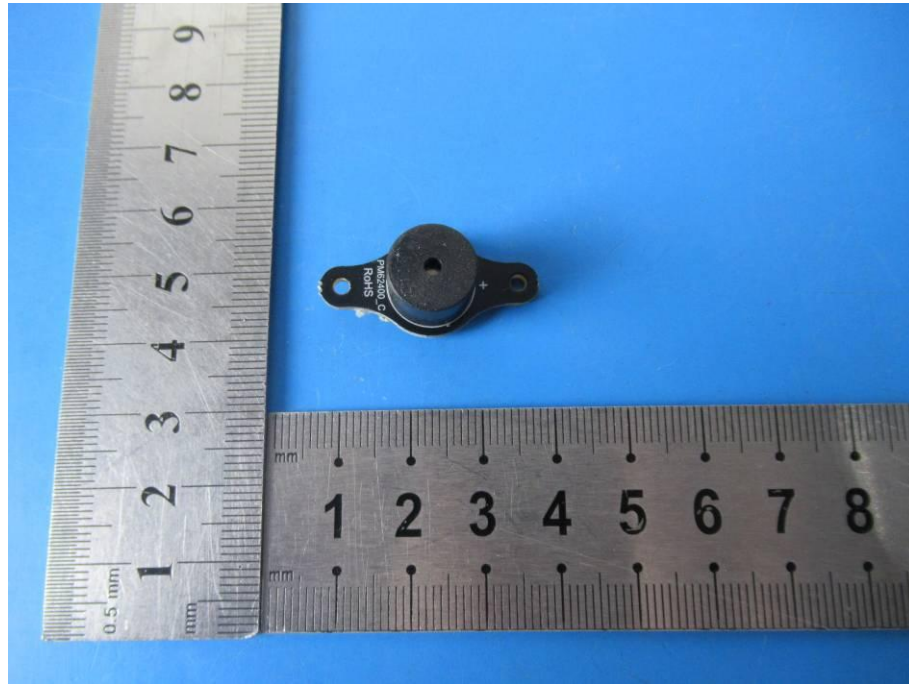

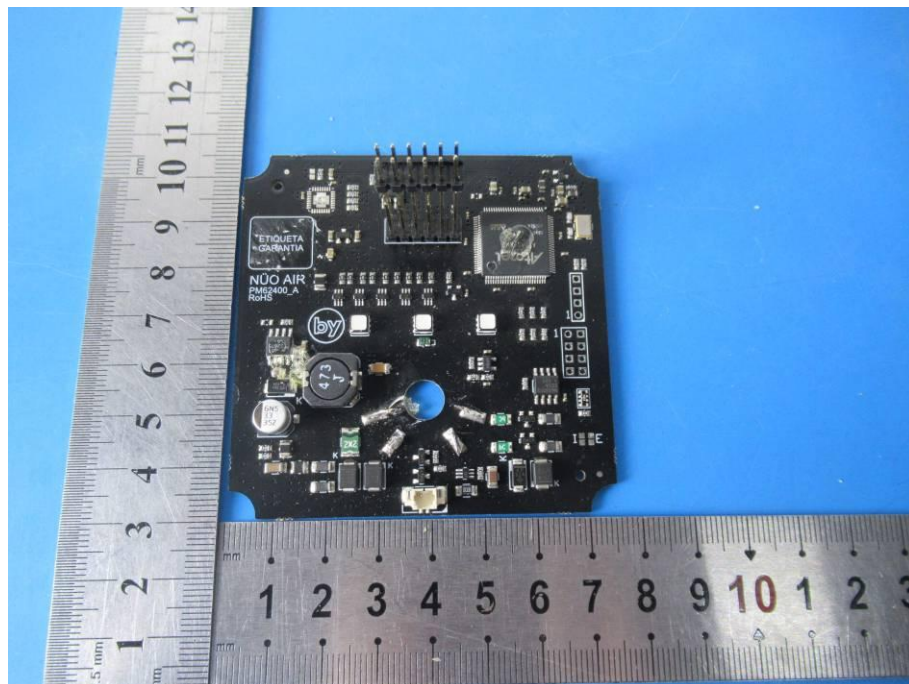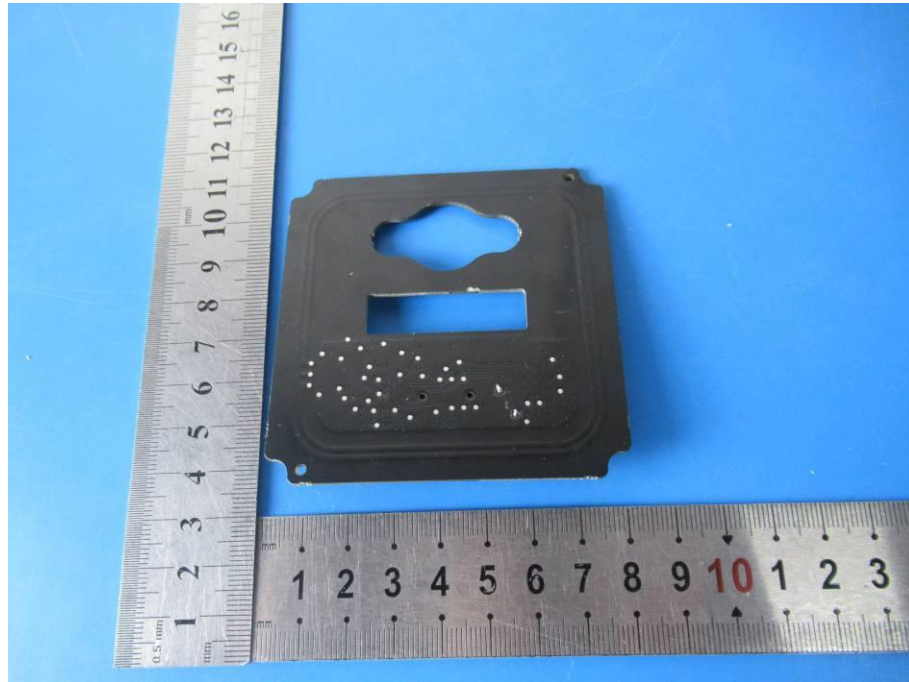

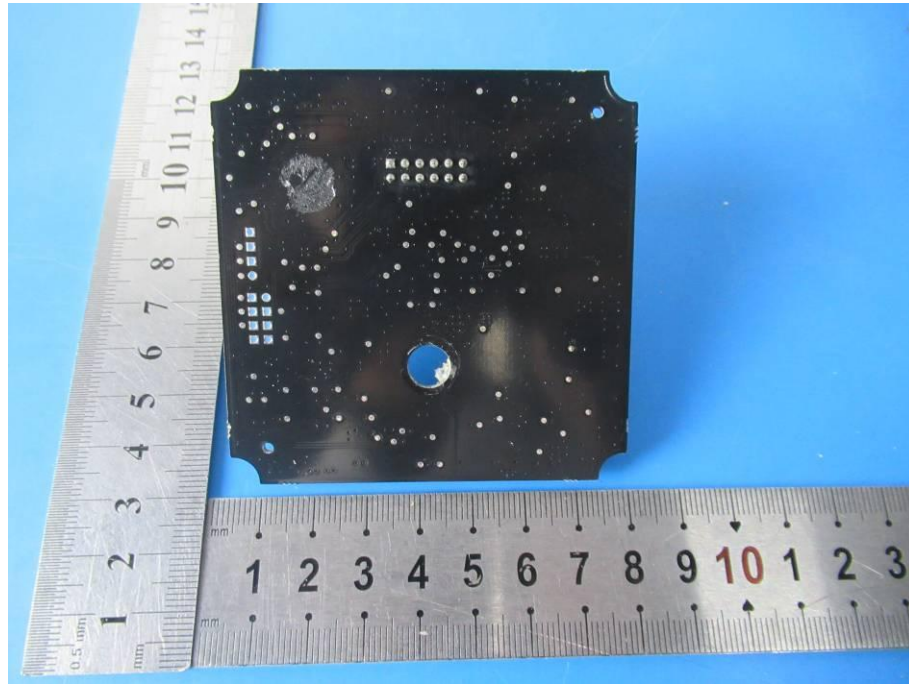

-----THE END OF REPORT-----