

FCC TEST REPORT

For

SENERGY ELECTRONIC TECHNOLOGY(SHENZHEN)LIMITED CO.,

Wireless Charger

Model No.: desk stand, Airvent

Prepared For : SENERGY ELECTRONIC TECHNOLOGY(SHENZHEN)LIMITED
CO.,
Address : No.310, Floor 1-3, Dormitory, Fenghua Building 82 Zone, Xingan Road,
Baoan District, Shenzhen, Guangdong, China

Prepared By : Shenzhen Anbotek Compliance Laboratory Limited
Address : 1/F, Building D, Sogood Science and Technology Park, Sanwei
community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong,
China.518102
Tel: (86) 755-26066440 Fax: (86) 755-26014772

Report Number : SZAWW181018008-01
Date of Receipt : Oct. 18, 2018
Date of Test : Oct. 18~Nov. 06, 2018
Date of Report : Nov. 06, 2018

Contents

1. General Information.....	4
1.1. Client Information.....	4
1.2. Description of Device (EUT).....	4
1.3. Auxiliary Equipment Used During Test.....	4
1.4. Description of Test Modes.....	5
1.5. Description Of Test Setup.....	6
1.6. Test Equipment List.....	7
1.7. Description of Test Facility.....	8
2. Summary of Test Results.....	9
3. Conducted Emission Test.....	10
3.1. Test Standard and Limit.....	10
3.2. Test Setup.....	10
3.3. Test Procedure.....	10
3.4. Test Data.....	10
4. Radiation Spurious Emission and Band Edge.....	15
4.1. Test Standard and Limit.....	15
4.2. Test Setup.....	15
4.3. Test Procedure.....	16
4.4. Test Data.....	17
5. Antenna Requirement.....	23
5.1. Test Standard and Requirement.....	23
5.2. Antenna Connected Construction.....	23
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	24
APPENDIX II -- EXTERNAL PHOTOGRAPH.....	26
APPENDIX III -- INTERNAL PHOTOGRAPH.....	33

TEST REPORT

Applicant : SENERGY ELECTRONIC TECHNOLOGY(SHENZHEN)LIMITED CO.,
Manufacturer : Dongguan Senergy Limited
Product Name : Wireless Charger
Model No. : desk stand, Airvent
Trade Mark : N.A.
Rating(s) : Input: DC 9V, 2A
Output: 5W / 7.5W
Test Standard(s) : **FCC Part15 Subpart C 2017, Paragraph 15.209**
Test Method(s) : **ANSI C63.10: 2013**

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Test

Oct. 18~Nov. 06, 2018

Prepared By



Oliay Yang

(Engineer / Oliay Yang)

Reviewer

Snowy Meng

(Supervisor / Snowy Meng)

Approved & Authorized Signer

Sally Zhang

(Manager / Sally Zhang)

1. General Information

1.1. Client Information

Applicant	:	SENERGY ELECTRONIC TECHNOLOGY(SHENZHEN)LIMITED CO.,
Address	:	No.310, Floor 1-3, Dormitory, Fenghua Building 82 Zone, Xingan Road, Baoan District, Shenzhen, Guangdong, China
Manufacturer	:	Dongguan Senergy Limited
Address	:	Area B, 1F&2F, Plant of Yayao, Huaide Community, Humen Town, Dongguan City, Guangdong Province, People's Republic of China
Factory	:	Dongguan Senergy Limited
Address	:	Area B, 1F&2F, Plant of Yayao, Huaide Community, Humen Town, Dongguan City, Guangdong Province, People's Republic of China

1.2. Description of Device (EUT)

Product Name	:	Wireless Charger	
Model No.	:	desk stand, Airvent (Note: All samples are the same except the colour, so we prepare "desk stand" for test only.)	
Trade Mark	:	N.A.	
Test Power Supply	:	AC 240V, 60Hz for adapter/ AC 120V, 60Hz for adapter	
Test Sample No.	:	S1(Normal Sample), S2(Engineering Sample)	
Product Description	:	Operation Frequency:	111~205KHz
	:	Modulation Type:	MSK
	:	Antenna Type:	Inductive loop coil Antenna
	:	Antenna Gain(Peak):	0 dBi
Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.			

1.3. Auxiliary Equipment Used During Test

Adapter	:	MODEL: SK03T-0900200Z INPUT: 100-240V~ 50/60Hz, 0.6A OUTPUT: DC 9V, 2A
Mobile Phone	:	iPhone 6S

1.4. Description of Test Modes



To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX Mode

For Conducted Emission	
Final Test Mode	Description
Mode 1	TX Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	TX Mode

1.5. Description Of Test Setup

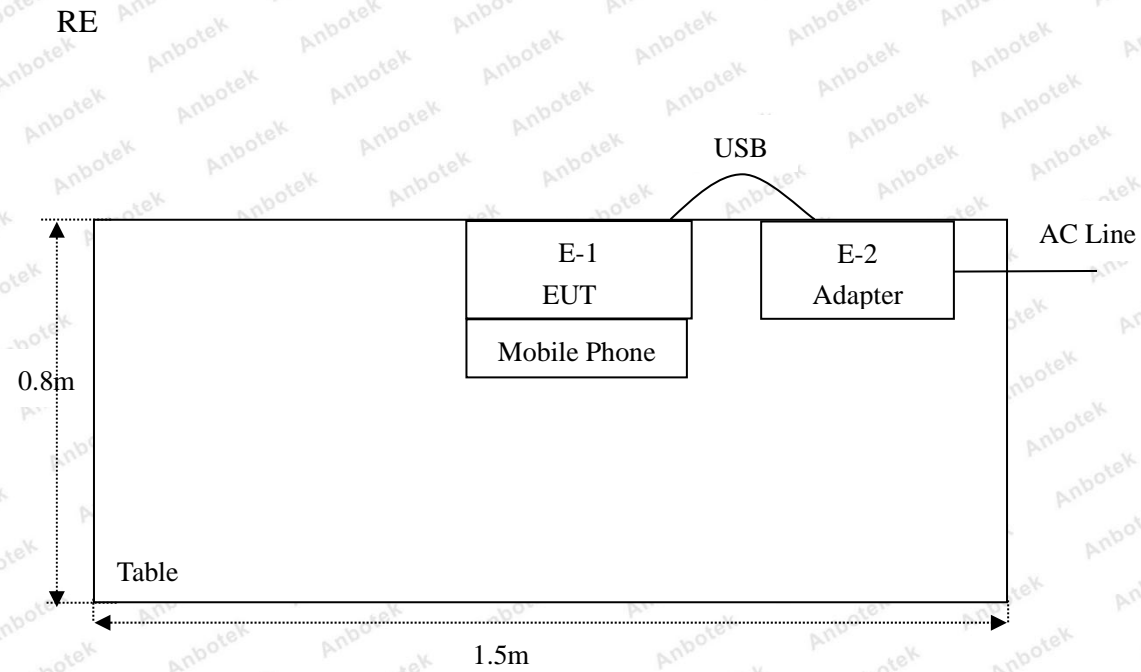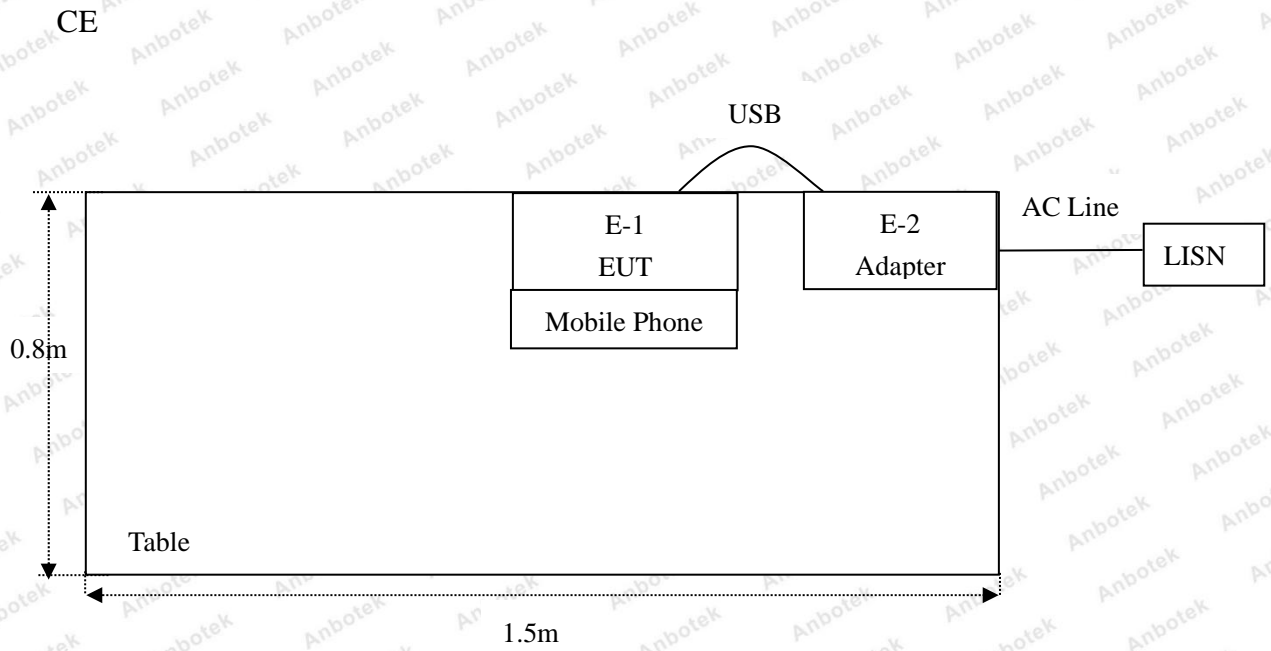

1.6. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Nov. 17, 2017	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Nov. 17, 2017	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Nov. 17, 2017	1 Year
4.	Spectrum Analysis	Agilent	E4407B	US39390582	Nov. 17, 2017	1 Year
5.	MAX Spectrum Analysis	Agilent	N9020A	MY51170037	Nov. 18, 2017	1 Year
6.	Preamplifier	SKET Electronic	BK1G18G30D	KD17503	Nov. 17, 2017	1 Year
7.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Nov. 20, 2017	1 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Nov. 20, 2017	1 Year
9.	Loop Antenna	Schwarzbeck	HFH2-Z2	100047	Nov. 17, 2017	1 Year
10.	Horn Antenna	Schwarzbeck	BBHA9170	9170-375	Nov. 17, 2017	1 Year
11.	Pre-amplifier	SONOMA	310N	186860	Nov. 17, 2017	1 Year
12.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
13.	RF Test Control System	YIHENG	YH3000	2017430	Nov. 18, 2017	1 Year
14.	Power Sensor	DAER	RPR3006W	15I00041SN045	Nov. 17, 2017	1 Year
15.	Power Sensor	DAER	RPR3006W	15I00041SN046	Nov. 17, 2017	1 Year
16.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Nov. 18, 2017	1 Year
17.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Nov. 18, 2017	1 Year
18.	Signal Generator	Agilent	E4421B	MY41000743	Nov. 18, 2017	1 Year
19.	DC Power Supply	LW	TPR-6410D	349315	Nov. 01, 2017	1 Year
20.	Constant Temperature Humidity Chamber	Sertep	ZJ-HWHS80B	ZJ-17042804	Nov. 01, 2017	1 Year

1.7. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, July 31, 2017.

ISED-Registration No.: 8058A-1

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A-1, June 13, 2016.

Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102

2. Summary of Test Results

Standard Section	Test Item	Result
FCC Part 15, Paragraph 15.207	Conducted Emission Test	PASS
FCC Part 15, Paragraph 15.209(a)(f)	Spurious Emission	PASS
Part 15.203	Antenna Requirement	PASS


3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
5MHz~30MHz	60	50	

Remark: (1) *Decreasing linearly with logarithm of the frequency.
(2) The lower limit shall apply at the transition frequency.

3.2. Test Setup

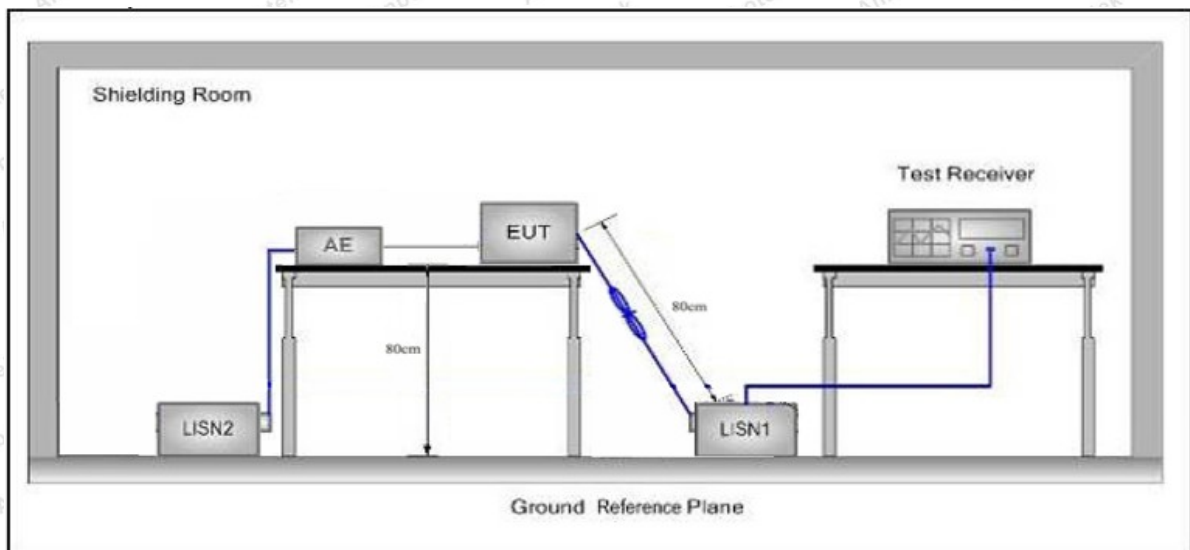

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.


The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data

Please to see the following pages

Conducted Emission Test Data


Test Site: 1# Shielded Room
 Operating Condition: TX Mode
 Test Specification: AC 240V, 60Hz for adapter
 Comment: Live Line
 Tem.: 23.1°C Hum.: 30%

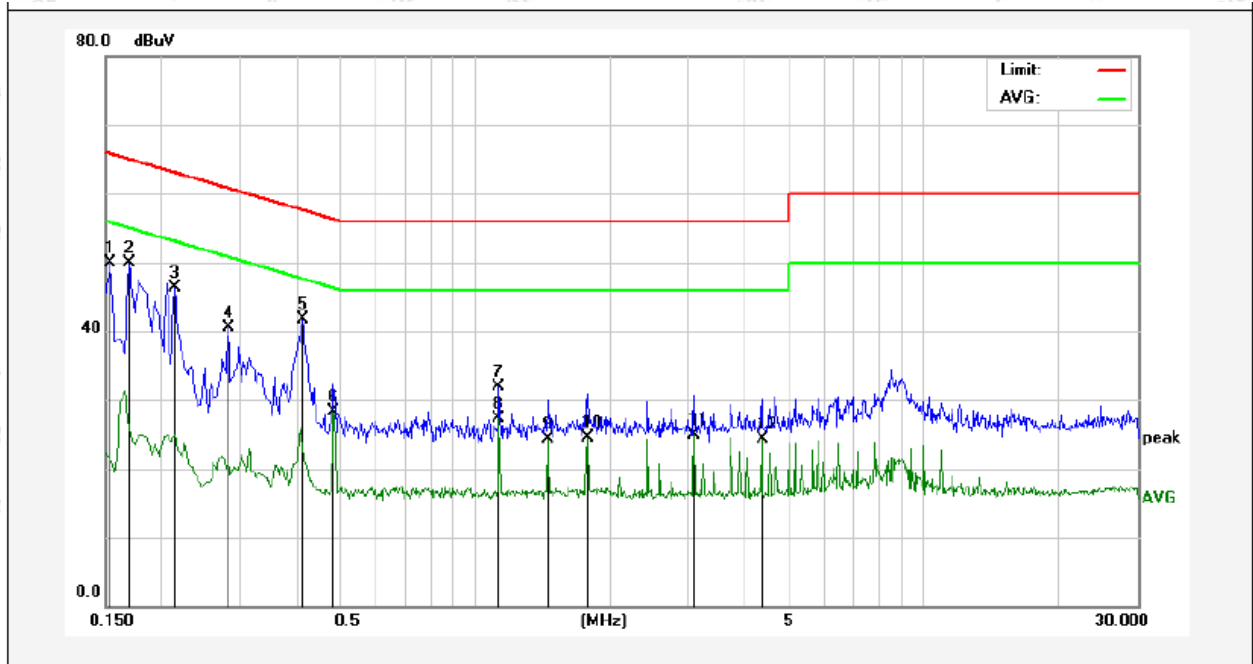

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1539	29.99	19.90	49.89	65.78	-15.89	QP	
2	0.1700	30.07	19.90	49.97	64.96	-14.99	QP	
3	0.2140	26.49	19.90	46.39	63.04	-16.65	QP	
4	0.2819	20.52	19.89	40.41	60.76	-20.35	QP	
5	0.4140	21.79	19.94	41.73	57.57	-15.84	QP	
6	0.4860	8.40	19.97	28.37	46.24	-17.87	AVG	
7	1.1340	11.84	20.12	31.96	56.00	-24.04	QP	
8	1.1340	7.09	20.12	27.21	46.00	-18.79	AVG	
9	1.4540	4.15	20.13	24.28	46.00	-21.72	AVG	
10	1.7820	4.41	20.14	24.55	46.00	-21.45	AVG	
11	3.0740	4.74	20.16	24.90	46.00	-21.10	AVG	
12	4.3700	4.15	20.19	24.34	46.00	-21.66	AVG	

Conducted Emission Test Data


Test Site: 1# Shielded Room
 Operating Condition: TX Mode
 Test Specification: AC 240V, 60Hz for adapter
 Comment: Neutral Line
 Tem.: 23.1°C Hum.: 30%

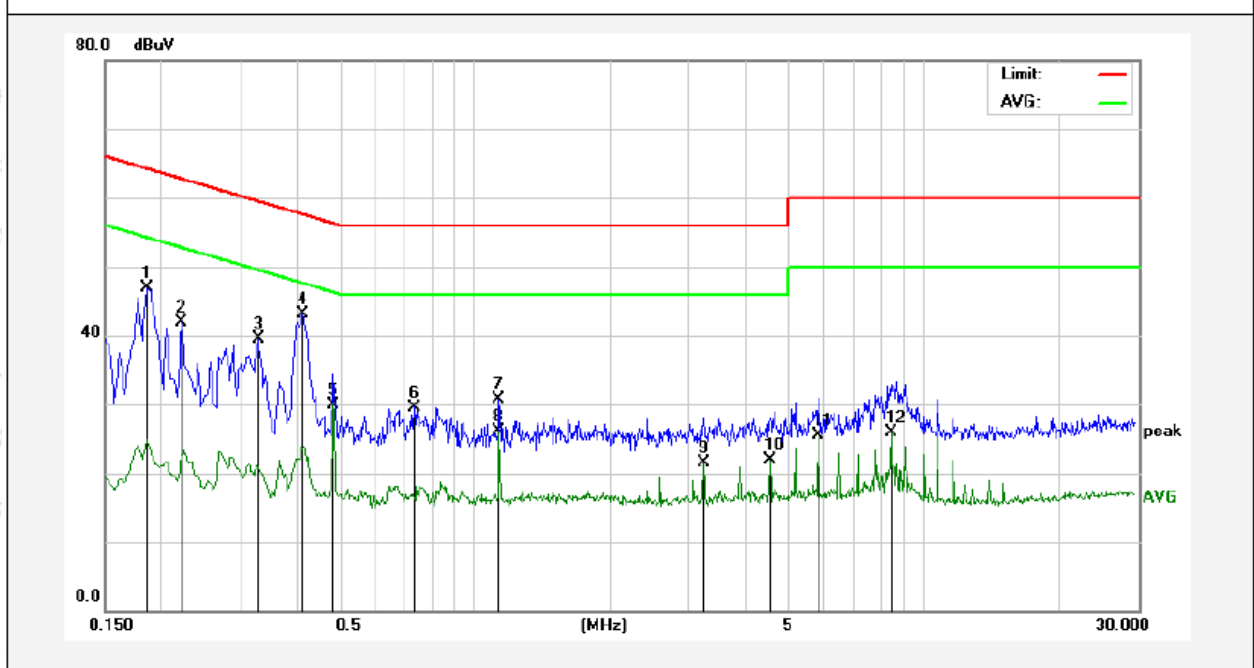

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1860	27.05	19.90	46.95	64.21	-17.26	QP	
2	0.2220	22.09	19.89	41.98	62.74	-20.76	QP	
3	0.3300	19.60	19.90	39.50	59.45	-19.95	QP	
4	0.4140	23.18	19.94	43.12	57.57	-14.45	QP	
5	0.4860	9.92	19.97	29.89	46.24	-16.35	AVG	
6	0.7340	9.55	20.05	29.60	56.00	-26.40	QP	
7	1.1340	10.58	20.12	30.70	56.00	-25.30	QP	
8	1.1340	6.01	20.12	26.13	46.00	-19.87	AVG	
9	3.2380	1.36	20.16	21.52	46.00	-24.48	AVG	
10	4.5300	1.77	20.19	21.96	46.00	-24.04	AVG	
11	5.8260	5.19	20.23	25.42	50.00	-24.58	AVG	
12	8.4180	5.58	20.30	25.88	50.00	-24.12	AVG	

Conducted Emission Test Data


Test Site: 1# Shielded Room
 Operating Condition: TX Mode
 Test Specification: AC 120V, 60Hz for adapter
 Comment: Live Line
 Tem.: 23.1°C Hum.: 30%

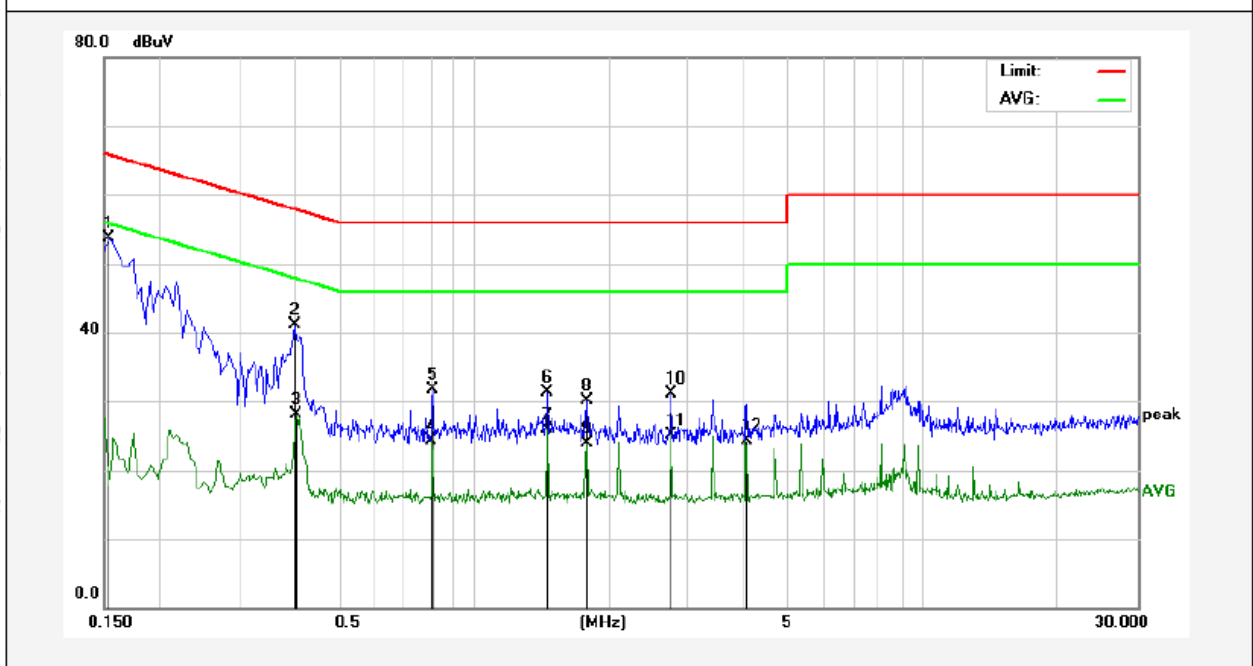

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1539	33.82	19.90	53.72	65.78	-12.06	QP	
2	0.3980	21.26	19.93	41.19	57.89	-16.70	QP	
3	0.4020	8.23	19.94	28.17	47.81	-19.64	AVG	
4	0.8059	4.18	20.07	24.25	46.00	-21.75	AVG	
5	0.8100	11.56	20.07	31.63	56.00	-24.37	QP	
6	1.4580	11.18	20.13	31.31	56.00	-24.69	QP	
7	1.4580	5.82	20.13	25.95	46.00	-20.05	AVG	
8	1.7820	9.87	20.14	30.01	56.00	-25.99	QP	
9	1.7820	3.70	20.14	23.84	46.00	-22.16	AVG	
10	2.7540	10.96	20.15	31.11	56.00	-24.89	QP	
11	2.7540	4.92	20.15	25.07	46.00	-20.93	AVG	
12	4.0460	4.04	20.18	24.22	46.00	-21.78	AVG	

Conducted Emission Test Data

Test Site: 1# Shielded Room
 Operating Condition: TX Mode
 Test Specification: AC 120V, 60Hz for adapter
 Comment: Neutral Line
 Tem.: 23.1°C Hum.: 30%

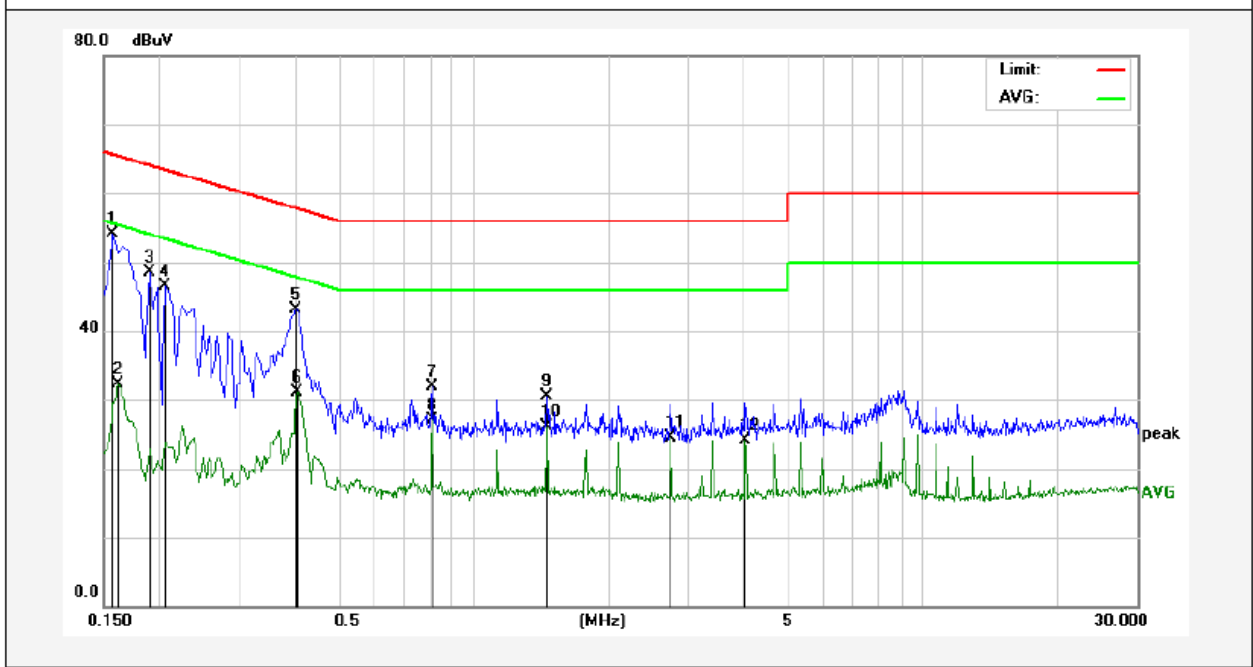

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1580	34.23	19.90	54.13	65.56	-11.43	QP	
2	0.1620	12.45	19.90	32.35	55.36	-23.01	AVG	
3	0.1900	28.55	19.90	48.45	64.03	-15.58	QP	
4	0.2060	26.64	19.90	46.54	63.36	-16.82	QP	
5	0.4020	23.22	19.94	43.16	57.81	-14.65	QP	
6	0.4060	11.18	19.94	31.12	47.73	-16.61	AVG	
7	0.8100	11.79	20.07	31.86	56.00	-24.14	QP	
8	0.8100	6.95	20.07	27.02	46.00	-18.98	AVG	
9	1.4580	10.31	20.13	30.44	56.00	-25.56	QP	
10	1.4580	5.93	20.13	26.06	46.00	-19.94	AVG	
11	2.7540	4.27	20.15	24.42	46.00	-21.58	AVG	
12	4.0460	3.98	20.18	24.16	46.00	-21.84	AVG	

4. Radiation Spurious Emission and Band Edge

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
-		-	74.0	Peak	3

Remark:
 (1)The lower limit shall apply at the transition frequency.
 (2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

4.2. Test Setup

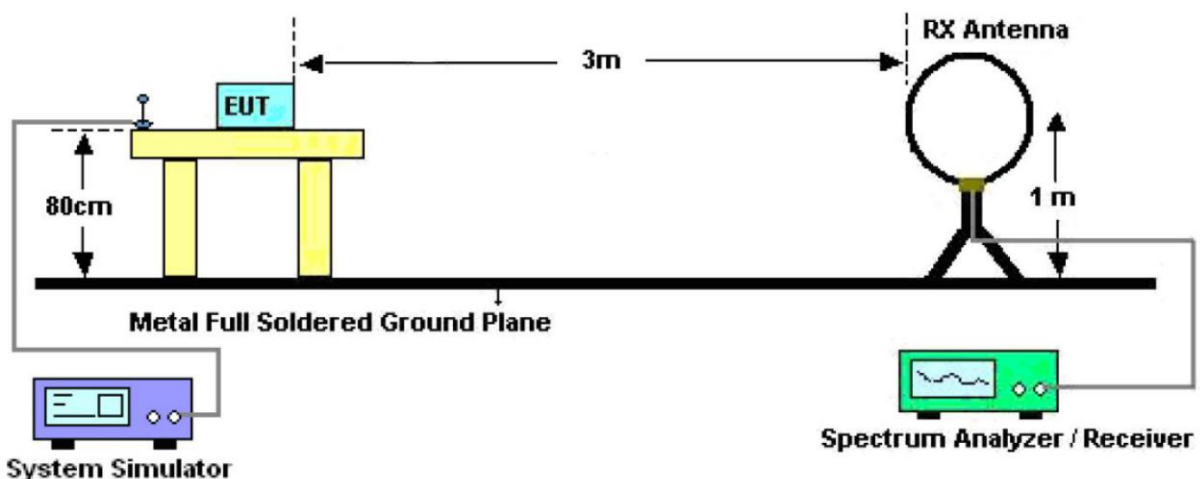


Figure 1. Below 30MHz

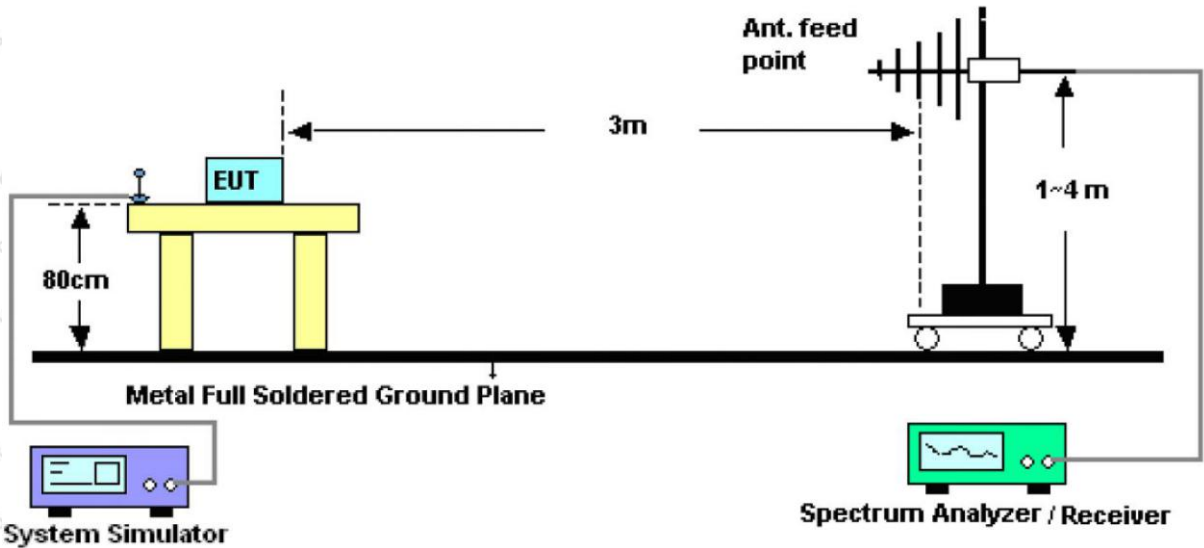


Figure 2. 30MHz to 1GHz

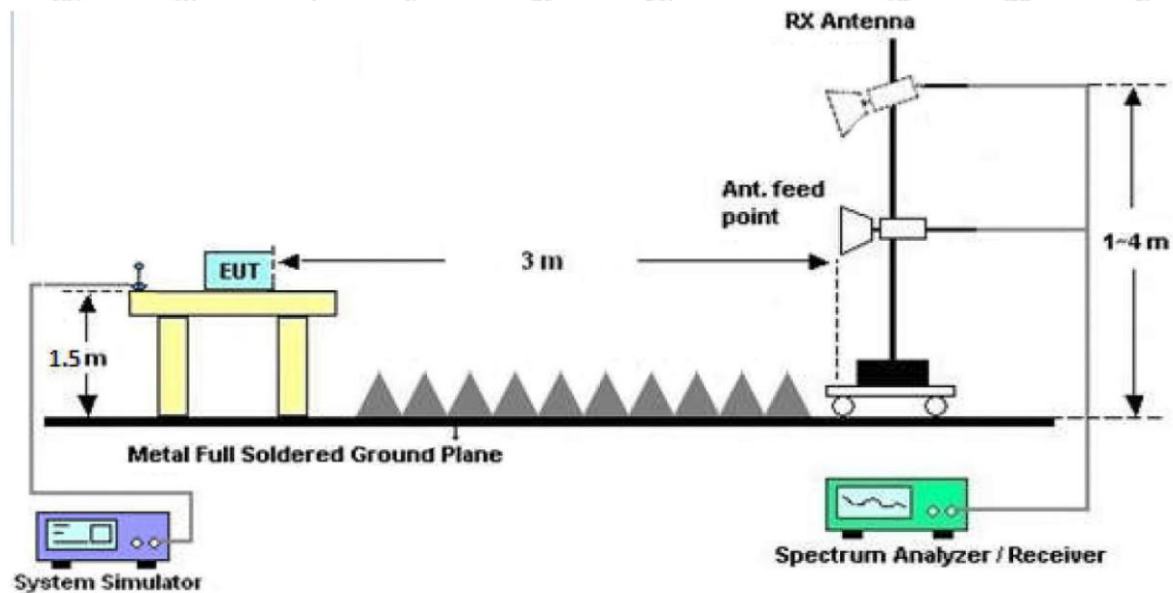


Figure 3. Above 1 GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW =1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW = 30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.


4.4. Test Data

PASS

Test Results

(Between 9KHz – 30MHz)

Job No.:	SZAWW181018008-01	Power Source:	AC 120V, 60Hz for adapter
Standard:	FCC PART15 C _3m	Temp.(C)/Hum.(%RH):	24.7°C/51%RH
Test item:	Radiation Test	Distance:	3m
Test Mode:	Mode 1		

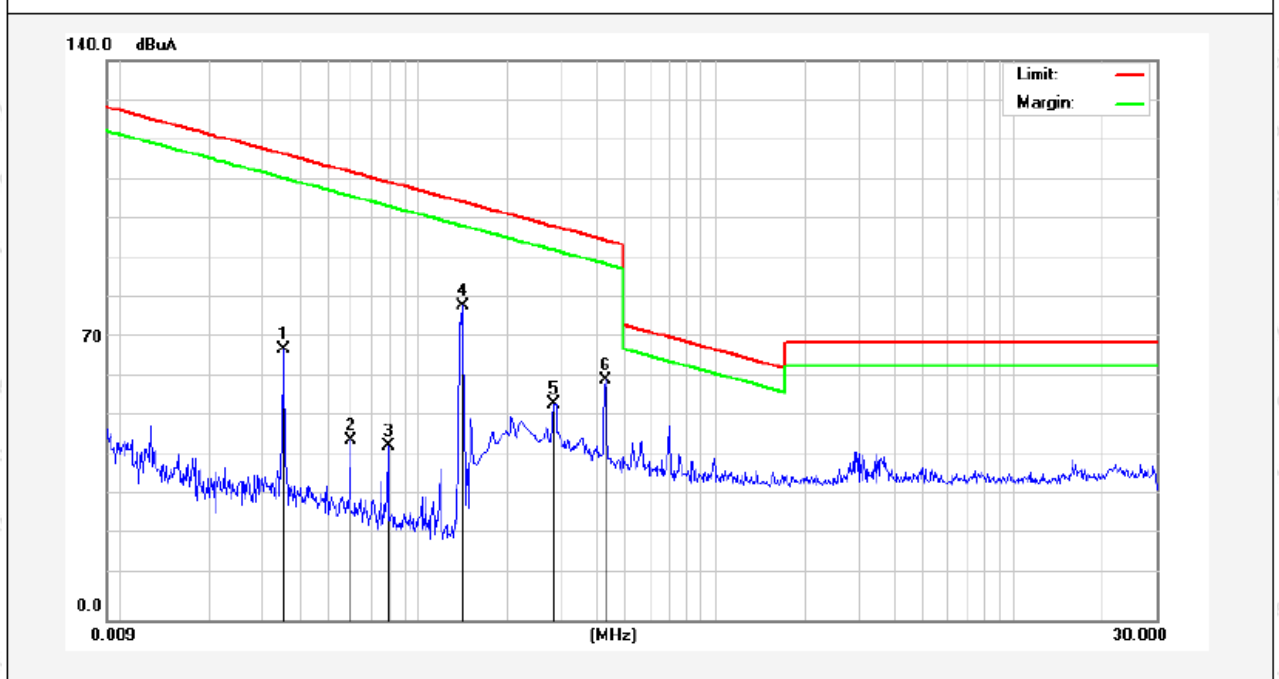


Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	degree (dgc)
0.0353	55.03	19.28	2.53	0	76.84	136.52	-59.68	Peak	324
0.0353	45.77	19.28	2.53	0	67.58	116.52	-48.94	AV	324
0.0593	33.03	19.30	2.54	0	54.87	132.04	-77.17	Peak	51
0.0593	23.29	19.30	2.54	0	45.13	112.04	-66.91	AV	51
0.0793	32.83	19.30	2.54	0	54.67	129.53	-74.86	Peak	174
0.0793	21.60	19.30	2.54	0	43.44	109.53	-66.09	AV	174
0.1409	65.49	19.53	2.59	0	87.61	124.56	-36.95	Peak	261
0.1409	56.35	19.53	2.59	0	78.47	104.56	-26.09	AV	261
0.2860	41.62	19.53	2.59	0	63.74	118.45	-54.71	Peak	173
0.2860	31.96	19.53	2.59	0	54.08	98.45	-44.37	AV	173
0.4260	45.31	19.53	2.59	0	67.43	115.01	-47.58	Peak	283
0.4260	37.98	19.53	2.59	0	60.10	95.01	-34.91	AV	283

Remark: According to FCC PART 15.209 (d), the emission limits for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, Radiated emission limits in these three bands are based on measurements employing an average detector.


(Between 30MHz -1000 MHz)

Job No.:	SZAWW181018008-01	Polarization:	Horizontal
Standard:	FCC PART15 C _3m	Power Source:	AC 120V, 60Hz for adapter
Test item:	Radiation Test	Temp.(C)/Hum.(%RH):	24.7°C/54%RH
Test Mode:	Mode 1	Distance:	3m

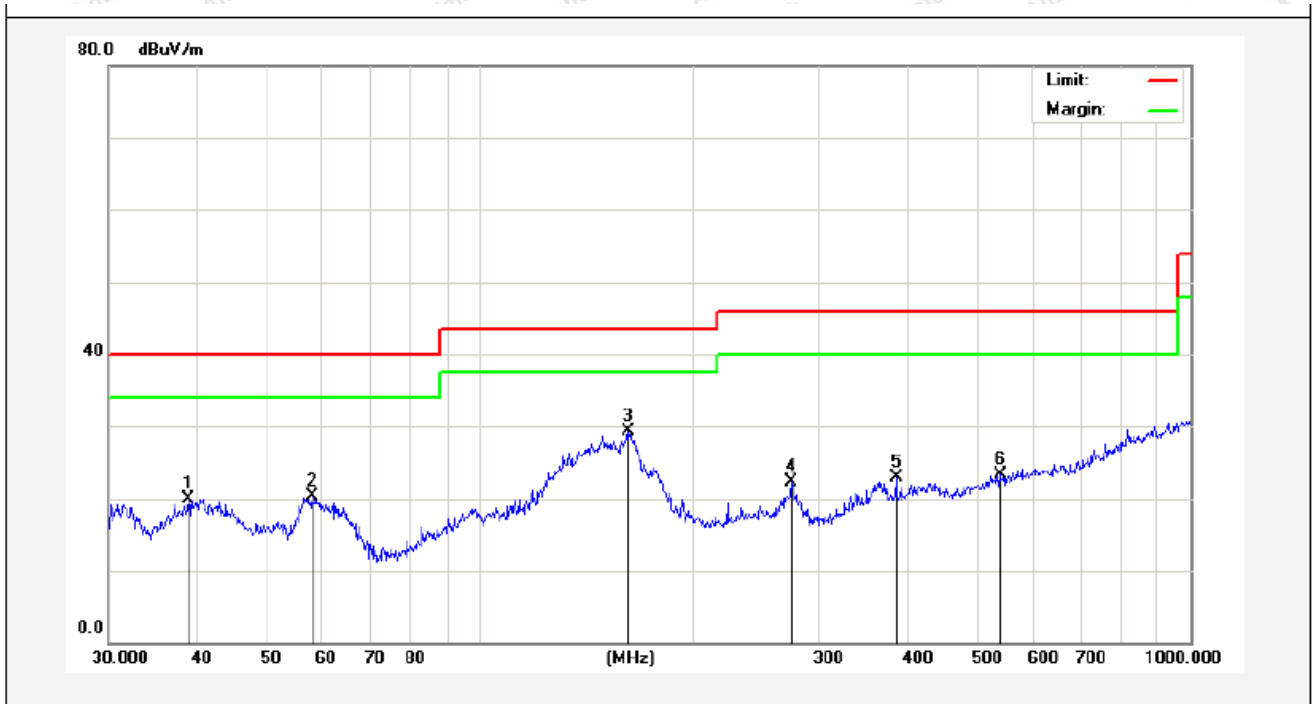


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	38.8878	34.90	-14.97	19.93	40.00	-20.07	QP	300	0	
2	57.9993	38.23	-17.89	20.34	40.00	-19.66	QP	300	56	
3	161.4742	50.93	-21.68	29.25	43.50	-14.25	QP	300	107	
4	274.1939	41.57	-19.19	22.38	46.00	-23.62	QP	300	166	
5	385.2805	36.16	-13.31	22.85	46.00	-23.15	QP	300	252	
6	539.4775	34.32	-11.07	23.25	46.00	-22.75	QP	300	360	

Job No.: SZAWW181018008-01 **Polarization:** Vertical
Standard: FCC PART15 C _3m **Power Source:** AC 120V, 60Hz for adapter
Test item: Radiation Test **Temp.(C)/Hum.(%RH):** 24.7°C/54%RH
Test Mode: Mode 1 **Distance:** 3m

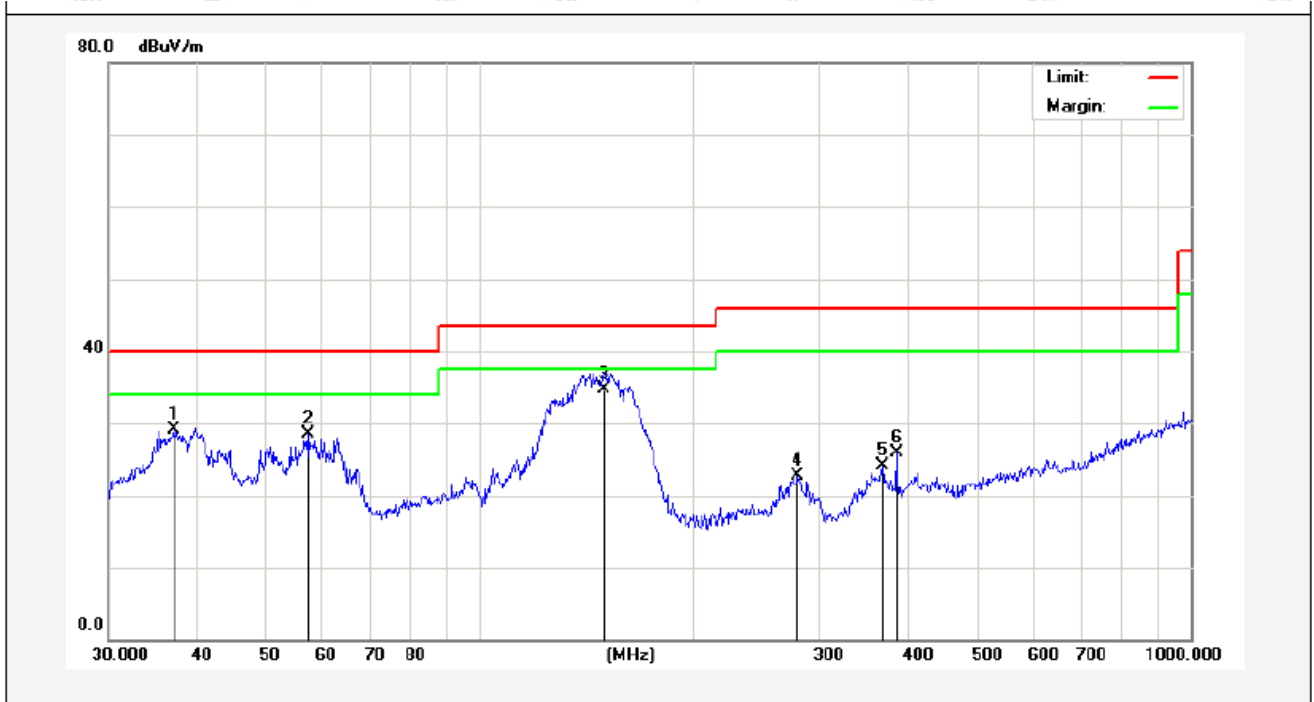


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	37.0248	44.18	-14.98	29.20	40.00	-10.80	QP	300	0	
2	57.1914	45.34	-16.84	28.50	40.00	-11.50	QP	300	57	
3	149.4857	53.03	-18.34	34.69	43.50	-8.81	QP	300	103	
4	280.0237	38.74	-16.03	22.71	46.00	-23.29	QP	300	193	
5	368.1116	36.98	-12.82	24.16	46.00	-21.84	QP	300	252	
6	385.2805	38.31	-12.31	26.00	46.00	-20.00	QP	300	360	

Job No.:	SZAWW181018008-01	Polarization:	Horizontal
Standard:	FCC PART15 C _3m	Power Source:	AC 240V, 60Hz for adapter
Test item:	Radiation Test	Temp.(C)/Hum.(%RH):	24.7°C/54%RH
Test Mode:	Mode 1	Distance:	3m

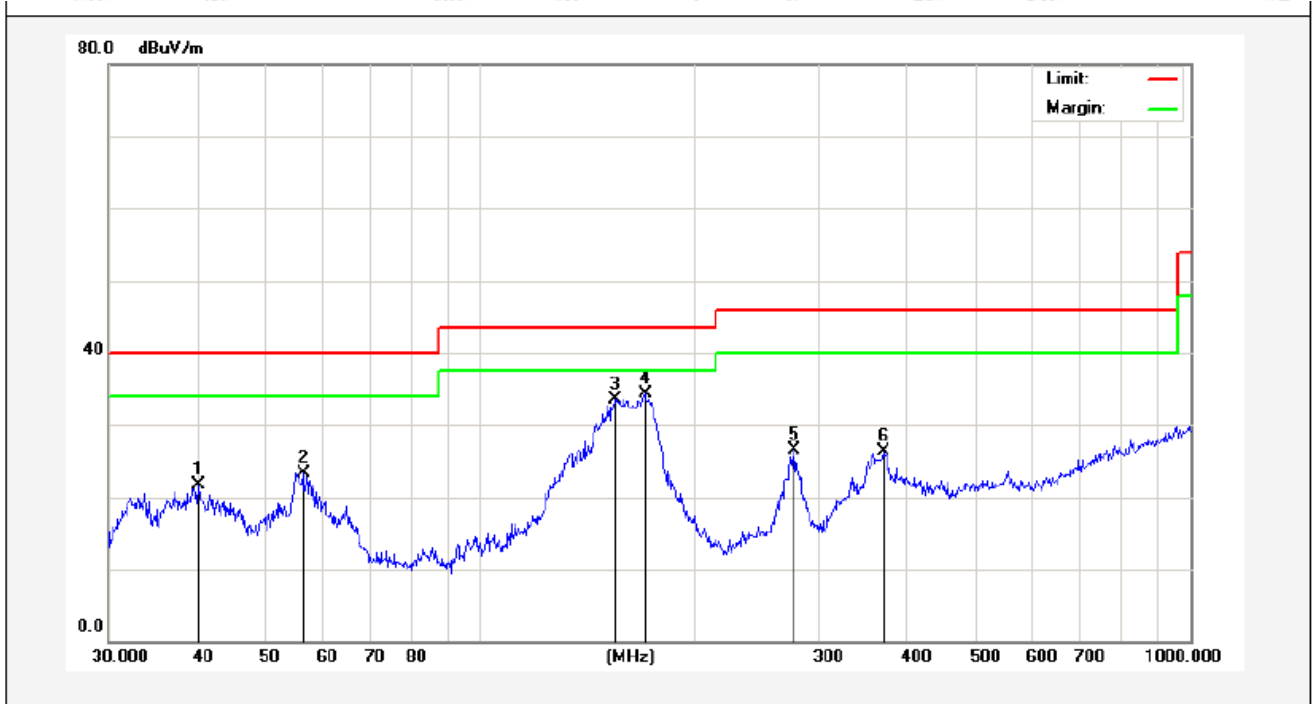

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	40.1347	36.13	-14.41	21.72	40.00	-18.28	QP	300	0	
2	56.3948	41.20	-17.80	23.40	40.00	-16.60	QP	300	36	
3	154.8204	55.64	-22.11	33.53	43.50	-9.97	QP	300	141	
4	170.7926	54.96	-20.58	34.38	43.50	-9.12	QP	300	242	
5	277.0935	45.53	-19.11	26.42	46.00	-19.58	QP	300	300	
6	369.4047	40.06	-13.79	26.27	46.00	-19.73	QP	300	360	

Job No.: SZAWW181018008-01 **Polarization:** Vertical
Standard: FCC PART15 C _3m **Power Source:** AC 240V, 60Hz for adapter
Test item: Radiation Test **Temp.(C)/Hum.(%RH):** 24.7°C/54%RH
Test Mode: Mode 1 **Distance:** 3m

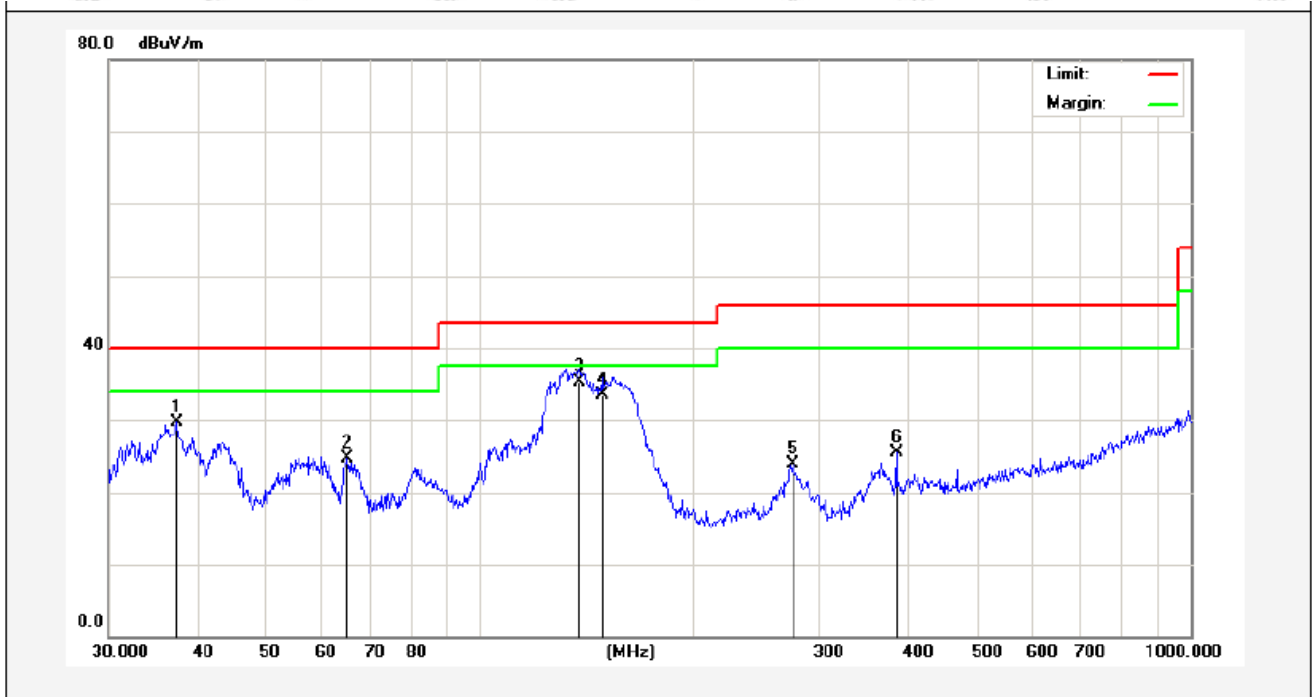

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	37.4164	44.42	-14.77	29.65	40.00	-10.35	QP	300	0	
2	65.1145	43.52	-18.91	24.61	40.00	-15.39	QP	300	21	
3	137.9028	53.61	-18.35	35.26	43.50	-8.24	QP	300	96	
4	148.4410	51.93	-18.36	33.57	43.50	-9.93	QP	300	154	
5	275.1569	39.51	-15.68	23.83	46.00	-22.17	QP	300	220	
6	385.2805	37.87	-12.31	25.56	46.00	-20.44	QP	300	360	


5. Antenna Requirement

5.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203
Requirement	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard

5.2. Antenna Connected Construction

The antenna is a Inductive loop coil Antenna which permanently attached, and the best case gain of the antenna is 0 dBi. It complies with the standard requirement.

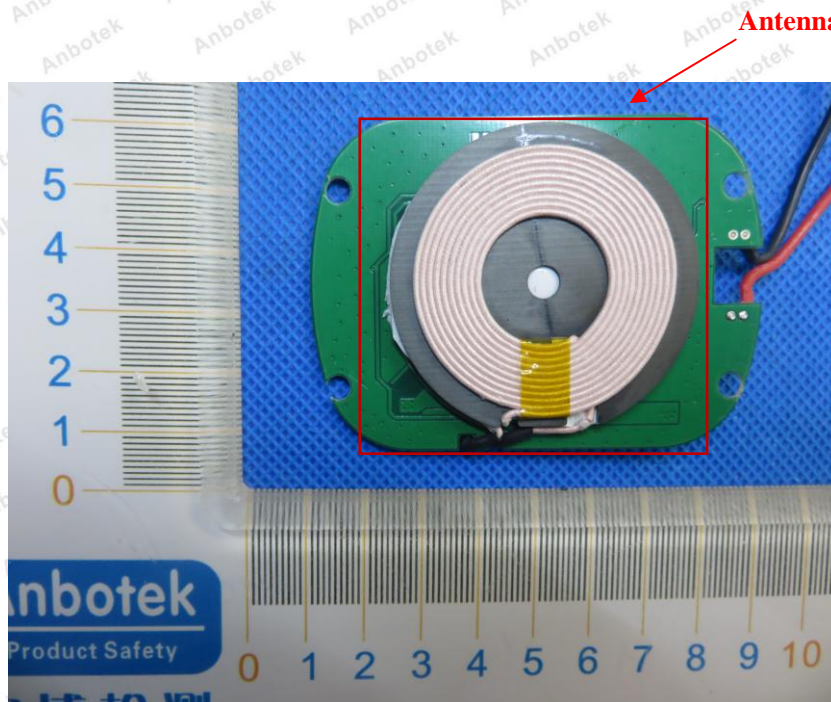



APPENDIX I-- TEST SETUP PHOTOGRAPH

Photo of Conducted Emission Measurement






Photo of Radiation Emission Test


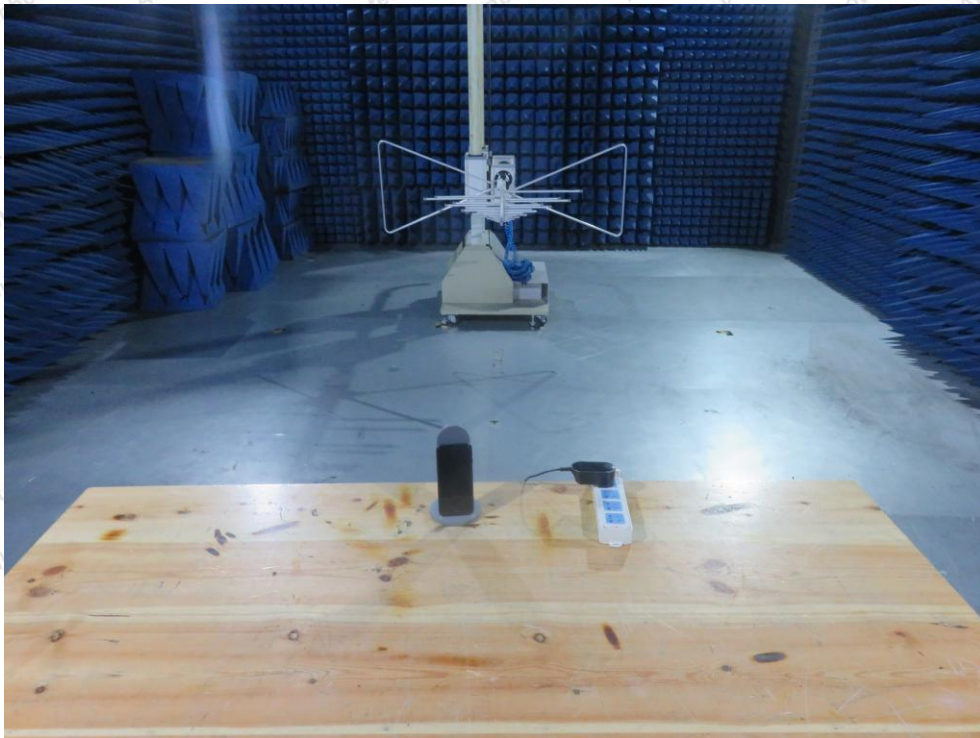


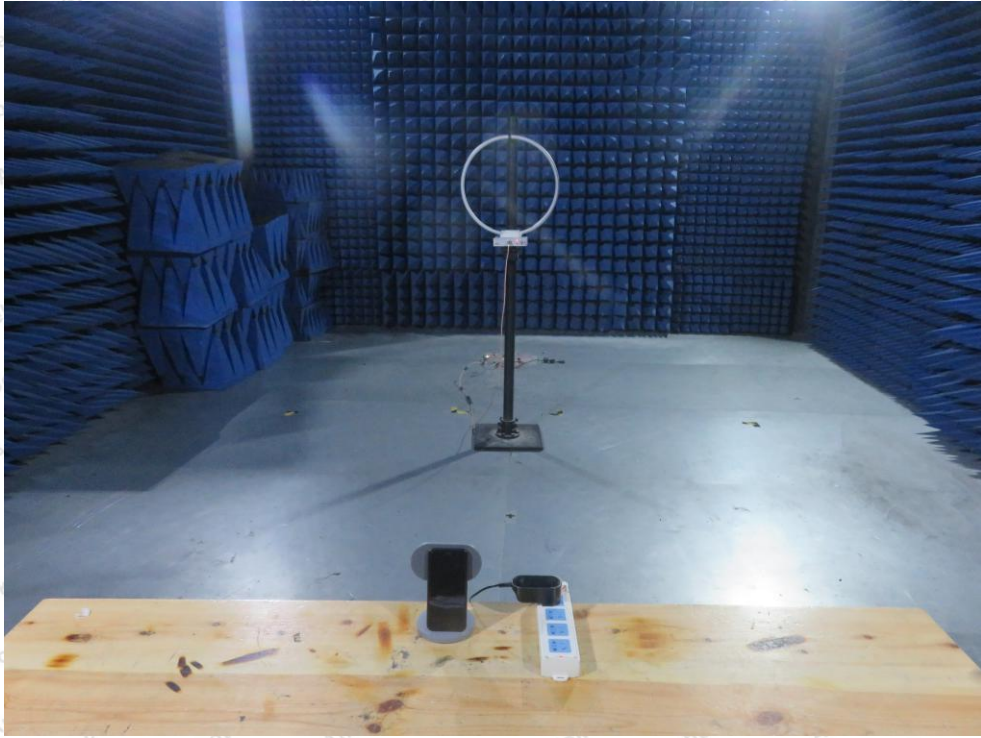


APPENDIX II -- EXTERNAL PHOTOGRAPH

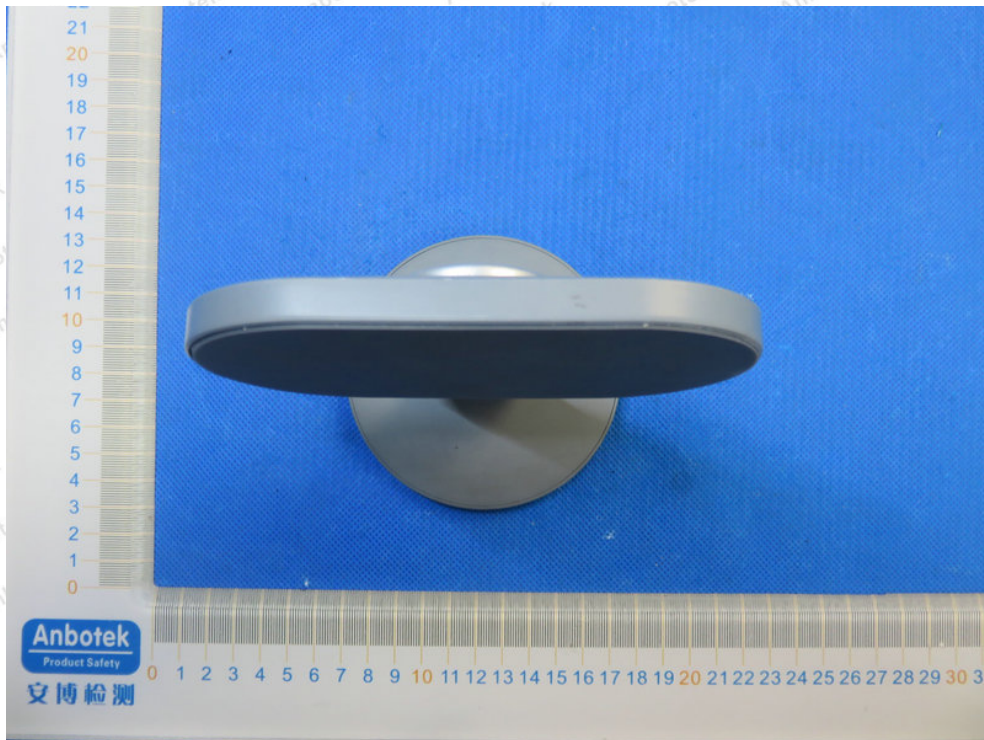


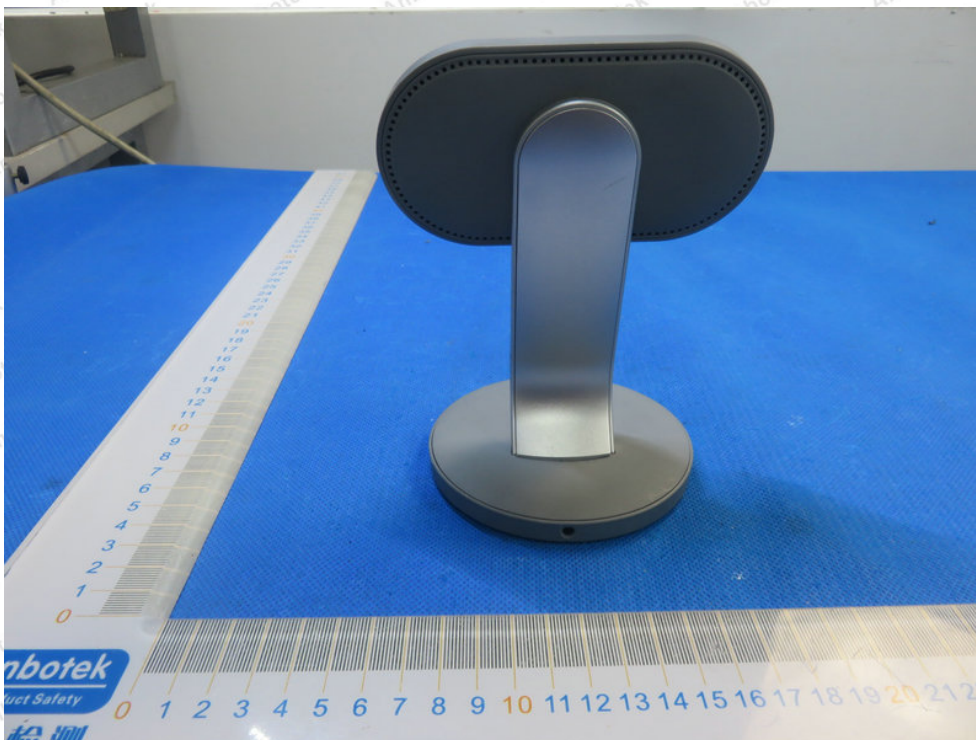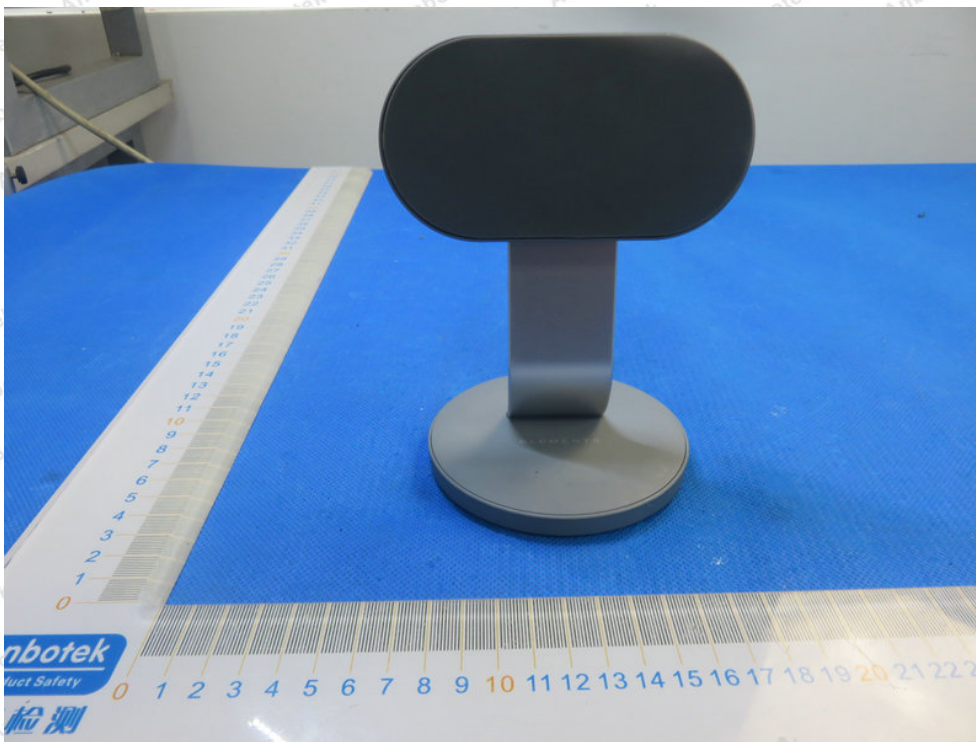

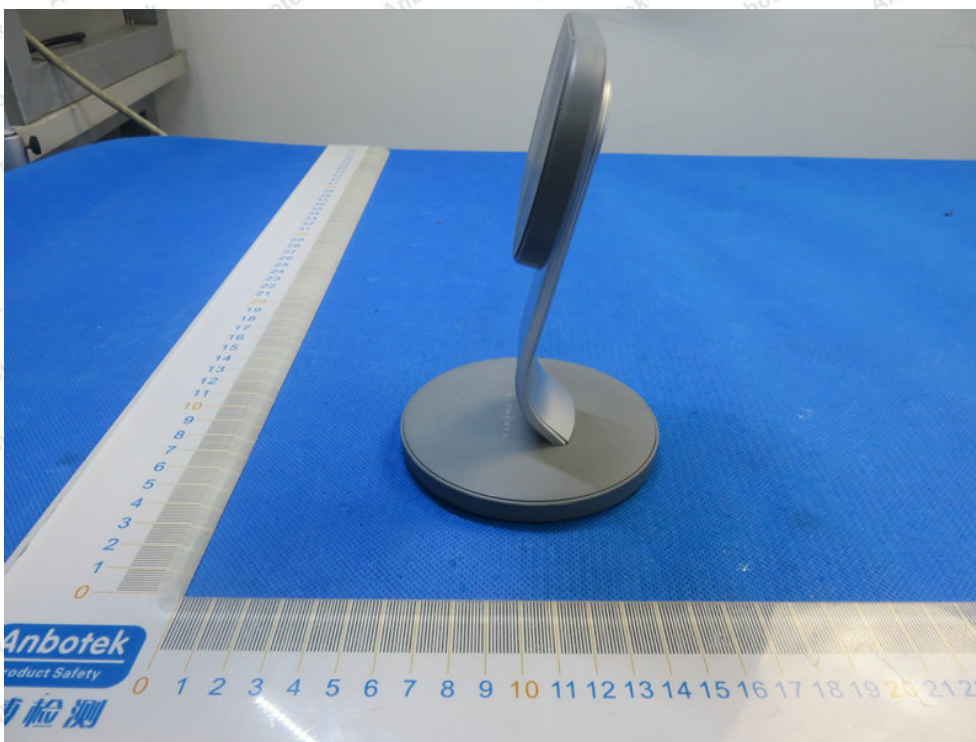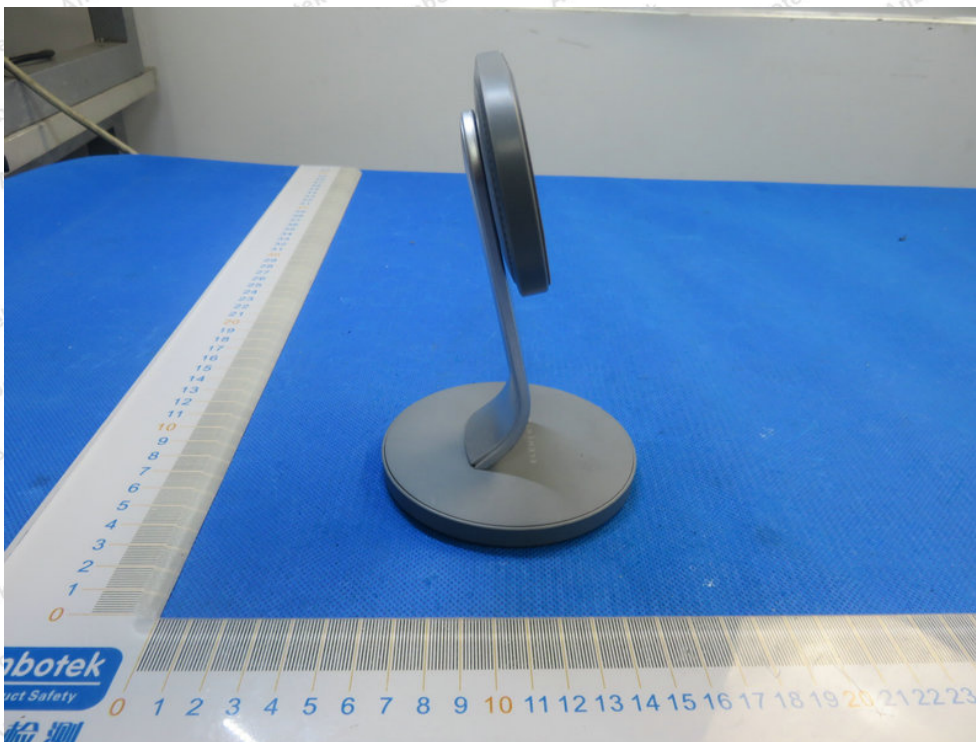

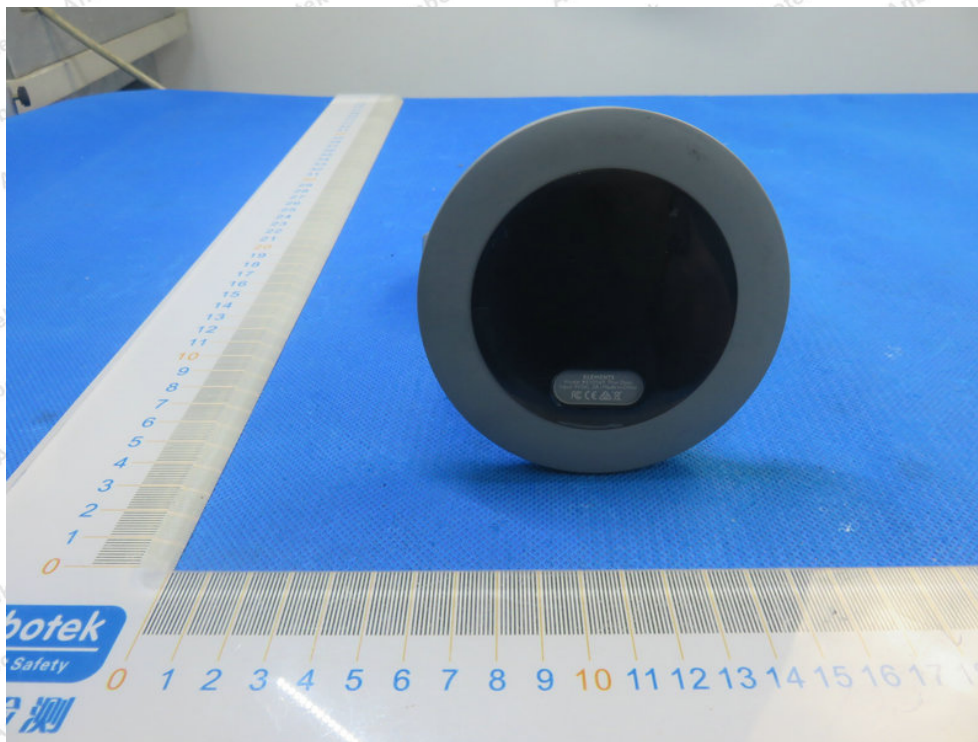







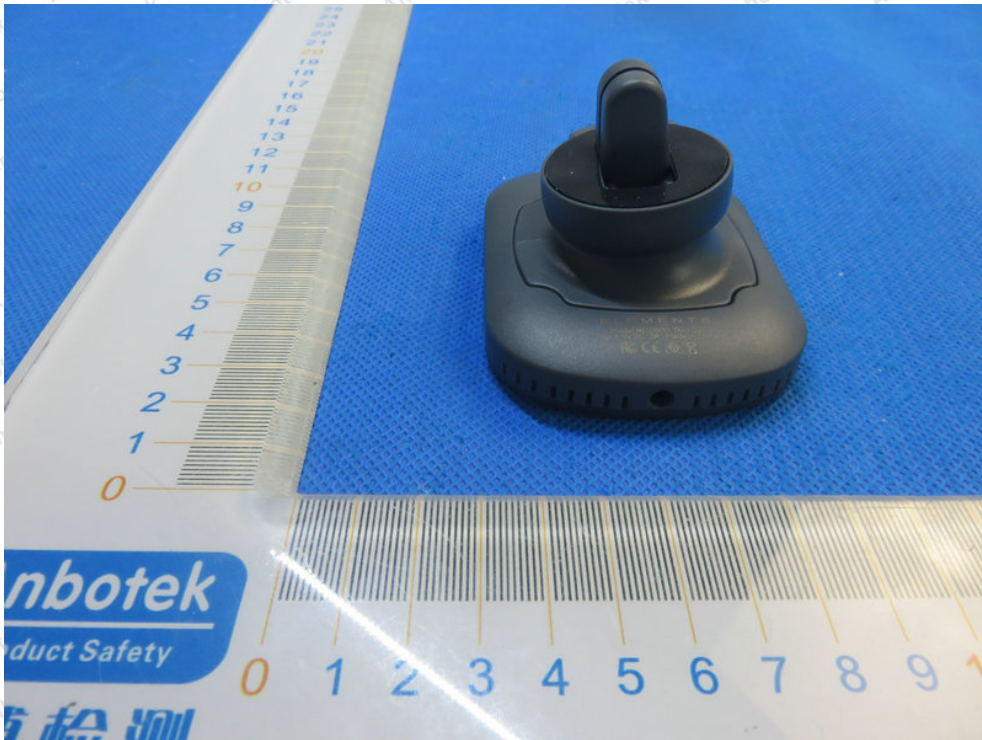








APPENDIX III -- INTERNAL PHOTOGRAPH

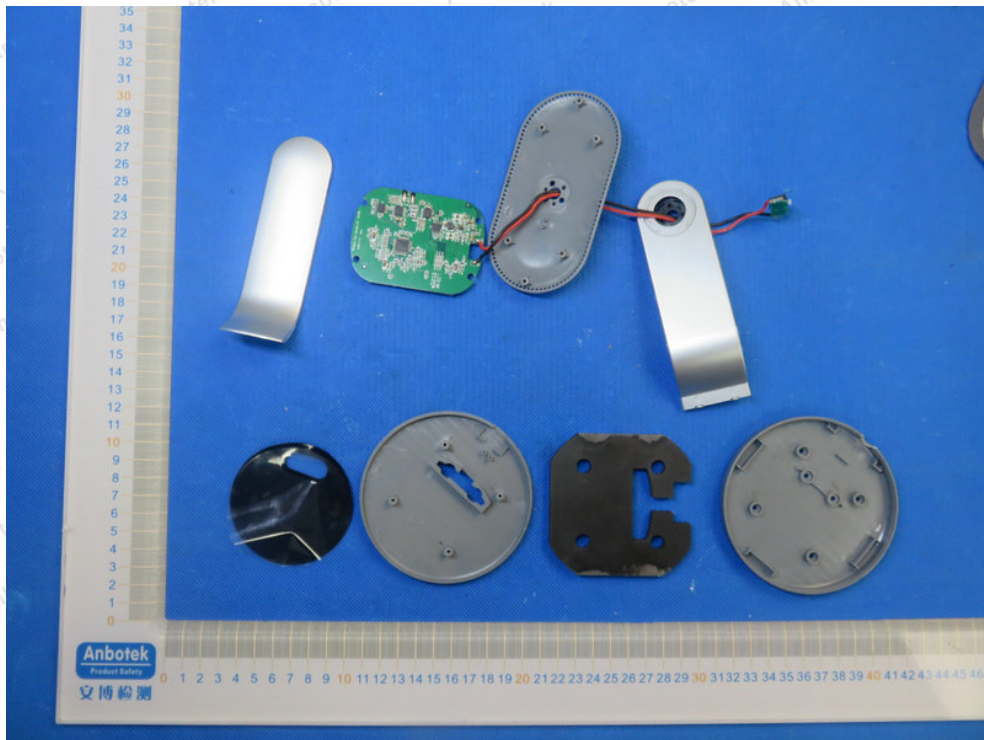


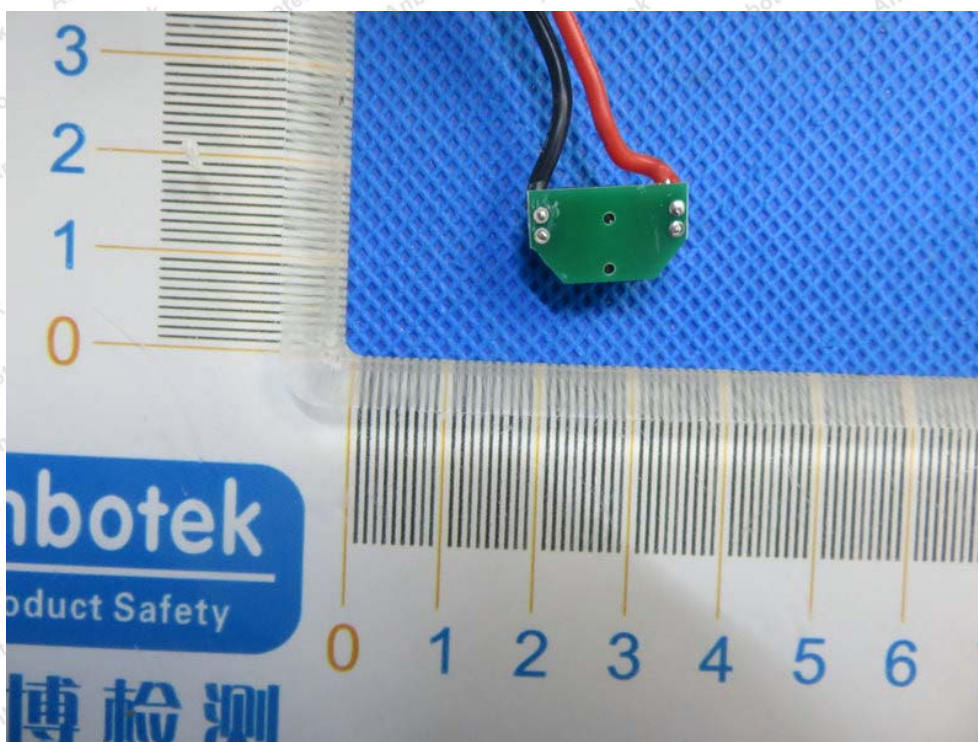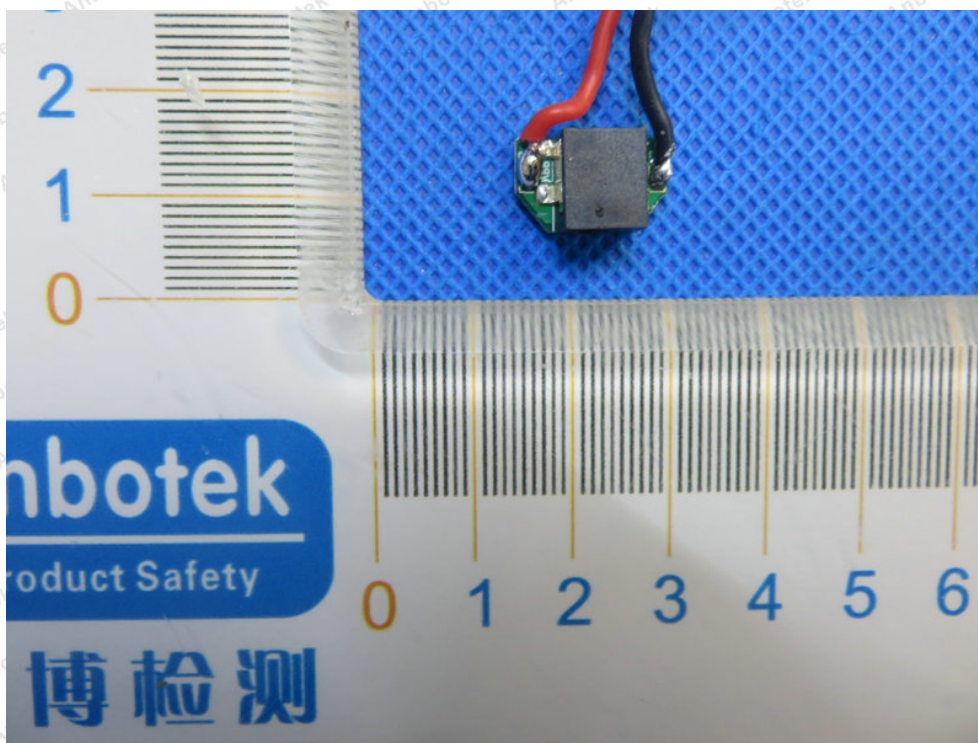

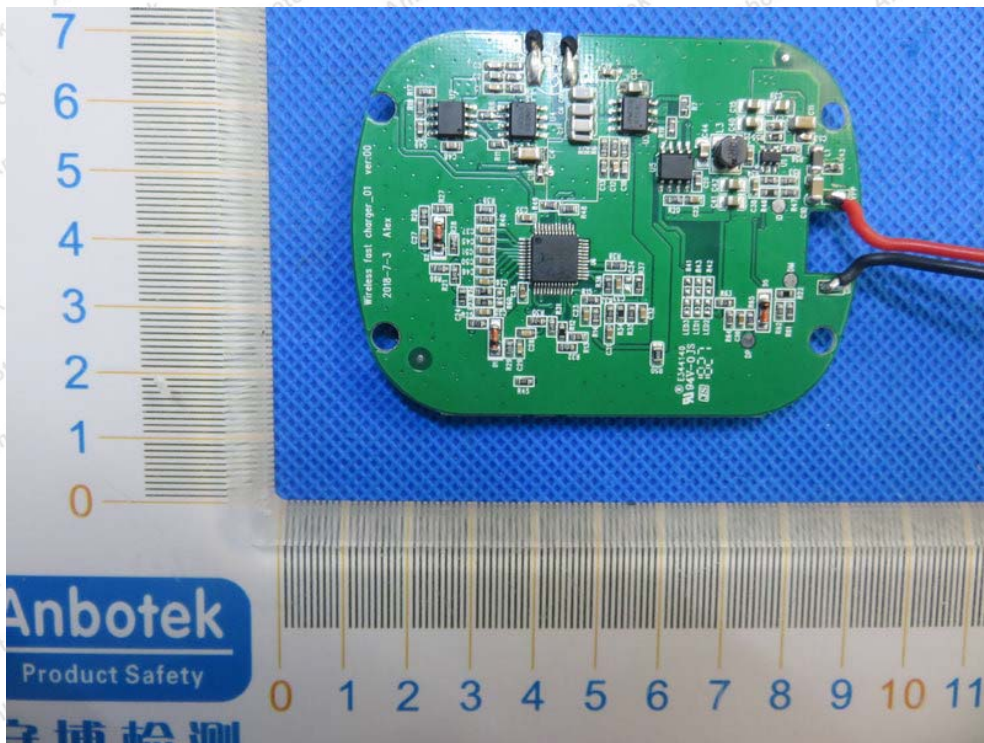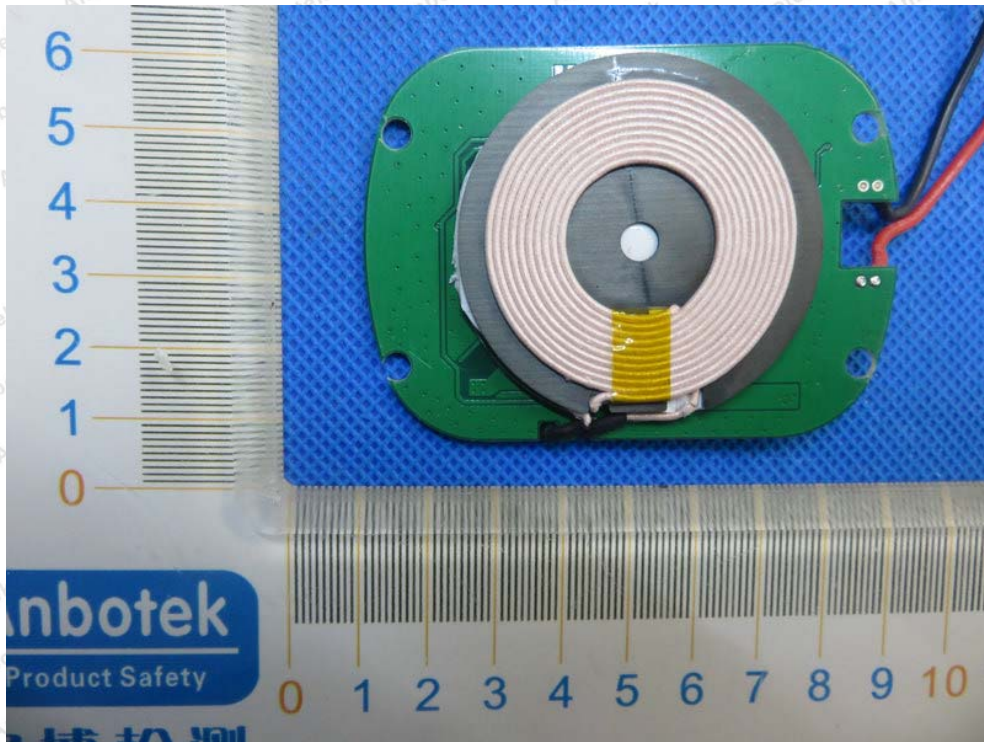

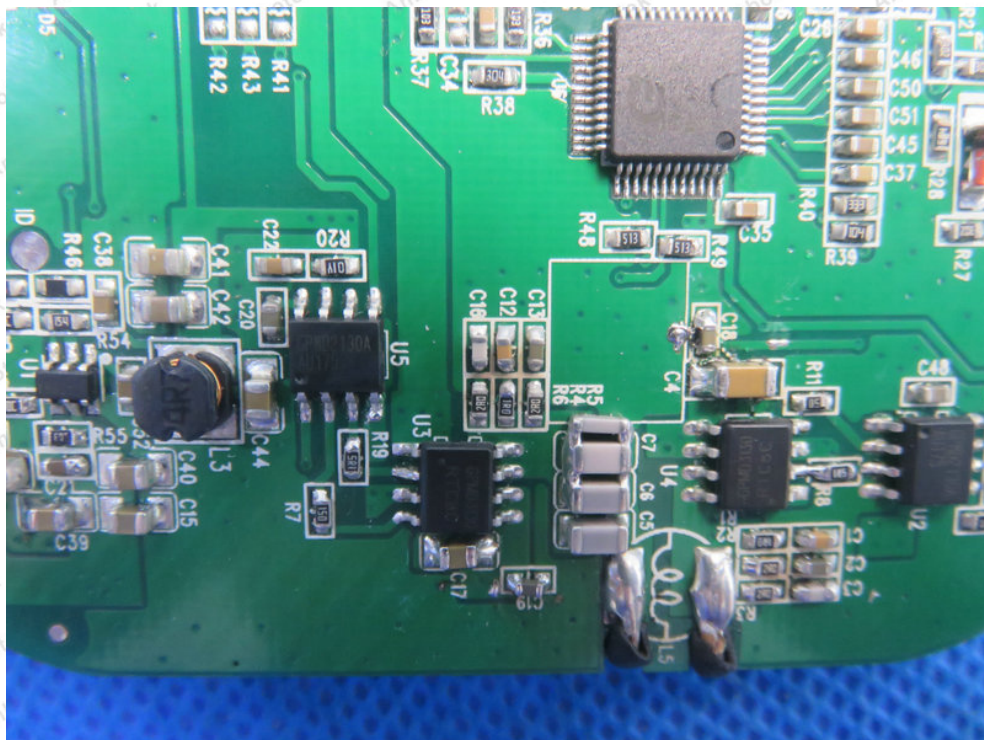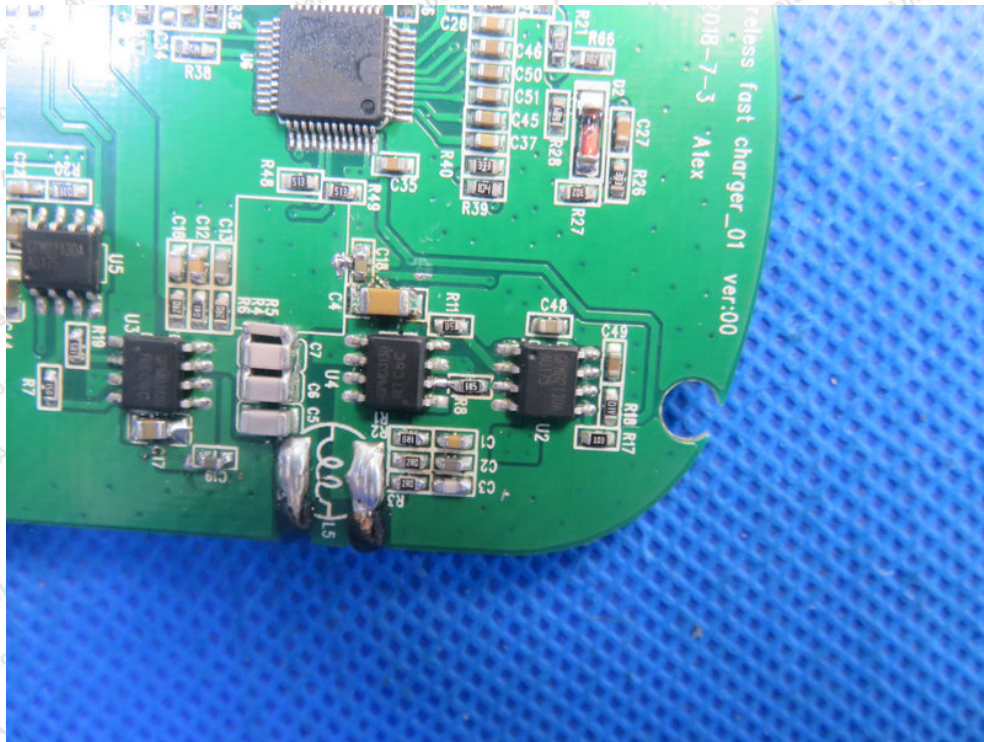

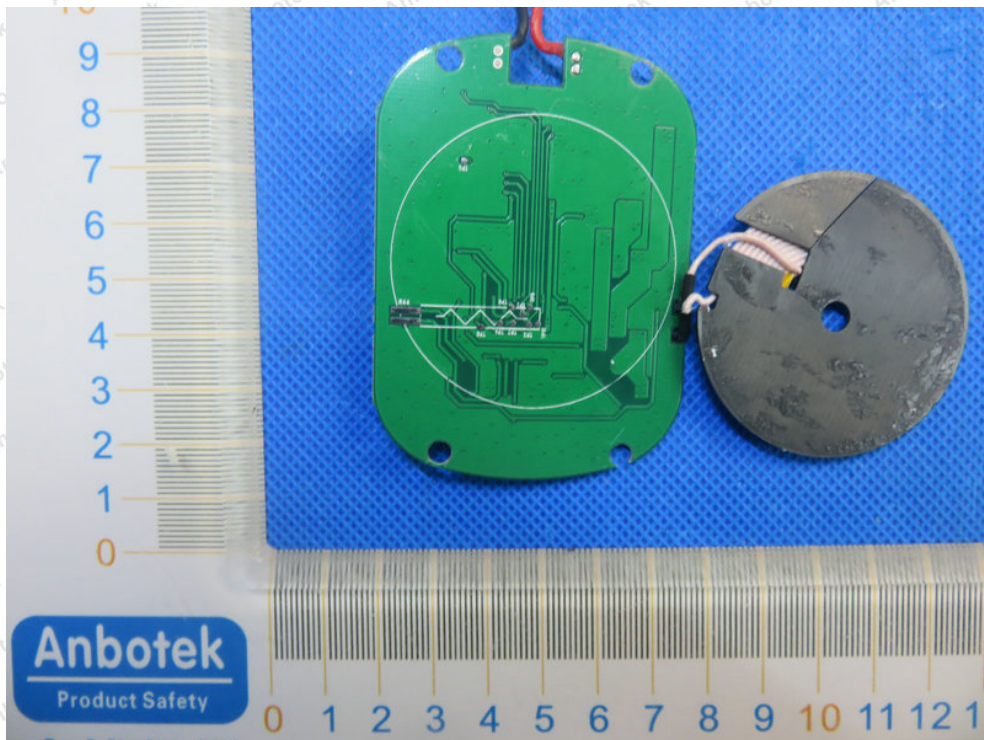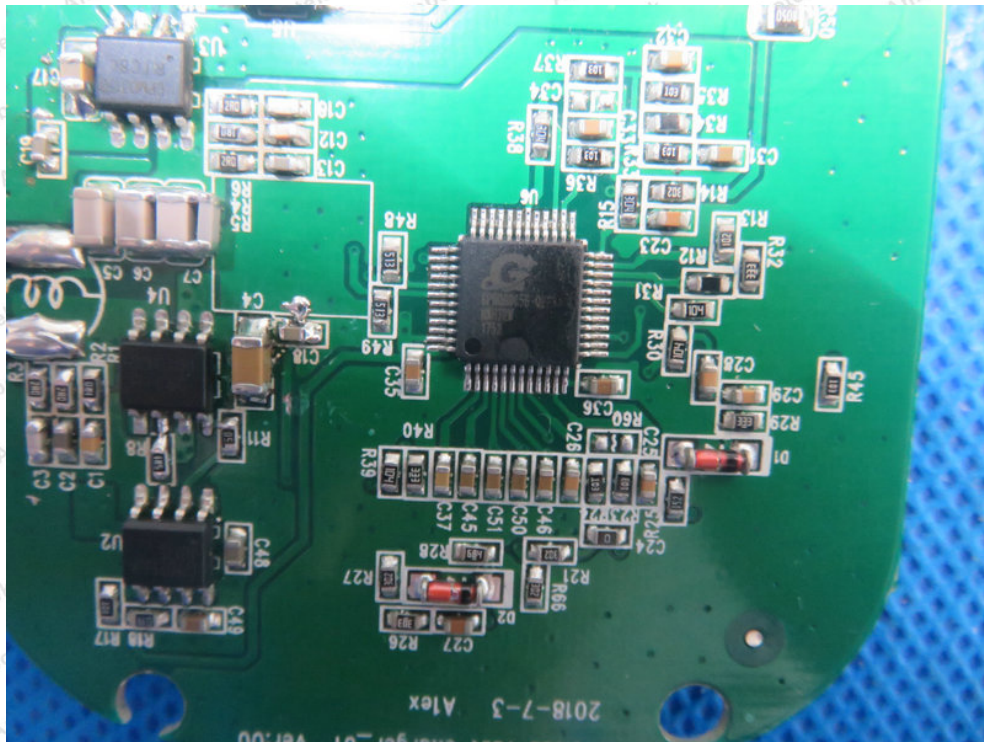

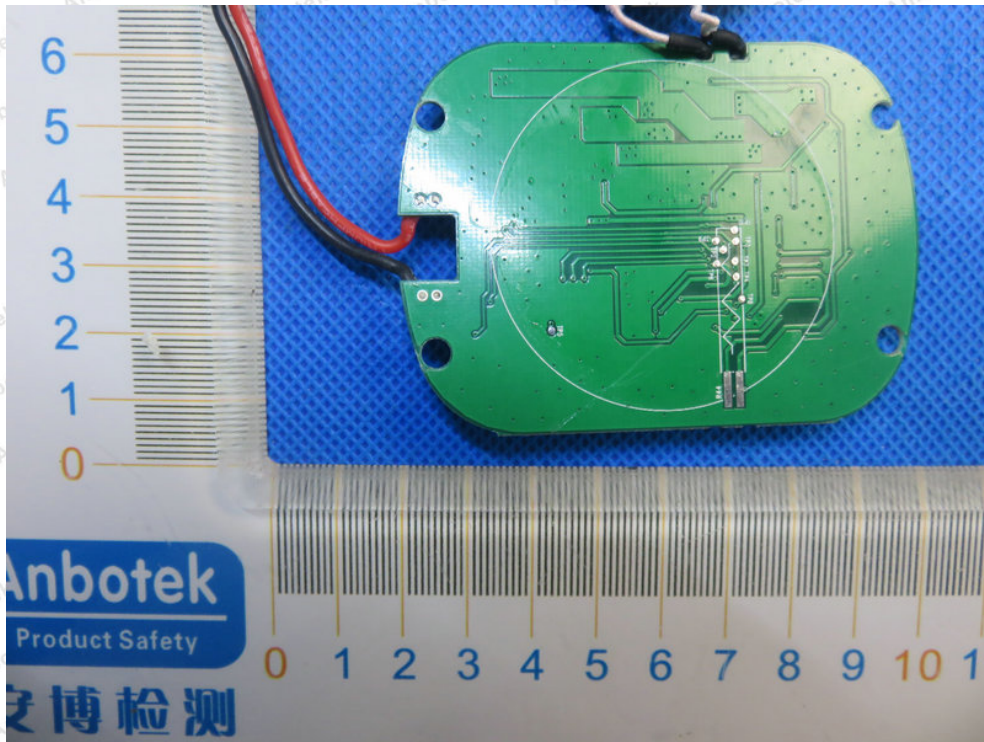

-----End of Report-----