

TEST REPORT

Applicant Name: Meizhou Guo Wei Electronics Co., Ltd.
Address: AD1 Section, Economic Development Area, Dongsheng Industrial District, Meizhou, Guangdong, China.
Report Number: 2401T74718E-RFA
FCC ID: 2ARRB-MB125
IC: 20353-MB125

Test Standard (s)

FCC PART 15.247; RSS-GEN ISSUE 5, FEBRUARY 2021 AMENDMENT 2;
RSS-247 ISSUE 3, AUGUST 2023

Sample Description

Product Type: TRUE WIRELESS EARBUDS
Model No.: MOTO BUDS 125
Multiple Model(s) No.: N/A
Trade Mark: Motorola
Date Received: 2024/05/11
Issue Date: 2024/09/02

| | |
|--------------|-------|
| Test Result: | Pass▲ |
|--------------|-------|

▲ In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Jojo Guo

Jojo Guo
RF Engineer

Approved By:

Nancy Wang

Nancy Wang
RF Supervisor

Note: The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.

This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

Bay Area Compliance Laboratories Corp. (Shenzhen)

5F(B-West), 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China
Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY4

GENERAL INFORMATION.....5

 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....5

 OBJECTIVE5

 TEST METHODOLOGY5

 MEASUREMENT UNCERTAINTY6

 TEST FACILITY6

SYSTEM TEST CONFIGURATION.....7

 DESCRIPTION OF TEST CONFIGURATION7

 EQUIPMENT MODIFICATIONS7

 EUT EXERCISE SOFTWARE7

 DUTY CYCLE8

 SUPPORT EQUIPMENT LIST AND DETAILS9

 EXTERNAL I/O CABLE.....9

 BLOCK DIAGRAM OF TEST SETUP10

SUMMARY OF TEST RESULTS11

TEST EQUIPMENT LIST12

FCC§15.247 (I), §1.1307 (B) (1) &§2.1093 - RF EXPOSURE.....13

 APPLICABLE STANDARD13

RSS-102 § 2.5.1 - EXEMPTION LIMITS FOR ROUTINE EVALUATION-SAR EVALUATION14

 APPLICABLE STANDARD14

 TEST RESULT:15

FCC §15.203 & RSS-GEN §6.8 - ANTENNA REQUIREMENT16

 APPLICABLE STANDARD16

 ANTENNA CONNECTOR CONSTRUCTION16

FCC §15.209, §15.205 & §15.247(D), RSS-GEN § 8.10 & RSS-247 § 5.5 - UNWANTED EMISSION FREQUENCIES AND RESTRICTED BANDS.....17

 APPLICABLE STANDARD17

 EUT SETUP.....17

 EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP18

 TEST PROCEDURE19

 FACTOR & OVER LIMIT/ MARGIN CALCULATION19

 TEST DATA19

FCC §15.247(A) (2), RSS-GEN § 6.7 & RSS-247 § 5.2 (A) - 99% OCCUPIED BANDWIDTH & 6 DB EMISSION BANDWIDTH35

 STANDARD APPLICABLE35

 TEST PROCEDURE36

 TEST DATA36

FCC §15.247(B) (3), RSS-247 §5.4 (D) - PEAK OUTPUT POWER MEASUREMENT41

 APPLICABLE STANDARD41

 TEST PROCEDURE41

 TEST DATA42

| | |
|---|-----------|
| FCC §15.247(E), RSS-247 §5.2 (B) – POWER SPECTRAL DENSITY | 45 |
| APPLICABLE STANDARD | 45 |
| TEST PROCEDURE | 45 |
| TEST DATA | 46 |
| FCC §15.247(D) & RSS-247 §5.5 - 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE | 49 |
| APPLICABLE STANDARD | 49 |
| TEST PROCEDURE | 49 |
| TEST DATA | 50 |
| EUT PHOTOGRAPHS..... | 52 |
| TEST SETUP PHOTOGRAPHS | 53 |

DOCUMENT REVISION HISTORY

| Revision Number | Report Number | Description of Revision | Date of Revision |
|-----------------|-----------------|-------------------------|------------------|
| 0 | 2401T74718E-RFA | Original Report | 2024/09/02 |

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

| | |
|---|---|
| HVIN | MOTO BUDS 125 |
| FVIN | N/A |
| Product | TRUE WIRELESS EARBUDS |
| Tested Model | MOTO BUDS 125 |
| Multiple Model(s) | N/A |
| Frequency Range | BLE: 2402-2480MHz |
| Maximum Conducted Peak Output Power | BLE: 2.94dBm |
| Modulation Technique | BLE: GFSK |
| Antenna Specification [#] | 2.7dBi (provided by the applicant) |
| Voltage Range | DC 3.7V from battery or DC 5V from USB port |
| Sample serial number | 2L24-5 for Radiated Emissions Test 2L24-4 for RF Conducted Test (Assigned by BACL, Shenzhen) |
| Sample/EUT Status | Good condition |
| Adapter Information | N/A |
| Note: The left earbuds and the right earbuds are the same, so the left earbuds was selected for test. | |

Objective

This report is in accordance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.209, 15.247 rules and RSS-GEN Issue 5, February 2021 Amendment 2 and RSS-247 Issue 3, August 2023 of the Innovation, Science and Economic Development Canada rules.

Test Methodology

All tests and measurements indicated in this document were performed in accordance ANSI C63.10-2013, RSS-GEN Issue 5, February 2021 Amendment 2 and RSS-247 Issue 3, August 2023.

And KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

Measurement Uncertainty

| Parameter | | Uncertainty |
|------------------------------------|-----------------------------|---------------------------------------|
| Occupied Channel Bandwidth | | ±5% |
| RF output power, conducted | | 0.72 dB(k=2, 95% level of confidence) |
| AC Power Lines Conducted Emissions | 9kHz~150 kHz | 3.94dB(k=2, 95% level of confidence) |
| | 150 kHz ~30MHz | 3.84dB(k=2, 95% level of confidence) |
| Radiated Emissions | 9kHz - 30MHz | 3.30dB(k=2, 95% level of confidence) |
| | 30MHz~200MHz (Horizontal) | 4.48dB(k=2, 95% level of confidence) |
| | 30MHz~200MHz (Vertical) | 4.55dB(k=2, 95% level of confidence) |
| | 200MHz~1000MHz (Horizontal) | 4.85dB(k=2, 95% level of confidence) |
| | 200MHz~1000MHz (Vertical) | 5.05dB(k=2, 95% level of confidence) |
| | 1GHz - 6GHz | 5.35dB(k=2, 95% level of confidence) |
| | 6GHz - 18GHz | 5.44dB(k=2, 95% level of confidence) |
| | 18GHz - 40GHz | 5.16dB(k=2, 95% level of confidence) |
| Temperature | | ±1°C |
| Humidity | | ±1% |
| Supply voltages | | ±0.4% |

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 715558, the FCC Designation No. : CN5045.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0023.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For BLE mode, 40 channels are provided to testing:

| Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|
| 0 | 2402 | 20 | 2442 |
| 1 | 2404 | 21 | 2444 |
| 2 | 2406 | 22 | 2446 |
| 3 | 2408 | 23 | 2448 |
| 4 | 2410 | 24 | 2450 |
| 5 | 2412 | 25 | 2452 |
| 6 | 2414 | 26 | 2454 |
| 7 | 2416 | 27 | 2456 |
| 8 | 2418 | 28 | 2458 |
| 9 | 2420 | 29 | 2460 |
| 10 | 2422 | 30 | 2462 |
| 11 | 2424 | 31 | 2464 |
| 12 | 2426 | 32 | 2466 |
| 13 | 2428 | 33 | 2468 |
| 14 | 2430 | 34 | 2470 |
| 15 | 2432 | 35 | 2472 |
| 16 | 2434 | 36 | 2474 |
| 17 | 2436 | 37 | 2476 |
| 18 | 2438 | 38 | 2478 |
| 19 | 2440 | 39 | 2480 |

EUT was tested with Channel 0, 19 and 39.

Equipment Modifications


No modification was made to the EUT tested.

EUT Exercise Software

“FCC-assist-1.0.2.2.exe”[#] software was used to test and power level is Default[#]. The software and power level was provided by the applicant.


Duty cycle

| Test Modes | Ton (ms) | Ton+off (ms) | Duty Cycle (%) | 1/T _{on} (Hz) | VBW Setting (kHz) |
|------------|----------|--------------|----------------|------------------------|-------------------|
| BLE 1Mbps | 0.379 | 0.631 | 60.06 | 2639 | 3 |
| BLE 2Mbps | 0.199 | 0.625 | 31.84 | 5025 | 10 |

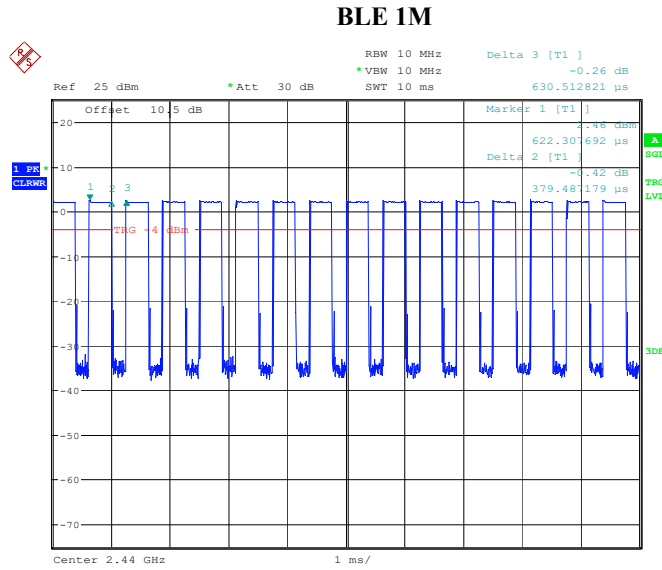

ProjectNo.:2401T74718E-RF Tester:Cheeb Huang
 Date: 28.MAY.2024 09:33:59

BLE 2M

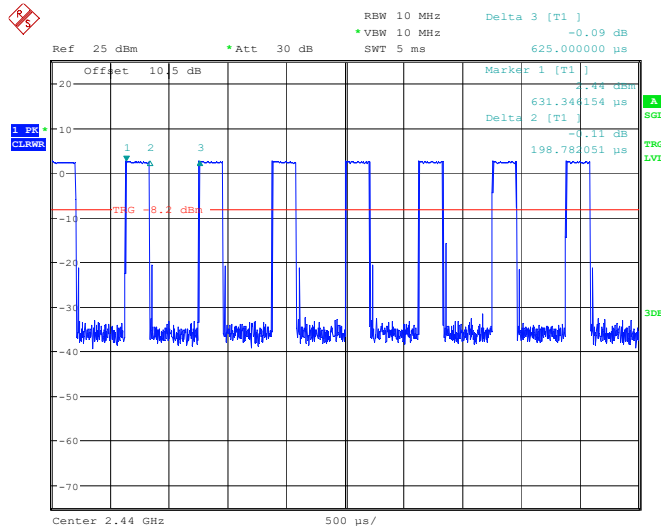

ProjectNo.:2401T74718E-RF Tester:Cheeb Huang
 Date: 28.MAY.2024 09:47:29

Support Equipment List and Details


| Manufacturer | Description | Model | Serial Number |
|--------------|-------------|-------|---------------|
| / | / | / | / |

External I/O Cable


| Cable Description | Length (m) | From/Port | To |
|-------------------|------------|-----------|----|
| / | / | / | / |

Block Diagram of Test Setup

For Radiated Emissions below 1GHz:

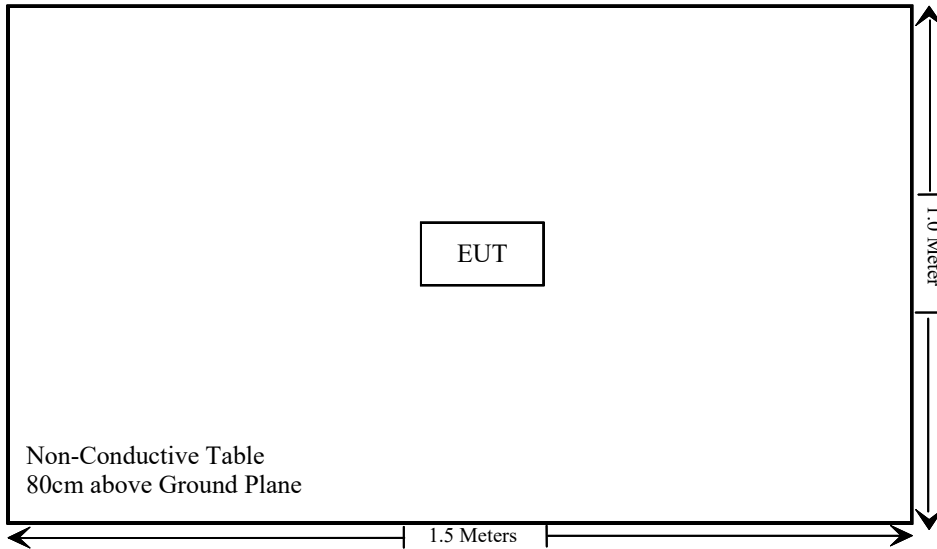

For Radiated Emissions above 1GHz:

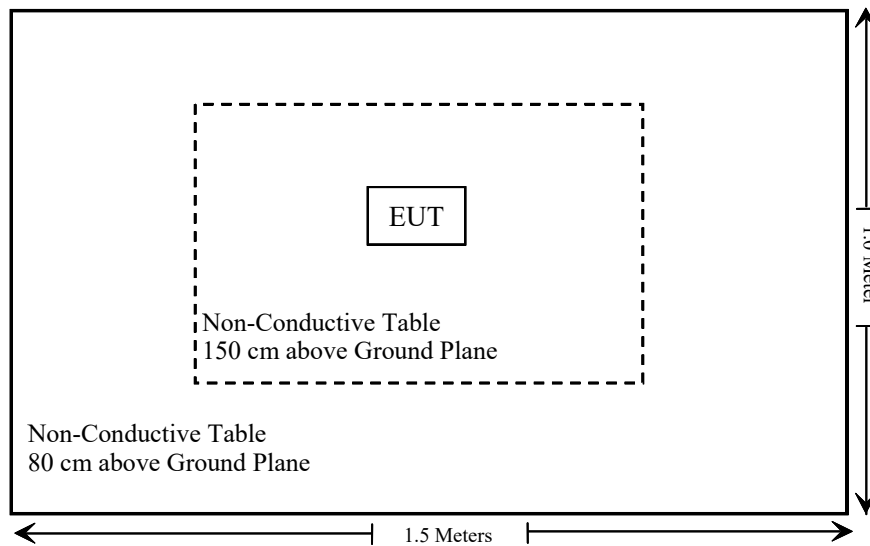

SUMMARY OF TEST RESULTS

| FCC Rules | RSS Rules | Description of Test | Result |
|---|------------------------------------|--|----------------|
| § 15.247 (i), §1.1307 (b) (1) & §2.1093 | RSS-102 § 2.5.1 | RF Exposure & Exemption Limits For Routine Evaluation-SAR evaluation | Compliant |
| §15.203 | RSS-Gen §6.8 | Antenna Requirement | Compliant |
| §15.207 (a) | RSS-Gen §8.8 | AC Line Conducted Emissions | Not Applicable |
| §15.205, §15.209, §15.247(d) | RSS-GEN § 8.10 & RSS-247 § 5.5 | Spurious Emissions | Compliant |
| §15.247 (a)(2) | RSS- Gen §6.7 RSS-247 § 5.2 (a) | 99% Occupied Bandwidth & 6 dB Emission Bandwidth | Compliant |
| §15.247(b)(3) | RSS-247 § 5.4(d) | Maximum Conducted Output Power | Compliant |
| §15.247(e) | RSS-247 § 5.2 (b) | Power Spectral Density | Compliant |
| §15.247(d) | RSS-247 § 5.5 | 100 kHz Bandwidth of Frequency Band Edge | Compliant |

Not Applicable: The EUT is powered by battery that is not required for AC Line Conducted Emissions.

TEST EQUIPMENT LIST

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|-------------------------------|-------------------------|-------------------------|---------------|------------------|----------------------|
| Radiated Emission Test | | | | | |
| R&S | EMI Test Receiver | ESR3 | 102455 | 2024/01/16 | 2025/01/15 |
| Sonoma instrument | Pre-amplifier | 310 N | 186238 | 2023/06/08 | 2024/06/07 |
| Sunol Sciences | Broadband Antenna | JB1 | A040904-1 | 2023/07/20 | 2026/07/19 |
| BACL | Active Loop Antenna | 1313-1A | 4031911 | 2024/03/21 | 2025/03/20 |
| Unknown | Cable | Chamber Cable 1 | F-03-EM236 | 2023/08/03 | 2024/08/02 |
| Unknown | Cable | Chamber Cable 4 | EC-007 | 2023/08/03 | 2024/08/02 |
| Audix | EMI Test software | E3 | 19821b(V9) | NCR | NCR |
| Rohde & Schwarz | Spectrum Analyzer | FSV40 | 101605 | 2024/03/27 | 2025/03/26 |
| COM-POWER | Pre-amplifier | PA-122 | 181919 | 2023/06/29 | 2024/06/28 |
| Schwarzbeck | Horn Antenna | BBHA9120D(1201) | 1143 | 2023/07/26 | 2026/07/25 |
| Unknown | RF Cable | KMSE | 0735 | 2023/10/08 | 2024/10/07 |
| Unknown | RF Cable | UFA147 | 219661 | 2023/10/08 | 2024/10/07 |
| SNSD | 2.4G Band Reject filter | BSF2402-2480MN-0898-001 | 2.4G filter | 2023/08/03 | 2024/08/02 |
| Audix | EMI Test software | E3 | 191218(V9) | NCR | NCR |
| A.H.System | Pre-amplifier | PAM-1840VH | 190 | 2023/08/02 | 2024/08/01 |
| Electro-Mechanics Co | Horn Antenna | 3116 | 2026 | 2023/09/18 | 2026/09/17 |
| UTIFLEX | RF Cable | NO. 13 | 232308-001 | 2023/08/03 | 2024/08/02 |
| RF Conducted Test | | | | | |
| R&S | SPECTRUM ANALYZER | FSV40-N | 102259 | 2024/01/16 | 2025/01/15 |
| Unknown | 10dB Attenuator | Unknown | F-03-EM122 | 2023/07/04 | 2024/07/03 |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC§15.247 (i), §1.1307 (b) (1) &§2.1093 - RF EXPOSURE

Applicable Standard

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission’s guideline.

According to KDB 447498 D01 General RF Exposure Guidance

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR, where}$$

1. f(GHz) is the RF channel transmit frequency in GHz.
2. Power and distance are rounded to the nearest mW and mm before calculation.
3. The result is rounded to one decimal place for comparison.
4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

Measurement Result

For worst case:

| Mode | Frequency (MHz) | Max tune-up conducted power [#] (dBm) | Max tune-up conducted power [#] (mW) | Distance (mm) | Calculated value | Threshold (1-g SAR) | SAR Test Exclusion |
|-----------|-----------------|--|---|---------------|------------------|---------------------|--------------------|
| Bluetooth | 2402-2480 | 1.50 | 1.41 | 5 | 0.44 | 3 | Yes |
| BLE | 2402-2480 | 3.00 | 2.00 | 5 | 0.63 | 3 | Yes |

Note: The tune-up power[#] was declared by the applicant.

Result: Compliant

RSS-102 § 2.5.1 - EXEMPTION LIMITS FOR ROUTINE EVALUATION-SAR EVALUATION

Applicable Standard

According to RSS-102 Issue 5§ (2.5.1), SAR evaluation is required if the separation distance between the user and/or bystander and the antenna and/or radiating element of the device is less than or equal to 20 cm, except when the device operates at or below the applicable output power level (adjusted for tune-up tolerance) for the specified separation distance defined in Table 1.

Table 1: SAR evaluation – Exemption limits for routine evaluation based on frequency and separation distance^{4,5}

| Frequency (MHz) | Exemption Limits (mW) | | | | |
|-----------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|
| | At separation distance of ≤5 mm | At separation distance of 10 mm | At separation distance of 15 mm | At separation distance of 20 mm | At separation distance of 25 mm |
| ≤300 | 71 mW | 101 mW | 132 mW | 162 mW | 193 mW |
| 450 | 52 mW | 70 mW | 88 mW | 106 mW | 123 mW |
| 835 | 17 mW | 30 mW | 42 mW | 55 mW | 67 mW |
| 1900 | 7 mW | 10 mW | 18 mW | 34 mW | 60 mW |
| 2450 | 4 mW | 7 mW | 15 mW | 30 mW | 52 mW |
| 3500 | 2 mW | 6 mW | 16 mW | 32 mW | 55 mW |
| 5800 | 1 mW | 6 mW | 15 mW | 27 mW | 41 mW |

| Frequency (MHz) | Exemption Limits (mW) | | | | |
|-----------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|----------------------------------|
| | At separation distance of 30 mm | At separation distance of 35 mm | At separation distance of 40 mm | At separation distance of 45 mm | At separation distance of ≥50 mm |
| ≤300 | 223 mW | 254 mW | 284 mW | 315 mW | 345 mW |
| 450 | 141 mW | 159 mW | 177 mW | 195 mW | 213 mW |
| 835 | 80 mW | 92 mW | 105 mW | 117 mW | 130 mW |
| 1900 | 99 mW | 153 mW | 225 mW | 316 mW | 431 mW |
| 2450 | 83 mW | 123 mW | 173 mW | 235 mW | 309 mW |
| 3500 | 86 mW | 124 mW | 170 mW | 225 mW | 290 mW |
| 5800 | 56 mW | 71 mW | 85 mW | 97 mW | 106 mW |

The exemption limits in Table 1 are based on measurements and simulations of half-wave dipole antennas at separation distances of 5 mm to 25 mm from a flat phantom, providing a SAR value of approximately 0.4 W/kg for 1 g of tissue. For low frequencies (300 MHz to 835 MHz), the exemption limits are derived from a linear fit. For high frequencies (1900 MHz and above), the exemption limits are derived from a third order polynomial fit.

Transmitters operating between 0.003-10 MHz, meeting the exemption from routine SAR evaluation, shall demonstrate compliance to the instantaneous limits in Section 4.

Output power level shall be the higher of the maximum conducted or equivalent isotropically radiated power (e.i.r.p.) source-based, time-averaged output power. For controlled use devices where the 8 W/kg for 1 gram of tissue applies, the exemption limits for routine evaluation in Table 1 are multiplied by a factor of 5. For limb-worn devices where the 10 gram value applies, the exemption limits for routine evaluation in Table 1 are multiplied by a factor of 2.5. If the operating frequency of the device is between two frequencies located in Table 1, linear interpolation shall be applied for the applicable separation distance. For test separation distance less than 5 mm, the exemption limits for a separation distance of 5 mm can be applied to determine if a routine evaluation is required.

For medical implants devices, the exemption limit for routine evaluation is set at 1 mW. The output power of a medical implants device is defined as the higher of the conducted or e.i.r.p to determine whether the device is exempt from the SAR evaluation.

Test Result:

| Mode | Frequency (MHz) | Maximum tune-up conducted power [#] (dBm) | Maximum tune-up conducted power [#] (mW) | Gain (dBi) | Maximum tune-up EIRP [#] (dBm) | Maximum tune-up EIRP [#] (mW) | Distance (mm) | Exemption Limit (mW) | SAR Evaluation Exemption |
|-----------|-----------------|--|---|------------|---|--|---------------|----------------------|--------------------------|
| Bluetooth | 2402-2480 | 1.50 | 1.41 | 2.7 | 4.20 | 2.63 | 5 | 3.94 | Yes |
| BLE | 2402-2480 | 3.00 | 2.00 | 2.7 | 5.70 | 3.72 | 5 | 3.94 | Yes |

Note: The antenna gain[#] and tune-up power[#] were declared by the applicant.
 $(2480-2450)/(3500-2450) = (4-P)/(4-2)$, the exemption limit of 2480MHz is $P = 3.94\text{mW}$

Result: Compliant

FCC §15.203 & RSS-GEN §6.8 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

According to FCC § 15.203, the applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device’s antenna shall be stated, based on a measurement or on data from the antenna’s manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device’s ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device. Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

Antenna Connector Construction

The EUT has an internal antenna arrangement which was permanently attached that fulfill the requirement of this section. Please refer to the EUT photos.

| Antenna Type | Antenna Gain [#] | Impedance | Frequency Range |
|--------------|---------------------------|-----------|-----------------|
| Ceramic | 2.7dBi | 50Ω | 2.4~2.5GHz |

Result: Compliant


FCC §15.209, §15.205 & §15.247(D), RSS-GEN § 8.10 & RSS-247 § 5.5 - UNWANTED EMISSION FREQUENCIES AND RESTRICTED BANDS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205; RSS-247 §5.5, RSS-GEN §8.10.

EUT Setup


9 kHz-30MHz:

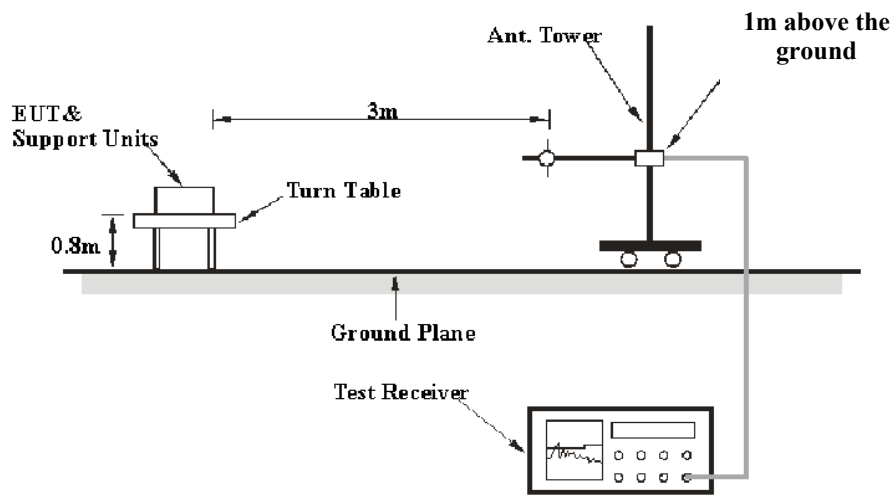

30MHz-1GHz:

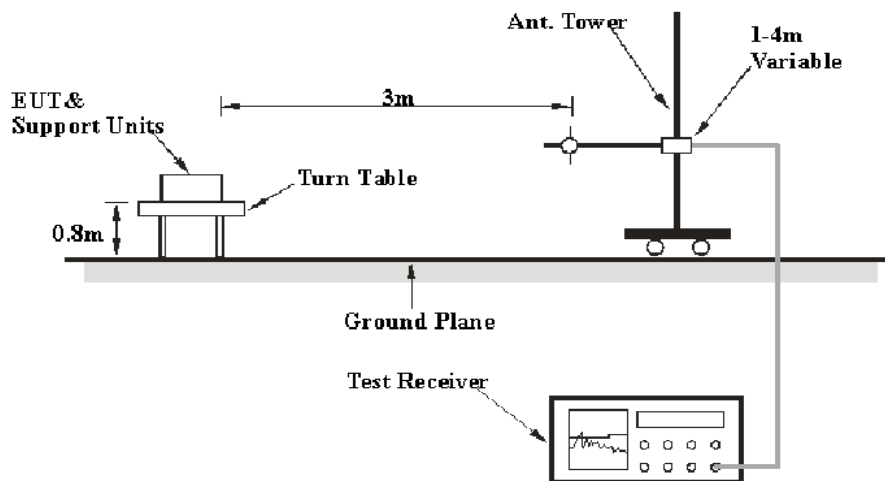

Above 1GHz:

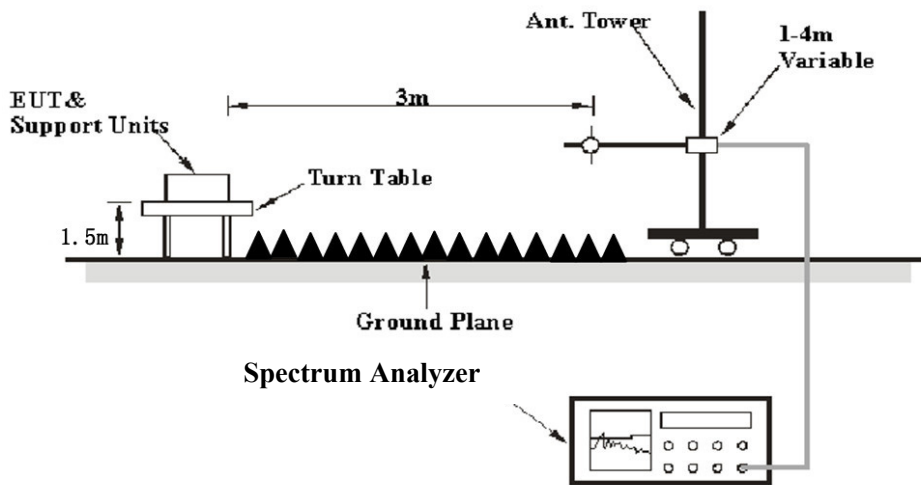

The radiated emission tests were performed in the 3meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.205, FCC 15.209, FCC 15.247, RSS-Gen and RSS-247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9 kHz-1GHz:

| Frequency Range | RBW | Video B/W | IF B/W | Measurement |
|-------------------|---------|-----------|---------|-------------|
| 9 kHz – 150 kHz | / | / | 200 Hz | QP |
| | 300 Hz | 1 kHz | / | PK |
| 150 kHz – 30 MHz | / | / | 9 kHz | QP |
| | 10 kHz | 30 kHz | / | PK |
| 30 MHz – 1000 MHz | / | / | 120 kHz | QP |
| | 100 kHz | 300 kHz | / | PK |

1-25 GHz:

| Measurement | Duty cycle | RBW | Video B/W |
|-------------|------------|------|-----------|
| PK | Any | 1MHz | 3 MHz |
| AV | >98% | 1MHz | 10 Hz |
| | <98% | 1MHz | ≥1/Ton |

Note: Ton is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, average detection modes for frequency bands 9–90 kHz and 110–490 kHz, peak and average detection modes for frequencies above 1 GHz.

For 9 kHz-30MHz, the report shall list the six emissions with the smallest margin relative to the limit, for each of the three antenna orientations (parallel, perpendicular, and ground-parallel) unless the margin is greater than 20 dB.

All emissions under the average limit and under the noise floor have not recorded in the report.

Factor & Over Limit/ Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit/Margin} &= \text{Level / Corrected Amplitude} - \text{Limit} \\ \text{Level / Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

Test Data

Environmental Conditions

| | |
|---------------------------|------------|
| Temperature: | 22~25.6 °C |
| Relative Humidity: | 50~54 % |
| ATM Pressure: | 101 kPa |

The testing was performed by Anson Su on 2024-05-18 for below 1GHz and Dylan Yang from 2024-05-17 to 2024-05-18 for above 1GHz.

EUT operation mode: Transmitting


Note: Pre-scan in the X, Y and Z axes of orientation, the worst case Z-axis of orientation was recorded;

9 kHz-30MHz (*Maximum output power mode BLE 2M, Middle Channel*):

The amplitude of spurious emissions attenuated more than 20 dB below the limit was not recorded.

30MHz-1GHz: (Maximum output power mode BLE 2M, Middle Channel)


Horizontal

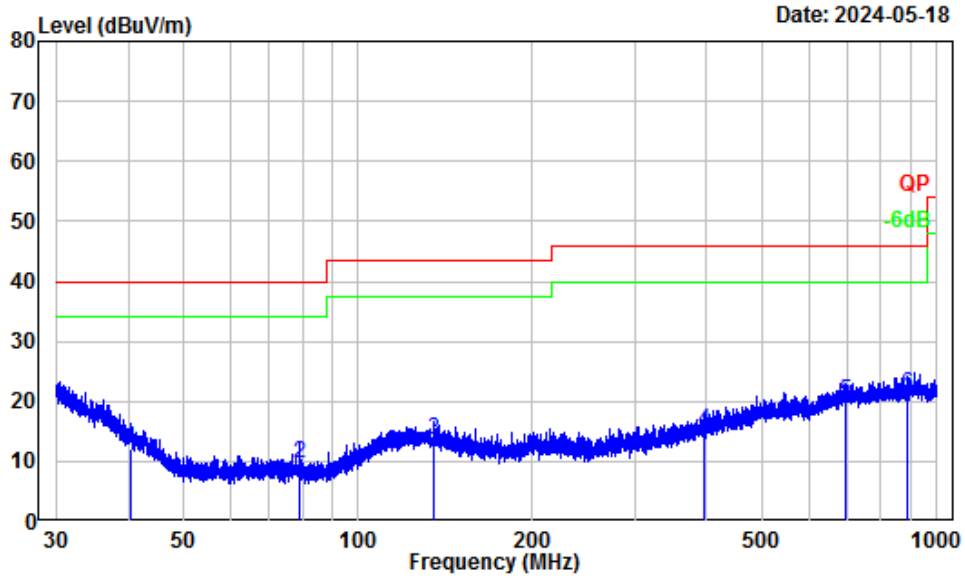

Site : Chamber A
 Condition : 3m Horizontal
 Project Number: 2401T74718E-RF
 Note : BLE
 Tester : Anson Su

| | Freq Factor | | Read Level | | Limit | Over | Remark |
|---|-------------|--------|------------|--------|--------|--------|--------|
| | MHz | dB/m | dBuV | dBuV/m | dBuV/m | dB | |
| 1 | 40.43 | -11.79 | 23.96 | 12.17 | 40.00 | -27.83 | QP |
| 2 | 79.14 | -18.18 | 27.71 | 9.53 | 40.00 | -30.47 | QP |
| 3 | 134.62 | -12.34 | 25.95 | 13.61 | 43.50 | -29.89 | QP |
| 4 | 395.55 | -10.73 | 25.73 | 15.00 | 46.00 | -31.00 | QP |
| 5 | 693.50 | -6.24 | 26.27 | 20.03 | 46.00 | -25.97 | QP |
| 6 | 891.51 | -4.50 | 25.65 | 21.15 | 46.00 | -24.85 | QP |

Vertical

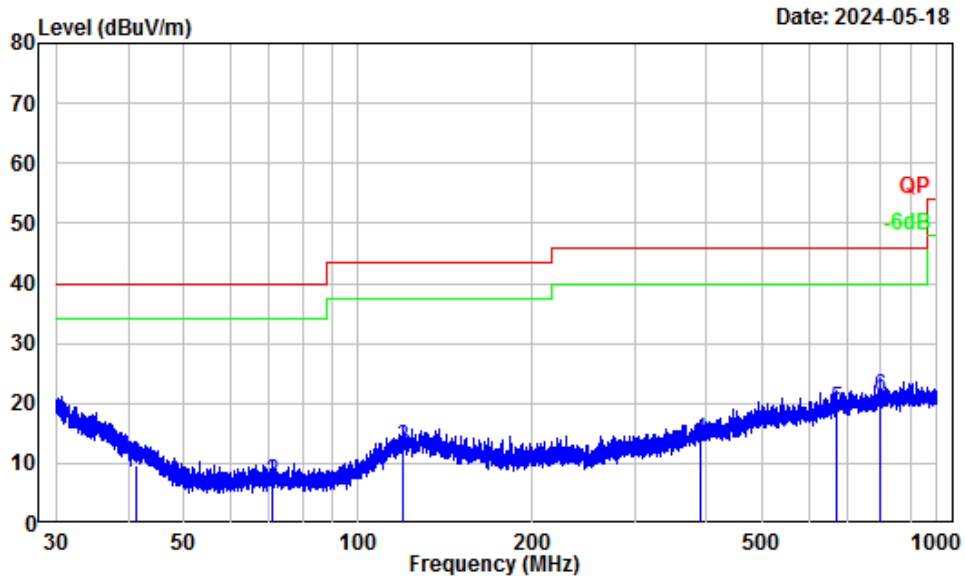

Site : Chamber A
 Condition : 3m Vertical
 Project Number: 2401T74718E-RF
 Note : BLE
 Tester : Anson Su

| | Freq | Factor | Read Level | Level | Limit Line | Over Limit | Remark |
|---|--------|--------|------------|--------|------------|------------|--------|
| | MHz | dB/m | dBuV | dBuV/m | dBuV/m | dB | |
| 1 | 41.28 | -13.74 | 23.41 | 9.67 | 40.00 | -30.33 | QP |
| 2 | 71.02 | -18.66 | 25.68 | 7.02 | 40.00 | -32.98 | QP |
| 3 | 119.49 | -12.85 | 25.67 | 12.82 | 43.50 | -30.68 | QP |
| 4 | 390.21 | -11.09 | 25.09 | 14.00 | 46.00 | -32.00 | QP |
| 5 | 672.25 | -6.84 | 25.89 | 19.05 | 46.00 | -26.95 | QP |
| 6 | 800.03 | -5.40 | 26.47 | 21.07 | 46.00 | -24.93 | QP |

1-25 GHz:

| Frequency (MHz) | Receiver | | Polar (H/V) | Factor (dB/m) | Corrected Amplitude (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|------------------------|----------------|-------|-------------|---------------|------------------------------|----------------|-------------|
| | Reading (dBμV) | PK/AV | | | | | |
| BLE 1M | | | | | | | |
| Low Channel 2402MHz | | | | | | | |
| 2321.46 | 54.66 | PK | H | -3.03 | 51.63 | 74 | -22.37 |
| 2321.46 | 42.23 | AV | H | -3.03 | 39.20 | 54 | -14.80 |
| 2326.51 | 54.35 | PK | V | -3.03 | 51.32 | 74 | -22.68 |
| 2326.51 | 42.11 | AV | V | -3.03 | 39.08 | 54 | -14.92 |
| 4804.00 | 48.81 | PK | H | 1.69 | 50.50 | 74 | -23.50 |
| 4804.00 | 42.04 | AV | H | 1.69 | 43.73 | 54 | -10.27 |
| 4804.00 | 47.82 | PK | V | 1.69 | 49.51 | 74 | -24.49 |
| 4804.00 | 41.78 | AV | V | 1.69 | 43.47 | 54 | -10.53 |
| Middle Channel 2440MHz | | | | | | | |
| 4880.00 | 48.78 | PK | H | 1.69 | 50.47 | 74 | -23.53 |
| 4880.00 | 43.05 | AV | H | 1.69 | 44.74 | 54 | -9.26 |
| 4880.00 | 48.63 | PK | V | 1.69 | 50.32 | 74 | -23.68 |
| 4880.00 | 42.56 | AV | V | 1.69 | 44.25 | 54 | -9.75 |
| High Channel 2480MHz | | | | | | | |
| 2483.54 | 59.51 | PK | H | -3.17 | 56.34 | 74 | -17.66 |
| 2483.54 | 42.41 | AV | H | -3.17 | 39.24 | 54 | -14.76 |
| 2483.59 | 57.54 | PK | V | -3.17 | 54.37 | 74 | -19.63 |
| 2483.59 | 41.82 | AV | V | -3.17 | 38.65 | 54 | -15.35 |
| 4960.00 | 48.96 | PK | H | 2.77 | 51.73 | 74 | -22.27 |
| 4960.00 | 43.51 | AV | H | 2.77 | 46.28 | 54 | -7.72 |
| 4960.00 | 48.92 | PK | V | 2.77 | 51.69 | 74 | -22.31 |
| 4960.00 | 43.25 | AV | V | 2.77 | 46.02 | 54 | -7.98 |

| Frequency (MHz) | Receiver | | Polar (H/V) | Factor (dB/m) | Corrected Amplitude (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|------------------------|----------------|-------|-------------|---------------|------------------------------|----------------|-------------|
| | Reading (dBμV) | PK/AV | | | | | |
| BLE 2M | | | | | | | |
| Low Channel 2402MHz | | | | | | | |
| 2348.16 | 54.18 | PK | H | -3.03 | 51.15 | 74 | -22.85 |
| 2348.16 | 42.64 | AV | H | -3.03 | 39.61 | 54 | -14.39 |
| 2370.69 | 54.35 | PK | V | -2.93 | 51.42 | 74 | -22.58 |
| 2370.69 | 42.89 | AV | V | -2.93 | 39.96 | 54 | -14.04 |
| 4804.00 | 47.62 | PK | H | 1.69 | 49.31 | 74 | -24.69 |
| 4804.00 | 43.19 | AV | H | 1.69 | 44.88 | 54 | -9.12 |
| 4804.00 | 46.35 | PK | V | 1.69 | 48.04 | 74 | -25.96 |
| 4804.00 | 42.84 | AV | V | 1.69 | 44.53 | 54 | -9.47 |
| Middle Channel 2440MHz | | | | | | | |
| 4880.00 | 49.12 | PK | H | 1.69 | 50.81 | 74 | -23.19 |
| 4880.00 | 42.92 | AV | H | 1.69 | 44.61 | 54 | -9.39 |
| 4880.00 | 48.07 | PK | V | 1.69 | 49.76 | 74 | -24.24 |
| 4880.00 | 41.67 | AV | V | 1.69 | 43.36 | 54 | -10.64 |
| High Channel 2480MHz | | | | | | | |
| 2485.47 | 62.24 | PK | H | -3.17 | 59.07 | 74 | -14.93 |
| 2485.47 | 43.99 | AV | H | -3.17 | 40.82 | 54 | -13.18 |
| 2485..67 | 57.82 | PK | V | -3.17 | 54.65 | 74 | -19.35 |
| 2485..67 | 42.15 | AV | V | -3.17 | 38.98 | 54 | -15.02 |
| 4960.00 | 49.35 | PK | H | 2.77 | 52.12 | 74 | -21.88 |
| 4960.00 | 43.51 | AV | H | 2.77 | 46.28 | 54 | -7.72 |
| 4960.00 | 48.62 | PK | V | 2.77 | 51.39 | 74 | -22.61 |
| 4960.00 | 42.23 | AV | V | 2.77 | 45.00 | 54 | -9.00 |

Note:


Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude/Level = Corrected Factor + Reading


Margin = Corrected Amplitude/Level - Limit

The other spurious emission which is in the noise floor level was not recorded.

Test plots for Band Edge Measurements (Radiated):

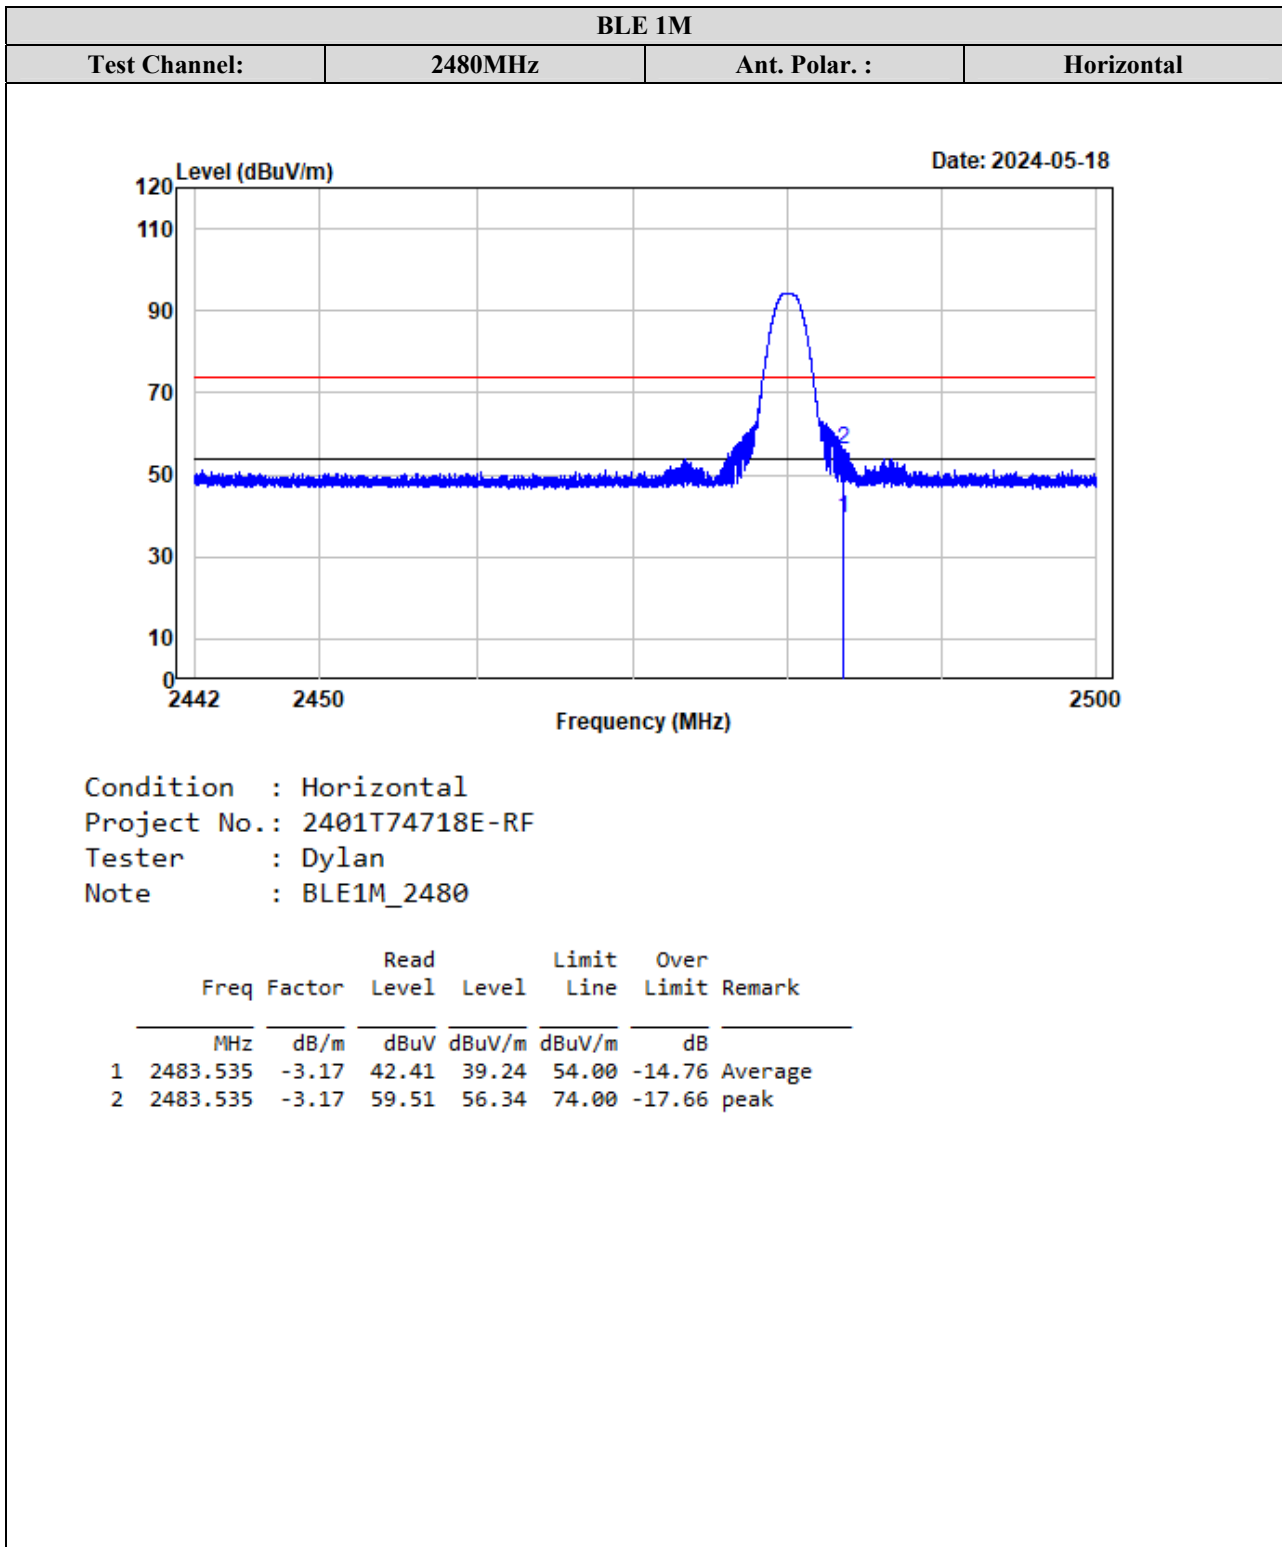


| BLE 1M | | | |
|---------------|---------|---------------|----------|
| Test Channel: | 2480MHz | Ant. Polar. : | Vertical |

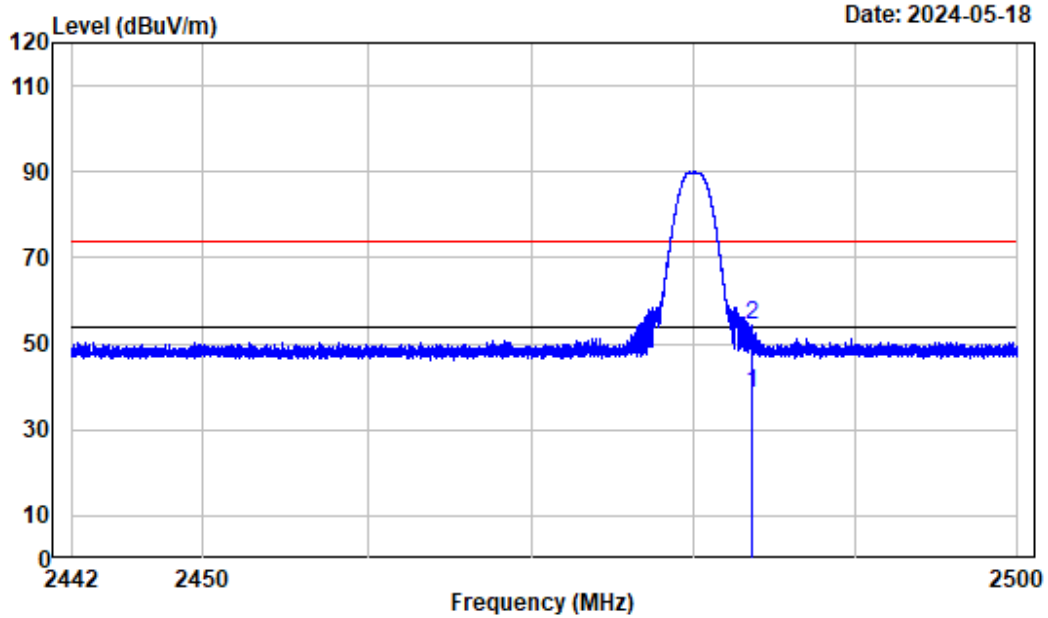

Condition : Vertical
 Project No.: 2401T74718E-RF
 Tester : Dylan
 Note : BLE1M_2480

| | Freq | Factor | Read Level | Level | Limit Line | Over Limit | Remark |
|---|----------|--------|------------|--------|------------|------------|---------|
| | MHz | dB/m | dBuV | dBuV/m | dBuV/m | dB | |
| 1 | 2483.586 | -3.17 | 41.82 | 38.65 | 54.00 | -15.35 | Average |
| 2 | 2483.586 | -3.17 | 57.54 | 54.37 | 74.00 | -19.63 | peak |


| BLE 2M | | | |
|---------------|---------|---------------|------------|
| Test Channel: | 2480MHz | Ant. Polar. : | Horizontal |

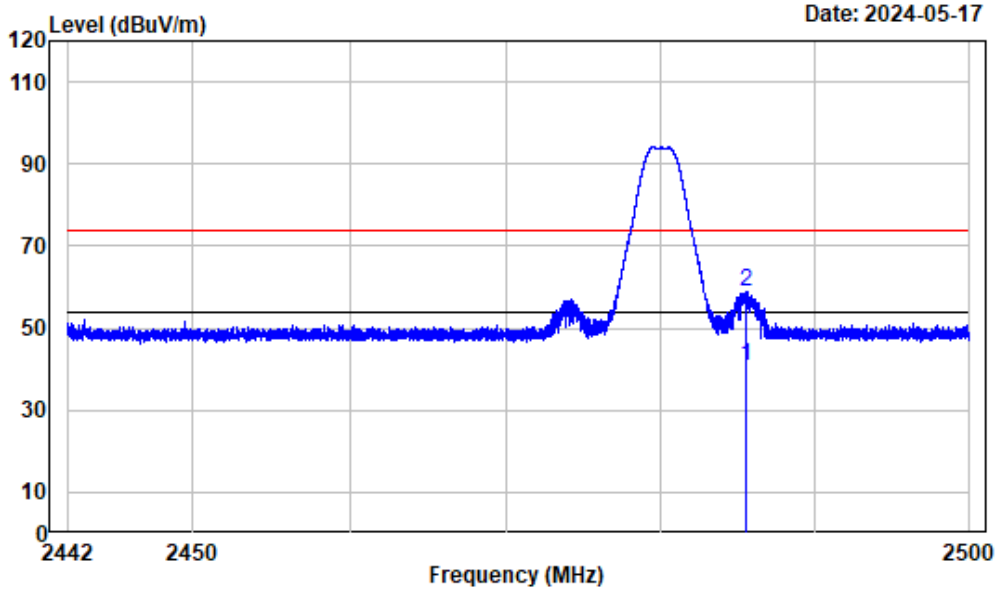

Condition : Horizontal
 Project No.: 2401T74718E-RF
 Tester : Dylan
 Note : BLE2M_2480

| | Freq | Factor | Read | | Limit | Over | Remark |
|---|----------|--------|-------|--------|--------|--------|---------|
| | | | Level | Level | | | |
| | MHz | dB/m | dBuV | dBuV/m | dBuV/m | dB | |
| 1 | 2485.471 | -3.17 | 43.99 | 40.82 | 54.00 | -13.18 | Average |
| 2 | 2485.471 | -3.17 | 62.24 | 59.07 | 74.00 | -14.93 | peak |


| BLE 2M | | | |
|---------------|---------|---------------|----------|
| Test Channel: | 2480MHz | Ant. Polar. : | Vertical |

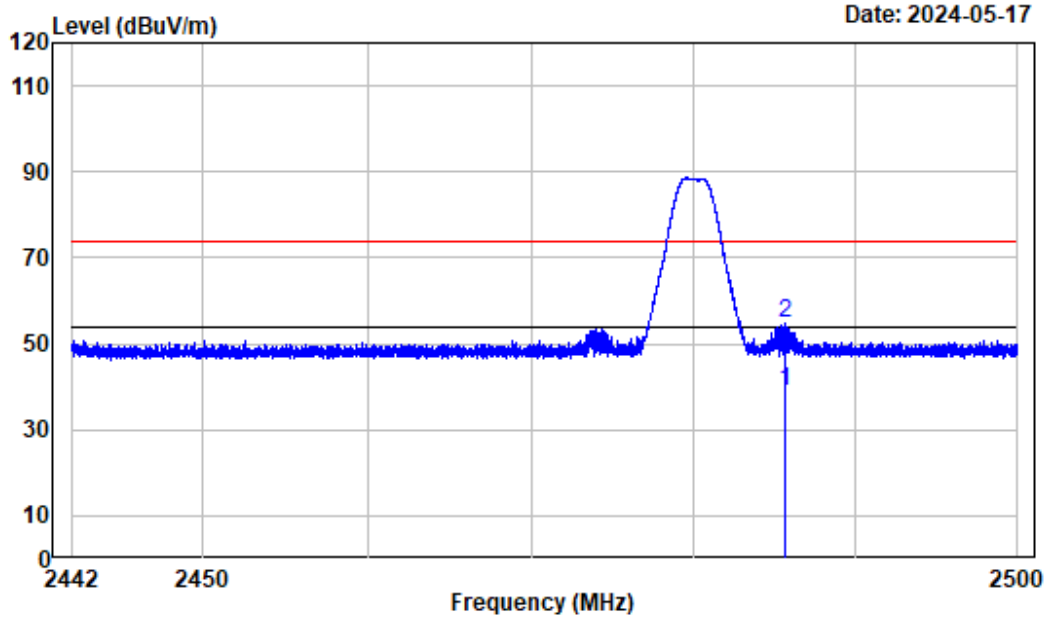

Condition : Vertical
 Project No.: 2401T74718E-RF
 Tester : Dylan
 Note : BLE2M_2480


| | Freq | Factor | Read Level | Level | Limit Line | Over Limit | Remark |
|---|----------|--------|------------|--------|------------|------------|---------|
| | MHz | dB/m | dBuV | dBuV/m | dBuV/m | dB | |
| 1 | 2485.667 | -3.17 | 42.15 | 38.98 | 54.00 | -15.02 | Average |
| 2 | 2485.667 | -3.17 | 57.82 | 54.65 | 74.00 | -19.35 | peak |

Harmonic margin test plot:

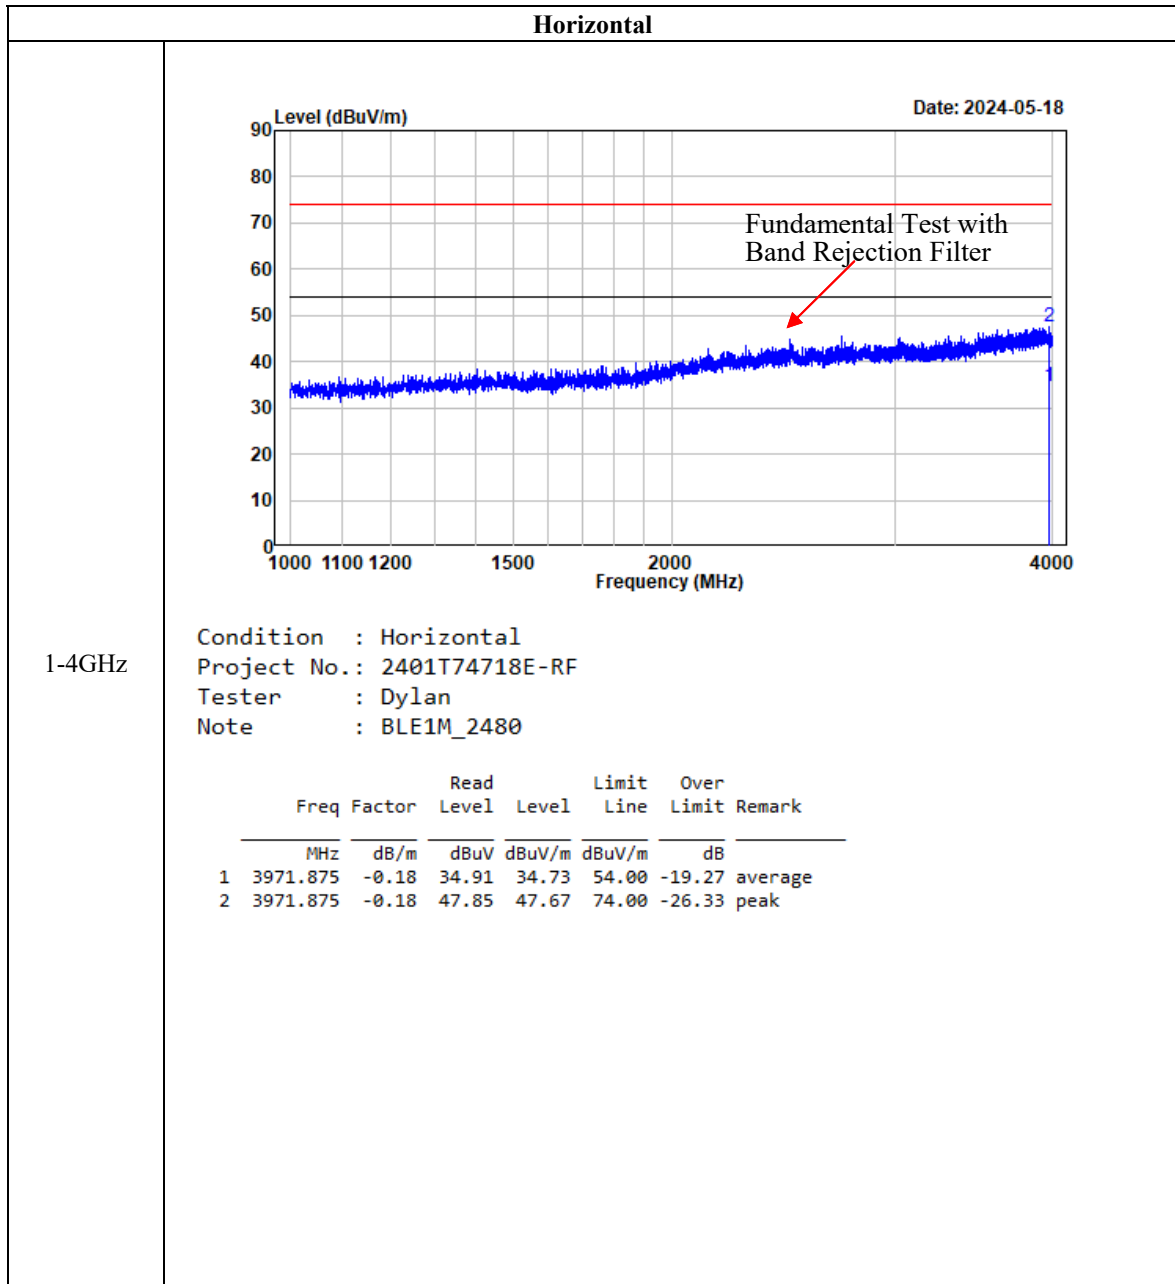

Vertical


1-4GHz

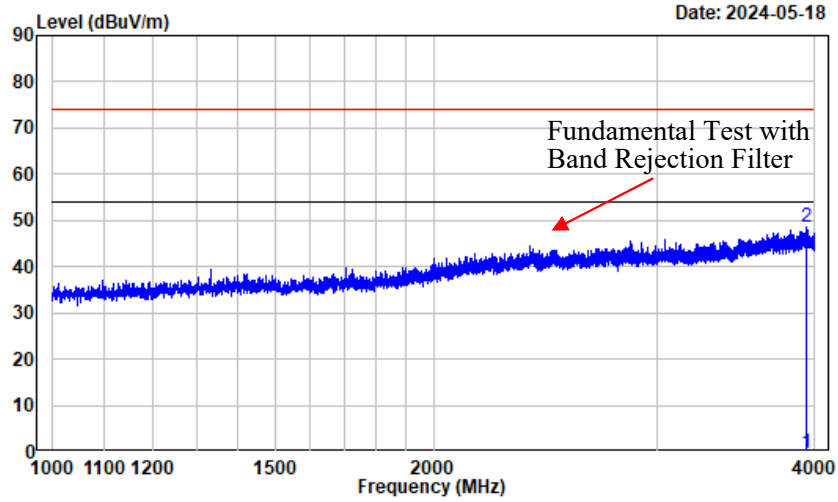

Condition : Vertical
 Project No.: 2401T74718E-RF
 Tester : Dylan
 Note : BLE1M_2480

| | Freq | Factor | Read Level | Level | Limit Line | Over Limit | Remark |
|---|----------|--------|------------|--------|------------|------------|---------|
| | MHz | dB/m | dBuV | dBuV/m | dBuV/m | dB | |
| 1 | 3938.500 | -0.25 | 0.00 | -0.25 | 54.00 | -54.25 | average |
| 2 | 3938.500 | -0.25 | 48.82 | 48.57 | 74.00 | -25.43 | peak |

Horizontal

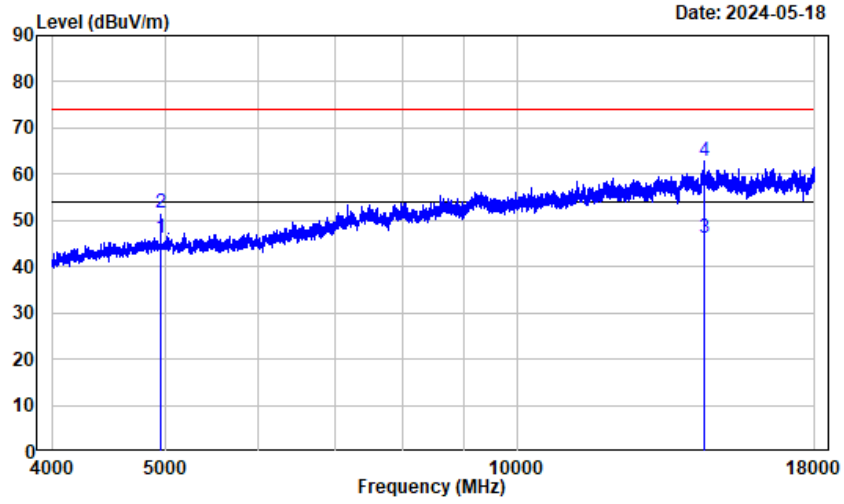


4-18GHz

Condition : Horizontal
 Project No.: 2401T74718E-RF
 Tester : Dylan
 Note : BLE1M_2480

| | Freq | Factor | Read Level | Level | Limit Line | Over Limit | Remark |
|---|-----------|--------|------------|--------|------------|------------|---------|
| | MHz | dB/m | dBuV | dBuV/m | dBuV/m | dB | |
| 1 | 4960.000 | 2.77 | 43.51 | 46.28 | 54.00 | -7.72 | Average |
| 2 | 4960.000 | 2.77 | 48.96 | 51.73 | 74.00 | -22.27 | peak |
| 3 | 14468.500 | 17.40 | 28.62 | 46.02 | 54.00 | -7.98 | average |
| 4 | 14468.500 | 17.40 | 45.42 | 62.82 | 74.00 | -11.18 | peak |

Vertical

4-18GHz

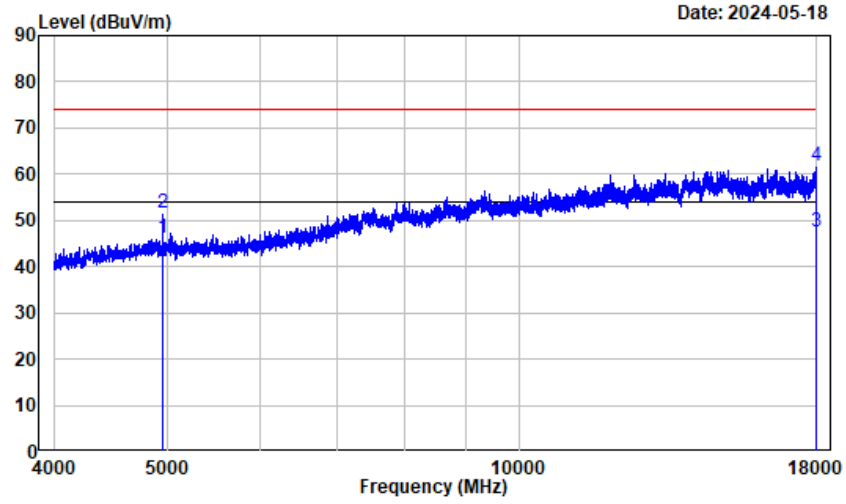


Condition : Vertical
 Project No.: 2401T74718E-RF
 Tester : Dylan
 Note : BLE1M_2480

| | Freq | Factor | Read Level | Level | Limit Line | Over Limit | Remark |
|---|-----------|--------|------------|--------|------------|------------|---------|
| | MHz | dB/m | dBuV | dBuV/m | dBuV/m | dB | |
| 1 | 4960.000 | 2.77 | 43.25 | 46.02 | 54.00 | -7.98 | Average |
| 2 | 4960.000 | 2.77 | 48.92 | 51.69 | 74.00 | -22.31 | Peak |
| 3 | 18000.000 | 24.62 | 22.79 | 47.41 | 54.00 | -6.59 | average |
| 4 | 18000.000 | 24.62 | 37.07 | 61.69 | 74.00 | -12.31 | peak |

Horizontal

18-25GHz

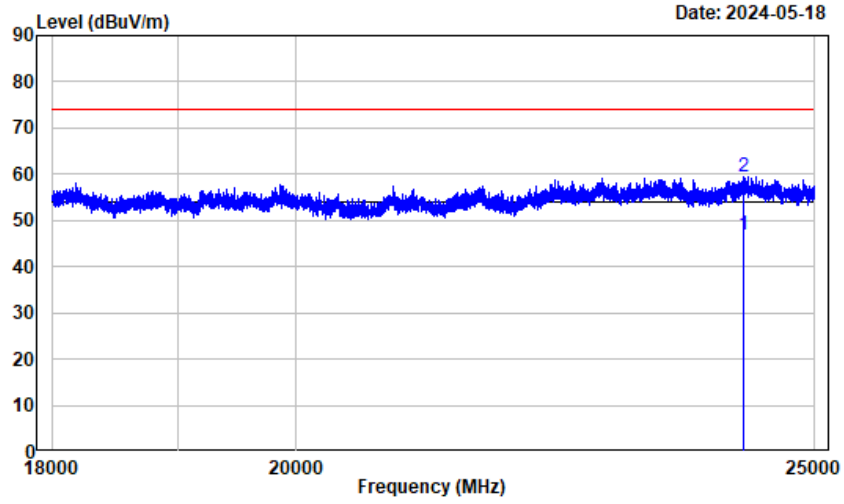


Condition : Horizontal
 Project No.: 2401T74718E-RF
 Tester : Dylan
 Note : BLE1M_2480

| | Freq | Factor | Read Level | Level | Limit Line | Over Limit | Remark |
|---|-----------|--------|------------|--------|------------|------------|---------|
| | MHz | dB/m | dBuV | dBuV/m | dBuV/m | dB | |
| 1 | 24247.500 | 18.39 | 28.46 | 46.85 | 54.00 | -7.15 | Average |
| 2 | 24247.500 | 18.39 | 41.07 | 59.46 | 74.00 | -14.54 | peak |

Vertical

18-25GHz

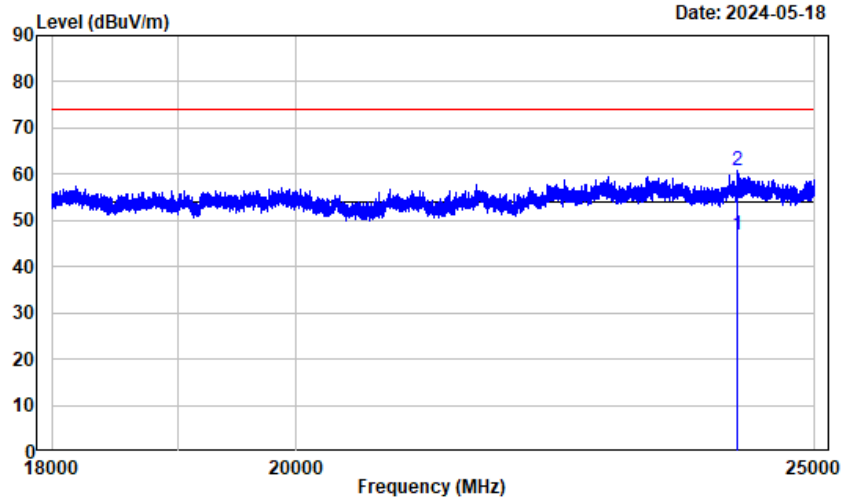

Condition : Vertical
 Project No.: 2401T74718E-RF
 Tester : Dylan
 Note : BLE1M_2480

| | Freq | Factor | Read Level | Level | Limit Line | Over Limit | Remark |
|---|-----------|--------|------------|--------|------------|------------|---------|
| | MHz | dB/m | dBuV | dBuV/m | dBuV/m | dB | |
| 1 | 24188.000 | 18.26 | 28.64 | 46.90 | 54.00 | -7.10 | Average |
| 2 | 24188.000 | 18.26 | 42.47 | 60.73 | 74.00 | -13.27 | peak |

FCC §15.247(a) (2), RSS-GEN § 6.7 & RSS-247 § 5.2 (a) - 99% OCCUPIED BANDWIDTH & 6 dB EMISSION BANDWIDTH

Standard Applicable

According to FCC §15.247(a) (2)

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

According to RSS-247 §5.2 a)

The minimum 6 dB bandwidth shall be 500 kHz.

According to RSS-Gen §6.7

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

In some cases, the “x dB bandwidth” is required, which is defined as the frequency range between two points, one at the lowest frequency below and one at the highest frequency above the carrier frequency, at which the maximum power level of the transmitted emission is attenuated x dB below the maximum in-band power level of the modulated signal, where the two points are on the outskirts of the in-band emission.

The following conditions shall be observed for measuring the occupied bandwidth and x dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / x dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).


Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.8.1 & Clause 6.9.3

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

99% Occupied bandwidth test:

Use Occupied bandwidth test function, measure the 99% Occupied bandwidth.
Repeat above procedures until all frequencies measured were complete.

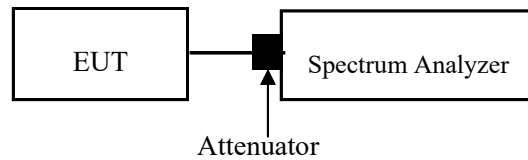

Test Data

Environmental Conditions

| | |
|---------------------------|---------|
| Temperature: | 24.3 °C |
| Relative Humidity: | 48 % |
| ATM Pressure: | 101 kPa |


The testing was performed by Cheeb Huang on 2024-05-28.


EUT operation mode: Transmitting

Test Result: Compliant.


| Test Modes | Test Channel | Test Frequency (MHz) | 6 dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Limit (MHz) |
|------------|--------------|----------------------|----------------------|------------------------------|-------------|
| BLE 1M | Lowest | 2402 | 0.687 | 1.023 | ≥0.5 |
| | Middle | 2440 | 0.678 | 1.026 | ≥0.5 |
| | Highest | 2480 | 0.678 | 1.023 | ≥0.5 |
| BLE 2M | Lowest | 2402 | 1.170 | 2.028 | ≥0.5 |
| | Middle | 2440 | 1.170 | 2.028 | ≥0.5 |
| | Highest | 2480 | 1.164 | 2.028 | ≥0.5 |


6 dB Bandwidth

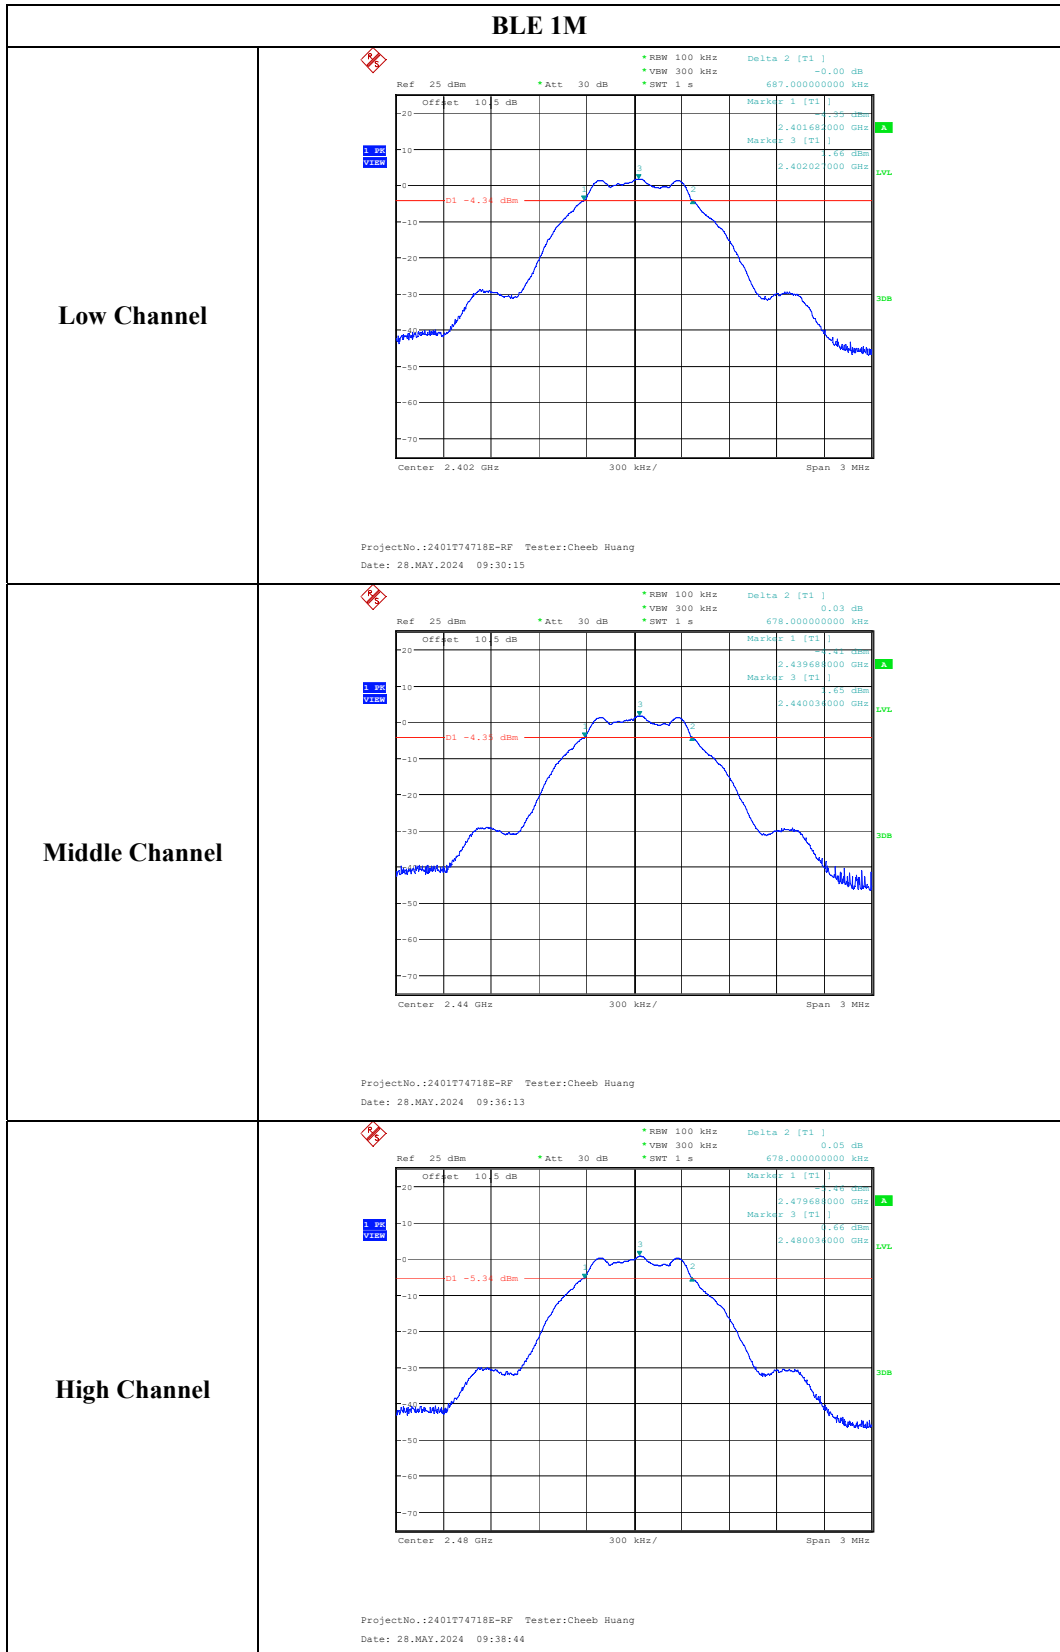

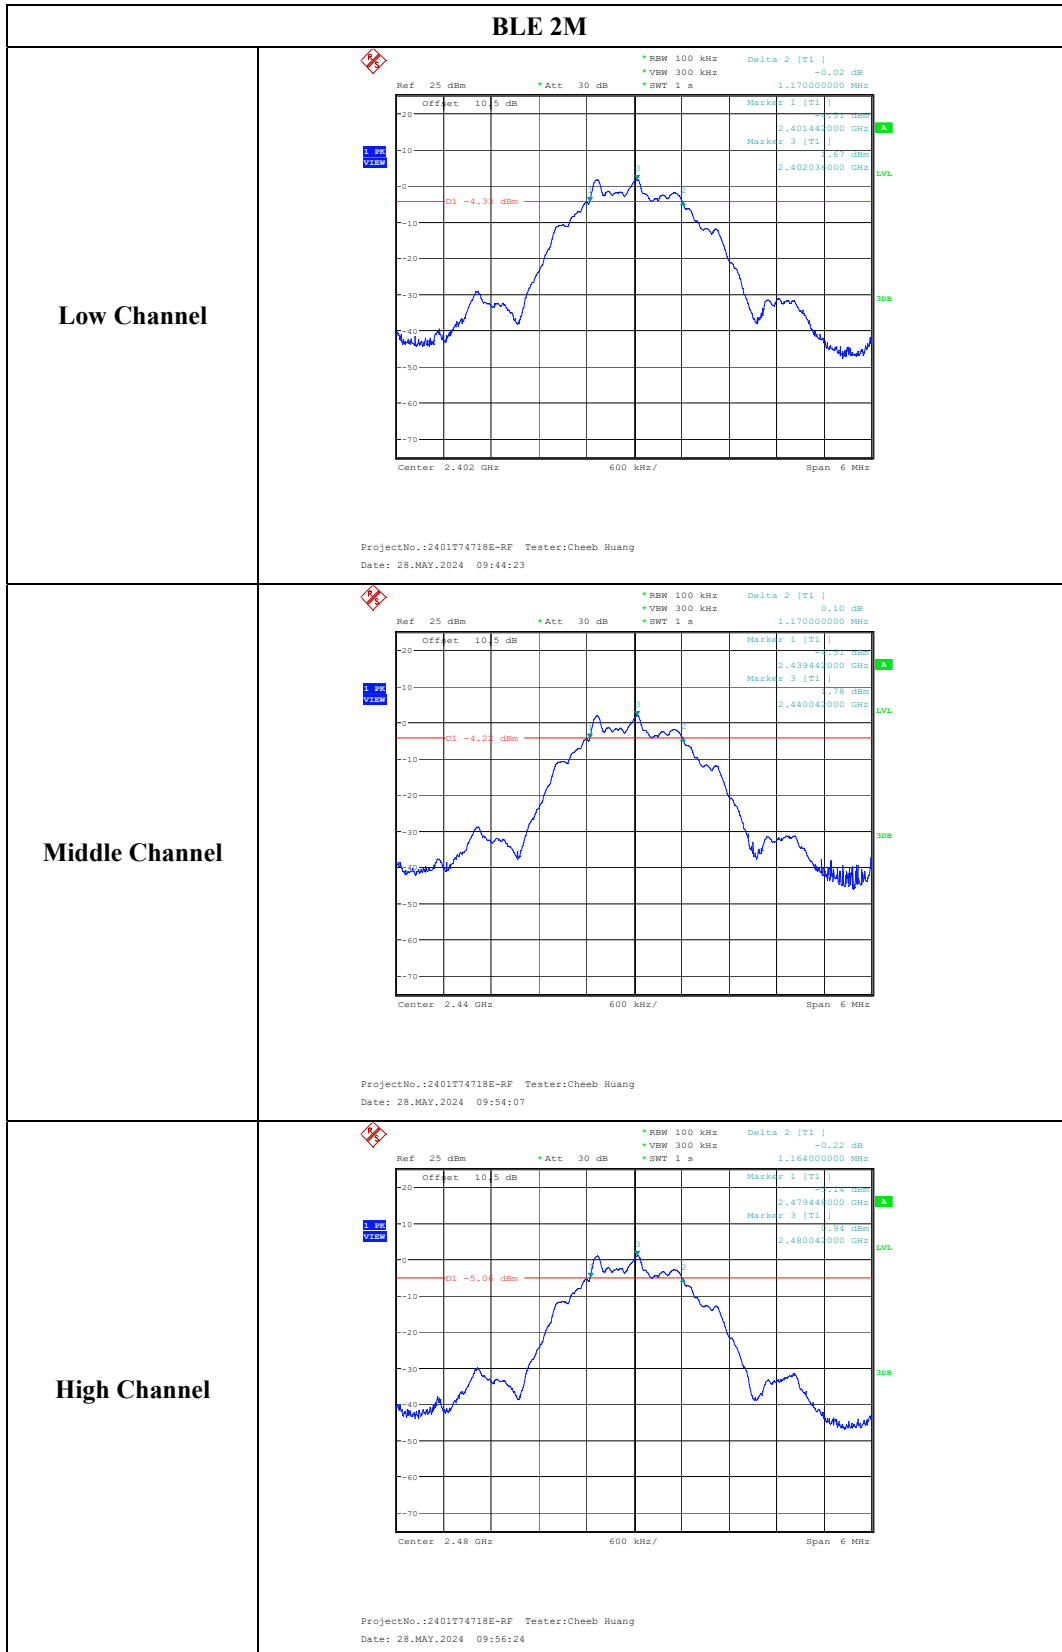

99% Occupied Bandwidth

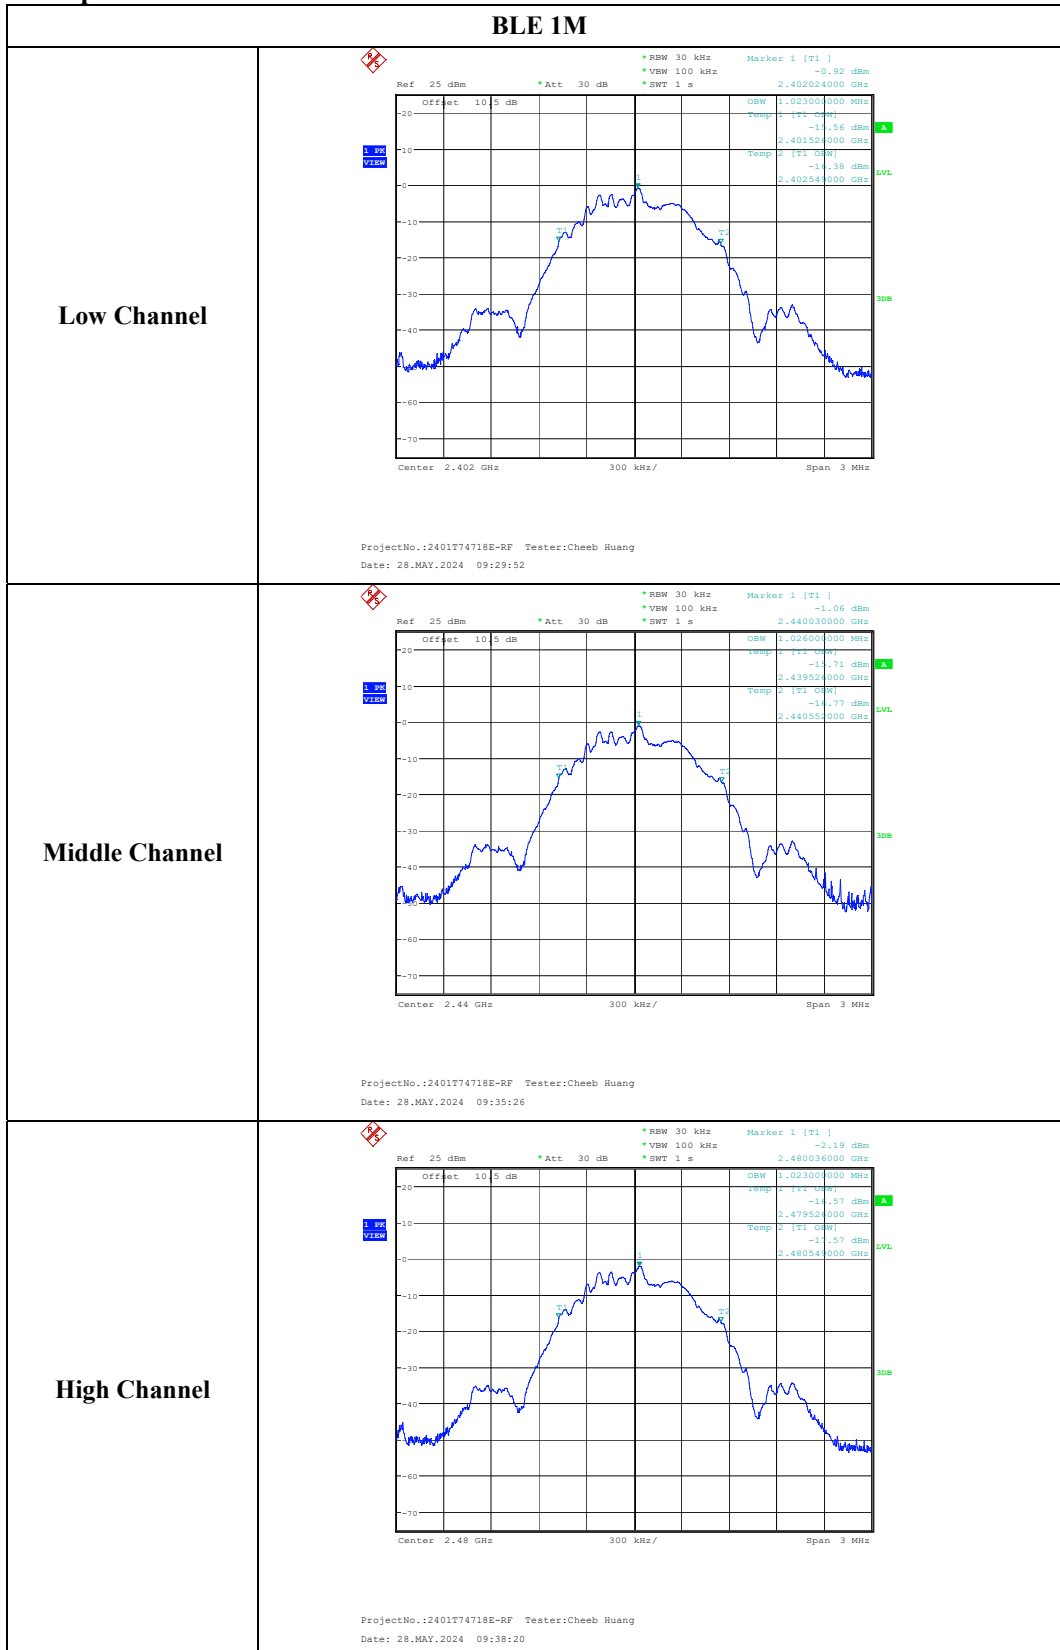

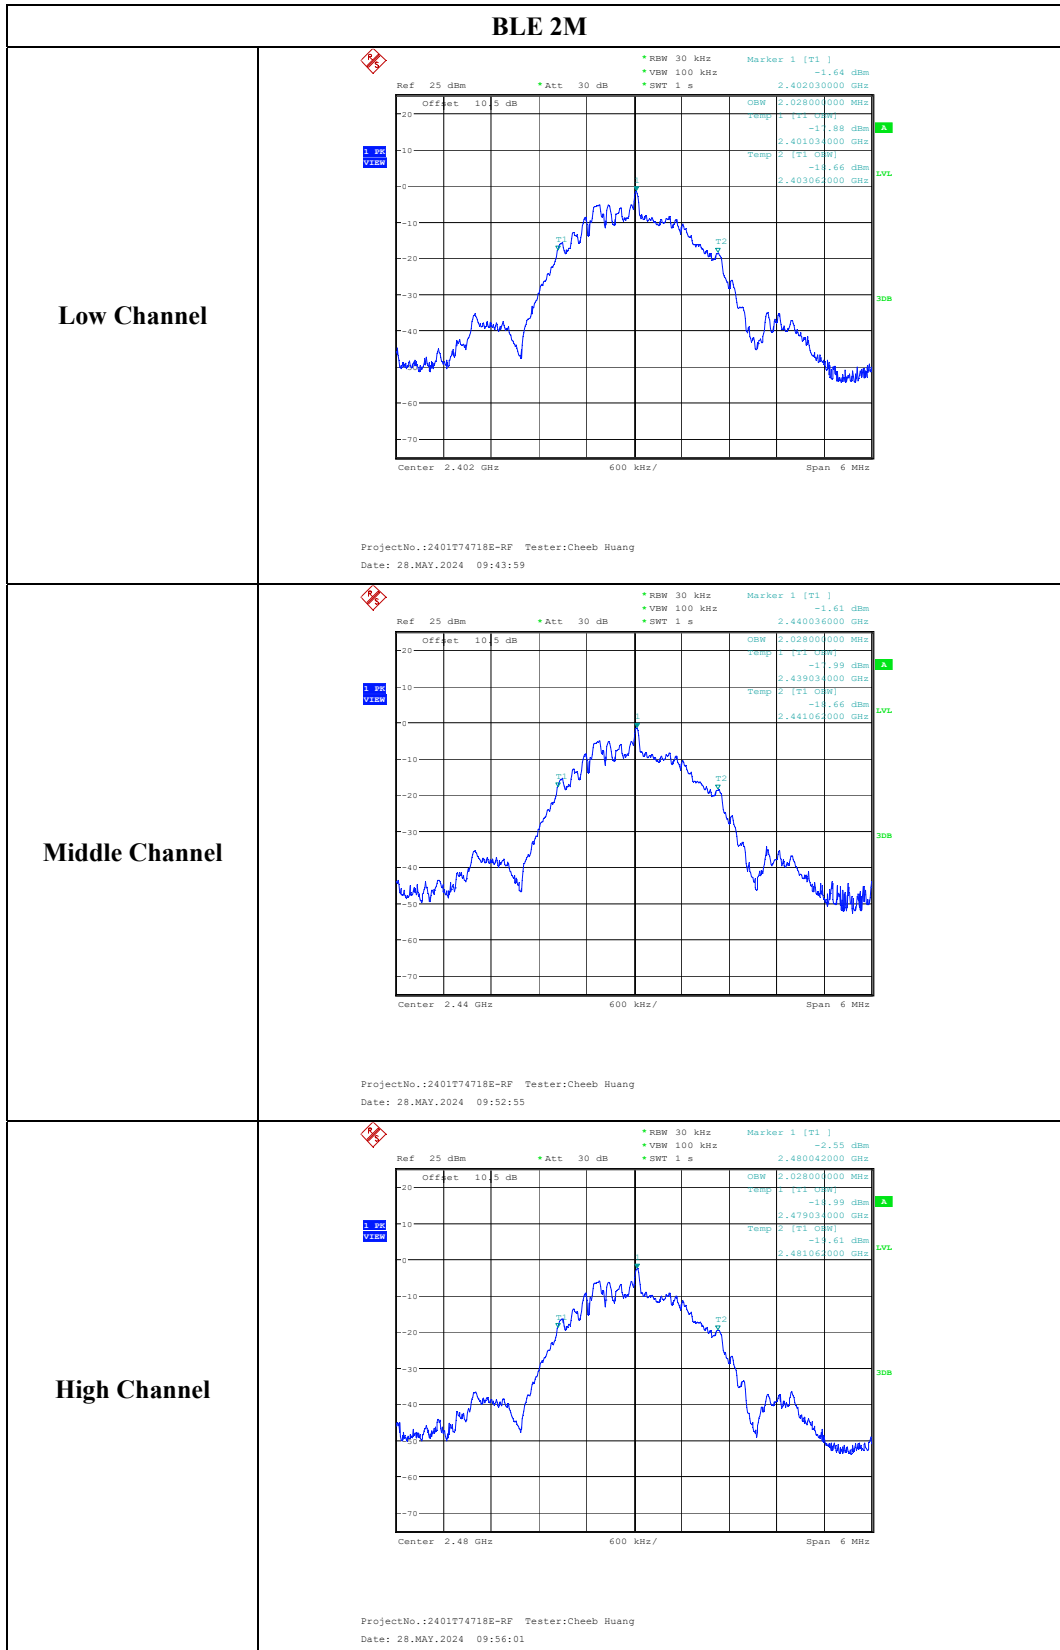

FCC §15.247(b) (3), RSS-247 §5.4 (d) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.


According to RSS-247§5.4 d) For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1W. Except as provided in Section 5.4(e), the e.i.r.p. shall not exceed 4 W.

As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power. The maximum conducted output power is the total transmit power delivered to all antennas and antenna elements, averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or transmitting at a reduced power level. If multiple modes of operation are implemented, the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.9.1.1

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

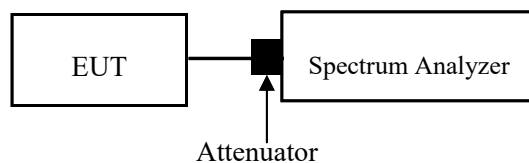

Test Data

Environmental Conditions


| | |
|---------------------------|---------|
| Temperature: | 24.3 °C |
| Relative Humidity: | 48 % |
| ATM Pressure: | 101 kPa |


The testing was performed by Cheeb Huang on 2024-05-28.

EUT operation mode: Transmitting

Test Result: Compliant.

| Test Modes | Test Frequency (MHz) | Peak Conducted Output Power (dBm) | Limits (dBm) |
|------------|----------------------|-----------------------------------|--------------|
| BLE 1M | 2402 | 2.78 | ≤30 |
| | 2440 | 2.68 | ≤30 |
| | 2480 | 1.69 | ≤30 |
| BLE 2M | 2402 | 2.78 | ≤30 |
| | 2440 | 2.94 | ≤30 |
| | 2480 | 1.97 | ≤30 |

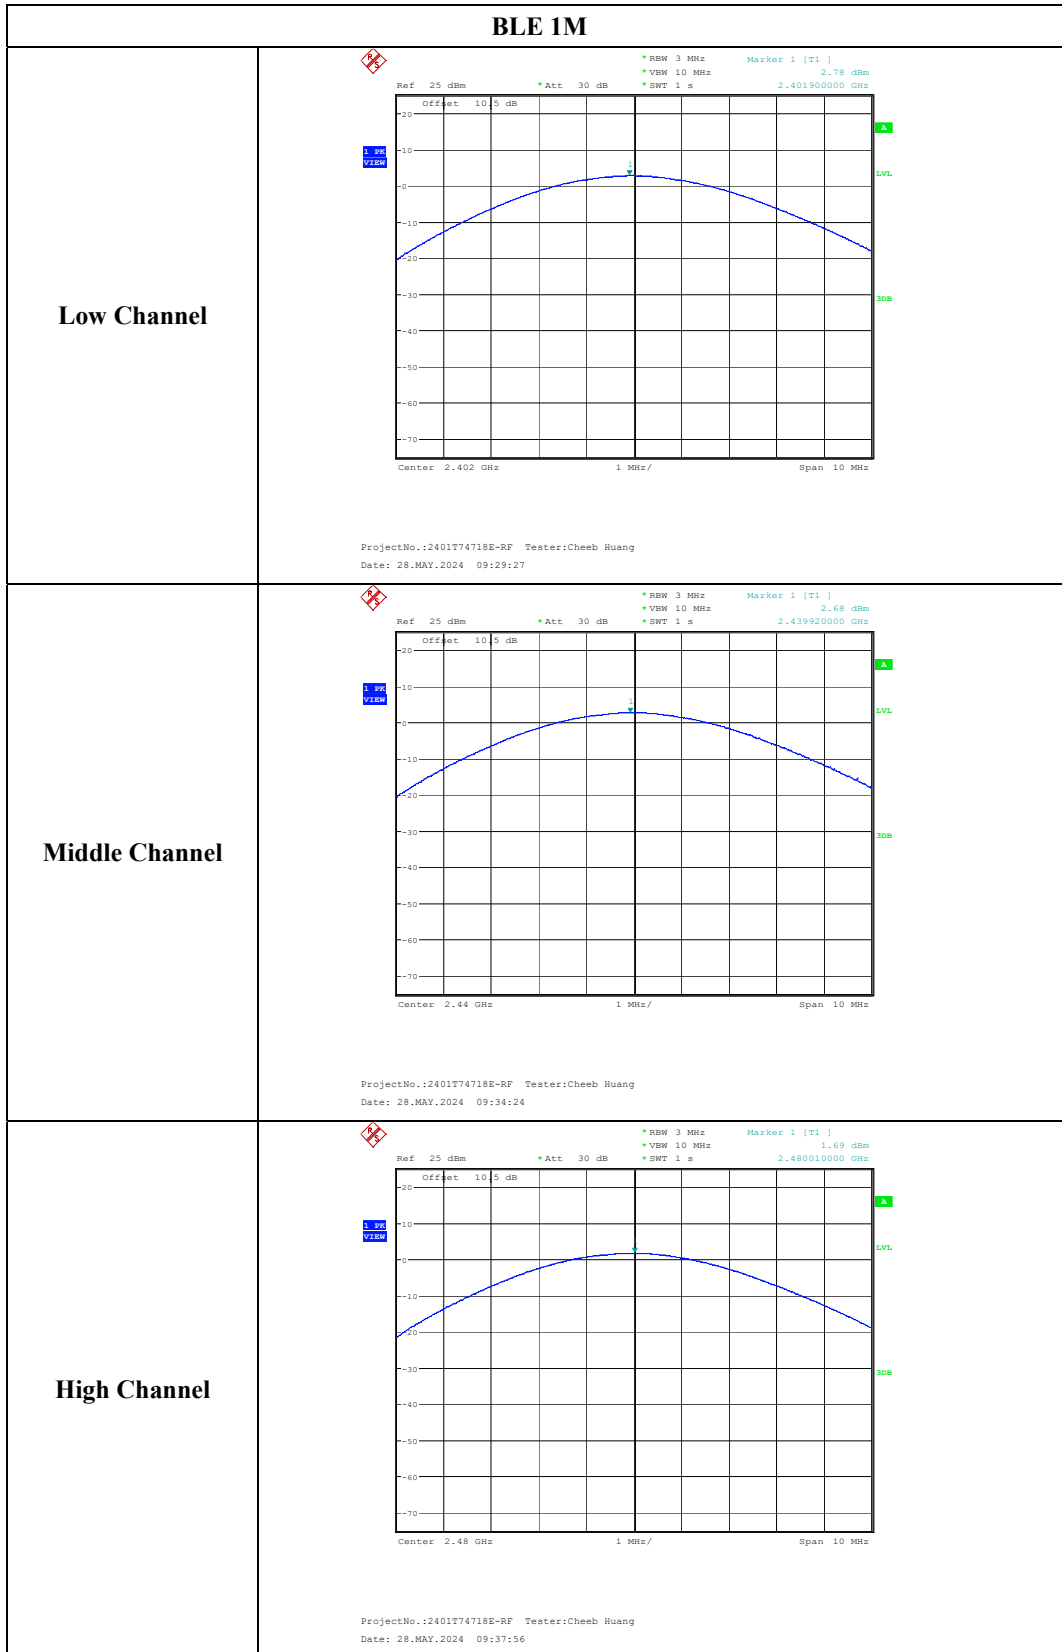

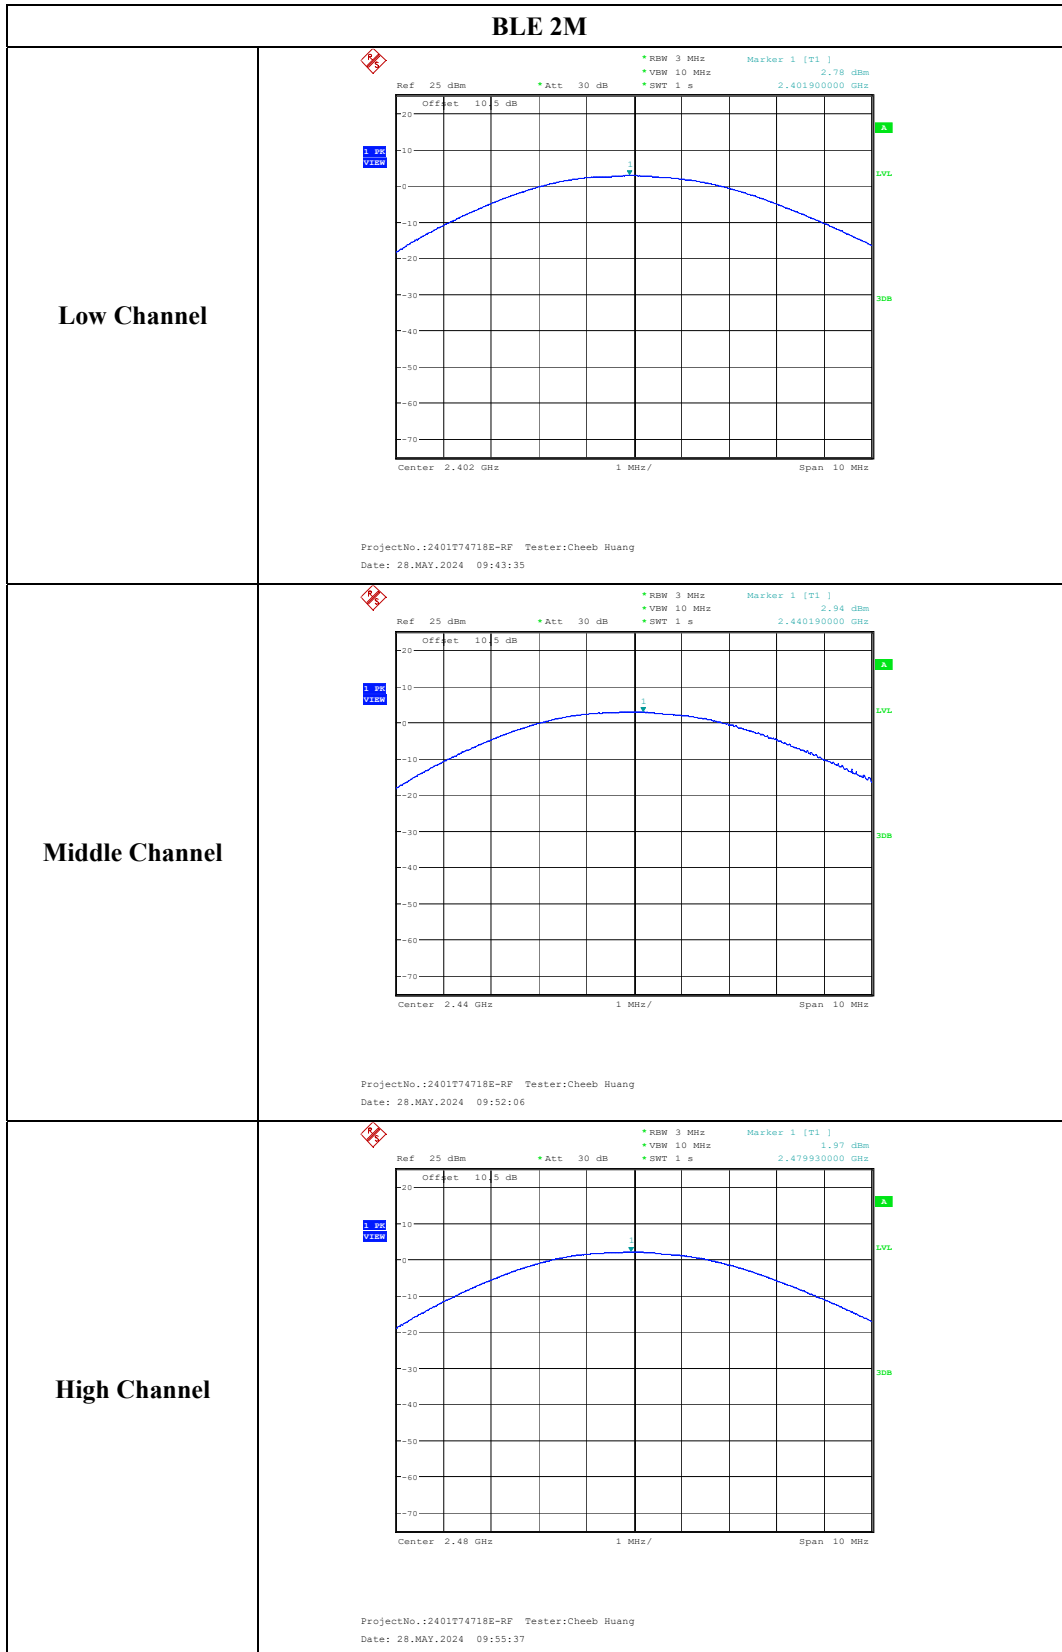

FCC §15.247(e), RSS-247 §5.2 (b) – POWER SPECTRAL DENSITY

Applicable Standard

According to FCC §15.247(e):

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.


According to RSS-247 §5.2 b):

- b) The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of section 5.4(d), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.10.2

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
3. Set the VBW $\geq 3 \times \text{RBW}$.
4. Set the span to 1.5 times the DTS bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

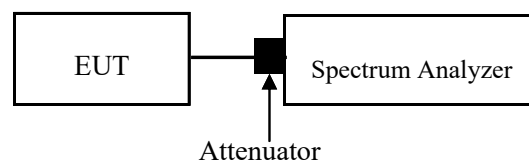

Test Data

Environmental Conditions


| | |
|---------------------------|---------|
| Temperature: | 24.3 °C |
| Relative Humidity: | 48 % |
| ATM Pressure: | 101 kPa |


The testing was performed by Cheeb Huang on 2024-05-28.

Test Mode: Transmitting

Test Result: Compliant.

| Test Modes | Test Frequency (MHz) | Power Spectral Density (dBm/3kHz) | Limit (dBm/3kHz) |
|-------------------|-----------------------------|--|-------------------------|
| BLE 1M | 2402 | -12.64 | ≤8.00 |
| | 2440 | -12.81 | ≤8.00 |
| | 2480 | -14.05 | ≤8.00 |
| BLE 2M | 2402 | -16.36 | ≤8.00 |
| | 2440 | -16.48 | ≤8.00 |
| | 2480 | -17.64 | ≤8.00 |

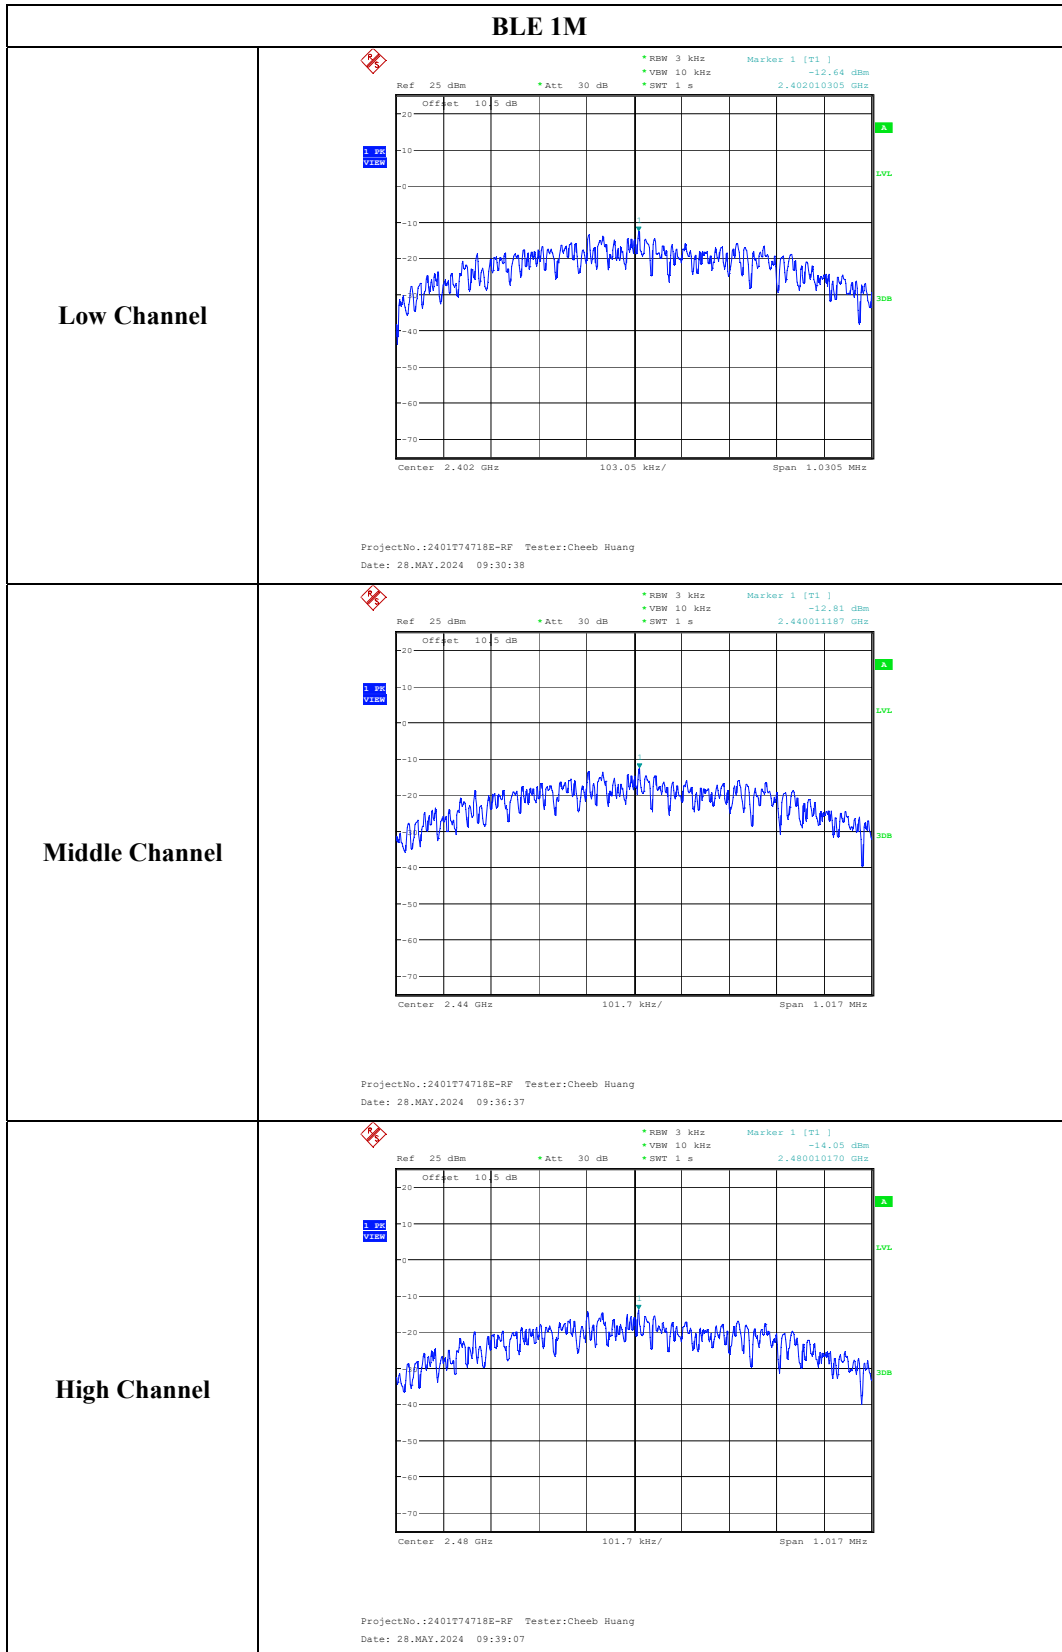

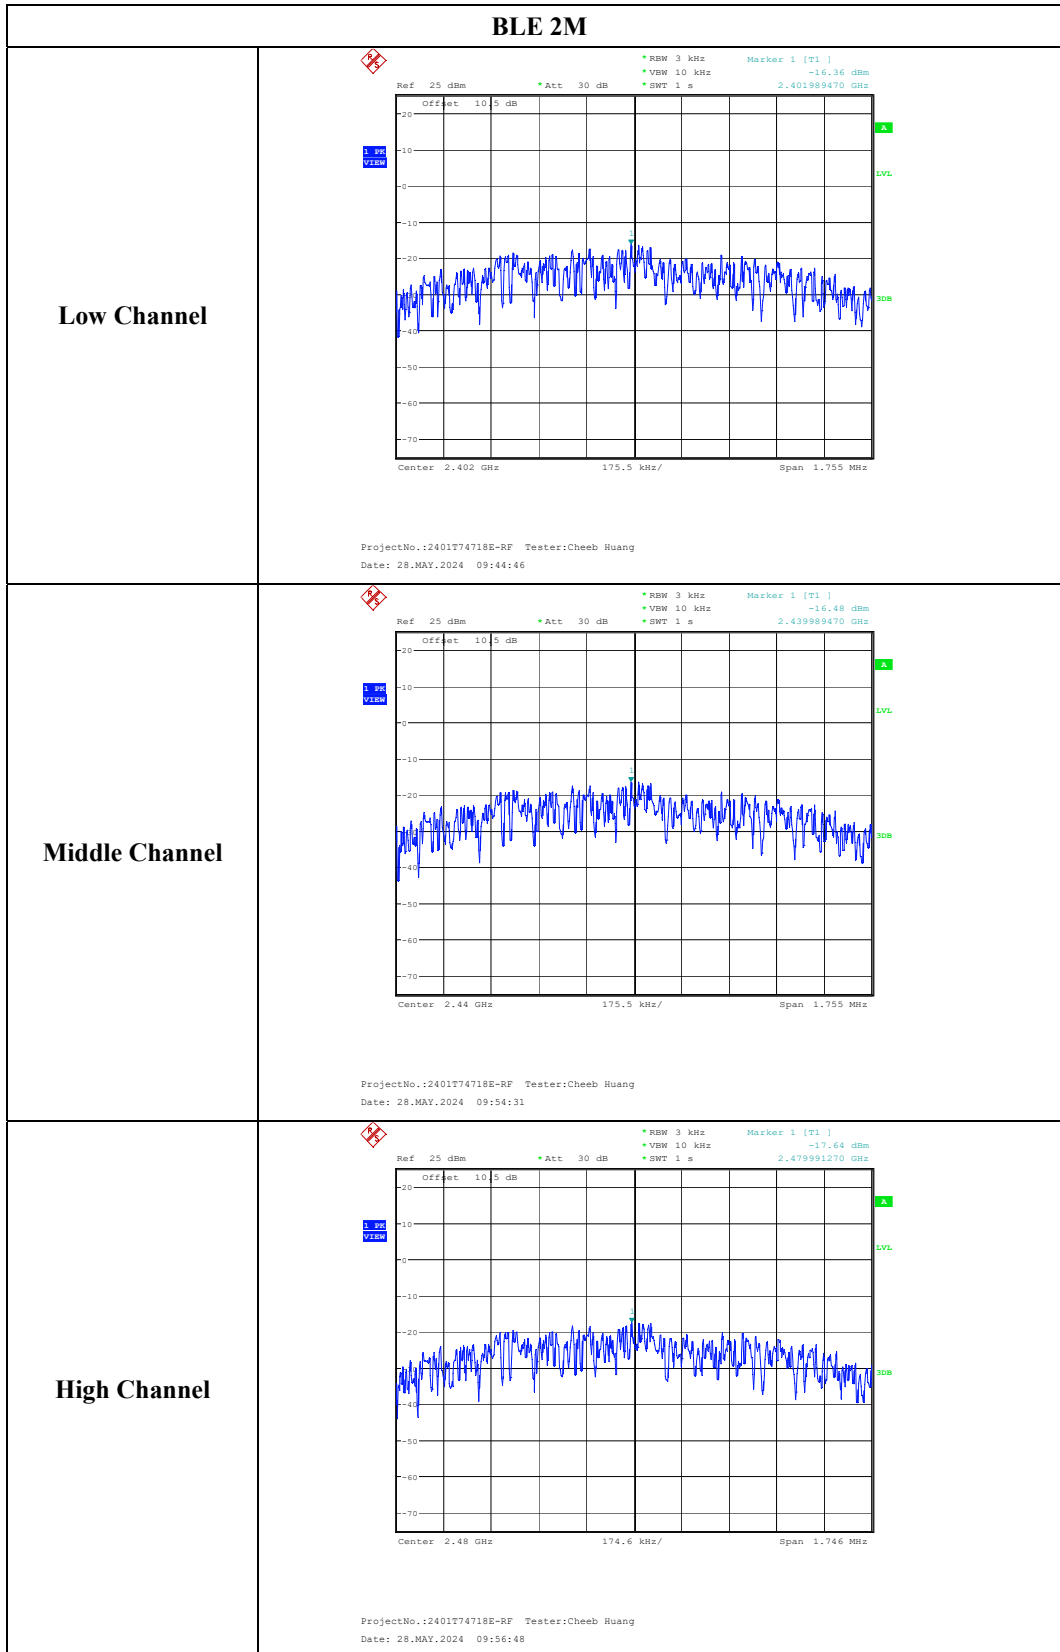

FCC §15.247(d) & RSS-247 §5.5 - 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required


Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.11

1. Set the RBW =100 kHz.
2. Set the VBW $\geq 3 \times$ RBW.
3. Detector = peak
4. Sweep time = auto couple.
5. Trace mode=max hold
6. All trace to fully stabilize
7. Use the peak marker function to determine the maximum amplitude level.

Ensure that amplitude of all unwanted emissions outside of the authorized frequency band(excluding restricted frequency bands) is attenuated by at least the minimum requirement specified in 11.11.

Report the three highest emissions relative to the limit.

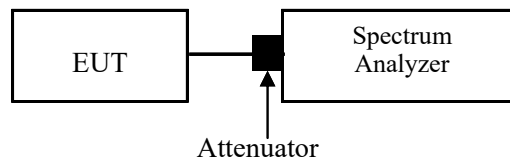

Test Data


Environmental Conditions

| | |
|---------------------------|---------|
| Temperature: | 24.3 °C |
| Relative Humidity: | 48 % |
| ATM Pressure: | 101 kPa |

The testing was performed by Cheeb Huang on 2024-05-28.


EUT operation mode: Transmitting

Test Result: Compliant.

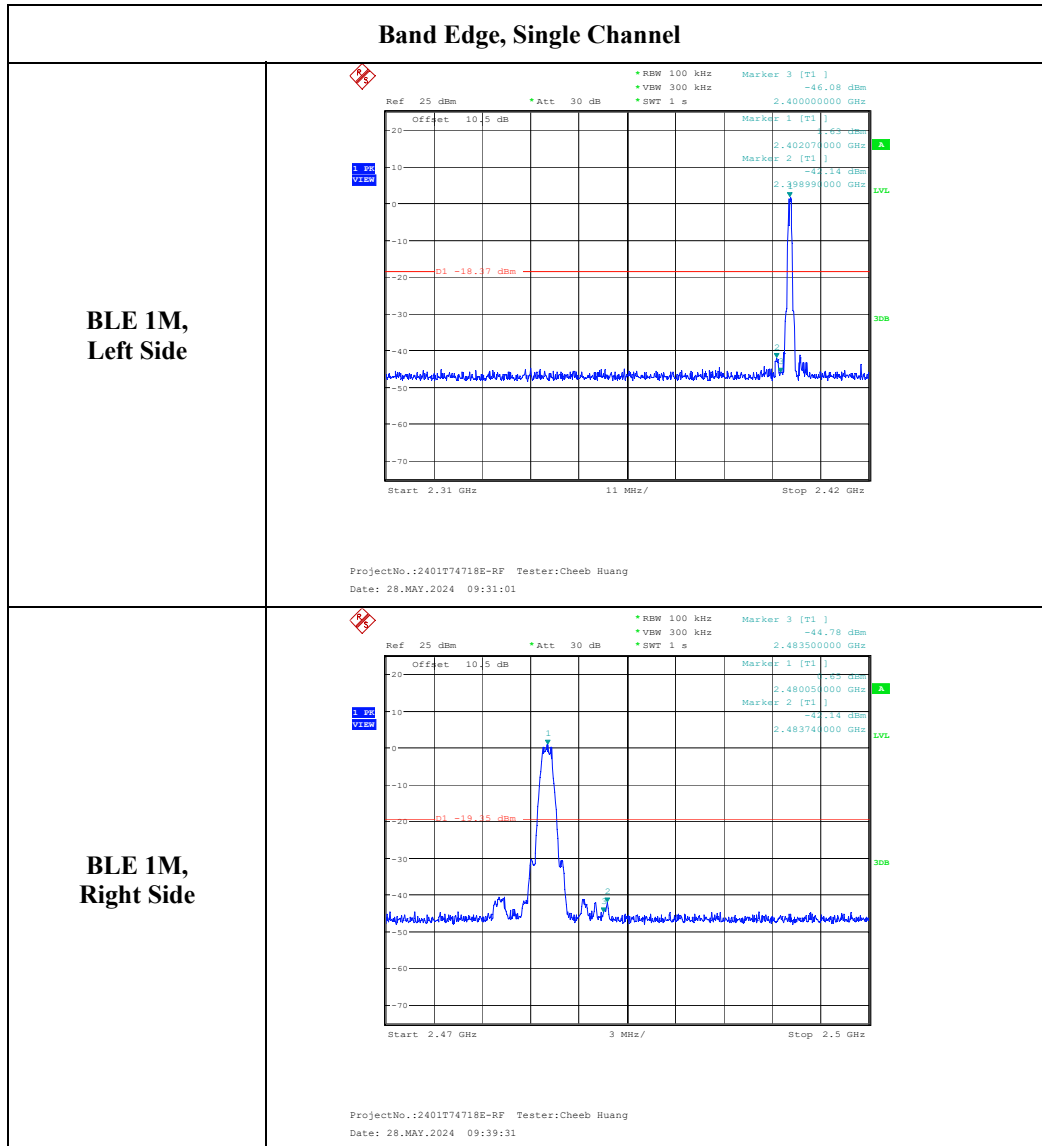


Band Edge, Single Channel

**BLE 2M,
Left Side**

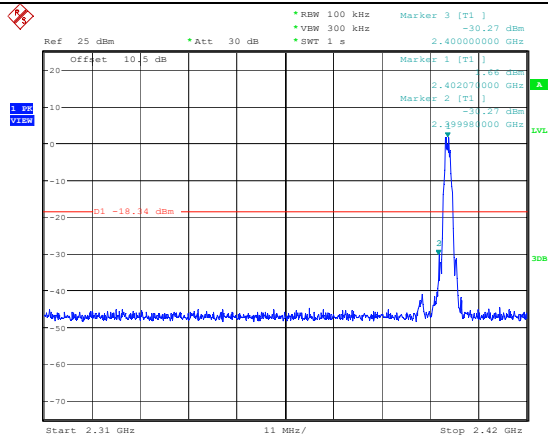

ProjectNo.:2401T74718E-RF Tester:Cheeb Huang
Date: 28.MAY.2024 09:45:10

**BLE 2M,
Right Side**

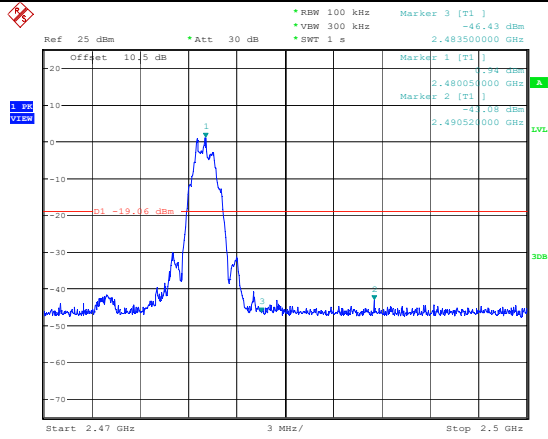

ProjectNo.:2401T74718E-RF Tester:Cheeb Huang
Date: 28.MAY.2024 09:57:23

EUT PHOTOGRAPHS

Please refer to the attachment 2401T74718E-RF External photo and 2401T74718E-RF Internal photo.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2401T74718E-RF Test Setup photo.

******* END OF REPORT *******