

TEST REPORT

Applicant Name: Meizhou Guo Wei Electronics Co., Ltd.
Address: AD1 Section, Economic Development Area, Dongsheng Industrial District, Meizhou, Guangdong, China.
Report Number: SZ1240301-10056E-RF
FCC ID: 2ARRB-PIP15PU
IC: 20353-PIP15PU

Test Standard (s)

FCC PART 15D; RSS-GEN ISSUE 5, FEBRUARY 2021 AMENDMENT 2; RSS-213, ISSUE 3, MARCH 2015

Sample Description

Product Type: Audio Baby Monitor
Model No.: PIP15 MULTI-ROOM PU
Multiple Model(s) No.: N/A
Trade Mark: Motorola
Date Received: 2024/03/01
Issue Date: 2024/03/21

Test Result:	Pass▲
--------------	-------

▲ In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

April Zhang

April Zhang
RF Engineer

Approved By:

Nancy Wang

Nancy Wang
RF Supervisor

Note: The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.

This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

Bay Area Compliance Laboratories Corp. (Shenzhen)

5F(B-West), 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China
Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	4
GENERAL INFORMATION.....	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
OBJECTIVE	5
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY	6
TEST FACILITY	6
SYSTEM TEST CONFIGURATION.....	7
DESCRIPTION OF TEST CONFIGURATION	7
EQUIPMENT MODIFICATIONS	7
SUPPORT EQUIPMENT LIST AND DETAILS	7
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS	9
TEST EQUIPMENT LIST	10
FCC §1.1307 & §2.1093 - RF EXPOSURE.....	12
APPLICABLE STANDARD	12
TEST RESULT	12
RSS-102 – RF EXPOSURE.....	13
APPLICABLE STANDARD	13
§ 15.317, § 15.203 & RSS-GEN §6.8 ANTENNA REQUIREMENT.....	14
APPLICABLE STANDARD	14
ANTENNA CONNECTOR CONSTRUCTION	14
§ 15.315, § 15.207 & RSS-213 §5.4 CONDUCTED EMISSIONS.....	15
APPLICABLE STANDARD	15
EUT SETUP	15
EMI TEST RECEIVER SETUP.....	16
TEST PROCEDURE	16
FACTOR & OVER LIMIT CALCULATION.....	16
TEST DATA	17
§ 15.323 (A) & RSS-213 §5.5 EMISSION BANDWIDTH.....	22
APPLICABLE STANDARD	22
TEST PROCEDURE	22
TEST DATA	23
§ 15.319 (C) & RSS-213 §5.6 PEAK TRANSMIT POWER	27
APPLICABLE STANDARD	27
TEST PROCEDURE	27
TEST DATA	28
§ 15.319 (D) & RSS-213 §5.7 POWER SPECTRAL DENSITY	32
APPLICABLE STANDARD	32
TEST PROCEDURE	32
TEST DATA	33

§ 15.323 (D) & RSS-213 §5.8 EMISSION INSIDE AND OUTSIDE THE SUB-BAND37
 APPLICABLE STANDARD37
 TEST PROCEDURE38
 FACTOR & OVER LIMIT/MARGIN CALCULATION39
 EUT SETUP39
 TEST DATA40

§ 15.323 (F) & RSS-213 §5.3 FREQUENCY STABILITY.....71
 APPLICABLE STANDARD71
 TEST PROCEDURE71
 TEST DATA72

§ 15.323 (C)(E)§ 15.319 (F) & RSS-213 §5.1&§5.2 SPECIFIC REQUIREMENTS FOR UPCS DEVICE73
 APPLICABLE STANDARD73
 TEST PROCEDURE73
 TEST DATA73
 1) AUTOMATIC DISCONTINUATION OF TRANSMISSION.....74
 2) MONITORING TIME74
 3) LOWER MONITORING THRESHOLD.....74
 4) MAXIMUM TRANSMIT PERIOD74
 5) SYSTEM ACKNOWLEDGEMENT75
 6) LEAST INTERFERED CHANNEL (LIC)75
 7) RANDOM WAITING76
 8) MONITORING BANDWIDTH AND REACTION TIME76
 9) MONITORING ANTENNA.....76
 10) MONITORING THRESHOLD RELAXATION76
 11) DUPLEX CONNECTIONS.....77
 12) ALTERNATIVE MONITORING INTERVAL77
 13) FAIR ACCESS77
 14) FRAME REPETITION STABILITY FRAME PERIOD AND JITTER77

EUT PHOTOGRAPHS78
TEST SETUP PHOTOGRAPHS79

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	SZ1240301-10056E-RF	Original Report	2024/03/21

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

HVIN	PIP15PU
FVIN	N/A
Product	Audio Baby Monitor
Tested Model	PIP15 MULTI-ROOM PU
Multiple Model(s)	N/A
Frequency Range	1921.536-1928.448 MHz
Maximum conducted peak output power	18.92 dBm
Modulation Technique	GFSK
Antenna Specification [#]	ANT0: 1.37dBi; ANT1: 1.28dBi (It is provided by the applicant)
Voltage Range	DC 1.2V*2 by AAA size NIMH battery or DC 5V from adapter
Sample serial number	2I63-4 for Conducted and Radiated Emissions Test 2I63-1 for RF Conducted Test (Assigned by BACL, Shenzhen)
Sample/EUT Status	Good condition
Adapter Information	Adapter 1 Model: S005CAU0500100 Input: AC 100-240V~50/60Hz, 0.2A Output: DC 5.0V, 1.0A Adapter 2 Model: UT-681A-5100UY Input: AC 100-240V~50/60Hz, 0.2A Output: DC 5.0V, 1.0A, 5.0W

Objective

The tests were performed in order to determine the compliance of the EUT with FCC Part 15-Subpart D, section 15.317, 15.319 and 15.323 rules. The EMI measurements were performed according to the measurement procedure described in ANSI C63.17 – 2013 and RSS-213 Issue 3, 2GHz License-Exempt Personal Communications Service Devices (PCS) OF THE Canadian Department of Industry rules and RSS-GEN ISSUE 5, FEBRUARY 2021 AMENDMENT 2 of the Innovation, Science and Economic Development Canada rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.17 - 2013, American National Standard Methods of Measurement of the Electromagnetic and Operational Compatibility of Unlicensed Personal Communications Services (UPCS) Devices.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		±5%
RF Frequency		213.55 Hz(k=2, 95% level of confidence)
RF output power, conducted		0.72 dB(k=2, 95% level of confidence)
Unwanted Emission, conducted		1.75 dB(k=2, 95% level of confidence)
Radiated Emissions	9kHz - 30MHz	3.30dB(k=2, 95% level of confidence)
	30MHz~200MHz (Horizontal)	4.48dB(k=2, 95% level of confidence)
	30MHz~200MHz (Vertical)	4.55dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Horizontal)	4.85dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Vertical)	5.05dB(k=2, 95% level of confidence)
	1GHz - 6GHz	5.35dB(k=2, 95% level of confidence)
6GHz - 18GHz		5.44dB(k=2, 95% level of confidence)
Temperature		±1°C
Humidity		±1%
Supply voltages		±0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 715558, the FCC Designation No. : CN5045.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0023.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured to testing mode which is provided by the manufacturer. The EUT has two antennas, pre-scan output power, the ANT0 was the worst case select to test except radiated emissions above 1G.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Rohde & Schwarz	Digital Radio Communication Tester	CMD60	830861/029

External I/O Cable


Cable Description	Length (m)	From Port	To
Un-shielding Detachable USB Cable	2	EUT	Adapter
Unshielded Un-detachable AC cable	1.2	AC Power	CMD60

Block Diagram of Test Setup

For Conducted Emission

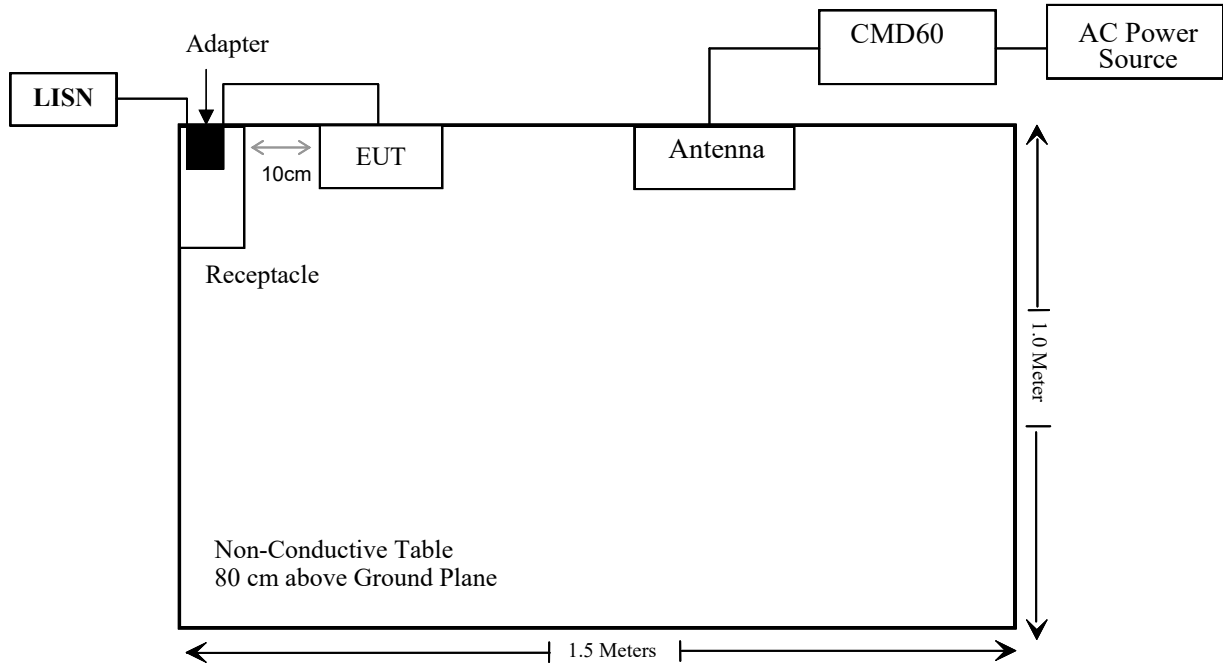

For Radiated Emission

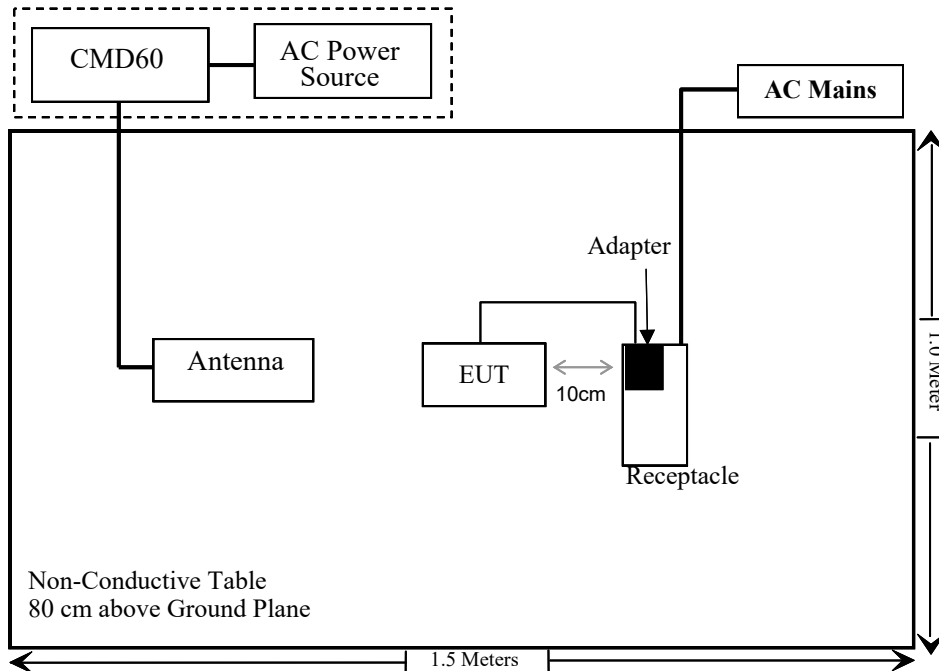

SUMMARY OF TEST RESULTS

FCC Rules	ISED Rules	Description of Test	Result
§ 1.1307 & 2.1093	RSS-102	RF EXPOSURE	Compliant
§ 15.317, § 15.203	RSS-Gen §6.8	Antenna Requirement	Compliant
§ 15.315, § 15.207	RSS-213 §5.4	Conducted Emission	Compliant
§ 15.323 (a)	RSS-213 §5.5	Emission Bandwidth	Compliant
§ 15.319 (c)	RSS-213 §5.6	Peak Transmit Power	Compliant
§ 15.319 (d)	RSS-213 §5.7	Power Spectral Density	Compliant
§ 15.323 (d)	RSS-213 §5.8	Emission Inside and Outside the sub-band	Compliant
/	RSS-213 §5.8	Radiated Emission	Compliant
§ 15.323 (f)	RSS-213 §5.3	Frequency Stability	Compliant
§ 15.323 (c)(e) § 15.319 (f)	RSS-213 §5.1&§5.2	Specific Requirements for UPCS	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2024/01/16	2025/01/15
Rohde & Schwarz	LISN	ENV216	101613	2024/01/16	2025/01/15
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2023/08/03	2024/08/02
Unknown	CE Cable	CE Cable	UF A210B-1-0720-504504	2023/08/03	2024/08/02
Audix	EMI Test software	E3	191218	NCR	NCR
Radiated Emission Test					
R&S	EMI Test Receiver	ESR3	102455	2024/01/16	2025/01/15
Sonoma instrument	Pre-amplifier	310 N	186238	2023/06/08	2024/06/07
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2023/07/20	2024/07/19
ETS	Passive Loop Antenna	6512	29604	2023/07/07	2024/07/06
Unknown	Cable	Chamber Cable 1	F-03-EM236	2023/08/03	2024/08/02
Unknown	Cable	Chamber Cable 4	EC-007	2023/08/03	2024/08/02
Audix	EMI Test software	E3	19821b(V9)	NCR	NCR
Rohde & Schwarz	Spectrum Analyzer	FSV40	101605	2023/04/18	2024/04/17
COM-POWER	Pre-amplifier	PA-122	181919	2023/06/29	2024/06/28
Schwarzbeck	Horn Antenna	BBHA9120D(1201)	1143	2023/07/26	2024/07/25
Unknown	RF Cable	KMSE	0735	2023/10/08	2024/10/07
Unknown	RF Cable	UFA147	219661	2023/10/08	2024/10/07
Unknown	RF Cable	XH750A-N	J-10M	2023/10/08	2024/10/07
Audix	EMI Test software	E3	191218(V9)	NCR	NCR
A.H.System	Pre-amplifier	PAM-1840VH	190	2023/08/03	2024/08/02
Electro-Mechanics Co	Horn Antenna	3116	9510-2270	2023/09/18	2026/09/17
UTIFLEX	RF Cable	NO. 13	232308-001	2023/08/03	2024/08/02
JD	Multiplex Switch Test Control Set	DT7220FSU	DQ77926	NCR	NCR

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
R&S	spectrum analyzer	FSV40	101942	2023/12/18	2024/12/17
BACL	Temperature & Humidity Chamber	BTH-150-40	30145	2024/01/16	2025/01/15
Rohde & Schwarz	Digital Radio Communication Tester	CMD60	830553/018	2023/06/08	2024/06/07
Fluke	Digital Multimeter	287	19000011	2023/06/08	2024/06/07
Unknown	3dB Attenuator	Unknown	F-03-EM121	2023/07/04	2024/07/03
WEINSCHEL	Power Splitter	1515	RH386	2023/07/04	2024/07/03
Unknown	RF Cable	65475	01670515	2023/07/04	2024/07/03

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1307 & §2.1093 - RF EXPOSURE

Applicable Standard

FCC§1.1307 and §2.1093.

Test Result

Compliant, please refer to the SAR report: SZ1240301-10056E-SAA.

RSS-102 – RF EXPOSURE

Applicable Standard

According to RSS-102, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

Result: Compliant

Please refer to SAR Report Number: SZ1240301-10056E-SAB.

§ 15.317, § 15.203 & RSS-Gen §6.8 ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device’s antenna shall be stated, based on a measurement or on data from the antenna’s manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device’s ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device. Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

Antenna Connector Construction

The EUT has two integral antenna arrangements which were permanently attached and the gain[#] is ANT0: 1.37dBi; ANT1: 1.28dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Type	Antenna Gain [#]	Impedance
PCB	1.28dBi	50Ω
Monopole	1.37dBi	50Ω

§ 15.315, § 15.207 & RSS-213 §5.4 CONDUCTED EMISSIONS

Applicable Standard

FCC§15.315, an unlicensed PCS device that is designed to be connected to the public utility (AC) power line must meet the limits specified in §15.207.


A radio apparatus that is designed to be connected to the public utility (AC) power line shall ensure that the radio frequency voltage, which is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz-30 MHz, shall not exceed the limits in the below table.

Unless the requirements applicable to a given device state otherwise, for any radio apparatus equipped to operate from the public utility AC power supply either directly or indirectly (such as with a battery charger), the radio frequency voltage of emissions conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in below table. The more stringent limit applies at the frequency range boundaries.

Table - AC Power Lines Conducted Emission Limits		
Frequency range (MHz)	Conducted limit (dBµV)	
	Quasi-Peak	Average**
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Note: *Decreases with the logarithm of the frequency
 ** A linear average detector is required

EUT Setup

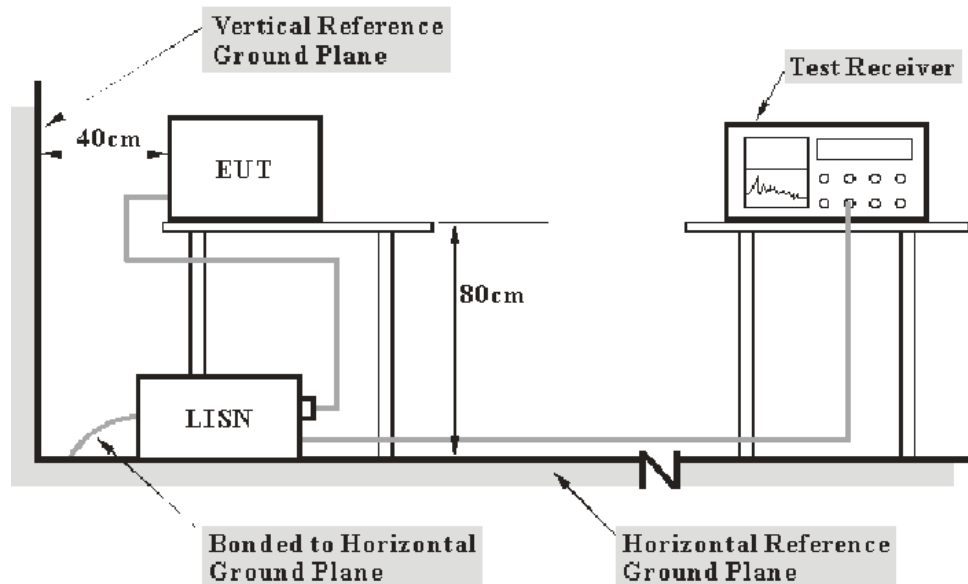

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC 15.315, FCC 15.207 and RSS-Gen limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Factor & Over Limit Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$

Note: The term "cable loss" refers to the combination of a cable and a 10dB transient limiter (attenuator).

Test Data**Environmental Conditions**

Temperature:	22 °C
Relative Humidity:	60 %
ATM Pressure:	101 kPa


The testing was performed by Macy Shi on 2024-03-04 and 2024-03-21.

EUT operation mode: Transmitting (worst case is ANT0 Low channel)

For Adapter 1

AC 120V/60 Hz, Line

Date: 2024-03-21

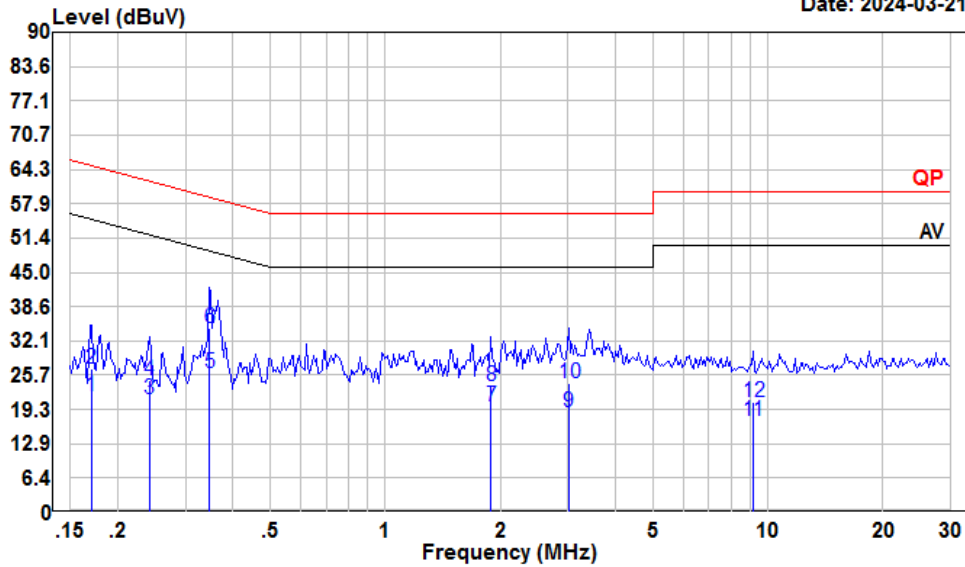


Condition: Line
 Project : SZ1240301-10056E-RF
 Tester : Macy shi
 Note : Transmitting
 Note : S005CAU0500100

	Read Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.17	0.69	21.70	10.86	10.15	54.94	-33.24	Average
2	0.17	5.80	26.81	10.86	10.15	64.94	-38.13	QP
3	0.24	0.37	21.30	10.74	10.19	52.04	-30.74	Average
4	0.24	3.82	24.75	10.74	10.19	62.04	-37.29	QP
5	0.35	5.21	25.99	10.62	10.16	49.05	-23.06	Average
6	0.35	13.64	34.42	10.62	10.16	59.05	-24.63	QP
7	1.89	-0.80	19.94	10.58	10.16	46.00	-26.06	Average
8	1.89	2.92	23.66	10.58	10.16	56.00	-32.34	QP
9	3.01	-1.86	18.83	10.42	10.27	46.00	-27.17	Average
10	3.01	3.51	24.20	10.42	10.27	56.00	-31.80	QP
11	9.16	-3.76	17.07	10.58	10.25	50.00	-32.93	Average
12	9.16	-0.16	20.67	10.58	10.25	60.00	-39.33	QP

AC 120V/60 Hz, Neutral

Date: 2024-03-21

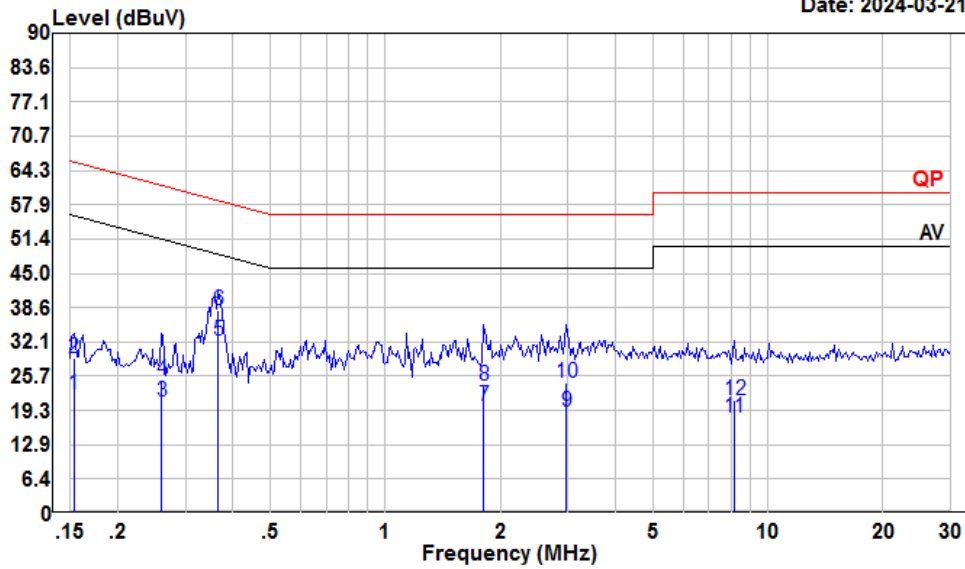


Condition: Neutral
 Project : SZ1240301-10056E-RF
 Tester : Macy shi
 Note : Transmitting
 Note : S005CAU0500100

	Read Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.15	1.68	22.42	10.59	10.15	55.82	-33.40	Average
2	0.15	8.36	29.10	10.59	10.15	65.82	-36.72	QP
3	0.26	0.38	21.06	10.49	10.19	51.42	-30.36	Average
4	0.26	4.41	25.09	10.49	10.19	61.42	-36.33	QP
5	0.37	11.66	32.44	10.60	10.18	48.61	-16.17	Average
6	0.37	17.33	38.11	10.60	10.18	58.61	-20.50	QP
7	1.81	-0.61	20.00	10.47	10.14	46.00	-26.00	Average
8	1.81	3.43	24.04	10.47	10.14	56.00	-31.96	QP
9	2.98	-1.59	19.08	10.40	10.27	46.00	-26.92	Average
10	2.98	3.94	24.61	10.40	10.27	56.00	-31.39	QP
11	8.15	-3.15	17.83	10.74	10.24	50.00	-32.17	Average
12	8.15	0.37	21.35	10.74	10.24	60.00	-38.65	QP

For Adapter 2

AC 120V/60 Hz, Line

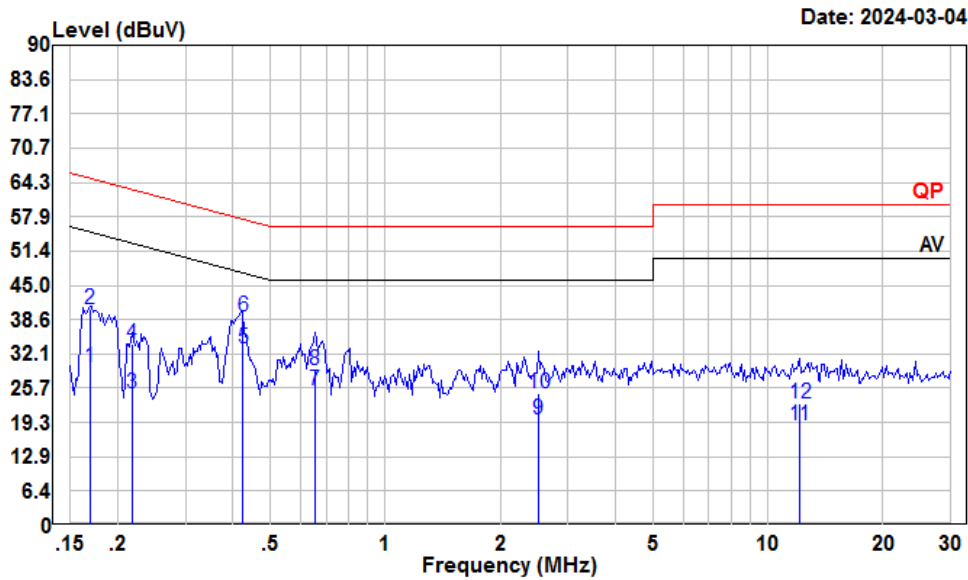


Condition: Line
 Project : SZ1240301-10056E-RF
 Tester : Macy shi
 Note : Transmitting
 Note : UT-681A-5100UY

	Read Freq	Read Level	Cable Level	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dBuV	dB	
1	0.17	8.56	29.57	10.15	55.03	-25.46	Average
2	0.17	19.49	40.50	10.15	65.03	-24.53	QP
3	0.22	3.85	24.75	10.13	52.92	-28.17	Average
4	0.22	13.04	33.94	10.13	62.92	-28.98	QP
5	0.42	12.56	33.31	10.20	47.37	-14.06	Average
6	0.42	18.49	39.24	10.20	57.37	-18.13	QP
7	0.65	4.70	25.41	10.21	46.00	-20.59	Average
8	0.65	8.49	29.20	10.21	56.00	-26.80	QP
9	2.51	-0.89	19.82	10.21	46.00	-26.18	Average
10	2.51	4.05	24.76	10.21	56.00	-31.24	QP
11	12.06	-1.97	18.82	10.19	50.00	-31.18	Average
12	12.06	1.93	22.72	10.19	60.00	-37.28	QP

AC 120V/60 Hz, Neutral

Date: 2024-03-04

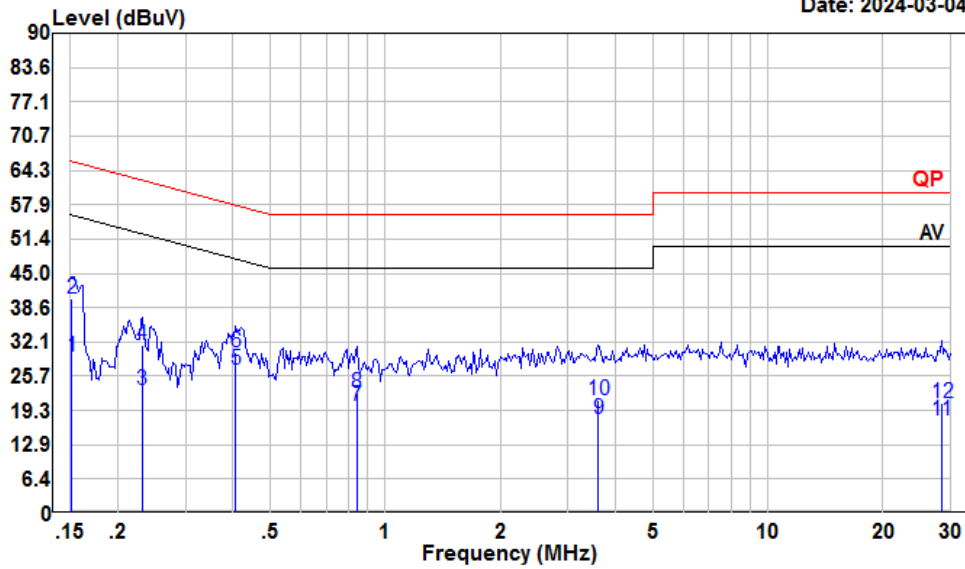

Condition: Neutral
 Project : SZ1240301-10056E-RF
 Tester : Macy shi
 Note : Transmitting
 Note : UT-681A-5100UY

	Read Freq	Read Level	Cable Level	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dB	
1	0.15	8.67	29.41	10.15	55.91	-26.50	Average
2	0.15	19.60	40.34	10.15	65.91	-25.57	QP
3	0.23	2.41	23.03	10.17	52.39	-29.36	Average
4	0.23	11.03	31.65	10.17	62.39	-30.74	QP
5	0.41	6.02	26.87	10.22	47.73	-20.86	Average
6	0.41	9.40	30.25	10.22	57.73	-27.48	QP
7	0.84	-0.90	20.07	10.17	46.00	-25.93	Average
8	0.84	1.62	22.59	10.17	56.00	-33.41	QP
9	3.60	-3.01	17.65	10.26	46.00	-28.35	Average
10	3.60	0.56	21.22	10.26	56.00	-34.78	QP
11	28.45	-3.42	17.36	10.25	50.00	-32.64	Average
12	28.45	-0.04	20.74	10.25	60.00	-39.26	QP


§ 15.323 (A) & RSS-213 §5.5 EMISSION BANDWIDTH

Applicable Standard

Operation shall be contained within the 1920–1930 MHz band. The emission bandwidth shall be less than 2.5 MHz and greater than 50 kHz.

The emission bandwidth is measured in accordance with ANSI C63.17 sub-clause 6.1.3 using the setup below:

Test Setup 1:

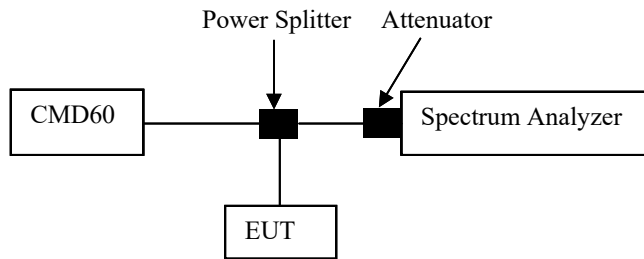

The width, in Hz, of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that is 26 dB down relative to the maximum level of the modulated carrier. It is based on the use of measurement instrumentation employing a peak detector function with an instrument resolution bandwidth approximately equal to 1% of the emission band-width of the device under measurement. [Extraction from 47 CFR 15, subpart D, 15.303 (C)].

Test Procedure

Using the manufacturer’s information on occupied bandwidth set the spectrum analyzer as follows:

Resolution bandwidth	1.0% of the emission bandwidth (as close as possible)
Video bandwidth	>3 times the resolution bandwidth
Number of sweeps	sufficient to stability the trace
Detection mode	peak detection with maximum hold

EBW:

The emission bandwidth (x dB) is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated x dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth.

OBW:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately 3x RBW.

Test Data

Environmental Conditions

Temperature:	24~25 °C
Relative Humidity:	46~47 %
ATM Pressure:	101 kPa

The testing was performed by Hanic Pan on 2024-03-14.


Test mode: Transmitting

Test Result: Compliant

Channel	Center Frequency (MHz)	99% Emission Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)	Limit
Low	1921.536	1.235	1.430	50 kHz ~ 2.5 MHz
Middle	1924.992	1.238	1.430	50 kHz ~ 2.5 MHz
High	1928.448	1.244	1.426	50 kHz ~ 2.5 MHz


99% Emission Bandwidth

Low Channel

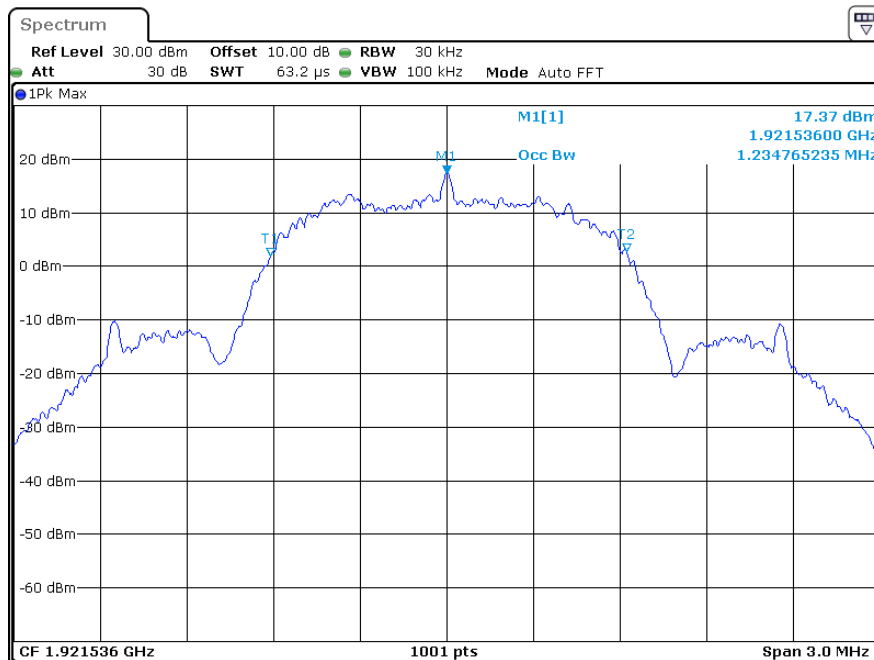


ProjectNo.:SZ1240301-10056E-RF Tester:Hanic Pan
 Date: 14.MAR.2024 11:15:05

Middle Channel

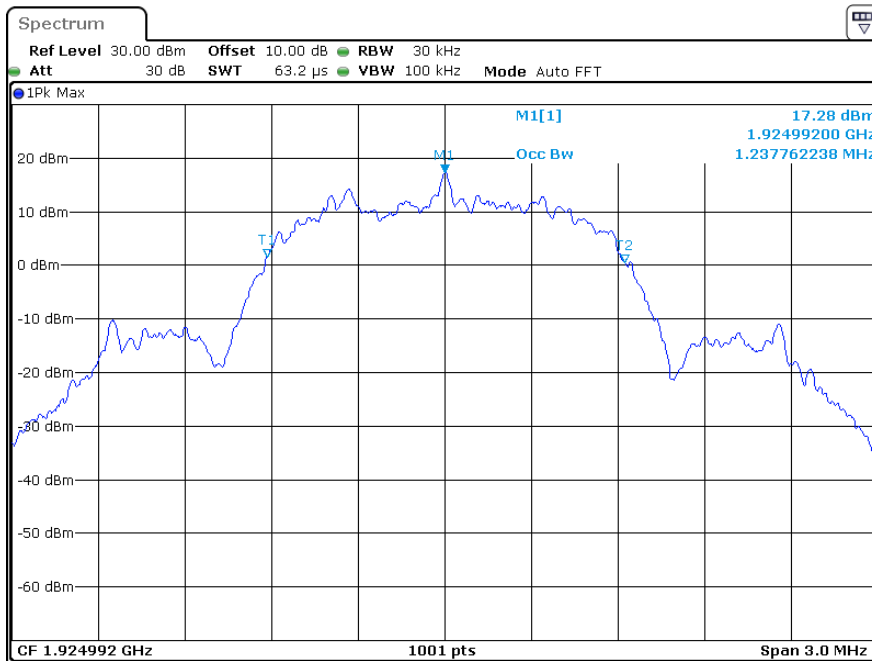

ProjectNo.:SZ1240301-10056E-RF Tester:Hanic Pan
Date: 14.MAR.2024 11:02:19


High Channel

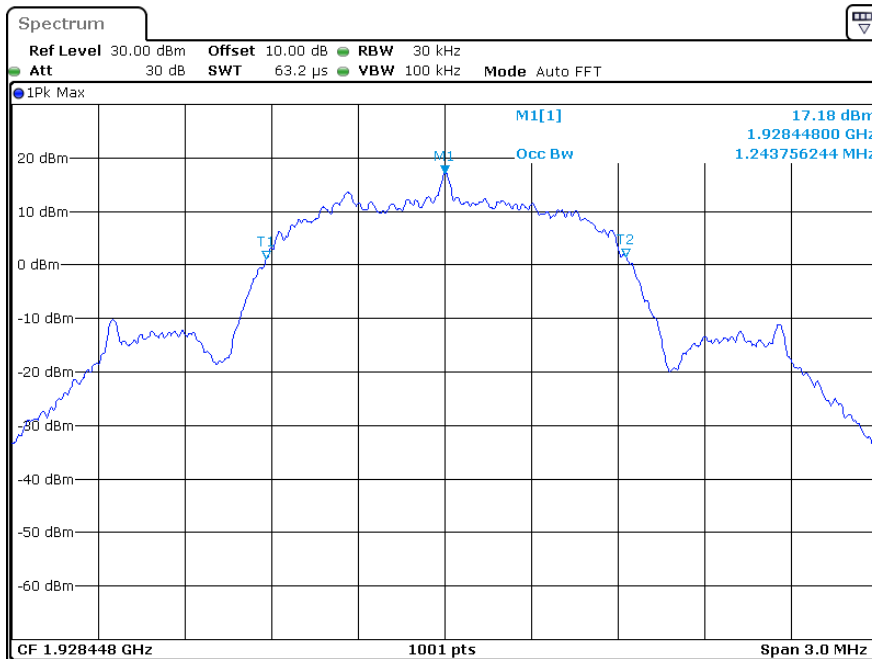

ProjectNo.:SZ1240301-10056E-RF Tester:Hanic Pan
Date: 14.MAR.2024 10:25:24

26 dB Emission Bandwidth


Low Channel

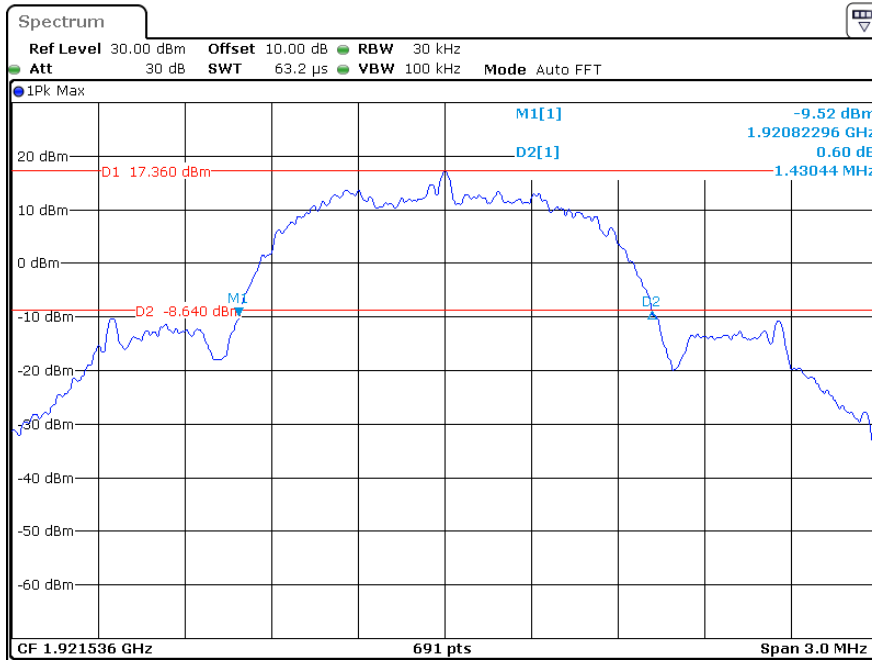

ProjectNo.:SZ1240301-10056E-RF Tester:Hanic Pan

Date: 14.MAR.2024 11:15:36


Middle Channel

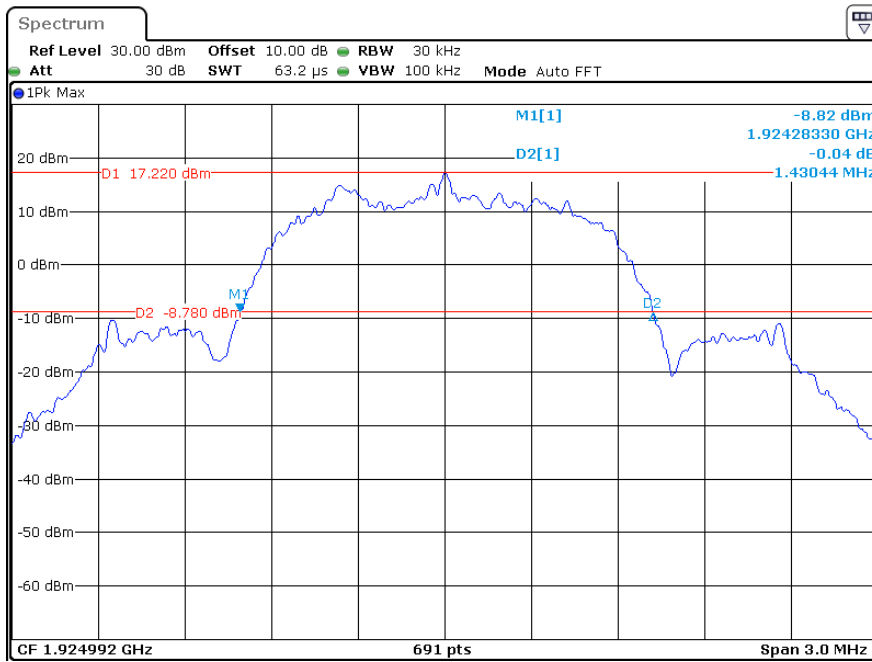

ProjectNo.:SZ1240301-10056E-RF Tester:Hanic Pan

Date: 14.MAR.2024 11:02:50

High Channel

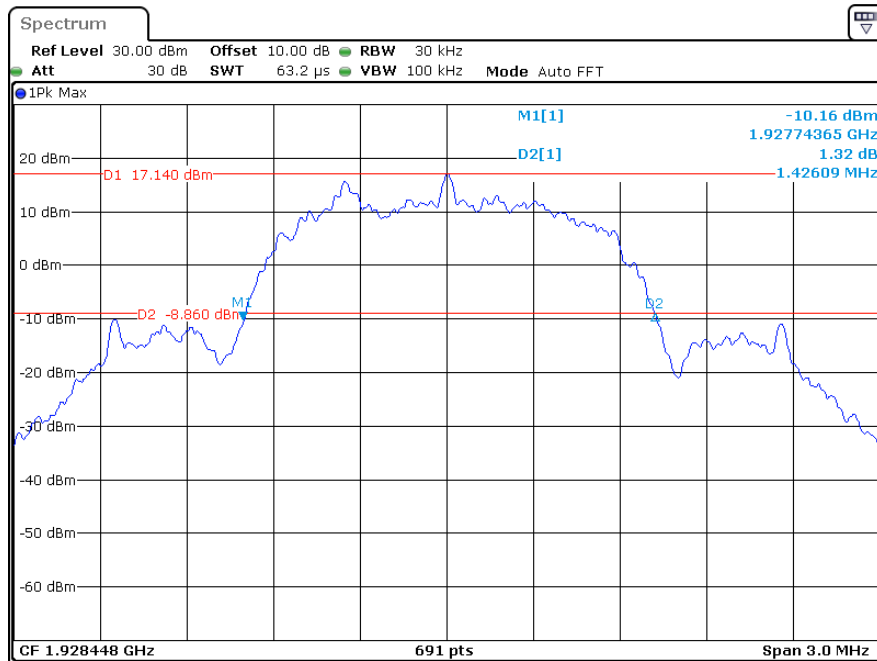

ProjectNo.:SZ1240301-10056E-RF Tester:Hanic Pan
Date: 14.MAR.2024 10:25:45

§ 15.319 (c) & RSS-213 §5.6 PEAK TRANSMIT POWER

Applicable Standard

The peak power output as measured over an interval of time equal to the frame rate or transmission burst of the device under all conditions of modulation. Usually this parameter is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used[47 CFR 15, subpart D, 15.303].

The peak transmit power is according to ANSI C63.17-2013 §6.1.2

Per FCC Part15.319 (c) Peak transmit power shall not exceed 100 microwatts multiplied by the square root of the emission bandwidth in hertz. Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage. The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true peak measurement for the emission in question over the full bandwidth of the channel.

Per FCC Part15.319 (e), the peak transmit power shall be reduced by the amount in decibels that the maximum directional gain of the antenna exceeds 3 dBi.

Calculation of Peak Transmit Power Limit:

$$\text{Peak Transmit Power Limit} = 100\mu\text{W} \times (\text{EBW})^{1/2}$$


EBW is the transmit emission bandwidth in Hz determined in the other test item:

Peak transmit power shall not exceed 100 μW multiplied by the square root of the occupied bandwidth in hertz. The peak transmit power shall be reduced by the amount in decibels that the maximum directional gain of the antenna exceeds 3 dBi.

Test Procedure

Using the manufacturer’s information on occupied bandwidth set the spectrum analyzer as follows:

RBW	≥ Emission bandwidth
Video bandwidth	≥ RBW
Span	Zero
Center frequency	Nominal center frequency of channels
Amplitude scale	Log (linear may be used if analyzer has sufficient linear dynamic range and accuracy)
Detection	Peak detection
Trigger	Video
Sweep rate	Sufficiently rapid to permit the transmit pulse to be resolved accurately

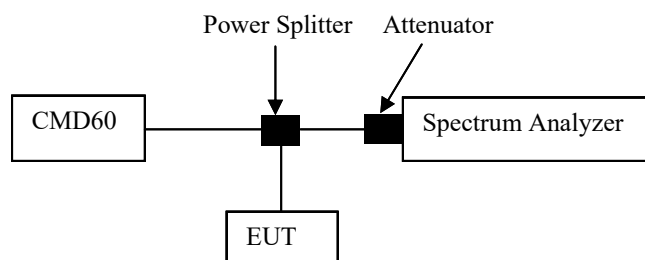

Test Data

Environmental Conditions

Temperature:	24~25 °C
Relative Humidity:	46~47 %
ATM Pressure:	101 kPa

The testing was performed by Hanic Pan on 2024-03-14.

Test mode: Transmitting:

Test Result: Compliant. Please refer to the following table and plots.

ANT0


Channel	Frequency (MHz)	Peak Transmit Power (dBm)	FCC Limit (dBm)	ISED Limit (dBm)
Low	1921.536	18.92	20.78	20.46
Middle	1924.992	18.90	20.78	20.46
High	1928.448	18.76	20.77	20.47
For FCC: EBW _{Low channel} = 1430000Hz, EBW _{Middle channel} = 1430000 Hz, EBW _{High channel} = 1426000 Hz Peak Transmit Power Limit = 100(EBW) ^{1/2} μW				
For ISED: OBW _{Low channel} = 1235000Hz, OBW _{Middle channel} = 1238000 Hz, OBW _{High channel} = 1244000 Hz Peak Transmit Power Limit = 100(OBW) ^{1/2} μW				

ANT1

Channel	Frequency (MHz)	Peak Transmit Power (dBm)	FCC Limit (dBm)	ISED Limit (dBm)
Low	1921.536	18.44	20.78	20.46
Middle	1924.992	18.46	20.78	20.46
High	1928.448	18.51	20.77	20.47
For FCC: EBW _{Low channel} = 1430000Hz, EBW _{Middle channel} = 1430000 Hz, EBW _{High channel} = 1426000 Hz Peak Transmit Power Limit = 100(EBW) ^{1/2} μW				
For ISED: OBW _{Low channel} = 1235000Hz, OBW _{Middle channel} = 1238000 Hz, OBW _{High channel} = 1244000 Hz Peak Transmit Power Limit = 100(OBW) ^{1/2} μW				


ANT0

Low Channel

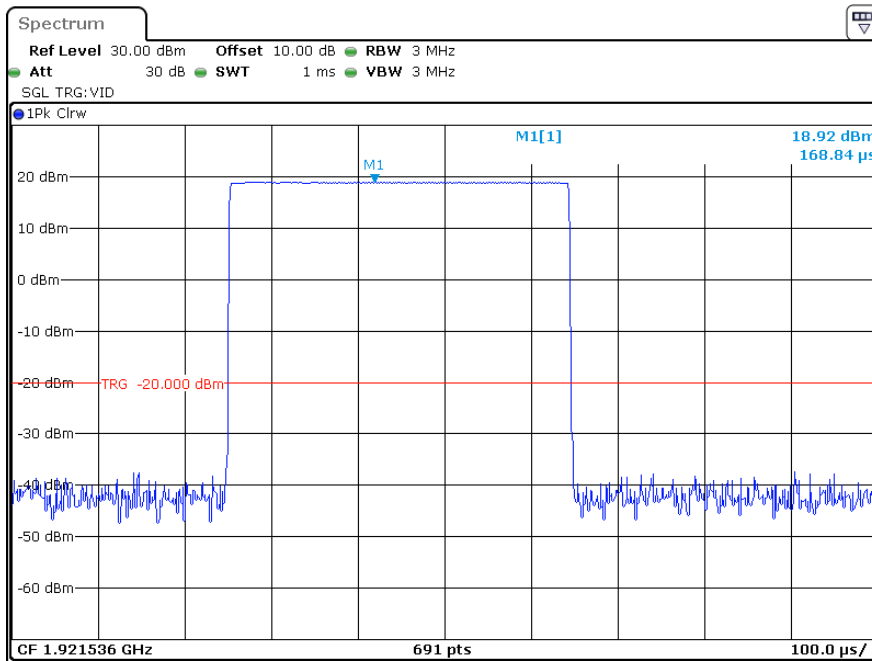


ProjectNo.:SZ1240301-10056E-RF Tester:Hanic Pan
Date: 14.MAR.2024 11:14:13

Middle Channel

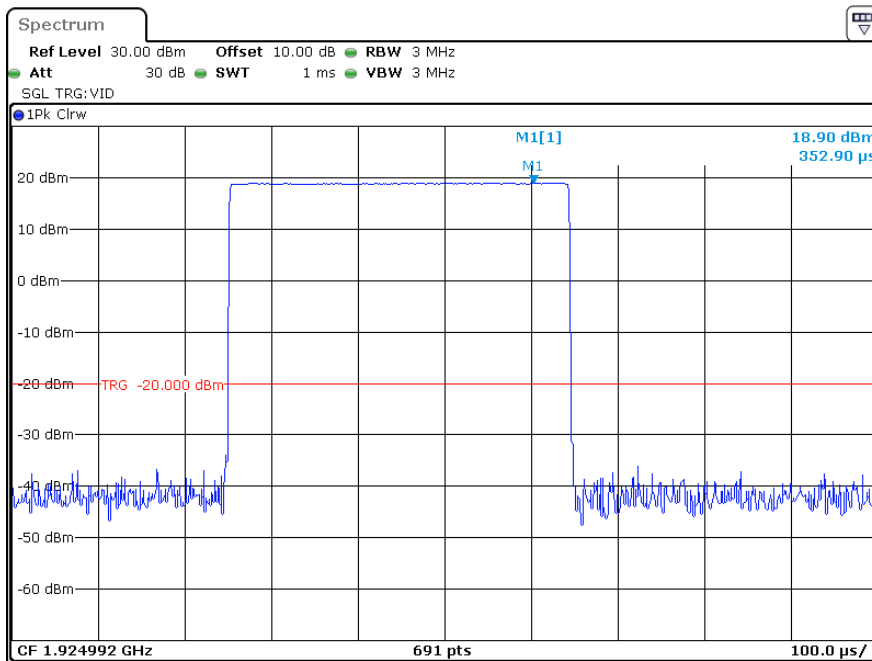

ProjectNo.:SZ1240301-10056E-RF Tester:Hanic Pan
Date: 14.MAR.2024 11:01:51


High Channel

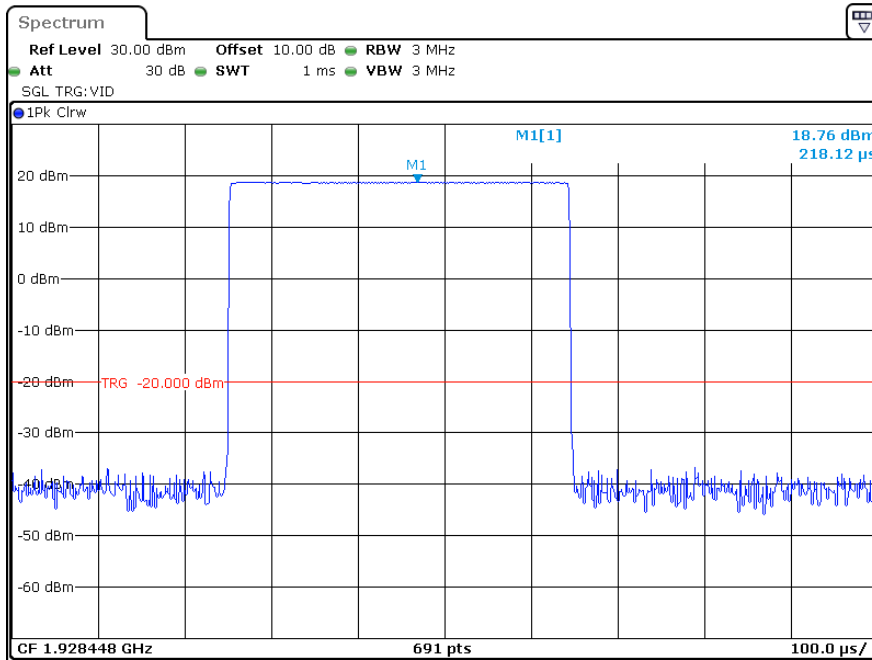

ProjectNo.:SZ1240301-10056E-RF Tester:Hanic Pan
Date: 14.MAR.2024 10:24:14


ANT1

Low Channel

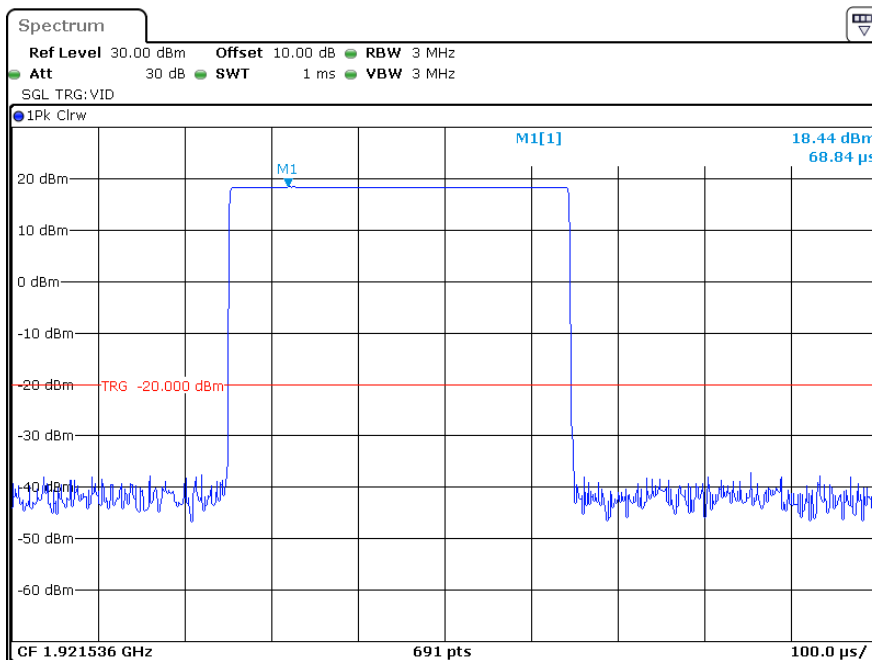


ProjectNo.:SZ1240301-10056E-RF Tester:Hanic Pan
Date: 14.MAR.2024 11:26:34

Middle Channel

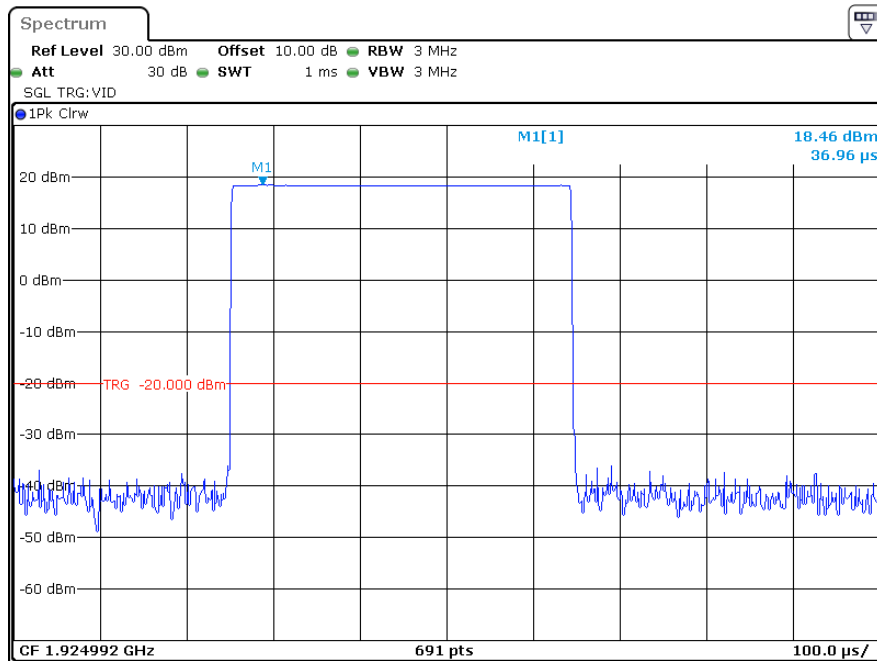

ProjectNo.:SZ1240301-10056E-RF Tester:Hanic Pan
Date: 14.MAR.2024 11:28:24

High Channel

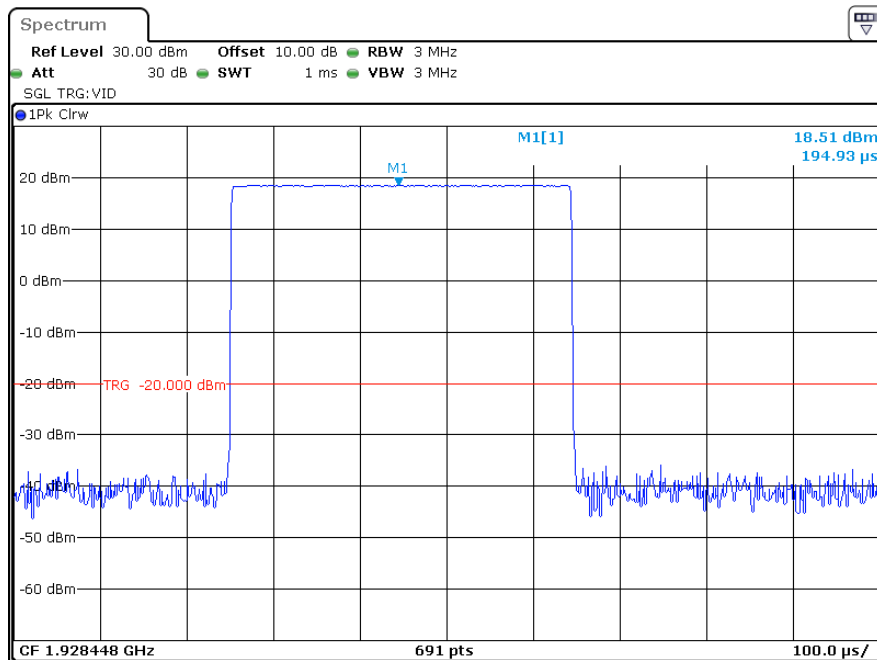

ProjectNo.:SZ1240301-10056E-RF Tester:Hanic Pan
Date: 14.MAR.2024 11:27:45

§ 15.319 (d) & RSS-213 §5.7 POWER SPECTRAL DENSITY

Applicable Standard

The average pulse energy in a 3 kHz bandwidth is divided by the pulse duration.

The power spectral density shall not exceed 3mW in any 3 kHz bandwidth as measured with a spectrum analyzer having a resolution bandwidth of 3 kHz.


The power spectral density is measured in accordance with ANSI C63.17-2013 Clause 6.1.5.

The peak-hold power spectral density of transmitters shall not exceed 12 mW per any 3 kHz bandwidth. As an alternative to the peak-hold power spectral density, the time-averaged power spectral density may be measured and it shall not exceed 3 mW per any 3 kHz bandwidth.

Test Procedure

Using the manufacturer’s information on occupied bandwidth set the spectrum analyzer as follows:

RBW	3 kHz
Video bandwidth	$\geq 3 \times \text{RBW}$
Span	Zero span at frequency with the maximum level (frequency determined in 6.1.3 if the same type of signal (continuous versus burst) was used in 6.1.3)
Center frequency	Spectral peak as determined in 6.1.3
Sweep time	For burst signals, sufficient to include essentially all of the maximum length burst at the output of a 3 kHz filter (e.g., maximum input burst duration plus 600 μs). For continuous signals, 20 ms.
Amplitude scale	Log power
Detection	Sample detection and averaged for a minimum of 100 sweeps
Trigger	External or internal

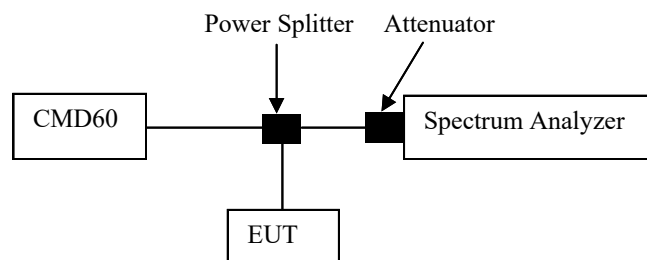

Test Data

Environmental Conditions

Temperature:	24~25 °C
Relative Humidity:	46~47 %
ATM Pressure:	101 kPa

The testing was performed by Hanic Pan on 2024-03-14.


Test mode: Transmitting

Test Result: Compliant


Please refer to following table and plots

Channel	Frequency (MHz)	Power Spectral Density		Limit (mW/3kHz)
		(dBm/3kHz)	(mW/3kHz)	
Low	1921.536	-2.57	0.553	3
Middle	1924.992	-2.69	0.538	3
High	1928.448	-4.51	0.354	3

Low Channel

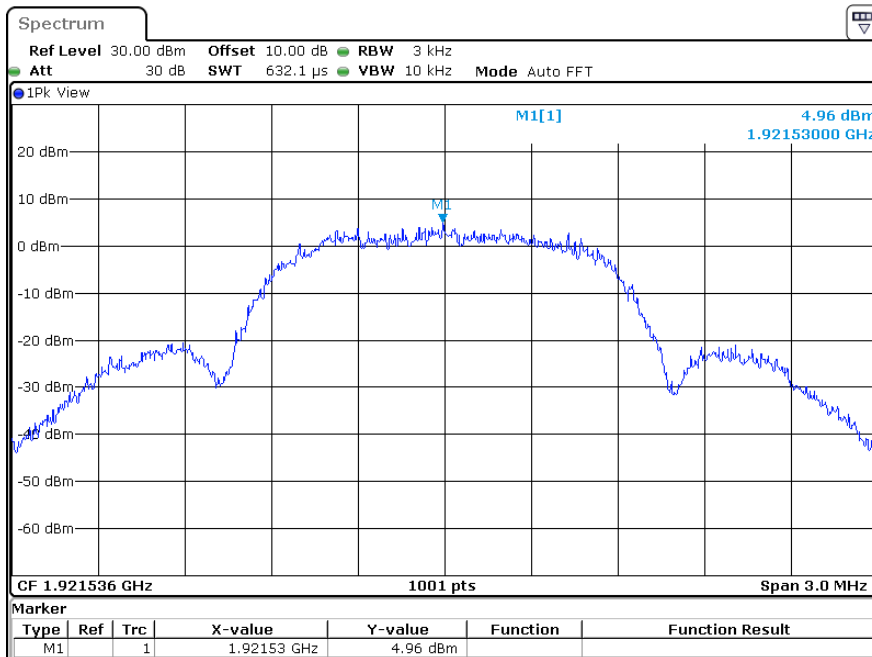


ProjectNo.:SZ1240301-10056E-RF Tester:Hanic Pan
 Date: 14.MAR.2024 11:21:33

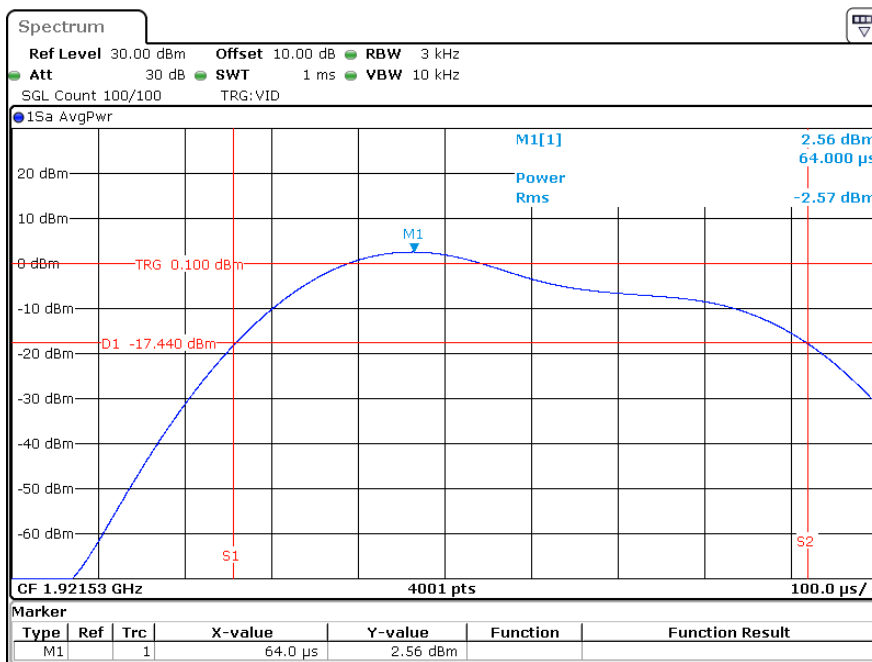


ProjectNo.:SZ1240301-10056E-RF Tester:Hanic Pan
 Date: 14.MAR.2024 11:24:14

Middle Channel

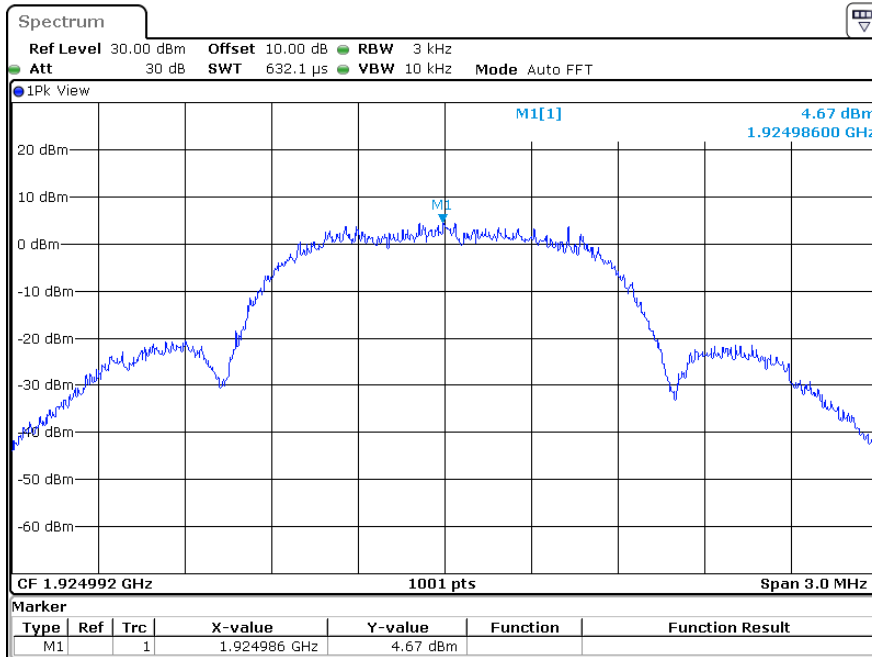


ProjectNo.:SZ1240301-10056E-RF Tester:Hanic Pan
 Date: 14.MAR.2024 10:53:04

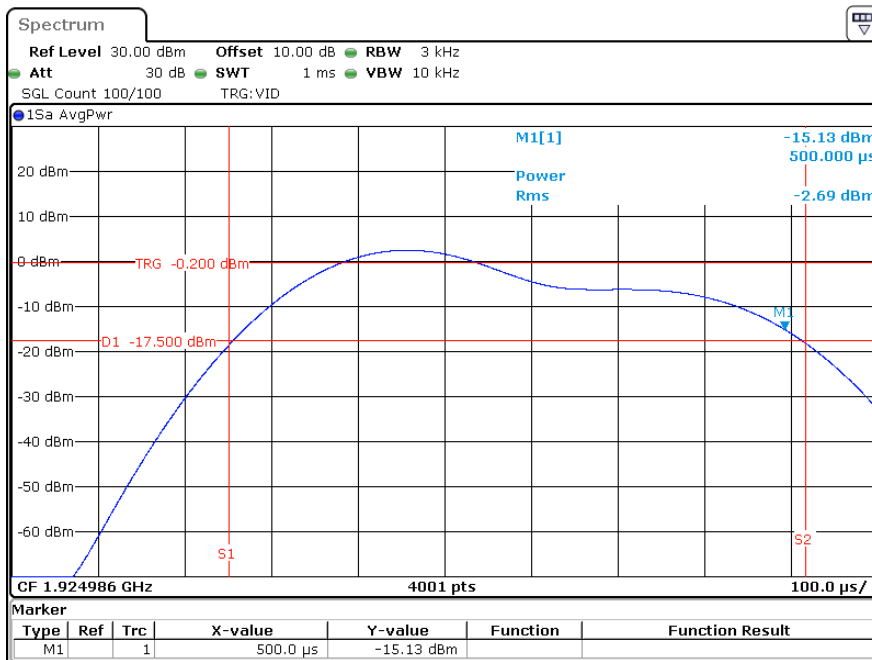


ProjectNo.:SZ1240301-10056E-RF Tester:Hanic Pan
 Date: 14.MAR.2024 11:01:15

High Channel

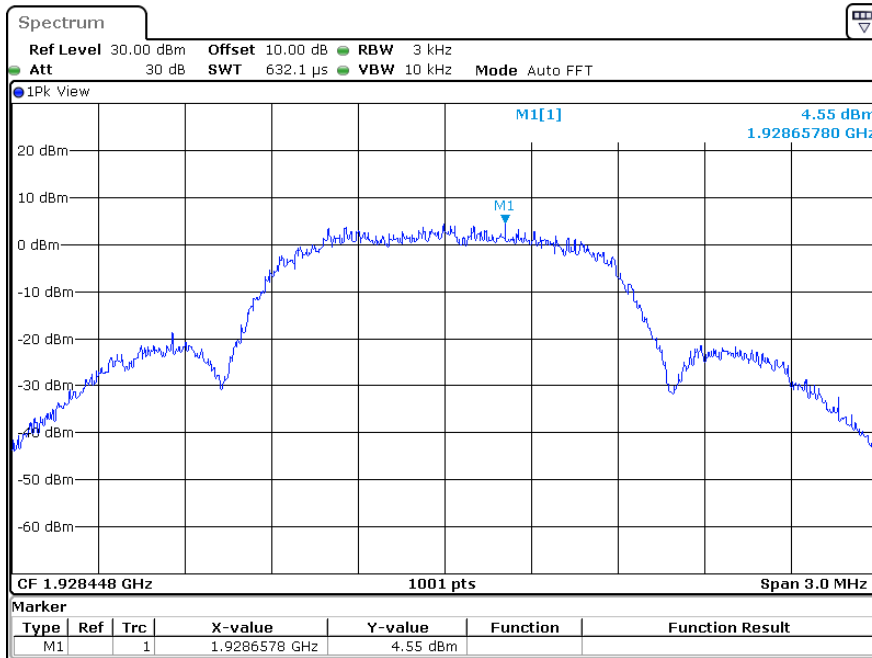

ProjectNo.:SZ1240301-10056E-RF Tester:Hanic Pan
 Date: 14.MAR.2024 10:33:28

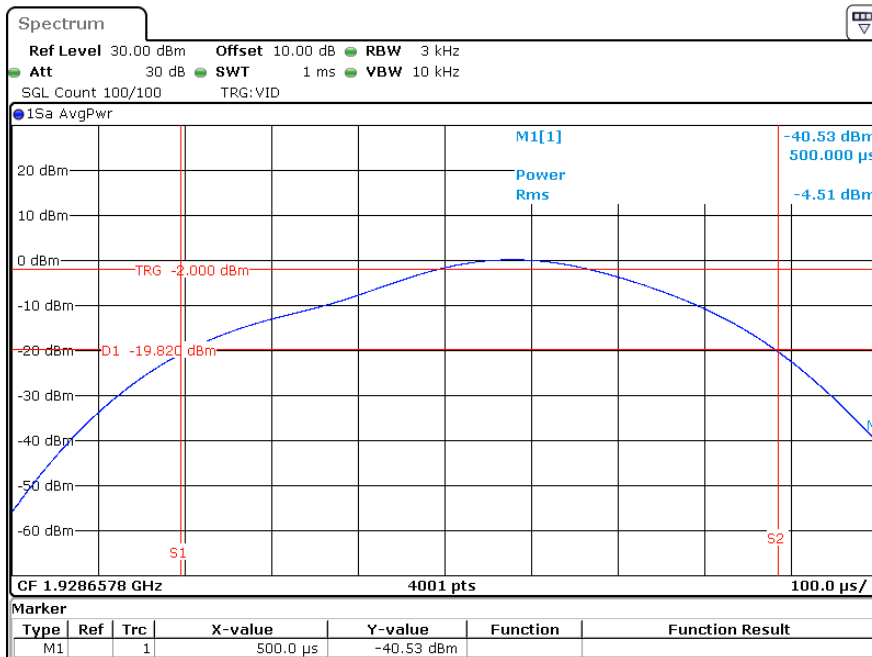

ProjectNo.:SZ1240301-10056E-RF Tester:Hanic Pan
 Date: 14.MAR.2024 10:37:34

§ 15.323 (d) & RSS-213 §5.8 EMISSION INSIDE AND OUTSIDE THE SUB-BAND

Applicable Standard

Emissions inside the sub-band must comply with the following emission mask:

1. In the bands between 1B and 2B measured from the center of the emission bandwidth the total power emitted by the device shall be at least 30 dB below the transmit power permitted for that device;
2. in the bands between 2B and 3B measured from the center of the emission bandwidth the total power emitted by an intentional radiator shall be at least 50 dB below the transmit power permitted for that radiator;
3. in the bands between 3B and the sub-band edge the total power emitted by an intentional radiator in the measurement bandwidth shall be at least 60 dB below the transmit power permitted for that radiator.

Where B = emission bandwidth

Emission Outside the sub-band shall be attenuated below a reference power of 112 mw (20.5 dBm) as follows:

1. 30 dB between the sub-band and 1.25 MHz above or below the sub-band;
2. 50 dB between 1.25 and 2.5 MHz above or below the sub-band;
3. 60 dB at 2.5 MHz or greater above or below the sub-band.

Emissions outside the 1920-1930 MHz Band

Emissions outside the 1920-1930 MHz band shall be attenuated below a reference power of 112 milliwatts (-9.5 dBW) by at least:

- 30 dB between the band edges and 1.25 MHz above and below the band edges;
- 50 dB between 1.25 MHz and 2.5 MHz above or below the band edges; and
- 60 dB at 2.5 MHz or greater above or below the band edges.

Emissions inside the 1920-1930 MHz Band

Emissions inside the 1920-1930 MHz band shall be attenuated below the transmit power permitted for that device, as follows:

- 30 dB between the frequencies 1B and 2B measured from the centre of the occupied bandwidth;
- 50 dB between the frequencies 2B and 3B measured from the centre of the occupied bandwidth; and
- 60 dB between the frequencies 3B and band edge, where B is the occupied bandwidth in hertz.

Test Procedure

According to ANSI C63.17.2013 Clause 6.1.6.

In-band emission:

Spectrum analyzer settings for measuring in-band emission

RBW	Approximately 1% of the emission bandwidth (B)
Video bandwidth	$3 \times \text{RBW}$
Sweep time	The sweep time shall be sufficiently slow that the swept frequency rate shall not exceed one RBW per three transmit bursts.
Number of sweeps	Sufficient to stabilize the trace
Amplitude scale	Log
Detection	Peak detection and max hold enabled
Span	Approximately equal to $3.5 B$

Out-band emission:

Out-of-band tests shall be performed with the RF carrier set to the lowest and highest carriers defined by the EUT. The spectrum analyzer settings for in-band unwanted emissions in 6.1.6.1 also apply to out-of-band emissions. The EUT shall pass the tests of item a), item b), and either item c) or item d), as follows:

- a) In the region between the band edges and 1.25 MHz below and above the lower and the upper band edges, respectively, the measured emission level shall not exceed -9.5 dBm.
- b) In the region between 1.25 and 2.5 MHz below and above the lower and the upper band edges, respectively, the measured emission level shall not exceed -29.5 dBm.
- c) In the region at 2.5 MHz or greater below and above the lower and upper band edges, respectively, the measured emission level shall not exceed -39.5 dBm.

For Radiated Emission:

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Factor & Over Limit/Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:


$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:


$$\begin{aligned} \text{Over Limit/Margin} &= \text{Level/Corrected Amplitude} - \text{Limit} \\ \text{Level / Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

EUT Setup


9 kHz-30MHz:

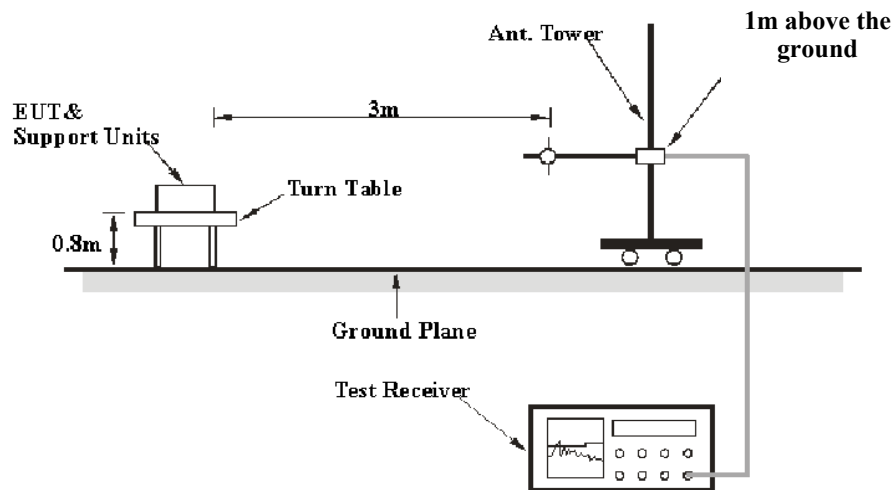

30MHz-1GHz:

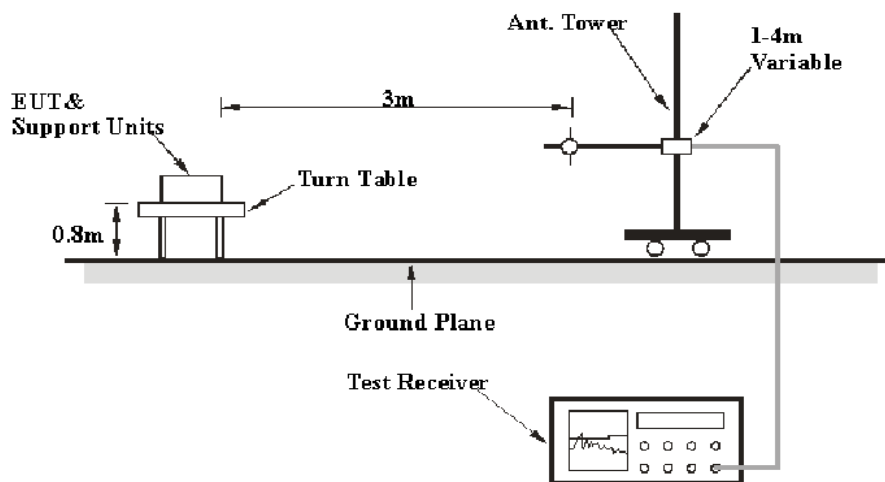


Above 1GHz:

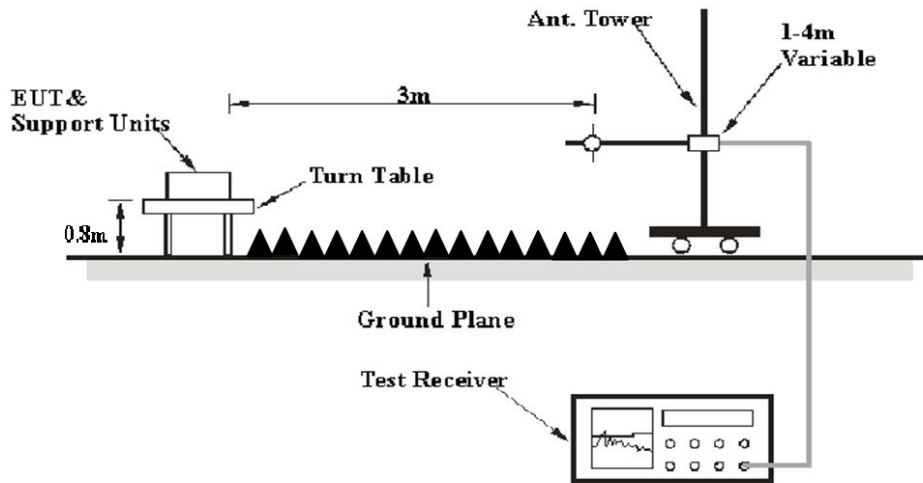

The radiated emission tests were performed in the 3 meters test site.

RF Conducted Emission:

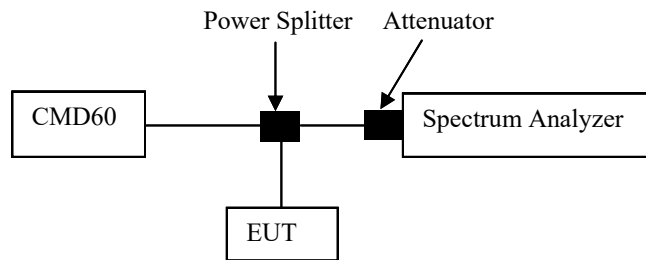

Test Data

Environmental Conditions

Temperature:	23~25.6 °C
Relative Humidity:	46~55 %
ATM Pressure:	101 kPa

The testing was performed by Warren Huang on 2024-03-05 for below 1GHz, Dylan Yang on 2024-03-02 for above 1GHz and Hanic Pan on 2024-03-14 and Bamboo Zhan on 2024-03-18 for RF conducted.

Test mode: Transmitting


Test Result: Compliant

Please refer to following plots

For Radiated Emission, after pre-scan in the X, Y and Z axes of orientation, the worst case is below:


FCC:

Low Channel (Unwanted Emission inside the Sub-band)

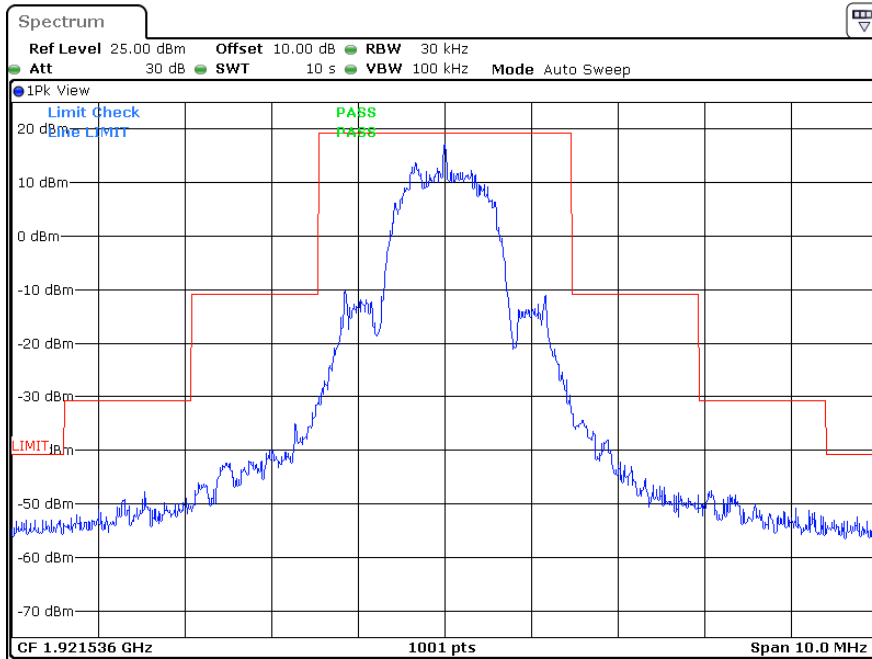


ProjectNo.:SZ1240301-10056E-RF Tester:Hanic Pan
Date: 14.MAR.2024 11:16:48

Middle Channel (Unwanted Emission inside the Sub-band)

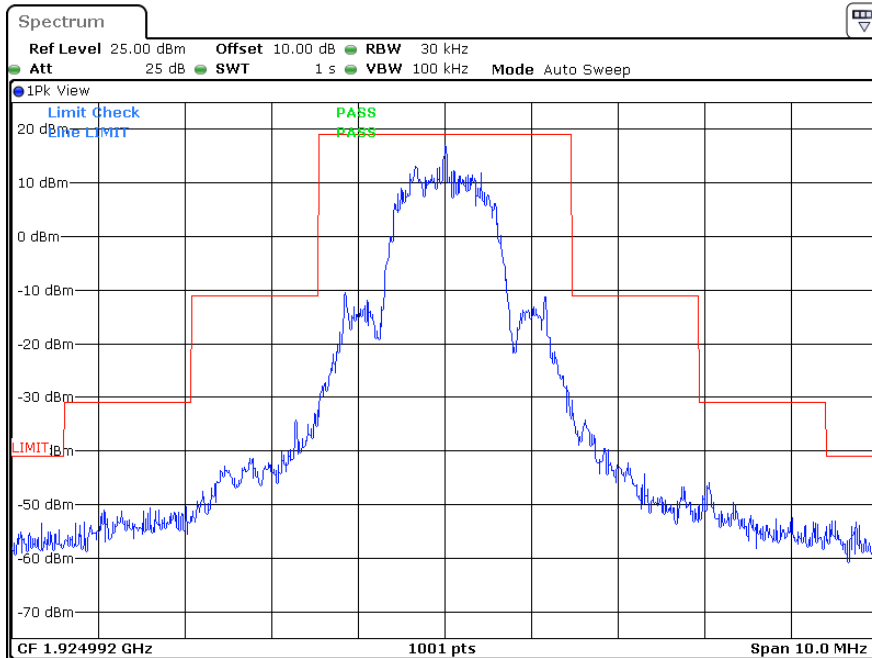

ProjectNo.:SZ1240301-10056E-RF Tester:Hanic Pan
Date: 14.MAR.2024 11:06:04


High Channel (Unwanted Emission inside the Sub-band)

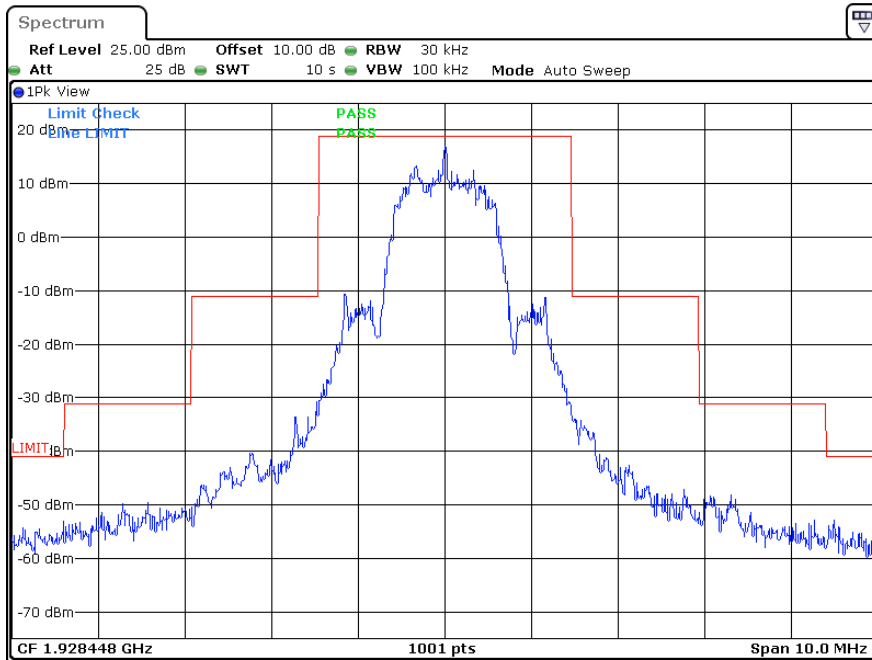

ProjectNo.:SZ1240301-10056E-RF Tester:Hanic Pan
Date: 14.MAR.2024 10:27:33

ISEDC:

Low Channel (Unwanted Emission inside the Sub-band)

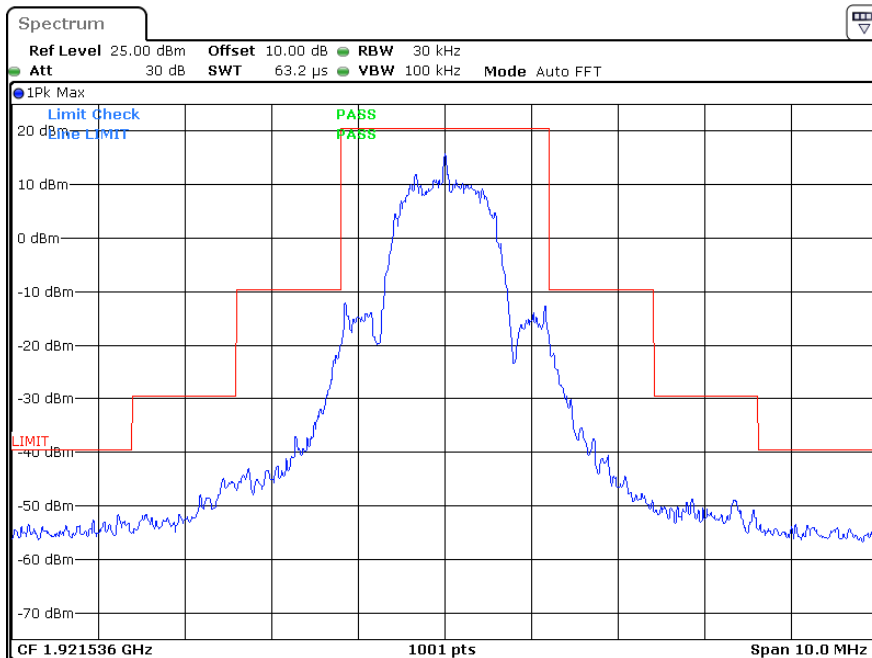


ProjectNo.:SZ1240301-10056E-RF Tester:Bamboo Zhan
Date: 18.MAR.2024 12:28:27

Middle Channel (Unwanted Emission inside the Sub-band)




ProjectNo.:SZ1240301-10056E-RF Tester:Bamboo Zhan
Date: 18.MAR.2024 12:26:44

High Channel (Unwanted Emission inside the Sub-band)

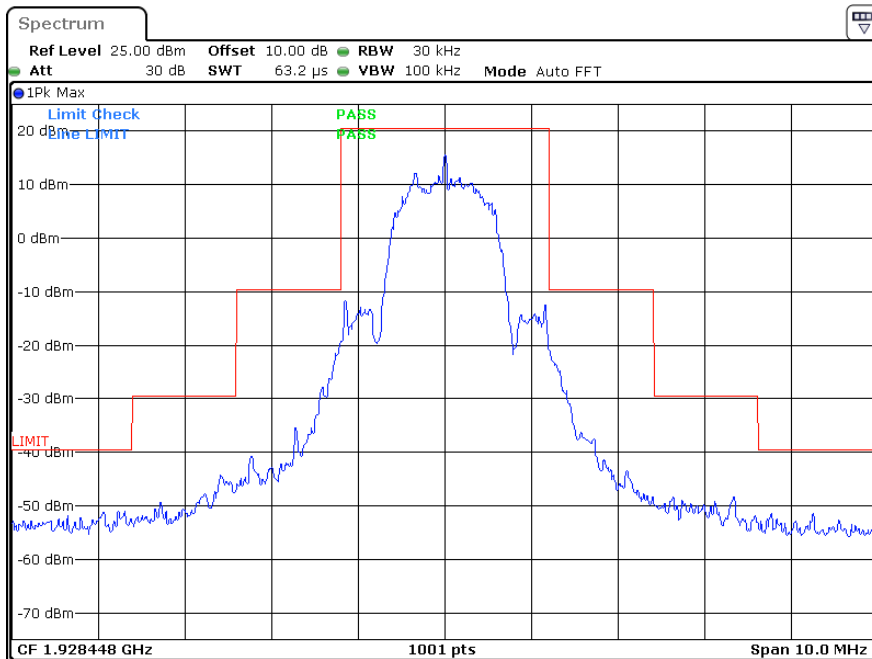


ProjectNo.:SZ1240301-10056E-RF Tester:Bamboo Zhan
Date: 18.MAR.2024 12:30:03


Low Channel (Unwanted Emission outside the Sub-band)

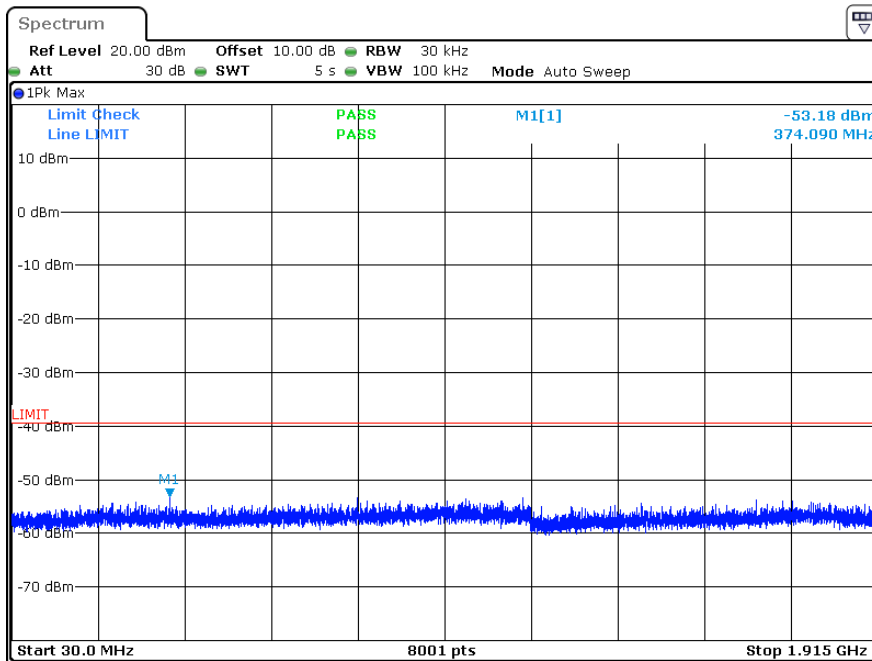


ProjectNo.:SZ1240301-10056E-RF Tester:Hanic Pan
 Date: 14.MAR.2024 11:17:28

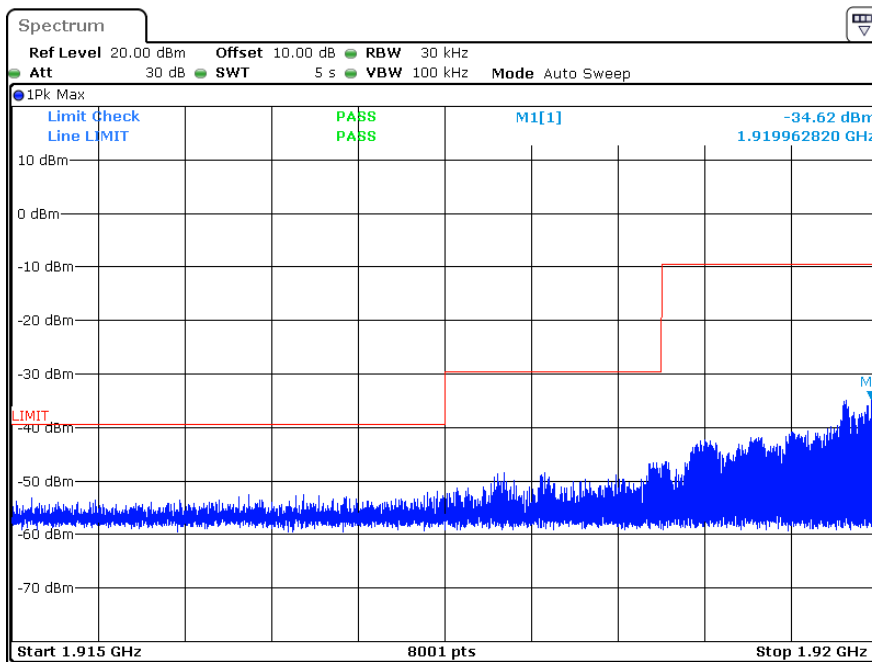


ProjectNo.:SZ1240301-10056E-RF Tester:Hanic Pan
 Date: 14.MAR.2024 11:18:10

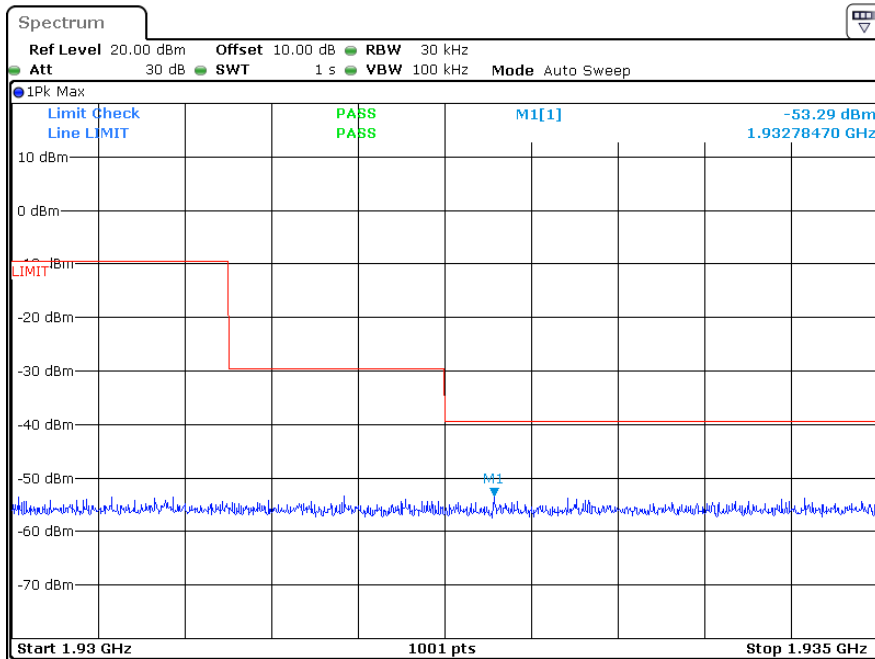

ProjectNo.:SZ1240301-10056E-RF Tester:Hanic Pan
Date: 14.MAR.2024 11:18:45

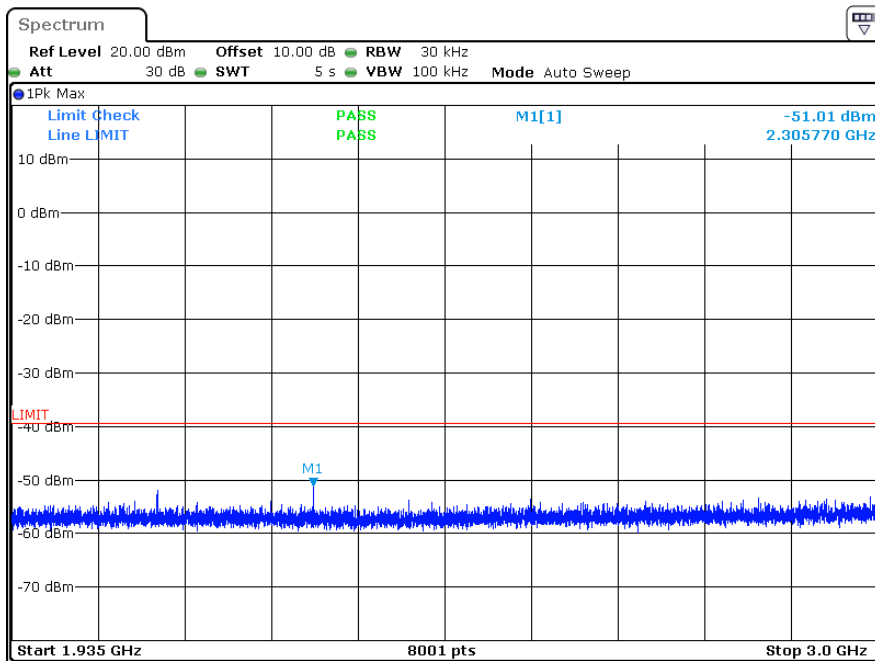


ProjectNo.:SZ1240301-10056E-RF Tester:Hanic Pan
Date: 14.MAR.2024 11:19:26

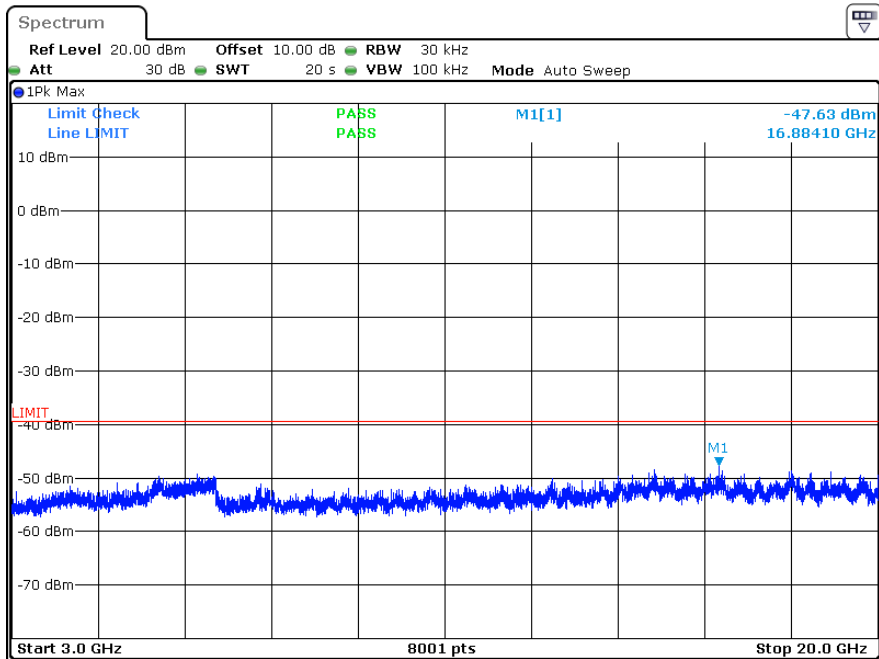


ProjectNo.:SZ1240301-10056E-RF Tester:Hanic Pan
 Date: 14.MAR.2024 11:20:28


Middle Channel (Unwanted Emission outside the Sub-band)

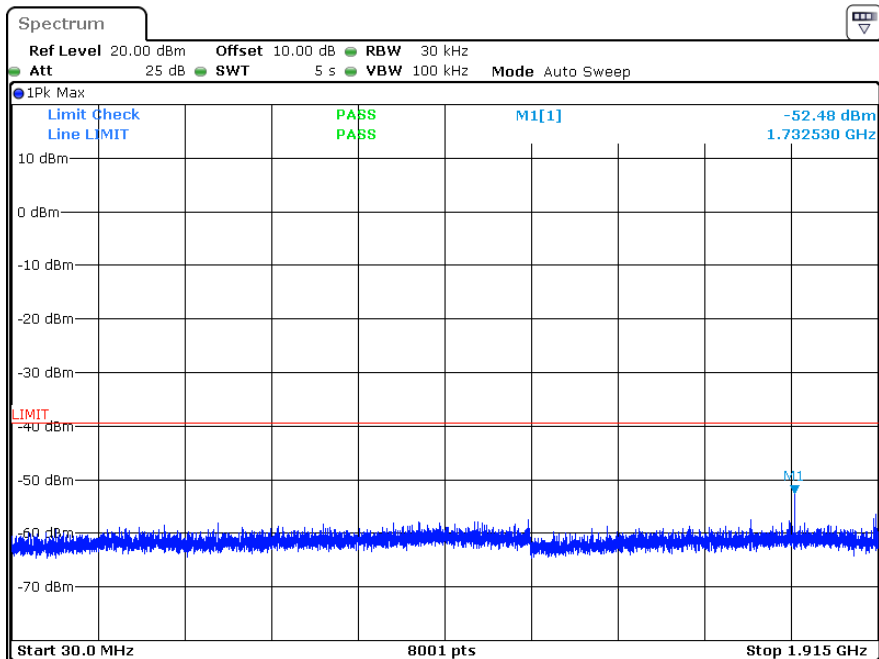


ProjectNo.:SZ1240301-10056E-RF Tester:Hanic Pan
 Date: 14.MAR.2024 11:06:47

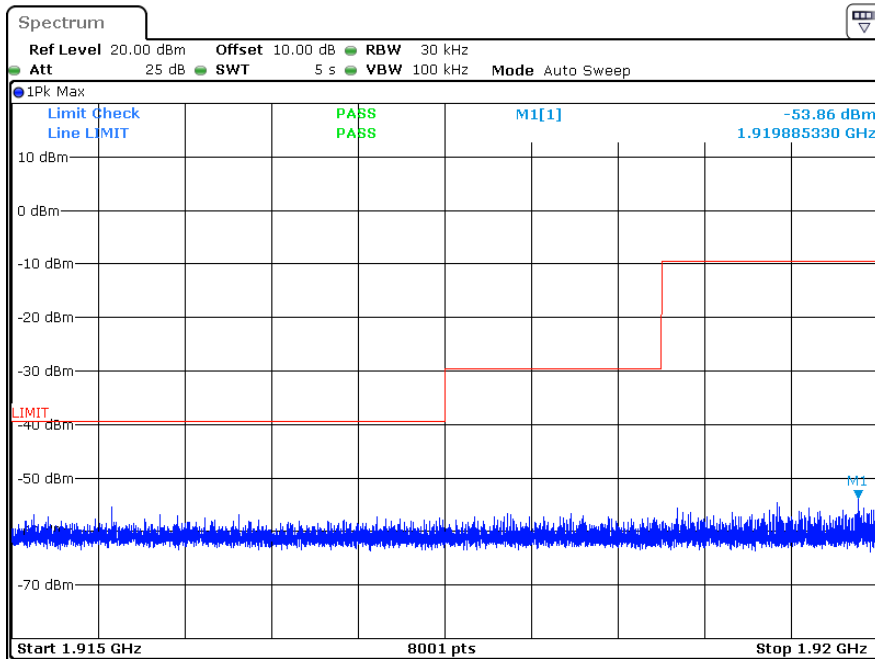


ProjectNo.:SZ1240301-10056E-RF Tester:Hanic Pan
Date: 14.MAR.2024 11:07:27

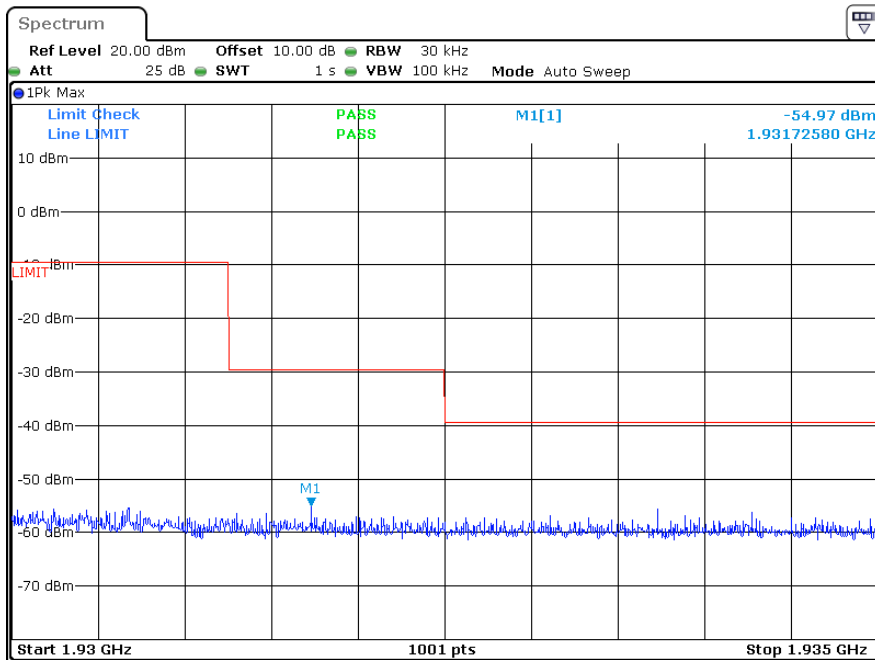

ProjectNo.:SZ1240301-10056E-RF Tester:Hanic Pan
Date: 14.MAR.2024 11:08:03

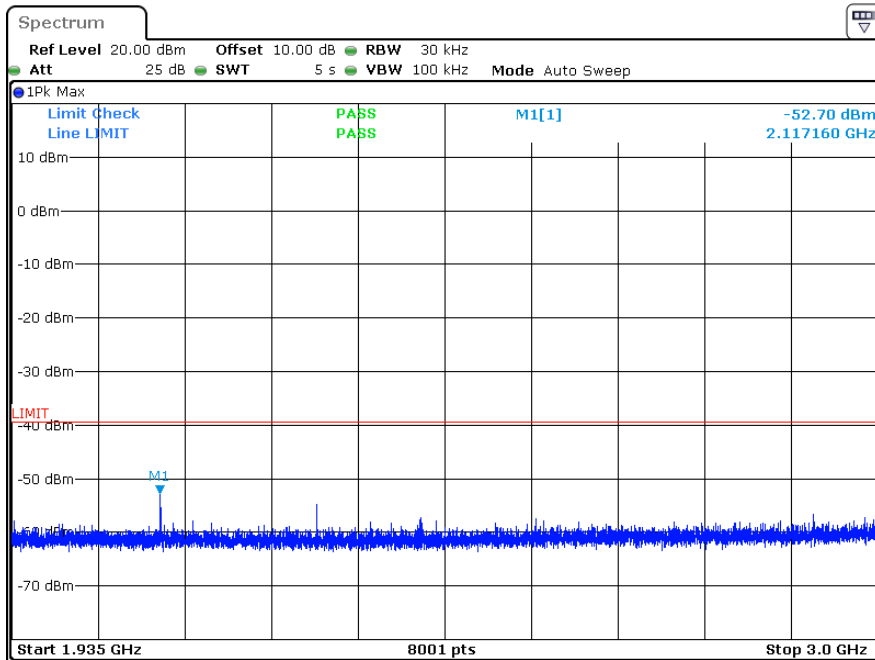


ProjectNo.:SZ1240301-10056E-RF Tester:Hanic Pan
 Date: 14.MAR.2024 11:08:44

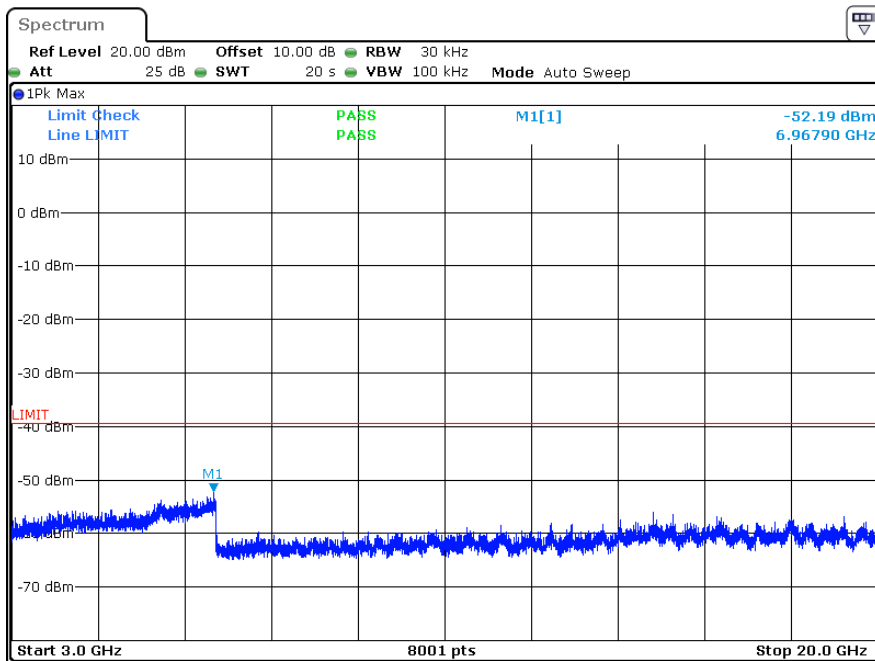


ProjectNo.:SZ1240301-10056E-RF Tester:Hanic Pan
 Date: 14.MAR.2024 11:09:46


High Channel (Unwanted Emission outside the Sub-band)

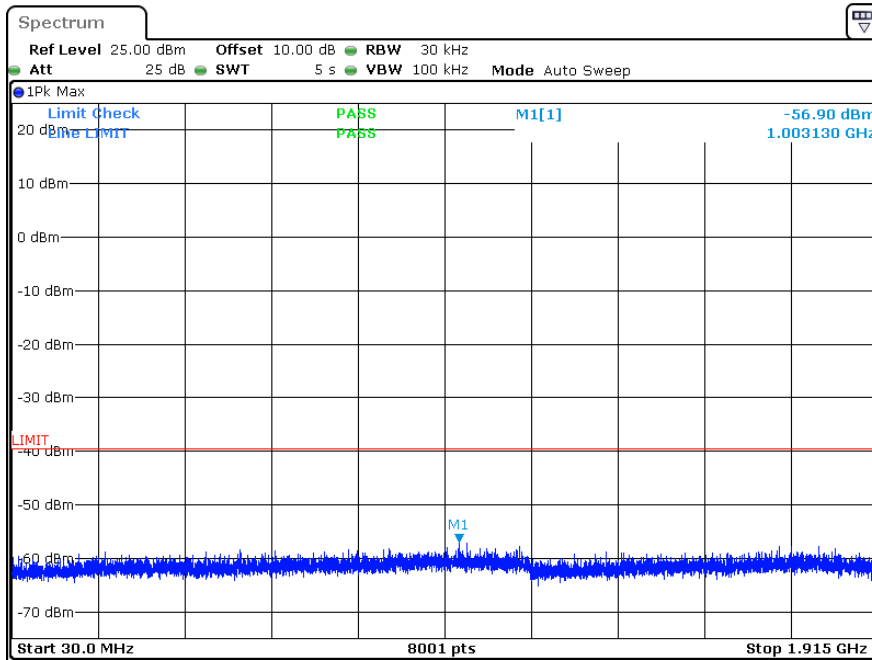


ProjectNo.:SZ1240301-10056E-RF Tester:Hanic Pan
Date: 14.MAR.2024 10:28:15

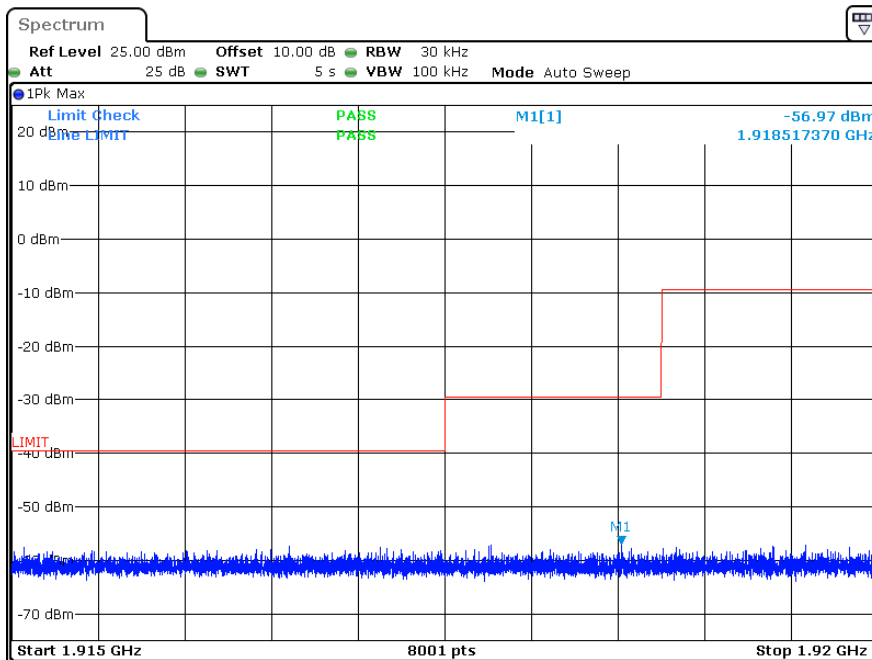


ProjectNo.:SZ1240301-10056E-RF Tester:Hanic Pan
Date: 14.MAR.2024 10:28:56

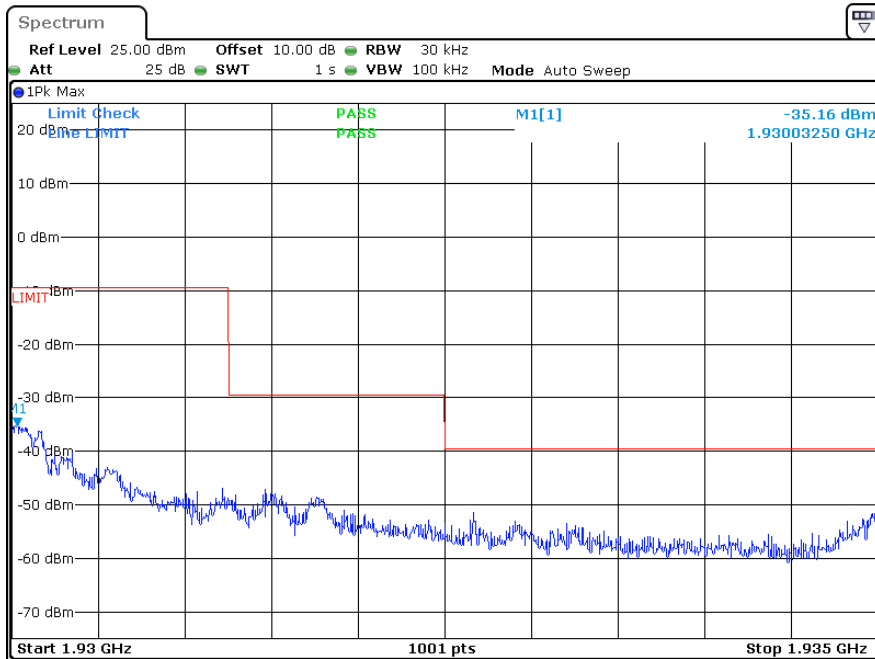

ProjectNo.:SZ1240301-10056E-RF Tester:Hanic Pan
Date: 14.MAR.2024 10:29:32

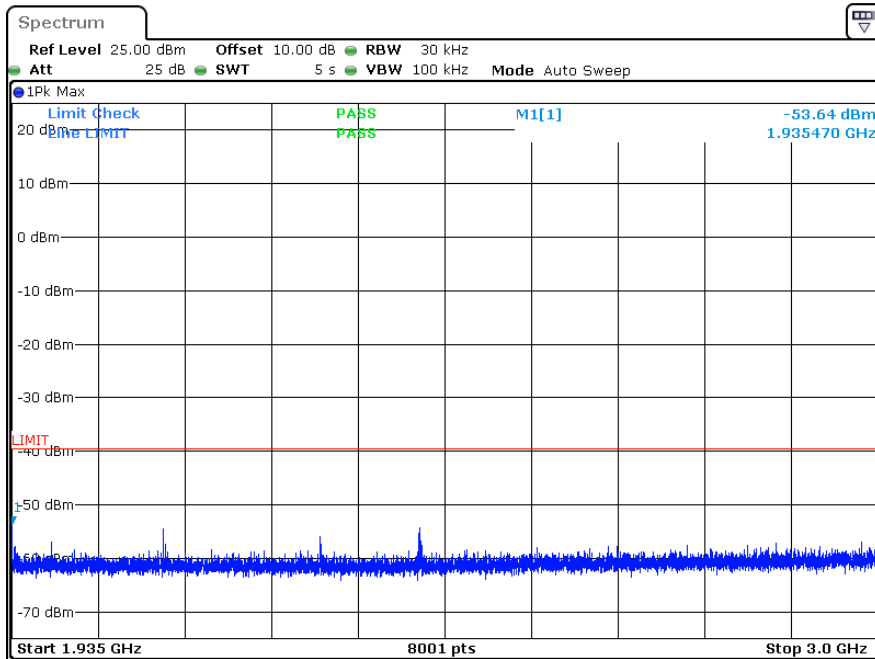

ProjectNo.:SZ1240301-10056E-RF Tester:Hanic Pan
Date: 14.MAR.2024 10:30:13

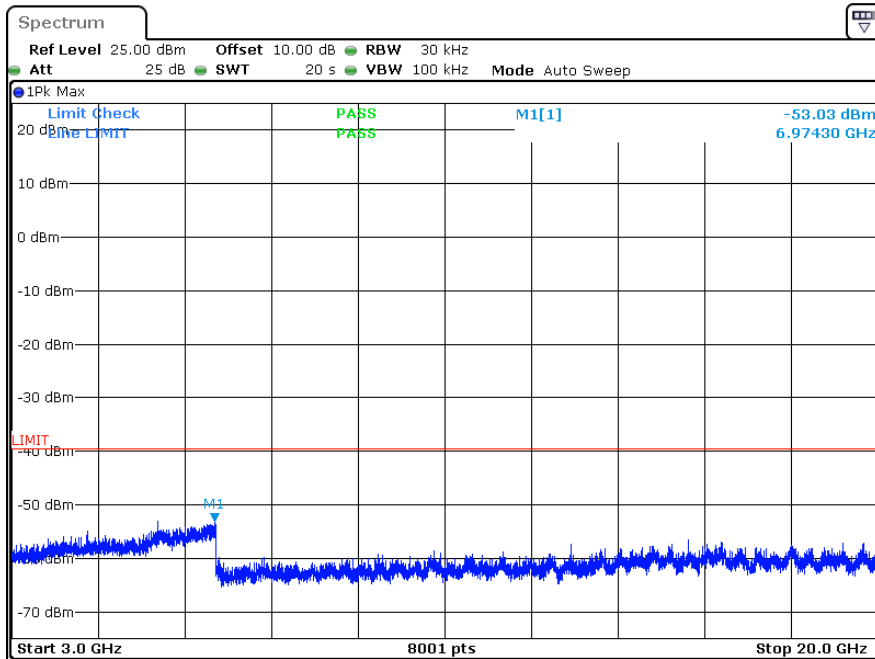


ProjectNo.:SZ1240301-10056E-RF Tester:Hanic Pan
Date: 14.MAR.2024 10:31:16

9 kHz-30MHz (ANT0 low channel was worst case):


Parallel (worst case)

For adapter 1

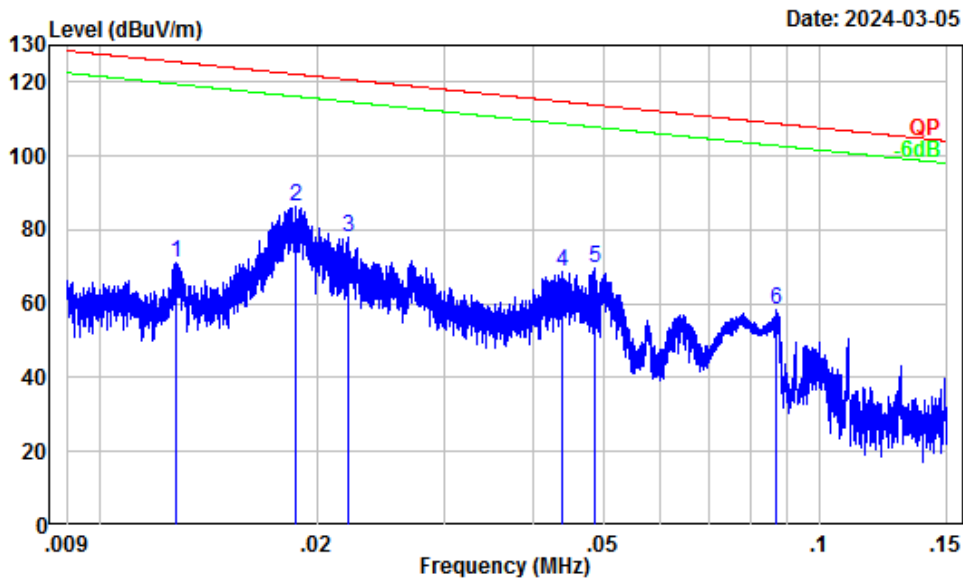

Site : chamber
 Condition : 3m
 Project Number: SZ1240301-10056E-RF
 Note : Transmitting
 Note : S005CAU0500100
 Tester : Warren Huang

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.01	52.47	18.51	70.98	125.51	-54.53	Peak
2	0.02	50.64	35.66	86.30	122.18	-35.88	Peak
3	0.02	49.58	28.33	77.91	120.70	-42.79	Peak
4	0.04	42.88	25.94	68.82	114.76	-45.94	Peak
5	0.05	41.39	28.28	69.67	113.85	-44.18	Peak
6	0.09	35.91	22.60	58.51	108.80	-50.29	Peak

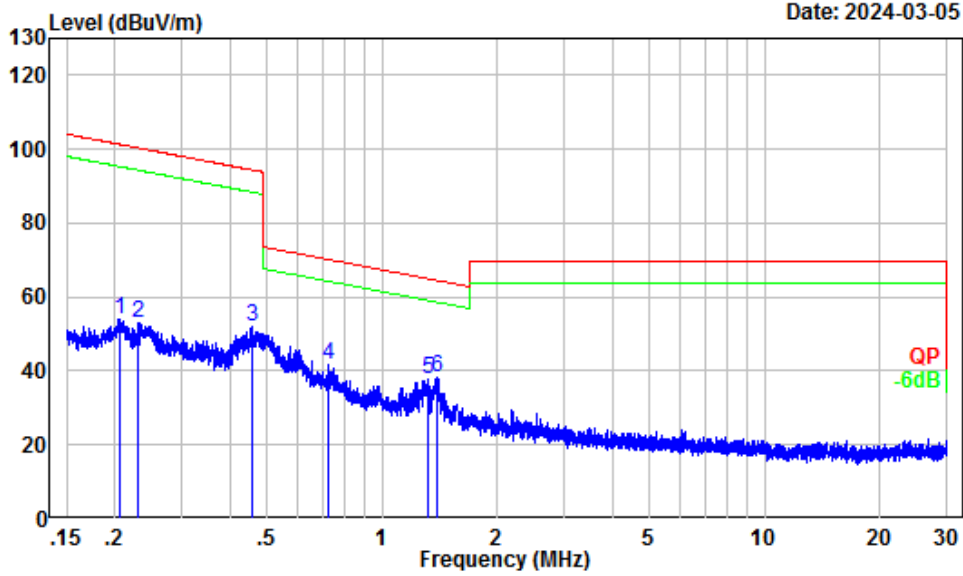


Date: 2024-03-05

Site : chamber
 Condition : 3m
 Project Number: SZ1240301-10056E-RF
 Note : Transmitting
 Note : S005CAU0500100
 Tester : Warren Huang


	Freq	Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.21	28.76	25.40	54.16	101.32	-47.16	Peak
2	0.23	27.87	25.10	52.97	100.32	-47.35	Peak
3	0.46	21.53	30.45	51.98	94.38	-42.40	Peak
4	0.73	17.89	23.62	41.51	70.30	-28.79	Peak
5	1.32	13.87	23.85	37.72	65.02	-27.30	Peak
6	1.39	13.51	24.76	38.27	64.56	-26.29	Peak

For adapter 2

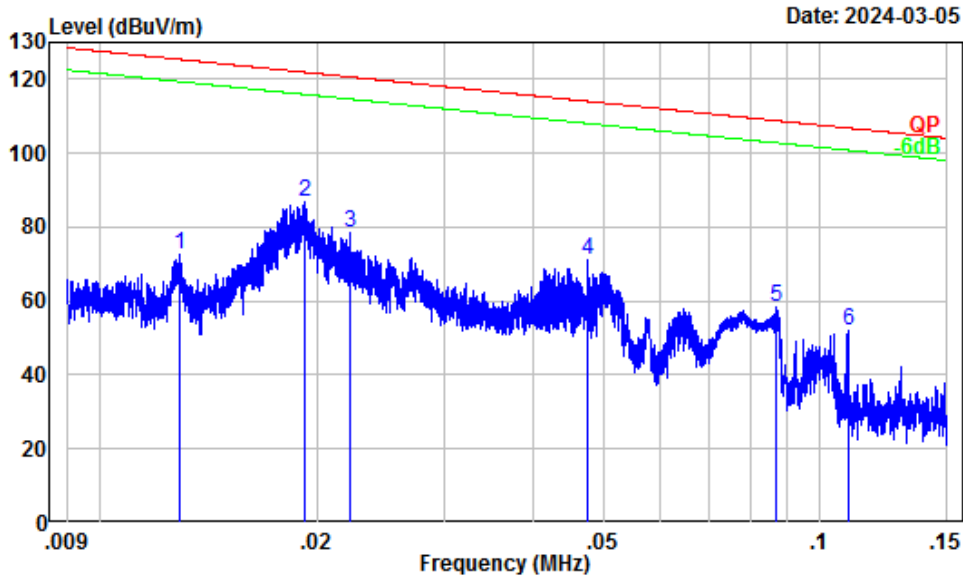

Site : chamber
 Condition : 3m
 Project Number: SZ1240301-10056E-RF
 Note : Transmitting
 Note : UT-681A-5100UY
 Tester : Warren Huang

	Freq	Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.01	52.42	20.24	72.66	125.39	-52.73	Peak
2	0.02	50.45	36.31	86.76	121.90	-35.14	Peak
3	0.02	49.55	29.02	78.57	120.68	-42.11	Peak
4	0.05	41.76	29.62	71.38	114.07	-42.69	Peak
5	0.09	35.94	22.24	58.18	108.82	-50.64	Peak
6	0.11	33.66	18.36	52.02	106.83	-54.81	Peak

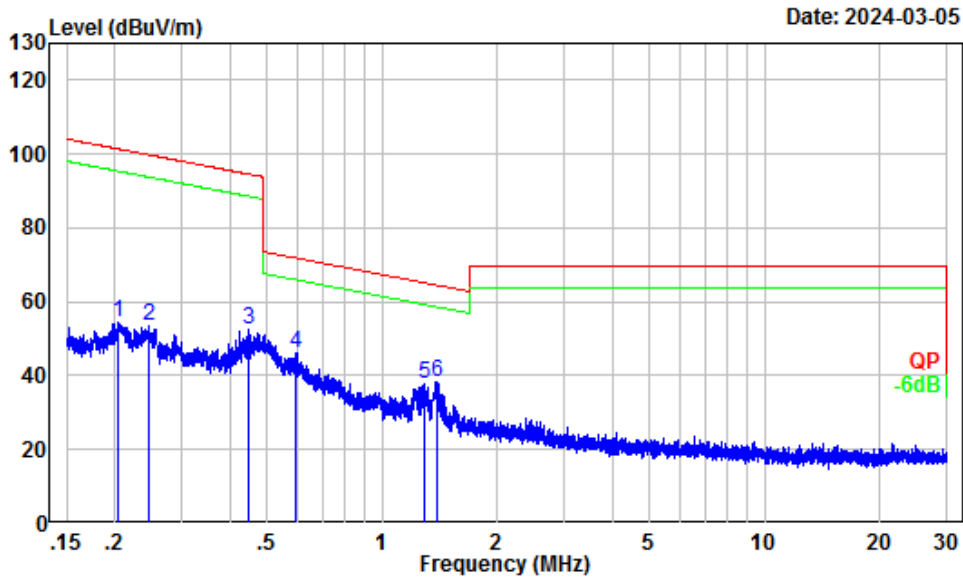


Site : chamber
 Condition : 3m
 Project Number: SZ1240301-10056E-RF
 Note : Transmitting
 Note : UT-681A-5100UY
 Tester : Warren Huang

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.21	28.81	25.52	54.33	101.37	-47.04	Peak
2	0.25	27.32	25.97	53.29	99.76	-46.47	Peak
3	0.45	21.64	30.87	52.51	94.53	-42.02	Peak
4	0.60	19.73	26.38	46.11	72.05	-25.94	Peak
5	1.29	14.01	23.73	37.74	65.22	-27.48	Peak
6	1.39	13.49	25.00	38.49	64.53	-26.04	Peak

30MHz-1GHz: (ANT0 low channel was worst case)

For adapter 1


Horizontal

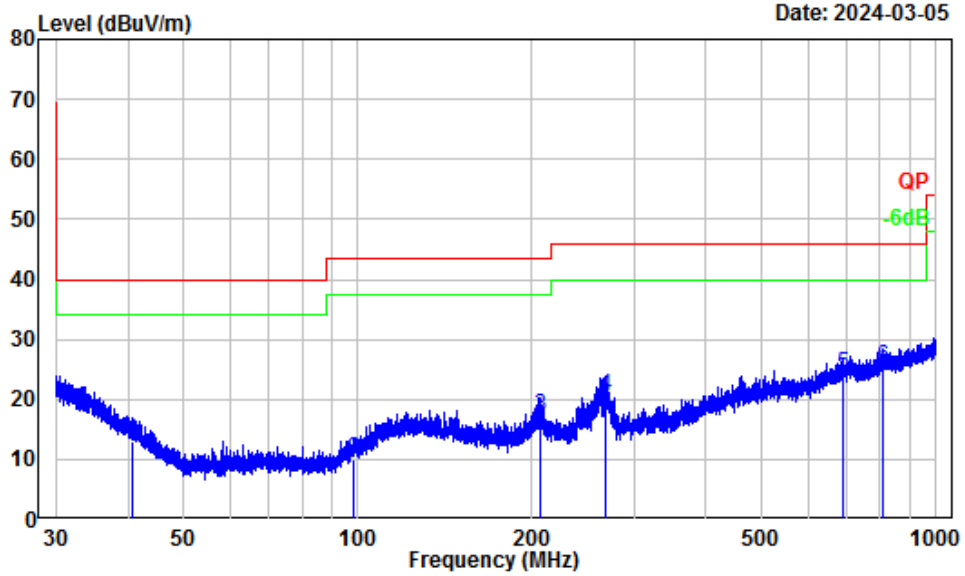

Site : chamber
 Condition : 3m Horizontal
 Project Number: SZ1240301-10056E-RF
 Note : Transmitting
 Note : S005CAU0500100
 Tester : Warren Huang

	Freq	Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	40.81	-10.91	23.80	12.89	40.00	-27.11	QP
2	98.36	-14.19	24.23	10.04	43.50	-33.46	QP
3	206.40	-11.14	28.34	17.20	43.50	-26.30	QP
4	267.90	-11.18	31.84	20.66	46.00	-25.34	QP
5	690.47	-1.69	25.83	24.14	46.00	-21.86	QP
6	810.98	-0.39	25.66	25.27	46.00	-20.73	QP

Vertical

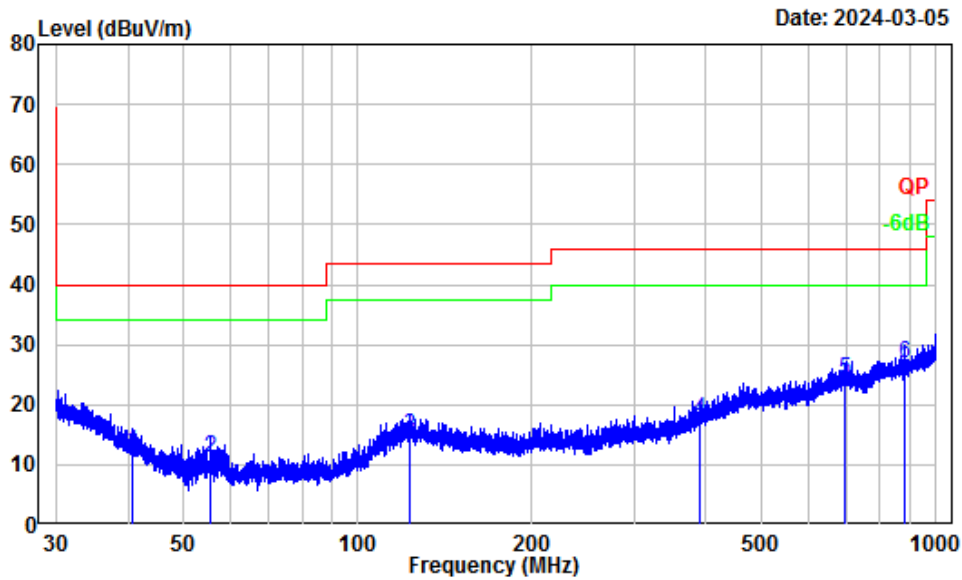


Site : chamber
 Condition : 3m Vertical
 Project Number: SZ1240301-10056E-RF
 Note : Transmitting
 Note : S005CAU0500100
 Tester : Warren Huang

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level			
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	40.72	-12.30	24.42	12.12	40.00	-27.88	QP
2	55.71	-17.53	28.73	11.20	40.00	-28.80	QP
3	122.67	-10.76	25.69	14.93	43.50	-28.57	QP
4	391.24	-8.02	25.58	17.56	46.00	-28.44	QP
5	695.94	-1.98	26.10	24.12	46.00	-21.88	QP
6	880.63	0.34	26.58	26.92	46.00	-19.08	QP

For adapter 2


Horizontal

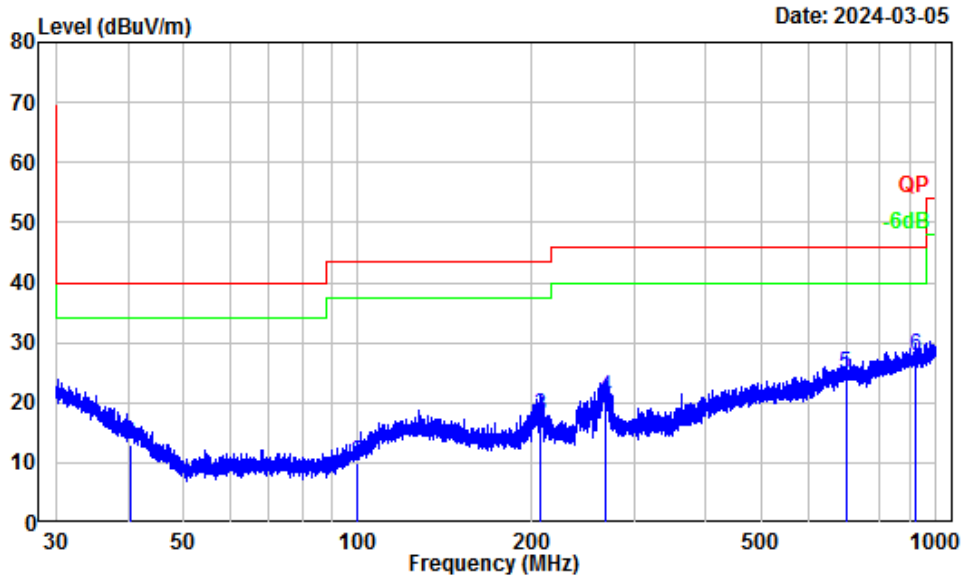

Site : chamber
 Condition : 3m Horizontal
 Project Number: SZ1240301-10056E-RF
 Note : Transmitting
 Note : UT-681A-5100UY
 Tester : Warren Huang

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	40.47	-10.69	23.60	12.91	40.00	-27.09	QP
2	99.83	-13.77	23.80	10.03	43.50	-33.47	QP
3	206.13	-11.13	29.07	17.94	43.50	-25.56	QP
4	267.43	-11.19	32.08	20.89	46.00	-25.11	QP
5	698.08	-1.55	26.39	24.84	46.00	-21.16	QP
6	919.29	1.25	26.60	27.85	46.00	-18.15	QP

Vertical

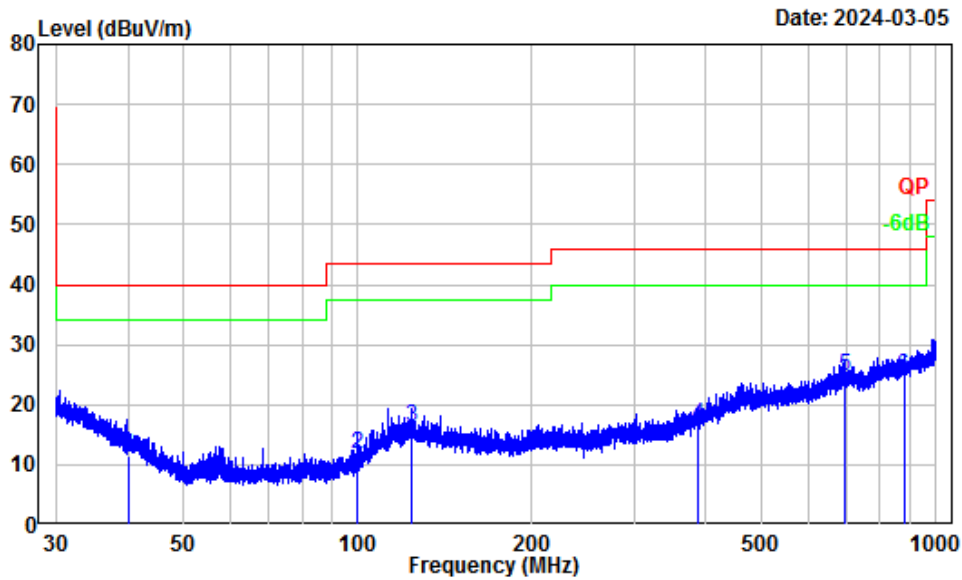

Site : chamber
 Condition : 3m Vertical
 Project Number: SZ1240301-10056E-RF
 Note : Transmitting
 Note : UT-681A-5100UY
 Tester : Warren Huang

	Freq	Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	40.03	-11.91	23.38	11.47	40.00	-28.53 QP
2	100.01	-15.23	26.87	11.64	43.50	-31.86 QP
3	124.24	-10.77	26.98	16.21	43.50	-27.29 QP
4	386.63	-8.25	24.79	16.54	46.00	-29.46 QP
5	694.42	-2.01	26.68	24.67	46.00	-21.33 QP
6	879.48	0.32	24.56	24.88	46.00	-21.12 QP

Above 1GHz:

ANT0

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	PK/Ave					
Low Channel							
1921.54	112.62	PK	H	-6.39	106.23	/	/
1921.54	117.69	PK	V	-6.39	111.30	/	/
3843.08	53.98	PK	H	-0.78	53.20	74	-20.80
3843.08	57.08	PK	V	-0.78	56.30	74	-17.70
Middle Channel							
1924.99	113.86	PK	H	-6.39	107.47	/	/
1924.99	117.92	PK	V	-6.39	111.53	/	/
3849.98	51.14	PK	H	-0.79	50.35	74	-23.65
3849.98	57.11	PK	V	-0.79	56.32	74	-17.68
High Channel							
1928.45	116.38	PK	H	-6.39	109.99	/	/
1928.45	118.01	PK	V	-6.39	111.62	/	/
3856.90	54.92	PK	H	-0.74	54.18	74	-19.82
3856.90	56.96	PK	V	-0.74	56.22	74	-17.78

Note:

Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Factor + Reading

Margin = Corrected. Amplitude - Limit

Field Strength of Average							
Frequency (MHz)	Peak Measurement @3m (dBµV/m)	Polar (H/V)	Duty Cycle Correction Factor (dB)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Comment
1921.536MHz							
1921.54	106.23	H	-28.18	78.05	/	/	Fundamental
1921.54	111.3	V	-28.18	83.12	/	/	Fundamental
3843.08	53.20	H	-28.18	25.02	54	-28.98	Harmonic
3843.08	56.30	V	-28.18	28.12	54	-25.88	Harmonic
1924.992MHz							
1924.99	107.47	H	-28.18	79.29	/	/	Fundamental
1924.99	111.53	V	-28.18	83.35	/	/	Fundamental
3849.98	50.35	H	-28.18	22.17	54	-31.83	Harmonic
3849.98	56.32	V	-28.18	28.14	54	-25.86	Harmonic
1928.448MHz							
1928.45	109.99	H	-28.18	81.81	/	/	Fundamental
1928.45	111.62	V	-28.18	83.44	/	/	Fundamental
3856.90	54.18	H	-28.18	26.00	54	-28.00	Harmonic
3856.90	56.22	V	-28.18	28.04	54	-25.96	Harmonic

Duty cycle:

Ton1 =0.39ms

Tp = 10.05 ms

Duty cycle = Ton/Tp = 0.39/10.05=0.039

Duty Cycle Corrected Factor = 20lg (Duty cycle) = 20lg0.039 = -28.18

ANT1

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	PK/Ave					
Low Channel							
1921.53	117.82	PK	H	-6.39	111.43	/	/
1921.53	117.99	PK	V	-6.39	111.60	/	/
3843.08	52.43	PK	H	-0.78	51.65	74	-22.35
3843.08	57.98	PK	V	-0.78	57.20	74	-16.80
Middle Channel							
1924.99	118.01	PK	H	-6.39	111.62	/	/
1924.99	117.98	PK	V	-6.39	111.59	/	/
3849.98	52.65	PK	H	-0.79	51.86	74	-22.14
3849.98	57.88	PK	V	-0.79	57.09	74	-16.91
High Channel							
1928.45	118.03	PK	H	-6.39	111.64	/	/
1928.45	118.01	PK	V	-6.39	111.62	/	/
3856.90	52.62	PK	H	-0.74	51.88	74	-22.12
3856.90	53.85	PK	V	-0.74	53.11	74	-20.89

Note:

Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Factor + Reading

Margin = Corrected. Amplitude - Limit

Field Strength of Average							
Frequency (MHz)	Peak Measurement @3m (dBµV/m)	Polar (H/V)	Duty Cycle Correction Factor (dB)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Comment
1921.536MHz							
1921.53	111.43	H	-28.18	83.25	/	/	Fundamental
1921.53	111.6	V	-28.18	83.42	/	/	Fundamental
3843.08	51.65	H	-28.18	23.47	54	-30.53	Harmonic
3843.08	57.20	V	-28.18	29.02	54	-24.98	Harmonic
1924.992MHz							
1924.99	111.62	H	-28.18	83.44	/	/	Fundamental
1924.99	111.59	V	-28.18	83.41	/	/	Fundamental
3849.98	51.86	H	-28.18	23.68	54	-30.32	Harmonic
3849.98	57.09	V	-28.18	28.91	54	-25.09	Harmonic
1928.448MHz							
1928.45	111.64	H	-28.18	83.46	/	/	Fundamental
1928.45	111.62	V	-28.18	83.44	/	/	Fundamental
3856.90	51.88	H	-28.18	23.70	54	-30.30	Harmonic
3856.90	53.11	V	-28.18	24.93	54	-29.07	Harmonic

Duty cycle:


Ton1 =0.39ms

Tp = 10.05 ms

Duty cycle = Ton/Tp = 0.39/10.05=0.039

Duty Cycle Corrected Factor = 20lg (Duty cycle) = 20lg0.039 = -28.18


Duty cycle

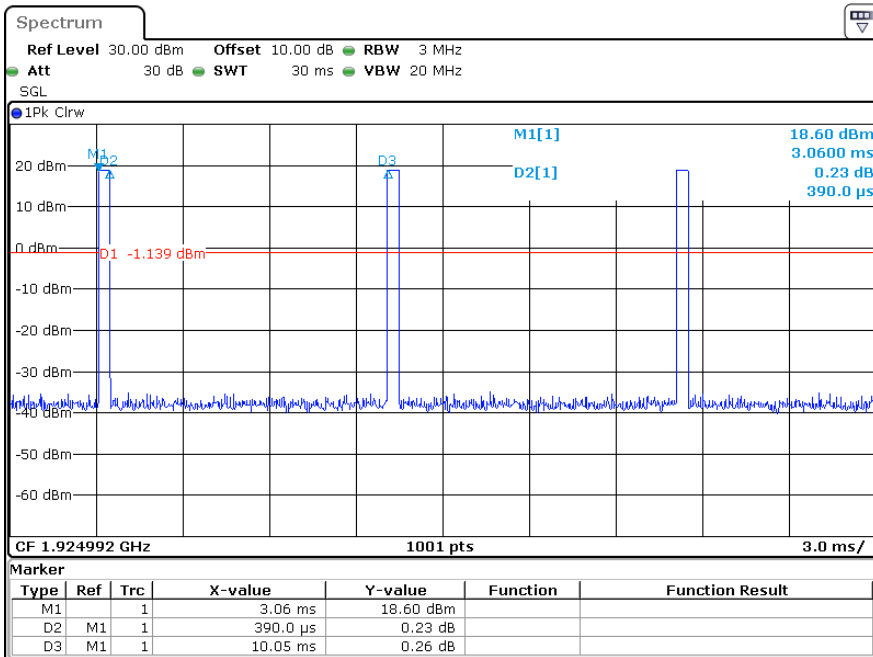

ProjectNo.:SZ1240301-10056E-RF Tester:Hanic Pan


Date: 14.MAR.2024 11:10:42

Listed with the worst harmonic margin test plot:

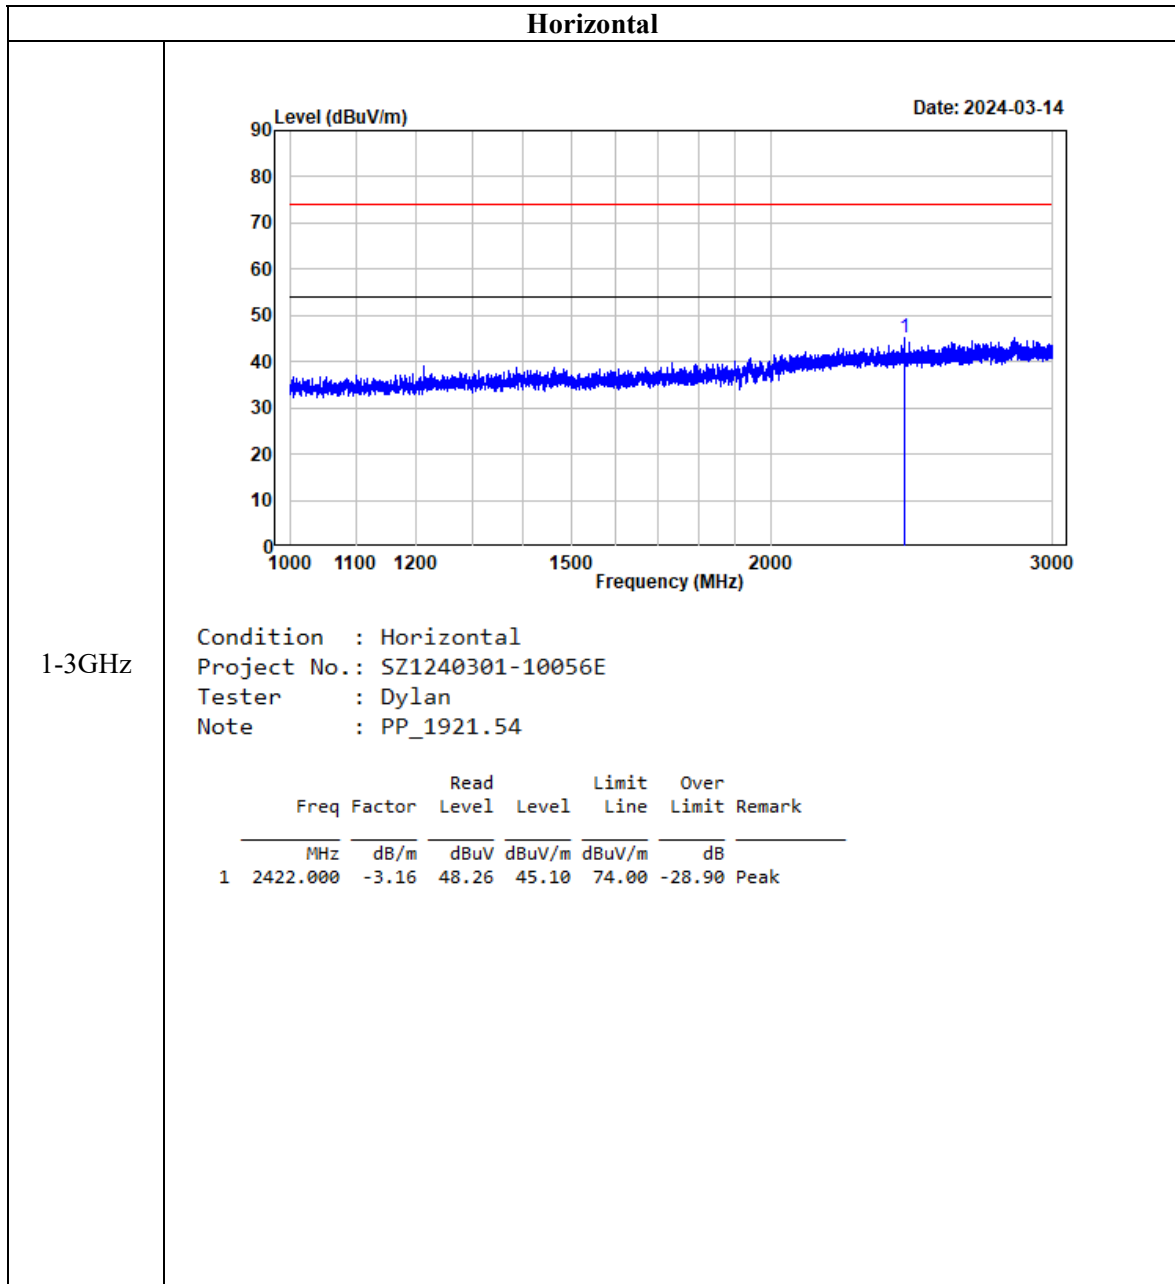

Vertical

1-3GHz

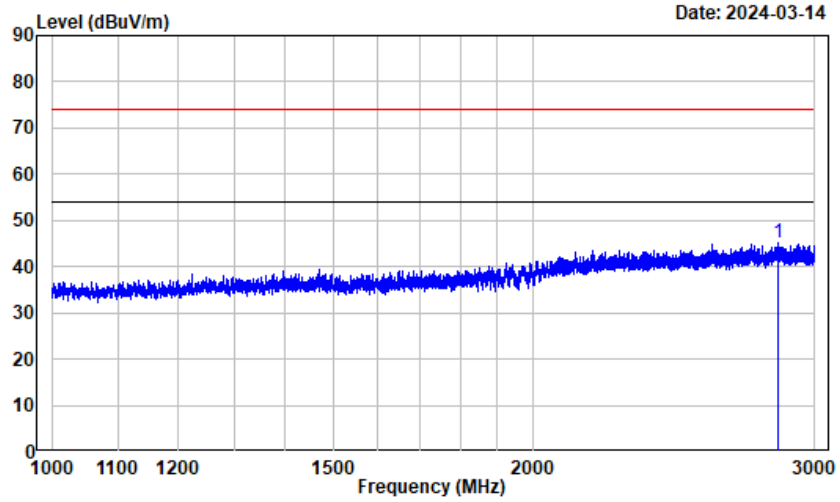


Condition : Vertical
 Project No.: SZ1240301-10056E
 Tester : Dylan
 Note : PP_1921.54

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2845.000	-2.55	47.75	45.20	74.00	-28.80	Peak

Horizontal


3-18GHz

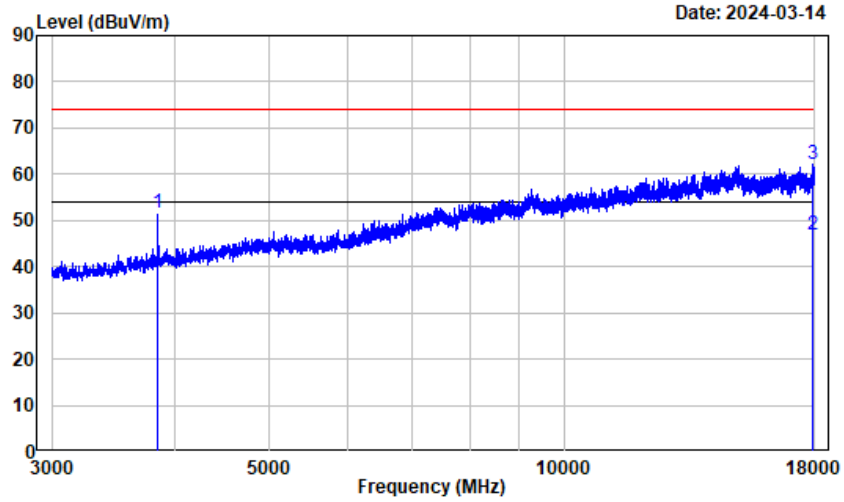

Condition : Horizontal
 Project No.: SZ1240301-10056E
 Tester : Dylan
 Note : PP_1921.54

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3843.080	-0.78	52.43	51.65	74.00	-22.35	Peak
2	17891.250	23.77	23.02	46.79	54.00	-7.21	Average
3	17891.250	23.77	38.39	62.16	74.00	-11.84	Peak

Vertical

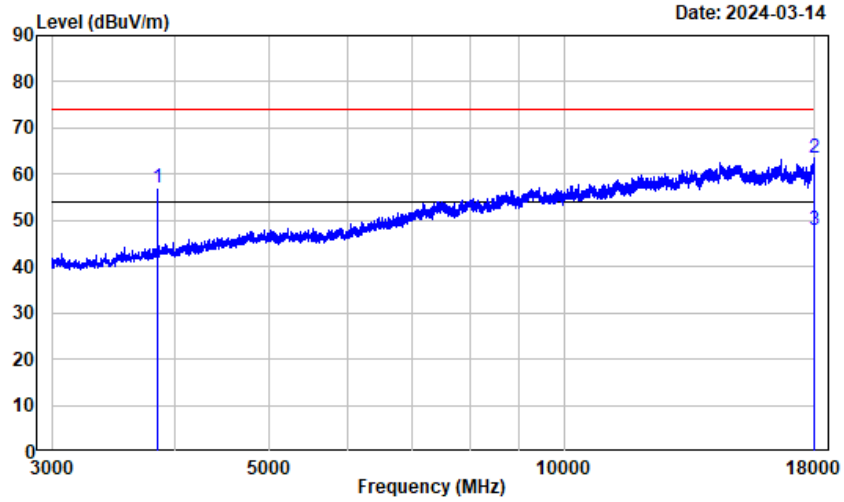


3-18GHz

Condition : Vertical
 Project No.: SZ1240301-10056E
 Tester : Dylan
 Note : PP_1921.54

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3843.080	-0.78	57.98	57.20	74.00	-16.80	Peak
2	17998.130	24.61	39.05	63.66	74.00	-10.34	Peak
3	17998.130	24.61	23.14	47.75	54.00	-6.25	Average

Horizontal

18-20GHz

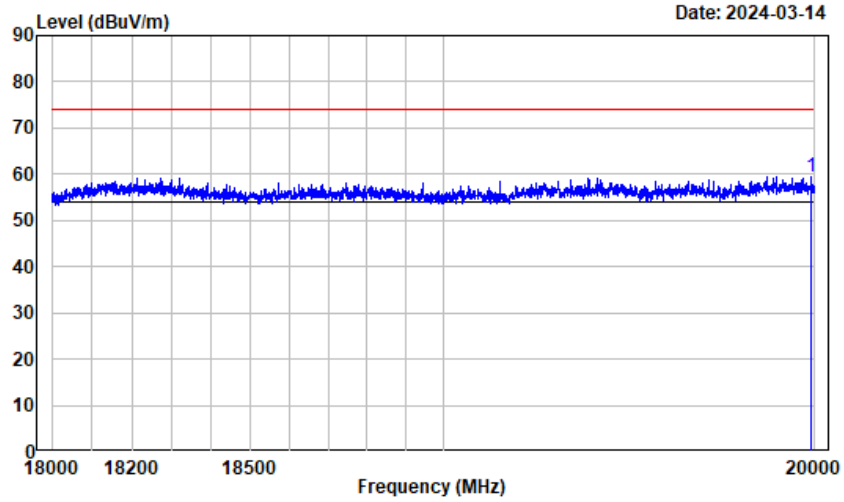


Condition : Horizontal
 Project No.: SZ1240301-10056E
 Tester : Dylan
 Note : PP_1921.54

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	19989.750	13.82	45.78	59.60	74.00	-14.40	Peak

Vertical

18-20GHz

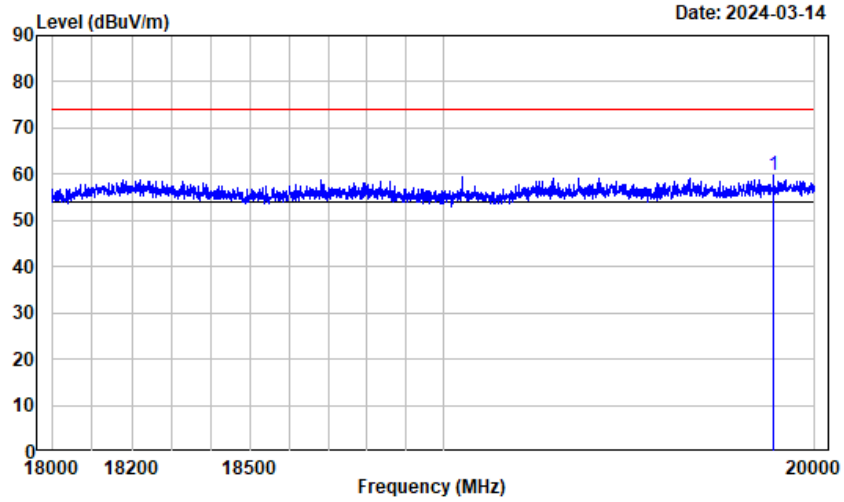

Condition : Vertical
 Project No.: SZ1240301-10056E
 Tester : Dylan
 Note : PP_1921.54

Freq	Factor	Read		Limit	Over	Remark
		Level	Level			
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 19887.380	13.84	45.86	59.70	74.00	-14.30	Peak

§ 15.323 (f) & RSS-213 §5.3 FREQUENCY STABILITY

Applicable Standard

Per §15.323(f) & ANSI C63.17-2013 Clause 6.2.1, the frequency stability of the carrier frequency of the intentional radiator shall be maintained within ±10 ppm over 1 hour or the interval between channel access monitoring, whichever is shorter. The frequency stability shall be maintained over a temperature variation of -20°C to +50°C or as declared by the manufacturer at normal supply voltage, and over a variation in the primary supply voltage of 85 percent to 115 percent of the rated supply voltage at a temperature of 20 °C. For equipment that is capable only of operating from a battery, the frequency stability tests shall be performed using a new battery without any further requirement to vary supply voltage.

According to RSS-213 Issue 3 (2015-03) § (5.3):
 The carrier frequency stability shall be maintained within ±10 ppm (±0.001%).

According to RSS-Gen Issue5 (2021-02) § (8.11) & ANSI C63.17-2013 Clause 6.2.1:
 Transmitter frequency stability for licence-exempt radio apparatus shall be measured in accordance with Section 6.11. For licence-exempt radio apparatus, the frequency stability shall be measured at temperatures of -20°C (-4°F), +20°C (+68°F) and +50°C (+122°F) instead of at the temperatures specified in Section 6.11.


Test Procedure

This procedure should be carried out for each of the following test cases:

Temperature	Supply Voltage
20°C	85-115% or new batteries
-20°C	Normal
+50°C	Normal

During test, the equipment shall be placed in the boxes and set the temperature to the specified requirement until the thermal balance has been reached.

Using the mean carrier frequency at 20°C and at nominal supply voltage as the reference, the mean carrier frequency shall be maintained within ± 10 ppm at the two extreme temperatures (or as declared by the manufacturer) and at normal temperature (typically 20°C) at the two extreme supply voltages. This test does not apply to a EUT that is capable only of operating from a battery.

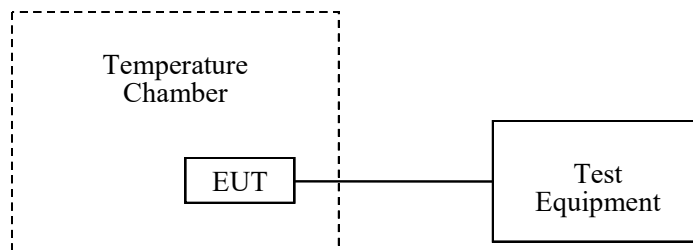

Test Data

Environmental Conditions

Temperature:	24~25 °C
Relative Humidity:	46~47 %
ATM Pressure:	101 kPa

The testing was performed by Hanic Pan on 2024-03-14.

Test Result: Compliant

Test mode: Transmitting

AC Power:

Temperature (°C)	Voltage (V _{AC} <input checked="" type="checkbox"/> , V _{DC} <input type="checkbox"/>)	Channel Frequency (MHz)	Measured Frequency Offset (kHz)	Measured Frequency Offset (ppm)	Limit (ppm)
-20	120	1924.992	5	2.60	±10
+20	102	1924.992	7	3.64	±10
	138	1924.992	7	3.64	±10
+50	120	1924.992	6	3.12	±10

Battery

Temperature (°C)	Voltage (V _{AC} <input type="checkbox"/> , V _{DC} <input checked="" type="checkbox"/>)	Channel Frequency (MHz)	Measured Frequency Offset (kHz)	Measured Frequency Offset (ppm)	Limit (ppm)
-20	2.4	1924.992	5	2.60	±10
+20	2.4	1924.992	6	3.12	±10
+50	2.4	1924.992	5	2.60	±10

Note: the extreme test condition was declared by applicant.

§ 15.323 (c)(e) § 15.319 (f) & RSS-213 §5.1&§5.2 SPECIFIC REQUIREMENTS FOR UPCS DEVICE

Applicable Standard


FCC§15.323(c)(e) & §15.319(f) Specific Requirements for UPCS device.
ANSI C63.17 2013 §6.2 Frequency and time stability and §7.Monitoring tests and §8.Time and spectrum window access procedure.

According to RSS-213 §5.1&§5.2 type of modulation and access protocol
Equipment certified under this standard shall use digital modulation.
In order to provide equitable access to the radio frequency spectrum, the licence-exempt PCS device must possess an access protocol.

Test Procedure

Measurement method according to ANSI C63.17- 2013

Test configuration as below

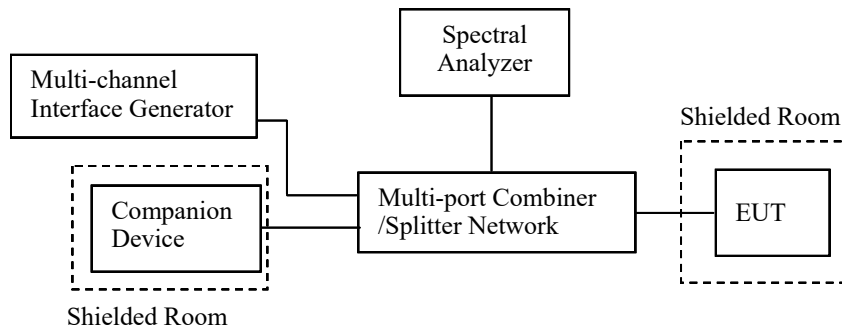

Test Data

Environmental Conditions

Temperature:	24~25 °C
Relative Humidity:	46~47 %
ATM Pressure:	101 kPa

The testing was performed by Hanic Pan on 2024-03-14.

Test Result: Compliant

Please see the below data

1) Automatic Discontinuation of Transmission

Test result:

The following tests were performed after a connection had been established with BU.

Test condition	Reaction of EUT	Pass/Fail
Adapter removed from EUT	Connection break down	Pass
Battery remove from BU	Connection break down	Pass

2) Monitoring Time

Test result:

This requirement is covered by the results of Least Interfered Channel (LIC).

Interference (Refer to ANSI C63.17 clause 7.3.3)	Reaction of EUT	Results
a) Apply the interference on f_1 at level $T_L+U_M+20\text{dB}$ and no interference on f_2 . Initiate transmission and verify the transmission only on f_2 . Then terminate it.	EUT transmits on f_2	Pass
b) Apply the interference on f_2 at level $T_L+U_M+20\text{dB}$ and immediately remove all interference from f_1 . The EUT should immediately attempt transmission on f_1 (but at least 20 ms after the interference on f_2 is applied), verify the transmission only on f_1 .	EUT transmission f_1	Pass

3) Lower Monitoring Threshold

Test result:

Not applicable because the EUT has more 40 defined duplex system access channels and meet the provision of the Least Interfered Channel (LIC).

4) Maximum Transmit Period

Test result:

Repetition of Access Criteria	Measured Maximum Transmission Time (Second)	Limit (Second)	Results
First	18720	28,800	Pass
Second	18720	28,800	Pass

5) System Acknowledgement

Test result:

Test	Time taken (second)	Limit (second)	Result
Initial Connection acknowledgement	0.45	1	Pass
Change of access criteria for control information	N/A	30	N/A
Transmission cease time after loss of acknowledgement	4.36	30	Pass

Note: N/A=Not Applicable

6) Least Interfered Channel (LIC)

Calculation of monitoring threshold limits for isochroous devices:

Lower threshold: $T_L = -174 + 10\text{Log}_{10}B + M_L + P_{MAX} - P_{EUT}$ (dBm)

Where: B=Emission bandwidth (Hz)

M_L = dB the threshold may exceed thermal noise (30 for T_L)

$P_{MAX} = 5\text{Log}_{10}B - 10$ (dBm)

P_{EUT} = Transmitted power (dBm)

Calculated thresholds:

Monitor Threshold	B(MHz)	M_L (dB)	P_{MAX} (dBm)	P_{EUT} (dBm)	Threshold (dBm)
Lower threshold	1.43	30	20.78	18.92	-80.59

Note: 1. The upper threshold is applicable as the EUT utilizes more than 20 duplex system channels

Test result:

C63.17 clause 7.3.2, LIC procedure test:

Interference (Refer to ANSI C63.17 clause 7.3.3)	Reaction of EUT	Results
a) Apply the interference on f_1 at level $T_L + U_M + 7\text{dB}$ and the interference on f_2 at level $T_L + U_M$. Initiate transmission and verify the transmission only on f_2 . Repeat 5 times.	EUT transmits on f_2	Pass
b) Apply the interference on f_1 at level $T_L + U_M$ and the interference on f_2 at level $T_L + U_M + 7\text{dB}$. Initiate transmission and verify the transmission only on f_1 . Repeat 5 times.	EUT transmits on f_1	Pass
c) Apply the interference on f_1 at level $T_L + U_M + 1\text{dB}$ the interference on f_2 at level $T_L + U_M - 6\text{dB}$. Initiate transmission and verify the transmission only on f_2 . Repeat 5 times.	EUT transmits on f_2	Pass
d) Apply the interference on f_1 at level $T_L + U_M - 6\text{dB}$ and the interference on f_2 at level $T_L + U_M + 1\text{dB}$. Initiate transmission and verify the transmission only on f_1 . Repeat 5 times.	EUT transmits on f_1	Pass

C63.17 clause 7.3.3, Selected channel confirmation:

Interference (Refer to ANSI C63.17 clause 7.3.4)	Reaction of EUT	Results
a) Apply the interference on f_1 at level T_U+U_M and no interference on f_2 . Initiate transmission and verify the transmission only on f_2 . Then terminate it.	EUT transmits on f_2	Pass
b) Apply the interference on f_2 at level T_L+U_M and immediately remove all interference from f_1 . The EUT should immediately attempt transmission on f_1 (but at least 20 ms after the interference on f_2 is applied), verify the transmission only on f_1 .	EUT transmission f_1	Pass

7) Random waiting

Note: This is Not Applicable

8) Monitoring Bandwidth and Reaction Time

Test result:

1) Monitoring Bandwidth:

The antenna of the EUT used for monitoring is the same interior antenna that used for transmission, so the monitoring system bandwidth is equal to the emission bandwidth of the intended transmission

2) Reaction Time Test:

No.	Interference Pulse width (μ s)	Reaction of EUT	Observing time (μ s)	Result
1	50 μ s with level T_L+U_M	No transmission	46.52	Pass
2	35 μ s with level T_L+U_M+6 dB	No transmission	32.97	Pass

9) Monitoring Antenna

Test result:

The antenna of the EUT used for transmission is the same interior antenna that used for monitoring.

10) Monitoring threshold relaxation

Test result:

This requirement is covered by the results of Least Interfered Channel (LIC).

11) Duplex Connections

Test result:

Interference (Refer to ANSI C63.17 § 8.3& § 8.3.2)	Reaction of EUT	Results
a) Only a single carrier f_1 for EUT TDMA systems and on f_1 and f_2 and corresponding duplex carriers for FDMA systems.	EUT can transmit	Pass
b) All Tx windows with level TL+UM except one & Rx windows with level TL+UM+7dB except one, which are not the duplex mate.	Connected on the target Rx window and its duplex mate.	Pass
c) All Tx windows with level TL+UM+7dB except one & Rx windows with level TL+UM except one, which are not duplex mate.	Connected on the target Tx window and its duplex mate.	Pass
d) All Tx & Rx windows with level TU+UM, except one for Tx window & one for Rx window, which are not duplex mate.	No connection possible	Pass

12) Alternative monitoring interval

Test result:

Interference (Refer to ANSI C63.17 § 8.4)	Reaction of EUT	Results
a) Only a single carrier f_1 for EUT TDMA systems and on f_1 and f_2 and corresponding duplex carriers for FDMA systems.	EUT can transmit	Pass
b) Apply interference with same parameters as EUT transmissions on all Tx windows with level TL+UM on the enabled carrier(s) and no interference on the Rx windows on the enabled carriers.	No connection is established	Pass

IC:

Not appropriate, as the system always monitor both the transmit and receive time/spectrum windows, it is not a co-located device.

13) Fair Access

Test result:

The manufacturer declares that this device does not use any mechanisms as provided by FCC §15.323(c)(10) or (11) & IC RSS-213 5.2(10) and (11) to extend the range of spectrum occupied over space or time for the purpose of denying fair access to spectrum to other device.

14) Frame Repetition Stability Frame Period and Jitter

Test result:

Frame Period and Jitter:

Max. pos. Jitter (µs)	Max. neg. Jitter (µs)	Frame period (ms)	Limit	
			Frame Period (ms)	Jitter (µs)
0.12	-0.03	10.66	20 or 10/X	25

Note: X is a positive whole number.

EUT PHOTOGRAPHS

Please refer to the attachment SZ1240301-10056E-RF External photo and SZ1240301-10056E-RF Internal photo.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment SZ1240301-10056E-RF Test Setup photo.

******* END OF REPORT *******