

# TEST REPORT

**Application No.:** HKEM2201000049AT  
**Applicant:** Meizhou Guo Wei Electronics Co., Ltd.  
**Address of Applicant:** AD1 Section, Economic Development Area, Dongsheng Industrial District, Meizhou, Guangdong, China.

**Equipment Under Test (EUT):**  
**EUT Name:** Video baby monitor  
**Model No.:** VM483PU, VM482PU, VM482ANXLPU  
**Additional Model:** Please refer to section 2 of this report which indicates which item was actually tested and which were electrically identical.

**Trademark:** Motorola  
**FCC ID:** 2ARRB-VM483APU  
**IC:** 20353-VM483APU  
**HVIN:** VM483APU  
**Standard(s) :** 47 CFR Part 15 Subpart C, 2020  
 RSS-247 Issue 2, February 2017  
 RSS-Gen: Issue 5, Amdt 2021

**Date of Receipt:** 2022-01-31  
**Date of Test:** 2022-01-31 to 2022-02-14  
**Date of Issue:** 2022-02-15

<b>Test Result:</b>	<b>Pass*</b>
---------------------	--------------

\* In the configuration tested, the EUT complied with the standards specified above.



Law Man Kit  
EMC Manager

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request and accessible at <http://www.sgs.com/en/Terms-and-conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-conditions.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. The document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

<b>Revision Record</b>				
<b>Version</b>	<b>Chapter</b>	<b>Date</b>	<b>Modifier</b>	<b>Remark</b>
01		2022-02-15		Original

<b>Authorized for issue by:</b>			
		<hr/> <b>Panny Leung</b> /Project Engineer	
			Date: 2022-02-15
		<hr/> <b>Law Man Kit</b> /Reviewer	
			Date: 2022-02-15

## 2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)	Pass
Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.247(a)(1),(g),(h)	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.5	47 CFR Part 15, Subpart C 15.247(b)(1)	Pass
20dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.7	47 CFR Part 15, Subpart C 15.247(a)(1)	Pass
Carrier Frequencies Separation	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.2	47 CFR Part 15, Subpart C 15.247a(1)	Pass
Hopping Channel Number	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.3	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass
Dwell Time	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.4	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.6	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.8	47 CFR Part 15, Subpart C 15.247(d)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	RSS-247 Issue 2, February 2017	N/A	RSS-Gen Section 6.8	Pass
Pseudorandom Frequency Hopping Sequence	RSS-247 Issue 2, February 2017	N/A	RSS-247 Section 5.1(a)	Pass

<b>Radio Spectrum Matter Part</b>				
<b>Item</b>	<b>Standard</b>	<b>Method</b>	<b>Requirement</b>	<b>Result</b>
Conducted Emissions at AC Power Line (150kHz-30MHz)	RSS-247 Issue 2, February 2017	ANSI C63.10 (2013) Section 6.2	RSS-Gen Section 8.8	Pass
99% Bandwidth	RSS-247 Issue 2, February 2017	ANSI C63.10 (2013) Section 6.9.3	RSS-Gen Section 6.7	Pass
Conducted Peak Output Power	RSS-247 Issue 2, February 2017	ANSI C63.10 (2013) Section 7.8.5	RSS-247 Section 5.4(b)	Pass
20dB Bandwidth	RSS-247 Issue 2, February 2017	ANSI C63.10 (2013) Section 6.9.2	RSS-247 Section 5.1(a)	Pass
Carrier Frequencies Separation	RSS-247 Issue 2, February 2017	ANSI C63.10 (2013) Section 7.8.2	RSS-247 Section 5.1(b)	Pass
Hopping Channel Number	RSS-247 Issue 2, February 2017	ANSI C63.10 (2013) Section 7.8.3	RSS-247 Section 5.1(d)	Pass
Dwell Time	RSS-247 Issue 2, February 2017	ANSI C63.10 (2013) Section 7.8.4	RSS-247 Section 5.1(d)	Pass
Conducted Band Edges Measurement	RSS-247 Issue 2, February 2017	ANSI C63.10 (2013) Section 7.8.6	RSS-247 Section 5.5	Pass
Conducted Spurious Emissions	RSS-247 Issue 2, February 2017	ANSI C63.10 (2013) Section 7.8.8	RSS-247 Section 5.5	Pass
Radiated Emissions which fall in the restricted bands	RSS-247 Issue 2, February 2017	ANSI C63.10 (2013) Section 6.10.5	Section 3.3 & RSS-Gen Section 8.10	Pass
Radiated Spurious Emissions	RSS-247 Issue 2, February 2017	ANSI C63.10 (2013) Section 6.4&6.5&6.6	Section 3.3 & RSS-Gen Section 8.9	Pass
Frequency stability	RSS-247 Issue 2, February 2017	RSS-Gen Section 6.11	RSS-Gen Section 8.11	Pass

Note: Frequency stability requested in RSS GEN Section 8.1.1 has been complied since the result of band edge can demonstrate.

**Declaration of EUT Family Grouping:**

Item no.: VM483PU, VM482PU, VM482ANXLPU

According to the confirmation from the applicant, the above models are identical in all electrical aspects in relating to the circuitry design, PCB layout, electrical components used, internal wiring and functions. The differences are listed as below,

VM483PU with talk back, night vision, temperature reading and 2.8" LCD.

VM482PU: with night vision, temperature reading and 2.4" LCD.

VM482ANXLPU: with night vision, temperature reading, 2.8" LCD.

Therefore, only the model VM483PU was fully tested as the major model in this report, VM482ANXLPU were only tested in Radiated Emissions (30MHz-1GHz) test.

### 3 Contents

	Page
<b>1 COVER PAGE .....</b>	<b>1</b>
<b>2 TEST SUMMARY .....</b>	<b>3</b>
<b>3 CONTENTS .....</b>	<b>5</b>
<b>4 GENERAL INFORMATION .....</b>	<b>7</b>
4.1 DETAILS OF E.U.T. ....	7
4.2 DESCRIPTION OF SUPPORT UNITS .....	8
4.3 MEASUREMENT UNCERTAINTY .....	9
4.4 TEST LOCATION .....	10
4.5 TEST FACILITY .....	10
4.6 DEVIATION FROM STANDARDS .....	10
4.7 ABNORMALITIES FROM STANDARD CONDITIONS .....	10
<b>5 EQUIPMENT LIST .....</b>	<b>11</b>
<b>6 RADIO SPECTRUM TECHNICAL REQUIREMENT .....</b>	<b>13</b>
6.1 ANTENNA REQUIREMENT .....	13
6.1.1 <i>Test Requirement:</i> .....	13
6.1.2 <i>Conclusion</i> .....	13
6.2 PSEUDORANDOM FREQUENCY HOPPING SEQUENCE .....	14
6.2.1 <i>Test Requirement:</i> .....	14
6.2.2 <i>Test Setup Diagram</i> .....	14
6.2.3 <i>Conclusion</i> .....	14
<b>7 RADIO SPECTRUM MATTER TEST RESULTS .....</b>	<b>15</b>
7.1 CONDUCTED EMISSIONS AT AC POWER LINE (150kHz-30MHz) .....	15
7.1.1 <i>E.U.T. Operation</i> .....	15
7.1.2 <i>Test Setup Diagram</i> .....	16
7.1.3 <i>Measurement Procedure and Data</i> .....	16
7.2 99% BANDWIDTH .....	21
7.2.1 <i>E.U.T. Operation</i> .....	21
7.2.2 <i>Test Setup Diagram</i> .....	21
7.2.3 <i>Measurement Procedure and Data</i> .....	21
7.3 CONDUCTED PEAK OUTPUT POWER .....	22
7.3.1 <i>E.U.T. Operation</i> .....	22
7.3.2 <i>Test Setup Diagram</i> .....	22
7.3.3 <i>Measurement Procedure and Data</i> .....	22
7.4 20dB BANDWIDTH .....	23
7.4.1 <i>E.U.T. Operation</i> .....	23
7.4.2 <i>Test Setup Diagram</i> .....	23
7.4.3 <i>Measurement Procedure and Data</i> .....	23
7.5 CARRIER FREQUENCIES SEPARATION .....	24
7.5.1 <i>E.U.T. Operation</i> .....	24
7.5.2 <i>Test Setup Diagram</i> .....	24
7.5.3 <i>Measurement Procedure and Data</i> .....	24
7.6 HOPPING CHANNEL NUMBER .....	25
7.6.1 <i>E.U.T. Operation</i> .....	25
7.6.2 <i>Test Setup Diagram</i> .....	25
7.6.3 <i>Measurement Procedure and Data</i> .....	25

7.7	DWELL TIME .....	26
7.7.1	<i>E.U.T. Operation</i> .....	26
7.7.2	<i>Test Setup Diagram</i> .....	26
7.7.3	<i>Measurement Procedure and Data</i> .....	26
7.8	CONDUCTED BAND EDGES MEASUREMENT .....	27
7.8.1	<i>E.U.T. Operation</i> .....	29
7.8.2	<i>Test Setup Diagram</i> .....	29
7.8.3	<i>Measurement Procedure and Data</i> .....	29
7.9	CONDUCTED SPURIOUS EMISSIONS.....	30
7.9.1	<i>E.U.T. Operation</i> .....	30
7.9.2	<i>Test Setup Diagram</i> .....	30
7.9.3	<i>Measurement Procedure and Data</i> .....	30
7.10	RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS.....	31
7.10.1	<i>E.U.T. Operation</i> .....	31
7.10.2	<i>Test Setup Diagram</i> .....	31
7.10.3	<i>Measurement Procedure and Data</i> .....	32
7.11	RADIATED SPURIOUS EMISSIONS .....	33
7.11.1	<i>E.U.T. Operation</i> .....	34
7.11.2	<i>Test Setup Diagram</i> .....	34
7.11.3	<i>Measurement Procedure and Data</i> .....	35
<b>8</b>	<b>PHOTOGRAPHS .....</b>	<b>45</b>
<b>9</b>	<b>APPENDIX.....</b>	<b>46</b>
9.1	PEAK CONDUCTED OUTPUT POWER .....	46
9.2	EMISSION BANDWIDTH 20 dB .....	48
9.3	OCCUPIED CHANNEL BANDWIDTH 99%.....	50
9.4	CARRIER FREQUENCY SEPARATION .....	52
9.5	DWELL TIME .....	53
9.6	HOPPING FREQUENCIES.....	54
9.7	CONDUCTED BAND EDGE MEASUREMENT .....	55
9.8	CONDUCTED SPURIOUS EMISSION .....	59

## 4 General Information

### 4.1 Details of E.U.T.

Power supply:	<p>Adaptor 1 Model: BQ05A-0501000-U Input: AC 100-240V, 50/60Hz, Max 300mA Output: DC 5V, 1.0A</p> <p>or</p> <p>Adaptor 2 Model: AT-538A-050100A Input: AC 100-240V, 50/60Hz, 200mA Output: DC 5V, 1.0A</p> <p>or</p> <p>Battery Model: 5C Rated capacity: 1200mAh,4.44Wh Voltage: 3.7VDC</p> <p>Pre-scan test for RF conducted power were performed on the sample in this report, BQ05A-0501000-U is the worst case and used for fully test.</p>
Test voltage:	AC 120V
Cable:	<p>Adaptor 1 Power Cable: 180cm unshielded 2 wires DC cable</p> <p>Adaptor 2 Power Cable: 180cm unshielded 2 wires DC cable</p>
Antenna Gain:	0 dBi
Antenna Type:	Integral antenna
Modulation Type:	GFSK
Number of Channels:	32
Operation Frequency:	2405MHz to 2475MHz
Spectrum Spread Technology:	Frequency Hopping Spread Spectrum (FHSS)
Serial number:	A1
Hardware Version:	V1.0
Software Version:	V0.30
	Remark: Power level setting was not adjustable and fixed default through SW Version.

Frequency List

Channel Number	TX Freq (MHz)	Channel Number	TX Freq (MHz)	Channel Number	TX Freq (MHz)
<b>1</b>	2405	13	2430	25	2458.5
2	2407	14	2433	26	2460.5
3	2409	15	2435	27	2462.5
4	2411	16	2437	28	2467
5	2413	<b>17</b>	2439	29	2469
6	2415	18	2441	30	2471
7	2418	19	2444	31	2473
8	2420	20	2446	<b>32</b>	2475
9	2422	21	2450		
10	2424	22	2452		
11	2426	23	2454		
12	2428	24	2456		

Remark: 1. Operation channel is total 32.  
2. Testing Channels are highlighted in **bold**.

## 4.2 Description of Support Units

The EUT has been tested as an independent unit.



### 4.3 Measurement Uncertainty

RF

No.	Item	Measurement Uncertainty
1	Conducted disturbance	9 kHz - 30MHz
2	Radio Frequency	$\pm 7.25 \times 10^{-8}$
3	Duty cycle	$\pm 0.37\%$
4	Occupied Bandwidth	$\pm 3\%$
5	RF conducted power (30MHz-40GHz)	1.5dB
6	RF power density	1.5dB
7	Conducted Spurious emissions	1.5dB
8	RF Radiated power & Radiated Spurious emission test	4.4dB (30MHz-1GHz)
		4.7dB (1GHz-6GHz)
		4.7dB (6GHz-18GHz)
		5.7dB (18GHz-40GHz)
9	Temperature test	$\pm 1^\circ\text{C}$
10	Humidity test	$\pm 3\%$
11	Supply voltages	$\pm 1.5\%$
12	Time	$\pm 3\%$

Remark:

The  $U_{\text{lab}}$  (lab Uncertainty) is less than  $U_{\text{cispr}}$  (CISPR Uncertainty), so the test results

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

According to decision rule based on Clause 4.2 of CISPR 16-4-2, the EUT complied with the standards specified above.

#### 4.4 Test Location

All tests were performed at:

SGS Hong Kong Limited  
Unit 2 and 3, G/F, Block A, Po Lung Centre,  
11 Wang Chiu Road, Kowloon Bay, Kowloon, Hong Kong  
Tel: +852 2305 2570 Fax: +852 2756 4480

No tests were sub-contracted.

#### 4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• **HOKLAS (Lab Code: 009)**

SGS Hong Kong Limited has been accepted by HKAS Executive, on the recommendation of the Accreditation Advisory Board, as a HOKLAS Accredited Laboratory, this laboratory meets the requirements of ISO/IEC 17025:2017 and it has been accredited for performing specific test as listed in the scope of accreditation within the test category of Electrical and Electronic Products.

• **IAS Accreditation (Lab Code: TL-817)**

SGS Hong Kong Limited has met the requirements of AC89, IAS Accreditation Criteria for Testing Laboratories, and has demonstrated compliance with ISO/IEC Standard 17025:2017, General requirements for the competence of testing and calibration laboratories. This organization is accredited to provide the services specified in the scope of accreditation maintained on the IAS website ([www.iasonline.org](http://www.iasonline.org)).

The report must not be used by the client to claim product certification, approval, or endorsement by IAS, NIST, or any agency of the Federal Government.

• **FCC Recognized Accredited Test Firm(CAB Registration No.: 514599)**

SGS Hong Kong Limited has been accredited and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Designation Number: HK0015, Test Firm Registration Number: 514599.

• **Industry Canada (Site Registration No.: 26103; CAB Identifier No.: HK0015)**

SGS Hong Kong Limited has been recognized by Department of Innovation, Science and Economic Development (ISED) Canada as a wireless testing laboratory. The acceptance letter from the ISED is maintained in our files. CAB Identifier No: HK0015, Site Registration Number: 26103.

#### 4.6 Deviation from Standards

None

#### 4.7 Abnormalities from Standard Conditions

None

---

## 5 Equipment List

<b>20dB Bandwidth, Conducted Peak Output Power, Hopping Channel Number, Carrier Frequencies Separation, Dwell Time, Conducted Band Edges Measurement, Conducted Spurious Emissions</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No</b>	<b>Inventory No</b>	<b>Cal Date</b>	<b>Cal Due Date</b>
SMBV100A VECTOR SIGNAL GENERATOR	Rohde & Schwarz	SMBV100A	E234	2021/08/17	2022/08/16
FSV40 SIGNAL ANALYZER 40GHz	Rohde & Schwarz	FSV40	E235	2021/08/17	2022/08/16
SMB100A SIGNAL GENERATOR	Rohde & Schwarz	SMB100A	E236	2021/08/17	2022/08/16
Wireless Conn. Tester (CMW)	Rohde & Schwarz	CMW270	E240	2021/08/20	2022/08/19
OSP	Rohde & Schwarz	OSP-B157W8	E242	2021/04/20	2022/04/19
Cable	Rohde & Schwarz	J12J103539-00-2	E239	2021/09/17	2022/09/16
WMS32 Test software	Rohde & Schwarz	N/A	Version 11	N/A	N/A

<b>Conducted Emissions at Mains Terminals (150kHz-30MHz)</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No</b>	<b>Inventory No</b>	<b>Cal Date</b>	<b>Cal Due Date</b>
EMI Test Receiver 9kHz to 3.6GHz	Rohde & Schwarz	ESR3 / 102326	E231	2021/08/17	2022/08/16
Signal Generator	Rohde & Schwarz	SMT03	E177	2021/04/12	2022/04/11
Artificial Mains Network (LISN)	Schwarzbeck	NSLK 8127 / 8127312	E005	2021/04/13	2022/04/12
Impulse Limiter	Rohde & Schwarz	ESH-3-Z2 / 357881052	E028	2021/07/15	2022/07/14
EMC32 Test software	Rohde & Schwarz	Version 10	N/A	N/A	N/A

<b>Radiated Spurious Emissions (30MHz-1GHz)</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No</b>	<b>Inventory No</b>	<b>Cal Date</b>	<b>Cal Due Date</b>
3m Semi-Anechoic Chamber	ChamPro	N/A	E229	2021/08/09	2022/08/08
Coaxial Cable	SGS	N/A	E167	2021/07/15	2022/07/14
EMI Test Receiver 9kHz to 7GHz	Rohde & Schwarz	ESR7 / 102298	E314	2021/04/26	2022/04/25
TRILOG Super Broadb. Test Antenna, (25) 30-1000 MHz	Schwarzbeck	VULB 9168	E264	2021/10/18	2023/10/17
EMC32 Test software	Rohde & Schwarz	Version 10	N/A	N/A	N/A
Boresight Mast Controller	ChamPro	AM-BS-4500-E	E237	N/A	N/A
Turntable with Controller	ChamPro	EM1000	E238	N/A	N/A

<b>Radiated Spurious Emissions (above 1GHz)</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No</b>	<b>Inventory No</b>	<b>Cal Date</b>	<b>Cal Due Date</b>
3m Semi-Anechoic Chamber	ChamPro	N/A	E229	2021/08/09	2022/08/08
Coaxial Cable	SGS	N/A	E167	2021/07/15	2022/07/14
EMI Test Receiver 9kHz to 7GHz	Rohde & Schwarz	ESR7 / 102298	E314	2021/04/26	2022/04/25
TRILOG Super Broadb. Test Antenna, (25) 30-1000 MHz	Schwarzbeck	VULB 9168	E264	2021/10/18	2023/10/17
Signal and Spectrum Analyzer 2Hz - 26.5GHz	Rohde & Schwarz	FSW26	E296	2021/09/17	2022/09/16
Spectrum Analyzer 9kHz - 30GHz	Rohde & Schwarz	FSP30	E204	2020/03/11	2022/03/10
Horn Antenna 1 - 18GHz	Schwarzbeck	BBHA9120D	E211	2020/03/11	2022/03/10
Preamplifier 33dB, 1 - 18GHz	Schwarzbeck	BBV9718	E214	2019/04/24	2022/04/23
Preamplifier 33dB, 18 - 26.5GHz	Schwarzbeck	BBV9719	E215	2020/09/21	2022/09/20
Broadband Coaxial Preamplifier typ. 30 dB, 18-40GHz	Schwarzbeck	BBV 9721	E266	2021/09/17	2022/09/16
Highpass Filter 3.5-26.5GHz	Wainwright	WHNX3.5/26.5 G-6SS	E205	2019/04/24	2022/04/23
Band Reject Filter 2.4 -2.5GHz	MICRO-TRONICS	BRM50702	E324	2021/09/17	2022/09/16
RF cable SMA to SMA 10000mm	HUBER+SUHNER	SF104- 26.5/2*11SMA 45	E207-1	2021/09/17	2022/09/16
Boresight Mast Controller	ChamPro	AM-BS-4500-E	E237	N/A	N/A
Turntable with Controller	ChamPro	EM1000	E238	N/A	N/A

<b>General used equipment</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No</b>	<b>Inventory No</b>	<b>Cal Date</b>	<b>Cal Due Date</b>
Digital temperature & humidity data logger	SATO	SK-L200TH II	E232	2021/08/16	2022/08/15
Electronic Digital Thermometer with Hygrometer	nil	2074/2075	E159	2021/08/16	2022/08/15
Barometer with digital thermometer	SATO	7612-00	E218	2021/03/29	2022/03/28
Conditional Chamber	Zhong Zhi Testing Instruments	CZ-E-608D	E216	2021/08/17	2022/08/16

## 6 Radio Spectrum Technical Requirement

### 6.1 Antenna Requirement

#### 6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)  
RSS-Gen Section 6.8

#### 6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0dBi.

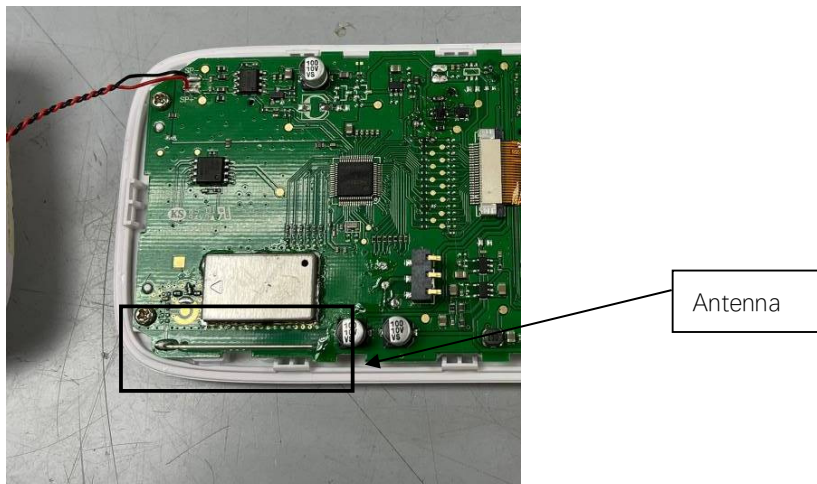



Photo of antenna refer to Appendix – Internal photo.

## 6.2 Pseudorandom Frequency Hopping Sequence

### 6.2.1 Test Requirement:


FCC Part 15 Subpart C Section 15.247(a)(1)  
 RSS-247 Section 5.1(a)

### 6.2.2 Test Setup Diagram

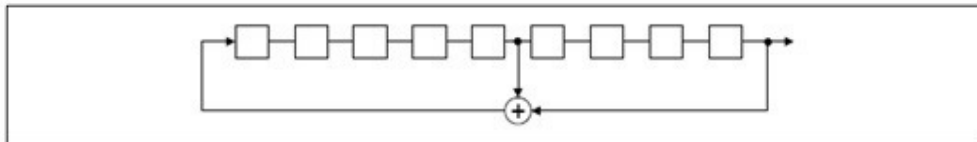

*Linear Feedback Shift Register for Generation of the PRBS sequence*

An example of Pseudorandom Frequency Hopping Sequence as follow:

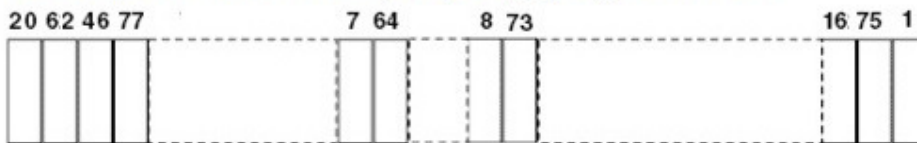

### 6.2.3 Conclusion

Standard Requirement:

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

Number of shift register stages: 9

Length of pseudo-random sequence:  $2^9 - 1 = 511$  bits

Longest sequence of zeros: 8 (non-inverted signal)

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:

Each frequency used equally on the average by each transmitter.

According to Technical Specification, the receivers are designed to have input and IF bandwidths that match the hopping channel bandwidths of any transmitters and shift frequencies in synchronization with the transmitted signals.

According to Technical specification, the system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels.

The system is designed not have the ability to coordinated with other FHSS System in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitter.

## 7 Radio Spectrum Matter Test Results

### 7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15 Subpart C 15.207, RSS-Gen Section 8.8  
 Test Method: ANSI C63.10 (2013) Section 6.2  
 Limit:

Frequency of emission(MHz)	Conducted limit(dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 23.5 C Humidity: 51.2 % RH :

Test mode c: TX\_Keep the EUT transmitted the continuous modulation test signal at the specific channel(s).

### 7.1.2 Test Setup Diagram

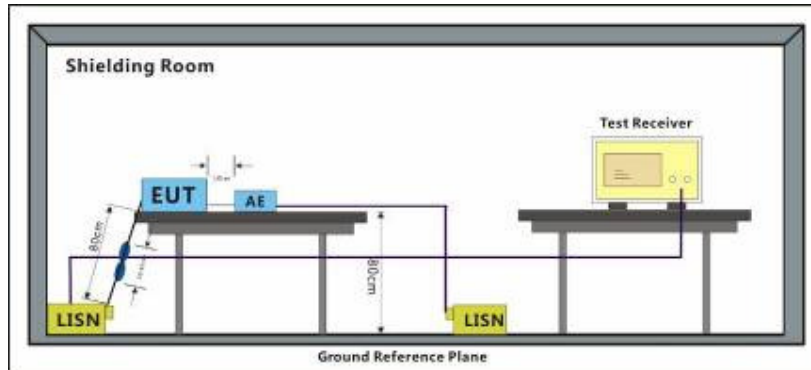

### 7.1.3 Measurement Procedure and Data


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a  $50\text{ohm}/50\mu\text{H} + 5\text{ohm}$  linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: LISN=Read Level+ Cable Loss+ LISN Factor



Adaptor: BQ05A-0501000-U  
Mode: c;  
Line: Live Line


Φυλλ Σπεχτρομ

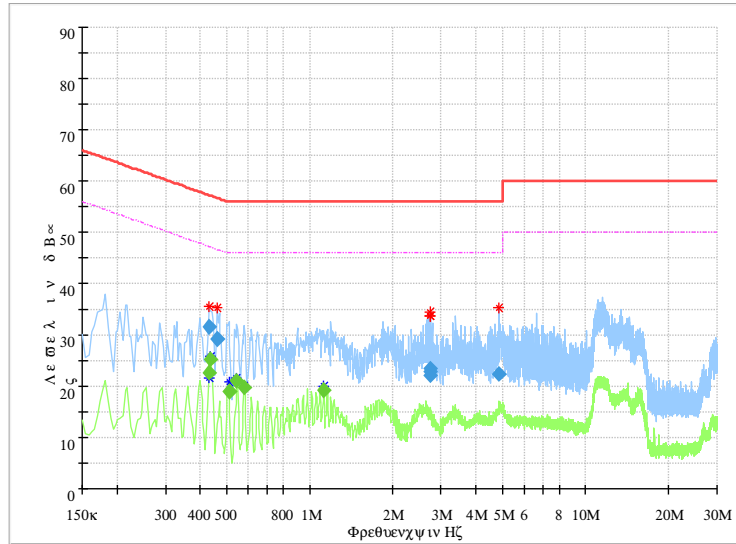

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Corr. (dB)	Result
0.430000	---	22.76	47.25	24.50	10.8	Pass
0.434000	31.62	---	57.18	25.55	10.8	Pass
0.438000	---	25.24	47.10	21.86	10.8	Pass
0.462000	29.31	---	56.66	27.35	10.8	Pass
0.510000	---	19.01	46.00	26.99	10.7	Pass
0.542000	---	20.96	46.00	25.04	10.7	Pass
0.578000	---	19.61	46.00	26.39	10.7	Pass
1.122000	---	19.31	46.00	26.69	10.3	Pass
2.722000	23.38	---	56.00	32.62	10.1	Pass
2.730000	22.09	---	56.00	33.91	10.1	Pass
2.746000	22.89	---	56.00	33.11	10.1	Pass
4.866000	22.33	---	56.00	33.67	10.2	Pass

Mode: c;  
 Line: Neutral Line


Φύλλ Σπεχτρομ

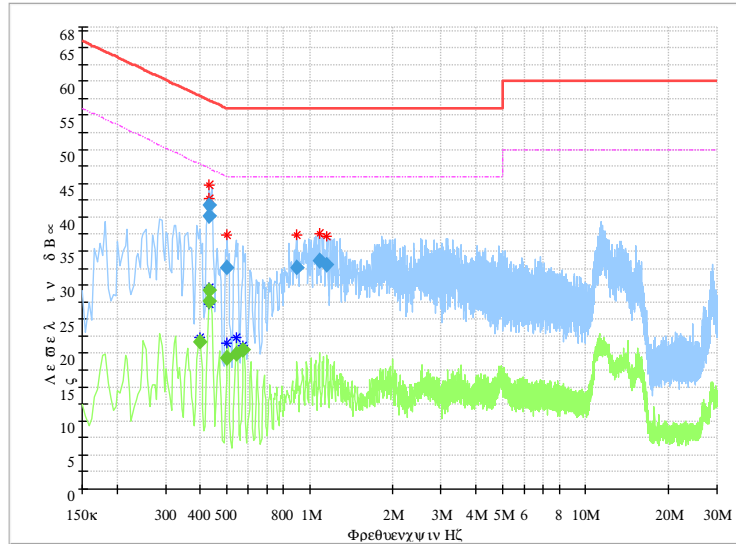

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Corr. (dB)	Result
0.398000	---	21.72	47.90	26.18	10.8	Pass
0.430000	---	27.56	47.25	19.69	10.8	Pass
0.430000	40.20	---	57.25	17.05	10.8	Pass
0.434000	---	29.20	47.18	17.97	10.8	Pass
0.434000	41.70	---	57.18	15.48	10.8	Pass
0.502000	32.71	---	56.00	23.29	10.7	Pass
0.502000	---	19.19	46.00	26.81	10.7	Pass
0.542000	---	19.90	46.00	26.10	10.7	Pass
0.574000	---	20.43	46.00	25.57	10.7	Pass
0.902000	32.58	---	56.00	23.42	10.4	Pass
1.086000	33.62	---	56.00	22.38	10.3	Pass
1.150000	32.93	---	56.00	23.07	10.3	Pass

Adaptor: AT-538A-050100A  
Mode: c;  
Line: Live Line


Φυλλ Σπεκτρουμ

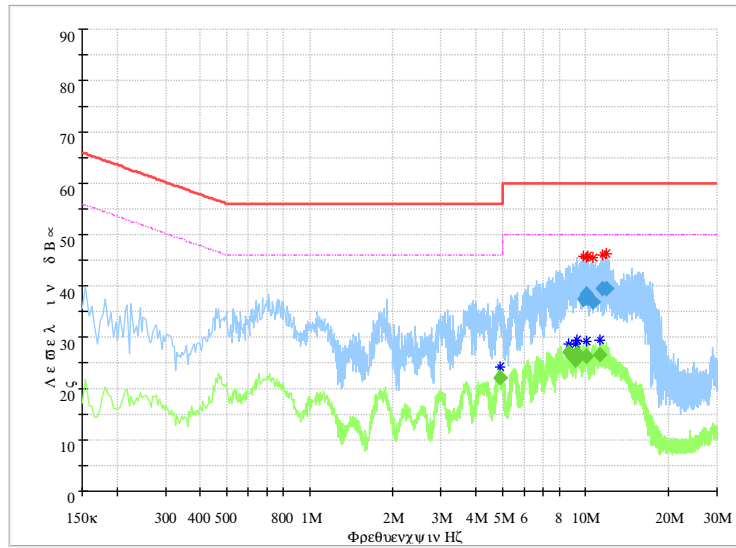

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Corr. (dB)	Result
4.902000	---	22.18	46.00	23.82	10.2	Pass
8.718000	---	26.98	50.00	23.02	10.3	Pass
9.186000	---	25.60	50.00	24.40	10.3	Pass
9.310000	---	26.91	50.00	23.09	10.3	Pass
9.850000	37.37	---	60.00	22.63	10.3	Pass
10.022000	38.53	---	60.00	21.47	10.3	Pass
10.066000	---	26.36	50.00	23.64	10.3	Pass
10.162000	37.70	---	60.00	22.30	10.3	Pass
10.682000	36.75	---	60.00	23.25	10.3	Pass
11.322000	---	26.70	50.00	23.30	10.3	Pass
11.522000	39.53	---	60.00	20.47	10.3	Pass
11.926000	39.41	---	60.00	20.59	10.3	Pass

Mode: c;  
Line: Neutral Line

Φύλλ Σπεχτρουμ

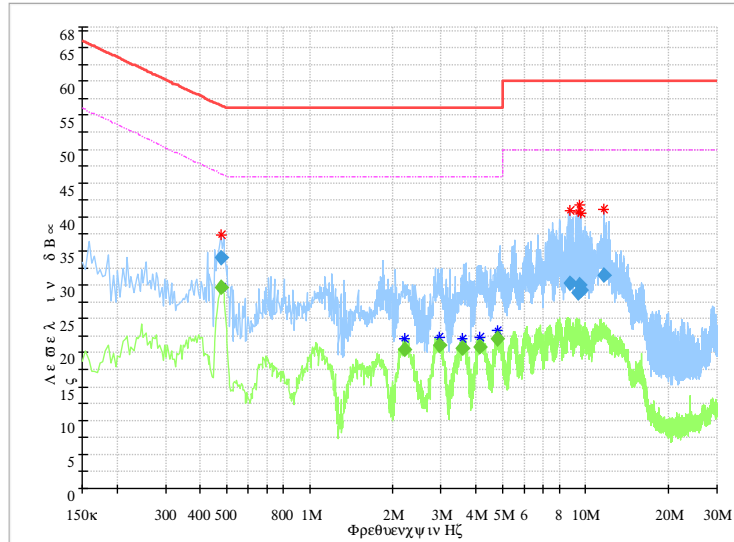

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Corr. (dB)	Result
0.478000	---	29.53	46.37	16.84	10.8	Pass
0.478000	34.00	---	56.37	22.38	10.8	Pass
2.210000	---	20.53	46.00	25.47	10.1	Pass
2.942000	---	21.11	46.00	24.89	10.1	Pass
3.582000	---	20.67	46.00	25.33	10.2	Pass
4.134000	---	20.92	46.00	25.08	10.2	Pass
4.782000	---	22.02	46.00	23.98	10.2	Pass
8.754000	30.23	---	60.00	29.77	10.3	Pass
9.450000	28.74	---	60.00	31.26	10.3	Pass
9.530000	30.10	---	60.00	29.90	10.3	Pass
9.610000	29.18	---	60.00	30.82	10.3	Pass
11.674000	31.37	---	60.00	28.63	10.4	Pass

## 7.2 99% Bandwidth

Test Requirement RSS-Gen Section 6.7  
 Test Method: ANSI C63.10 (2013) Section 6.9.3


### 7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 20.0 C Humidity: 48.0 % RH :

Test mode b: TX\_non-Hop mode\_Keep the EUT in continuously transmitting mode with modulation. All modes have been tested and only the data of worst case is recorded in the report.

### 7.2.2 Test Setup Diagram

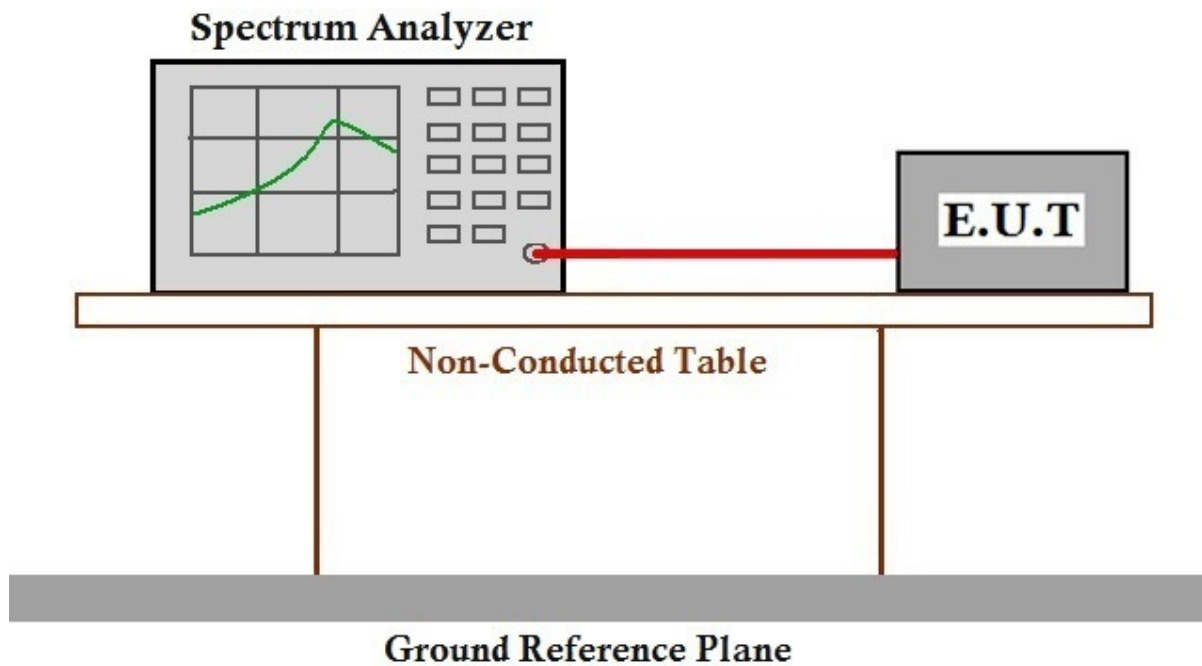

### 7.2.3 Measurement Procedure and Data

The detailed test data see section 9: Appendix

### 7.3 Conducted Peak Output Power

Test Requirement 47 CFR Part 15 Subpart C 15.247:2019(b)(1) & 15.247(b)(3),  
 RSS-247 Section 5.4(b)

Test Method: ANSI C63.10 (2013) Section 7.8.5


#### 7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 20.0 C Humidity: 48.0 % RH :

Test mode a: TX\_Hop mode\_Keep the EUT in frequency hopping mode with modulation. All modes have been tested and only the data of worst case is recorded in the report.

#### 7.3.2 Test Setup Diagram

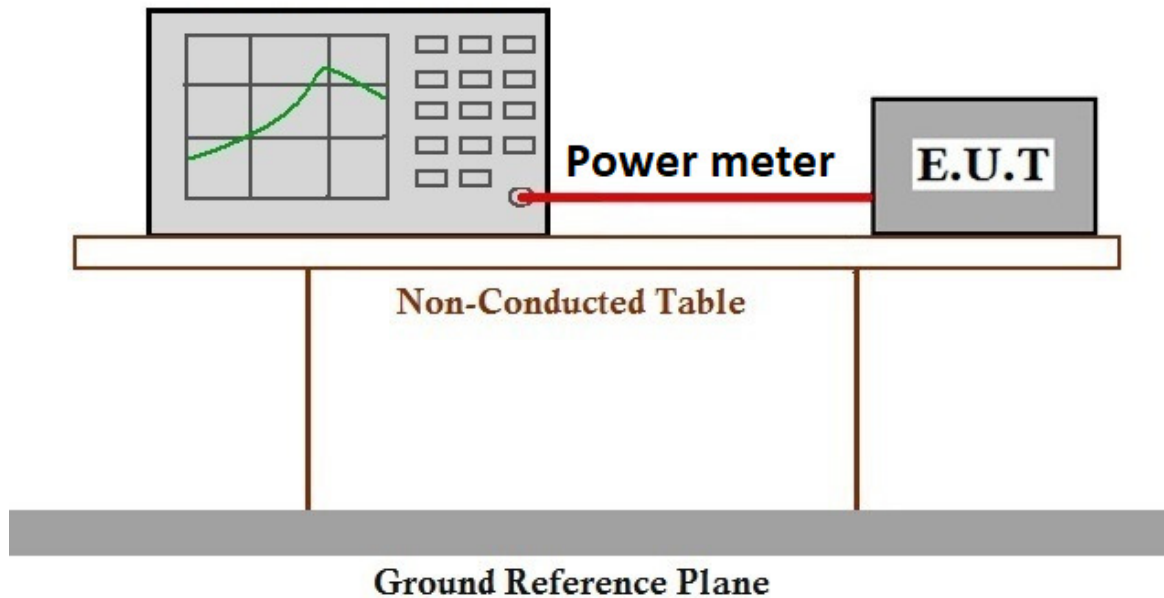

#### 7.3.3 Measurement Procedure and Data

The detailed test data see section 9: Appendix

### 7.4 20dB Bandwidth

Test Requirement 47 CFR Part 15 Subpart C 15.215, RSS-247 Section 5.1(a)  
 Test Method: ANSI C63.10 (2013) Section 6.9.2


#### 7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 20.0 C Humidity: 48.0 % RH :

Test mode b: TX\_non-Hop mode\_Keep the EUT in continuously transmitting mode with modulation. All modes have been tested and only the data of worst case is recorded in the report.

#### 7.4.2 Test Setup Diagram

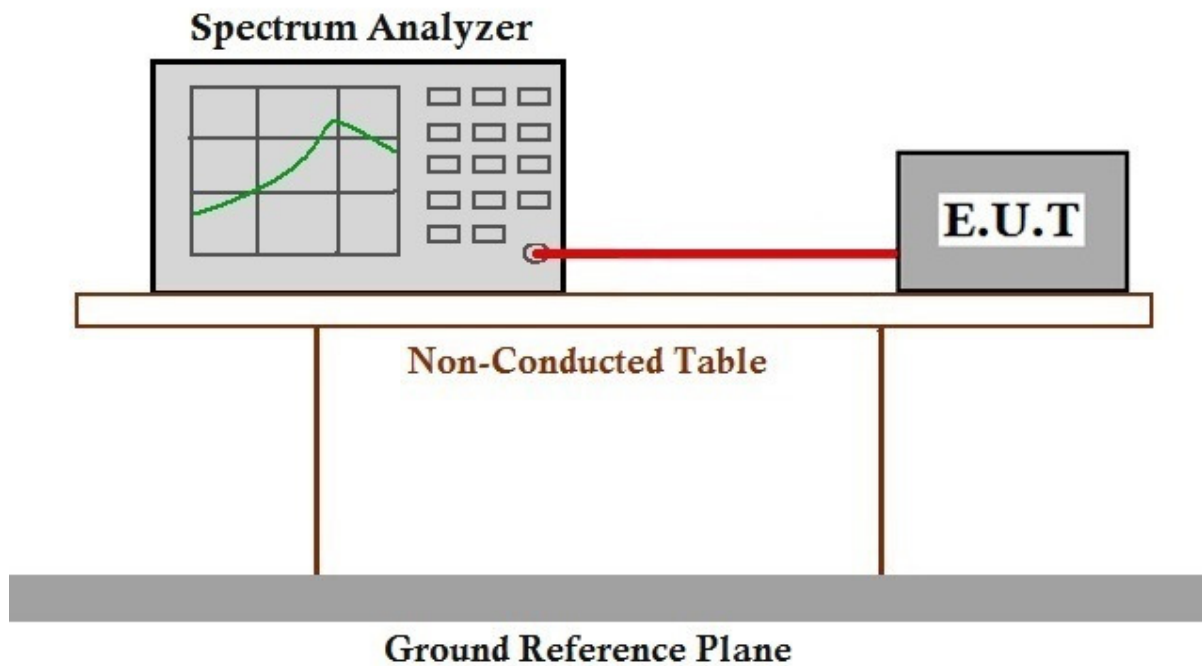

#### 7.4.3 Measurement Procedure and Data

The detailed test data see section 9: Appendix


### 7.5 Carrier Frequencies Separation

Test Requirement 47 CFR Part 15 Subpart C 15.247:2019a(1), RSS-247 Section 5.1(b)  
 Test Method: ANSI C63.10 (2013) Section 7.8.2  
 Limit: 2/3 of the 20dB bandwidth base on the transmission power is less than 0.125W

#### 7.5.1 E.U.T. Operation

Operating Environment:  
 Temperature: 20.0 C Humidity: 48.0 % RH :  
 Test mode a: TX\_Hop mode\_Keep the EUT in frequency hopping mode with modulation. All modes have been tested and only the data of worst case is recorded in the report.

#### 7.5.2 Test Setup Diagram

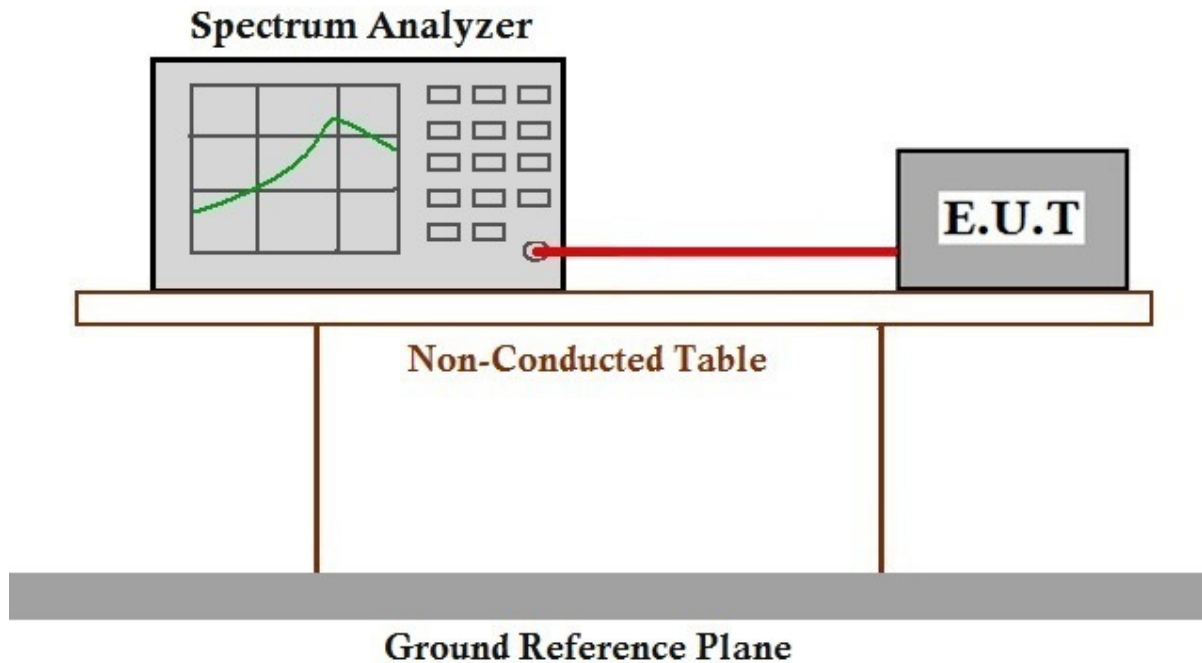

#### 7.5.3 Measurement Procedure and Data

The detailed test data see section 9: Appendix



### 7.6 Hopping Channel Number

Test Requirement 47 CFR Part 15 Subpart C 15.247:2019a(1)(iii), RSS-247 Section 5.1(d)  
Test Method: ANSI C63.10 (2013) Section 7.8.3  
Limit:

Frequency range(MHz)	Number of hopping channels (minimum)
902-928	50 for 20dB bandwidth <250kHz
	25 for 20dB bandwidth ≥250kHz
2400-2483.5	15
5725-5850	75


#### 7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 20.0 C Humidity: 48.0 % RH :

Test mode a: TX\_Hop mode\_Keep the EUT in frequency hopping mode with modulation. All modes have been tested and only the data of worst case is recorded in the report.

#### 7.6.2 Test Setup Diagram

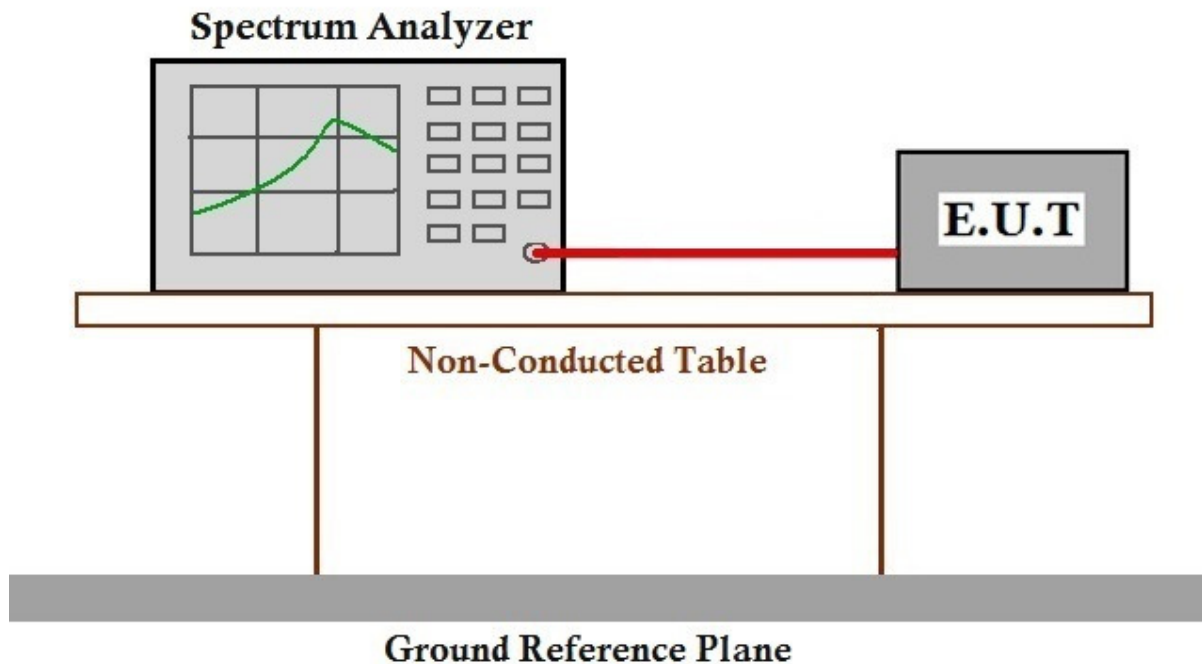

#### 7.6.3 Measurement Procedure and Data

The detailed test data see section 9: Appendix

### 7.7 Dwell Time

Test Requirement 47 CFR Part 15 Subpart C 15.247:2019a(1)(iii), RSS-247 Section 5.1(d)  
 Test Method: ANSI C63.10 (2013) Section 7.8.4  
 Limit:

Frequency(MHz)	Limit
902-928	0.4S within a 20S period(20dB bandwidth<250kHz)
	0.4S within a 10S period(20dB bandwidth≥250kHz)
2400-2483.5	0.4S within a period of 0.4S multiplied by the number of hopping channels
5725-5850	0.4S within a 30S period


#### 7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 20.0 C Humidity: 48.0 % RH :

Test mode a: TX\_Hop mode\_Keep the EUT in frequency hopping mode with modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

#### 7.7.2 Test Setup Diagram

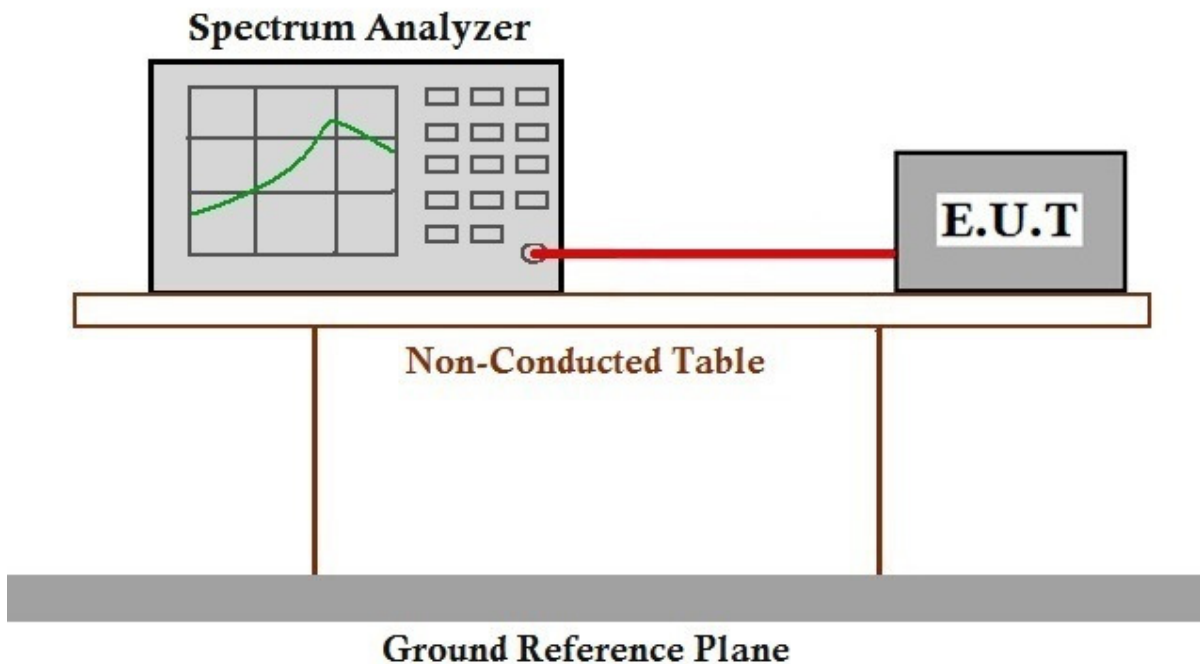

#### 7.7.3 Measurement Procedure and Data

The detailed test data see section 9: Appendix

### 7.8 Conducted Band Edges Measurement

**Test Requirement** 47 CFR Part 15 Subpart C 15.247:2019(d), RSS-247 Section 5.5  
**Test Method:** ANSI C63.10 (2013) Section 7.8.6  
**Limit:** In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c))

FCC Part 15 C Section 15.205 Restricted bands of operation.

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
1.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	
13.36 - 13.41			

RSS-Gen Section 8.10 Restricted bands of operation.

Restricted frequency bands, identified in table 7, are designated primarily for safety-of-life services (distress calling and certain aeronautical activities), certain satellite downlinks, radio astronomy and some government uses. Except where otherwise indicated, the following conditions related to the restricted frequency bands apply:

(a) The transmit frequency, including fundamental components of modulation, of licence-exempt radio

apparatus shall not fall within the restricted frequency bands listed in table 7 except for apparatus compliant with RSS-287, *Emergency Position Indicating Radio Beacons (EPIRB)*, *Emergency Locator Transmitters (ELT)*, *Personal Locator Beacons (PLB)*, and *Maritime Survivor Locator Devices (MSLD)*.  
 (b) Unwanted emissions that fall into restricted frequency bands listed in table 7 shall comply with the limits specified in table 5 and table 6.  
 (c) Unwanted emissions that do not fall within the restricted frequency bands listed in table 7 shall comply either with the limits specified in the applicable RSS or with those specified in table 5 and table 6.

<b>Table 7 – Restricted frequency bands* MHz</b>	<b>MHz</b>	<b>GHz</b>
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	* Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 - 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138	--	


**7.8.1 E.U.T. Operation**

Operating Environment:

Temperature: 20.0 C Humidity: 48.0 % RH :

Test mode a: TX\_Hop mode\_Keep the EUT in frequency hopping mode with modulation. All modes have been tested and only the data of worst case is recorded in the report.  
 b: TX\_non-Hop mode\_Keep the EUT in continuously transmitting mode with modulation. All modes have been tested and only the data of worst case is recorded in the report.

**7.8.2 Test Setup Diagram**

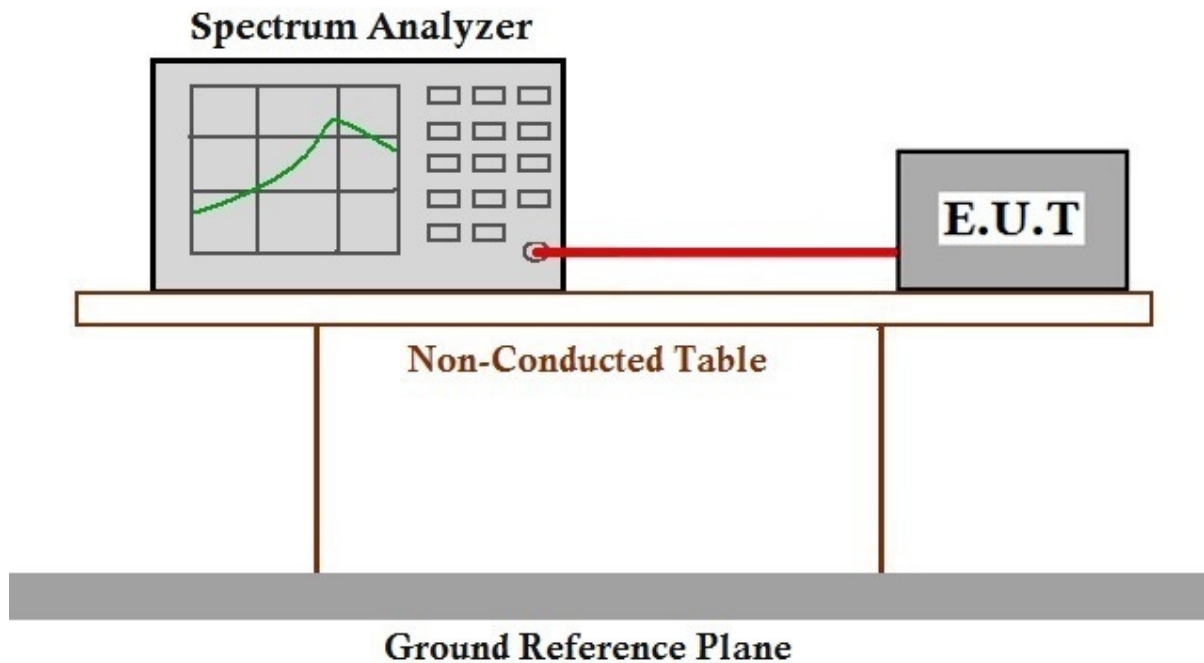

**7.8.3 Measurement Procedure and Data**

The detailed test data see section 9: Appendix


## 7.9 Conducted Spurious Emissions

Test Requirement	47 CFR Part 15 Subpart C 15.247:2019(d), RSS-247 Section 5.5
Test Method:	ANSI C63.10 (2013) Section 7.8.8
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

### 7.9.1 E.U.T. Operation

Operating Environment:	
Temperature:	20.0 C Humidity: 48.0 % RH :
Test mode	a: TX_Hop mode_Keep the EUT in frequency hopping mode with modulation. All modes have been tested and only the data of worst case is recorded in the report. b: TX_non-Hop mode_Keep the EUT in continuously transmitting mode with modulation. All modes have been tested and only the data of worst case is recorded in the report.

### 7.9.2 Test Setup Diagram

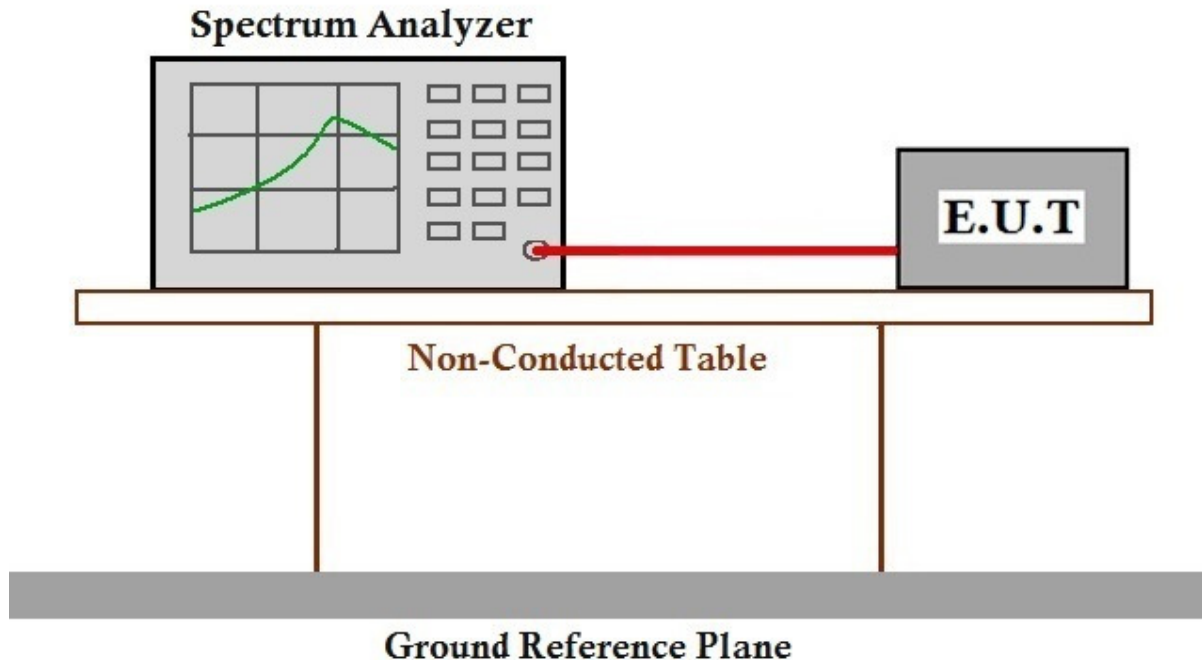

### 7.9.3 Measurement Procedure and Data

The detailed test data see section 9: Appendix

### 7.10 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15 Subpart C 15.209 & 15.247(d), Section 3.3 & RSS-Gen Section 8.10  
Test Method: ANSI C63.10 (2013) Section 6.10.5  
Limit:

**Table 5 – General field strength limits at frequencies above 30 MHz**

Frequency (MHz)	Field strength ( $\mu\text{V/m}$ at 3 m)
30 – 88	100
88 – 216	150
216 – 960	200
Above 960	500

**Table 6 – General field strength limits at frequencies below 30 MHz**

Frequency	Magnetic field strength (H-Field) ( $\mu\text{A/m}$ )	Measurement distance (m)
9 - 490 kHz 1	$6.37/F$ (F in kHz)	300
490 - 1705 kHz	$63.7/F$ (F in kHz)	30
1.705 - 30 MHz	0.08	30

**Note 1:** The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.


#### 7.10.1 E.U.T. Operation

Operating Environment:

Temperature: 20.0 C Humidity: 48.0 % RH :

Test mode b: TX\_non-Hop mode\_Keep the EUT in continuously transmitting mode with modulation. All modes have been tested and only the data of worst case is recorded in the report.

#### 7.10.2 Test Setup Diagram

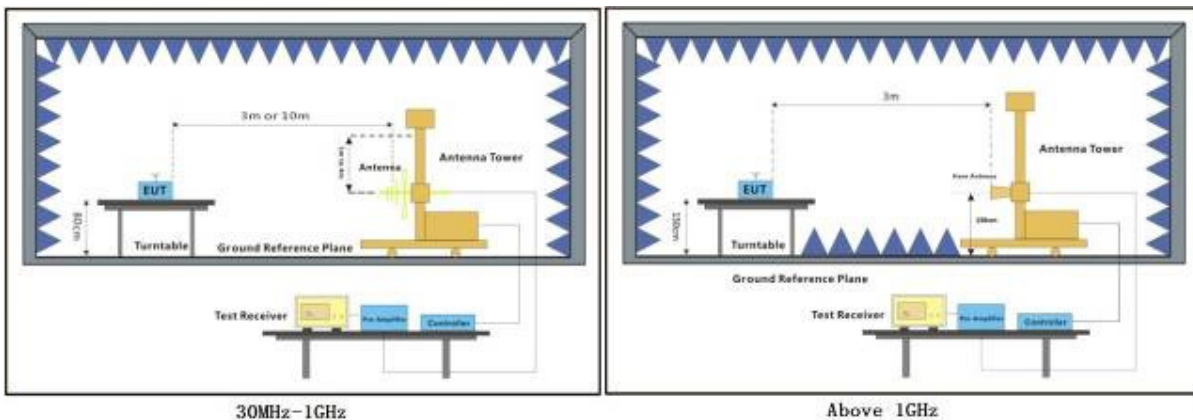

### 7.10.3 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

Frequency (MHz)	Antenna Polarization	Emission Level (dB $\mu$ V/m)		Limit (dB $\mu$ V/m)		Result
		Peak	Average	Peak	Average	
2390.000	H	53.9	36.7	74.0	54.0	Pass
2483.500	H	68.6	48.7	74.0	54.0	Pass
2390.000	V	52.0	36.4	74.0	54.0	Pass
2483.500	V	69.5	52.1	74.0	54.0	Pass



### 7.11 Radiated Spurious Emissions

Test Requirement 47 CFR Part 15 Subpart C 15.205 & 15.209, Section 3.3  
 & RSS-Gen Section 8.9  
 Test Method: ANSI C63.10 (2013) Section 6.4&6.5&6.6  
 Limit:

**Table 5 – General field strength limits at frequencies above 30 MHz**

Frequency (MHz)	Field strength ( $\mu\text{V/m}$ at 3 m)
30 – 88	100
88 – 216	150
216 – 960	200
Above 960	500

**Table 6 – General field strength limits at frequencies below 30 MHz**

Frequency	Magnetic field strength (H-Field) ( $\mu\text{A/m}$ )	Measurement distance (m)
9 - 490 kHz 1	$6.37/F$ (F in kHz)	300
490 - 1705 kHz	$63.7/F$ (F in kHz)	30
1.705 - 30 MHz	0.08	30

**Note 1:** The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.


### 7.11.1 E.U.T. Operation

Operating Environment:

Temperature: 22.2 C Humidity: 48.6 % RH :


Test mode b: TX\_non-Hop mode\_Keep the EUT in continuously transmitting mode with modulation. All modes have been tested and only the data of worst case is recorded in the report.

### 7.11.2 Test Setup Diagram

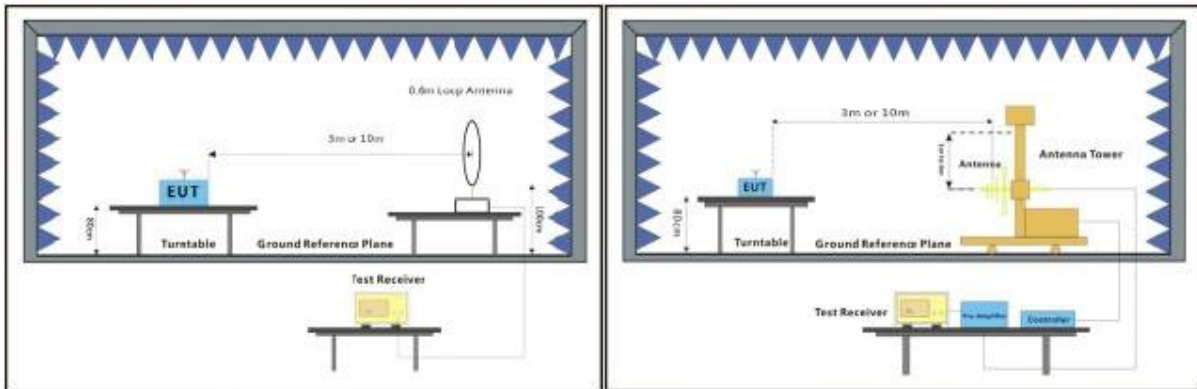

Below 30MHz

30MHz-1GHz

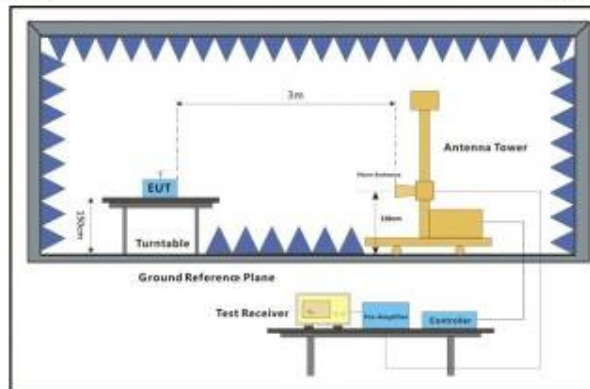

Above 1GHz

### 7.11.3 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

#### Remark:

- 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
  - 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
  - 3) Scan from 9kHz to 25GHz, the disturbance above 18GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
  - 4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.
-

**Radiated emission below 1GHz**


Adaptor Model: BQ05A-0501000-U

Model: VM482ANXLPU

Mode: b


Polarization: Horizontal

Quasi-peak measurement:

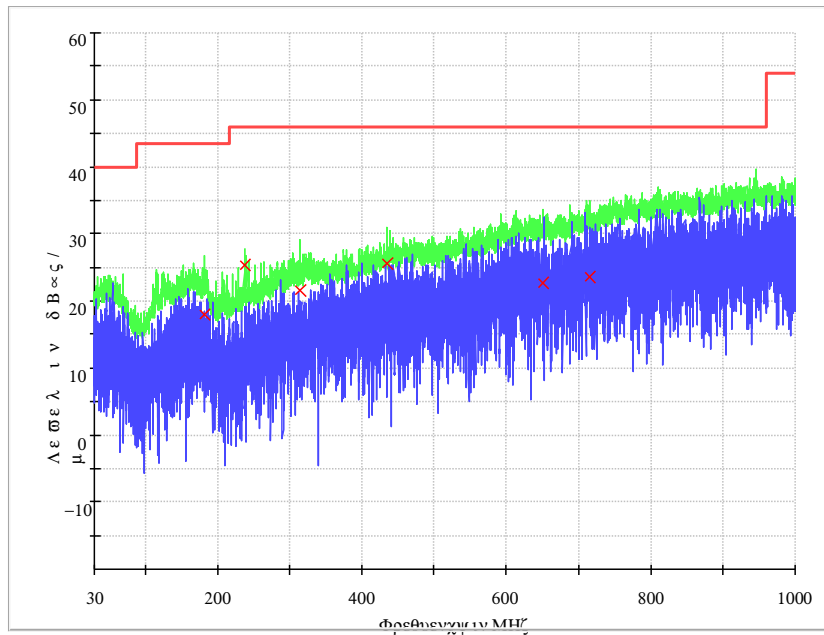


Frequency (MHz)	QuasiPeak (dBµV/m)	Pol.	Corr. (dB/m)	Margin (dB)	Limit (dBµV/m)	Result
182.359286	18.0	H	12.5	25.5	43.5	Pass
236.817857	25.3	H	12.1	20.7	46.0	Pass
314.625714	21.7	H	15.2	24.3	46.0	Pass
435.737143	25.6	H	18.4	20.4	46.0	Pass
651.007857	22.7	H	22.5	23.3	46.0	Pass
715.928571	23.6	H	23.4	22.4	46.0	Pass

Mode: b;  
 Polarization: Vertical  
 Quasi-peak measurement:

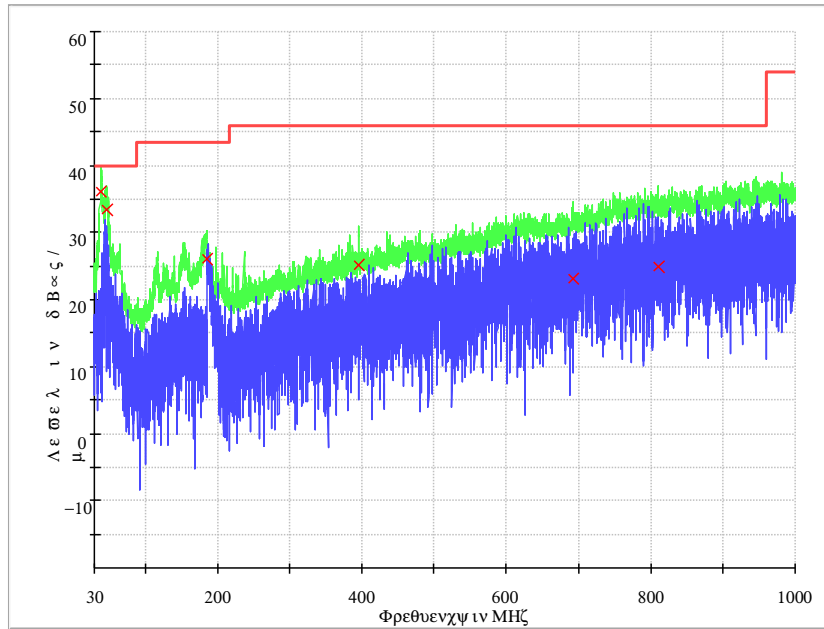


Frequency (MHz)	QuasiPeak (dBμV/m)	Pol.	Corr. (dB/m)	Margin (dB)	Limit (dBμV/m)	Result
38.660714	36.1	V	13.4	3.9	40.0	Pass
46.628571	33.4	V	14.2	6.6	40.0	Pass
185.130714	26.0	V	12.1	17.5	43.5	Pass
396.036429	25.1	V	17.4	20.9	46.0	Pass
691.886429	23.2	V	23.1	22.8	46.0	Pass
811.265714	25.0	V	25.0	21.0	46.0	Pass

Model: VM483PU  
 Mode: b  
 Polarization: Horizontal  
 Quasi-peak measurement:

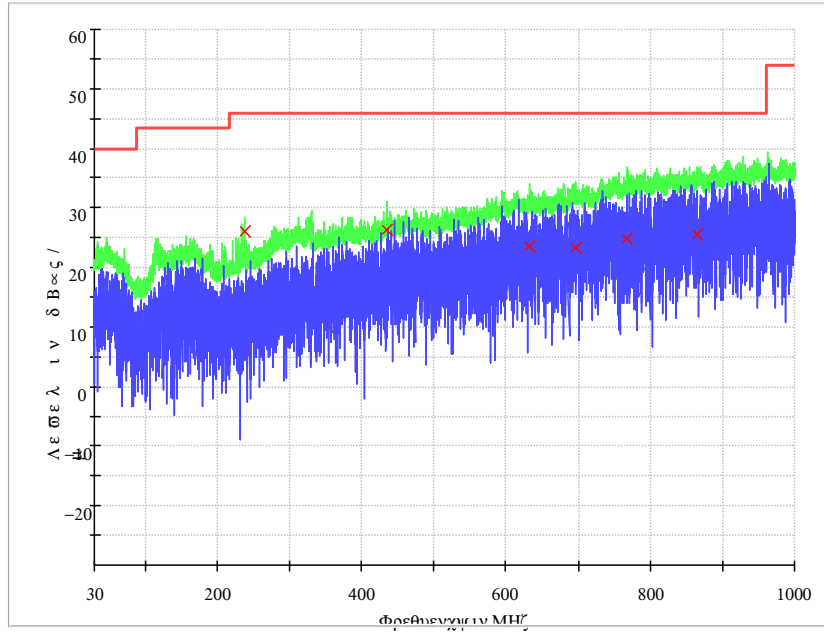

Frequency (MHz)	QuasiPeak (dBμV/m)	Pol.	Corr. (dB/m)	Margin (dB)	Limit (dBμV/m)	Result
236.817857	26.0	H	12.1	20.0	46.0	Pass
435.667857	26.4	H	18.4	19.6	46.0	Pass
631.677143	23.6	H	22.4	22.4	46.0	Pass
697.082857	23.4	H	23.3	22.6	46.0	Pass
768.239286	24.7	H	24.8	21.3	46.0	Pass
864.823571	25.5	H	25.4	20.5	46.0	Pass

Mode: b;  
 Polarization: Vertical  
 Quasi-peak measurement:

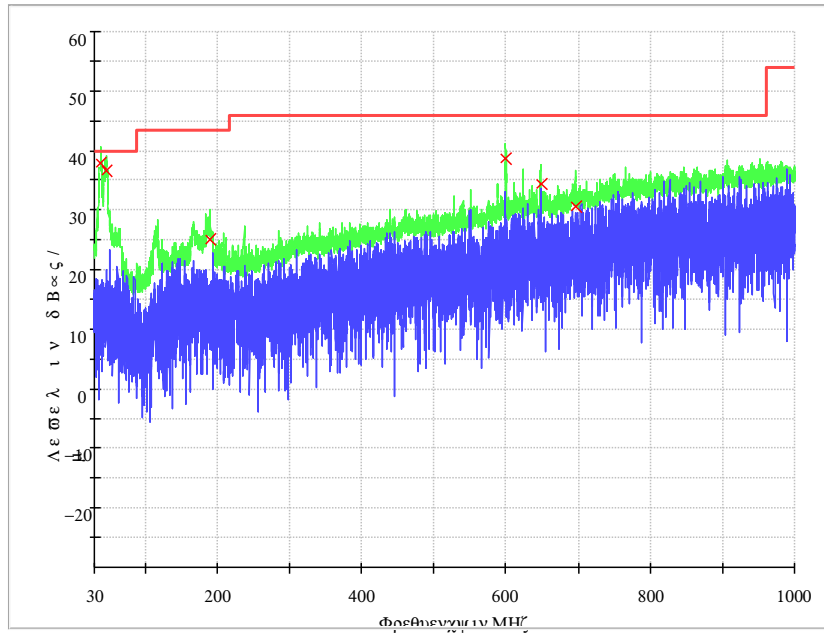

Frequency (MHz)	QuasiPeak (dBμV/m)	Pol.	Corr. (dB/m)	Margin (dB)	Limit (dBμV/m)	Result
38.037143	37.8	V	13.3	2.2	40.0	Pass
46.005000	36.6	V	14.1	3.4	40.0	Pass
190.188571	25.0	V	11.3	18.5	43.5	Pass
600.013571	38.6	V	22.1	7.4	46.0	Pass
648.167143	34.4	V	22.6	11.6	46.0	Pass
695.905000	30.6	V	23.3	15.4	46.0	Pass


Adaptor Model: AT-538A-050100A

Model: VM482ANXLPU

Mode: b

Polarization: Horizontal


Quasi-peak measurement:

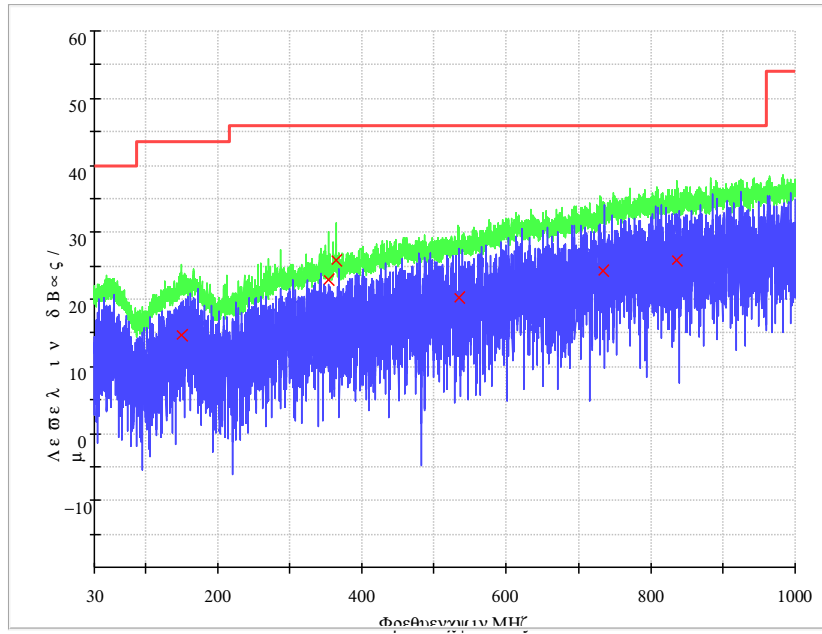

Frequency (MHz)	QuasiPeak (dBµV/m)	Pol.	Corr. (dB/m)	Margin (dB)	Limit (dBµV/m)	Result
151.319286	14.6	H	14.2	28.9	43.5	Pass
353.217857	23.0	H	16.1	23.0	46.0	Pass
364.857857	25.8	H	16.5	20.2	46.0	Pass
535.370000	20.3	H	20.3	25.7	46.0	Pass
734.566429	24.2	H	24.1	21.8	46.0	Pass
835.030714	25.8	H	25.4	20.2	46.0	Pass




Mode: b;  
 Polarization: Vertical  
 Quasi-peak measurement:

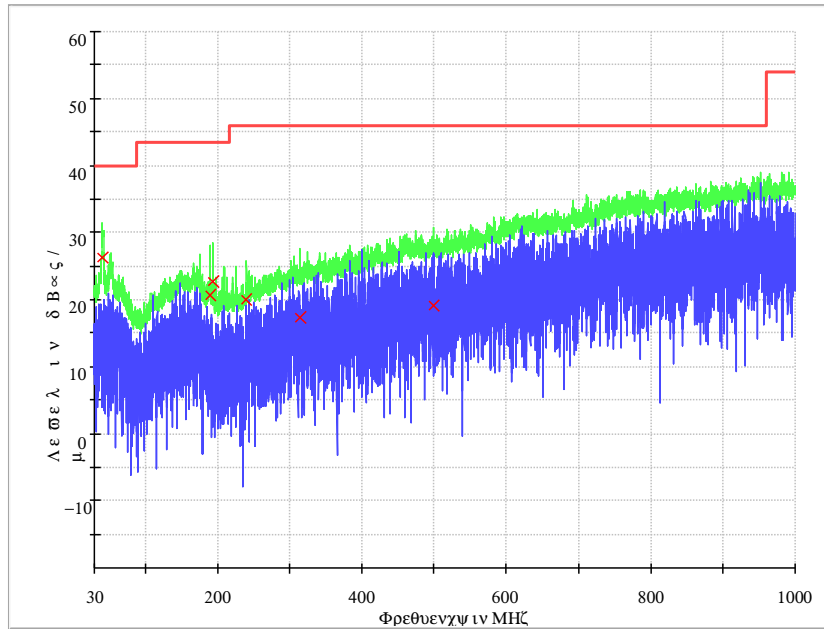


Frequency (MHz)	QuasiPeak (dBμV/m)	Pol.	Corr. (dB/m)	Margin (dB)	Limit (dBμV/m)	Result
40.808571	26.4	V	13.6	13.6	40.0	Pass
190.188571	20.8	V	11.3	22.7	43.5	Pass
194.137857	22.7	V	10.9	20.8	43.5	Pass
240.767143	20.0	V	12.5	26.0	46.0	Pass
314.279286	17.3	V	15.2	28.7	46.0	Pass
498.856429	19.1	V	19.4	26.9	46.0	Pass

Model: VM483PU  
 Mode: b  
 Polarization: Horizontal  
 Quasi-peak measurement:

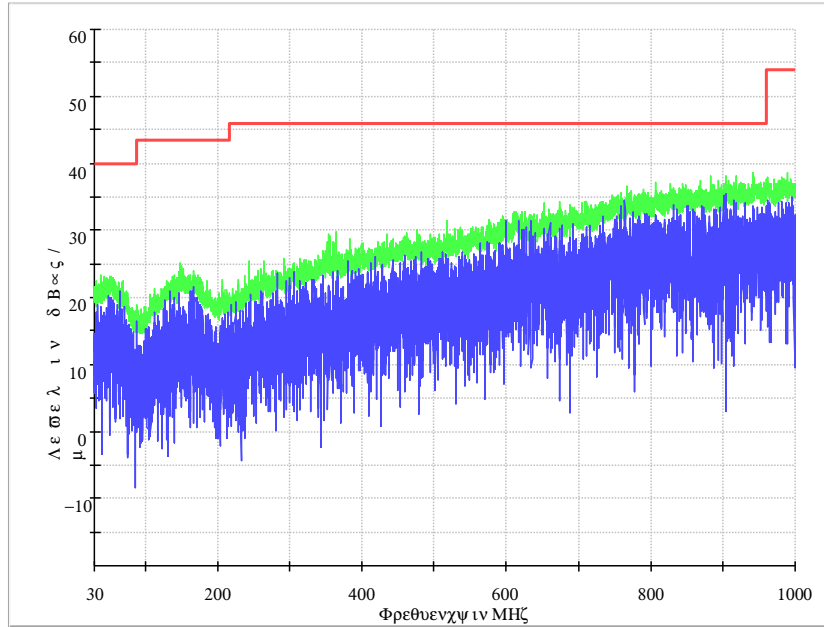

Frequency (MHz)	QuasiPeak (dBμV/m)	Pol.	Corr. (dB/m)	Margin (dB)	Limit (dBμV/m)	Result
147.647143	14.5	H	14.0	29.0	43.5	Pass
353.287143	17.7	H	16.1	28.3	46.0	Pass
518.325714	19.9	H	20.0	26.1	46.0	Pass
625.926429	23.8	H	22.5	22.2	46.0	Pass
806.762143	25.1	H	25.0	20.9	46.0	Pass
918.104286	26.5	H	26.2	19.5	46.0	Pass

Mode: b;  
Polarization: Vertical  
Quasi-peak measurement:

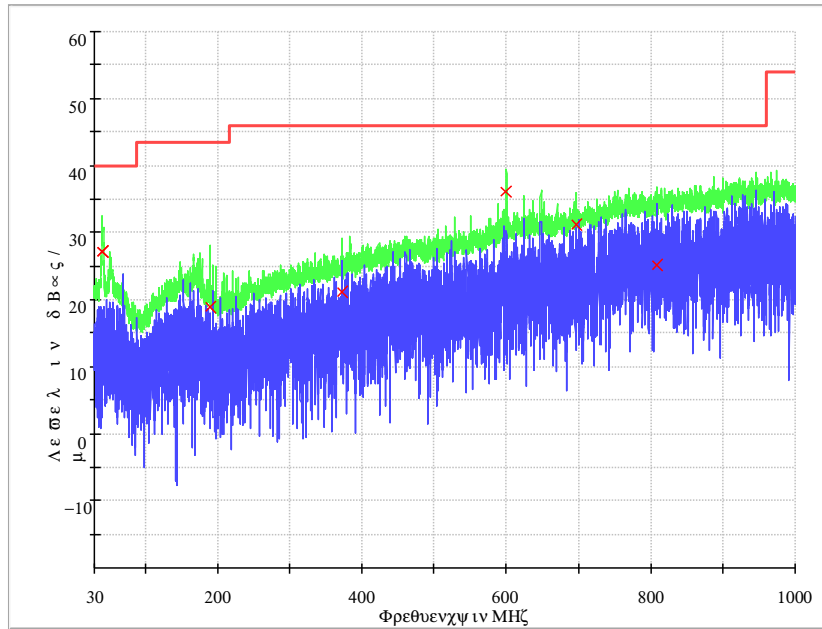

Frequency (MHz)	QuasiPeak (dBμV/m)	Pol.	Corr. (dB/m)	Margin (dB)	Limit (dBμV/m)	Result
40.808571	26.9	V	13.6	13.1	40.0	Pass
348.021429	23.6	V	16.0	22.4	46.0	Pass
371.994286	28.3	V	16.7	17.7	46.0	Pass
528.095000	31.1	V	20.3	14.9	46.0	Pass
600.082857	36.2	V	22.1	9.8	46.0	Pass
648.028571	37.4	V	22.6	8.6	46.0	Pass

**Above 1GHz**

Channel: Low

Frequency (MHz)	Antenna Polarization	Emission Level (dB $\mu$ V/m)		Limit (dB $\mu$ V/m)		Result
		Peak	Average	Peak	Average	
2785.000	H	47.7	/	74	54	Pass
4808.607	V	64.3	50.8	74	54	Pass
4809.214	H	72.1	53.0	74	54	Pass
7977.893	H	55.6	41.7	74	54	Pass
9622.036	H	57.1	43.5	74	54	Pass
10900.679	V	59.0	45.0	74	54	Pass

Channel: Middle

Frequency (MHz)	Antenna Polarization	Emission Level (dB $\mu$ V/m)		Limit (dB $\mu$ V/m)		Result
		Peak	Average	Peak	Average	
2734.000	H	55.0	41.1	74.0	54.0	Pass
4876.000	V	61.1	47.5	74.0	54.0	Pass
4876.607	H	72.0	52.5	74.0	54.0	Pass
7944.500	V	55.4	41.3	74.0	54.0	Pass
7960.286	H	55.3	41.5	74.0	54.0	Pass
9755.607	H	57.8	42.2	74.0	54.0	Pass

Channel: High

Frequency (MHz)	Antenna Polarization	Emission Level (dB $\mu$ V/m)		Limit (dB $\mu$ V/m)		Result
		Peak	Average	Peak	Average	
2964.107	H	43.7	/	74	54	Pass
4948.250	V	63.9	49.6	74	54	Pass
4949.464	H	70.7	52.4	74	54	Pass
7960.893	H	55.6	41.5	74	54	Pass
10360.929	V	57.0	43.4	74	54	Pass
10520.000	H	58.0	44.3	74	54	Pass



## 8 Photographs

Remark: Photos refer to Appendix: External Photo, Internal Photo and setup Photo.

## 9 Appendix


### 9.1 Peak conducted output power

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2405.000	12.3	21.0	PASS
2439.000	13.3	21.0	PASS
2475.000	12.8	21.0	PASS

Remark: Antenna gain: 0dBi


Remark: Cable loss 0.8dB was considered and set in system configuration.

Peak Power

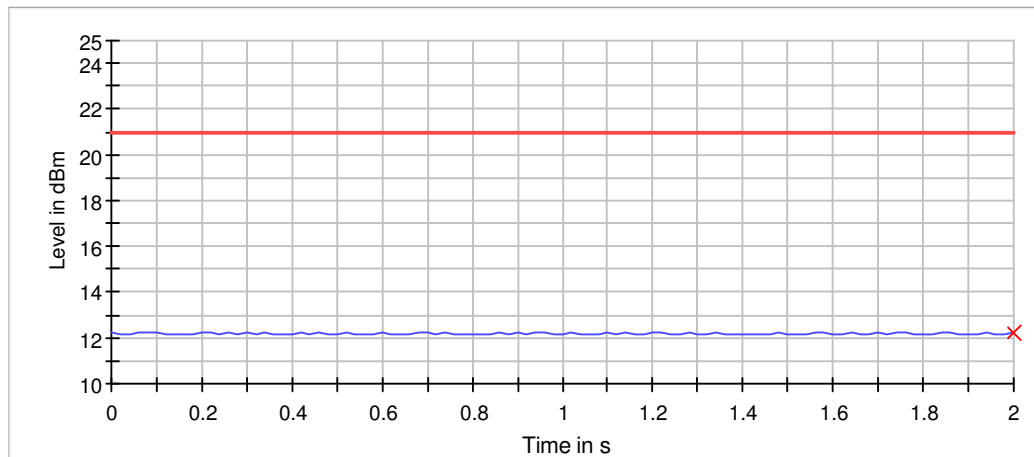


Connector 1    X    Peak Connector 1    Limit

Peak Power

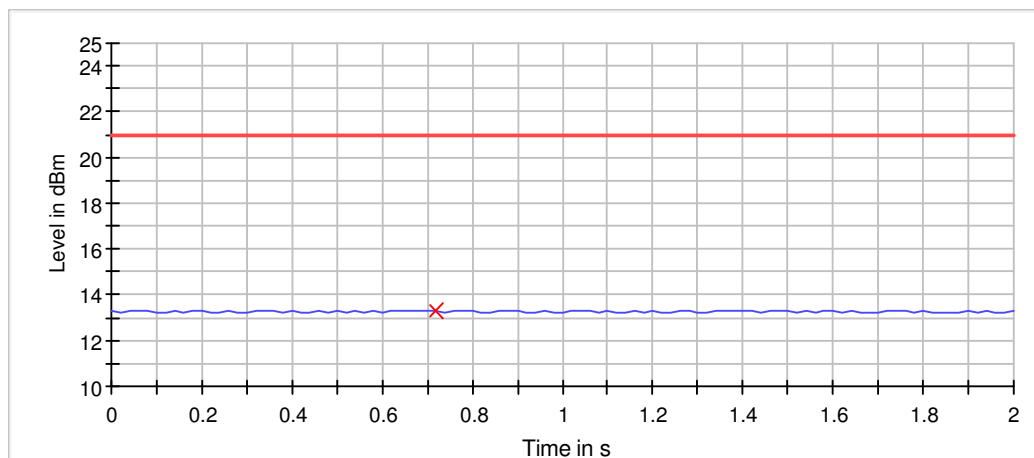

Connector 1    X    Peak Connector 1    Limit

Peak Power

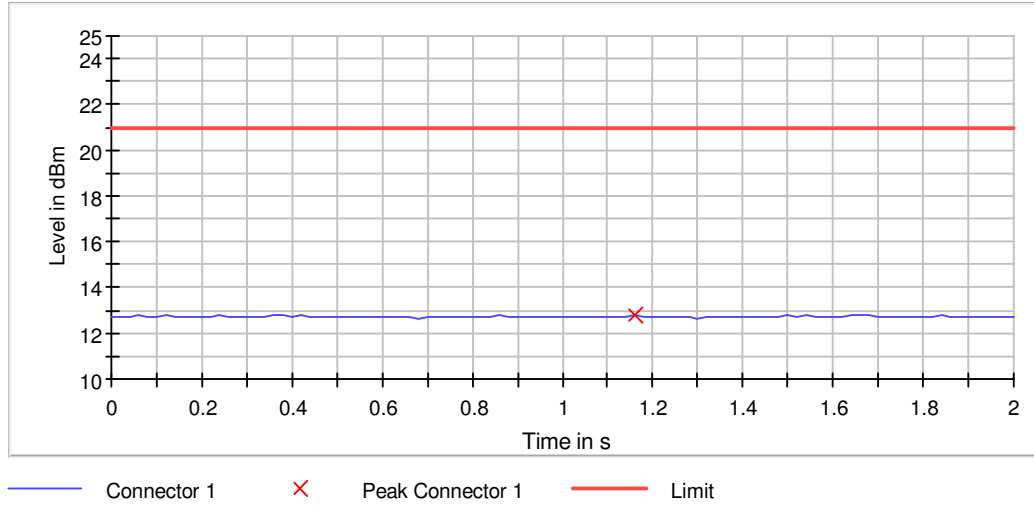

### Measurement Setting


Setting	Instrument Value	Target Value
Span	Zero span	Zero span
RBW	3.0 MHz	>= 3.0 MHz
VBW	10.0 MHz	>= 10.0 MHz
Detector	MaxPeak	MaxPeak

Remark: Cable loss 0.8dB was considered and set in system configuration.


### 9.2 Emission Bandwidth 20 dB

DUT Frequency (MHz)	Bandwidth (MHz)	Limit (MHz)	Result
2405.000	2.34	---	PASS
2439.000	2.22	---	PASS
2475.000	2.35	---	PASS

20 dB Bandwidth

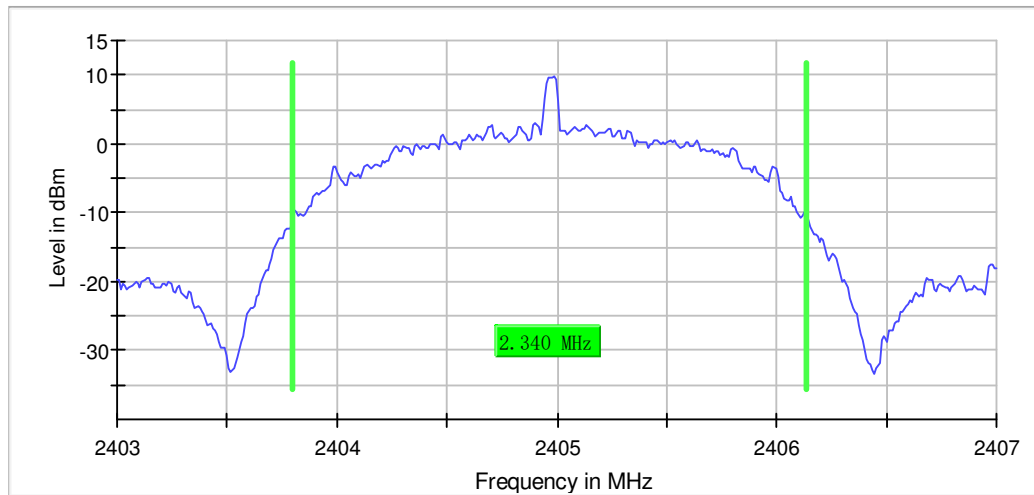


20 dB Bandwidth

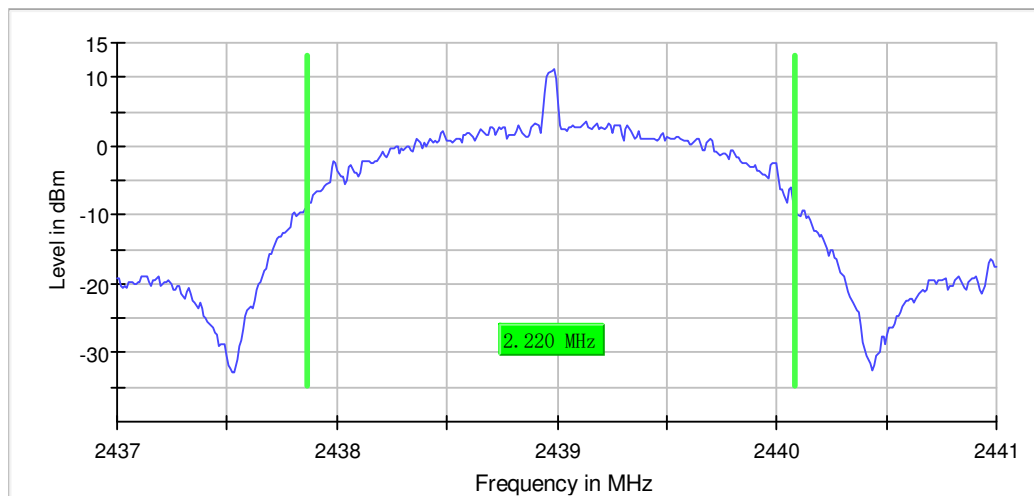



20 dB Bandwidth

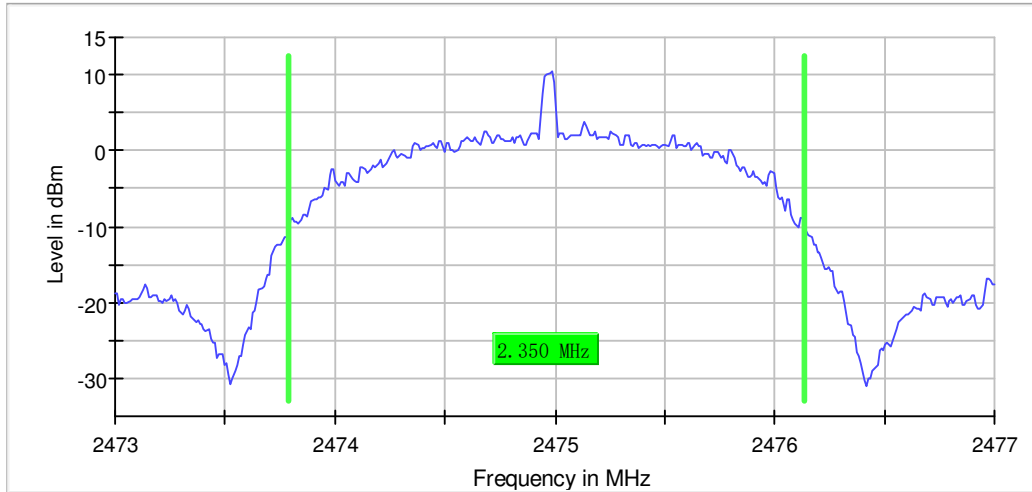

### Measurement Setting


Setting	Instrument Value	Target Value
Span	4.000 MHz	4.000 MHz
RBW	30.000 kHz	>= 30.000 kHz
VBW	100.000 kHz	>= 100.000 kHz
Detector	MaxPeak	MaxPeak

Remark: Cable loss 0.8dB was considered and set in system configuration.


### 9.3 Occupied Channel Bandwidth 99%

DUT Frequency (MHz)	Bandwidth (MHz)	Limit (MHz)	Result
2405.000	2.28	---	PASS
2439.000	2.27	---	PASS
2475.000	2.31	---	PASS


99 % Bandwidth

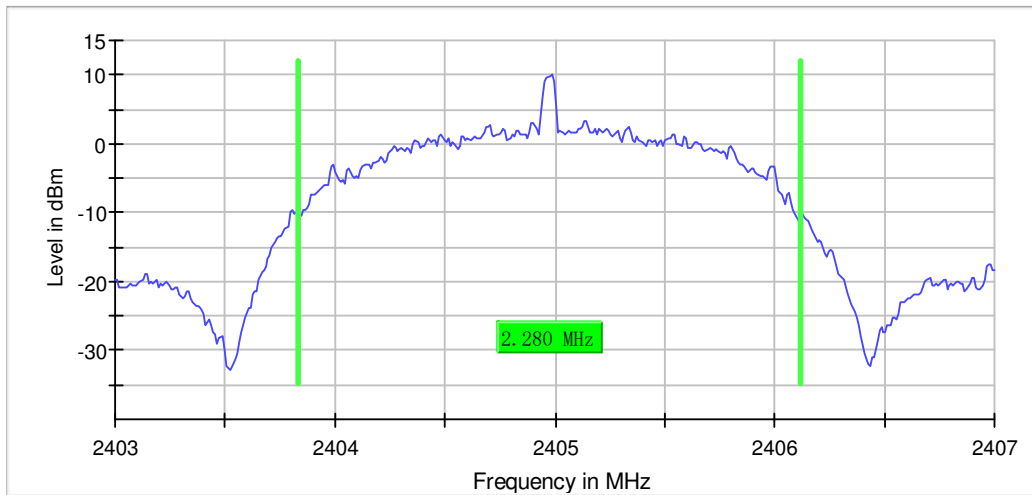

99 % Bandwidth

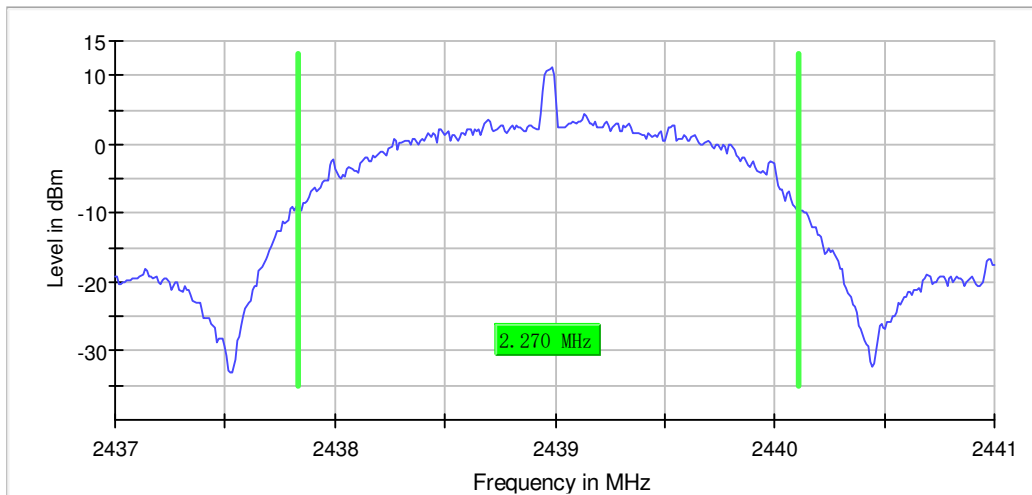

99 % Bandwidth

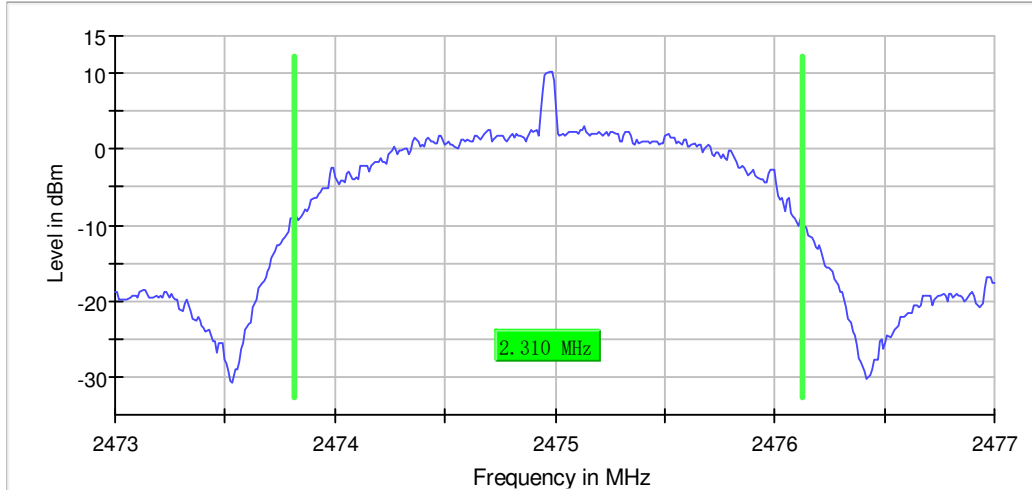

### Measurement Setting


Setting	Instrument Value	Target Value
Span	4.000 MHz	4.000 MHz
RBW	30.000 kHz	>= 30.000 kHz
VBW	100.000 kHz	>= 100.000 kHz
Detector	MaxPeak	MaxPeak

Remark: Cable loss 0.8dB was considered and set in system configuration.

### 9.4 Carrier Frequency Separation

DUT Frequency (MHz)	Frequency Separation (MHz)	Limit (MHz)	Result
2405	1.96	>1.57	PASS

Remark: Limit = 2/3\* 20dB Bandwidth  
 The channel shown is the worst case:

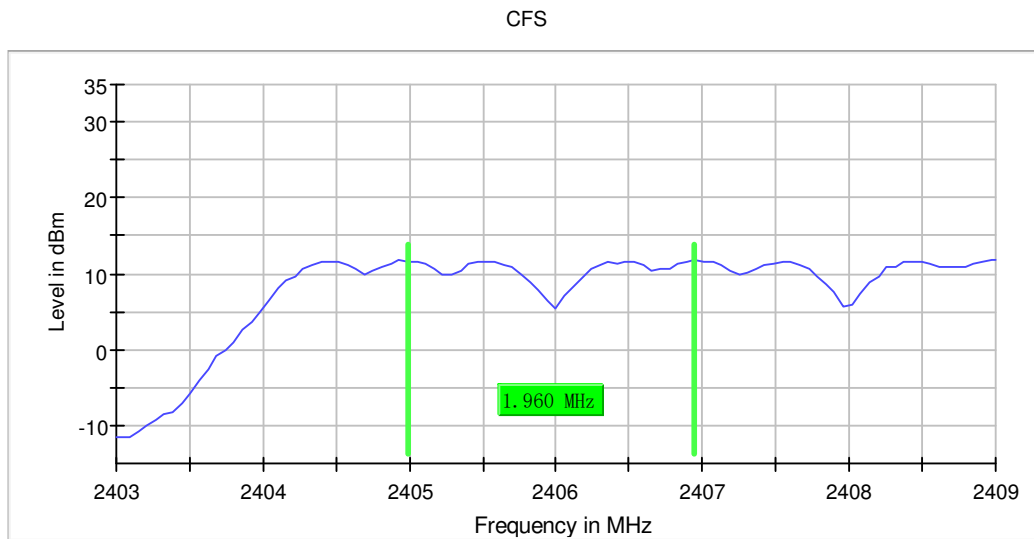

Remark: Cable loss 0.8dB was considered and set in system configuration.

### Measurement Setting


Setting	Instrument Value	Target Value
Span	6.000 MHz	6.000 MHz
RBW	500.000 kHz	<= 600.000 kHz
VBW	500.000 kHz	>= 500.000 kHz
Detector	MaxPeak	MaxPeak

### 9.5 Dwell Time

Channel (MHz)	Width of Burst (ms)	Number of Burst(s)	Active Channels	Measurement Time (s)	Dwell Time (ms)	Limit (ms)	Result
2405	0.88	77	32	12.8	67.76	≤400	Pass

\*Remark: the channel shown is the worst case.

Time of Channel Occupancy

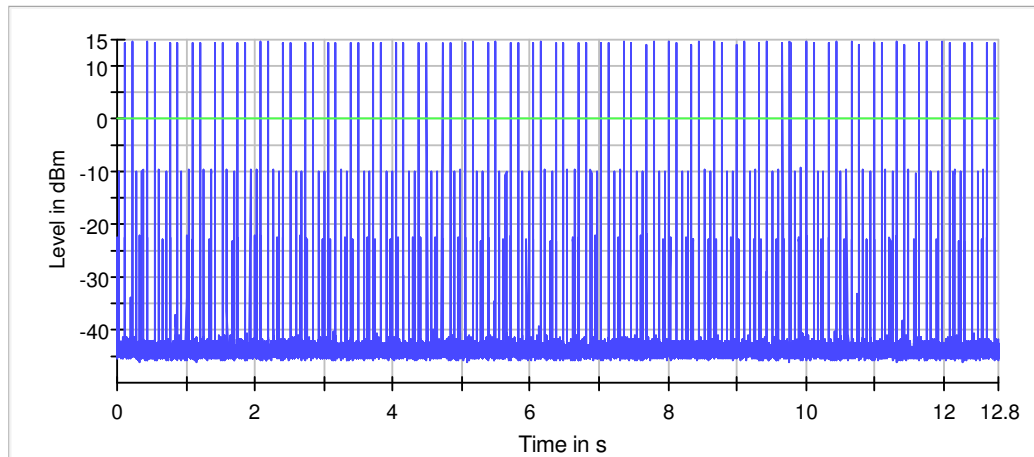

— Trace      — Threshold


### Measurement Setting

Setting	Instrument Value	Target Value
Span	ZeroSpan	ZeroSpan
RBW	1.000 MHz	~ 1.000 MHz
VBW	3.000 MHz	~ 3.000 MHz
Detector	MaxPeak	MaxPeak

Remark: Cable loss 0.8dB was considered and set in system configuration.

### 9.6 Hopping Frequencies

Channels	Limit Min	Result
32	15	PASS

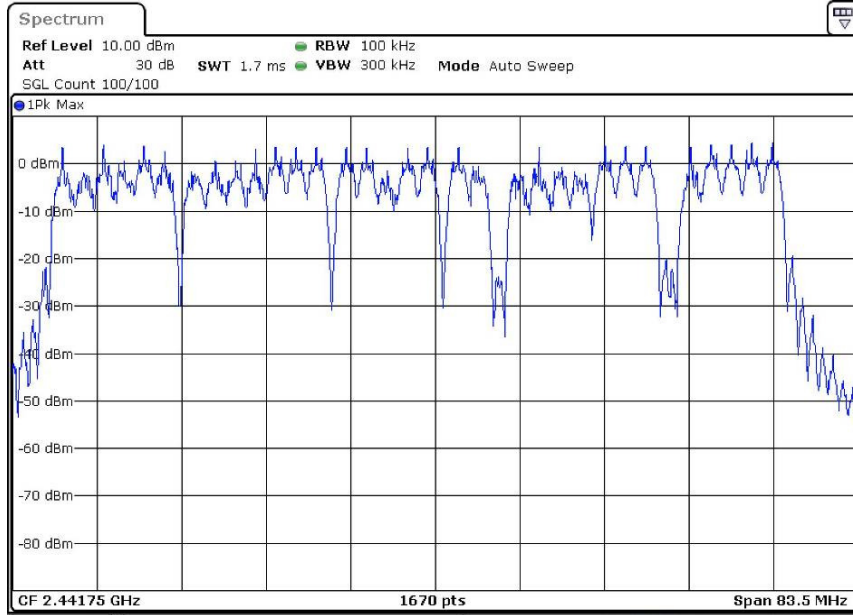

## 9.7 Conducted Band Edge Measurement

Non-hopping mode

### Inband Peak


Frequency (MHz)	Level (dBm)
2405.025000	13.2
2475.025000	13.7

### Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2399.975000	-28.2	21.4	-6.8	PASS
2483.875000	-42.2	35.9	-6.3	PASS


Remark: Limit = Inband peak – 20dB

Band Edge

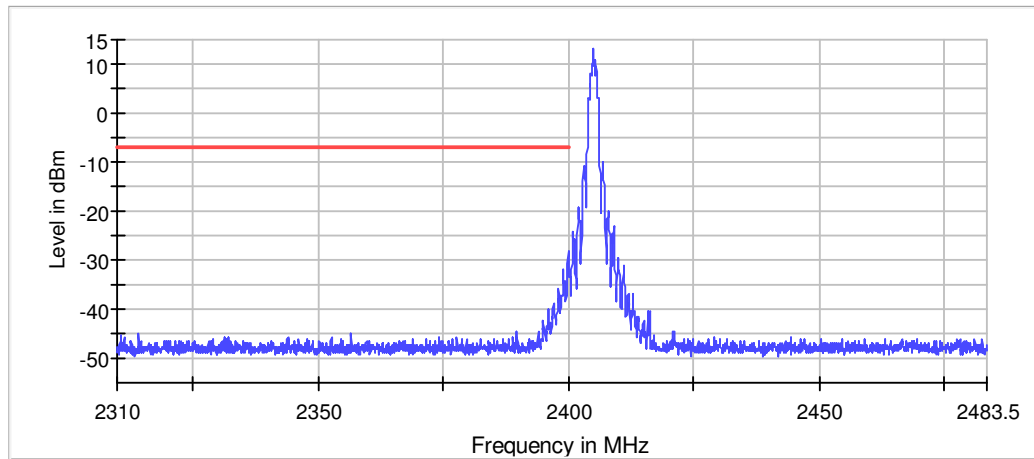

— Limit — Sum Level × Fail

Band Edge

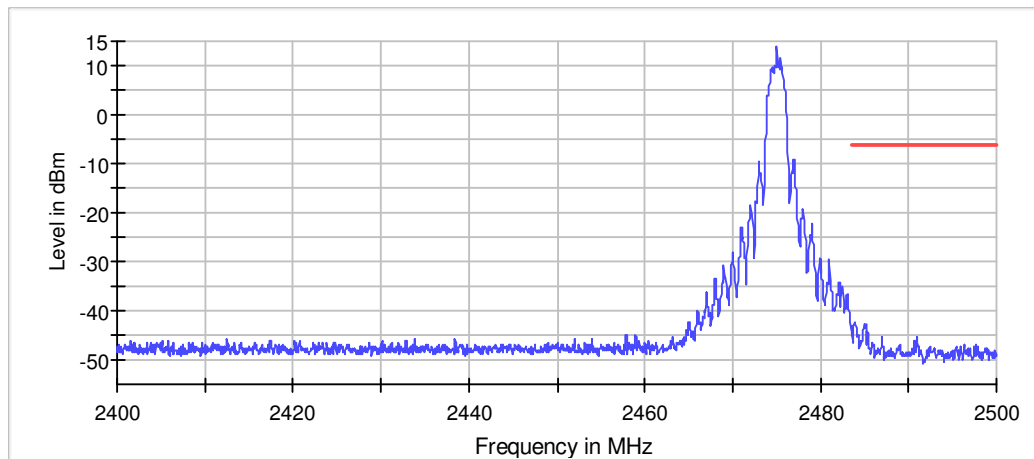

— Limit — Sum Level × Fail



### Measurement Setting

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
Detector	MaxPeak	MaxPeak

Remark: Cable loss 0.8dB was considered and set in system configuration.



Hopping mode

**Inband Peak**


Frequency (MHz)	Level (dBm)
2472.925000	15.0
2472.975000	15.1

**Measurements**

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2399.975000	-32.7	27.8	-5.0	PASS
2485.325000	-46.1	41.1	-4.9	PASS


Remark: Limit = Inband peak – 20dB

Band Edge

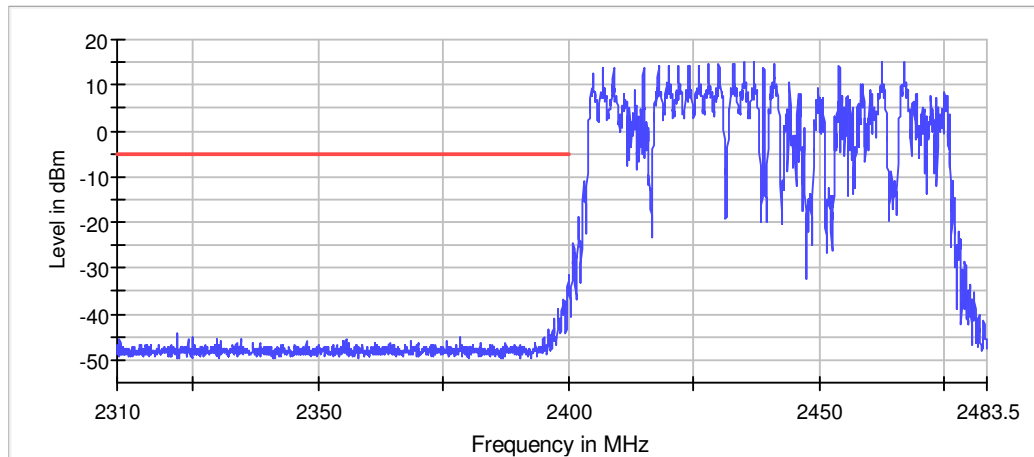

— Limit    — Sum Level    × Fail

Band Edge

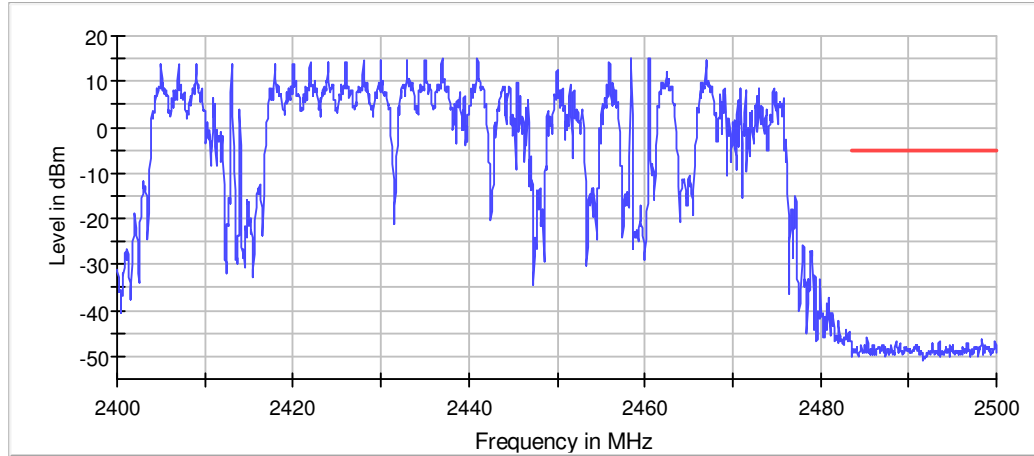

— Limit    — Sum Level    × Fail


### Measurement Setting

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
RBW	100.000 kHz	≤ 100.000 kHz
VBW	300.000 kHz	≥ 300.000 kHz
Detector	MaxPeak	MaxPeak


Remark: Cable loss 0.8dB was considered and set in system configuration.

## 9.8 Conducted spurious emission


### Lowest Channel

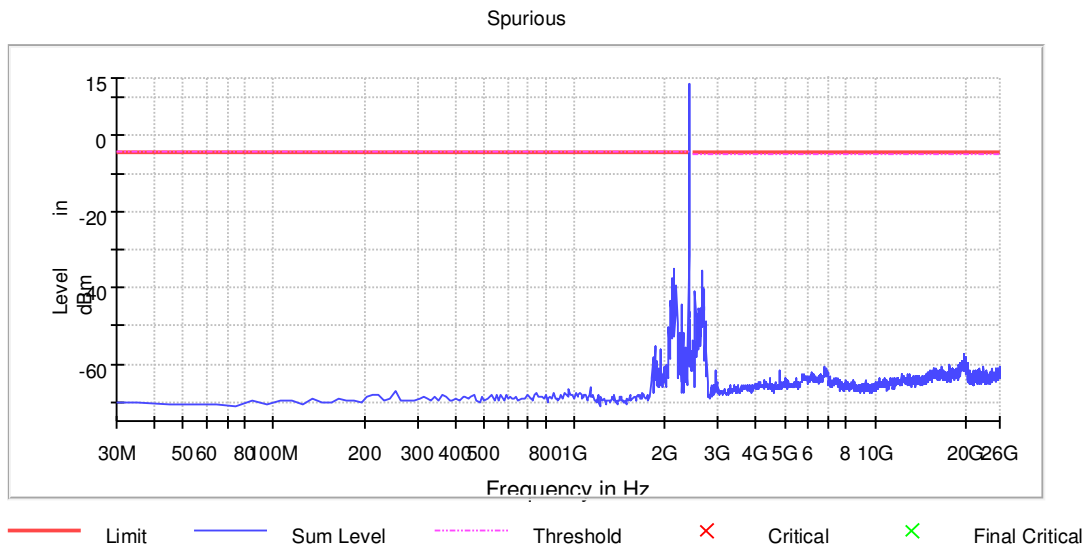

### Middle Channel

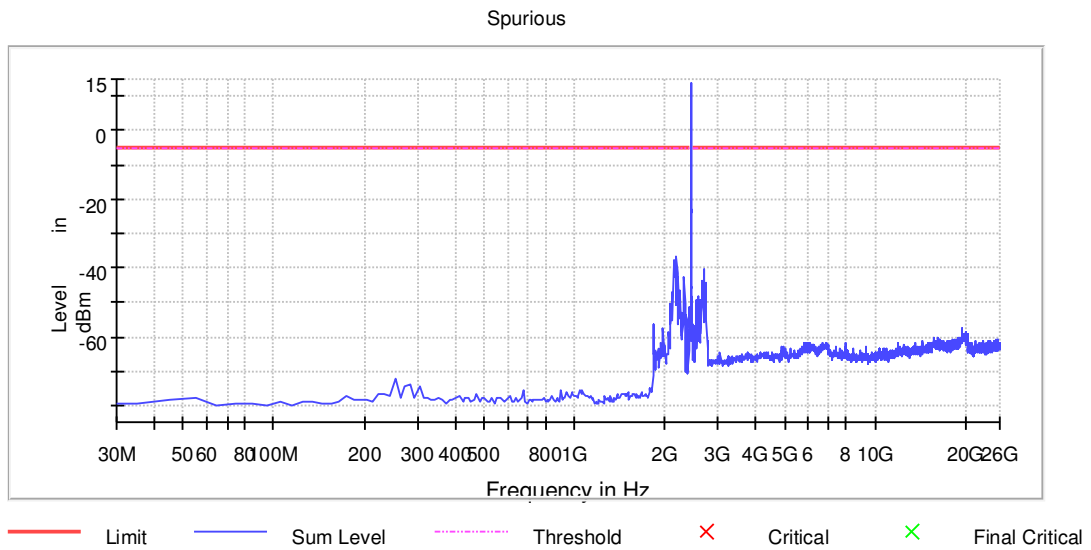

### Highest Channel

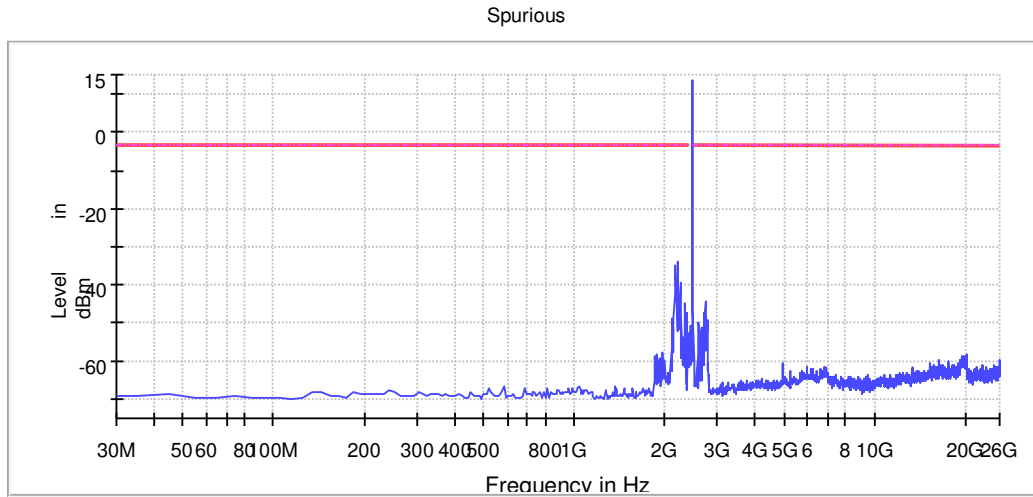

— Limit    — Sum Level    - - - Threshold    × Critical    × Final Critical

Remark: Limit = Inband peak – 20dB

### Measurement Setting

Setting	Instrument Value	Target Value
RBW	100.000 kHz	<= 100.000
VBW	300.000 kHz	>= 300.000
Detector	MaxPeak	MaxPeak

Remark: Cable loss 0.8dB was considered and set in system configuration.

- End of the Report -