


AIL A


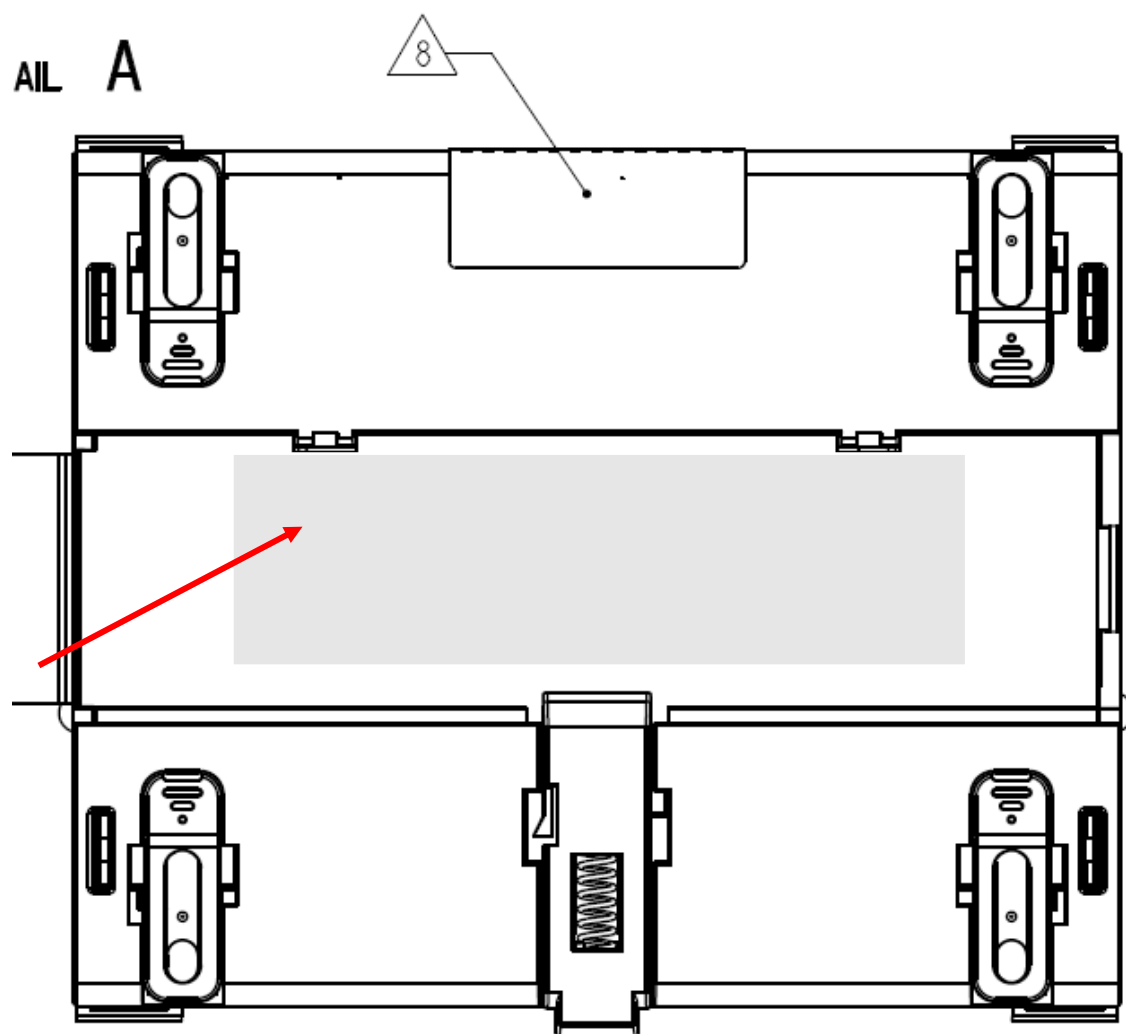


4

3

2

1

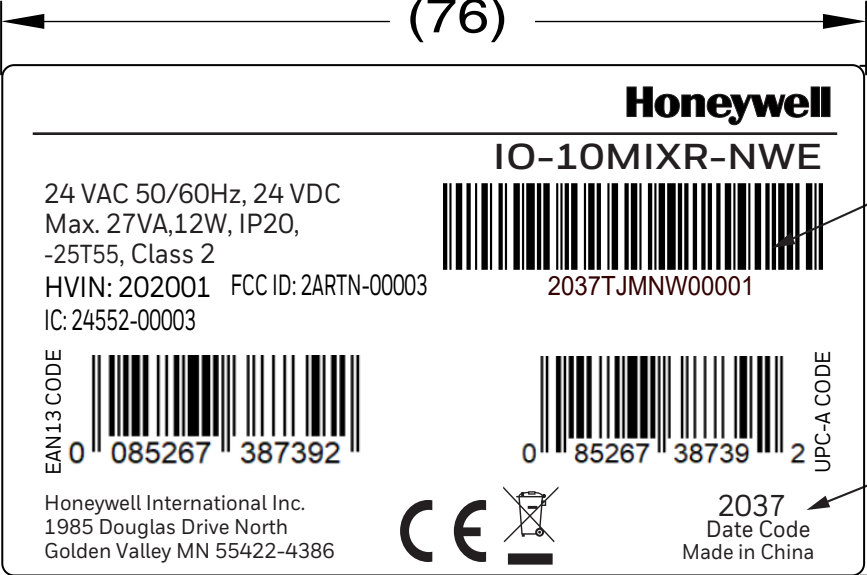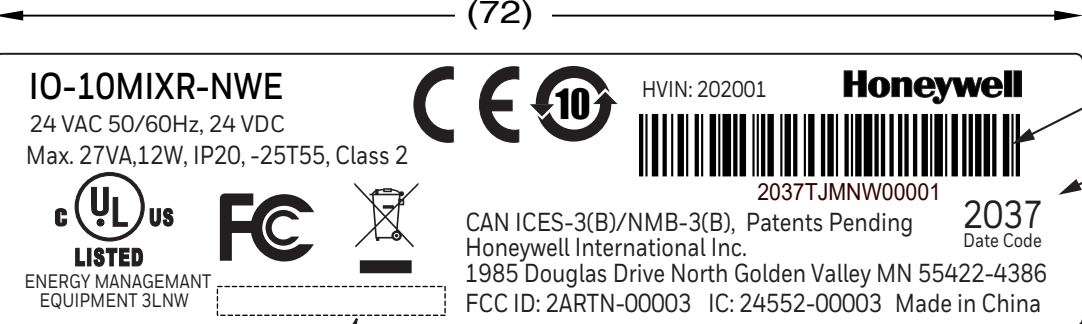

1. PRINTING TO BE BLACK (PMS PROCESS BLACK C).
- 2 THIS AREA RESERVED FOR D ATE CODE PER E.S. 116.
- 3 THIS AREA RESERVED FOR SERIAL NUMBER, THE FORMAT IS “YYWWTJXyyynnnnn”
YYWW = DATE CODE PER E.S.116; TJ=MANUFACTURING LOCATION, “TJ” FOR TIANJIN;
X=PRODUCT, “T” FOR THERMOSTAT, “M” FOR IO MODULES, “G” FOR GATEWAY;
yy= PRODUCT CODE, “NW” FOR IO-10MIXR-NWE, “WE” FOR IO-10MIXR-WE;
nnnnn = SEQUENTIAL NUMBER 00001~99999, RESTART AT 00001 ON EACH NEW DATE CODE. .
- 4 THIS AREA RESERVED FOR MAC ADDRESS.
5. THIS PRODUCT MUST BE PRODUCED USING COMPLIANT MATERIALS AND PROCESSES PER ES 50040083.
6. THE SIZE OF RoHS LOGO IS NO LESS THAN 5*5MM.

REV.	DATE	E.O.	REV.	DATE	E.O.

DIMENSIONS & TOLERANCES PER ANSI Y14.5M-1994 & HBC ENGINEERING STANDARDS

☐

☐

☐

MAT'L.

MAT'L. SPEC.

()

OR

()

FUNCTIONAL DIMENSIONING:
ALL DIMENSIONED AND UNDIMENSIONED GEOMETRY AND TOLERANCING ON THIS DRAWING IS DEFINED AND CONTROLLED BY THE DATABASE FILE. KEY INFORMATION IS REPRESENTED BY THIS DRAWING CONTAINING FUNCTIONAL DIMENSIONS.

CONTROLLED BY DATABASE FILE:

FIRST USED ON

DIMENSIONS ARE IN:
☐ INCHES
☒ MILLIMETERS

THIRD ANGLE PROJECTION

DRAFT CALLOUTS
INDICATES DECREASING DIMENSION
INDICATES INCREASING DIMENSION
-TOLERANCE UNLESS NOTED-

MACHINED $\pm 5^\circ$ FORMED $\pm 2^\circ$

MILLIMETERS
OVER 0 TO 6 ± 0.1
6 TO 30 ± 0.2
30 TO 100 ± 0.3
100 TO 300 ± 0.5
300 TO 1000 ± 0.8

INCHES
.0 $\pm .02$
.00 $\pm .01$
.000 $\pm .010$

DWN Xinyan.Zheng

DES.

NEXT ASS'Y

IO-10MIXR-NWE

REFERENCE

DEV. NO.

HONEYWELL CONFIDENTIAL AND PROPRIETARY

SIZE B

Honeywell

ACS GLOBAL DESIGN CENTER (TIAN JIN)
TIAN JIN , CHINA

NAME

DRAWING NO.

REV.

SCALE 2:1

SHT 1 OF 1