


REV	DATE	DESCRIPTION	ECR NO.	NAME
A1	20.11.12	PROPOSAL		FOUNTAIN

RoHS Compliant

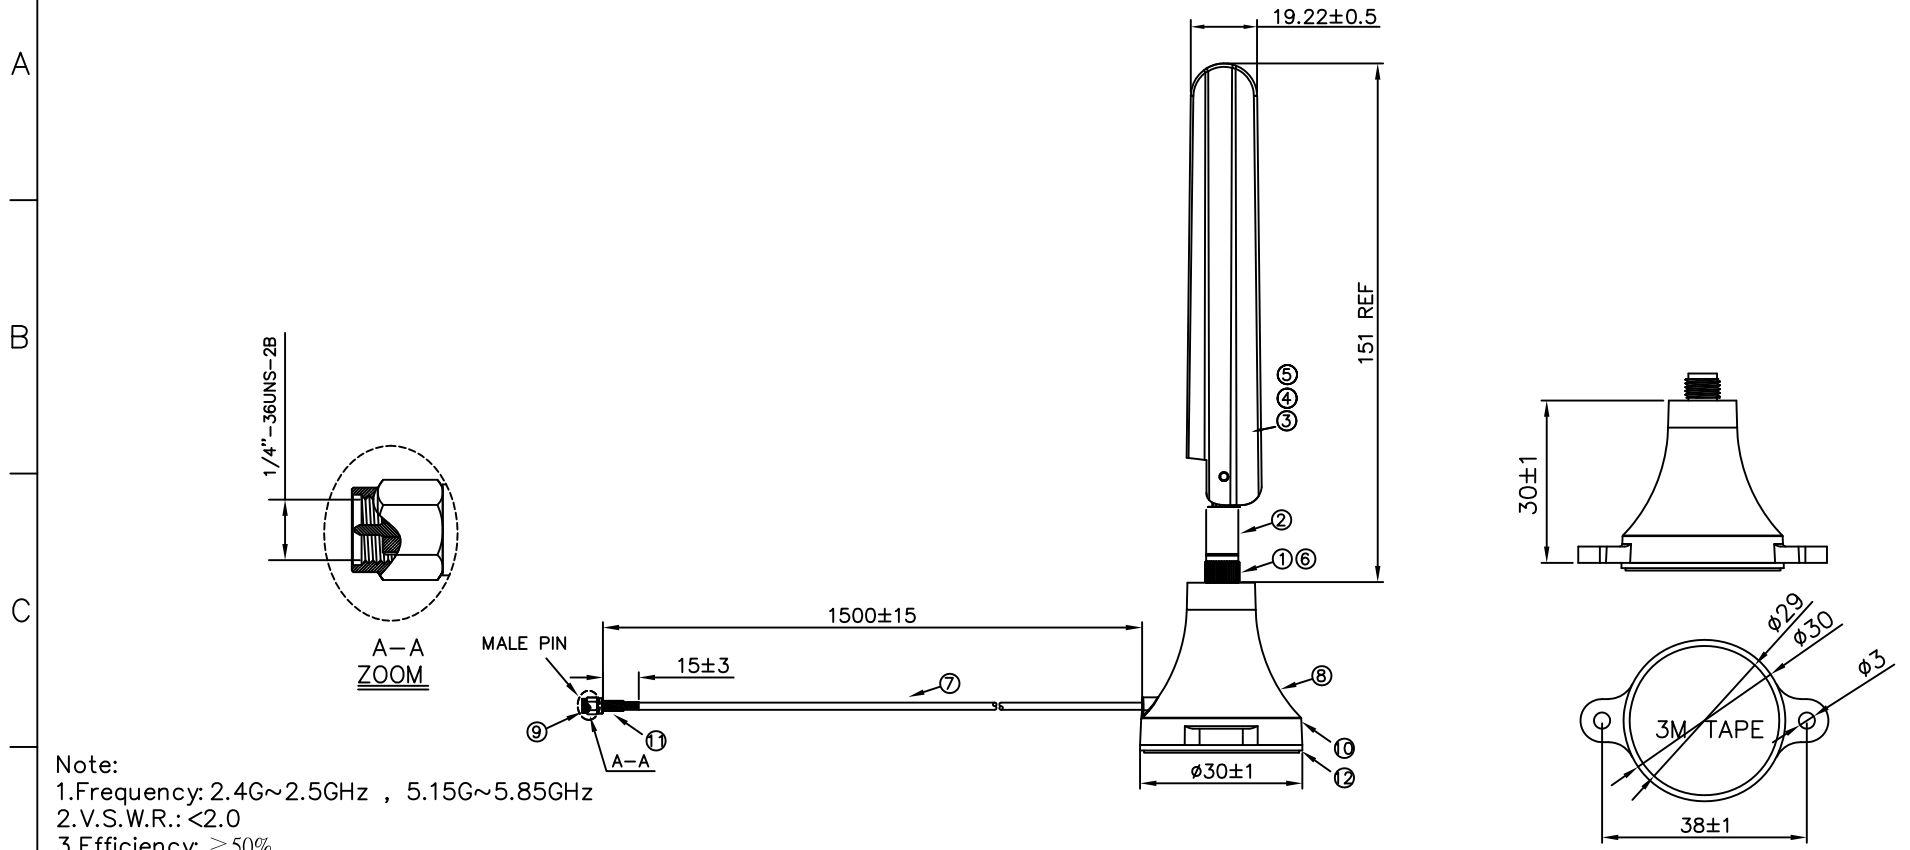

- Note:
- 1.Frequency: 2.4G~2.5GHz , 5.15G~5.85GHz
 - 2.V.S.W.R.: <2.0
 - 3.Efficiency: ≥50%
 - 4.Impedance: 50 ohm

NO.	ITEM	DESCRIPTION	QTY
12	TAPE	3M TAPE	1
11	GHS-BD040I	H.S TUBE,BLACK	1
10	METAL BASE	METAL BASE	1
9	SAM CONN	SMA PLUG ,GOLD PLATED	1
8	BASE	BASE,COLOR :BLACK	1
7	CABLE	LMR100 MINI COAXIAL CABLE , OD:2.8 , BLACK JACKET	1
6	SMA CONN	SMA PLUG ,GOLD PLATED	1
5	COVER	COVER , BLACK	1
4	PCB	FR-4	1
3	CABLE	MINI COAXIAL CABLE , OD:1.37 , BLACK	1
2	BASE	BASE, BLACK	1
1	SMA CONN	SMA CONN	1

WIESON TECHNOLOGIES CO., LTD		CUST NO.:	
PART NO.:		ARY113-0012-006-00	
TITLE: BASE+WIFI ANTENNA			
DRAWN BY	REASON	DRAWING NO.	ARY113-0012-006-00
CHECKED BY	FOUNTAIN	DRAWING SIZE	A4
APPROVED BY	ROX	UNIT	mm
SORTING NO.	WSC	PAGE	1 OF 2



WIESON TECHNOLOGIES CO., LTD.

WIESON 3D CHAMBER DATASHEET

Customer: **Honeywell**

Project Name: **Antenna With Base**

WIESON P/N: **ARY113-0012-006-00**

Antenna Type: **External Antenna**

Version No. : **08**

Contact Information:

[Tel:02-2647-1896](tel:02-2647-1896)

PM: **Eison Chou**

eison@wieson.com

Ext.6377

Engineer: Vicky

Vicky_zhang@wieson.com

Ext.6636



WIESON TECHNOLOGIES CO., LTD.

INDEX.

I.	ELECTRONIC CHARACTERISTICS.....	4
II.	Summary :	5
III.	S-Parameter Measurement :	5
IV.	Antenna Photos :	6
V.	S-Parameter Measurement Result : Cable Loss	7
VI.	S-Parameter Measurement Result : Antenna+ Cable.....	8
VII.	S-Parameter Measurement Result : Antenna+ Cable.....	9
VIII.	The Test Information Anechoic Chamber	10
IX.	Antenna Measurement Photo	14
X.	Antenna Measurement Result	15
XI.	3D Radiation Pattern of Antenna+ Cable.....	16



WIESON TECHNOLOGIES CO., LTD.

Revision History

Revision	Date	Engineer	Description
01	2020/08/10	Wippen	NEW RELEASE
02	2020/08/12	Wippen	Change Cable Length
03	2020/08/14	Wippen	Add Antenna+ Cable Efficiency
04	2020/08/20	Wippen	Change Cable Length
05	2020/08/25	Daly	Change Cable Type (RG316)
06	2020/08/25	Daly	Change Cable Length
07	2020/09/14	Vicky	Change Cable (LMR100 1m)
08	2020/09/14	Vicky	Change Cable (LMR100 1.5m)

No part of the information shown of this document may be used in any way without office stamp or written consent of
WIESON TECHNOLOGIES CO., LTD.



WIESON TECHNOLOGIES CO., LTD.

I. ELECTRONIC CHARACTERISTICS

Antenna+ Cable

Item	Specification	Specification
Operating Frequency(GHz)	2.4~2.5	5.15~5.85
Bandwidth	100MHz (Min.)	700MHz (Min.)
Return Loss	-10 dB (Max)	
Polarization	Linear	
Azimuth Bandwidth	Omni-directional	
Peak Gain	-0.31 dBi (Max)	1.17 dBi (Max)
Impedance	50Ω	
Material	PCB	
Maximum Power	1W	
V.S.W.R	2 : 1	
Radiation	Omni directional	
Efficiency	>33%	>20%
Connector	SMA	
Cable type	LMR100 L=1.5M	
Cable Loss	-2.1dB@2.4GHz/-3.3dB@5.8GHz	
Operating Temperature	-10~60°C	
Storage temp	-10~70°C	

II. Summary :

This report to account for the measurement setup and result of the Antenna. The measurement setup includes s-parameter, pattern, and gain measurement.

The measured data for Antenna are presented and analysis.

III. S-Parameter Measurement :

A. Reflection coefficient :

(a) Instrument : Network Analyzer.

(b) Setup :

- (1) Calibrate the Network Analyzer by one port calibration using O.S.L. calibration kits.
- (2) Connect the antenna under test to the Network Analyzer.
- (3) Measure the S11(reflection coefficient) shown in Fig. 1.
- (4) Generally, the S11 is less than -10dB to ensure the 90% power into antenna and only less than 10% power back to system.

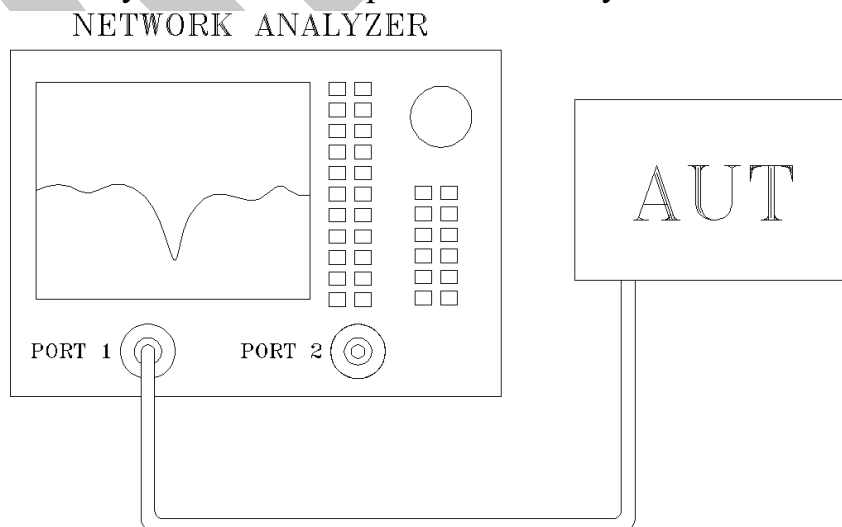



Fig.1 Antenna measured in Network Analyzer



WIESON TECHNOLOGIES CO., LTD.


IV. Antenna Drawing :

Cable Length=1.5M

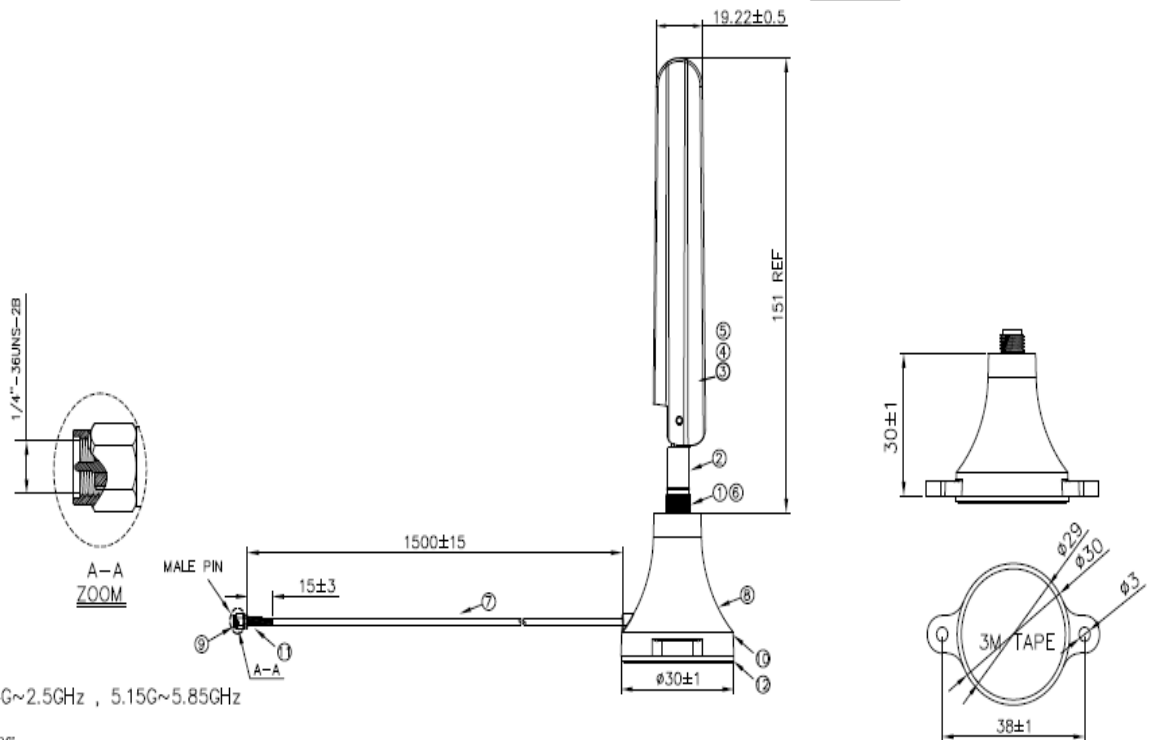

Note:


1. Frequency: 2.4G~2.5GHz , 5.15G~5.85GHz
2. V.S.W.R.: <2.0
3. Efficiency: $\geq 50\%$
4. Impedance: 50 ohm

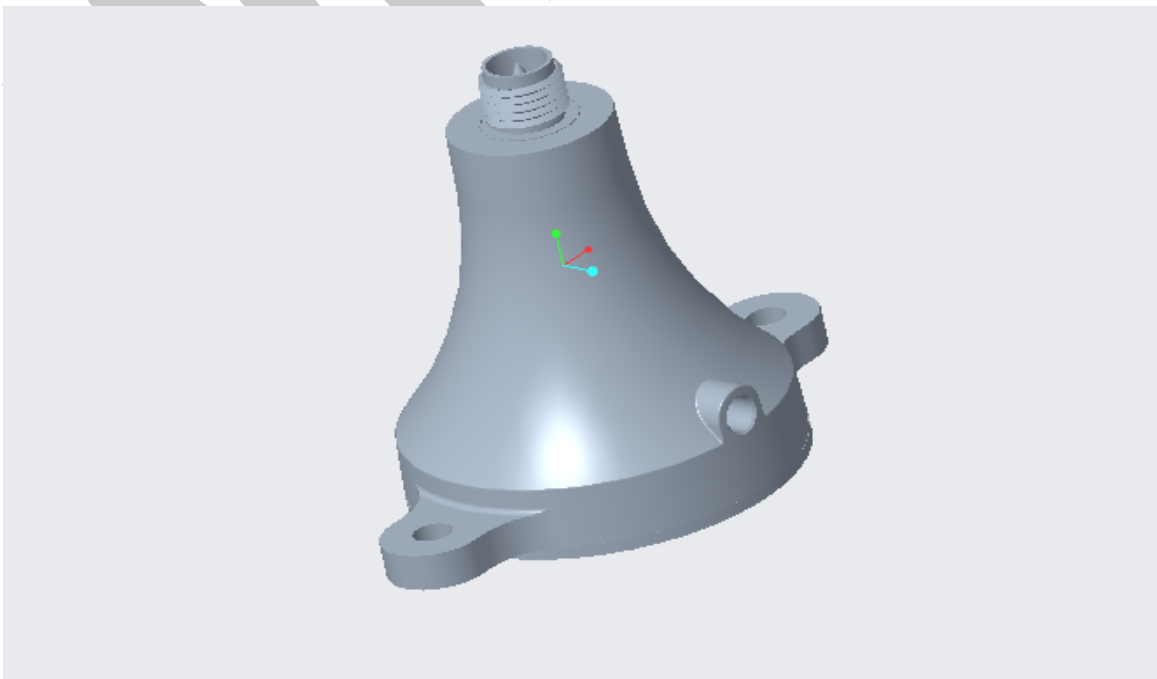



WIESON TECHNOLOGIES CO., LTD.

V. S-Parameter Measurement Result : Cable Loss

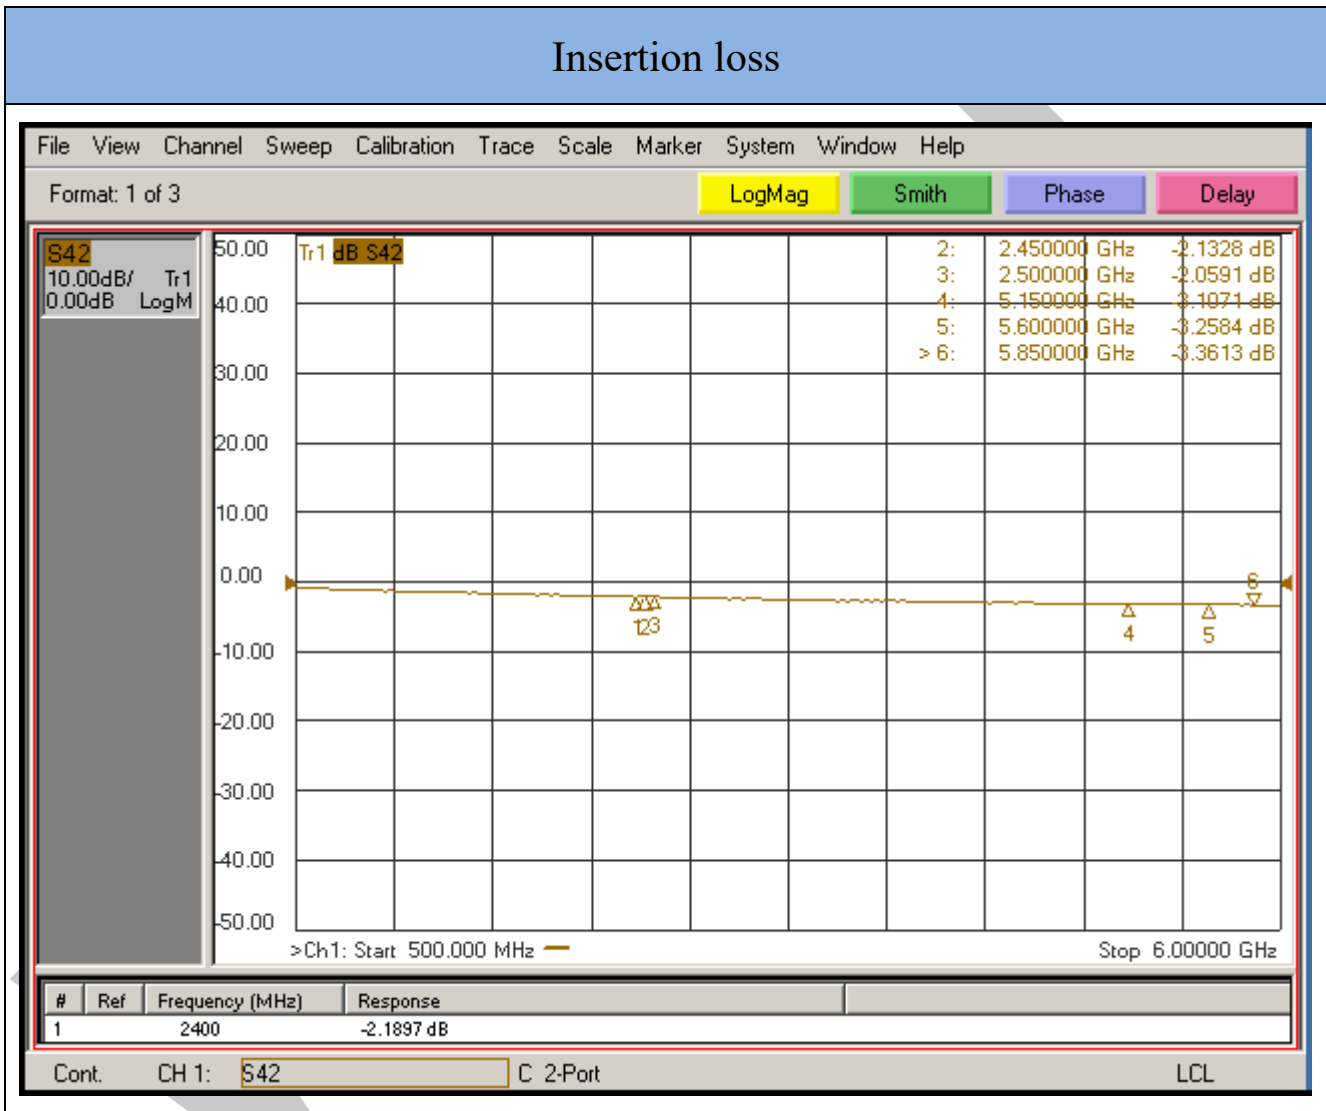


Freq(MHz)	2400	2450	2500	5150	5600	5850
dB	-2.1	-2.1	-2.0	-3.1	-3.2	-3.3



WIESON TECHNOLOGIES CO., LTD.

VI. S-Parameter Measurement Result : **Antenna+ Cable**

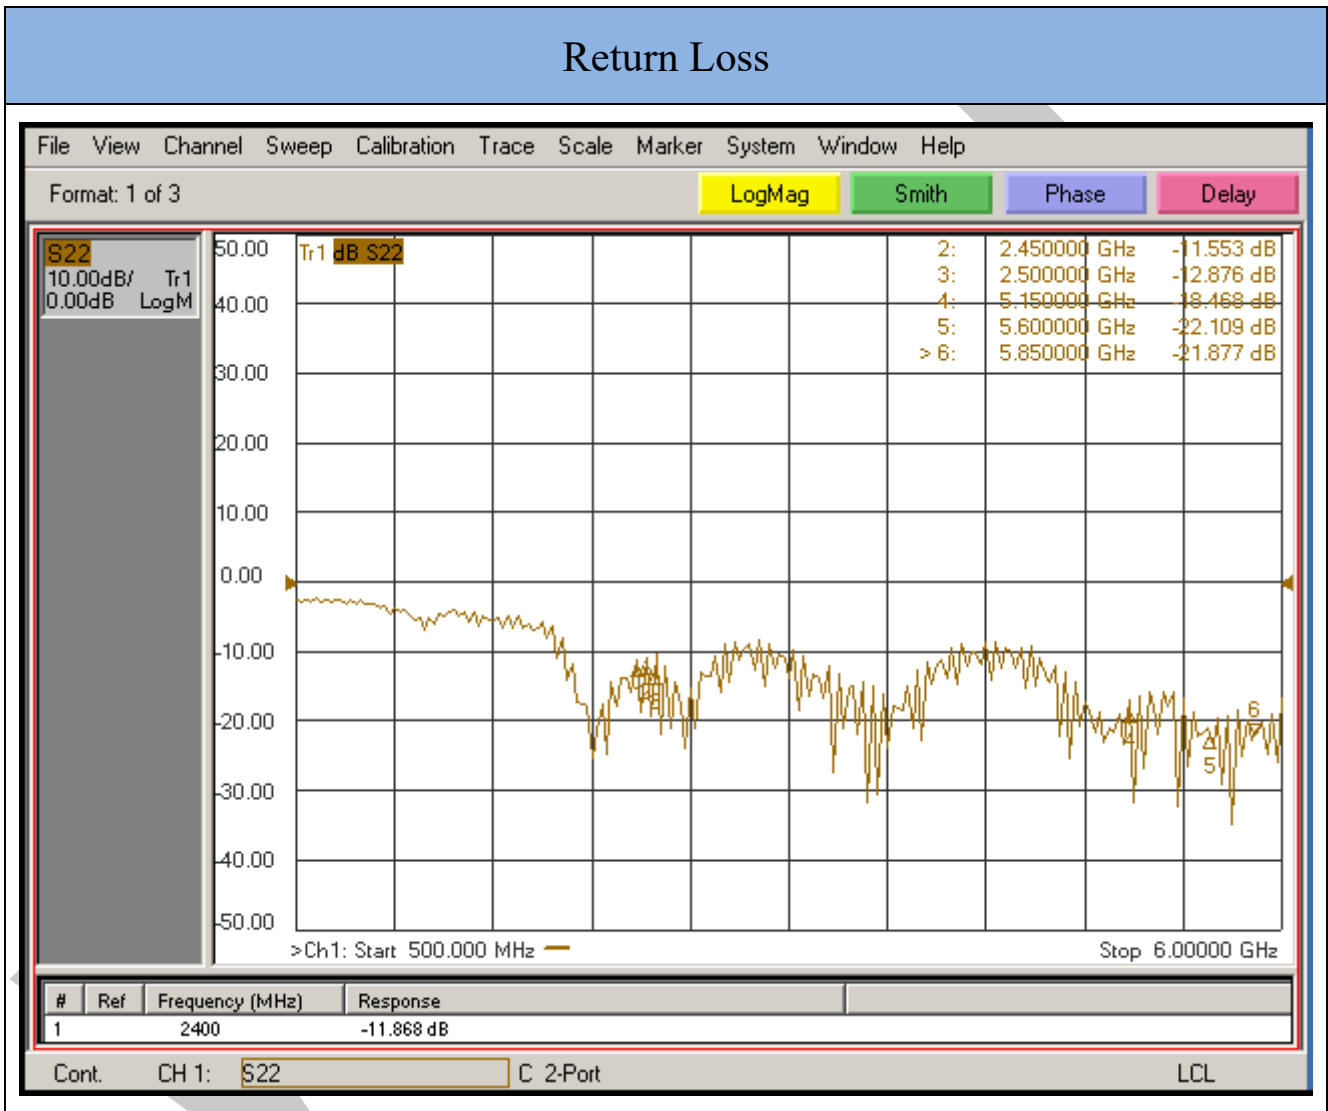

Freq(MHz)	2400	2450	2500	5150	5600	5850
dB	-11.86	-11.55	-12.87	-18.46	-22.10	-21.87



WIESON TECHNOLOGIES CO., LTD.

VII. S-Parameter Measurement Result : **Antenna+ Cable**




Freq(MHz)	2400	2450	2500	5150	5600	5850
VSWR	1.72	1.76	1.67	1.29	1.18	1.17

VIII. The Test Information Anechoic Chamber

A. Scope

This statement of work defines the requirements of a far-field antenna measurement range, which includes

- (1) One 560 cm (W) x 325 cm (H) x 620 cm (L) Antenna Measurement Anechoic Chamber, detailed requirements refer section B .
- (2) One Far-field Antenna Measurement System with spinning linear CP measurement capabilities, detailed requirement refer section E & F .
- (3) One broad-band transmitted antenna, detailed requirements refer section G .

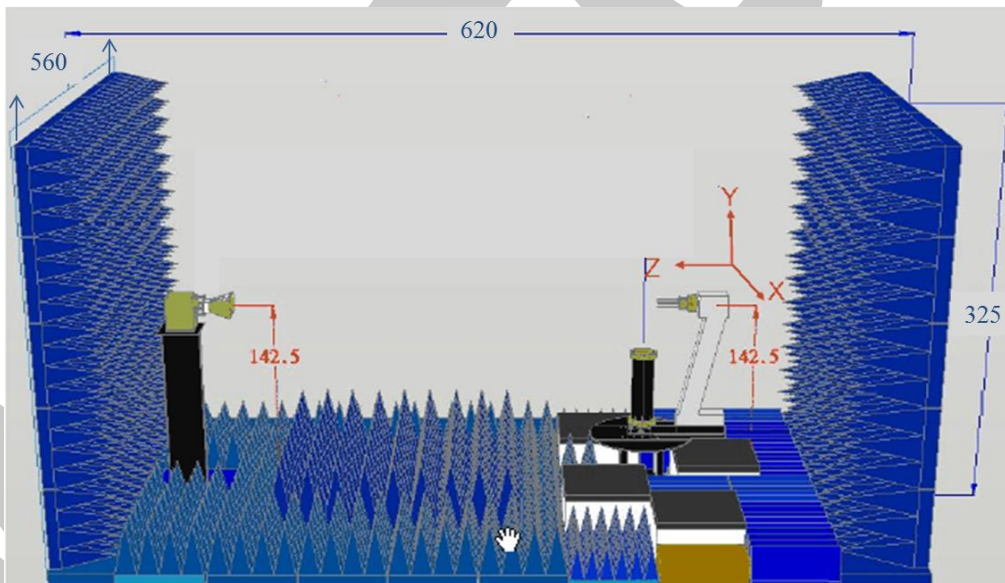

B. Antenna Measurement Anechoic Chamber

Fully anechoic chamber with dimension 560 cm in width, 325 cm in height and 620 cm in length. The quiet zone of this Chamber shall be greater than



WIESON TECHNOLOGIES CO., LTD.

60 cm @ 400MHz~900MHz, 43 cm @2.4 GHz, 31 cm @5.8 GHz,. Contractor should be aware of this anechoic chamber is going to be used for performing far-field antenna measurement.

C. Electrical specifications

Frequency Range: 400 MHz to 6 GHz,

Quiet zone size: >60 cm @ 400MHz~900MHz, >43 cm @2.4 GHz, >31 cm @5.8 GHz.

Quiet zone ripple: < +/- 1.5 dB @500(400)MHz~800MHz, < +/-0.75 dB @800MHz~1.5GHz, < +/- 0.5 dB @1.5GHz~6.0GHz

Field Probing Frequency	Peak-to-Peak Amplitude Taper (Within specified Quiet Zone Area)	Quiet Zone Size (cm)	Compliant
0.9 GHz	< 0.75 dB	60	Yes
1.575 GHz	< 0.5 dB	43	Yes
1.8 GHz	< 0.5 dB	43	Yes
2.4 GHz	< 0.5 dB	43	Yes
5.8 GHz	< 0.5 dB	31	Yes



WIESON TECHNOLOGIES CO., LTD.

D. Absorbers

We shall design and install proper absorbers on the inner walls of the chamber to guarantee the electrical specifications. However, the absorbers height shall be no less than 24" which enables the space in the chamber to be around 438 cm (W) x 203 cm (H) x 513 cm (L). All the absorber used shall meet NRL-8093 fire retardant regulations

E. Far-field Antenna Measurement System

We shall supply all the hardware and software which are capable of characterizing antenna radiation patterns from 30 KHz to 6 GHz using the existed Agilent 5230A PNA-L or Agilent 8753ES Vector Network Analyzer. The system shall be able to automatically measure and plot single axis amplitude and phase antenna patterns in either Cartesian or polar formats.

F. Far-field measurement software

The software consists of the control or data acquisition software and the data plotting software.

(1) The data acquisition software shall at least be capable of the following functions:

- *measuring single frequency per cut - single axis (azimuth); system can automatically switch frequency at the end of a scan.
- *measuring data in Uni-direction or bi-direction
- *measuring data at least with azimuth 360 degrees. (+/- 180 degrees or 0-360 degrees)
- *real time plot in Cartesian or polar format
- *screen shows real time angle position



WIESON TECHNOLOGIES CO., LTD.

- *system automatically calculates S/N ratio level based on measured signal fluctuation
- *function to set positioner zero position
- *operator can set data taking velocity and data sampling interval
- *entry to allow positioner offset to any angle

(2) The data plotting software shall at least be capable of the following functions:


- *Editing plot data
- *plotting data in Cartesian, Polar or delimited ASCII output with header information
- *plotting data in linear or dB scales
- *normalizing data to peak (dB), standard gain reference (dBi), or no normalization
- *overlying data, (drag and drop capability is preferable)
- *outputting data to any Windows supported printers

G. Broadband Transmitted antenna

We shall provide a linear-polarized broadband antenna with the specifications better than those listed hereafter in this article,

Frequency: 0.5-6 GHz, Gain: >12 dBi @10 GHz, VSWR:<2,0:1, Front to Back Ration > 20 dB

IX. Antenna Measurement Photo

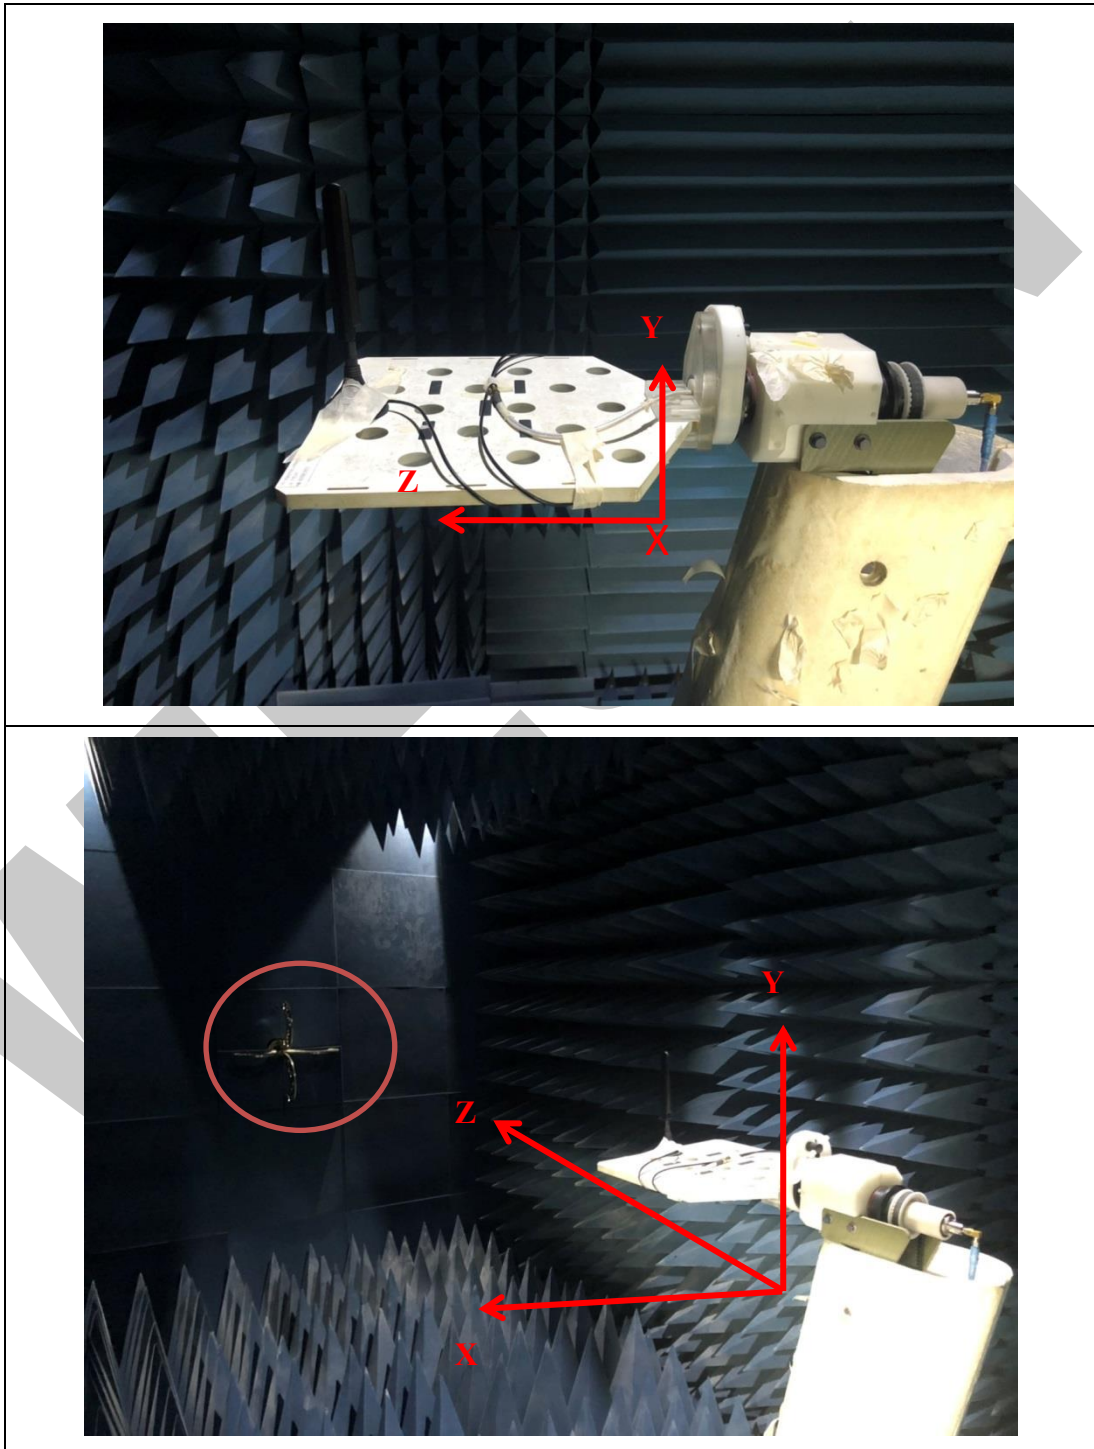



WIESON TECHNOLOGIES CO., LTD.

X. Antenna Measurement Result

Antenna+ Cable


Frequency (MHz)	Peak Gain (dBi)	3D Gain (dBi)	3D Radiation Efficiency(%)
2.4	-0.83	-4.82	33
2.45	-0.31	-3.98	40
2.5	-0.44	-4.59	35
5.15	1.17	-3.9	41
5.25	-0.04	-5.07	31
5.35	-0.7	-6.02	25
5.47	-1.04	-6.69	21
5.6	-1.11	-6.18	24
5.725	-1.78	-6.22	24
5.785	-0.97	-5.83	26
5.85	-1.82	-6.44	23




WIESON TECHNOLOGIES CO., LTD.

XI. 3D Radiation Pattern of **Antenna+ Cable**


2400MHz

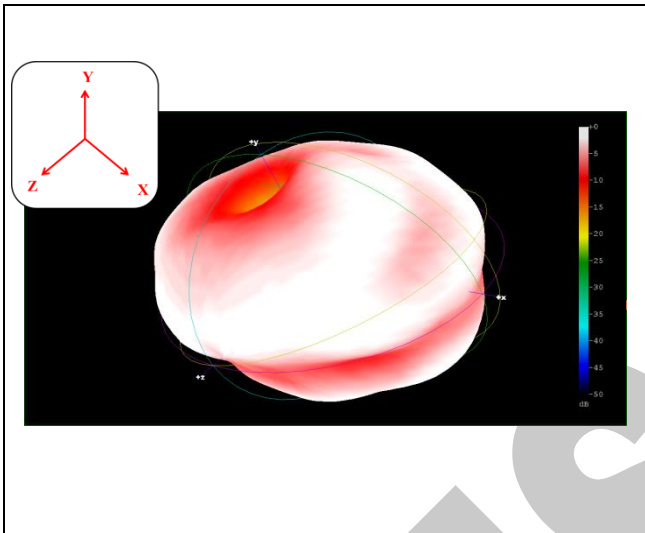


3D Pattern

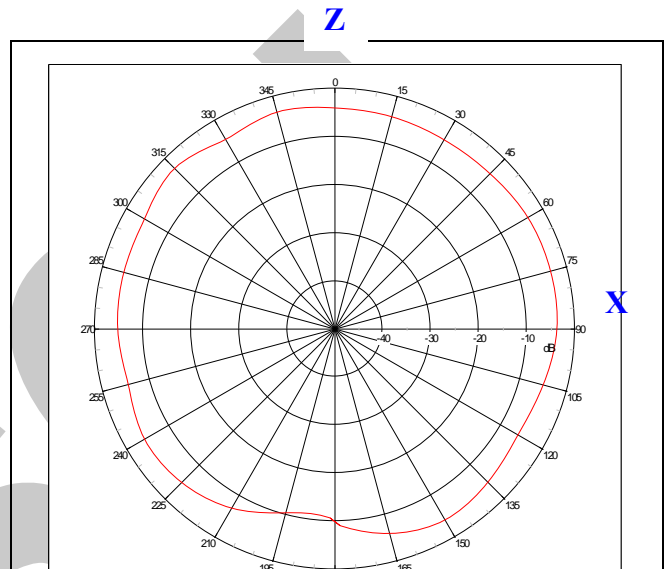

Far-field Pattern @Phi=0 deg. (E-Theta Plane-Cut)

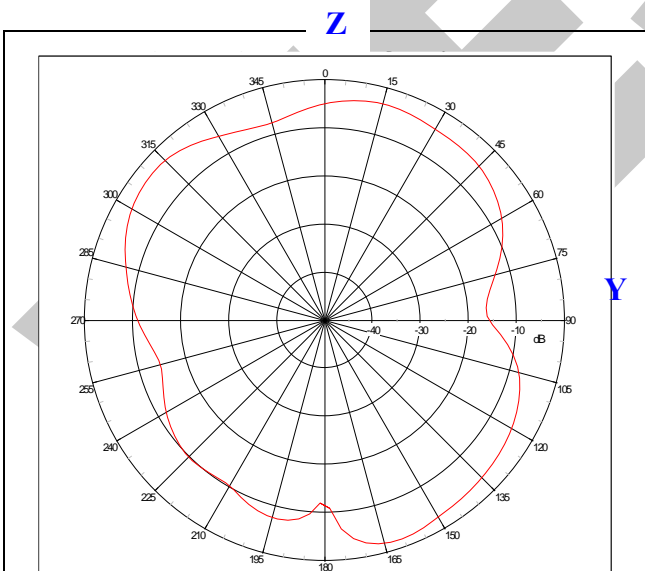

Far-field Pattern @Phi=90 deg. (E-Theta Plane-Cut)




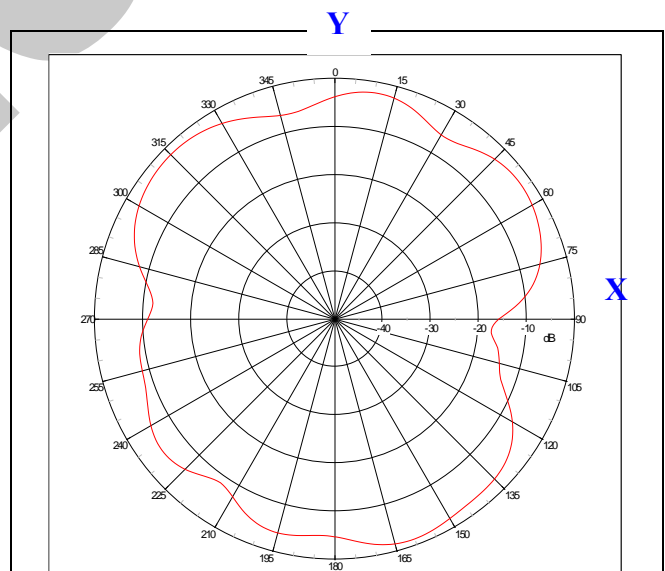


Far-field Pattern @Theta=90 deg. (E-Phi Plane-Cut)



WIESON TECHNOLOGIES CO., LTD.





2450MHz

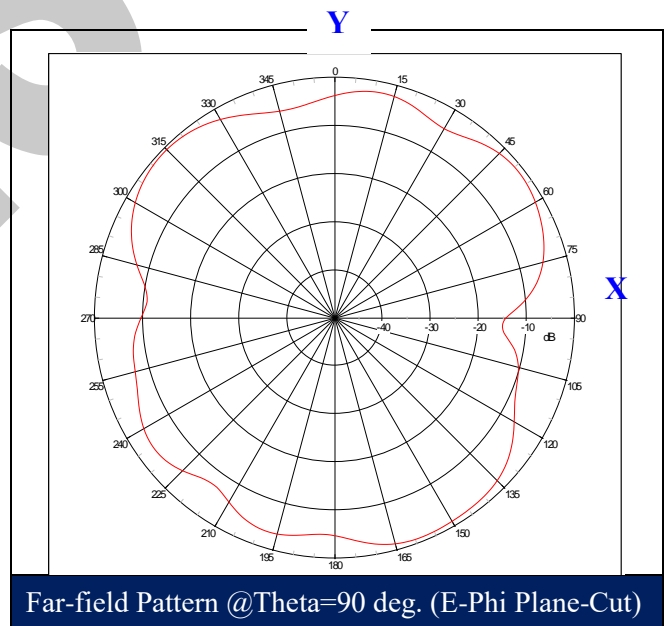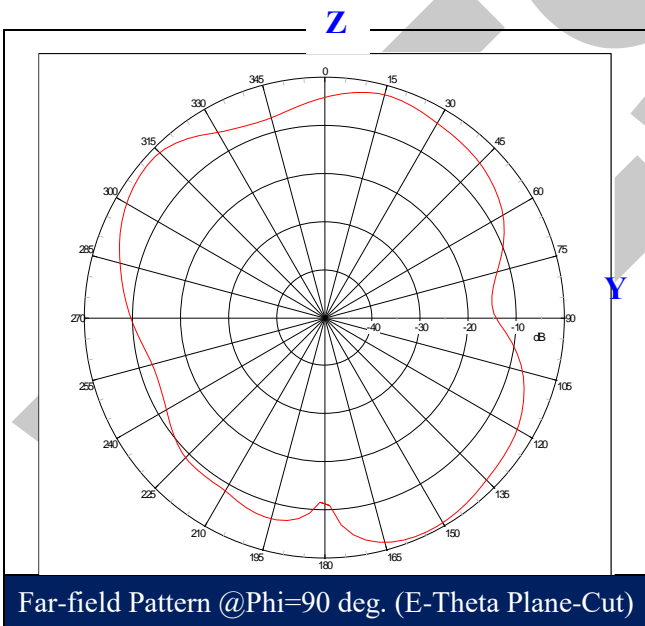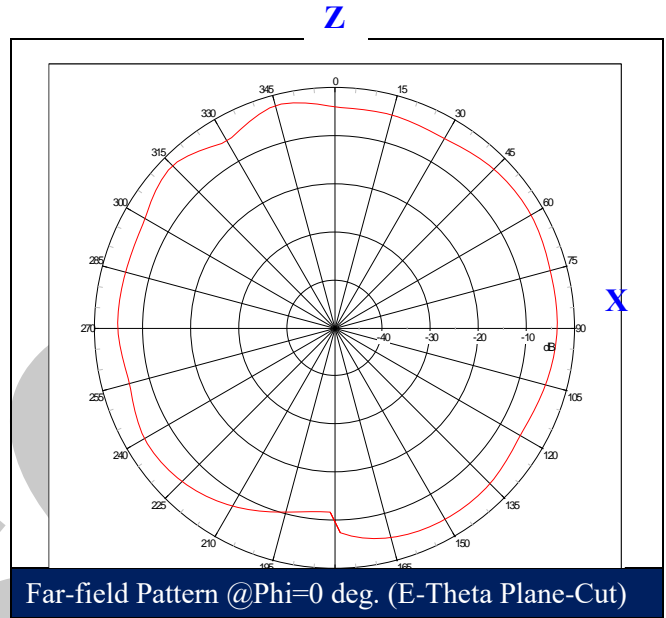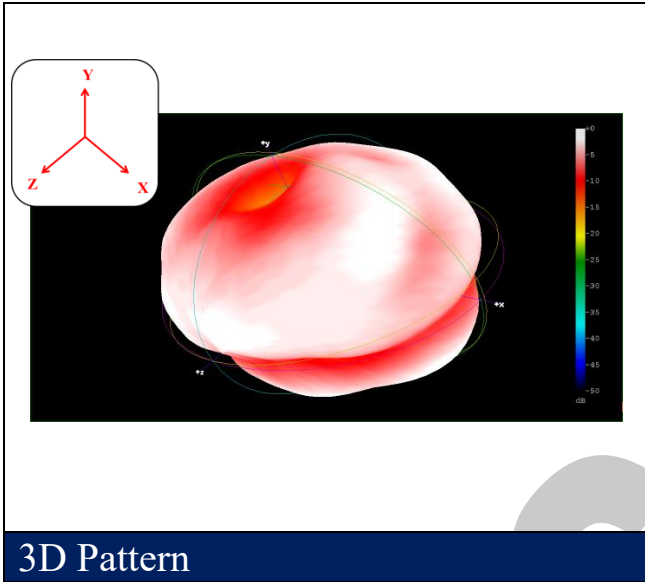



WIESON TECHNOLOGIES CO., LTD.





2500MHz

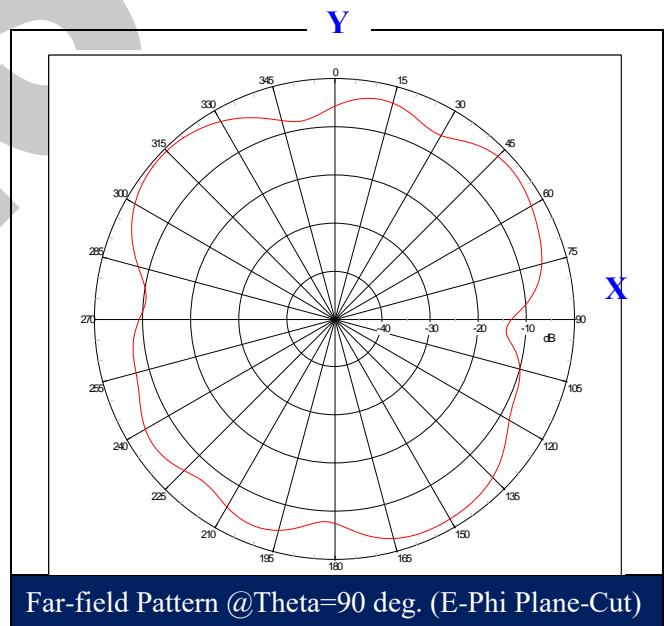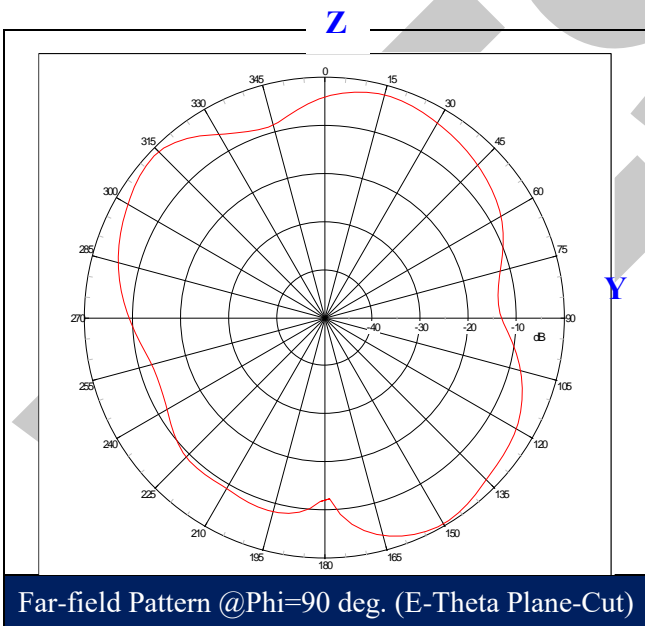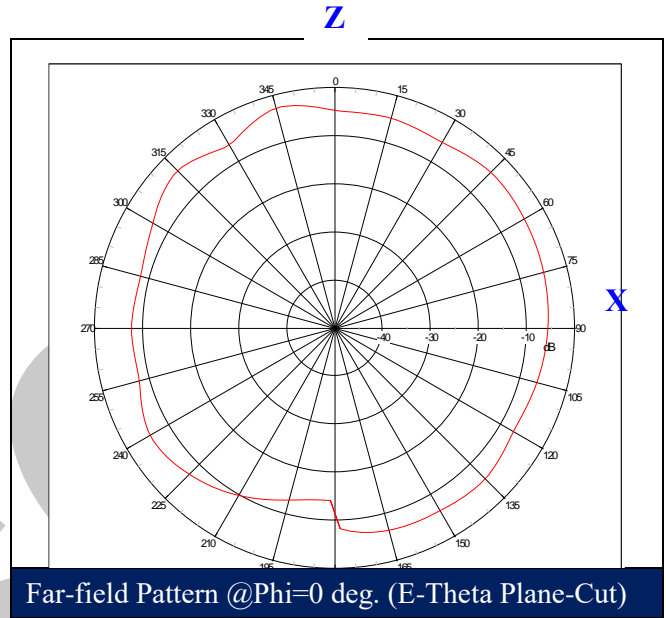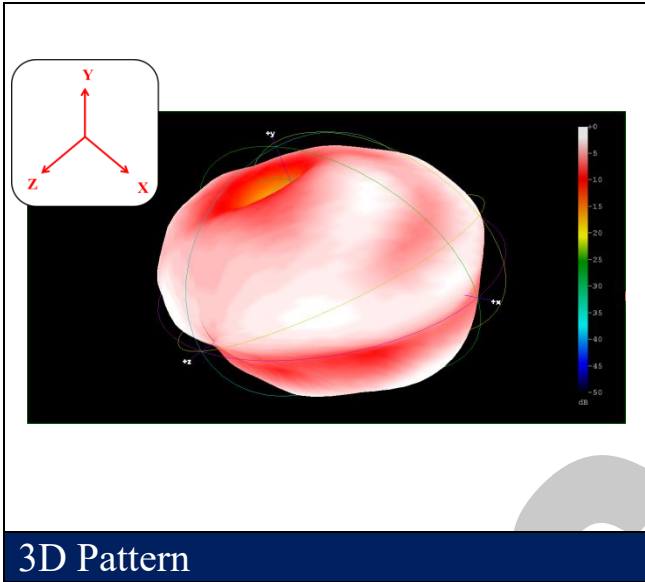



WIESON TECHNOLOGIES CO., LTD.





5150MHz

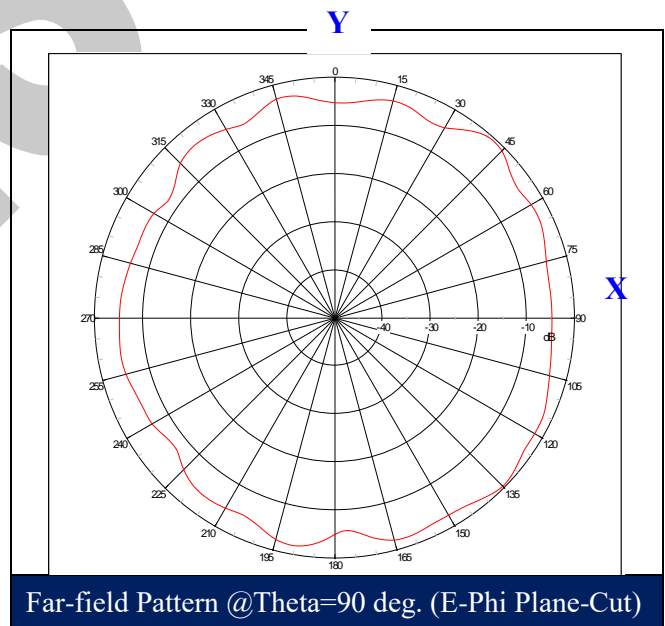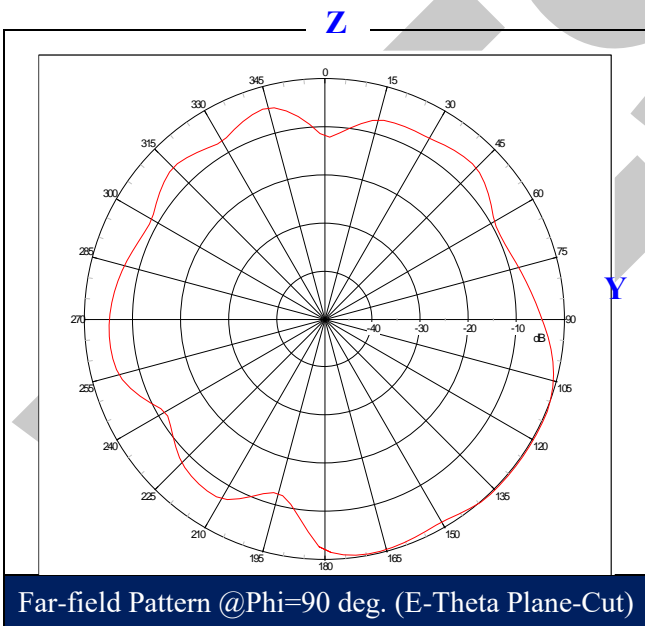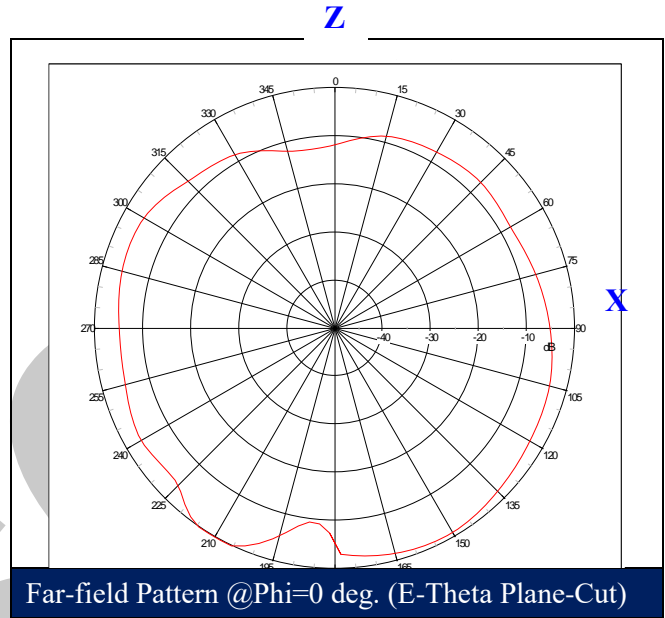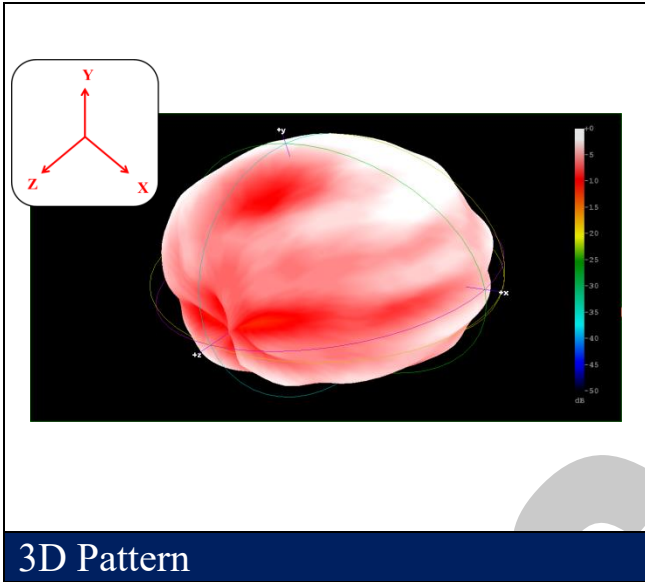



WIESON TECHNOLOGIES CO., LTD.


5600MHz

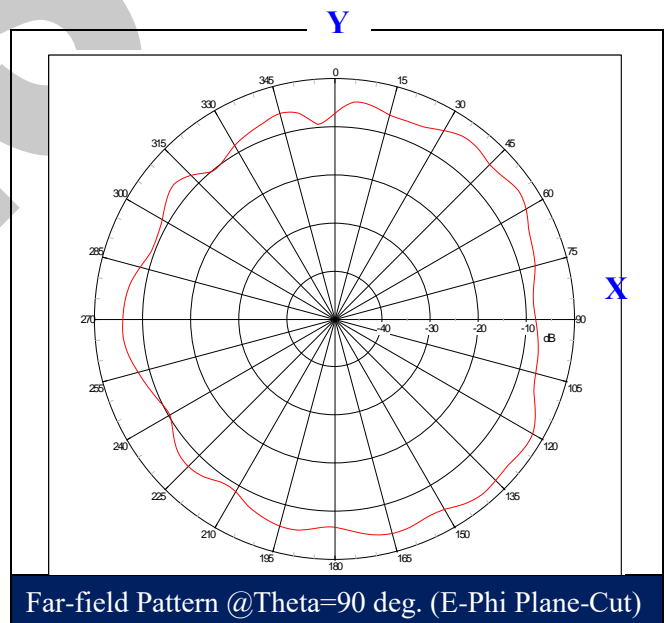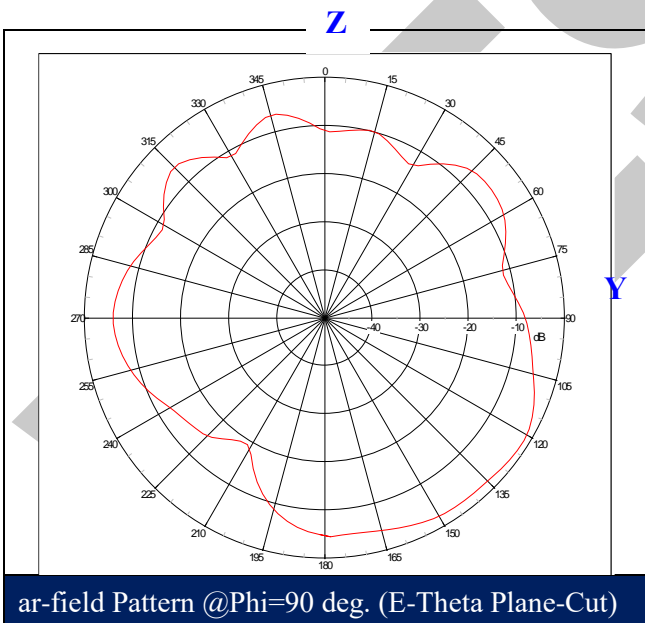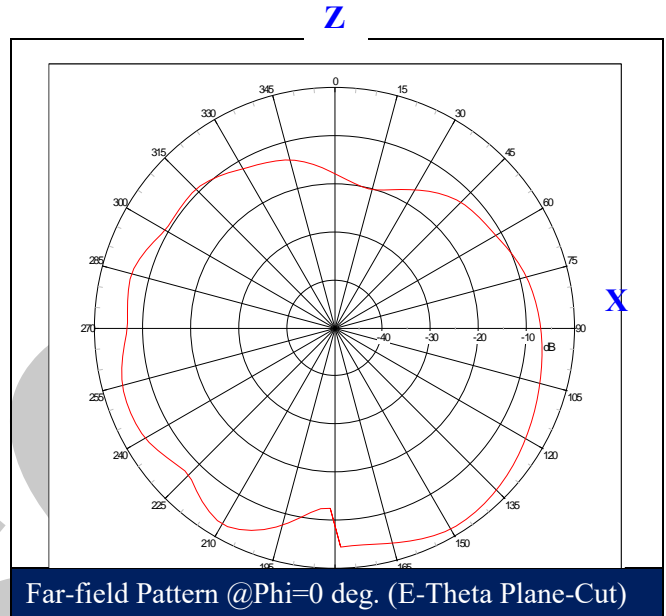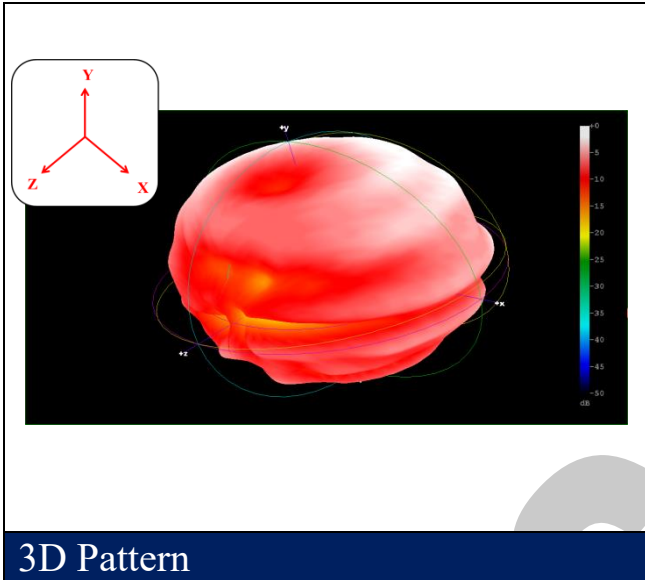




WIESON TECHNOLOGIES CO., LTD.


5850MHz

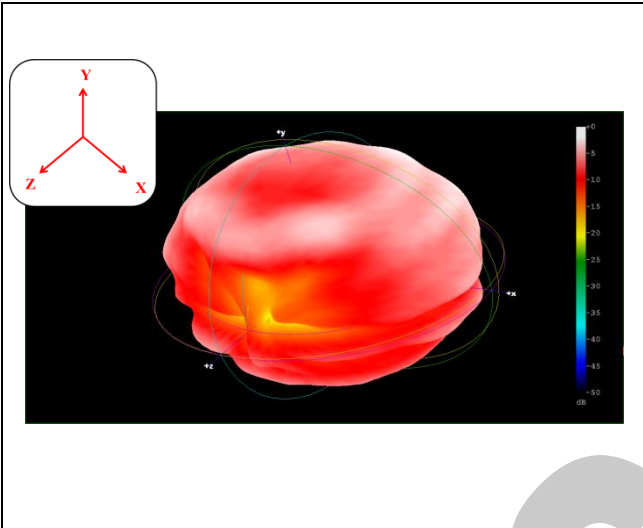


3D Pattern

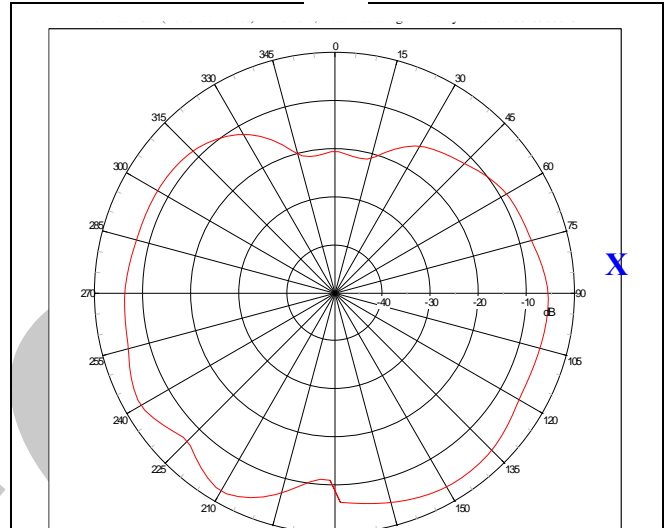

Far-field Pattern @Phi=0 deg. (E-Theta Plane-Cut)

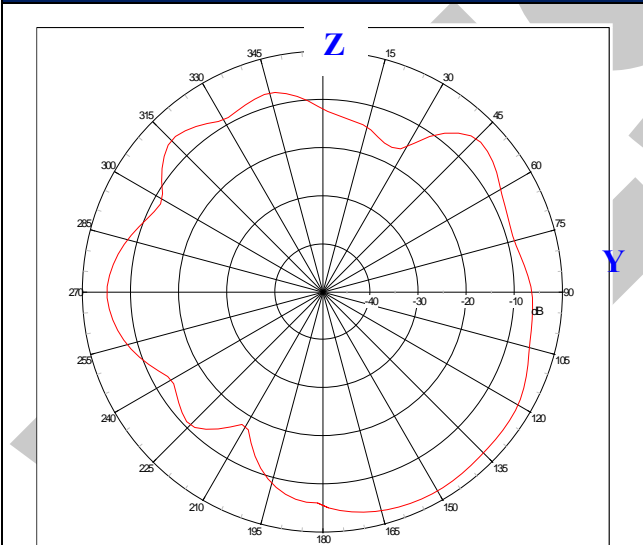

Far-field Pattern @Phi=90 deg. (E-Theta Plane-Cut)

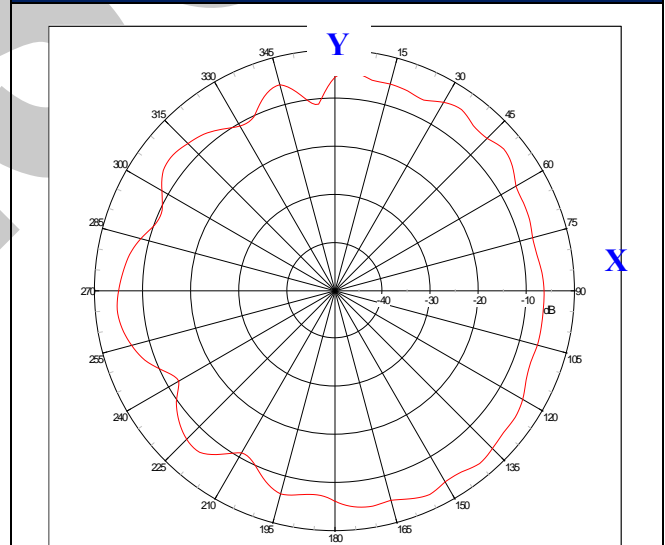

Far-field Pattern @Theta=90 deg. (E-Phi Plane-Cut)