



**中认信通**  
CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



## TEST REPORT

**Applicant: LAVA International Limited**

Address: A-56, Sector-64, Gautam Buddha Nagar, Noida Uttar Pradesh 201301, India

**FCC ID: 2ARTX-LEX401**

**Product Name: Mobile Phone**

**Standard(s): 47 CFR Part 2, 47 CFR Part 22, Subpart H**

**47 CFR Part 24, Subpart E**

**47 CFR Part 27**

**ANSI C63.26-2015**

**KDB 971168 D01 Power Meas License Digital Systems**

**v03r01**

The above device has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

**Report Number: CR231059186-00A**

**Date Of Issue: 2023/12/26**

**Reviewed By: Calvin Chen**

Title: RF Engineer

**Approved By: Sun Zhong**

Title: Manager

**Test Laboratory: China Certification ICT Co., Ltd (Dongguan)**

No. 113, Pingkang Road, Dalang Town, Dongguan,

Guangdong, China

Tel: +86-769-82016888

*Calvin Chen*

*Sun Zhong*

## Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

## Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

# CONTENTS

**DOCUMENT REVISION HISTORY ..... 4**

**1. GENERAL INFORMATION ..... 5**

**1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) ..... 5**

**1.2 DESCRIPTION OF TEST CONFIGURATION..... 6**

        1.2.1 EUT Operation Condition: ..... 6

        1.2.2 Support Equipment List and Details ..... 10

        1.2.3 Support Cable List and Details ..... 10

        1.2.4 Block Diagram of Test Setup ..... 11

**1.3 MEASUREMENT UNCERTAINTY ..... 12**

**2. SUMMARY OF TEST RESULTS ..... 13**

**3. REQUIREMENTS AND TEST PROCEDURES ..... 14**

    3.1 Applicable Standard For Part 22 Subpart H: ..... 14

    3.2 Applicable Standard For Part 24 Subpart E: ..... 16

    3.3 Applicable Standard For Part 27: ..... 17

    3.5 Test Method: ..... 20

**4. Test DATA AND RESULTS ..... 27**

**4.1 ANTENNA PORT TEST DATA AND RESULTS FOR GSM 850 BAND: ..... 27**

**4.2 ANTENNA PORT TEST DATA AND RESULTS FOR GSM 1900 BAND: ..... 33**

**4.3 ANTENNA PORT TEST DATA AND RESULTS FOR LTE BAND 5..... 39**

**4.4 ANTENNA PORT TEST DATA AND RESULTS FOR LTE BAND 40..... 61**

**4.5 ANTENNA PORT TEST DATA AND RESULTS FOR LTE BAND 41..... 85**

**4.6 RADIATED SPURIOUS EMISSIONS..... 103**

**5. EUT PHOTOGRAPHS ..... 110**

**6. TEST SETUP PHOTOGRAPHS ..... 111**

---

## DOCUMENT REVISION HISTORY

---

| Revision Number | Report Number   | Description of Revision | Date of Revision |
|-----------------|-----------------|-------------------------|------------------|
| 1.0             | CR231059186-00A | Original Report         | 2023/12/26       |

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment under Test (EUT)

|   |  |
|---|--|
| <b>EUT Name:</b>  | Mobile Phone                                 |
| <b>Trade Name:</b>  | LAVA   |
| <b>EUT Model:</b>   | LEX401                                       |
| <b>Multiple Model(s):</b>   | Z34  |
| <b>Operation Bands and modes:</b>   | GSM/GPRS/EDGE: 850/1900<br>LTE: Band 5/40/41 |
| <b>Modulation Type:</b>   | GMSK, 8PSK, BPSK, 16QAM                      |
| <b>Rated Input Voltage:</b>   | DC 3.85V from battery or 5V from adapter     |
| <b>Serial Number:</b>   | 2C4U-1                                       |
| <b>EUT Received Date:</b>   | 2023/10/20                                   |
| <b>EUT Received Status:</b>   | Good   |
| Note: The Multiple models are electrically identical with the test model. Please refer to the declaration letter for more detail, which was provided by manufacturer. |  |

#### Operation Voltage ( $V_{DC}$ ) ▲:

|         |       |         |       |          |       |
|---------|-------|---------|-------|----------|-------|
| Lowest: | 3.47V | Normal: | 3.85V | Highest: | 4.24V |
|---------|-------|---------|-------|----------|-------|

#### Transmission Antenna Information ▲:

| Antenna Type | Operation Bands | Antenna Frequency Range(MHz) | Antenna Gain (Gr)(dBi) | Lc(dB) |
|--------------|-----------------|------------------------------|------------------------|--------|
| FPC          | GSM850          | 824-849                      | -1.32                  | 0      |
|              | PCS1900         | 1850-1910                    | 0.38                   | 0      |
|              | LTE B5          | 824-849                      | -1.32                  | 0      |
|              | LTE B40 Lower   | 2305-2315                    | -1.36                  | 0      |
|              | LTE B40 Upper   | 2350-2360                    | -1.36                  | 0      |
|              | LTE B41         | 2535-2655                    | -1.42                  | 0      |

Note: Lc= Signal Attenuation in the connecting cable between the transmitter and antenna, in dB.

#### Accessory Information:

| Accessory Description | Manufacturer                           | Model          | Parameters   |
|-----------------------|--|----------------|--|
| Adapter               | Shenzhen Top power technology Co., LTD | TOP-804-050200 | Input: AC 100-240V~50/60Hz,<br>0.3A<br>Output: DC 5.0V, 2000mA |

## 1.2 Description of Test Configuration

### 1.2.1 EUT Operation Condition:

|   |   |
|---|---|
| <b>EUT Operation Mode:</b>  | The system was configured for testing in each operation mode. |
| <b>Equipment Modifications:</b>   | No  |
| <b>EUT Exercise Software:</b>   | No  |
| The maximum power was configured per 3GPP Standard for each operation modes as below setting:                             |   |
| GSM/GPRS/EGPRS  |   |
| Function: Menu select > GSM Mobile Station > GSM 850/1900   |   |
| Press Connection control to choose the different menus  |   |
| Press RESET > choose all the reset all settings   |   |
| Connection Press Signal Off to turn off the signal and change settings  |   |
| Network Support > GSM + GPRS or GSM + EGSM  |   |
| Main Service > Packet Data  |   |
| Service selection > Test Mode A – Auto Slot Config. off   |   |
| MS Signal Press Slot Config Bottom on the right twice to select and change the number of time slots and power setting     |   |
| > Slot configuration > Uplink/Gamma   |   |
| > 33 dBm for GPRS 850   |   |
| > 30 dBm for GPRS 1900  |   |
| > 27 dBm for EGPRS 850  |   |
| > 26 dBm for EGPRS 1900   |   |
| BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel                                   |   |
| Frequency Offset > + 0 Hz   |   |
| Mode > BCCH and TCH   |   |
| BCCH Level > -85 dBm (May need to adjust if link is not stable)   |   |
| BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel] |   |
| Channel Type > Off  |   |
| P0 > 4 dB   |   |
| Slot Config > Unchanged (if already set under MS signal)  |   |
| TCH > choose desired test channel   |   |
| Hopping > Off   |   |
| Main Timeslot > 3   |   |
| Network Coding Scheme > CS4 (GPRS) and MCS5 (EGPRS)   |   |
| Bit Stream > 2E9-1 PSR Bit Stream   |   |
| AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input  |   |
| Connection Press Signal on to turn on the signal and change settings  |   |

**WCDMA**

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

|  | Mode                                | HSUPA  | HSUPA  | HSUPA  | HSUPA | HSUPA |
|--|-------------------------------------|--|--|--|-------|-------|
|  | Subset                              | 1  | 2  |  | 4     | 5     |
| <b>WCDMA<br/>General<br/>Settings</b>  | Loopback Mode                       | Test Mode 1  |  |  |       |       |
|  | Rel99 RMC                           | 12.2kbps RMC   |  |  |       |       |
|  | HSDPA FRC                           | H-Set1   |  |  |       |       |
|  | HSUPA Test                          | HSUPA Loopback   |  |  |       |       |
|  | Power Control<br>Algorithm          | Algorithm2   |  |  |       |       |
|  | $\beta_c$                           | 11/15  | 6/15   | 15/15  | 2/15  | 15/15 |
|  | $\beta_d$                           | 15/15  | 15/15  | 9/15   | 15/ 5 | 0     |
|  | $\beta_{ec}$                        | 209/225  | 12/15  | 30 15  | 2/15  | 5/15  |
|  | $\beta_c/\beta_d$                   | 11/15  | 6/15   | 15/9   | 2/15  | -     |
|  | $\beta_{hs}$                        | 22/15  | 12/15  | 30/15  | 4/15  | 5/15  |
| CM(dB)                                 | 1.0                                 | 3.0  | 2.0  | 3.0  | 1.0   |       |
| PR(dB)                                 | 0                                   | 2  | 1  | 2  | 0     |       |
| <b>HSDPA<br/>Specific<br/>Settings</b> | DACK                                | 8  |  |  |       |       |
|  | DNAK                                | 8  |  |  |       |       |
|  | DCQI                                | 8  |  |  |       |       |
|  | Ack-Nack repetition<br>factor       | 3  |  |  |       |       |
|  | CQI Feedback                        | 4ms  |  |  |       |       |
|  | CQI Repetition Factor               | 2  |  |  |       |       |
|  | $A_{hs}=\beta_{hs}/\beta_c$         | 30/15  |  |  |       |       |
| <b>HSUPA<br/>Specific<br/>Settings</b> | DE-DPCCH                            | 6  | 8  | 8  | 5     | 7     |
|  | DHARQ                               | 0  | 0  | 0  | 0     | 0     |
|  | AG Index                            | 20   | 12   | 15   | 17    | 21    |
|  | ETFCI                               | 75   | 67   | 92   | 71    | 81    |
|  | Associated Max UL<br>Data Rate k ps | 242.1  | 174.9  | 482.8  | 205.8 | 308.9 |
|  | Reference E_FCI                     | E-TFCI 11 E<br>E-TFCI PO 4<br>E-TFCI 67<br>E-TFCI PO 18<br>E-TFCI 71<br>E-TFCI PO23<br>E-TFCI 75<br>E-TFCI PO26<br>E-TFCI 81<br>E-TFCI PO 27 | E-TFCI<br>11<br>E-TFCI<br>PO4<br>E-TFCI<br>92<br>E-TFCI<br>PO 18 | E-TFCI 11 E<br>E-TFCI PO 4<br>E-TFCI 67<br>E-TFCI PO 18<br>E-TFCI 71<br>E-TFCI PO23<br>E-TFCI 75<br>E-TFCI PO26<br>E-TFCI 81<br>E-TFCI PO 27 |       |       |

**LTE (FDD):**

The following tests were conducted according to the test requirements in 3GPP TS36.101

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

**Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3**

| Modulation | Channel bandwidth / Transmission bandwidth (RB) |         |       |        |        |        | MPR (dB) |
|------------|---|---------|-------|--------|--------|--------|----------|
|            | 1.4 MHz   | 3.0 MHz | 5 MHz | 10 MHz | 15 MHz | 20 MHz |          |
| QPSK       | > 5   | > 4     | > 8   | > 12   | > 16   | > 18   | ≤ 1      |
| 16 QAM     | ≤ 5   | ≤ 4     | ≤ 8   | ≤ 12   | ≤ 16   | ≤ 18   | ≤ 1      |
| 64 QAM     | > 5   | > 4     | > 8   | > 12   | > 16   | > 18   | ≤ 2      |

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS\_01".

**Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)**

| Network Signalling value | Requirements (sub-clause) | E-UTRA Band              | Channel bandwidth (MHz) | Resources Blocks ( $N_{RB}$ ) | A-MPR (dB)    |
|--------------------------|---------------------------|--------------------------|-------------------------|-------------------------------|---------------|
| NS_01                    | 6.6.2.1.1                 | Table 5.5-1              | 1.4, 3, 5, 10, 15, 20   | Table 5.6-1                   | NA            |
| NS_03                    | 6.6.2.2.1                 | 2, 4, 10, 23, 25, 35, 96 | 3                       | >5                            | ≤ 1           |
|                          |                           |                          | 5                       | >6                            | ≤ 1           |
|                          |                           |                          | 10                      | >6                            | ≤ 1           |
|                          |                           |                          | 15                      | >8                            | ≤ 1           |
|                          |                           |                          | 20                      | >10                           | ≤ 1           |
| NS_04                    | 6.6.2.2.2                 | 41                       | 5                       | >6                            | ≤ 1           |
|                          |                           |                          | 10, 15, 20              | See Table 6.2.4-4             |               |
| NS_05                    | 6.6.3.3.1                 | 1                        | 10,15,20                | ≥ 50                          | ≤ 1           |
| NS_06                    | 6.6.2.2.3                 | 12, 13, 14, 17           | 1.4, 3, 5, 10           | Table 5.6-1                   | n/a           |
| NS_07                    | 6.6.2.2.3                 | 13                       | 10                      | Table 6.2.4-2                 | Table 6.2.4-2 |
|                          | 6.6.3.3.2                 |                          |                         |                               |               |
| NS_08                    | 6.6.3.3.3                 | 19                       | 10, 15                  | > 44                          | ≤ 3           |
| NS_09                    | 6.6.3.3.4                 | 21                       | 10, 15                  | > 40                          | ≤ 1           |
|                          |                           |                          |                         | > 55                          | ≤ 2           |
| NS_10                    |                           | 20                       | 15, 20                  | Table 6.2.4-3                 | Table 6.2.4-3 |
| NS_11                    | 6.6.2.2.1                 | 23 <sup>1</sup>          | 1.4, 3, 5, 10           | Table 6.2.4-5                 | Table 6.2.4-5 |
| ..                       |                           |                          |                         |                               |               |
| NS_32                    | -                         | -                        | -                       | -                             | -             |

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.



**LTE(TDD):**

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

| Special subframe configuration | Normal cyclic prefix in downlink |                                |                                  |                   | Extended cyclic prefix in downlink |                                  |  |
|--------------------------------|----------------------------------|--------------------------------|----------------------------------|-------------------|------------------------------------|----------------------------------|--|
|                                | DwPTS                            | UpPTS                          |                                  | DwPTS             | UpPTS                              |                                  |  |
|                                |                                  | Normal cyclic prefix in uplink | Extended cyclic prefix in uplink |                   | Normal cyclic prefix in uplink     | Extended cyclic prefix in uplink |  |
| 0                              | $6592 \cdot T_s$                 | $2192 \cdot T_s$               | $2560 \cdot T_s$                 | $7680 \cdot T_s$  | $2192 \cdot T_s$                   | $2560 \cdot T_s$                 |  |
| 1                              | $19760 \cdot T_s$                |                                |                                  | $20480 \cdot T_s$ |                                    |                                  |  |
| 2                              | $21952 \cdot T_s$                |                                |                                  | $23040 \cdot T_s$ |                                    |                                  |  |
| 3                              | $24144 \cdot T_s$                |                                |                                  | $25600 \cdot T_s$ |                                    |                                  |  |
| 4                              | $26336 \cdot T_s$                |                                |                                  | $7680 \cdot T_s$  |                                    |                                  |  |
| 5                              | $6592 \cdot T_s$                 | $4384 \cdot T_s$               | $5120 \cdot T_s$                 | $20480 \cdot T_s$ | $4384 \cdot T_s$                   | $5120 \cdot T_s$                 |  |
| 6                              | $19760 \cdot T_s$                |                                |                                  | $23040 \cdot T_s$ |                                    |                                  |  |
| 7                              | $21952 \cdot T_s$                |                                |                                  | $12800 \cdot T_s$ |                                    |                                  |  |
| 8                              | $24144 \cdot T_s$                |                                |                                  | -                 |                                    |                                  |  |
| 9                              | $13168 \cdot T_s$                |                                |                                  | -                 |                                    |                                  |  |

Table 4.2-2: Uplink-downlink configurations.

| Uplink-downlink configuration | Downlink-to-Uplink Switch-point periodicity | Subframe number |   |   |   |   |   |   |   |   |   |
|-------------------------------|---|-----------------|---|---|---|---|---|---|---|---|---|
|                               |   | 0               | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
| 0                             | 5 ms  | D               | S | U | U | U | D | S | U | U | U |
| 1                             | 5 ms  | D               | S | U | U | D | D | S | U | U | D |
| 2                             | 5 ms  | D               | S | U | D | D | D | S | U | D | D |
| 3                             | 10 ms                                       | D               | S | U | U | U | D | D | D | D | D |
| 4                             | 10 ms                                       | D               | S | U | U | D | D | D | D | D | D |
| 5                             | 10 ms                                       | D               | S | U | D | D | D | D | D | D | D |
| 6                             | 5 ms  | D               | S | U | U | U | D | S | U | U | D |

**Calculated Duty Cycle**

| Uplink-Downlink Configuration | Downlink-to-Uplink Switch-point Periodicity | Subframe Number |   |   |   |   |   |   |   |   |   | Calculated Duty Cycle (%) |
|-------------------------------|---|-----------------|---|---|---|---|---|---|---|---|---|---------------------------|
|                               |   | 0               | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |                           |
| 0                             | 5 ms  | D               | S | U | U | U | D | S | U | U | U | 63.33                     |
| 1                             | 5 ms  | D               | S | U | U | D | D | S | U | U | D | 43.33                     |
| 2                             | 5 ms  | D               | S | U | D | D | D | S | U | D | D | 23.33                     |
| 3                             | 10 ms                                       | D               | S | U | U | U | D | D | D | D | D | 31.67                     |
| 4                             | 10 ms                                       | D               | S | U | U | D | D | D | D | D | D | 21.67                     |
| 5                             | 10 ms                                       | D               | S | U | D | D | D | D | D | D | D | 11.67                     |
| 6                             | 5 ms  | D               | S | U | U | U | D | S | U | U | D | 53.33                     |

Calculated Duty Cycle = Extended cyclic prefix in uplink x (T<sub>s</sub>) x # of S + # of U

Example for Calculated Duty Cycle for Uplink-Downlink Configuration 0:  
 Calculated Duty Cycle =  $5120 \times [1/(15000 \times 2048)] \times 2 + 6 \text{ ms} = 63.33\%$   
 where  
 T<sub>s</sub> = 1/(15000 x 2048) seconds

**1.2.2 Support Equipment List and Details**


| Manufacturer | Description | Model | Serial Number |
|--------------|-------------|-------|---------------|
| /            | /           | /     | /             |

**1.2.3 Support Cable List and Details**

| Cable Description | Shielding Type | Ferrite Core | Length (m) | From Port | To |
|-------------------|----------------|--------------|------------|-----------|----|
| /                 | /              | /            | /          |           |    |

### 1.2.4 Block Diagram of Test Setup

Spurious emissions:

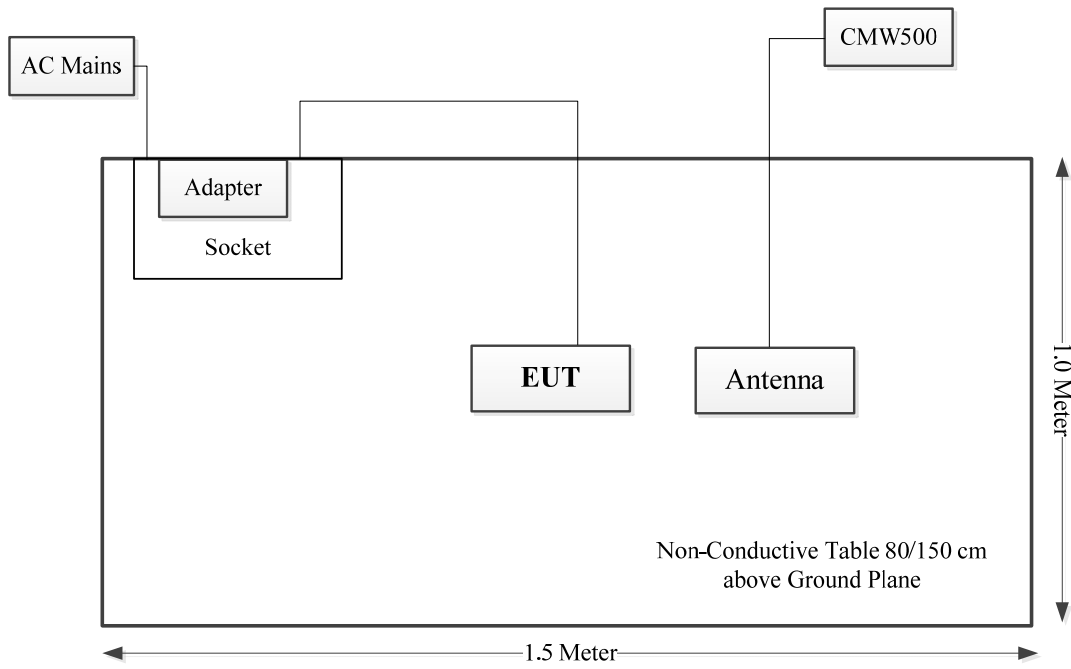

### 1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

| Parameter                         | Measurement Uncertainty   |
|-----------------------------------|---|
| Occupied Channel Bandwidth        | ±5 %  |
| RF output power, conducted        | ±0.61dB   |
| Power Spectral Density, conducted | ±0.61 dB  |
| Unwanted Emissions, radiated      | 30M~200MHz: 4.15 dB,200M~1GHz: 5.61 dB,1G~6GHz: 5.14 dB,<br>6G~18GHz: 5.93 dB,18G~26.5G:5.47 dB,26.5G~40G:5.63 dB |
| Unwanted Emissions, conducted     | ±1.26 dB  |
| Temperature                       | ±1 °C   |
| Humidity                          | ±5%   |
| DC and low frequency voltages     | ±0.4%   |
| Duty Cycle                        | 1%  |
| RF Frequency                      | ±0.082×10 <sup>-6</sup>   |

## 2. SUMMARY OF TEST RESULTS

| Rules  | Description of Test  | Result         |
|--|--|----------------|
| FCC§2.1046;<br>§ 22.913; § 24.232;<br>§27.50         | RF Output Power  | Compliant      |
| FCC§ 2.1047  | Modulation Characteristics   | Not Applicable |
| FCC§ 2.1049; § 22.905;<br>§ 22.917; § 24.238; §27.53 | Occupied Bandwidth   | Compliant      |
| FCC§ 2.1051; § 22.917;<br>§ 24.238; §27.53           | Spurious Emissions at Antenna Terminal                                 | Compliant      |
| FCC§ 22.917; § 24.238;<br>§27.53                     | Out of band emission, Band Edge  | Compliant      |
| FCC§ 2.1055; § 22.355;<br>§ 24.235; §27.54           | Frequency stability vs. temperature<br>Frequency stability vs. voltage | Compliant      |
| FCC§ 2.1053; § 22.917;<br>§ 24.238; §27.53           | Field Strength of Spurious Radiation                                   | Compliant      |

## 3. REQUIREMENTS AND TEST PROCEDURES

### 3.1 Applicable Standard For Part 22 Subpart H:

#### 3.1.1 RF Output Power

FCC §22.913

(a)(5) The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7watts.

(d) *Power measurement.* Measurement of the ERP of Cellular base transmitters and repeaters must be made using an average power measurement technique. The peak-to-average ratio (PAR) of the transmission must not exceed 13 dB. Power measurements for base transmitters and repeaters must be made in accordance with either of the following:

- (1) A Commission-approved average power technique (*see* FCC Laboratory's Knowledge Database); or
- (2) For purposes of this section, peak transmit power must be measured over an interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage. The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, *etc.*, so as to obtain a true peak measurement for the emission in question over the full bandwidth of the channel.

#### 3.1.2 Spurious Emissions

FCC §22.917

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

(b) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a reference bandwidth as follows:

- (1) In the spectrum below 1 GHz, instrumentation should employ a reference bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy, provided that the measured power is integrated over the full required reference bandwidth (i.e., 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.
- (2) In the spectrum above 1 GHz, instrumentation should employ a reference bandwidth of 1 MHz

#### 3.1.3 Frequency stability

FCC §22.355

Except as otherwise provided in this part, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table C-1 of this section.

Table C-1 - Frequency Tolerance for Transmitters in the Public Mobile Services

| <b>Frequency range (MHz)</b> | <b>Base, fixed (ppm)</b> | <b>Mobile &gt;3 watts (ppm)</b> | <b>Mobile <math>\leq</math>3 watts (ppm)</b> |
|------------------------------|--------------------------|---------------------------------|--|
| 25 to 50                     | 20                       | 20                              | 50   |
| 50 to 450                    | 5                        | 5                               | 50   |
| 450 to 512                   | 2.5                      | 5                               | 5  |
| 821 to 896                   | 1.5                      | <b>2.5</b>                      | <b>2.5</b>                                   |
| 928 to 929                   | 5                        | n/a                             | n/a  |
| 929 to 960                   | 1.5                      | n/a                             | n/a  |
| 2110 to 2220                 | 10                       | n/a                             | n/a  |

### **3.2 Applicable Standard For Part 24 Subpart E:**

#### **3.2.1 RF Output Power**

FCC §24.232

(c) Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

(d) Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of § 24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

#### **3.2.2 Spurious Emissions**

FCC §24.238

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

(b) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

(c) Alternative out of band emission limit. Licensees in this service may establish an alternative out of band emission limit to be used at specified band edge(s) in specified geographical areas, in lieu of that set forth in this section, pursuant to a private contractual arrangement of all affected licensees and applicants. In this event, each party to such contract shall maintain a copy of the contract in their station files and disclose it to prospective assignees or transferees and, upon request, to the FCC.

(d) Interference caused by out of band emissions. If any emission from a transmitter operating in this service results in interference to users of another radio service, the FCC may require a greater attenuation of that emission than specified in this section.

#### **3.2.3 Frequency stability**

FCC §24.235

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.



### 3.3 Applicable Standard For Part 27:

#### 3.3.1 RF Output Power

FCC §27.50

(a)(3) *Mobile and portable stations.*

(i) For mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band, the average EIRP must not exceed 50 milliwatts within any 1 megahertz of authorized bandwidth, *except that* for mobile and portable stations compliant with 3GPP LTE standards or another advanced mobile broadband protocol that avoids concentrating energy at the edge of the operating band the average EIRP must not exceed 250 milliwatts within any 5 megahertz of authorized bandwidth but may exceed 50 milliwatts within any 1 megahertz of authorized bandwidth. For mobile and portable stations using time division duplexing (TDD) technology, the duty cycle must not exceed 38 percent in the 2305-2315 MHz and 2350-2360 MHz bands. Mobile and portable stations using FDD technology are restricted to transmitting in the 2305-2315 MHz band. Power averaging shall not include intervals in which the transmitter is off.

(ii) Mobile and portable stations are not permitted to transmit in the 2315-2320 MHz and 2345-2350 MHz bands.

(iii) *Automatic transmit power control.* Mobile and portable stations transmitting in the 2305-2315 MHz band or in the 2350-2360 MHz band must employ automatic transmit power control when operating so the stations operate with the minimum power necessary for successful communications.

(iv) *Prohibition on external vehicle-mounted antennas.* The use of external vehicle-mounted antennas for mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band is prohibited.

(b)(10) Portable stations (hand-held devices) transmitting in the 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 3 watts ERP.

(c)(10) Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

(d)(4) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP. Fixed stations operating in the 1710-1755 MHz band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in these bands must employ a means for limiting power to the minimum necessary for successful communications.

(h) The following power limits shall apply in the BRS and EBS:

(2) Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

#### 3.3.2 Spurious Emissions

FCC §27.53

(a) For operations in the 2305-2320 MHz band and the 2345-2360 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power P (with averaging performed only during periods of transmission) within the licensed band(s) of operation, in watts, by the following amounts:

(4) For mobile and portable stations operating in the 2305-2315 MHz and 2350-2360 MHz bands:

(i) By a factor of not less than:  $43 + 10 \log (P)$  dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, not less than  $55 + 10 \log (P)$  dB on all frequencies between 2320 and 2324 MHz and on all frequencies between 2341 and 2345 MHz, not less than  $61 + 10 \log (P)$  dB on all frequencies between 2324 and 2328 MHz and on all frequencies between 2337 and 2341 MHz, and not less than  $67 + 10 \log (P)$  dB on all frequencies between 2328 and 2337 MHz;

(ii) By a factor of not less than  $43 + 10 \log (P)$  dB on all frequencies between 2300 and 2305 MHz,  $55 + 10 \log (P)$  dB on all frequencies between 2296 and 2300 MHz,  $61 + 10 \log (P)$  dB on all frequencies between 2292 and 2296 MHz,  $67 + 10 \log (P)$  dB on all frequencies between 2288 and 2292 MHz, and  $70 + 10 \log (P)$  dB below 2288 MHz;

(iii) By a factor of not less than  $43 + 10 \log (P)$  dB on all frequencies between 2360 and 2365 MHz, and not less than  $70 + 10 \log (P)$  dB above 2365 MHz.

(c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB;

(2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB;

(3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than  $76 + 10 \log (P)$  dB in a 6.25 kHz band segment, for base and fixed stations;

(4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than  $65 + 10 \log (P)$  dB in a 6.25 kHz band segment, for mobile and portable stations;

(5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

(6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

(f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to - 70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and - 80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43 + 10 \log (P)$  dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

(h) AWS emission limits

(1) **General protection levels.** Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10} (P)$  dB.

(m)(4) For mobile digital stations, the attenuation factor shall be not less than  $40 + 10 \log (P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log (P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log (P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than  $43 + 10 \log (P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log (P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

### **3.3.3 Frequency stability**

FCC §27.54

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

### 3.5 Test Method:

#### 3.5.1 Transmitter output power, e.r.p. and e.i.r.p

According to CFR Part 2.1046, ANSI C63.26-2015 Section 5.2.5.5 and KDB 971168 D01 Power Meas License Digital Systems v03r01:

The relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_T - L_C$$

where:


ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively (expressed in the same units as  $P_{\text{Meas}}$ , typically dBW or dBm);

$P_{\text{Meas}}$  = measured transmitter output power or PSD, in dBm or dBW;

$G_T$  = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

$L_C$  = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

#### Test Setup Block:

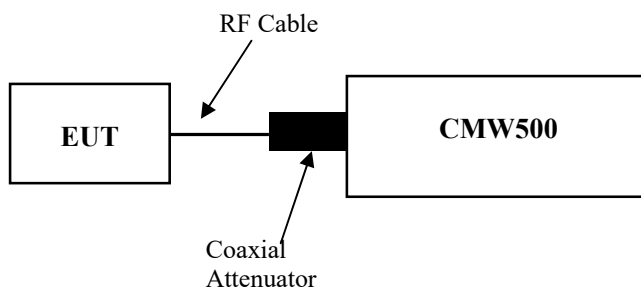

Note: The Insertion loss of the RF cable and coaxial Attenuator was offset into the Reading of CMW500.

### 3.5.2 Occupied Bandwidth


According to ANSI C63.26-2015 Section 5.4.4

The OBW is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

The following procedure shall be used for measuring (99%) power bandwidth:

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (typically a span of  $1.5 \times \text{OBW}$  is sufficient).
- b) The nominal IF filter 3 dB bandwidth (RBW) shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set  $\geq 3 \times \text{RBW}$ .
- c) Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation. See guidance provided in 4.2.3.  
NOTE—Step a), step b), and step c) may require iteration to adjust within the specified tolerances.
- d) Set the detection mode to peak, and the trace mode to max-hold.
- e) If the instrument does not have a 99% OBW function, recover the trace data points and sum directly in linear power terms. Place the recovered amplitude data points, beginning at the lowest frequency, in a running sum until 0.5% of the total is reached. Record that frequency as the lower OBW frequency. Repeat the process until 99.5% of the total is reached and record that frequency as the upper OBW frequency. The 99% power OBW can be determined by computing the difference these two frequencies.
- f) The OBW shall be reported and plot(s) of the measuring instrument display shall be provided with the test report. The frequency and amplitude axis and scale shall be clearly labeled. Tabular data can be reported in addition to the plot(s).

#### Test Setup Block:

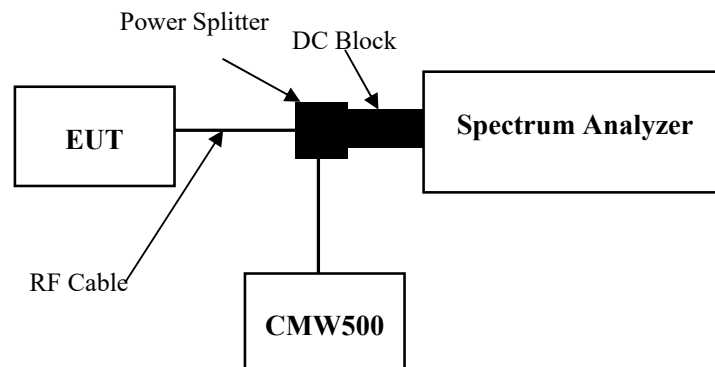


### 3.5.3 Transmitter unwanted emissions-at antenna terminals

According to ANSI C63.26-2015 Section 5.7.4, KDB 971168 D01 Power Meas License Digital Systems v03r01:

the applicable rule part specifies the reference bandwidth for measuring unwanted emission levels (typically, 100 kHz if the authorized frequency band/block is at or below 1 GHz and 1 MHz if the authorized frequency band/block is above 1 GHz),<sup>8</sup> effectively depicting the unwanted emission limit in terms of a power spectral density. In those cases where no reference bandwidth is explicitly specified, the values in the preceding sentence should be used.

#### Test Setup Block:

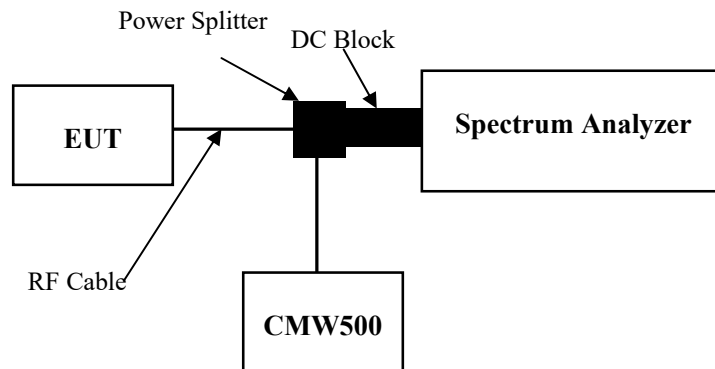


### 3.5.4 Transmitter unwanted emissions-Out of band emission

According to ANSI C63.26-2015 Section 5.7.3, KDB 971168 D01 Power Meas License Digital Systems v03r01:

Typically, a measurement (resolution) bandwidth smaller than the reference bandwidth is allowed for measurements within a specified frequency range at the edge of the authorized frequency block/band (e.g., within the first Y MHz outside of the authorized frequency band/block, where the value of Y is specified in the relevant rule part). Some FCC out-of-band emission rules permit the use of a narrower RBW (typically limited to a minimum RBW of 1 % of the OBW) for measuring the out-of-band emissions without a requirement to integrate the result over the full reference bandwidth. Beyond the specified frequency range in which this relaxation of the uniform reference bandwidth is permitted, it typically is also acceptable to use a narrower RBW (again limited to a minimum of 1 % of OBW) to increase accuracy, but the measurement result must subsequently be integrated over the full reference bandwidth.

#### Test Setup Block:

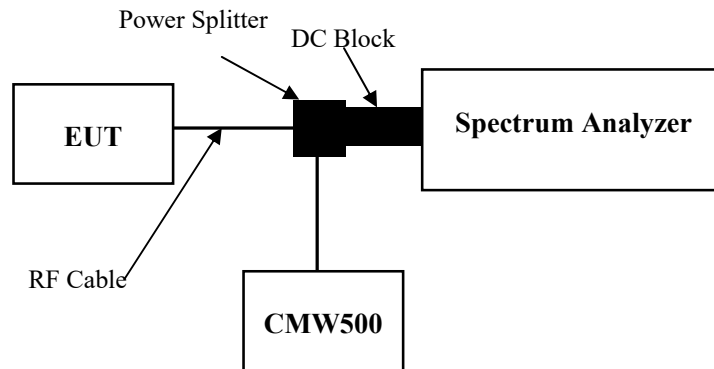

### 3.5.5 Frequency stability

According to ANSI C63.26-2015 Section 5.6, KDB 971168 D01 Power Meas License Digital Systems v03r01:

Frequency stability is a measure of the frequency drift due to temperature and supply voltage variations, with reference to the frequency measured at +20 °C and rated supply voltage.


The operating carrier frequency shall be set up in accordance with the manufacturer's published operation and instruction manual prior to the commencement of these tests. No adjustment of any frequency determining circuit element shall be made subsequent to this initial set-up. Frequency stability is tested:

- a) At 10 °C intervals of temperatures between –30 °C and +50 °C at the manufacturer's rated supply voltage, and
- b) At +20 °C temperature and ±15% supply voltage variations. If a product is specified to operate over a range of input voltage then the –15% variation is applied to the lowermost voltage and the +15% is applied to the uppermost voltage.

During the test all necessary settings, adjustments and control of the EUT have to be performed without disturbing the test environment, i.e., without opening the environmental chamber. The frequency stabilities can be maintained to a lesser temperature range provided that the transmitter is automatically inhibited from operating outside the lesser temperature range. For handheld equipment that is only capable of operating from internal batteries and the supply voltage cannot be varied, the frequency stability tests shall be performed at the nominal battery voltage and the battery end point voltage specified by the manufacturer. An external supply voltage can be used and set at the internal battery nominal voltage, and again at the battery operating end point voltage which shall be specified by the equipment manufacturer.

If an unmodulated carrier is not available, the mean frequency of a modulated carrier can be obtained by using a frequency counter with gating time set to an appropriately large multiple of bit periods (gating time depending on the required accuracy). Full details on the choice of values shall be included in the test report.

#### Test Setup Block:

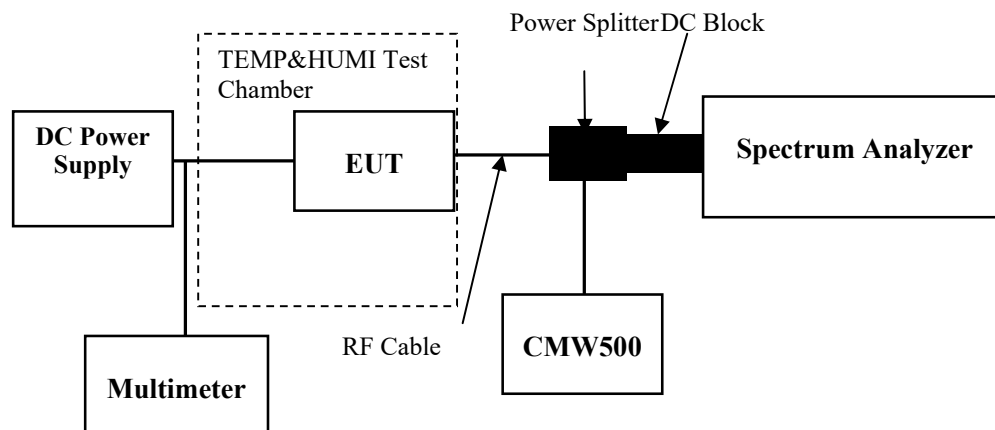



### 3.5.6 Transmitter unwanted emissions- Radiated Spurious emissions

According to ANSI C63.26-2015 Section 5.5.3:

#### Test setup:

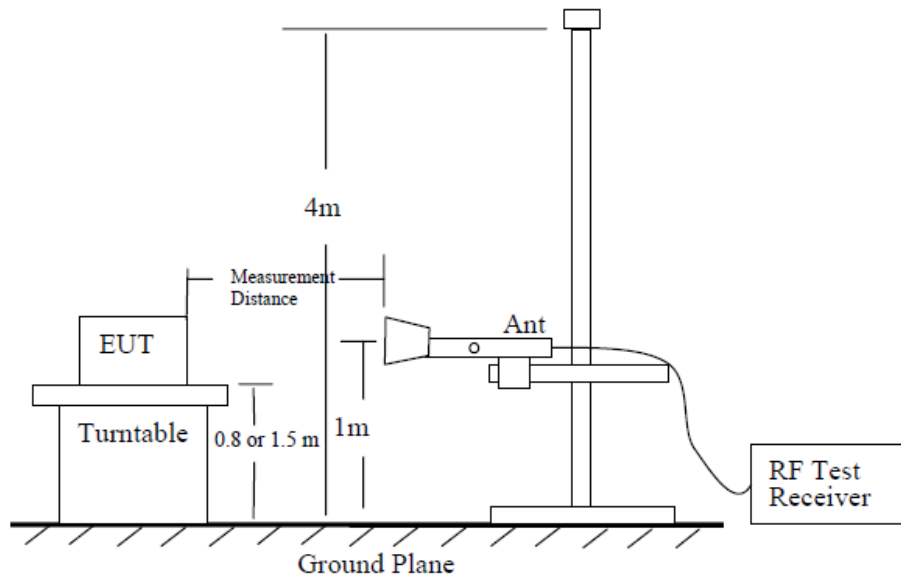


Figure 6—Test site-up for radiated ERP and/or EIRP measurements

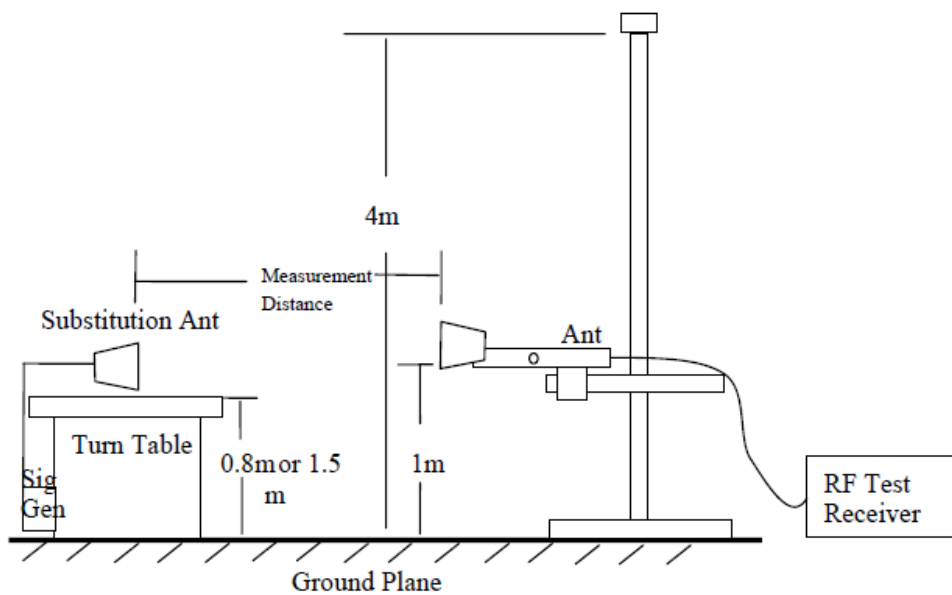


Figure 7—Substitution method set-up for radiated emission

**Test Procedure:**

- a) Place the EUT in the center of the turntable. The EUT shall be configured to transmit into the standard non-radiating load (for measuring radiated spurious emissions), connected with cables of minimal length unless specified otherwise. If the EUT uses an adjustable antenna, the antenna shall be positioned to the length that produces the worst case emission at the fundamental operating frequency.
- b) Each emission under consideration shall be evaluated:
  - 1) Raise and lower the measurement antenna in accordance 5.5.2, as necessary to enable detection of the maximum emission amplitude relative to measurement antenna height.
  - 2) Rotate the EUT through 360° to determine the maximum emission level relative to the axial position.
  - 3) Return the turntable to the azimuth where the highest emission amplitude level was observed.
  - 4) Vary the measurement antenna height again through 1 m to 4 m again to find the height associated with the maximum emission amplitude.
  - 5) Record the measured emission amplitude level and frequency using the appropriate RBW.
- c) Repeat step b) for each emission frequency with the measurement antenna oriented in both the horizontal and vertical polarizations to determine the orientation that gives the maximum emissions amplitude.
- d) Set-up the substitution measurement with the reference point of the substitution antenna located as near as possible to where the center of the EUT radiating element was located during the initial EUT measurement.
- e) Maintain the previous measurement instrument settings and test set-up, with the exception that the EUT is removed and replaced by the substitution antenna.
- f) Connect a signal generator to the substitution antenna; locate the signal generator so as to minimize any potential influences on the measurement results. Set the signal generator to the frequency where emissions are detected, and set an output power level such that the radiated signal can be detected by the measurement instrument, with sufficient dynamic range relative to the noise floor.
- g) For each emission that was detected and measured in the initial test [i.e., in step b) and step c)]:
  - 1) Vary the measurement antenna height between 1 m to 4 m to maximize the received (measured) signal amplitude.
  - 2) Adjust the signal generator output power level until the amplitude detected by the measurement instrument equals the amplitude level of the emission previously measured directly in step b) and step c).
  - 3) Record the output power level of the signal generator when equivalence is achieved in step 2).
- h) Repeat step e) through step g) with the measurement antenna oriented in the opposite polarization.
- i) Calculate the emission power in dBm referenced to a half-wave dipole using the following equation:
 
$$P_e = P_s(\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$
 where
  - $P_e$  = equivalent emission power in dBm
  - $P_s$  = source (signal generator) power in dBm
 NOTE—dBd refers to the measured antenna gain in decibels relative to a half-wave dipole.
- j) Correct the antenna gain of the substitution antenna if necessary to reference the emission power to a half-wave dipole. When using measurement antennas with the gain specified in dBi, the equivalent dipole-referenced gain can be determined from:  $\text{gain (dBd)} = \text{gain (dBi)} - 2.15 \text{ dB}$ . If necessary, the antenna gain can be calculated from calibrated antenna factor information
- k) Provide the complete measurement results as a part of the test report.

## 4. Test DATA AND RESULTS

### 4.1 Antenna Port Test Data and Results for GSM 850 band:

|                |         |              |              |
|----------------|---------|--------------|--------------|
| Serial Number: | 2C4U-1  | Test Date:   | 2023/11/4    |
| Test Site:     | RF      | Test Mode:   | Transmitting |
| Tester:        | Rod Luo | Test Result: | <b>Pass</b>  |

#### Environmental Conditions:

|                   |       |                        |       |                     |     |
|-------------------|-------|------------------------|-------|---------------------|-----|
| Temperature: (°C) | 25~26 | Relative Humidity: (%) | 46~47 | ATM Pressure: (kPa) | 101 |
|-------------------|-------|------------------------|-------|---------------------|-----|

#### Test Equipment List and Details:

| Manufacturer  | Description                         | Model        | Serial Number   | Calibration Date | Calibration Due Date |
|---------------|-------------------------------------|--------------|-----------------|------------------|----------------------|
| R&S           | Spectrum Analyzer                   | FSU26        | 200120          | 2023/4/18        | 2024/4/17            |
| zhuoxiang     | Coaxial Cable                       | SMA-178      | 211002          | Each time        | N/A                  |
| Minl-Circuits | Power Splitter                      | ZFRSC-183-S+ | S F448201619    | Each time        | N/A                  |
| R&S           | Wideband Radio Communication Tester | CMW500       | 143458          | 2023/3/31        | 2024/3/30            |
| BACL          | TEMP&HUMI Test Chamber              | BTH-150-40   | 30174           | 2023/3/31        | 2024/3/30            |
| UNI-T         | Multimeter                          | UT39A+       | C210582554      | 2023/9/28        | 2024/9/27            |
| ZHAOXIN       | DC Power Supply                     | RXN-6010D    | 21R6010D0912386 | N/A              | N/A                  |

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

#### Test Frequency for Each Mode:

| Operation Modes | Lowest Frequency (MHz) | Middle Frequency (MHz) | Highest Frequency (MHz) |
|-----------------|------------------------|------------------------|-------------------------|
| GSM             | 824.2                  | 836.6                  | 848.8                   |
| GPRS            | 824.2                  | 836.6                  | 848.8                   |
| EDGE            | 824.2                  | 836.6                  | 848.8                   |

**Test Data:**

| <b>FCC§2.1046;§ 22.913 (a):RF Output Power</b> |                                  |                |                 |                   |                 |
|--|----------------------------------|----------------|-----------------|-------------------|-----------------|
| Test Mode                                      | Conducted Peak Output Power(dBm) |                |                 | Maximum ERP (dBm) | ERP Limit (dBm) |
|  | Lowest Channel                   | Middle Channel | Highest Channel |                   |                 |
| GSM  | 32.14                            | 32.24          | 32.27           | 28.8              | 38.45           |
| GPRS 1 Slot                                    | 32.15                            | 32.3           | 32.29           | 28.83             | 38.45           |
| GPRS 2 Slots                                   | 31.35                            | 31.44          | 31.55           | 28.08             | 38.45           |
| GPRS 3 Slots                                   | 29.49                            | 29.57          | 29.66           | 26.19             | 38.45           |
| GPRS 4 Slots                                   | 28.36                            | 28.43          | 28.51           | 25.04             | 38.45           |
| EDGE 1 Slot                                    | 26.59                            | 26.56          | 26.54           | 23.12             | 38.45           |
| EDGE 2 Slots                                   | 25.49                            | 25.45          | 25.34           | 22.02             | 38.45           |
| EDGE 3 Slots                                   | 23.36                            | 23.28          | 23.12           | 19.89             | 38.45           |
| EDGE 4 Slots                                   | 22.15                            | 21.99          | 22.12           | 18.68             | 38.45           |

Note:  
 ERP= Conducted Power(dBm) - Lc(dB) + Gr(dBd)  
 Gr(dBd)=Gr(dBi)-2.15

|                |             |
|----------------|-------------|
| <b>Result:</b> | <b>Pass</b> |
|----------------|-------------|

| <b>FCC §2.1049, §22.917, §22.905:Occupied Bandwidth</b> |                              |                |              |                                |                |              |
|---|------------------------------|----------------|--------------|--------------------------------|----------------|--------------|
| Operation Mode  | 99% Occupied Bandwidth (kHz) |                |              | 26 dB Occupied Bandwidth (kHz) |                |              |
|   | Low Channel                  | Middle channel | High Channel | Low Channel                    | Middle Channel | High Channel |
| GSM   | 0.243                        | 0.243          | 0.242        | 0.301                          | 0.300          | 0.301        |
| EDGE  | 0.24                         | 0.243          | 0.243        | 0.289                          | 0.304          | 0.307        |

Note: The test plots please refer to the Plots of Occupied Bandwidth

| <b>FCC §2.1051, §22.917(a):Spurious Emissions at Antenna Terminal</b> |  |
|---|--|
| <b>Result:</b>  | <b>Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.</b> |

| <b>FCC §2.1051, §22.917(a):Out of band emission, Band Edge</b> |   |
|--|---|
| <b>Result:</b>   | <b>Pass, Please refer to the test plots of Out of band emission, Band Edge.</b> |







| <b>FCC §2.1055, §22.355: Frequency Stability</b> |                  |                            |                 |                |             |
|--|------------------|----------------------------|-----------------|----------------|-------------|
| Test Modulation:                                 | GMSK             |                            | Test Channel:   | 836.6          | MHz         |
| Test Item  | Temperature (°C) | Voltage (V <sub>DC</sub> ) | Frequency Error |                | Limit       |
|  |                  |                            | (Hz)            | (ppm)          | (ppm)       |
| Frequency Stability vs. Temperature              | -30              | 3.85                       | 112.929         | 0.135          | 2.5         |
|  | -20              | 3.85                       | 107.356         | 0.128          | 2.5         |
|  | -10              | 3.85                       | 107.216         | 0.128          | 2.5         |
|  | 0                | 3.85                       | 101.146         | 0.121          | 2.5         |
|  | 10               | 3.85                       | 109.785         | 0.131          | 2.5         |
|  | 20               | 3.85                       | 103.067         | 0.123          | 2.5         |
|  | 30               | 3.85                       | 107.769         | 0.129          | 2.5         |
|  | 40               | 3.85                       | 118.313         | 0.141          | 2.5         |
|  | 50               | 3.85                       | 107.186         | 0.128          | 2.5         |
| Frequency Stability vs. Voltage                  | 20               | 3.47                       | 108.794         | 0.130          | 2.5         |
|  | 20               | 4.24                       | 123.442         | 0.148          | 2.5         |
|  |                  |                            |                 | <b>Result:</b> | <b>Pass</b> |

| Test Modulation:                    | 8PSK             |                            | Test Channel:   | 836.6          | MHz         |
|-------------------------------------|------------------|----------------------------|-----------------|----------------|-------------|
| Test Item                           | Temperature (°C) | Voltage (V <sub>DC</sub> ) | Frequency Error |                | Limit       |
|                                     |                  |                            | (Hz)            | (ppm)          | (ppm)       |
| Frequency Stability vs. Temperature | -30              | 3.85                       | 113.941         | 0.136          | 2.5         |
|                                     | -20              | 3.85                       | 104.963         | 0.125          | 2.5         |
|                                     | -10              | 3.85                       | 107.389         | 0.128          | 2.5         |
|                                     | 0                | 3.85                       | 100.506         | 0.120          | 2.5         |
|                                     | 10               | 3.85                       | 112.992         | 0.135          | 2.5         |
|                                     | 20               | 3.85                       | 99.963          | 0.119          | 2.5         |
|                                     | 30               | 3.85                       | 115.411         | 0.138          | 2.5         |
|                                     | 40               | 3.85                       | 120.279         | 0.144          | 2.5         |
|                                     | 50               | 3.85                       | 110.048         | 0.132          | 2.5         |
| Frequency Stability vs. Voltage     | 20               | 3.47                       | 116.913         | 0.140          | 2.5         |
|                                     | 20               | 4.24                       | 124.527         | 0.149          | 2.5         |
|                                     |                  |                            |                 | <b>Result:</b> | <b>Pass</b> |

**Test Plots** (Note: The 11.5 dB is the Insertion loss of the RF cable and Power Splitter, which was offset into the Spectrum Analyzer):

| Occupied Bandwidth |  |  |
|--------------------|--|--|
| Channel            | GSM  | EDGE   |
| Lowest             | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 4.NOV.2023 15:25:22</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 4.NOV.2023 16:14:44</p> |
| Middle             | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 4.NOV.2023 15:16:34</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 4.NOV.2023 16:23:21</p> |
| Highest            | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 4.NOV.2023 14:56:35</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 4.NOV.2023 16:29:52</p> |

Spurious Emissions at Antenna Terminal
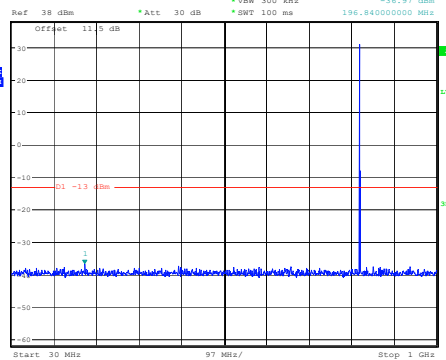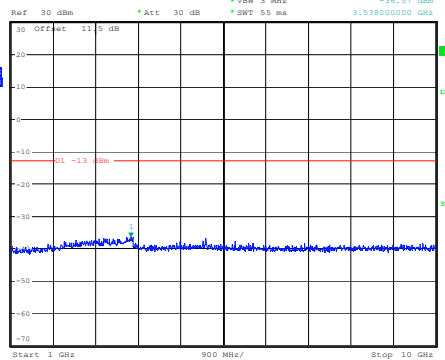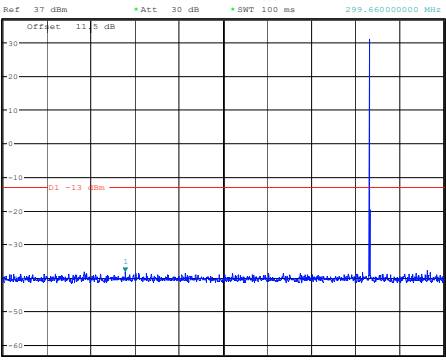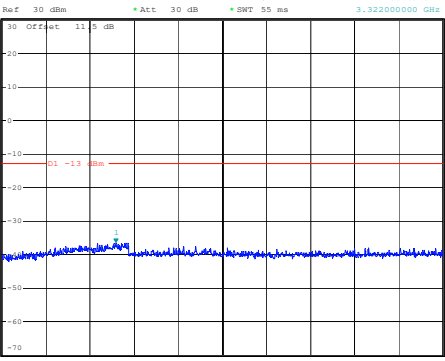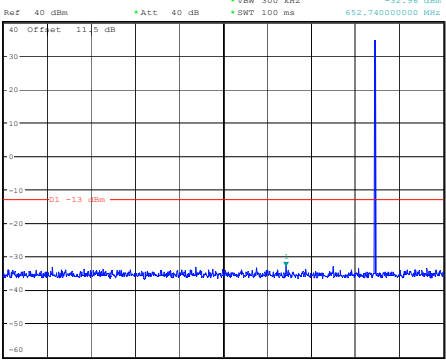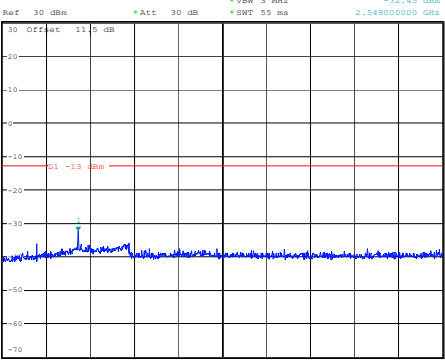
| Channel | GSM   |  |
|---------|---|--|
| Lowest  |  <p>Ref 38 dBm *Att 30 dB *RSW 100 kHz *VSW 300 kHz *SWT 100 ms Marker 1 [T1] -26.97 dBm<br/>196.84000000 MHz</p> <p>Offset 11.5 dB</p> <p>Start 30 MHz 97 MHz/ Stop 1 GHz</p> <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 4.NOV.2023 16:43:33</p>    |  <p>Ref 30 dBm *Att 30 dB *RSW 1 MHz *VSW 3 MHz *SWT 55 ms Marker 1 [T1] -36.57 dBm<br/>3.538000000 GHz</p> <p>Offset 11.5 dB</p> <p>Start 1 GHz 900 MHz/ Stop 10 GHz</p> <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 4.NOV.2023 16:17:25</p>   |
| Middle  |  <p>Ref 37 dBm *Att 30 dB *RSW 100 kHz *VSW 300 kHz *SWT 100 ms Marker 1 [T1] -38.36 dBm<br/>299.66000000 MHz</p> <p>Offset 11.5 dB</p> <p>Start 30 MHz 97 MHz/ Stop 1 GHz</p> <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 4.NOV.2023 16:45:38</p>   |  <p>Ref 30 dBm *Att 30 dB *RSW 1 MHz *VSW 3 MHz *SWT 55 ms Marker 1 [T1] -36.69 dBm<br/>3.322000000 GHz</p> <p>Offset 11.5 dB</p> <p>Start 1 GHz 900 MHz/ Stop 10 GHz</p> <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 4.NOV.2023 16:25:27</p>  |
| Highest |  <p>Ref 40 dBm *Att 40 dB *RSW 100 kHz *VSW 300 kHz *SWT 100 ms Marker 1 [T1] -32.96 dBm<br/>652.740000000 MHz</p> <p>Offset 11.5 dB</p> <p>Start 30 MHz 97 MHz/ Stop 1 GHz</p> <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 4.NOV.2023 15:08:26</p> |  <p>Ref 30 dBm *Att 30 dB *RSW 1 MHz *VSW 3 MHz *SWT 55 ms Marker 1 [T1] -32.45 dBm<br/>2.548000000 GHz</p> <p>Offset 11.5 dB</p> <p>Start 1 GHz 900 MHz/ Stop 10 GHz</p> <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 4.NOV.2023 15:08:55</p> |

Out of band emission, Band Edge

| Mode | Lowest   | Highest  |
|------|--|--|
| GSM  | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 4.NOV.2023 15:33:18</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 4.NOV.2023 15:39:16</p> |
| EDGE | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 4.NOV.2023 16:15:48</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 4.NOV.2023 16:30:57</p> |



**4.2 Antenna Port Test Data and Results for GSM 1900 band:**

|                |         |              |              |
|----------------|---------|--------------|--------------|
| Serial Number: | 2C4U-1  | Test Date:   | 2023/11/4    |
| Test Site:     | RF      | Test Mode:   | Transmitting |
| Tester:        | Rod Luo | Test Result: | <b>Pass</b>  |

**Environmental Conditions:**

|                      |       |                           |       |                        |     |
|----------------------|-------|---------------------------|-------|------------------------|-----|
| Temperature:<br>(°C) | 25~26 | Relative Humidity:<br>(%) | 46~47 | ATM Pressure:<br>(kPa) | 101 |
|----------------------|-------|---------------------------|-------|------------------------|-----|

**Test Equipment List and Details:**

| Manufacturer  | Description                         | Model        | Serial Number   | Calibration Date | Calibration Due Date |
|---------------|-------------------------------------|--------------|-----------------|------------------|----------------------|
| R&S           | Spectrum Analyzer                   | FSU26        | 200120          | 2023/4/18        | 2024/4/17            |
| zhuoxiang     | Coaxial Cable                       | SMA-178      | 211002          | Each time        | N/A                  |
| Minl-Circuits | Power Splitter                      | ZFRSC-183-S+ | S F448201619    | Each time        | N/A                  |
| R&S           | Wideband Radio Communication Tester | CMW500       | 143458          | 2023/3/31        | 2024/3/30            |
| BACL          | TEMP&HUMI Test Chamber              | BTH-150-40   | 30174           | 2023/3/31        | 2024/3/30            |
| UNI-T         | Multimeter                          | UT39A+       | C210582554      | 2023/9/28        | 2024/9/27            |
| ZHAOXIN       | DC Power Supply                     | RXN-6010D    | 21R6010D0912386 | N/A              | N/A                  |

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Frequency for Each Mode:**

| Operation Modes | Lowest Frequency (MHz) | Middle Frequency (MHz) | Highest Frequency (MHz) |
|-----------------|------------------------|------------------------|-------------------------|
| GSM             | 1850.2                 | 1880                   | 1909.8                  |
| GPRS            | 1850.2                 | 1880                   | 1909.8                  |
| EDGE            | 1850.2                 | 1880                   | 1909.8                  |

**Test Data:**

| <b>FCC§2.1046;§ 24.232 (c):RF Output Power</b> |                                  |                |                 |                    |                  |
|--|----------------------------------|----------------|-----------------|--------------------|------------------|
| Test Mode                                      | Conducted Peak Output Power(dBm) |                |                 | Maximum EIRP (dBm) | EIRP Limit (dBm) |
|  | Lowest Channel                   | Middle Channel | Highest Channel |                    |                  |
| GSM  | 28.34                            | 28.67          | 28.71           | 29.09              | 33               |
| GPRS 1 Slot                                    | 28.41                            | 28.72          | 28.75           | 29.13              | 33               |
| GPRS 2 Slots                                   | 27.61                            | 27.92          | 27.97           | 28.35              | 33               |
| GPRS 3 Slots                                   | 25.9                             | 26.2           | 26.25           | 26.63              | 33               |
| GPRS 4 Slots                                   | 24.79                            | 25.08          | 25.14           | 25.52              | 33               |
| EDGE 1 Slot                                    | 25.2                             | 24.79          | 24.75           | 25.58              | 33               |
| EDGE 2 Slots                                   | 24.23                            | 23.83          | 23.89           | 24.61              | 33               |
| EDGE 3 Slots                                   | 22.56                            | 22.09          | 22.26           | 22.94              | 33               |
| EDGE 4 Slots                                   | 21.5                             | 21.07          | 21.34           | 21.88              | 33               |

Note: EIRP=Conducted Power(dBm) - Lc(dB) + Gr(dBi)

|                |             |
|----------------|-------------|
| <b>Result:</b> | <b>Pass</b> |
|----------------|-------------|

| <b>FCC §2.1049, §24.238:Occupied Bandwidth</b> |                              |                |              |                                |                |              |
|--|------------------------------|----------------|--------------|--------------------------------|----------------|--------------|
| Operation Mode                                 | 99% Occupied Bandwidth (kHz) |                |              | 26 dB Occupied Bandwidth (kHz) |                |              |
|  | Low Channel                  | Middle channel | High Channel | Low Channel                    | Middle Channel | High Channel |
| GSM  | 0.242                        | 0.243          | 0.242        | 0.300                          | 0.297          | 0.293        |
| EDGE   | 0.245                        | 0.242          | 0.243        | 0.302                          | 0.292          | 0.313        |

Note: The test plots please refer to the Plots of Occupied Bandwidth

| <b>FCC §2.1051, § 24.238 (a):Spurious Emissions at Antenna Terminal</b> |  |
|---|--|
| <b>Result:</b>  | <b>Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.</b> |

| <b>FCC §2.1051, § 24.238 (a):Out of band emission, Band Edge</b> |   |
|--|---|
| <b>Result:</b>   | <b>Pass, Please refer to the test plots of Out of band emission, Band Edge.</b> |

| <b>FCC §2.1055, §24.235: Frequency Stability</b> |                  |  |                  |          |                  |             |
|--|------------------|--|------------------|----------|------------------|-------------|
| Test Mode:                                       | GMSK             | Test Channel: Lowest for Lower Edge,Highest for Upper Edge |                  |          |                  |             |
| Test Item  | Temperature (°C) | Voltage (V <sub>DC</sub> )                                 | Lower Edge (MHz) |          | Upper Edge (MHz) |             |
|  |                  |  | Result           | Limit    | Result           | Limit       |
| Frequency Stability vs. Temperature              | -30              | 3.85   | 1850.096         | 1850.000 | 1909.958         | 1910.000    |
|  | -20              | 3.85   | 1850.054         | 1850.000 | 1909.959         | 1910.000    |
|  | -10              | 3.85   | 1850.007         | 1850.000 | 1909.974         | 1910.000    |
|  | 0                | 3.85   | 1850.044         | 1850.000 | 1909.961         | 1910.000    |
|  | 10               | 3.85   | 1850.077         | 1850.000 | 1909.936         | 1910.000    |
|  | 20               | 3.85   | 1850.084         | 1850.000 | 1909.967         | 1910.000    |
|  | 30               | 3.85   | 1850.022         | 1850.000 | 1909.873         | 1910.000    |
|  | 40               | 3.85   | 1850.145         | 1850.000 | 1909.915         | 1910.000    |
|  | 50               | 3.85   | 1850.105         | 1850.000 | 1909.882         | 1910.000    |
| Frequency Stability vs. Voltage                  | 20               | 3.47   | 1850.038         | 1850.000 | 1909.932         | 1910.000    |
|  | 20               | 4.24   | 1850.047         | 1850.000 | 1909.902         | 1910.000    |
|  |                  |  |                  |          | <b>Result:</b>   | <b>Pass</b> |

| Test Mode:                          | 8PSK             | Test Channel: Lowest for Lower Edge,Highest for Upper Edge |                  |          |                  |             |
|-------------------------------------|------------------|--|------------------|----------|------------------|-------------|
| Test Item                           | Temperature (°C) | Voltage (V <sub>DC</sub> )                                 | Lower Edge (MHz) |          | Upper Edge (MHz) |             |
|                                     |                  |  | Result           | Limit    | Result           | Limit       |
| Frequency Stability vs. Temperature | -30              | 3.85   | 1850.134         | 1850.000 | 1909.859         | 1910.000    |
|                                     | -20              | 3.85   | 1850.083         | 1850.000 | 1909.928         | 1910.000    |
|                                     | -10              | 3.85   | 1850.106         | 1850.000 | 1909.896         | 1910.000    |
|                                     | 0                | 3.85   | 1850.111         | 1850.000 | 1909.883         | 1910.000    |
|                                     | 10               | 3.85   | 1850.017         | 1850.000 | 1909.866         | 1910.000    |
|                                     | 20               | 3.85   | 1850.145         | 1850.000 | 1909.949         | 1910.000    |
|                                     | 30               | 3.85   | 1850.137         | 1850.000 | 1909.929         | 1910.000    |
|                                     | 40               | 3.85   | 1850.098         | 1850.000 | 1909.978         | 1910.000    |
|                                     | 50               | 3.85   | 1850.124         | 1850.000 | 1909.958         | 1910.000    |
| Frequency Stability vs. Voltage     | 20               | 3.47   | 1850.056         | 1850.000 | 1909.872         | 1910.000    |
|                                     | 20               | 4.24   | 1850.093         | 1850.000 | 1909.937         | 1910.000    |
|                                     |                  |  |                  |          | <b>Result:</b>   | <b>Pass</b> |

**Test Plots** (Note: The 11.5 dB is the Insertion loss of the RF cable and Power Splitter, which was offset into the Spectrum Analyzer):

| <b>Occupied Bandwidth</b> |  |  |
|---------------------------|--|--|
| <b>Channel</b>            | <b>GSM</b>   | <b>EDGE</b>  |
| <b>Lowest</b>             | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 4.NOV.2023 14:37:38</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 4.NOV.2023 13:21:12</p> |
| <b>Middle</b>             | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 4.NOV.2023 14:12:49</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 4.NOV.2023 13:30:02</p> |
| <b>Highest</b>            | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 4.NOV.2023 14:43:51</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 4.NOV.2023 13:35:35</p> |

Spurious Emissions at Antenna Terminal

| Channel | GSM  |  |
|---------|--|--|
| Lowest  | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 4.NOV.2023 14:39:00</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 4.NOV.2023 14:40:41</p> |
| Middle  | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 4.NOV.2023 14:13:19</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 4.NOV.2023 14:32:48</p> |
| Highest | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 4.NOV.2023 17:02:19</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 4.NOV.2023 14:47:19</p> |

Out of band emission, Band Edge

| Channel | Lowest   | Highest  |
|---------|--|--|
| GSM     | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 4.NOV.2023 17:07:36</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 4.NOV.2023 14:44:50</p> |
| EDGE    | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 4.NOV.2023 17:14:44</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 4.NOV.2023 13:37:22</p> |

**4.3 Antenna Port Test Data and Results for LTE Band 5**

|                |         |              |                      |
|----------------|---------|--------------|----------------------|
| Serial Number: | 2C4U-1  | Test Date:   | 2023/11/3~2023/12/16 |
| Test Site:     | RF      | Test Mode:   | Transmitting         |
| Tester:        | Rod Luo | Test Result: | Pass                 |

**Environmental Conditions:**

|                      |       |                           |       |                        |     |
|----------------------|-------|---------------------------|-------|------------------------|-----|
| Temperature:<br>(°C) | 25~26 | Relative Humidity:<br>(%) | 46~47 | ATM Pressure:<br>(kPa) | 101 |
|----------------------|-------|---------------------------|-------|------------------------|-----|

**Test Equipment List and Details:**

| Manufacturer  | Description                         | Model        | Serial Number   | Calibration Date | Calibration Due Date |
|---------------|-------------------------------------|--------------|-----------------|------------------|----------------------|
| R&S           | Spectrum Analyzer                   | FSU26        | 200120          | 2023/4/18        | 2024/4/17            |
| zhuoxiang     | Coaxial Cable                       | SMA-178      | 211002          | Each time        | N/A                  |
| Mini-Circuits | Power Splitter                      | ZFRSC-183-S+ | S F448201619    | Each time        | N/A                  |
| R&S           | Wideband Radio Communication Tester | CMW500       | 143458          | 2023/3/31        | 2024/3/30            |
| BACL          | TEMP&HUMI Test Chamber              | BTH-150-40   | 30174           | 2023/3/31        | 2024/3/30            |
| UNI-T         | Multimeter                          | UT39A+       | C210582554      | 2023/9/28        | 2024/9/27            |
| ZHAOXIN       | DC Power Supply                     | RXN-6010D    | 21R6010D0912386 | N/A              | N/A                  |

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Frequency for Each Mode:**

| Operation Bandwidth | Lowest Frequency (MHz) | Middle Frequency (MHz) | Highest Frequency (MHz) |
|---------------------|------------------------|------------------------|-------------------------|
| 1.4MHz              | 824.7                  | 836.5                  | 848.3                   |
| 3MHz                | 825.5                  | 836.5                  | 847.5                   |
| 5MHz                | 826.5                  | 836.5                  | 846.5                   |
| 10MHz               | 829                    | 836.5                  | 844                     |

**Test Data:****FCC§2.1046;§ 22.913 (a)****RF Output Power:**

| Test Bandwidth & Modulation | Resource Block & RB offset | Conducted Average Output Power(dBm) |                |                 | Maximum ERP (dBm) | ERP Limit (dBm) |
|-----------------------------|----------------------------|-------------------------------------|----------------|-----------------|-------------------|-----------------|
|                             |                            | Lowest Channel                      | Middle Channel | Highest Channel |                   |                 |
| 1.4MHz QPSK                 | RB1#0                      | 23.76                               | 23.75          | 23.72           | 20.46             | 38.45           |
|                             | RB1#3                      | 23.93                               | 23.92          | 23.47           |                   |                 |
|                             | RB1#5                      | 23.72                               | 23.69          | 23.26           |                   |                 |
|                             | RB3#0                      | 23.83                               | 23.64          | 23.38           |                   |                 |
|                             | RB3#3                      | 23.84                               | 23.72          | 23.34           |                   |                 |
|                             | RB6#0                      | 22.82                               | 22.73          | 22.43           |                   |                 |
| 1.4MHz 16QAM                | RB1#0                      | 22.71                               | 22.57          | 22.39           | 19.49             | 38.45           |
|                             | RB1#3                      | 22.88                               | 22.91          | 22.57           |                   |                 |
|                             | RB1#5                      | 22.71                               | 22.73          | 22.41           |                   |                 |
|                             | RB3#0                      | 22.82                               | 22.96          | 22.29           |                   |                 |
|                             | RB3#3                      | 22.86                               | 22.95          | 22.34           |                   |                 |
|                             | RB6#0                      | 21.85                               | 21.91          | 21.46           |                   |                 |
| 3MHz QPSK                   | RB1#0                      | 23.74                               | 23.33          | 23.29           | 20.27             | 38.45           |
|                             | RB1#8                      | 23.5                                | 23.25          | 23.33           |                   |                 |
|                             | RB1#14                     | 23.29                               | 23.21          | 23.3            |                   |                 |
|                             | RB6#0                      | 22.21                               | 22.24          | 22.24           |                   |                 |
|                             | RB6#9                      | 22.23                               | 22.26          | 22.19           |                   |                 |
|                             | RB15#0                     | 22.25                               | 22.29          | 22.29           |                   |                 |
| 3MHz 16QAM                  | RB1#0                      | 22.24                               | 22.79          | 22.48           | 19.32             | 38.45           |
|                             | RB1#8                      | 22.26                               | 22.78          | 22.42           |                   |                 |
|                             | RB1#14                     | 22.28                               | 22.75          | 22.41           |                   |                 |
|                             | RB6#0                      | 21.22                               | 21.34          | 21.36           |                   |                 |
|                             | RB6#9                      | 21.3                                | 21.41          | 21.32           |                   |                 |
|                             | RB15#0                     | 21.33                               | 21.37          | 21.3            |                   |                 |
| 5MHz QPSK                   | RB1#0                      | 23.65                               | 23.2           | 23.28           | 20.31             | 38.45           |
|                             | RB1#13                     | 23.78                               | 23.36          | 23.4            |                   |                 |
|                             | RB1#24                     | 23.72                               | 23.21          | 23.24           |                   |                 |
|                             | RB15#0                     | 22.69                               | 22.31          | 22.34           |                   |                 |
|                             | RB15#10                    | 22.72                               | 22.31          | 22.35           |                   |                 |
|                             | RB25#0                     | 22.56                               | 22.32          | 22.32           |                   |                 |
| 5MHz 16QAM                  | RB1#0                      | 22.38                               | 22.13          | 22.54           | 19.16             | 38.45           |
|                             | RB1#13                     | 22.46                               | 22.23          | 22.63           |                   |                 |
|                             | RB1#24                     | 22.35                               | 22.14          | 22.47           |                   |                 |
|                             | RB15#0                     | 21.43                               | 21.4           | 21.36           |                   |                 |
|                             | RB15#10                    | 21.52                               | 21.44          | 21.36           |                   |                 |
|                             | RB25#0                     | 21.38                               | 21.37          | 21.37           |                   |                 |
| 10MHz QPSK                  | RB1#0                      | 23.88                               | 23.4           | 23.36           | 20.55             | 38.45           |



|             |         |       |       |       |       |       |
|-------------|---------|-------|-------|-------|-------|-------|
|             | RB1#25  | 24.02 | 23.51 | 23.53 |       |       |
|             | RB1#49  | 23.45 | 23.44 | 23.45 |       |       |
|             | RB25#0  | 22.39 | 22.46 | 22.45 |       |       |
|             | RB25#25 | 22.4  | 22.4  | 22.45 |       |       |
|             | RB50#0  | 22.34 | 22.42 | 22.44 |       |       |
| 10MHz 16QAM | RB1#0   | 22.35 | 22.91 | 22.54 | 19.53 | 38.45 |
|             | RB1#25  | 22.54 | 23    | 22.66 |       |       |
|             | RB1#49  | 22.33 | 22.97 | 22.5  |       |       |
|             | RB25#0  | 21.43 | 21.56 | 21.52 |       |       |
|             | RB25#25 | 21.49 | 21.52 | 21.51 |       |       |
|             | RB50#0  | 21.39 | 21.48 | 21.48 |       |       |

Note: ERP= Conducted Power(dBm) - Lc(dB) + Gr(dBd)  
Gr(dBd)=Gr(dBi)-2.15

**Result:** Pass

### Peak-to-average Ratio(PAR)

| Test Bandwidth & Modulation | Resource Block & RB offset | Peak-to-average Ratio(dB) |                |                 | Limit (dB)  |
|-----------------------------|----------------------------|---------------------------|----------------|-----------------|-------------|
|                             |                            | Lowest Channel            | Middle Channel | Highest Channel |             |
| 10MHz QPSK                  | RB1#0                      | 4.62                      | 4.29           | 4.87            | 13          |
|                             | RB50#0                     | 5.45                      | 5.48           | 5.61            | 13          |
| 10MHz 16QAM                 | RB1#0                      | 5.64                      | 5.13           | 5.80            | 13          |
|                             | RB50#0                     | 6.31                      | 6.31           | 6.41            | 13          |
| <b>Result:</b>              |                            |                           |                |                 | <b>Pass</b> |

### FCC §2.1049, §22.905:Occupied Bandwidth

| Operation Mode | 99% Occupied Bandwidth (MHz) |                |              | 26 dB Occupied Bandwidth (MHz) |                |              |
|----------------|------------------------------|----------------|--------------|--------------------------------|----------------|--------------|
|                | Low Channel                  | Middle channel | High Channel | Low Channel                    | Middle Channel | High Channel |
| 1.4MHz QPSK    | 1.104                        | 1.104          | 1.098        | 1.296                          | 1.308          | 1.308        |
| 1.4MHz 16QAM   | 1.098                        | 1.110          | 1.092        | 1.290                          | 1.302          | 1.290        |
| 3MHz QPSK      | 2.688                        | 2.688          | 2.676        | 2.904                          | 2.880          | 2.880        |
| 3MHz 16QAM     | 2.688                        | 2.676          | 2.688        | 2.880                          | 2.868          | 2.868        |
| 5MHz QPSK      | 4.480                        | 4.520          | 4.500        | 4.900                          | 4.980          | 5.140        |
| 5MHz 16QAM     | 4.500                        | 4.520          | 4.500        | 4.920                          | 4.940          | 4.960        |
| 10MHz QPSK     | 8.960                        | 8.960          | 8.960        | 9.600                          | 9.560          | 9.600        |
| 10MHz 16QAM    | 8.960                        | 8.960          | 8.960        | 9.480                          | 9.560          | 9.600        |

Note: The test plots please refer to the Plots of Occupied Bandwidth

### FCC §2.1051, §22.917(a):Spurious Emissions at Antenna Terminal

|                |  |
|----------------|--|
| <b>Result:</b> | <b>Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.</b> |
|----------------|--|

**FCC §2.1051, §22.917(a): Out of band emission, Band Edge****Result:** Pass, Please refer to the test plots of Out of band emission, Band Edge.**FCC §2.1055, §22.355: Frequency Stability**

| Test Modulation:                    | 10 MHz QPSK      |                            | Test Channel:   | 836.5       | MHz   |
|-------------------------------------|------------------|----------------------------|-----------------|-------------|-------|
| Test Item                           | Temperature (°C) | Voltage (V <sub>DC</sub> ) | Frequency Error |             | Limit |
|                                     |                  |                            | (Hz)            | (ppm)       | (ppm) |
| Frequency Stability vs. Temperature | -30              | 3.85                       | 105.349         | 0.126       | 2.5   |
|                                     | -20              | 3.85                       | 97.677          | 0.117       | 2.5   |
|                                     | -10              | 3.85                       | 105.772         | 0.126       | 2.5   |
|                                     | 0                | 3.85                       | 102.462         | 0.122       | 2.5   |
|                                     | 10               | 3.85                       | 102.946         | 0.123       | 2.5   |
|                                     | 20               | 3.85                       | 106.688         | 0.128       | 2.5   |
|                                     | 30               | 3.85                       | 99.775          | 0.119       | 2.5   |
|                                     | 40               | 3.85                       | 100.364         | 0.120       | 2.5   |
| Frequency Stability vs. Voltage     | 20               | 3.47                       | 104.120         | 0.124       | 2.5   |
|                                     | 20               | 4.24                       | 99.425          | 0.119       | 2.5   |
| <b>Result:</b>                      |                  |                            |                 | <b>Pass</b> |       |

| Test Modulation:                    | 10 MHz 16QAM     |                            | Test Channel:   | 836.5       | MHz   |
|-------------------------------------|------------------|----------------------------|-----------------|-------------|-------|
| Test Item                           | Temperature (°C) | Voltage (V <sub>DC</sub> ) | Frequency Error |             | Limit |
|                                     |                  |                            | (Hz)            | (ppm)       | (ppm) |
| Frequency Stability vs. Temperature | -30              | 3.85                       | 96.058          | 0.115       | 2.5   |
|                                     | -20              | 3.85                       | 97.425          | 0.116       | 2.5   |
|                                     | -10              | 3.85                       | 100.825         | 0.121       | 2.5   |
|                                     | 0                | 3.85                       | 105.942         | 0.127       | 2.5   |
|                                     | 10               | 3.85                       | 102.263         | 0.122       | 2.5   |
|                                     | 20               | 3.85                       | 106.573         | 0.127       | 2.5   |
|                                     | 30               | 3.85                       | 98.122          | 0.117       | 2.5   |
|                                     | 40               | 3.85                       | 108.066         | 0.129       | 2.5   |
| Frequency Stability vs. Voltage     | 20               | 3.47                       | 107.178         | 0.128       | 2.5   |
|                                     | 20               | 4.24                       | 99.284          | 0.119       | 2.5   |
| <b>Result:</b>                      |                  |                            |                 | <b>Pass</b> |       |

**Test Plots**(Note: The 10.5 dB is the Insertion loss of the RF cable and Power Splitter, which was offset into the Spectrum Analyzer):

| <b>Occupied Bandwidth</b> |  |  |
|---------------------------|--|--|
| <b>Channel</b>            | <b>1.4MHz Bandwidth QPSK</b>   | <b>1.4MHz Bandwidth 16QAM</b>  |
| <b>Lowest</b>             | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 09:28:22</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 09:28:39</p> |
| <b>Middle</b>             | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 09:29:00</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 09:29:21</p> |
| <b>Highest</b>            | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 09:29:39</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 09:29:56</p> |

Occupied Bandwidth

| Channel | 3MHz Bandwidth QPSK  | 3MHz Bandwidth 16QAM   |
|---------|--|--|
| Lowest  | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 09:31:02</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 09:31:17</p> |
| Middle  | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 09:31:35</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 09:31:53</p> |
| Highest | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 09:32:08</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 09:32:22</p> |

Occupied Bandwidth

| Channel | 5MHz Bandwidth QPSK  | 5MHz Bandwidth 16QAM   |
|---------|--|--|
| Lowest  | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 09:39:46</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 09:40:04</p> |
| Middle  | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 09:40:30</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 09:40:51</p> |
| Highest | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 09:41:10</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 09:41:28</p> |

Occupied Bandwidth


| Channel | 10MHz Bandwidth QPSK   | 10MHz Bandwidth 16QAM  |
|---------|--|--|
| Lowest  | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 09:43:31</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 09:43:50</p> |
| Middle  | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 09:44:09</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 09:44:28</p> |
| Highest | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 09:44:48</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 09:45:06</p> |

Spurious Emissions at Antenna Terminal


Channel

1.4MHz Bandwidth QPSK, full RB

Lowest

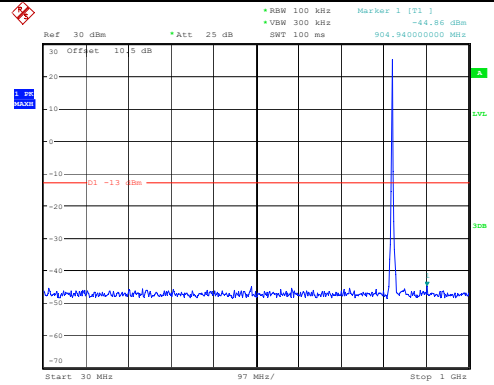


ProjectNo.:CR231059186 Tester:Rod Luo  
Date: 3.NOV.2023 09:59:28

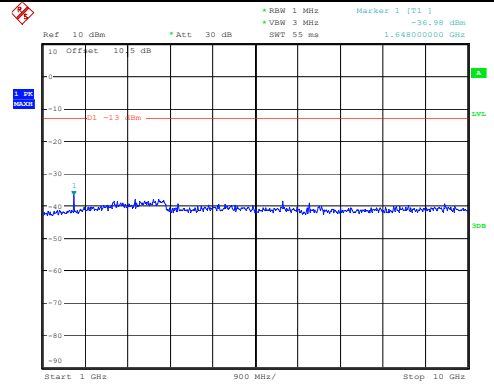


ProjectNo.:CR231059186 Tester:Rod Luo  
Date: 3.NOV.2023 09:59:38

Middle

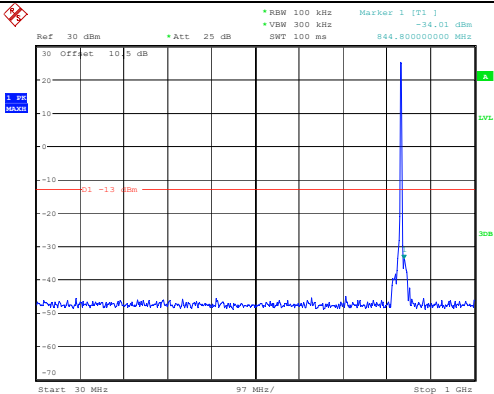


ProjectNo.:CR231059186 Tester:Rod Luo  
Date: 3.NOV.2023 09:59:51

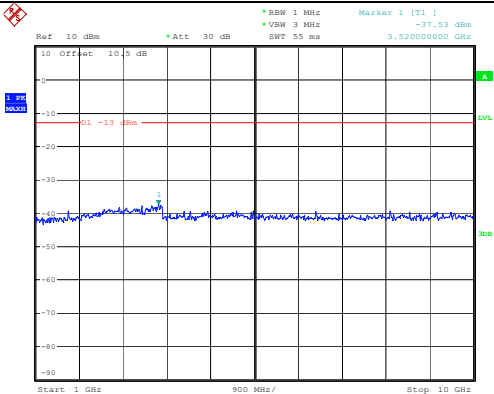


ProjectNo.:CR231059186 Tester:Rod Luo  
Date: 3.NOV.2023 10:00:01

Highest

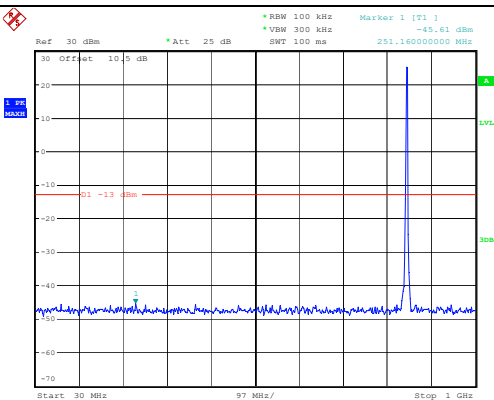

ProjectNo.:CR231059186 Tester:Rod Luo  
Date: 3.NOV.2023 10:00:14

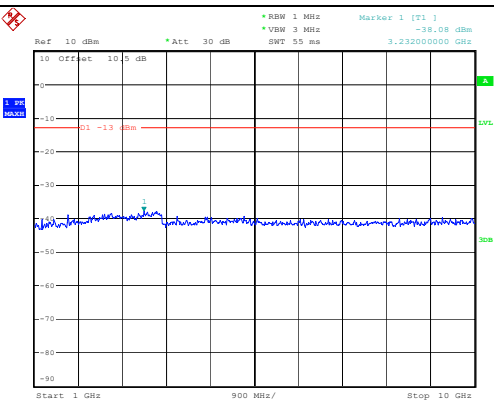


ProjectNo.:CR231059186 Tester:Rod Luo  
Date: 3.NOV.2023 10:00:25

Spurious Emissions at Antenna Terminal


Channel

1.4MHz Bandwidth QPSK, RB1

Lowest

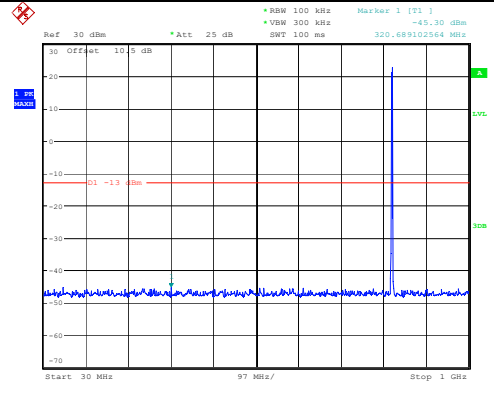


ProjectNo.:CR231059186 Tester:Rod Luo  
Date: 16.DEC.2023 00:01:43

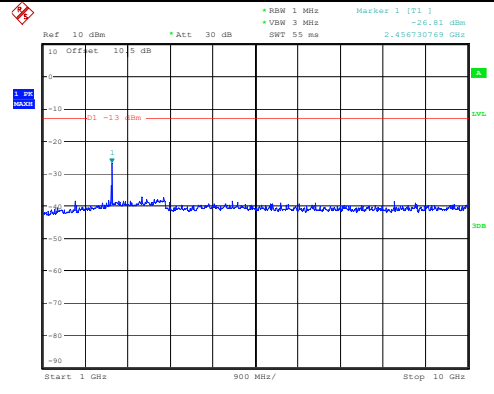


ProjectNo.:CR231059186 Tester:Rod Luo  
Date: 16.DEC.2023 00:30:32

Middle

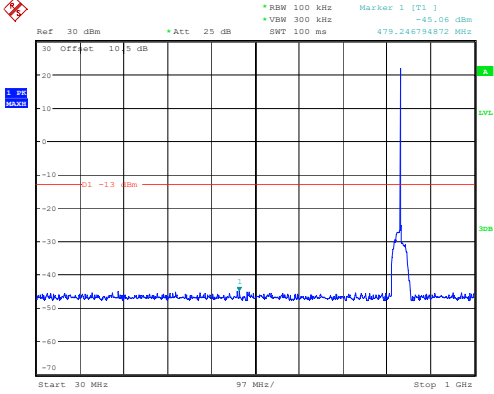


ProjectNo.:CR231059186 Tester:Rod Luo  
Date: 16.DEC.2023 00:03:27

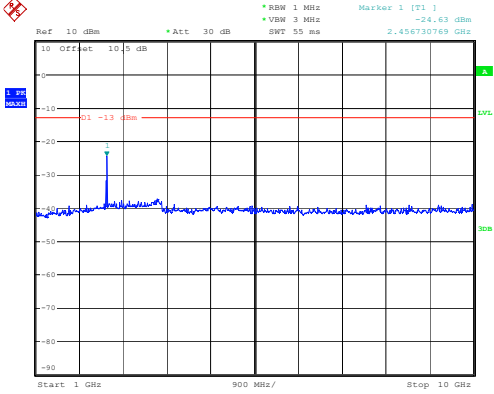


ProjectNo.:CR231059186 Tester:Rod Luo  
Date: 16.DEC.2023 00:31:02

Highest

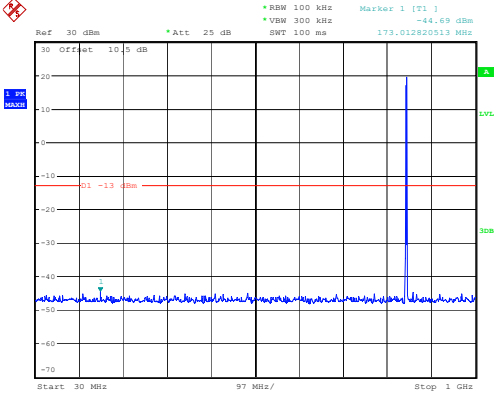

ProjectNo.:CR231059186 Tester:Rod Luo  
Date: 16.DEC.2023 00:04:45

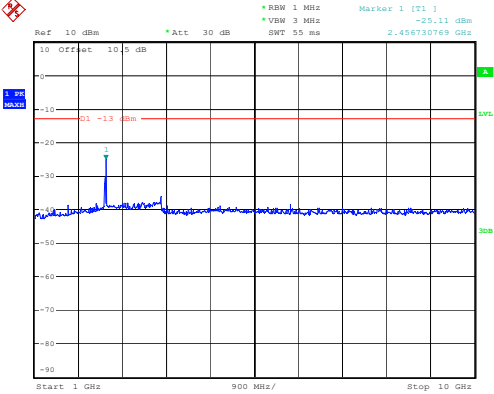

ProjectNo.:CR231059186 Tester:Rod Luo  
Date: 16.DEC.2023 00:31:42




**Spurious Emissions at Antenna Terminal**


**Channel**

**3MHz Bandwidth QPSK, full RB**

Lowest

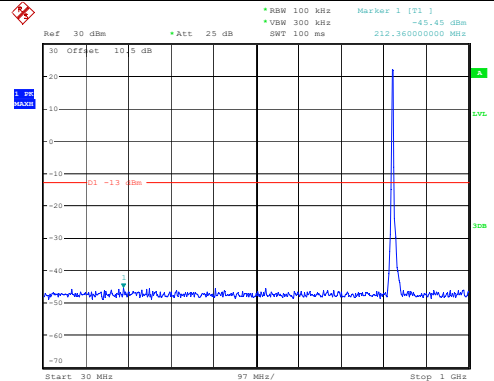


ProjectNo.:CR231059186 Tester:Rod Luo  
 Date: 3.NOV.2023 10:01:04

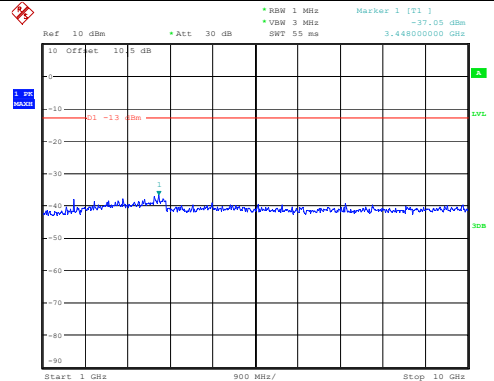


ProjectNo.:CR231059186 Tester:Rod Luo  
 Date: 3.NOV.2023 10:01:14

Middle

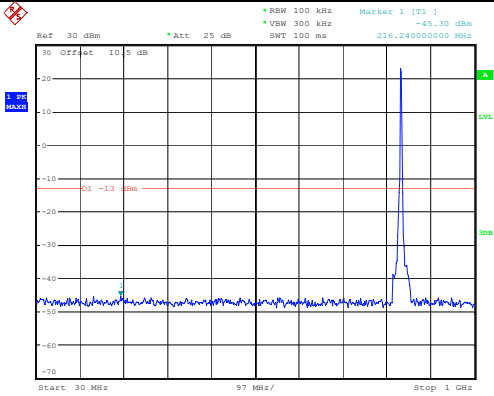


ProjectNo.:CR231059186 Tester:Rod Luo  
 Date: 3.NOV.2023 10:01:30

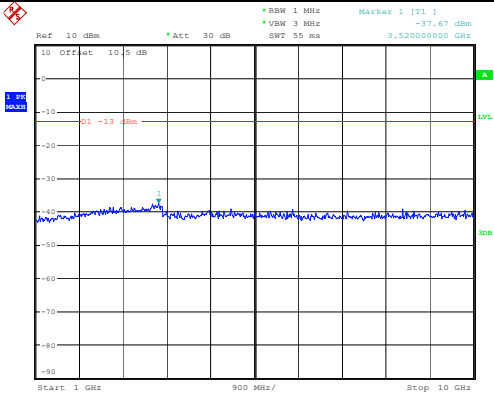


ProjectNo.:CR231059186 Tester:Rod Luo  
 Date: 3.NOV.2023 10:01:40

Highest

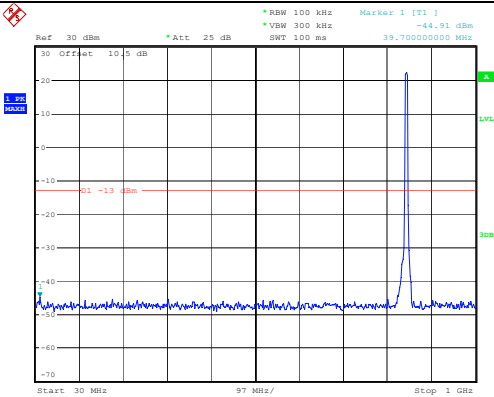

ProjectNo.:CR231059186 Tester:Rod Luo  
 Date: 3.NOV.2023 10:01:54

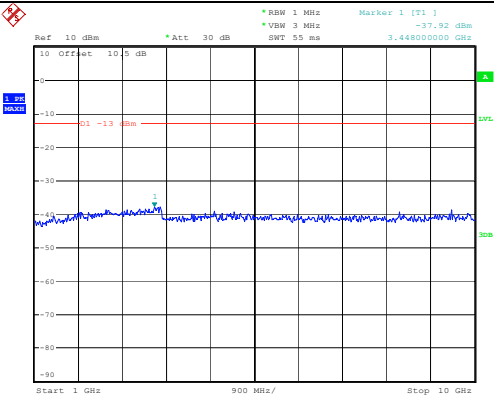


ProjectNo.:CR231059186 Tester:Rod Luo  
 Date: 3.NOV.2023 10:02:04

Spurious Emissions at Antenna Terminal


Channel

3MHz Bandwidth QPSK, RB1

Lowest

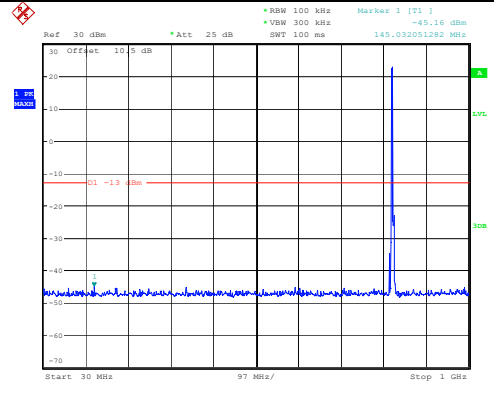


ProjectNo.:CR231059186 Tester:Rod Luo  
Date: 16.DEC.2023 00:07:09

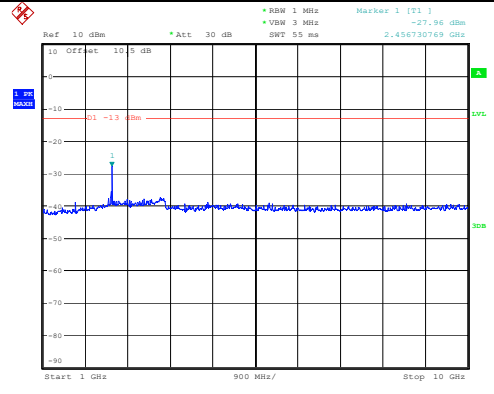


ProjectNo.:CR231059186 Tester:Rod Luo  
Date: 16.DEC.2023 00:32:11

Middle

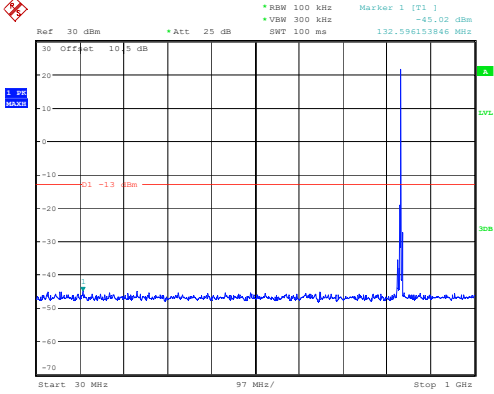


ProjectNo.:CR231059186 Tester:Rod Luo  
Date: 16.DEC.2023 00:09:16

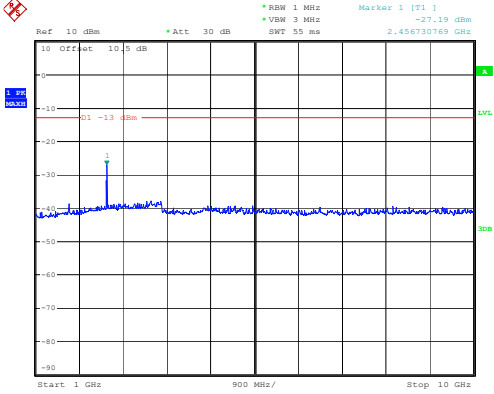


ProjectNo.:CR231059186 Tester:Rod Luo  
Date: 16.DEC.2023 00:34:14

Highest

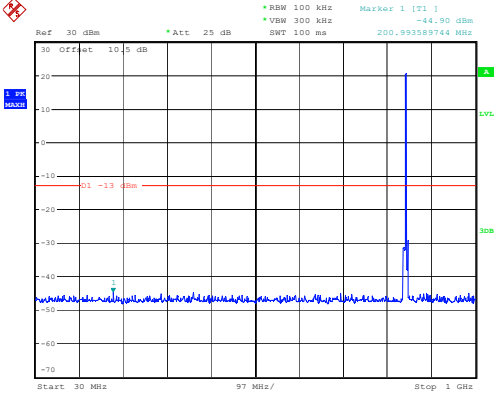

ProjectNo.:CR231059186 Tester:Rod Luo  
Date: 16.DEC.2023 00:12:36

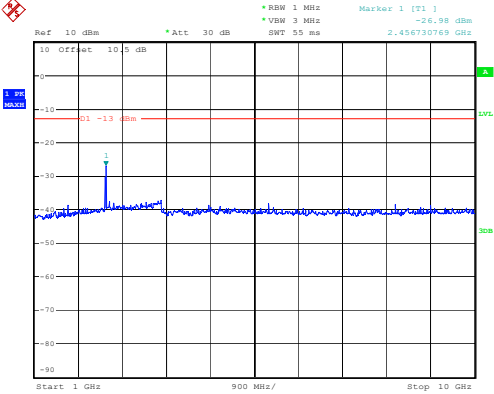


ProjectNo.:CR231059186 Tester:Rod Luo  
Date: 16.DEC.2023 00:34:44

Spurious Emissions at Antenna Terminal


Channel

5MHz Bandwidth QPSK, full RB

Lowest

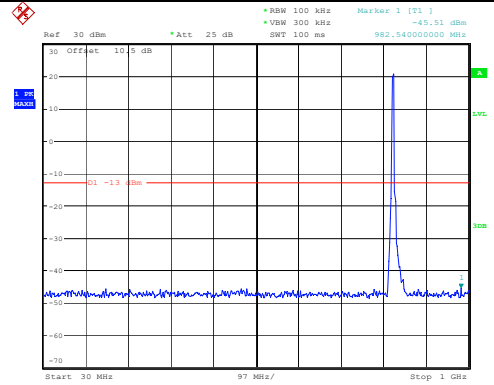


ProjectNo.:CR231059186 Tester:Rod Luo  
Date: 3.NOV.2023 10:02:59

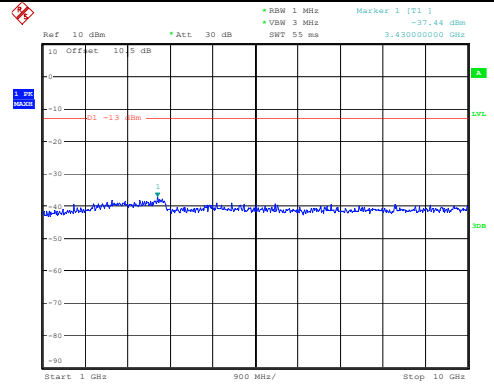


ProjectNo.:CR231059186 Tester:Rod Luo  
Date: 3.NOV.2023 10:03:09

Middle

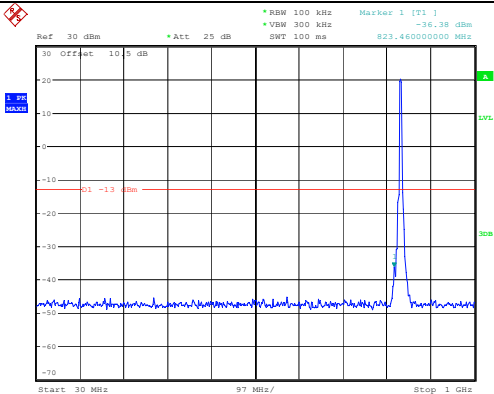


ProjectNo.:CR231059186 Tester:Rod Luo  
Date: 3.NOV.2023 10:03:23

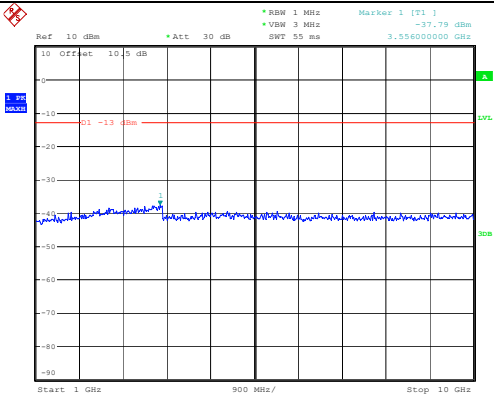


ProjectNo.:CR231059186 Tester:Rod Luo  
Date: 3.NOV.2023 10:03:33

Highest

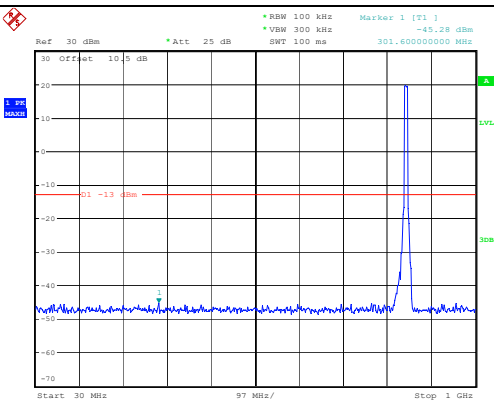

ProjectNo.:CR231059186 Tester:Rod Luo  
Date: 3.NOV.2023 10:03:49

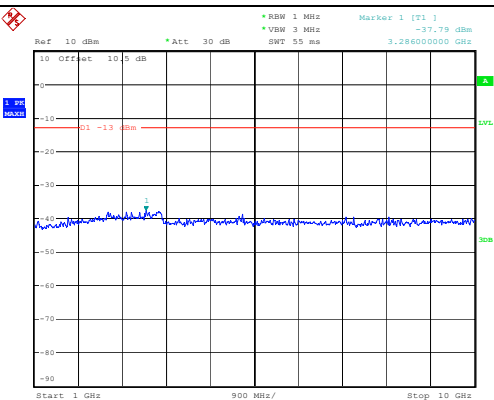


ProjectNo.:CR231059186 Tester:Rod Luo  
Date: 3.NOV.2023 10:04:00

Spurious Emissions at Antenna Terminal


Channel

5MHz Bandwidth QPSK, RB1

Lowest

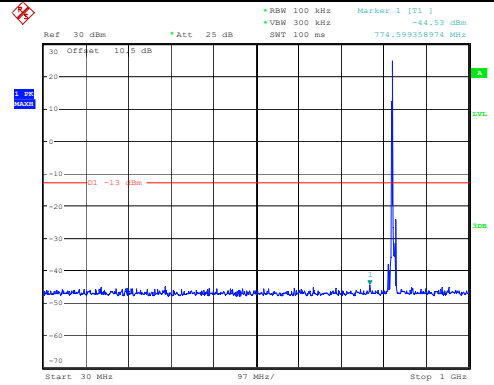


ProjectNo.:CR231059186 Tester:Rod Luo  
Date: 16.DEC.2023 00:14:34

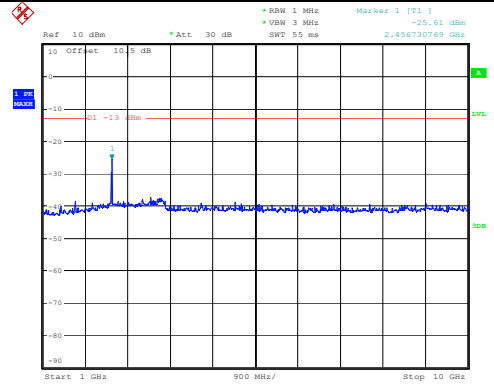


ProjectNo.:CR231059186 Tester:Rod Luo  
Date: 16.DEC.2023 00:35:03

Middle

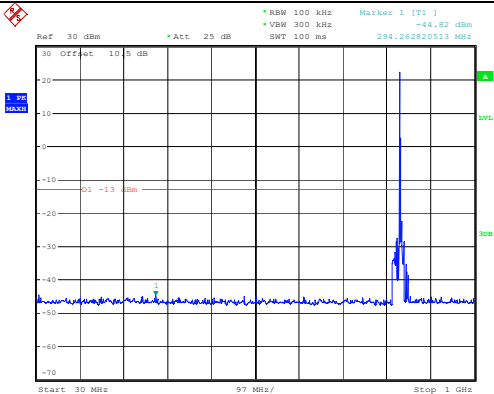


ProjectNo.:CR231059186 Tester:Rod Luo  
Date: 16.DEC.2023 00:16:23

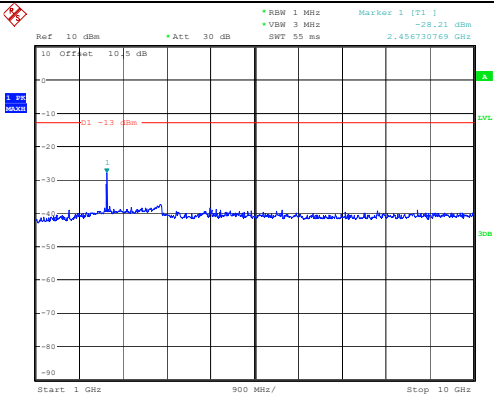


ProjectNo.:CR231059186 Tester:Rod Luo  
Date: 16.DEC.2023 00:35:33

Highest

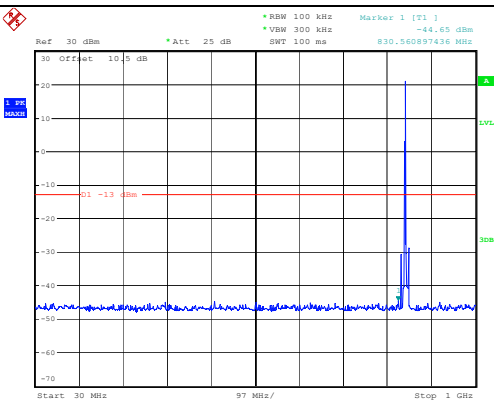

ProjectNo.:CR231059186 Tester:Rod Luo  
Date: 16.DEC.2023 00:17:52

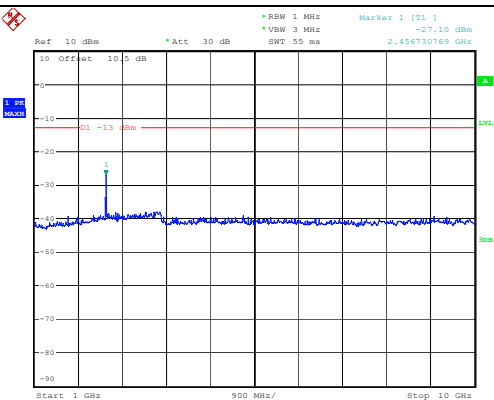


ProjectNo.:CR231059186 Tester:Rod Luo  
Date: 16.DEC.2023 00:35:52

Spurious Emissions at Antenna Terminal


Channel

10MHz Bandwidth QPSK, full RB

Lowest

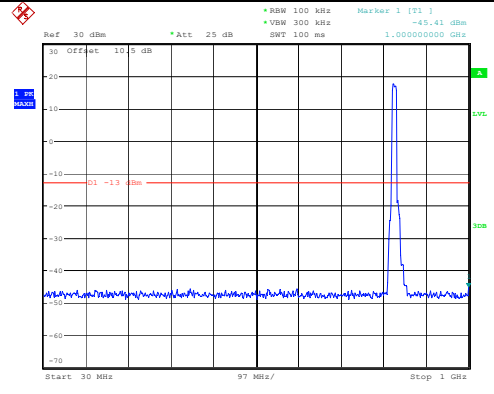


ProjectNo.:CR231059186 Tester:Rod Luo  
Date: 3.NOV.2023 10:04:55

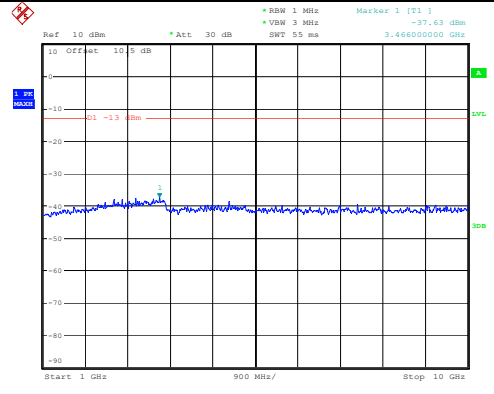


ProjectNo.:CR231059186 Tester:Rod Luo  
Date: 3.NOV.2023 10:05:05

Middle

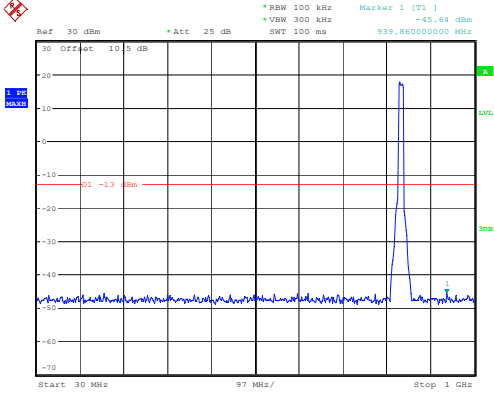


ProjectNo.:CR231059186 Tester:Rod Luo  
Date: 3.NOV.2023 10:05:19

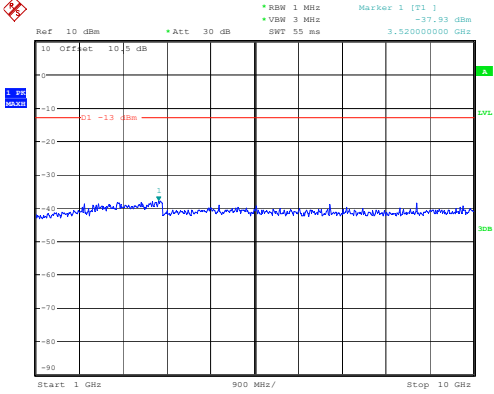


ProjectNo.:CR231059186 Tester:Rod Luo  
Date: 3.NOV.2023 10:05:29

Highest

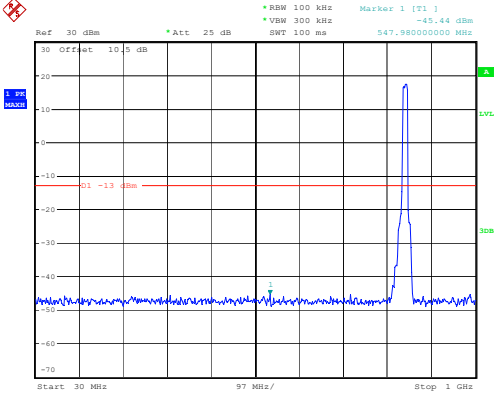

ProjectNo.:CR231059186 Tester:Rod Luo  
Date: 3.NOV.2023 10:05:43

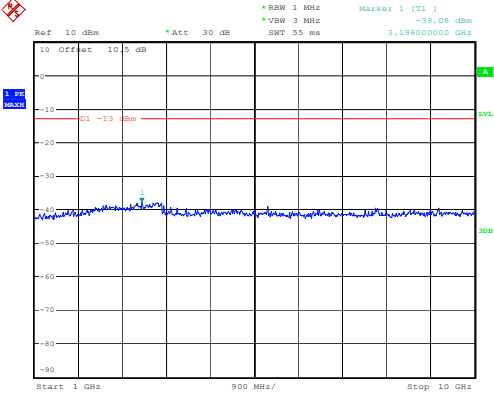


ProjectNo.:CR231059186 Tester:Rod Luo  
Date: 3.NOV.2023 10:05:53

Spurious Emissions at Antenna Terminal


Channel

10MHz Bandwidth QPSK, RB1

Lowest

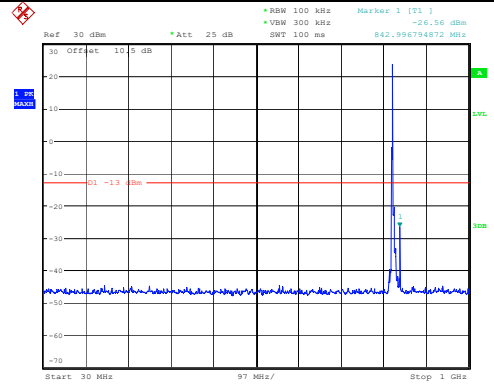


ProjectNo.:CR231059186 Tester:Rod Luo  
 Date: 16.DEC.2023 00:20:56

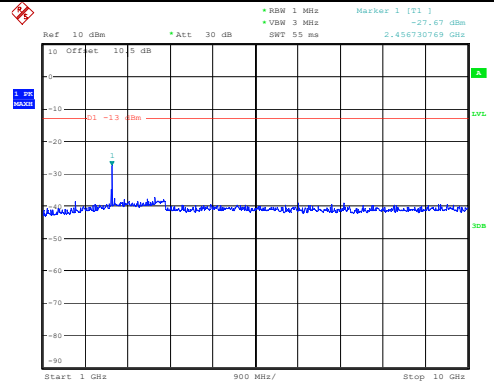


ProjectNo.:CR231059186 Tester:Rod Luo  
 Date: 16.DEC.2023 00:36:12

Middle

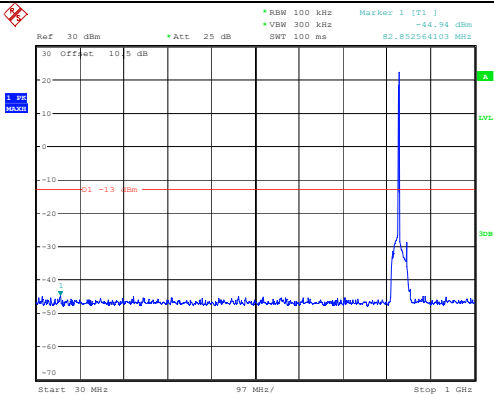


ProjectNo.:CR231059186 Tester:Rod Luo  
 Date: 16.DEC.2023 00:22:24

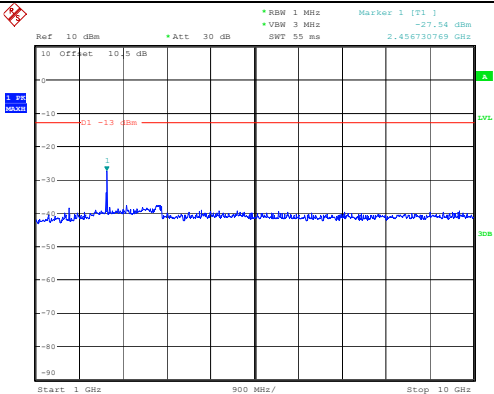


ProjectNo.:CR231059186 Tester:Rod Luo  
 Date: 16.DEC.2023 00:36:31

Highest

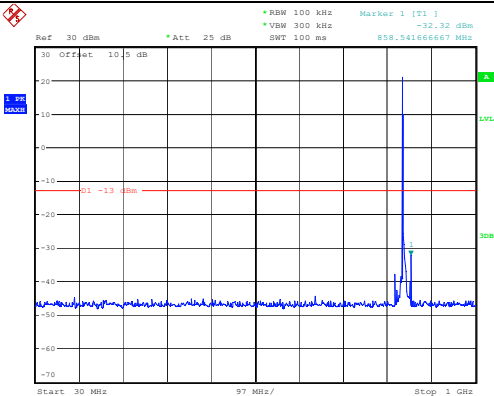


ProjectNo.:CR231059186 Tester:Rod Luo  
 Date: 16.DEC.2023 00:23:42

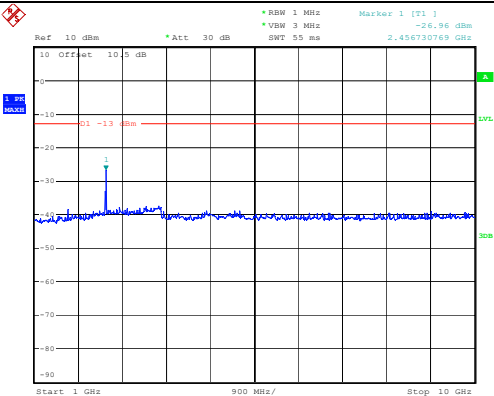

ProjectNo.:CR231059186 Tester:Rod Luo  
 Date: 16.DEC.2023 00:37:00





Out of band emission, Band Edge

| Mode                               | Lowest  | Highest   |
|------------------------------------|---|---|
| <p>QPSK<br/>1.4MHz<br/>full RB</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 09:50:36</p>  | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 09:50:49</p>  |
| <p>QPSK<br/>1.4MHz<br/>_RB1</p>    | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 16.DEC.2023 01:01:23</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 16.DEC.2023 01:08:01</p> |
| <p>QPSK<br/>3MHz<br/>full RB</p>   | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 09:51:28</p>  | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 09:51:41</p>  |

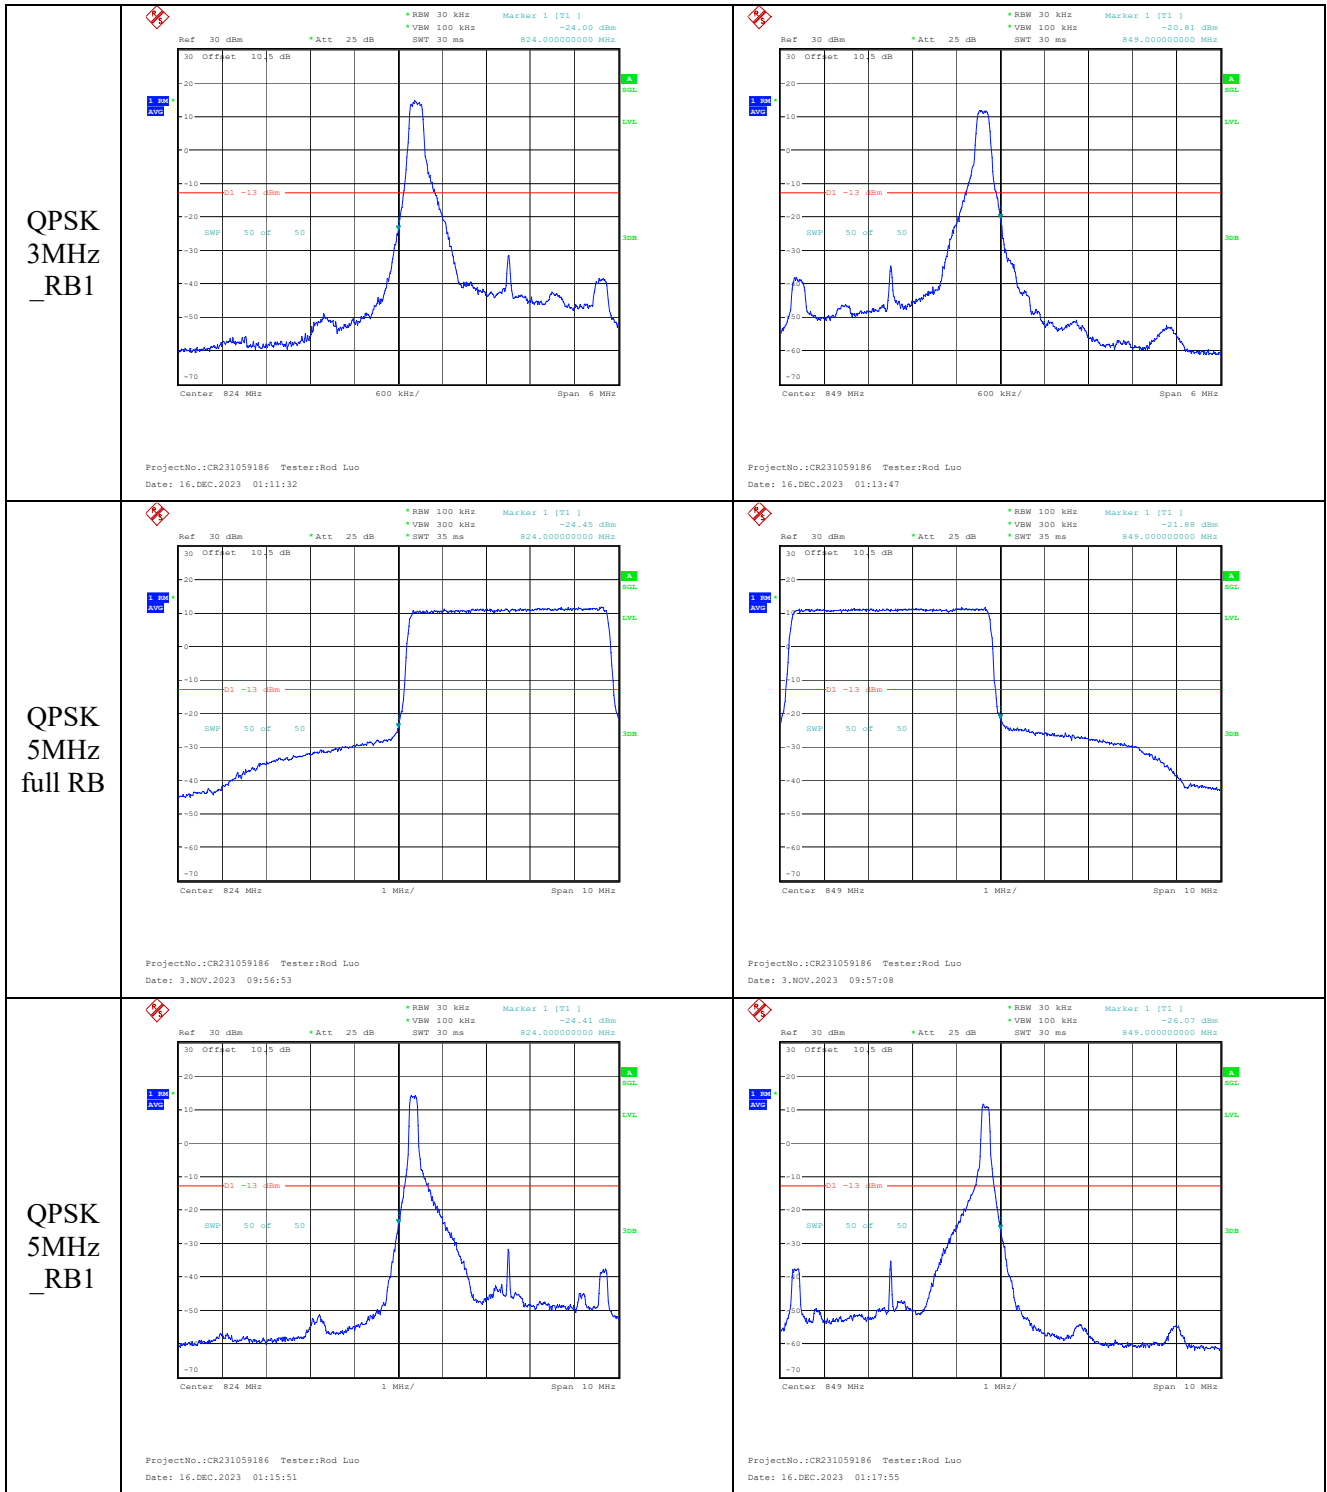




Out of band emission, Band Edge
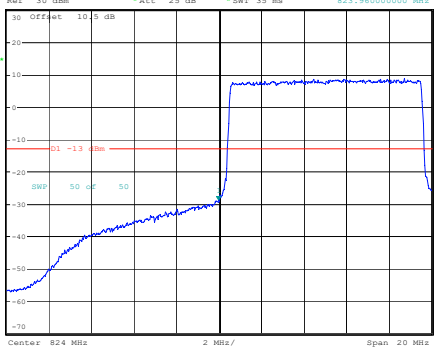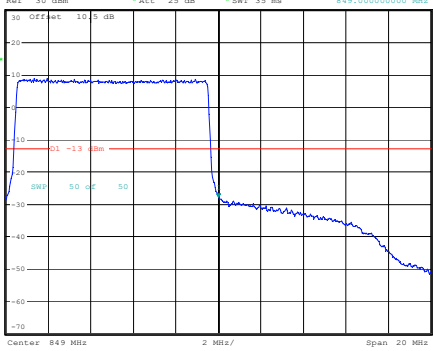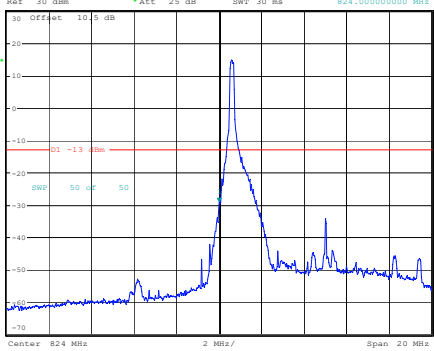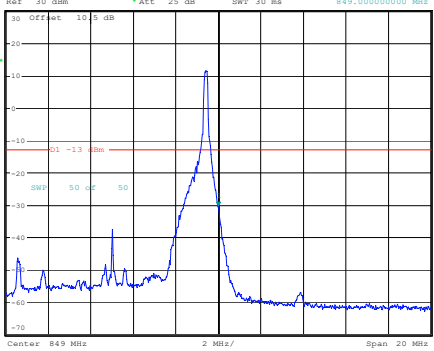
| Mode                              | Lowest   | Highest   |
|-----------------------------------|--|---|
| <p>QPSK<br/>10MHz<br/>full RB</p> |  <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 09:57:51</p>   |  <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 09:58:09</p>   |
| <p>QPSK<br/>10MHz,<br/>RB1</p>    |  <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 16.DEC.2023 01:21:25</p> |  <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 16.DEC.2023 01:23:38</p> |


Out of band emission, Band Edge

| Mode                       | Lowest  | Highest   |
|----------------------------|---|---|
| 16QAM<br>1.4MHz<br>full RB | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 09:50:42</p>  | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 09:50:55</p>  |
| 16QAM<br>1.4MHz,<br>RB1    | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 16.DEC.2023 01:02:03</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 16.DEC.2023 01:08:32</p> |
| 16QAM<br>3MHz<br>full RB   | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 09:51:34</p>  | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 09:51:48</p>  |

16QAM  
3MHz,  
RB1

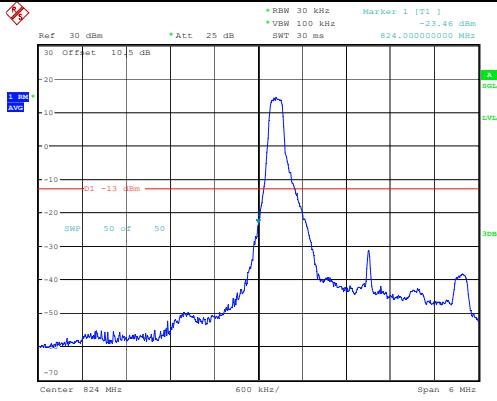


ProjectNo.:CR231059186 Tester:Rod Luo  
Date: 16.DEC.2023 01:12:14

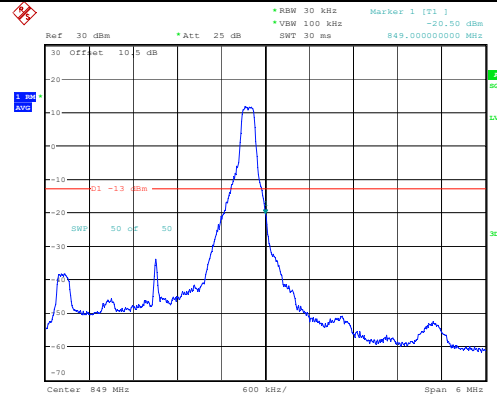


ProjectNo.:CR231059186 Tester:Rod Luo  
Date: 16.DEC.2023 01:14:14

16QAM  
5MHz  
full RB

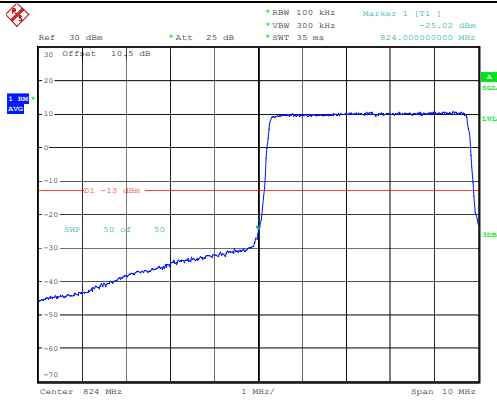


ProjectNo.:CR231059186 Tester:Rod Luo  
Date: 3.NOV.2023 09:57:00

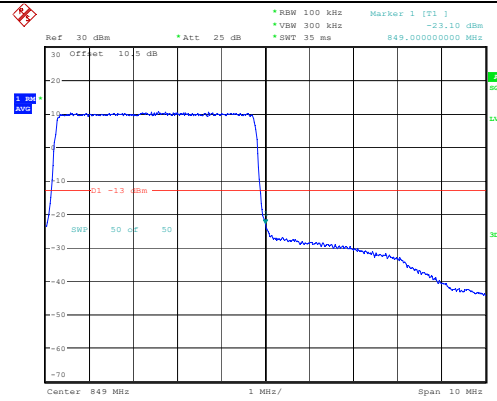


ProjectNo.:CR231059186 Tester:Rod Luo  
Date: 3.NOV.2023 09:57:15

16QAM  
5MHz,  
RB1

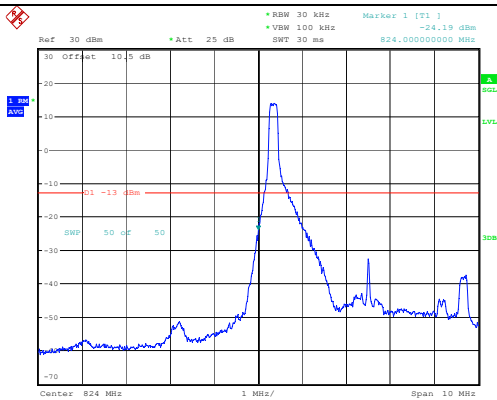

ProjectNo.:CR231059186 Tester:Rod Luo  
Date: 16.DEC.2023 01:16:24

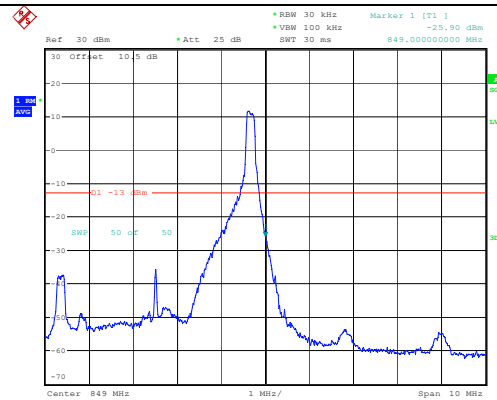

ProjectNo.:CR231059186 Tester:Rod Luo  
Date: 16.DEC.2023 01:18:23

Out of band emission, Band Edge

| Mode                      | Lowest  | Highest   |
|---------------------------|---|---|
| 16QAM<br>10MHz<br>full RB | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 09:57:59</p>  | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 09:58:17</p>  |
| 16QAM<br>10MHz,<br>RB1    | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 16.DEC.2023 01:21:52</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 16.DEC.2023 01:24:05</p> |

**4.4 Antenna Port Test Data and Results for LTE Band 40**

|                |         |              |                      |
|----------------|---------|--------------|----------------------|
| Serial Number: | 2C4U-1  | Test Date:   | 2023/11/3~2023/12/25 |
| Test Site:     | RF      | Test Mode:   | Transmitting         |
| Tester:        | Rod Luo | Test Result: | Pass                 |

**Environmental Conditions:**

|                      |       |                           |       |                        |     |
|----------------------|-------|---------------------------|-------|------------------------|-----|
| Temperature:<br>(°C) | 25~26 | Relative Humidity:<br>(%) | 46~47 | ATM Pressure:<br>(kPa) | 101 |
|----------------------|-------|---------------------------|-------|------------------------|-----|

**Test Equipment List and Details:**

| Manufacturer  | Description                         | Model        | Serial Number   | Calibration Date | Calibration Due Date |
|---------------|-------------------------------------|--------------|-----------------|------------------|----------------------|
| R&S           | Spectrum Analyzer                   | FSU26        | 200120          | 2023/4/18        | 2024/4/17            |
| zhuoxiang     | Coaxial Cable                       | SMA-178      | 211002          | Each time        | N/A                  |
| Mini-Circuits | Power Splitter                      | ZFRSC-183-S+ | S F448201619    | Each time        | N/A                  |
| R&S           | Wideband Radio Communication Tester | CMW500       | 143458          | 2023/3/31        | 2024/3/30            |
| BACL          | TEMP&HUMI Test Chamber              | BTH-150-40   | 30174           | 2023/3/31        | 2024/3/30            |
| UNI-T         | Multimeter                          | UT39A+       | C210582554      | 2023/9/28        | 2024/9/27            |
| ZHAOXIN       | DC Power Supply                     | RXN-6010D    | 21R6010D0912386 | N/A              | N/A                  |

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Frequency for Each Mode:**

| Operation Band    | Operation Bandwidth | Lowest Frequency (MHz) | Middle Frequency (MHz) | Highest Frequency (MHz) |
|-------------------|---------------------|------------------------|------------------------|-------------------------|
| LTE Band 40 Lower | 5MHz                | 2307.5                 | 2310                   | 2312.5                  |
|                   | 10MHz               | /                      | 2310                   | /                       |
| LTE Band 40 Upper | 5MHz                | 2352.5                 | 2355                   | 2357.5                  |
|                   | 10MHz               | /                      | 2355                   | /                       |

**Test Data:**

(Note:Uplink Downlink configuration 3 was tested)

| FCC§2.1046;§ 27.50(a)(3)    |                            |                                     |                |                 |                    |             |
|-----------------------------|----------------------------|-------------------------------------|----------------|-----------------|--------------------|-------------|
| LTE Band 40 Lower:          |                            |                                     |                |                 |                    |             |
| RF Output Power:            |                            |                                     |                |                 |                    |             |
| Test Bandwidth & Modulation | Resource Block & RB offset | Conducted Average Output Power(dBm) |                |                 | Maximum EIRP (dBm) | Limit (dBm) |
|                             |                            | Lowest Channel                      | Middle Channel | Highest Channel |                    |             |
| 5MHz QPSK                   | RB1#0                      | 21.56                               | 21.56          | 21.52           | 20.3               | 24          |
|                             | RB1#13                     | 21.66                               | 21.61          | 21.62           |                    |             |
|                             | RB1#24                     | 21.55                               | 21.53          | 21.51           |                    |             |
|                             | RB15#0                     | 20.55                               | 20.48          | 20.51           |                    |             |
|                             | RB15#10                    | 20.65                               | 20.55          | 20.55           |                    |             |
|                             | RB25#0                     | 20.57                               | 20.52          | 20.56           |                    |             |
| 5MHz 16QAM                  | RB1#0                      | 20.69                               | 20.78          | 20.53           | 19.52              | 24          |
|                             | RB1#13                     | 20.62                               | 20.88          | 20.66           |                    |             |
|                             | RB1#24                     | 20.58                               | 20.76          | 20.53           |                    |             |
|                             | RB15#0                     | 19.58                               | 19.52          | 19.45           |                    |             |
|                             | RB15#10                    | 19.72                               | 19.61          | 19.5            |                    |             |
|                             | RB25#0                     | 19.66                               | 19.6           | 19.56           |                    |             |
| 10MHz QPSK                  | RB1#0                      | /                                   | 21.59          | /               | 20.5               | 24          |
|                             | RB1#25                     | /                                   | 21.86          | /               |                    |             |
|                             | RB1#49                     | /                                   | 21.58          | /               |                    |             |
|                             | RB25#0                     | /                                   | 20.56          | /               |                    |             |
|                             | RB25#25                    | /                                   | 20.61          | /               |                    |             |
|                             | RB50#0                     | /                                   | 20.6           | /               |                    |             |
| 10MHz 16QAM                 | RB1#0                      | /                                   | 20.55          | /               | 19.47              | 24          |
|                             | RB1#25                     | /                                   | 20.83          | /               |                    |             |
|                             | RB1#49                     | /                                   | 20.56          | /               |                    |             |
|                             | RB25#0                     | /                                   | 19.59          | /               |                    |             |
|                             | RB25#25                    | /                                   | 19.71          | /               |                    |             |
|                             | RB50#0                     | /                                   | 19.62          | /               |                    |             |

Note:  
For 5MHz mode, the channel power is equal to the test result in dBm/5MHz.  
For 10MHz mode, the channel power is sum of 10MHz bandwidth, the result is less than 24dBm, so in any 5MHz bandwidth, it's will not exceed limit  
EIRP=Conducted Power(dBm) - LC(dB) + GT(dBi)  
EIRP PSD=Conducted PSD(dBm/5MHz) - LC(dB) + GT(dBi)

| <b>LTE Band 40 Upper:</b>  |                            |                                     |                |                 |                    |                  |
|--|----------------------------|-------------------------------------|----------------|-----------------|--------------------|------------------|
| <b>RF Output Power:</b>  |                            |                                     |                |                 |                    |                  |
| Test Bandwidth & Modulation  | Resource Block & RB offset | Conducted Average Output Power(dBm) |                |                 | Maximum EIRP (dBm) | EIRP Limit (dBm) |
|  |                            | Lowest Channel                      | Middle Channel | Highest Channel |                    |                  |
| 5MHz QPSK  | RB1#0                      | 21.76                               | 21.68          | 21.65           | 20.4               | 24               |
|  | RB1#13                     | 21.76                               | 21.76          | 21.76           |                    |                  |
|  | RB1#24                     | 21.55                               | 21.64          | 21.62           |                    |                  |
|  | RB15#0                     | 20.66                               | 20.67          | 20.68           |                    |                  |
|  | RB15#10                    | 20.69                               | 20.72          | 20.75           |                    |                  |
|  | RB25#0                     | 20.71                               | 20.68          | 20.7            |                    |                  |
| 5MHz 16QAM   | RB1#0                      | 20.94                               | 20.71          | 20.72           | 19.63              | 24               |
|  | RB1#13                     | 20.99                               | 20.76          | 20.81           |                    |                  |
|  | RB1#24                     | 20.97                               | 20.64          | 20.67           |                    |                  |
|  | RB15#0                     | 19.72                               | 19.61          | 19.69           |                    |                  |
|  | RB15#10                    | 19.76                               | 19.67          | 19.76           |                    |                  |
|  | RB25#0                     | 19.67                               | 19.72          | 19.72           |                    |                  |
| 10MHz QPSK   | RB1#0                      | /                                   | 21.86          | /               | 20.72              | 24               |
|  | RB1#25                     | /                                   | 22.08          | /               |                    |                  |
|  | RB1#49                     | /                                   | 21.76          | /               |                    |                  |
|  | RB25#0                     | /                                   | 20.79          | /               |                    |                  |
|  | RB25#25                    | /                                   | 20.82          | /               |                    |                  |
|  | RB50#0                     | /                                   | 20.84          | /               |                    |                  |
| 10MHz 16QAM  | RB1#0                      | /                                   | 20.79          | /               | 19.65              | 24               |
|  | RB1#25                     | /                                   | 21.01          | /               |                    |                  |
|  | RB1#49                     | /                                   | 20.72          | /               |                    |                  |
|  | RB25#0                     | /                                   | 19.86          | /               |                    |                  |
|  | RB25#25                    | /                                   | 19.85          | /               |                    |                  |
|  | RB50#0                     | /                                   | 19.83          | /               |                    |                  |
| Note:<br>For 5MHz mode, the channel power is equal to the test result in dBm/5MHz.<br>For 10MHz mode, the channel power is sum of 10MHz bandwidth, the result is less than 24dBm, so in any 5MHz bandwidth, it's will not exceed limit<br>$EIRP = \text{Conducted Power(dBm)} - LC(dB) + GT(dBi)$<br>$EIRP\ PSD = \text{Conducted PSD(dBm/5MHz)} - LC(dB) + GT(dBi)$ |                            |                                     |                |                 |                    |                  |
|  |                            |                                     |                |                 | <b>Result:</b>     | <b>Pass</b>      |

**Duty Cycle**

| Operation Band    | Modulation | Bandwidth | Ton (ms) | Ton+off (ms) | Duty Cycle (%) | Limit (%)   |
|-------------------|------------|-----------|----------|--------------|----------------|-------------|
| LTE Band 40 Lower | QPSK       | 5M        | 3.000    | 10.01        | 29.97          | 38          |
|                   |            | 10M       | 3.000    | 10.01        | 29.97          | 38          |
|                   | 16QAM      | 5M        | 2.995    | 10.005       | 29.94          | 38          |
|                   |            | 10M       | 3.005    | 10.01        | 30.02          | 38          |
| LTE Band 40 Upper | QPSK       | 5M        | 3.005    | 10.01        | 30.02          | 38          |
|                   |            | 10M       | 3.005    | 10.01        | 30.02          | 38          |
|                   | 16QAM      | 5M        | 3.005    | 10.01        | 30.02          | 38          |
|                   |            | 10M       | 3.000    | 10.01        | 29.97          | 38          |
|                   |            |           |          |              | <b>Result:</b> | <b>Pass</b> |

**FCC §2.1049, §27.53:Occupied Bandwidth****LTE Band 40 Lower:**

| Operation Mode | 99% Occupied Bandwidth (MHz) |                |              | 26 dB Occupied Bandwidth (MHz) |                |              |
|----------------|------------------------------|----------------|--------------|--------------------------------|----------------|--------------|
|                | Low Channel                  | Middle channel | High Channel | Low Channel                    | Middle channel | High Channel |
| 5MHz QPSK      | 4.540                        | 4.540          | 4.540        | 5.280                          | 5.320          | 5.140        |
| 5MHz 16QAM     | 4.520                        | 4.520          | 4.520        | 5.180                          | 5.560          | 5.160        |
| 10MHz QPSK     | /                            | 9.000          | /            | /                              | 9.880          | /            |
| 10MHz 16QAM    | /                            | 8.960          | /            | /                              | 9.760          | /            |

**LTE Band 40 Upper:**

| Operation Mode | 99% Occupied Bandwidth (MHz) |                |              | 26 dB Occupied Bandwidth (MHz) |                |              |
|----------------|------------------------------|----------------|--------------|--------------------------------|----------------|--------------|
|                | Low Channel                  | Middle channel | High Channel | Low Channel                    | Middle channel | High Channel |
| 5MHz QPSK      | 4.540                        | 4.540          | 4.520        | 5.240                          | 5.540          | 5.200        |
| 5MHz 16QAM     | 4.520                        | 4.540          | 4.540        | 5.340                          | 5.200          | 5.300        |
| 10MHz QPSK     | /                            | 9.000          | /            | /                              | 9.880          | /            |
| 10MHz 16QAM    | /                            | 9.000          | /            | /                              | 9.760          | /            |

Note: The test plots please refer to the Plots of Occupied Bandwidth

**FCC §2.1051, § 27.53:Spurious Emissions at Antenna Terminal**

**Result:** Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.

**FCC §2.1051, § 27.53:Out of band emission, Band Edge**

**Result:** Pass, Please refer to the test plots of Out of band emission, Band Edge.



**FCC §2.1055, §27.54: Frequency Stability**

| <b>LTE Band 40 Lower:</b>           |                  |  |                  |          |                  |             |
|-------------------------------------|------------------|--|------------------|----------|------------------|-------------|
| Test Mode:                          | 10M QPSK         | Test Channel: Lowest for Lower Edge,Highest for Upper Edge |                  |          |                  |             |
| Test Item                           | Temperature (°C) | Voltage (V <sub>DC</sub> )                                 | Lower Edge (MHz) |          | Upper Edge (MHz) |             |
|                                     |                  |  | Result           | Limit    | Result           | Limit       |
| Frequency Stability vs. Temperature | -30              | 3.85   | 2305.024         | 2305.000 | 2314.889         | 2315.000    |
|                                     | -20              | 3.85   | 2305.076         | 2305.000 | 2314.870         | 2315.000    |
|                                     | -10              | 3.85   | 2305.003         | 2305.000 | 2314.892         | 2315.000    |
|                                     | 0                | 3.85   | 2305.103         | 2305.000 | 2314.968         | 2315.000    |
|                                     | 10               | 3.85   | 2305.107         | 2305.000 | 2314.987         | 2315.000    |
|                                     | 20               | 3.85   | 2305.014         | 2305.000 | 2314.920         | 2315.000    |
|                                     | 30               | 3.85   | 2305.056         | 2305.000 | 2314.870         | 2315.000    |
|                                     | 40               | 3.85   | 2305.130         | 2305.000 | 2314.883         | 2315.000    |
| Frequency Stability vs. Voltage     | 20               | 3.47   | 2305.083         | 2305.000 | 2314.860         | 2315.000    |
|                                     | 20               | 4.24   | 2305.135         | 2305.000 | 2314.913         | 2315.000    |
|                                     |                  |  |                  |          | <b>Result:</b>   | <b>Pass</b> |

| Test Mode:                          | 10M 16QAM        | Test Channel: Lowest for Lower Edge,Highest for Upper Edge |                  |          |                  |             |
|-------------------------------------|------------------|--|------------------|----------|------------------|-------------|
| Test Item                           | Temperature (°C) | Voltage (V <sub>DC</sub> )                                 | Lower Edge (MHz) |          | Upper Edge (MHz) |             |
|                                     |                  |  | Result           | Limit    | Result           | Limit       |
| Frequency Stability vs. Temperature | -30              | 3.85   | 2305.057         | 2305.000 | 2314.971         | 2315.000    |
|                                     | -20              | 3.85   | 2305.112         | 2305.000 | 2314.953         | 2315.000    |
|                                     | -10              | 3.85   | 2305.052         | 2305.000 | 2314.856         | 2315.000    |
|                                     | 0                | 3.85   | 2305.011         | 2305.000 | 2314.896         | 2315.000    |
|                                     | 10               | 3.85   | 2305.072         | 2305.000 | 2314.866         | 2315.000    |
|                                     | 20               | 3.85   | 2305.045         | 2305.000 | 2314.874         | 2315.000    |
|                                     | 30               | 3.85   | 2305.128         | 2305.000 | 2314.887         | 2315.000    |
|                                     | 40               | 3.85   | 2305.012         | 2305.000 | 2314.884         | 2315.000    |
| Frequency Stability vs. Voltage     | 20               | 3.47   | 2305.052         | 2305.000 | 2314.979         | 2315.000    |
|                                     | 20               | 4.24   | 2305.035         | 2305.000 | 2314.887         | 2315.000    |
|                                     |                  |  |                  |          | <b>Result:</b>   | <b>Pass</b> |

| <b>LTE Band 40 Upper:</b>           |                  |  |                  |          |                  |          |
|-------------------------------------|------------------|--|------------------|----------|------------------|----------|
| Test Mode:                          | 10M QPSK         | Test Channel: Lowest for Lower Edge,Highest for Upper Edge |                  |          |                  |          |
| Test Item                           | Temperature (°C) | Voltage (V <sub>DC</sub> )                                 | Lower Edge (MHz) |          | Upper Edge (MHz) |          |
|                                     |                  |  | Result           | Limit    | Result           | Limit    |
| Frequency Stability vs. Temperature | -30              | 3.85   | 2350.068         | 2350.000 | 2359.994         | 2360.000 |
|                                     | -20              | 3.85   | 2350.035         | 2350.000 | 2359.907         | 2360.000 |
|                                     | -10              | 3.85   | 2350.023         | 2350.000 | 2359.975         | 2360.000 |
|                                     | 0                | 3.85   | 2350.101         | 2350.000 | 2359.929         | 2360.000 |

|                                 |    |      |          |          |                |             |
|---------------------------------|----|------|----------|----------|----------------|-------------|
|                                 | 10 | 3.85 | 2350.024 | 2350.000 | 2359.892       | 2360.000    |
|                                 | 20 | 3.85 | 2350.083 | 2350.000 | 2359.877       | 2360.000    |
|                                 | 30 | 3.85 | 2350.010 | 2350.000 | 2359.887       | 2360.000    |
|                                 | 40 | 3.85 | 2350.096 | 2350.000 | 2359.925       | 2360.000    |
|                                 | 50 | 3.85 | 2350.105 | 2350.000 | 2359.858       | 2360.000    |
| Frequency Stability vs. Voltage | 20 | 3.47 | 2350.106 | 2350.000 | 2359.895       | 2360.000    |
|                                 | 20 | 4.24 | 2350.012 | 2350.000 | 2359.855       | 2360.000    |
|                                 |    |      |          |          | <b>Result:</b> | <b>Pass</b> |

| Test Mode:                          | 10M<br>16QAM     | Test Channel: Lowest for Lower Edge, Highest for Upper Edge |                  |          |                  |             |
|-------------------------------------|------------------|---|------------------|----------|------------------|-------------|
| Test Item                           | Temperature (°C) | Voltage (V <sub>DC</sub> )                                  | Lower Edge (MHz) |          | Upper Edge (MHz) |             |
|                                     |                  |   | Result           | Limit    | Result           | Limit       |
| Frequency Stability vs. Temperature | -30              | 3.85  | 2350.010         | 2350.000 | 2359.999         | 2360.000    |
|                                     | -20              | 3.85  | 2350.066         | 2350.000 | 2359.971         | 2360.000    |
|                                     | -10              | 3.85  | 2350.119         | 2350.000 | 2359.859         | 2360.000    |
|                                     | 0                | 3.85  | 2350.013         | 2350.000 | 2359.990         | 2360.000    |
|                                     | 10               | 3.85  | 2350.098         | 2350.000 | 2359.929         | 2360.000    |
|                                     | 20               | 3.85  | 2350.123         | 2350.000 | 2359.999         | 2360.000    |
|                                     | 30               | 3.85  | 2350.106         | 2350.000 | 2359.959         | 2360.000    |
|                                     | 40               | 3.85  | 2350.016         | 2350.000 | 2359.990         | 2360.000    |
|                                     | 50               | 3.85  | 2350.139         | 2350.000 | 2359.892         | 2360.000    |
| Frequency Stability vs. Voltage     | 20               | 3.47  | 2350.102         | 2350.000 | 2359.994         | 2360.000    |
|                                     | 20               | 4.24  | 2350.093         | 2350.000 | 2359.858         | 2360.000    |
|                                     |                  |   |                  |          | <b>Result:</b>   | <b>Pass</b> |

**Test Plots** (Note: The 10.5 dB is the Insertion loss of the RF cable and Power Splitter, which was offset into the Spectrum Analyzer):  
2305-2315 MHz:

| <b>Occupied Bandwidth</b> |  |  |
|---------------------------|--|--|
| <b>Channel</b>            | <b>5MHz Bandwidth QPSK</b>   | <b>5MHz Bandwidth 16QAM</b>  |
| <b>Lowest</b>             | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 10:11:43</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 10:12:09</p> |
| <b>Middle</b>             | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 10:12:34</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 10:12:57</p> |
| <b>Highest</b>            | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 10:13:25</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 10:13:57</p> |

Occupied Bandwidth

| Channel | 10MHz Bandwidth QPSK   | 10MHz Bandwidth 16QAM  |
|---------|--|--|
| Middle  | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 10:14:29</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 10:14:56</p> |

2350-2360 MHz:

Occupied Bandwidth







| Channel | 5MHz Bandwidth QPSK   | 5MHz Bandwidth 16QAM   |
|---------|---|--|
| Lowest  | <p>Ref 30 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] 1.65 dB<br/>         *VBW 300 kHz *SWT 5 ms 5.240000000 MHz<br/>         Marker 1 [T1] -14.23 dBm<br/>         0.349940000 GHz<br/>         2.350240000 GHz<br/>         Temp 2 [T1] 0.00 dBm<br/>         2.354760000 GHz</p> <p>Center 2.3525 GHz 1 MHz/ Span 10 MHz</p> <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>         Date: 3.NOV.2023 10:21:22</p> | <p>Ref 30 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] -0.16 dB<br/>         *VBW 300 kHz *SWT 5 ms 5.340000000 MHz<br/>         Marker 1 [T1] -13.20 dBm<br/>         0.349740000 GHz<br/>         2.350240000 GHz<br/>         Temp 2 [T1] 0.00 dBm<br/>         2.354760000 GHz</p> <p>Center 2.3525 GHz 1 MHz/ Span 10 MHz</p> <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>         Date: 3.NOV.2023 10:21:44</p> |
| Middle  | <p>Ref 30 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] 0.02 dB<br/>         *VBW 300 kHz *SWT 5 ms 5.540000000 MHz<br/>         Marker 1 [T1] -15.11 dBm<br/>         0.352360000 GHz<br/>         2.352740000 GHz<br/>         Temp 2 [T1] 0.00 dBm<br/>         2.357260000 GHz</p> <p>Center 2.355 GHz 1 MHz/ Span 10 MHz</p> <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>         Date: 3.NOV.2023 10:22:08</p>  | <p>Ref 30 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] 0.01 dB<br/>         *VBW 300 kHz *SWT 5 ms 5.200000000 MHz<br/>         Marker 1 [T1] -13.13 dBm<br/>         0.352440000 GHz<br/>         2.352740000 GHz<br/>         Temp 2 [T1] 0.00 dBm<br/>         2.357260000 GHz</p> <p>Center 2.355 GHz 1 MHz/ Span 10 MHz</p> <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>         Date: 3.NOV.2023 10:22:30</p>   |
| Highest | <p>Ref 30 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] 1.71 dB<br/>         *VBW 300 kHz *SWT 5 ms 5.200000000 MHz<br/>         Marker 1 [T1] -14.7 dBm<br/>         0.354900000 GHz<br/>         2.355240000 GHz<br/>         Temp 2 [T1] 0.00 dBm<br/>         2.359760000 GHz</p> <p>Center 2.3575 GHz 1 MHz/ Span 10 MHz</p> <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>         Date: 3.NOV.2023 10:22:51</p>  | <p>Ref 30 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] -1.32 dB<br/>         *VBW 300 kHz *SWT 5 ms 5.300000000 MHz<br/>         Marker 1 [T1] -13.4 dBm<br/>         0.354780000 GHz<br/>         2.355240000 GHz<br/>         Temp 2 [T1] 0.00 dBm<br/>         2.359760000 GHz</p> <p>Center 2.3575 GHz 1 MHz/ Span 10 MHz</p> <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>         Date: 3.NOV.2023 10:23:13</p>  |

**Occupied Bandwidth**

| Channel | 10MHz Bandwidth QPSK  | 10MHz Bandwidth 16QAM  |
|---------|---|--|
| Middle  | <p>Ref 30 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] 0.64 dB<br/>         *VMW 300 kHz *SWT 10 ms 9.880000000 MHz<br/>         Marker 1 [T1] 11.18 dBm<br/>         Temp 1 [T1] 0.64 dB<br/>         Temp 2 [T1] 0.64 dB<br/>         Center 2.355 GHz 2 MHz/ Span 20 MHz</p> <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>         Date: 3.NOV.2023 10:23:36</p> | <p>Ref 30 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] -0.67 dB<br/>         *VMW 300 kHz *SWT 10 ms 9.760000000 MHz<br/>         Marker 1 [T1] 11.28 dBm<br/>         Temp 1 [T1] 0.64 dB<br/>         Temp 2 [T1] 0.64 dB<br/>         Center 2.355 GHz 2 MHz/ Span 20 MHz</p> <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>         Date: 3.NOV.2023 10:23:55</p> |

2305-2315 MHz:

Spurious Emissions at Antenna Terminal
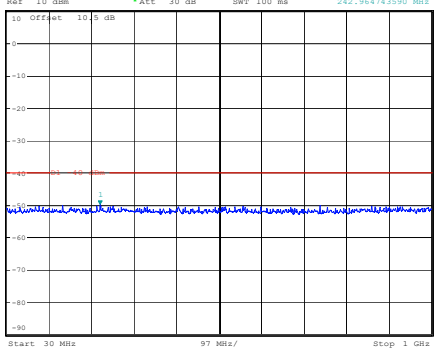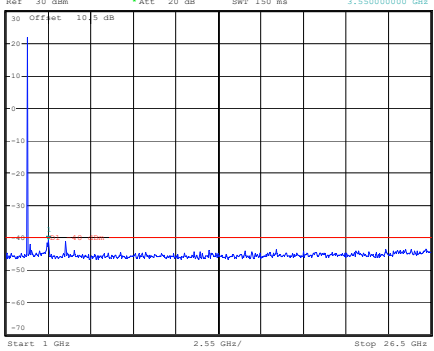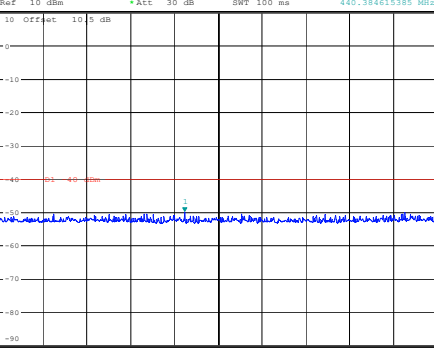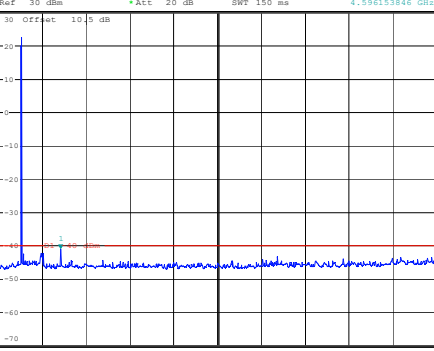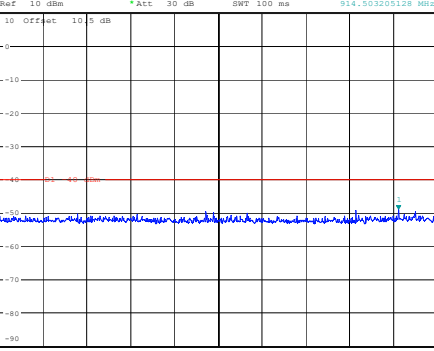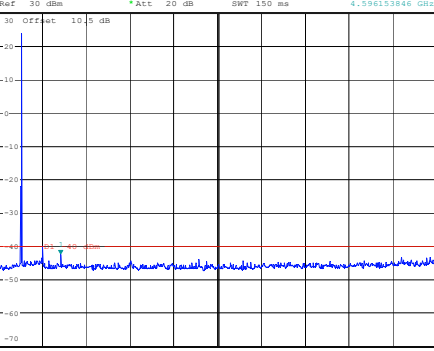
| Channel | 5MHz Bandwidth QPSK, RB1  |  |
|---------|---|--|
| Lowest  |  <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 15.DEC.2023 22:04:59</p>   |  <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 15.DEC.2023 23:05:38</p>   |
| Middle  |  <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 15.DEC.2023 22:06:46</p>  |  <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 15.DEC.2023 23:44:33</p>  |
| Highest |  <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 15.DEC.2023 22:07:53</p> |  <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 15.DEC.2023 23:45:49</p> |

**Spurious Emissions at Antenna Terminal**

| Channel | 10MHz Bandwidth QPSK, RB1   |   |
|---------|---|---|
| Middle  | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 15.DEC.2023 22:08:43</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 15.DEC.2023 23:46:49</p> |



2350-2360 MHz:

| <b>Spurious Emissions at Antenna Terminal</b> |  |
|---|--|
| <b>Channel</b>                                | <b>5MHz Bandwidth QPSK, RB1</b>  |
| <b>Lowest</b>                                 | <p>Ref 10 dBm *Att. 30 dB *RBW 100 kHz Marker 1 [T1] -49.69 dBm<br/>           *VSW 300 kHz SWT 100 ms 930.0487953 MHz</p> <p>Start 30 MHz 97 MHz/ Stop 1 GHz</p> <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 15.DECEMBER.2023 23:53:01</p>   |
| <b>Middle</b>                                 | <p>Ref 30 dBm *Att. 20 dB *RBW 1 MHz Marker 1 [T1] -41.40 dBm<br/>           *VSW 3 MHz SWT 150 ms 4.677884613 GHz</p> <p>Start 1 GHz 2.55 GHz/ Stop 26.5 GHz</p> <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 15.DECEMBER.2023 23:39:31</p>   |
| <b>Middle</b>                                 | <p>Ref 10 dBm *Att. 30 dB *RBW 100 kHz Marker 1 [T1] -49.89 dBm<br/>           *VSW 300 kHz SWT 100 ms 494.791466667 MHz</p> <p>Start 30 MHz 97 MHz/ Stop 1 GHz</p> <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 15.DECEMBER.2023 23:53:46</p> |
| <b>Middle</b>                                 | <p>Ref 30 dBm *Att. 20 dB *RBW 1 MHz Marker 1 [T1] -41.39 dBm<br/>           *VSW 3 MHz SWT 150 ms 4.677884613 GHz</p> <p>Start 1 GHz 2.55 GHz/ Stop 26.5 GHz</p> <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 15.DECEMBER.2023 23:41:01</p>   |
| <b>Highest</b>                                | <p>Ref 10 dBm *Att. 30 dB *RBW 100 kHz Marker 1 [T1] -50.50 dBm<br/>           *VSW 300 kHz SWT 100 ms 277.163461538 MHz</p> <p>Start 30 MHz 97 MHz/ Stop 1 GHz</p> <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 15.DECEMBER.2023 23:54:15</p> |
| <b>Highest</b>                                | <p>Ref 30 dBm *Att. 20 dB *RBW 1 MHz Marker 1 [T1] -42.29 dBm<br/>           *VSW 3 MHz SWT 150 ms 4.677884613 GHz</p> <p>Start 1 GHz 2.55 GHz/ Stop 26.5 GHz</p> <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 15.DECEMBER.2023 23:41:43</p>   |

Spurious Emissions at Antenna Terminal




| Channel | 10MHz Bandwidth QPSK, RB1  |  |
|---------|--|--|
| Middle  | <p>                     *RBW 100 kHz    Marker 1 [T1]    -50.02 dBm<br/>                     *VBW 300 kHz<br/>                     *Att 30 dB    SWT 100 ms<br/>                     Ref 10 dBm<br/>                     Start 30 MHz    97 MHz/    Stop 1 GHz                 </p> <p>ProjectNo.:CR231059186    Tester:Rod Luo<br/>Date: 15.DEC.2023 23:54:50</p> | <p>                     *RBW 1 MHz    Marker 1 [T1]    -43.47 dBm<br/>                     *VBW 3 MHz<br/>                     *Att 20 dB    SWT 150 ms<br/>                     Ref 30 dBm<br/>                     Start 1 GHz    2.55 GHz/    Stop 26.5 GHz                 </p> <p>ProjectNo.:CR231059186    Tester:Rod Luo<br/>Date: 15.DEC.2023 23:42:35</p> |

2305-2315 MHz:





Out of band emission, Band Edge

| Mode                             | Lowest | Highest |
|----------------------------------|--------|---------|
| <p>QPSK<br/>5MHz<br/>full RB</p> |        |         |
| <p>QPSK<br/>5MHz,<br/>RB1</p>    |        |         |




Out of band emission, Band Edge
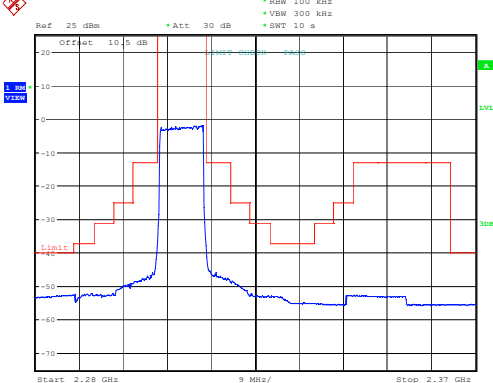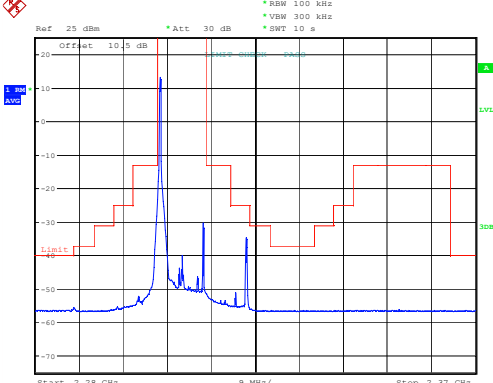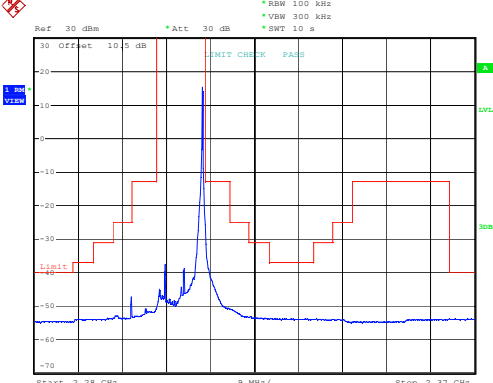
| Mode                              | Middle   |   |
|-----------------------------------|--|---|
| <p>QPSK<br/>10MHz<br/>full RB</p> |  <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 10:52:14</p>   | <p>/</p>  |
| <p>QPSK<br/>10MHz,<br/>RB1</p>    |  <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 16.DEC.2023 01:33:56</p> |  <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 25.DEC.2023 18:36:46</p> |

Out of band emission, Band Edge
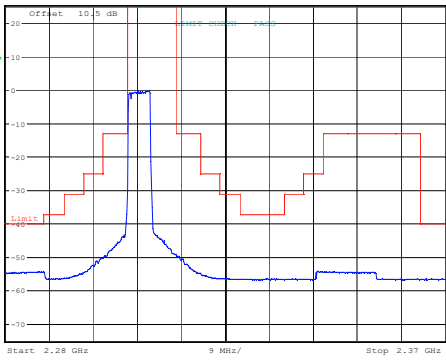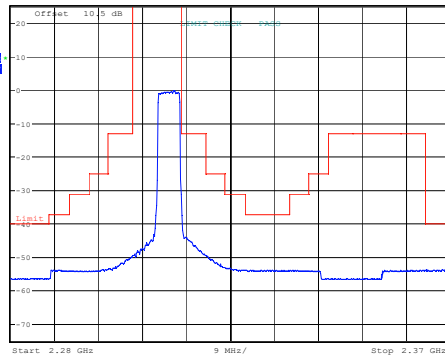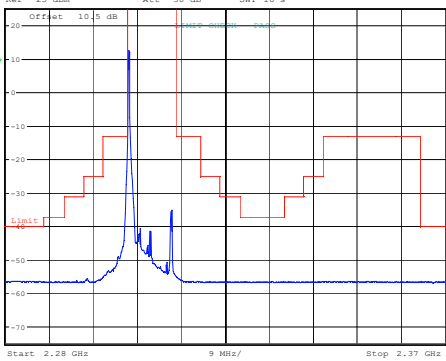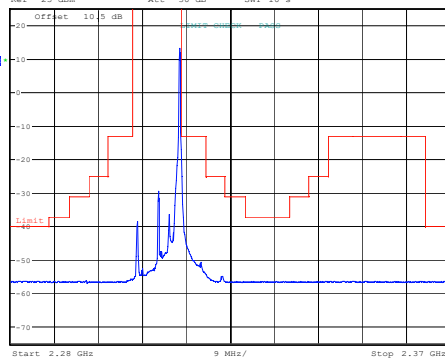
| Mode                              | Lowest   | Highest   |
|-----------------------------------|--|---|
| <p>16QAM<br/>5MHz<br/>full RB</p> |  <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 10:48:13</p>   |  <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 10:50:28</p>   |
| <p>16QAM<br/>5MHz,<br/>RB1</p>    |  <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 16.DEC.2023 01:30:46</p> |  <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 16.DEC.2023 01:32:46</p> |




Out of band emission, Band Edge
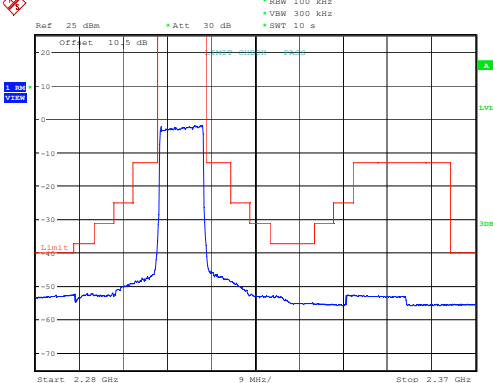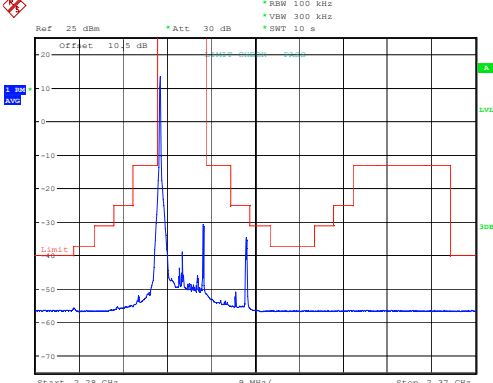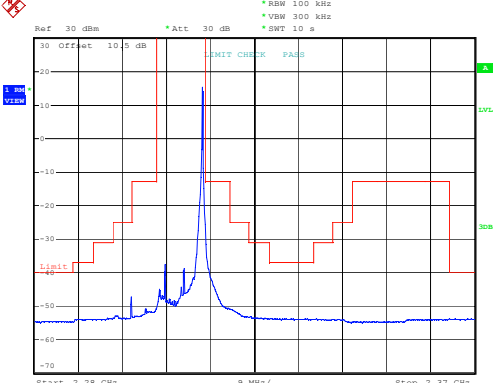
| Mode                               | Middle   |   |
|------------------------------------|--|---|
| <p>16QAM<br/>10MHz<br/>full RB</p> |  <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 10:54:02</p>   | <p>/</p>  |
| <p>16QAM<br/>10MHz,<br/>RB1</p>    |  <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 16.DEC.2023 01:34:45</p> |  <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 25.DEC.2023 18:36:46</p> |

2350-2360 MHz:

| <b>Out of band emission, Band Edge</b> |   |   |
|--|---|---|
| <b>Mode</b>                            | <b>Lowest</b>   | <b>Highest</b>  |
| <b>QPSK<br/>5MHz<br/>full RB</b>       | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 10:38:26</p>  | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 10:40:44</p>  |
| <b>QPSK<br/>5MHz,<br/>RB1</b>          | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 16.DEC.2023 01:36:11</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 16.DEC.2023 01:39:02</p> |

Out of band emission, Band Edge

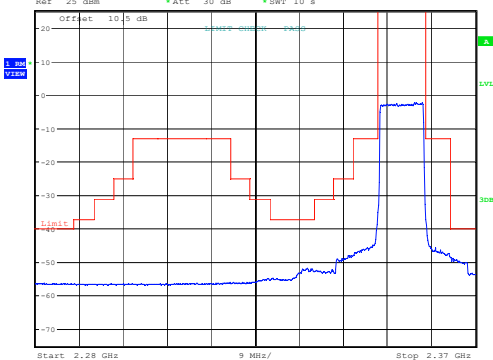
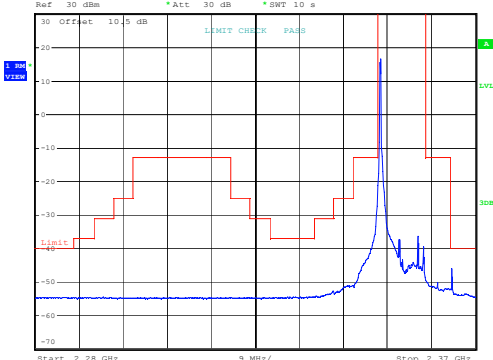
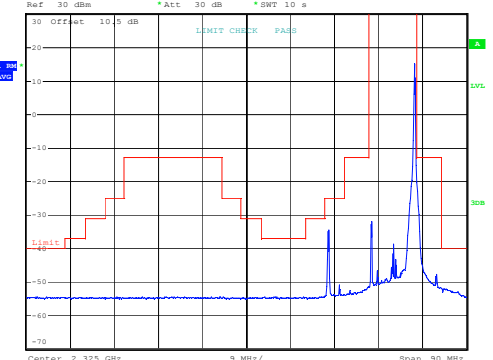
| Mode                              | Middle   |   |
|-----------------------------------|--|---|
| <p>QPSK<br/>10MHz<br/>full RB</p> |  <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 10:43:22</p>   | <p>/</p>  |
| <p>QPSK<br/>10MHz,<br/>RB1</p>    |  <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 25.DEC.2023 18:23:39</p> |  <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 16.DEC.2023 01:51:22</p> |



Out of band emission, Band Edge

| Mode                              | Lowest  | Highest   |
|-----------------------------------|---|---|
| <p>16QAM<br/>5MHz<br/>full RB</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 10:39:28</p>  | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 10:42:04</p>  |
| <p>16QAM<br/>5MHz,<br/>RB1</p>    | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 16.DEC.2023 01:45:15</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 16.DEC.2023 01:47:18</p> |

Out of band emission, Band Edge
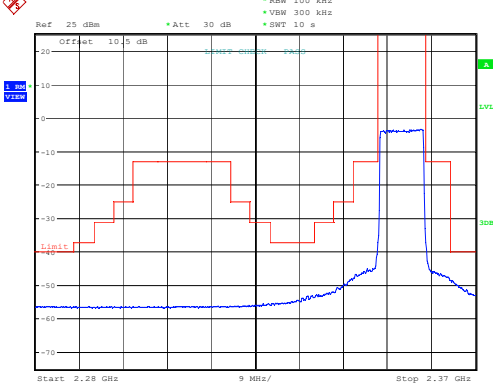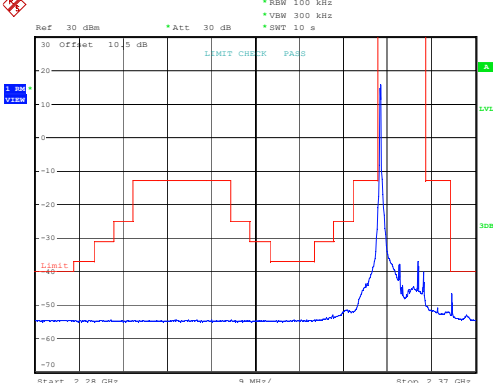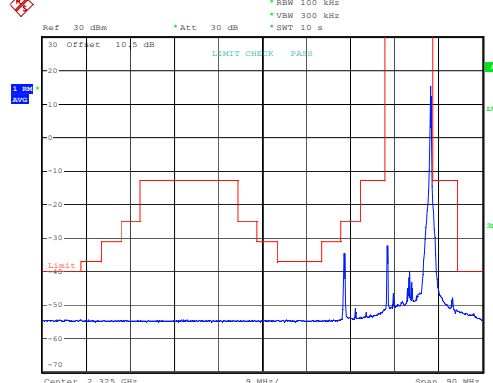
| Mode                               | Middle   |   |
|------------------------------------|--|---|
| <p>16QAM<br/>10MHz<br/>full RB</p> |  <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 10:44:17</p>   | <p>/</p>  |
| <p>16QAM<br/>10MHz,<br/>RB1</p>    |  <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 25.DEC.2023 18:24:13</p> |  <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 16.DEC.2023 01:52:16</p> |

2305-2315 MHz:

Duty cycle

| Mode  | QPSK   | 16QAM  |
|-------|--|--|
| 5MHz  | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 11:20:29</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 11:19:47</p> |
| 10MHz | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 11:22:22</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 11:22:00</p> |

2350-2360 MHz:

| Duty cycle |  |   |
|------------|--|---|
| Mode       | QPSK   | 16QAM   |
| 5MHz       | <p>Ref: 30 dBm, Offset: 10.5 dB, Att: 30 dB, RBW: 10 MHz, VSW: 10 MHz, SWT: 40 ms, Delta: 3 [TT], Mask: 1 [TT], 24.57 dBm, 1.29 dB, -28.85 dBm, 10.010000 ms.</p> <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 11:23:15</p> | <p>Ref: 30 dBm, Offset: 10.5 dB, Att: 30 dB, RBW: 10 MHz, VSW: 10 MHz, SWT: 40 ms, Delta: 3 [TT], Mask: 1 [TT], 24.52 dBm, -0.17 dB, -28.83 dBm, 10.010000 ms.</p> <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 11:22:59</p> |
| 10MHz      | <p>Ref: 30 dBm, Offset: 10.5 dB, Att: 30 dB, RBW: 10 MHz, VSW: 10 MHz, SWT: 40 ms, Delta: 3 [TT], Mask: 1 [TT], 24.53 dBm, 0.35 dB, -28.73 dBm, 10.010000 ms.</p> <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 11:24:18</p> | <p>Ref: 30 dBm, Offset: 10.5 dB, Att: 30 dB, RBW: 10 MHz, VSW: 10 MHz, SWT: 40 ms, Delta: 3 [TT], Mask: 1 [TT], 24.50 dBm, 3.83 dB, -28.89 dBm, 10.010000 ms.</p> <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 11:24:02</p>  |

**4.5 Antenna Port Test Data and Results for LTE Band 41**

|                |         |              |                      |
|----------------|---------|--------------|----------------------|
| Serial Number: | 2C4U-1  | Test Date:   | 2023/11/3~2023/12/26 |
| Test Site:     | RF      | Test Mode:   | Transmitting         |
| Tester:        | Rod Luo | Test Result: | Pass                 |

**Environmental Conditions:**

|                      |       |                           |       |                        |     |
|----------------------|-------|---------------------------|-------|------------------------|-----|
| Temperature:<br>(°C) | 25~26 | Relative Humidity:<br>(%) | 46~47 | ATM Pressure:<br>(kPa) | 101 |
|----------------------|-------|---------------------------|-------|------------------------|-----|

**Test Equipment List and Details:**

| Manufacturer  | Description                         | Model        | Serial Number   | Calibration Date | Calibration Due Date |
|---------------|-------------------------------------|--------------|-----------------|------------------|----------------------|
| R&S           | Spectrum Analyzer                   | FSU26        | 200120          | 2023/4/18        | 2024/4/17            |
| zhuoxiang     | Coaxial Cable                       | SMA-178      | 211002          | Each time        | N/A                  |
| Minl-Circuits | Power Splitter                      | ZFRSC-183-S+ | S F448201619    | Each time        | N/A                  |
| R&S           | Wideband Radio Communication Tester | CMW500       | 143458          | 2023/3/31        | 2024/3/30            |
| BACL          | TEMP&HUMI Test Chamber              | BTH-150-40   | 30174           | 2023/3/31        | 2024/3/30            |
| UNI-T         | Multimeter                          | UT39A+       | C210582554      | 2023/9/28        | 2024/9/27            |
| ZHAOXIN       | DC Power Supply                     | RXN-6010D    | 21R6010D0912386 | N/A              | N/A                  |

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Frequency for Each Mode:**

| Operation Bandwidth | Lowest Frequency (MHz) | Middle Frequency (MHz) | Highest Frequency (MHz) |
|---------------------|------------------------|------------------------|-------------------------|
| 5MHz                | 2537.5                 | 2595                   | 2652.5                  |
| 10MHz               | 2540                   | 2595                   | 2650                    |
| 15MHz               | 2542.5                 | 2595                   | 2647.5                  |
| 20MHz               | 2545                   | 2595                   | 2645                    |

**Test Data:**

| FCC§2.1046;§ 27.50(h)(2)    |                            |                                     |                |                 |                    |                  |
|-----------------------------|----------------------------|-------------------------------------|----------------|-----------------|--------------------|------------------|
| RF Output Power:            |                            |                                     |                |                 |                    |                  |
| Test Bandwidth & Modulation | Resource Block & RB offset | Conducted Average Output Power(dBm) |                |                 | Maximum EIRP (dBm) | EIRP Limit (dBm) |
|                             |                            | Lowest Channel                      | Middle Channel | Highest Channel |                    |                  |
| 5MHz QPSK                   | RB1#0                      | 22.32                               | 22.07          | 21.69           | 21.05              | 33               |
|                             | RB1#13                     | 22.47                               | 22.17          | 21.8            |                    |                  |
|                             | RB1#24                     | 22.36                               | 22.06          | 21.66           |                    |                  |
|                             | RB15#0                     | 21.45                               | 21.19          | 20.78           |                    |                  |
|                             | RB15#10                    | 21.45                               | 21.1           | 20.73           |                    |                  |
|                             | RB25#0                     | 21.46                               | 21.17          | 20.75           |                    |                  |
| 5MHz 16QAM                  | RB1#0                      | 21.4                                | 21.17          | 20.97           | 20.1               | 33               |
|                             | RB1#13                     | 21.52                               | 21.29          | 21.07           |                    |                  |
|                             | RB1#24                     | 21.42                               | 21.12          | 20.94           |                    |                  |
|                             | RB15#0                     | 20.42                               | 20.19          | 19.81           |                    |                  |
|                             | RB15#10                    | 20.41                               | 20.17          | 19.79           |                    |                  |
|                             | RB25#0                     | 20.47                               | 20.23          | 19.75           |                    |                  |
| 10MHz QPSK                  | RB1#0                      | 22.52                               | 22.15          | 21.84           | 21.41              | 33               |
|                             | RB1#25                     | 22.83                               | 22.43          | 22.07           |                    |                  |
|                             | RB1#49                     | 22.48                               | 22.24          | 21.81           |                    |                  |
|                             | RB25#0                     | 21.53                               | 21.2           | 20.83           |                    |                  |
|                             | RB25#25                    | 21.51                               | 21.18          | 20.78           |                    |                  |
|                             | RB50#0                     | 21.51                               | 21.18          | 20.8            |                    |                  |
| 10MHz 16QAM                 | RB1#0                      | 21.64                               | 21.53          | 20.79           | 20.52              | 33               |
|                             | RB1#25                     | 21.94                               | 21.69          | 21.04           |                    |                  |
|                             | RB1#49                     | 21.65                               | 21.35          | 20.72           |                    |                  |
|                             | RB25#0                     | 20.54                               | 20.2           | 19.84           |                    |                  |
|                             | RB25#25                    | 20.53                               | 20.16          | 19.82           |                    |                  |
|                             | RB50#0                     | 20.58                               | 20.2           | 19.79           |                    |                  |
| 15MHz QPSK                  | RB1#0                      | 22.24                               | 22.13          | 21.73           | 21.09              | 33               |
|                             | RB1#38                     | 22.51                               | 22.18          | 21.79           |                    |                  |
|                             | RB1#74                     | 22.36                               | 22.1           | 21.6            |                    |                  |
|                             | RB36#0                     | 21.52                               | 21.22          | 20.84           |                    |                  |
|                             | RB36#39                    | 21.49                               | 21.17          | 20.79           |                    |                  |
|                             | RB75#0                     | 21.51                               | 21.19          | 20.82           |                    |                  |
| 15MHz 16QAM                 | RB1#0                      | 21.38                               | 21.33          | 20.94           | 20.06              | 33               |
|                             | RB1#38                     | 21.48                               | 21.42          | 21.04           |                    |                  |
|                             | RB1#74                     | 21.31                               | 21.23          | 20.84           |                    |                  |
|                             | RB36#0                     | 20.46                               | 20.22          | 19.78           |                    |                  |
|                             | RB36#39                    | 20.4                                | 20.19          | 19.71           |                    |                  |
|                             | RB75#0                     | 20.5                                | 20.17          | 19.75           |                    |                  |
| 20MHz QPSK                  | RB1#0                      | 22.29                               | 21.94          | 21.63           | 21.42              | 33               |

|             |         |       |       |       |       |    |
|-------------|---------|-------|-------|-------|-------|----|
|             | RB1#50  | 22.84 | 22.42 | 22.05 |       |    |
|             | RB1#99  | 22.16 | 21.87 | 21.5  |       |    |
|             | RB50#0  | 21.52 | 21.2  | 20.87 |       |    |
|             | RB50#50 | 21.49 | 21.16 | 20.79 |       |    |
|             | RB100#0 | 21.46 | 21.21 | 20.83 |       |    |
| 20MHz 16QAM | RB1#0   | 21.58 | 21.02 | 20.65 | 20.62 | 33 |
|             | RB1#50  | 22.04 | 21.54 | 21.08 |       |    |
|             | RB1#99  | 21.39 | 20.97 | 20.51 |       |    |
|             | RB50#0  | 20.56 | 20.19 | 19.92 |       |    |
|             | RB50#50 | 20.49 | 20.16 | 19.8  |       |    |
|             | RB100#0 | 20.47 | 20.21 | 19.84 |       |    |

Note: EIRP=Conducted Power(dBm) - Lc(dB) + Gr(dBi)

**Result:**

**Pass**

### Peak-to-average Ratio(PAR)

| Test Bandwidth & Modulation | Resource Block & RB offset | Peak-to-average Ratio(dB) |                |                 | Limit (dB)  |
|-----------------------------|----------------------------|---------------------------|----------------|-----------------|-------------|
|                             |                            | Lowest Channel            | Middle Channel | Highest Channel |             |
| 20MHz QPSK                  | RB1#0                      | 8.87                      | 8.93           | 8.67            | 13          |
|                             | RB100#0                    | 8.81                      | 9.13           | 9.1             | 13          |
| 20MHz 16QAM                 | RB1#0                      | 9.33                      | 9.62           | 9.86            | 13          |
|                             | RB100#0                    | 9.88                      | 9.91           | 9.42            | 13          |
| <b>Result:</b>              |                            |                           |                |                 | <b>Pass</b> |

### FCC §2.1049, §27.53:Occupied Bandwidth

| Operation Mode | 99% Occupied Bandwidth (MHz) |                |              | 26 dB Occupied Bandwidth (MHz) |                |              |
|----------------|------------------------------|----------------|--------------|--------------------------------|----------------|--------------|
|                | Low Channel                  | Middle channel | High Channel | Low Channel                    | Middle Channel | High Channel |
| 5MHz QPSK      | 4.52                         | 4.50           | 4.52         | 5.32                           | 5.28           | 5.00         |
| 5MHz 16QAM     | 4.50                         | 4.50           | 4.52         | 4.96                           | 5.04           | 5.06         |
| 10MHz QPSK     | 8.96                         | 8.96           | 9.00         | 9.64                           | 9.56           | 9.80         |
| 10MHz 16QAM    | 8.96                         | 8.96           | 8.96         | 9.48                           | 10.04          | 9.48         |
| 15MHz QPSK     | 13.50                        | 13.56          | 13.62        | 15.54                          | 15.60          | 15.60        |
| 15MHz 16QAM    | 13.56                        | 13.50          | 13.56        | 16.14                          | 16.68          | 15.72        |
| 20MHz QPSK     | 18.00                        | 18.00          | 18.08        | 19.52                          | 19.84          | 19.68        |
| 20MHz 16QAM    | 18.00                        | 18.00          | 17.92        | 20.48                          | 19.36          | 19.52        |

Note: The test plots please refer to the Plots of Occupied Bandwidth

### FCC §2.1051, § 27.53:Spurious Emissions at Antenna Terminal

**Result:** Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.

### FCC §2.1051, § 27.53:Out of band emission, Band Edge

**Result:** Pass, Please refer to the test plots of Out of band emission, Band Edge.

| <b>FCC §2.1055, §27.54: Frequency Stability</b> |                  |  |                  |         |                  |             |
|---|------------------|--|------------------|---------|------------------|-------------|
| Test Mode:                                      | 20M QPSK         | Test Channel: Lowest for Lower Edge,Highest for Upper Edge |                  |         |                  |             |
| Test Item                                       | Temperature (°C) | Voltage (V <sub>DC</sub> )                                 | Lower Edge (MHz) |         | Upper Edge (MHz) |             |
|   |                  |  | Result           | Limit   | Result           | Limit       |
| Frequency Stability vs. Temperature             | -30              | 3.85   | 2535.148         | 2535.00 | 2654.963         | 2655        |
|   | -20              | 3.85   | 2535.099         | 2555.00 | 2654.998         | 2655        |
|   | -10              | 3.85   | 2535.147         | 2535.00 | 2654.925         | 2655        |
|   | 0                | 3.85   | 2535.113         | 2555.00 | 2654.892         | 2655        |
|   | 10               | 3.85   | 2535.013         | 2535.00 | 2654.921         | 2655        |
|   | 20               | 3.85   | 2535.116         | 2555.00 | 2654.902         | 2655        |
|   | 30               | 3.85   | 2535.105         | 2535.00 | 2654.854         | 2655        |
|   | 40               | 3.85   | 2535.052         | 2555.00 | 2654.928         | 2655        |
|   | 50               | 3.85   | 2535.113         | 2535.00 | 2654.925         | 2655        |
| Frequency Stability vs. Voltage                 | 20               | 3.47   | 2535.112         | 2555.00 | 2654.865         | 2655        |
|   | 20               | 4.24   | 2535.083         | 2535.00 | 2654.892         | 2655        |
|   |                  |  |                  |         | <b>Result:</b>   | <b>Pass</b> |

| Test Mode:                          | 20M 16QAM        | Test Channel: Lowest for Lower Edge,Highest for Upper Edge |                  |         |                  |             |
|-------------------------------------|------------------|--|------------------|---------|------------------|-------------|
| Test Item                           | Temperature (°C) | Voltage (V <sub>DC</sub> )                                 | Lower Edge (MHz) |         | Upper Edge (MHz) |             |
|                                     |                  |  | Result           | Limit   | Result           | Limit       |
| Frequency Stability vs. Temperature | -30              | 3.85   | 2535.011         | 2535.00 | 2654.963         | 2655        |
|                                     | -20              | 3.85   | 2535.119         | 2555.00 | 2654.998         | 2655        |
|                                     | -10              | 3.85   | 2535.026         | 2535.00 | 2654.925         | 2655        |
|                                     | 0                | 3.85   | 2535.129         | 2555.00 | 2654.892         | 2655        |
|                                     | 10               | 3.85   | 2535.027         | 2535.00 | 2654.921         | 2655        |
|                                     | 20               | 3.85   | 2535.021         | 2555.00 | 2654.902         | 2655        |
|                                     | 30               | 3.85   | 2535.049         | 2535.00 | 2654.854         | 2655        |
|                                     | 40               | 3.85   | 2535.031         | 2555.00 | 2654.928         | 2655        |
|                                     | 50               | 3.85   | 2535.081         | 2535.00 | 2654.925         | 2655        |
| Frequency Stability vs. Voltage     | 20               | 3.47   | 2535.067         | 2555.00 | 2654.865         | 2655        |
|                                     | 20               | 4.24   | 2535.123         | 2535.00 | 2654.892         | 2655        |
|                                     |                  |  |                  |         | <b>Result:</b>   | <b>Pass</b> |



**Test Plots** (Note: The 10.5 dB is the Insertion loss of the RF cable and Power Splitter, which was offset into the Spectrum Analyzer):

| <b>Occupied Bandwidth</b> |  |  |
|---------------------------|--|--|
| <b>Channel</b>            | <b>5MHz Bandwidth QPSK</b>   | <b>5MHz Bandwidth 16QAM</b>  |
| <b>Lowest</b>             | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 12:18:07</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 12:18:32</p> |
| <b>Middle</b>             | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 12:18:59</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 12:19:31</p> |
| <b>Highest</b>            | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 12:19:55</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 12:20:17</p> |

Occupied Bandwidth

| Channel | 10MHz Bandwidth QPSK   | 10MHz Bandwidth 16QAM  |
|---------|--|--|
| Lowest  | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 12:21:15</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 12:21:44</p> |
| Middle  | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 12:21:11</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 12:22:40</p> |
| Highest | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 12:23:06</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 12:23:29</p> |

Occupied Bandwidth

| Channel | 15MHz Bandwidth QPSK   | 15MHz Bandwidth 16QAM  |
|---------|--|--|
| Lowest  | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 12:24:29</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 12:25:04</p> |
| Middle  | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 12:25:31</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 12:26:03</p> |
| Highest | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 12:26:27</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 12:26:56</p> |

Occupied Bandwidth

| Channel | 20MHz Bandwidth QPSK  | 20MHz Bandwidth 16QAM   |
|---------|---|---|
| Lowest  | <p>Ref 30 dBm *Att 25 dB *RSW 300 kHz Delta 1 [T1] 0.59 dB<br/>           *VSW 1 MHz<br/>           SWT 2.5 ms 19.520000000 MHz<br/>           OSW 0.000000000 MHz<br/>           Marker 1 [T1] 15.32 dBm<br/>           2.535160000 GHz<br/>           Temp 1 [T1 OSW]<br/>           2.538040000 GHz<br/>           Temp 2 [T1 OSW]<br/>           2.554040000 GHz</p> <p>Center 2.545 GHz 4 MHz/ Span 40 MHz</p> <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>           Date: 3.NOV.2023 12:27:56</p> | <p>Ref 30 dBm *Att 25 dB *RSW 300 kHz Delta 1 [T1] 0.66 dB<br/>           *VSW 1 MHz<br/>           SWT 2.5 ms 20.480000000 MHz<br/>           OSW 0.000000000 MHz<br/>           Marker 1 [T1] 14.18 dBm<br/>           2.534600000 GHz<br/>           Temp 1 [T1 OSW]<br/>           2.538040000 GHz<br/>           Temp 2 [T1 OSW]<br/>           2.554040000 GHz</p> <p>Center 2.545 GHz 4 MHz/ Span 40 MHz</p> <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>           Date: 3.NOV.2023 12:28:31</p> |
| Middle  | <p>Ref 30 dBm *Att 25 dB *RSW 300 kHz Delta 1 [T1] 0.40 dB<br/>           *VSW 1 MHz<br/>           SWT 2.5 ms 19.840000000 MHz<br/>           OSW 0.000000000 MHz<br/>           Marker 1 [T1] 13.79 dBm<br/>           2.584900000 GHz<br/>           Temp 1 [T1 OSW]<br/>           2.586000000 GHz<br/>           Temp 2 [T1 OSW]<br/>           2.604040000 GHz</p> <p>Center 2.595 GHz 4 MHz/ Span 40 MHz</p> <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>           Date: 3.NOV.2023 12:29:01</p> | <p>Ref 30 dBm *Att 25 dB *RSW 300 kHz Delta 1 [T1] 0.84 dB<br/>           *VSW 1 MHz<br/>           SWT 2.5 ms 19.360000000 MHz<br/>           OSW 0.000000000 MHz<br/>           Marker 1 [T1] 13.35 dBm<br/>           2.585300000 GHz<br/>           Temp 1 [T1 OSW]<br/>           2.586000000 GHz<br/>           Temp 2 [T1 OSW]<br/>           2.604040000 GHz</p> <p>Center 2.595 GHz 4 MHz/ Span 40 MHz</p> <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>           Date: 3.NOV.2023 12:29:33</p> |
| Highest | <p>Ref 30 dBm *Att 25 dB *RSW 300 kHz Delta 1 [T1] 0.10 dB<br/>           *VSW 1 MHz<br/>           SWT 2.5 ms 19.680000000 MHz<br/>           OSW 0.000000000 MHz<br/>           Marker 1 [T1] 13.62 dBm<br/>           2.635000000 GHz<br/>           Temp 1 [T1 OSW]<br/>           2.632900000 GHz<br/>           Temp 2 [T1 OSW]<br/>           2.654040000 GHz</p> <p>Center 2.645 GHz 4 MHz/ Span 40 MHz</p> <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>           Date: 3.NOV.2023 12:30:00</p> | <p>Ref 30 dBm *Att 25 dB *RSW 300 kHz Delta 1 [T1] 0.89 dB<br/>           *VSW 1 MHz<br/>           SWT 2.5 ms 19.520000000 MHz<br/>           OSW 0.000000000 MHz<br/>           Marker 1 [T1] 12.20 dBm<br/>           2.635240000 GHz<br/>           Temp 1 [T1 OSW]<br/>           2.636000000 GHz<br/>           Temp 2 [T1 OSW]<br/>           2.653900000 GHz</p> <p>Center 2.645 GHz 4 MHz/ Span 40 MHz</p> <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>           Date: 3.NOV.2023 12:30:20</p> |

Spurious Emissions at Antenna Terminal

| Channel     | 5MHz Bandwidth QPSK   |  |
|-------------|---|--|
| Lowest RB1  | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 26.DEC.2023 10:15:38</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 13:02:05</p> |
| Middle RB1  | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 26.DEC.2023 10:16:23</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 13:02:28</p> |
| Highest RB1 | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 26.DEC.2023 10:17:48</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 13:02:54</p> |

Spurious Emissions at Antenna Terminal


| Channel     | 10MHz Bandwidth QPSK  |  |
|-------------|---|--|
| Lowest RB1  | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 26.DEC.2023 10:18:11</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 13:03:52</p> |
| Middle RB1  | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 26.DEC.2023 10:18:39</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 13:04:14</p> |
| Highest RB1 | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 26.DEC.2023 10:19:38</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 13:04:40</p> |

Spurious Emissions at Antenna Terminal


Channel

15MHz Bandwidth QPSK

Lowest RB1

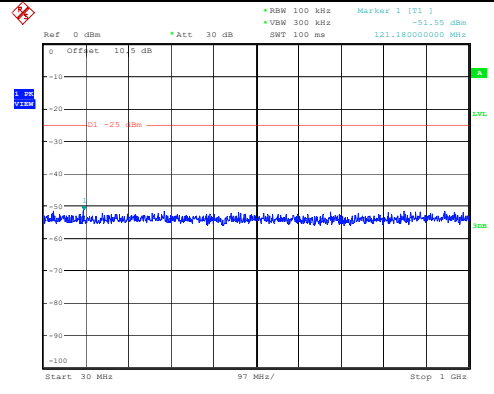


ProjectNo.:CR231059186 Tester:Rod Luo  
Date: 26.DEC.2023 10:19:58

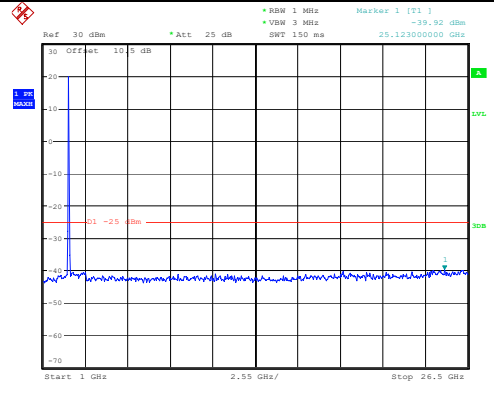


ProjectNo.:CR231059186 Tester:Rod Luo  
Date: 3.NOV.2023 13:05:30

Middle RB1

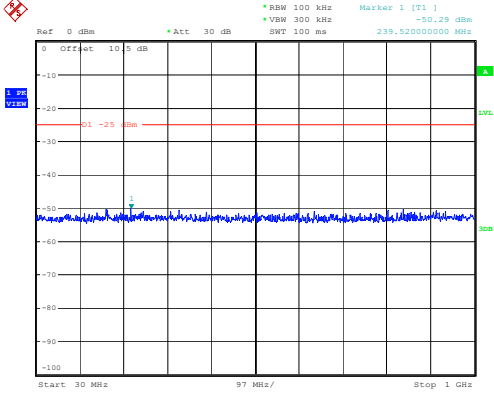


ProjectNo.:CR231059186 Tester:Rod Luo  
Date: 26.DEC.2023 10:21:39

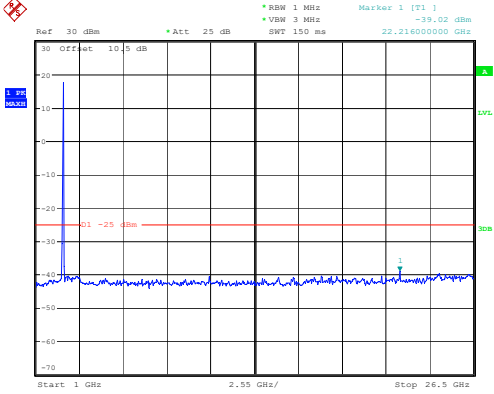


ProjectNo.:CR231059186 Tester:Rod Luo  
Date: 3.NOV.2023 13:05:53

Highest RB1

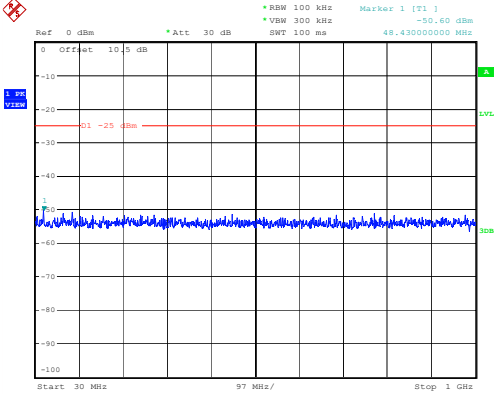

ProjectNo.:CR231059186 Tester:Rod Luo  
Date: 26.DEC.2023 10:25:28

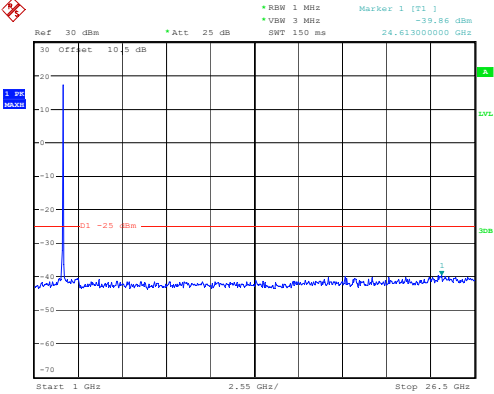


ProjectNo.:CR231059186 Tester:Rod Luo  
Date: 3.NOV.2023 13:06:16

Spurious Emissions at Antenna Terminal


Channel

20MHz Bandwidth QPSK

Lowest RB1

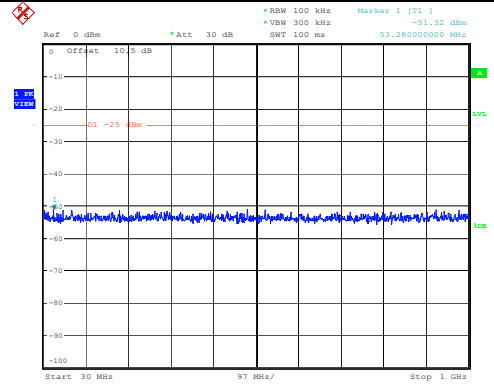


ProjectNo.:CR231059186 Tester:Rod Luo  
 Date: 26.DEC.2023 10:26:29

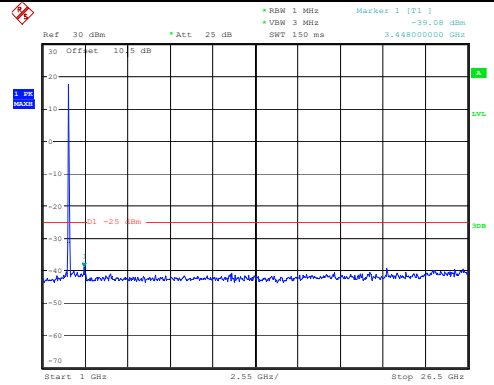


ProjectNo.:CR231059186 Tester:Rod Luo  
 Date: 3.NOV.2023 13:07:05

Middle RB1

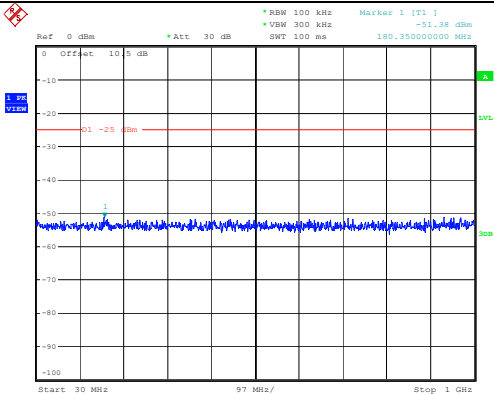


ProjectNo.:CR231059186 Tester:Rod Luo  
 Date: 26.DEC.2023 10:26:07

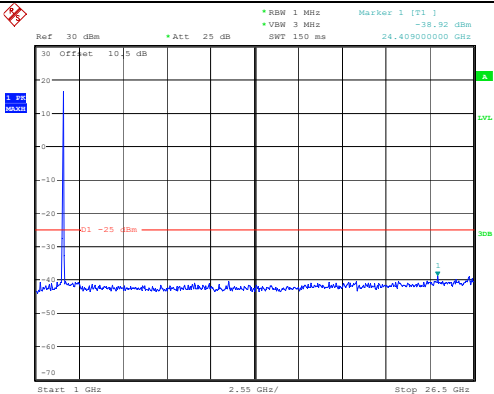


ProjectNo.:CR231059186 Tester:Rod Luo  
 Date: 3.NOV.2023 13:07:31

Highest RB1

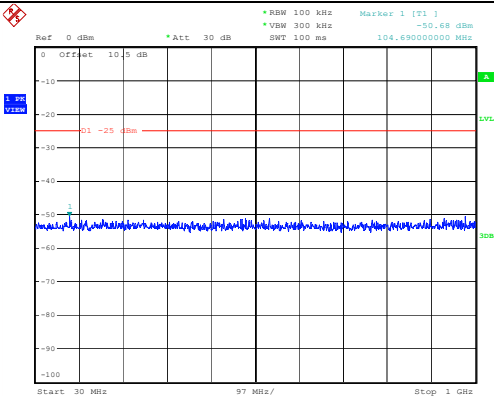







ProjectNo.:CR231059186 Tester:Rod Luo  
 Date: 26.DEC.2023 10:26:56

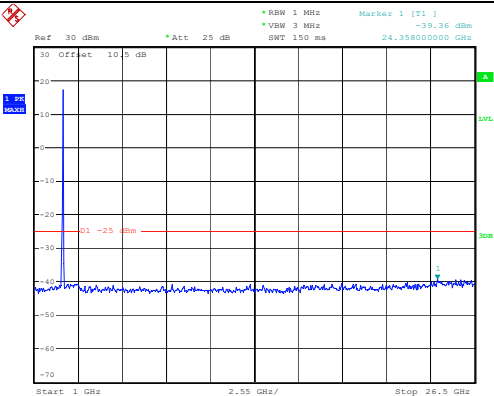

ProjectNo.:CR231059186 Tester:Rod Luo  
 Date: 3.NOV.2023 13:07:57







Out of band emission, Band Edge

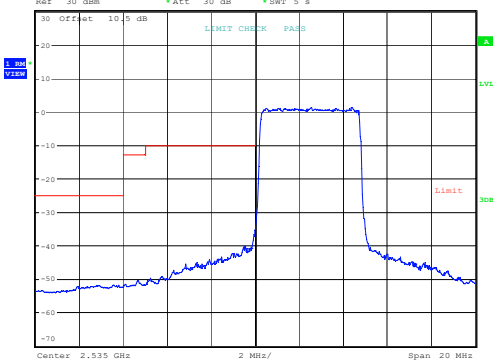
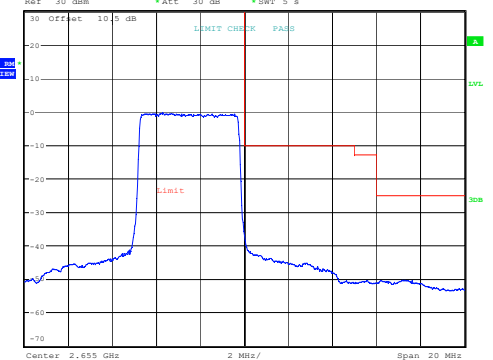
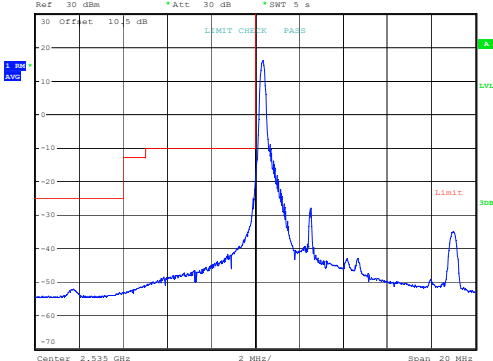
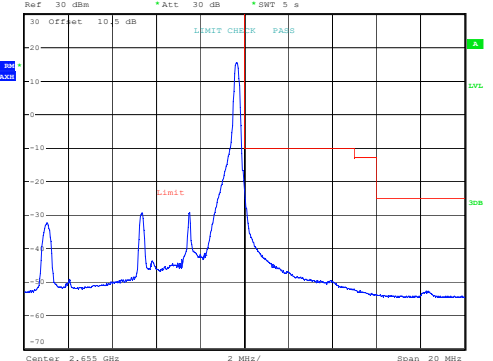
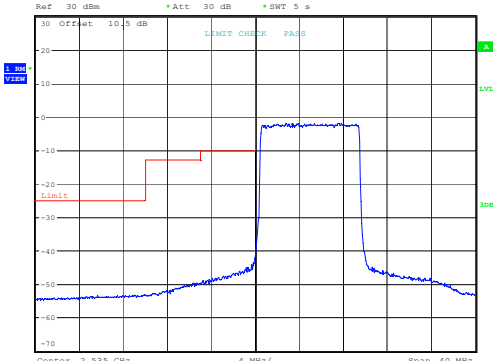
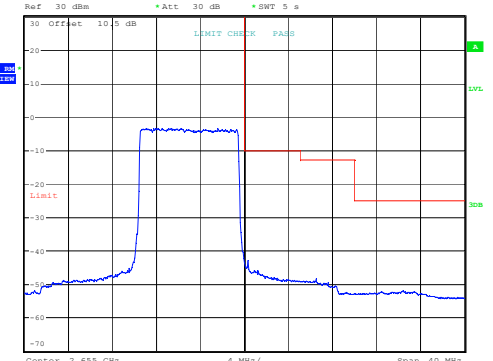
| Mode                              | Lowest   | Highest   |
|-----------------------------------|--|---|
| <p>QPSK<br/>5MHz<br/>full RB</p>  |  <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 13:17:54</p>   |  <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 13:18:42</p>   |
| <p>QPSK<br/>5MHz<br/>RB1</p>      |  <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 16.DEC.2023 01:58:36</p> |  <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 16.DEC.2023 02:00:29</p> |
| <p>QPSK<br/>10MHz<br/>full RB</p> |  <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 13:29:36</p> |  <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 13:30:24</p> |

|                                   |   |   |
|-----------------------------------|---|---|
| <p>QPSK<br/>10MHz<br/>RB1</p>     | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 16.DEC.2023 02:21:14</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 16.DEC.2023 02:22:15</p> |
| <p>QPSK<br/>15MHz<br/>full RB</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 13:33:04</p>  | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 13:33:15</p>  |
| <p>QPSK<br/>15MHz<br/>RB1</p>     | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 16.DEC.2023 02:26:27</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 16.DEC.2023 02:27:44</p> |

Out of band emission, Band Edge

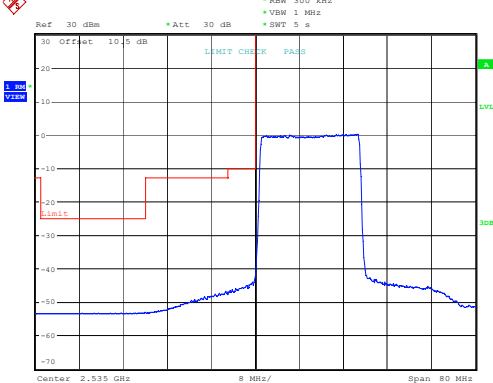
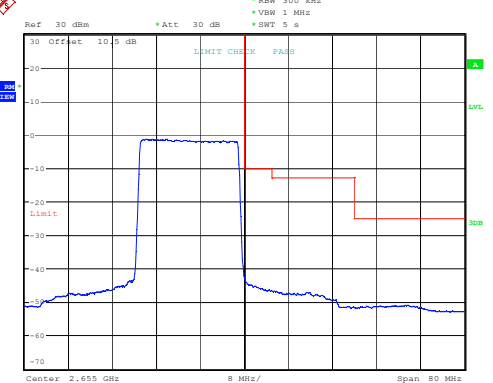
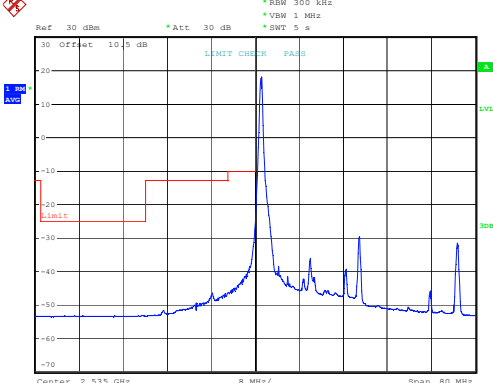
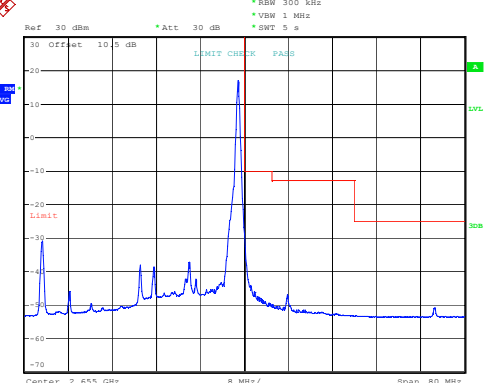
| Mode                              | Lowest   | Highest   |
|-----------------------------------|--|---|
| <p>QPSK<br/>20MHz<br/>full RB</p> |  <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 13:37:09</p>   |  <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 13:38:05</p>   |
| <p>QPSK<br/>20MHz<br/>RB1</p>     |  <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 16.DEC.2023 02:34:35</p> |  <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 16.DEC.2023 02:35:38</p> |

Out of band emission, Band Edge
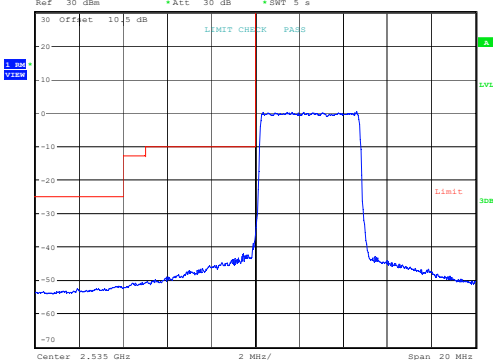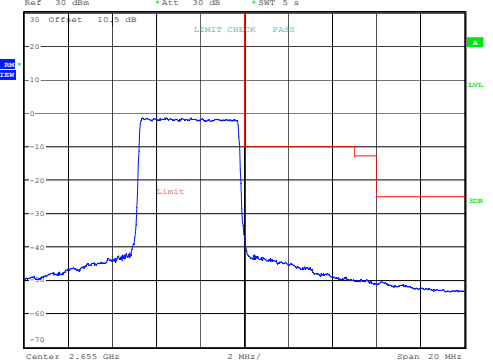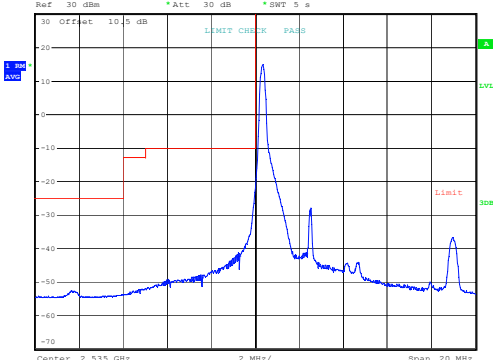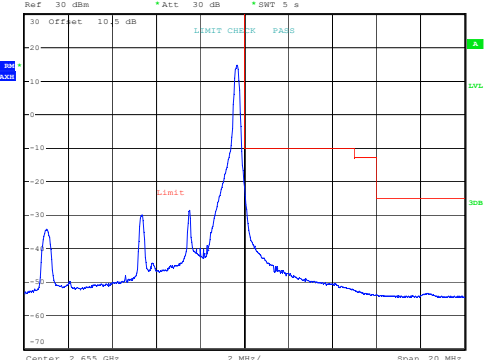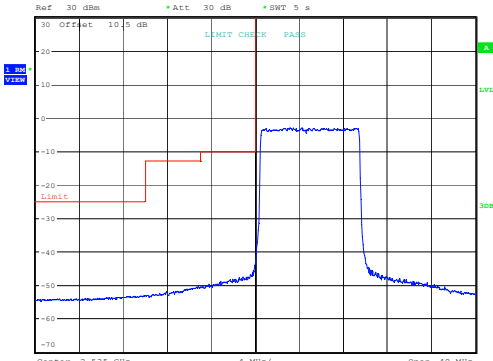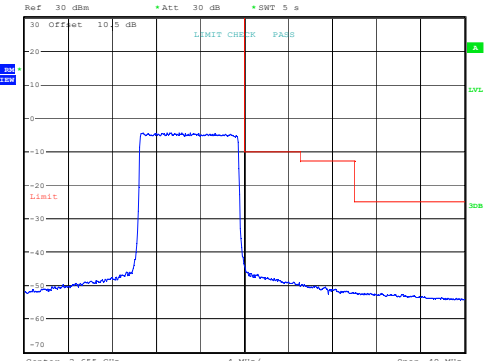
| Mode                               | Lowest   | Highest   |
|------------------------------------|--|---|
| <p>16QAM<br/>5MHz<br/>full RB</p>  |  <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 13:19:31</p>   |  <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 13:51:29</p>   |
| <p>16QAM<br/>5MHz<br/>RB1</p>      |  <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 16.DEC.2023 02:03:42</p> |  <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 16.DEC.2023 02:08:17</p> |
| <p>16QAM<br/>10MHz<br/>full RB</p> |  <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 13:31:11</p> |  <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 13:31:57</p> |

|                                    |   |   |
|------------------------------------|---|---|
| <p>16QAM<br/>10MHz<br/>RB1</p>     | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 16.DEC.2023 02:23:11</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 16.DEC.2023 02:24:07</p> |
| <p>16QAM<br/>15MHz<br/>full RB</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 13:34:39</p>  | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 13:35:41</p>  |
| <p>16QAM<br/>15MHz<br/>RB1</p>     | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 16.DEC.2023 02:28:43</p> | <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 16.DEC.2023 02:30:06</p> |

Out of band emission, Band Edge
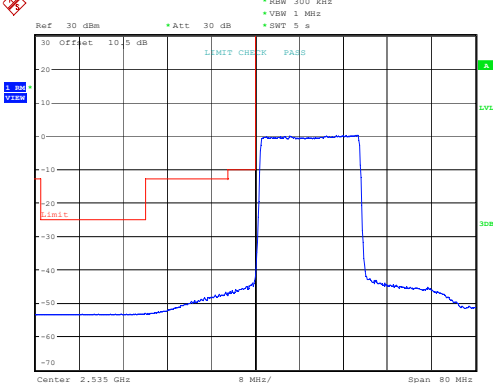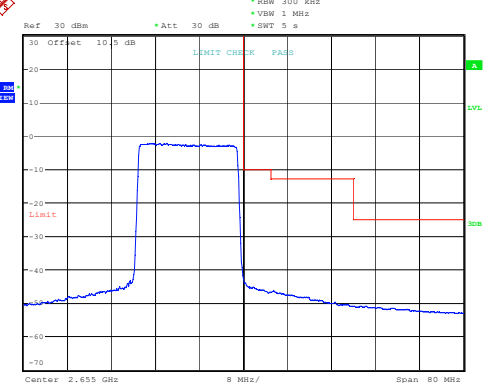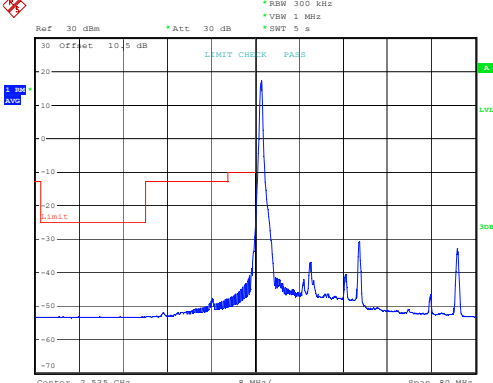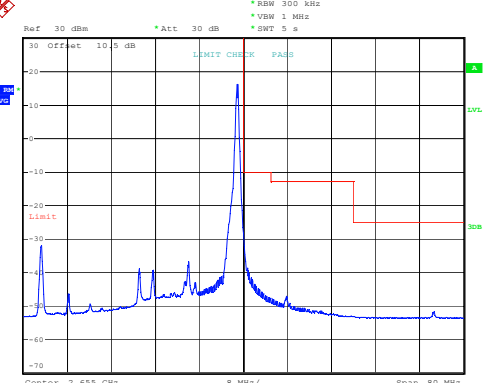
| Mode                               | Lowest   | Highest   |
|------------------------------------|--|---|
| <p>16QAM<br/>20MHz<br/>full RB</p> |  <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 13:37:09</p>   |  <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 3.NOV.2023 13:39:40</p>   |
| <p>16QAM<br/>20MHz<br/>RB1</p>     |  <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 16.DEC.2023 02:36:32</p> |  <p>ProjectNo.:CR231059186 Tester:Rod Luo<br/>Date: 16.DEC.2023 02:37:35</p> |

**4.6 Radiated Spurious Emissions**

|                |                 |              |   |
|----------------|-----------------|--------------|---|
| Serial Number: | 2C4U-2          | Test Date:   | Below 1GHz: 2023/11/24<br>Above 1GHz: 2023/11/6 |
| Test Site:     | 966-1           | Test Mode:   | Transmitting                                    |
| Tester:        | Vic Du, Tao Zhu | Test Result: | Pass  |

**Environmental Conditions:**

|                      |      |                           |       |                           |       |
|----------------------|------|---------------------------|-------|---------------------------|-------|
| Temperature:<br>(°C) | 25.7 | Relative Humidity:<br>(%) | 47~64 | ATM<br>Pressure:<br>(kPa) | 101.1 |
|----------------------|------|---------------------------|-------|---------------------------|-------|

**Test Equipment List and Details:**

| Manufacturer       | Description                     | Model                 | Serial Number | Calibration Date | Calibration Due Date |
|--------------------|---------------------------------|-----------------------|---------------|------------------|----------------------|
| <b>Below 1GHz</b>  |                                 |                       |               |                  |                      |
| Sunol Sciences     | Antenna                         | JB6                   | A082520-6     | 2023/9/18        | 2026/9/17            |
| R&S                | EMI Test Receiver               | ESR3                  | 102724        | 2023/3/31        | 2024/3/30            |
| TIMES<br>MICROWAVE | Coaxial Cable                   | LMR-600-UltraFlex     | C-0470-02     | 2023/7/16        | 2024/7/15            |
| TIMES<br>MICROWAVE | Coaxial Cable                   | LMR-600-UltraFlex     | C-0780-01     | 2023/7/16        | 2024/7/15            |
| Sonoma             | Amplifier                       | 310N                  | 186165        | 2023/7/16        | 2024/7/15            |
| EMCO               | Adjustable Dipole Antenna       | 3121C                 | 9109-756      | N/A              | N/A                  |
| MICRO-COAX         | Coaxial Cable                   | UFA210B-0-0720-300300 | 99G1448       | 2023/7/16        | 2024/7/15            |
| Agilent            | Signal Generator                | E8247C                | MY43321352    | 2023/11/17       | 2024/11/16           |
| <b>Above 1GHz</b>  |                                 |                       |               |                  |                      |
| AH                 | Double Ridge Guide              | SAS-571               | 1394          | 2023/2/22        | 2026/2/21            |
| R&S                | Spectrum Analyzer               | FSV40                 | 101591        | 2023/3/31        | 2024/3/30            |
| MICRO-COAX         | Coaxial Cable                   | UFA210A-1-1200-70U300 | 217423-008    | 2023/8/6         | 2024/8/5             |
| MICRO-COAX         | Coaxial Cable                   | UFA210A-1-2362-300300 | 235780-001    | 2023/8/6         | 2024/8/5             |
| Mini               | Pre-amplifier                   | ZVA-183-S+            | 5969001149    | 2022/11/9        | 2023/11/8            |
| AH                 | Double Ridge Guide Horn Antenna | SAS-571               | 1396          | 2021/10/18       | 2024/10/17           |
| MICRO-COAX         | Coaxial Cable                   | UFA210B-0-0720-300300 | 99G1448       | 2023/7/16        | 2024/7/15            |
| Agilent            | Signal Generator                | E8247C                | MY43321352    | 2022/11/18       | 2023/11/17           |
| PASTERNAK          | Horn Antenna                    | PE9852/2F-20          | 112002        | 2021/2/5         | 2024/2/4             |
| PASTERNAK          | Horn Antenna                    | PE9852/2F-20          | 112001        | 2021/2/5         | 2024/2/4             |
| Quinstar           | Preamplifier                    | QLW-18405536-JO       | 15964001005   | 2023/9/15        | 2024/9/14            |
| PASTERNAK          | Horn Antenna                    | PE9850/2F-20          | 072001        | 2021/2/5         | 2024/2/4             |
| PASTERNAK          | Horn Antenna                    | PE9850/2F-20          | 072002        | 2021/2/5         | 2024/2/4             |
| MICRO-COAX         | Coaxial Cable                   | UFB142A-1-2362-200200 | 235772-001    | 2023/8/6         | 2024/8/5             |

**\* Statement of Traceability:** China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data:**

Please refer to the below table and plots.

After pre-scan in the X, Y and Z axes of orientation, the worst case is below:

**Cellular Band (30MHz-10GHz)**

| Frequency (MHz)            | Polar (H/V) | Receiver Reading (dBμV) | Substituted Method      |                        |                 | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|----------------------------|-------------|-------------------------|-------------------------|------------------------|-----------------|----------------------|-------------|-------------|
|                            |             |                         | Substituted Level (dBm) | Antenna Gain (dBd/dBi) | Cable Loss (dB) |                      |             |             |
| GSM 850 Frequency:824.2MHz |             |                         |                         |                        |                 |                      |             |             |
| 647.56                     | H           | 40.09                   | -33.51                  | 0.00                   | 0.52            | -34.03               | -13.00      | 21.03       |
| 647.56                     | V           | 54.25                   | -16.62                  | 0.00                   | 0.52            | -17.14               | -13.00      | 4.14        |
| 1648.400                   | H           | 82.35                   | -21.98                  | 8.68                   | 0.80            | -18.3                | -13.00      | 5.30        |
| 1648.400                   | V           | 81.18                   | -23.23                  | 8.68                   | 0.80            | -20                  | -13.00      | 7.00        |
| 2472.600                   | H           | 77.67                   | -23.11                  | 9.38                   | 1.00            | -22.1                | -13.00      | 9.10        |
| 2472.600                   | V           | 76.54                   | -24.19                  | 9.38                   | 1.00            | -23                  | -13.00      | 10.00       |
| 3296.800                   | H           | 62.72                   | -33.96                  | 10.32                  | 1.15            | -35.9                | -13.00      | 22.90       |
| 3296.800                   | V           | 61.49                   | -34.95                  | 10.32                  | 1.15            | -36.8                | -13.00      | 23.80       |
| GSM 850 Frequency:836.6MHz |             |                         |                         |                        |                 |                      |             |             |
| 884.46                     | H           | 36.39                   | -32.77                  | 0.00                   | 0.60            | -33.37               | -13.00      | 20.37       |
| 636.31                     | V           | 54.17                   | -16.90                  | 0.00                   | 0.52            | -17.42               | -13.00      | 4.42        |
| 1673.200                   | H           | 82.88                   | -21.43                  | 8.71                   | 0.85            | -17.6                | -13.00      | 4.60        |
| 1673.200                   | V           | 81.69                   | -22.72                  | 8.71                   | 0.85            | -19.4                | -13.00      | 6.40        |
| 2509.800                   | H           | 78.14                   | -22.47                  | 9.42                   | 1.01            | -21.6                | -13.00      | 8.60        |
| 2509.800                   | V           | 77.02                   | -23.60                  | 9.42                   | 1.01            | -22.5                | -13.00      | 9.50        |
| 3346.400                   | H           | 63.36                   | -33.81                  | 10.34                  | 1.16            | -35.2                | -13.00      | 22.20       |
| 3346.400                   | V           | 62.21                   | -34.82                  | 10.34                  | 1.16            | -36.1                | -13.00      | 23.10       |
| GSM 850 Frequency:848.8MHz |             |                         |                         |                        |                 |                      |             |             |
| 623.07                     | H           | 44.90                   | -28.84                  | 0.00                   | 0.48            | -29.32               | -13.00      | 16.32       |
| 623.07                     | V           | 55.04                   | -16.27                  | 0.00                   | 0.48            | -16.75               | -13.00      | 3.75        |
| 1697.600                   | H           | 83.64                   | -20.65                  | 8.74                   | 0.90            | -16.8                | -13.00      | 3.80        |
| 1697.600                   | V           | 82.53                   | -21.89                  | 8.74                   | 0.90            | -18.5                | -13.00      | 5.50        |
| 2546.400                   | H           | 79.06                   | -21.27                  | 9.47                   | 1.01            | -20.7                | -13.00      | 7.70        |
| 2546.400                   | V           | 77.81                   | -22.47                  | 9.47                   | 1.01            | -21.7                | -13.00      | 8.70        |
| 3395.200                   | H           | 64.27                   | -33.42                  | 10.36                  | 1.19            | -34.2                | -13.00      | 21.20       |
| 3395.200                   | V           | 63.12                   | -34.54                  | 10.36                  | 1.19            | -35                  | -13.00      | 22.00       |



**PCS Band (30MHz-20GHz)**

| Frequency (MHz)              | Polar (H/V) | Receiver Reading (dBμV) | Substituted Method      |                        |                 | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|------------------------------|-------------|-------------------------|-------------------------|------------------------|-----------------|----------------------|-------------|-------------|
|                              |             |                         | Substituted Level (dBm) | Antenna Gain (dBd/dBi) | Cable Loss (dB) |                      |             |             |
| GSM 1900 Frequency:1850.2MHz |             |                         |                         |                        |                 |                      |             |             |
| 77.32                        | H           | 30.19                   | -77.98                  | -1.34                  | 0.16            | -79.48               | -13.00      | 66.48       |
| 42.64                        | V           | 34.73                   | -58.51                  | -22.92                 | 0.12            | -81.55               | -13.00      | 68.55       |
| 3700.400                     | H           | 61.95                   | -35.37                  | 10.60                  | 1.25            | -36                  | -13.00      | 23.00       |
| 3700.400                     | V           | 60.78                   | -36.52                  | 10.60                  | 1.25            | -37                  | -13.00      | 24.00       |
| 5550.600                     | H           | 60.39                   | -32.87                  | 11.44                  | 1.49            | -33.4                | -13.00      | 20.40       |
| 5550.600                     | V           | 59.27                   | -33.83                  | 11.44                  | 1.49            | -34.7                | -13.00      | 21.70       |
| GSM 1900 Frequency:1880MHz   |             |                         |                         |                        |                 |                      |             |             |
| 76.71                        | H           | 30.08                   | -77.73                  | -1.64                  | 0.16            | -79.53               | -13.00      | 66.53       |
| 88.35                        | V           | 34.46                   | -74.75                  | 0.00                   | 0.17            | -74.92               | -13.00      | 61.92       |
| 3760.000                     | H           | 62.45                   | -33.96                  | 10.66                  | 1.24            | -35.1                | -13.00      | 22.10       |
| 3760.000                     | V           | 61.28                   | -35.01                  | 10.66                  | 1.24            | -36.2                | -13.00      | 23.20       |
| 5640.000                     | H           | 60.87                   | -32.58                  | 11.33                  | 1.54            | -32.9                | -13.00      | 19.90       |
| 5640.000                     | V           | 59.64                   | -33.69                  | 11.33                  | 1.54            | -34.3                | -13.00      | 21.30       |
| GSM 1900 Frequency:1909.8MHz |             |                         |                         |                        |                 |                      |             |             |
| 77.59                        | H           | 30.24                   | -78.10                  | -1.20                  | 0.16            | -79.46               | -13.00      | 66.46       |
| 70.12                        | V           | 33.05                   | -69.63                  | -4.94                  | 0.15            | -74.72               | -13.00      | 61.72       |
| 3819.600                     | H           | 63.21                   | -32.65                  | 10.72                  | 1.29            | -34.3                | -13.00      | 21.30       |
| 3819.600                     | V           | 62.05                   | -33.67                  | 10.72                  | 1.29            | -35.4                | -13.00      | 22.40       |
| 5729.400                     | H           | 61.48                   | -32.00                  | 11.22                  | 1.59            | -32                  | -13.00      | 19.00       |
| 5729.400                     | V           | 60.32                   | -33.04                  | 11.22                  | 1.59            | -33.3                | -13.00      | 20.30       |

**LTE Bands:**

(The Worst modulation and bandwidth was below)

**LTE Band 5(30MHz-10GHz):**

| Frequency (MHz)                         | Polar (H/V) | Receiver Reading (dB $\mu$ V) | Substituted Method      |                        |                 | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|---|-------------|-------------------------------|-------------------------|------------------------|-----------------|----------------------|-------------|-------------|
|   |             |                               | Substituted Level (dBm) | Antenna Gain (dBd/dBi) | Cable Loss (dB) |                      |             |             |
| QPSK, 1.4MHz, Frequency: 824.7 MHz, RB1 |             |                               |                         |                        |                 |                      |             |             |
| 716.80                                  | H           | 21.16                         | -51.82                  | 0.00                   | 0.50            | -52.32               | -13.00      | 39.32       |
| 631.87                                  | V           | 21.98                         | -49.17                  | 0.00                   | 0.49            | -49.66               | -13.00      | 36.66       |
| 1649.400                                | H           | 53.71                         | -50.62                  | 8.68                   | 0.80            | -46.9                | -13.00      | 33.90       |
| 1649.400                                | V           | 52.62                         | -51.79                  | 8.68                   | 0.80            | -48.6                | -13.00      | 35.60       |
| 2474.100                                | H           | 50.84                         | -49.94                  | 9.38                   | 1.00            | -48.9                | -13.00      | 35.90       |
| 2474.100                                | V           | 51.96                         | -48.77                  | 9.38                   | 1.00            | -47.6                | -13.00      | 34.60       |
| 3298.800                                | H           | 52.45                         | -44.23                  | 10.32                  | 1.15            | -46.1                | -13.00      | 33.10       |
| 3298.800                                | V           | 51.39                         | -45.05                  | 10.32                  | 1.15            | -46.9                | -13.00      | 33.90       |
| QPSK, 1.4MHz, Frequency: 836.5 MHz, RB1 |             |                               |                         |                        |                 |                      |             |             |
| 582.96                                  | H           | 21.01                         | -53.19                  | 0.00                   | 0.46            | -53.65               | -13.00      | 40.65       |
| 884.45                                  | V           | 22.63                         | -43.75                  | 0.00                   | 0.60            | -44.35               | -13.00      | 31.35       |
| 1673.000                                | H           | 54.27                         | -50.04                  | 8.71                   | 0.85            | -46.2                | -13.00      | 33.20       |
| 1673.000                                | V           | 53.06                         | -51.35                  | 8.71                   | 0.85            | -48                  | -13.00      | 35.00       |
| 2509.500                                | H           | 51.15                         | -49.46                  | 9.42                   | 1.01            | -48.6                | -13.00      | 35.60       |
| 2509.500                                | V           | 52.38                         | -48.24                  | 9.42                   | 1.01            | -47.1                | -13.00      | 34.10       |
| 3346.000                                | H           | 52.99                         | -44.17                  | 10.34                  | 1.16            | -45.6                | -13.00      | 32.60       |
| 3346.000                                | V           | 51.84                         | -45.18                  | 10.34                  | 1.16            | -46.4                | -13.00      | 33.40       |
| QPSK, 1.4MHz, Frequency: 848.3 MHz, RB1 |             |                               |                         |                        |                 |                      |             |             |
| 982.47                                  | H           | 20.94                         | -45.81                  | 0.00                   | 0.65            | -46.46               | -13.00      | 33.46       |
| 475.77                                  | V           | 21.46                         | -51.08                  | 0.00                   | 0.42            | -51.50               | -13.00      | 38.50       |
| 1696.600                                | H           | 55.05                         | -49.24                  | 8.74                   | 0.89            | -45.4                | -13.00      | 32.40       |
| 1696.600                                | V           | 53.94                         | -50.48                  | 8.74                   | 0.89            | -47.1                | -13.00      | 34.10       |
| 2544.900                                | H           | 51.87                         | -48.47                  | 9.47                   | 1.01            | -47.9                | -13.00      | 34.90       |
| 2544.900                                | V           | 53.12                         | -47.18                  | 9.47                   | 1.01            | -46.4                | -13.00      | 33.40       |
| 3393.200                                | H           | 53.78                         | -43.89                  | 10.36                  | 1.19            | -44.7                | -13.00      | 31.70       |
| 3393.200                                | V           | 52.63                         | -45.00                  | 10.36                  | 1.19            | -45.5                | -13.00      | 32.50       |

**LTE Band 40 Lower (30MHz-25GHz):**

| Frequency (MHz)                       | Polar (H/V) | Receiver Reading (dB $\mu$ V) | Substituted Method      |                        |                 | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|---------------------------------------|-------------|-------------------------------|-------------------------|------------------------|-----------------|----------------------|-------------|-------------|
|                                       |             |                               | Substituted Level (dBm) | Antenna Gain (dBd/dBi) | Cable Loss (dB) |                      |             |             |
| 5MHz QPSK, Frequency: 2307.5 MHz, RB1 |             |                               |                         |                        |                 |                      |             |             |
| 145.52                                | H           | 30.56                         | -81.55                  | 0.00                   | 0.22            | -81.77               | -40.00      | 41.77       |
| 43.81                                 | V           | 34.47                         | -60.29                  | -21.37                 | 0.12            | -81.78               | -40.00      | 41.78       |
| 4615.000                              | H           | 48.87                         | -46.49                  | 10.74                  | 1.41            | -46.3                | -40.00      | 6.30        |
| 4615.000                              | V           | 49.32                         | -45.90                  | 10.74                  | 1.41            | -45.5                | -40.00      | 5.50        |
| 6922.500                              | H           | 45.08                         | -45.94                  | 11.22                  | 1.88            | -44.4                | -40.00      | 4.40        |
| 6922.500                              | V           | 45.45                         | -45.44                  | 11.22                  | 1.88            | -44.1                | -40.00      | 4.10        |
| 5MHz QPSK, Frequency: 2312.5 MHz, RB1 |             |                               |                         |                        |                 |                      |             |             |
| 260.29                                | H           | 29.70                         | -81.96                  | 0.00                   | 0.31            | -82.27               | -40.00      | 42.27       |
| 43.07                                 | V           | 34.95                         | -58.85                  | -22.34                 | 0.12            | -81.31               | -40.00      | 41.31       |
| 4625.000                              | H           | 49.69                         | -45.60                  | 10.75                  | 1.41            | -45.5                | -40.00      | 5.50        |
| 4625.000                              | V           | 50.12                         | -45.05                  | 10.75                  | 1.41            | -44.7                | -40.00      | 4.70        |
| 6937.500                              | H           | 45.86                         | -45.12                  | 11.21                  | 1.90            | -43.6                | -40.00      | 3.60        |
| 6937.500                              | V           | 46.27                         | -44.57                  | 11.21                  | 1.90            | -43.3                | -40.00      | 3.30        |

**LTE Band 40 Upper (30MHz-25GHz):**

| Frequency (MHz)                       | Polar (H/V) | Receiver Reading (dB $\mu$ V) | Substituted Method      |                        |                 | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|---------------------------------------|-------------|-------------------------------|-------------------------|------------------------|-----------------|----------------------|-------------|-------------|
|                                       |             |                               | Substituted Level (dBm) | Antenna Gain (dBd/dBi) | Cable Loss (dB) |                      |             |             |
| 5MHz QPSK, Frequency: 2352.5 MHz, RB1 |             |                               |                         |                        |                 |                      |             |             |
| 77.32                                 | H           | 30.32                         | -77.85                  | -1.34                  | 0.16            | -79.35               | -40.00      | 39.35       |
| 42.63                                 | V           | 34.57                         | -58.66                  | -22.93                 | 0.12            | -81.71               | -40.00      | 41.71       |
| 4705.000                              | H           | 49.68                         | -45.10                  | 10.85                  | 1.41            | -45.5                | -40.00      | 5.50        |
| 4705.000                              | V           | 50.15                         | -44.65                  | 10.85                  | 1.41            | -44.6                | -40.00      | 4.60        |
| 7057.500                              | H           | 44.84                         | -45.17                  | 11.17                  | 1.92            | -43.8                | -40.00      | 3.80        |
| 7057.500                              | V           | 45.21                         | -44.69                  | 11.17                  | 1.92            | -43.6                | -40.00      | 3.60        |
| 5MHz QPSK, Frequency: 2357.5 MHz, RB1 |             |                               |                         |                        |                 |                      |             |             |
| 146.89                                | H           | 30.45                         | -81.61                  | 0.00                   | 0.23            | -81.84               | -40.00      | 41.84       |
| 88.34                                 | V           | 35.31                         | -73.90                  | 0.00                   | 0.17            | -74.07               | -40.00      | 34.07       |
| 4715.000                              | H           | 50.57                         | -44.14                  | 10.86                  | 1.41            | -44.7                | -40.00      | 4.70        |
| 4715.000                              | V           | 50.98                         | -43.73                  | 10.86                  | 1.41            | -43.8                | -40.00      | 3.80        |
| 7072.500                              | H           | 45.45                         | -44.35                  | 11.16                  | 1.91            | -43.2                | -40.00      | 3.20        |
| 7072.500                              | V           | 45.73                         | -43.98                  | 11.16                  | 1.91            | -43.1                | -40.00      | 3.10        |

**LTE Band 41 (30MHz-26.55GHz):**

| Frequency (MHz)                        | Polar (H/V) | Receiver Reading (dB $\mu$ V) | Substituted Method      |                        |                 | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
|--|-------------|-------------------------------|-------------------------|------------------------|-----------------|----------------------|-------------|-------------|
|  |             |                               | Substituted Level (dBm) | Antenna Gain (dBd/dBi) | Cable Loss (dB) |                      |             |             |
| QPSK, 5MHz, Frequency: 2537.5 MHz, RB1 |             |                               |                         |                        |                 |                      |             |             |
| 77.32                                  | H           | 30.41                         | -77.76                  | -1.34                  | 0.16            | -79.26               | -25.00      | 54.26       |
| 99.88                                  | V           | 35.37                         | -71.69                  | 0.00                   | 0.19            | -71.88               | -25.00      | 46.88       |
| 5075.000                               | H           | 63.54                         | -29.67                  | 11.25                  | 1.48            | -31.3                | -25.00      | 6.30        |
| 5075.000                               | V           | 62.41                         | -30.70                  | 11.25                  | 1.48            | -31.9                | -25.00      | 6.90        |
| 7612.500                               | H           | 56.85                         | -32.63                  | 10.88                  | 2.02            | -30.4                | -25.00      | 5.40        |
| 7612.500                               | V           | 55.72                         | -34.47                  | 10.88                  | 2.02            | -31.9                | -25.00      | 6.90        |
| QPSK, 5MHz, Frequency: 2595 MHz, RB1   |             |                               |                         |                        |                 |                      |             |             |
| 77.87                                  | H           | 29.84                         | -78.66                  | -1.07                  | 0.16            | -79.89               | -25.00      | 54.89       |
| 42.73                                  | V           | 35.25                         | -58.10                  | -22.80                 | 0.12            | -81.02               | -25.00      | 56.02       |
| 5190.000                               | H           | 64.27                         | -29.80                  | 11.31                  | 1.44            | -30.5                | -25.00      | 5.50        |
| 5190.000                               | V           | 63.05                         | -30.87                  | 11.31                  | 1.44            | -31.3                | -25.00      | 6.30        |
| 7785.000                               | H           | 57.38                         | -32.11                  | 10.84                  | 1.99            | -29.6                | -25.00      | 4.60        |
| 7785.000                               | V           | 56.19                         | -33.73                  | 10.84                  | 1.99            | -31.2                | -25.00      | 6.20        |
| QPSK, 5MHz, Frequency: 2652.5 MHz, RB1 |             |                               |                         |                        |                 |                      |             |             |
| 77.59                                  | H           | 30.93                         | -77.41                  | -1.20                  | 0.16            | -78.77               | -25.00      | 53.77       |
| 43.09                                  | V           | 34.16                         | -59.66                  | -22.33                 | 0.12            | -82.11               | -25.00      | 57.11       |
| 5305.000                               | H           | 65.08                         | -28.36                  | 11.38                  | 1.46            | -29.3                | -25.00      | 4.30        |
| 5305.000                               | V           | 63.93                         | -29.25                  | 11.38                  | 1.46            | -30.3                | -25.00      | 5.30        |
| 7957.500                               | H           | 58.22                         | -30.20                  | 10.81                  | 2.09            | -28.4                | -25.00      | 3.40        |
| 7957.500                               | V           | 57.15                         | -31.72                  | 10.81                  | 2.09            | -29.9                | -25.00      | 4.90        |

## Note:

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
- 2) Absolute Level = Substituted Level - Cable loss + Antenna Gain
- 3) Margin = Limit - Absolute Level

## **5. EUT PHOTOGRAPHS**

---

Please refer to the attachment CR231059186-EXP EUT EXTERNAL PHOTOGRAPHS and CR231059186-INP EUT INTERNAL PHOTOGRAPHS

## **6. TEST SETUP PHOTOGRAPHS**

---

Please refer to the attachment CR231059186-00A-TSP TEST SETUP PHOTOGRAPHS.

**==== END OF REPORT =====**