

**Test Plot 76#: LTE Band 5\_Body Back\_1RB\_Middle****DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f=836.5$  MHz;  $\sigma = 0.926$  S/m;  $\epsilon_r = 41.548$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @836.5 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x11x1):**Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.214 W/kg


**Zoom Scan (5x5x7)/Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.65 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.165 W/kg

**SAR(1 g) = 0.162 W/kg; SAR(10 g) = 0.146 W/kg**

Maximum value of SAR (measured) = 0.164 W/kg

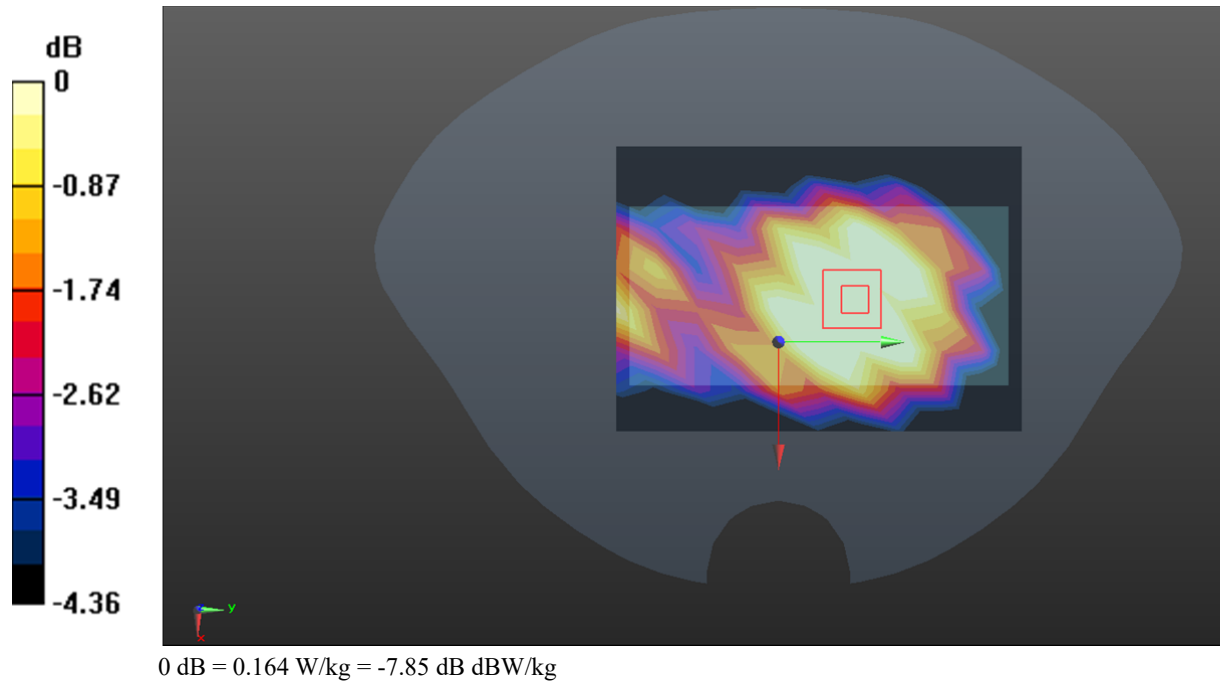

**Test Plot 77#: LTE Band 5\_Body Back\_50%RB\_Middle****DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f=836.5$  MHz;  $\sigma = 0.926$  S/m;  $\epsilon_r = 41.548$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @836.5 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x11x1):**Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.167 W/kg


**Zoom Scan (5x5x7)/Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.36 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.130 W/kg

**SAR(1 g) = 0.127 W/kg; SAR(10 g) = 0.115 W/kg**

Maximum value of SAR (measured) = 0.129 W/kg

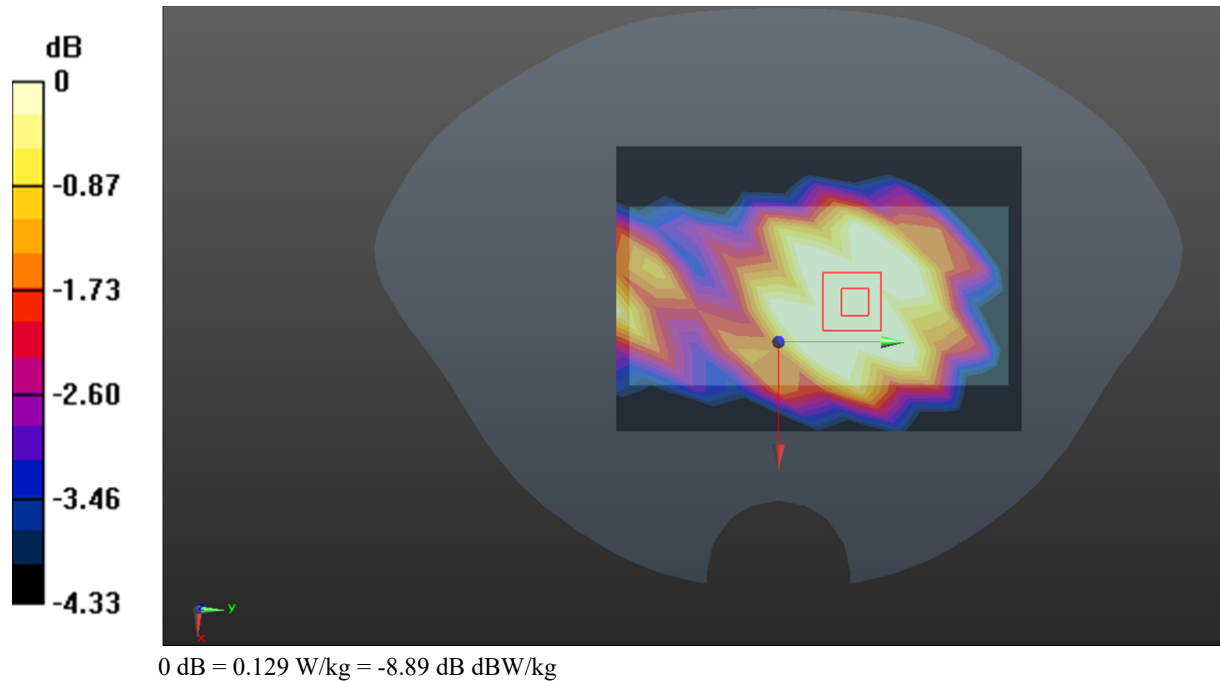

**Test Plot 78#: LTE Band 5\_Body Left\_1RB\_Middle****DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f=836.5$  MHz;  $\sigma = 0.926$  S/m;  $\epsilon_r = 41.548$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @836.5 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x11x1):**Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.203 W/kg


**Zoom Scan (5x5x7)/Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.31 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.161 W/kg

**SAR(1 g) = 0.155 W/kg; SAR(10 g) = 0.130 W/kg**

Maximum value of SAR (measured) = 0.156 W/kg

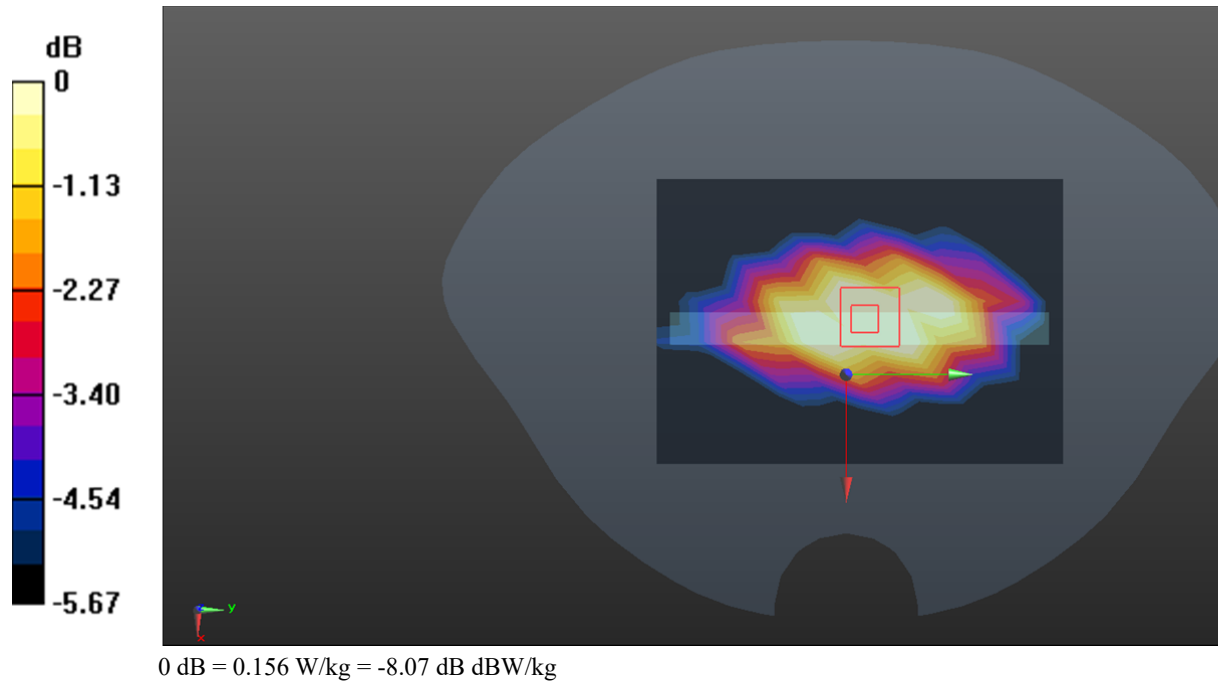

**Test Plot 79#: LTE Band 5\_Body Left\_50%RB\_Middle****DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f=836.5$  MHz;  $\sigma = 0.926$  S/m;  $\epsilon_r = 41.548$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @836.5 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x11x1):**Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.159 W/kg


**Zoom Scan (5x5x7)/Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.80 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.127 W/kg

**SAR(1 g) = 0.122 W/kg; SAR(10 g) = 0.103 W/kg**

Maximum value of SAR (measured) = 0.122 W/kg

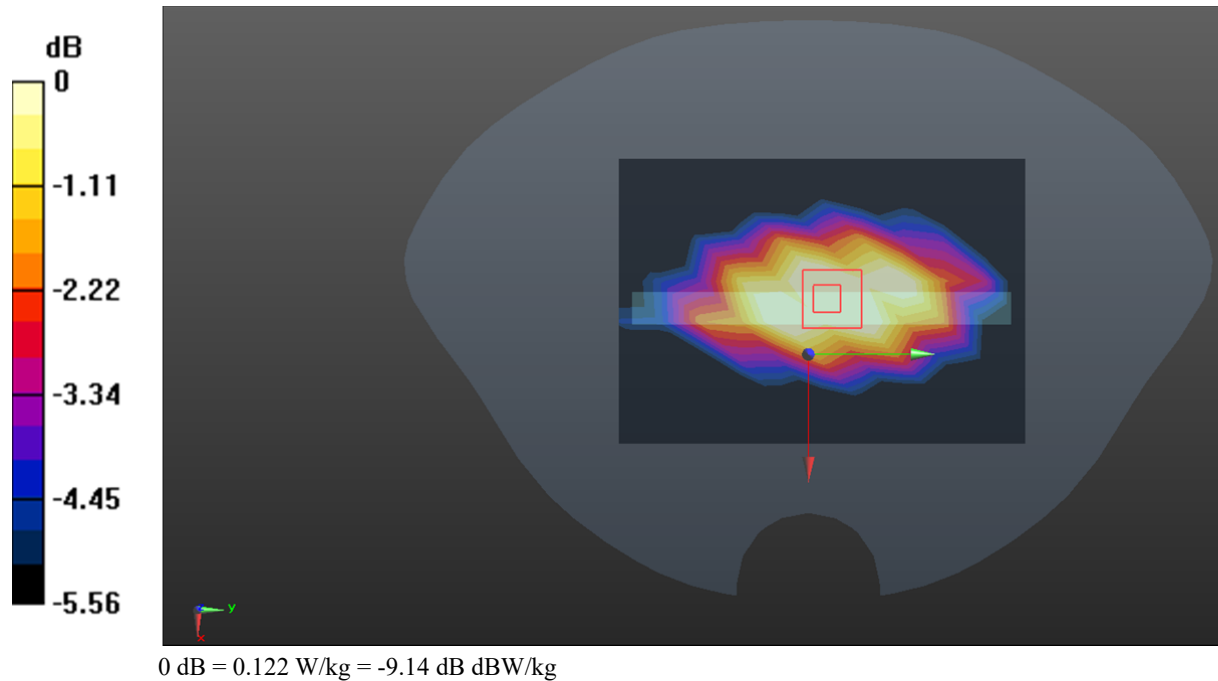

**Test Plot 80#: LTE Band 5\_Body Right\_1RB\_Middle****DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f=836.5$  MHz;  $\sigma = 0.926$  S/m;  $\epsilon_r = 41.548$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @836.5 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x11x1):**Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.186 W/kg


**Zoom Scan (5x5x7)/Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.83 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.144 W/kg

**SAR(1 g) = 0.139 W/kg; SAR(10 g) = 0.117 W/kg**

Maximum value of SAR (measured) = 0.141 W/kg

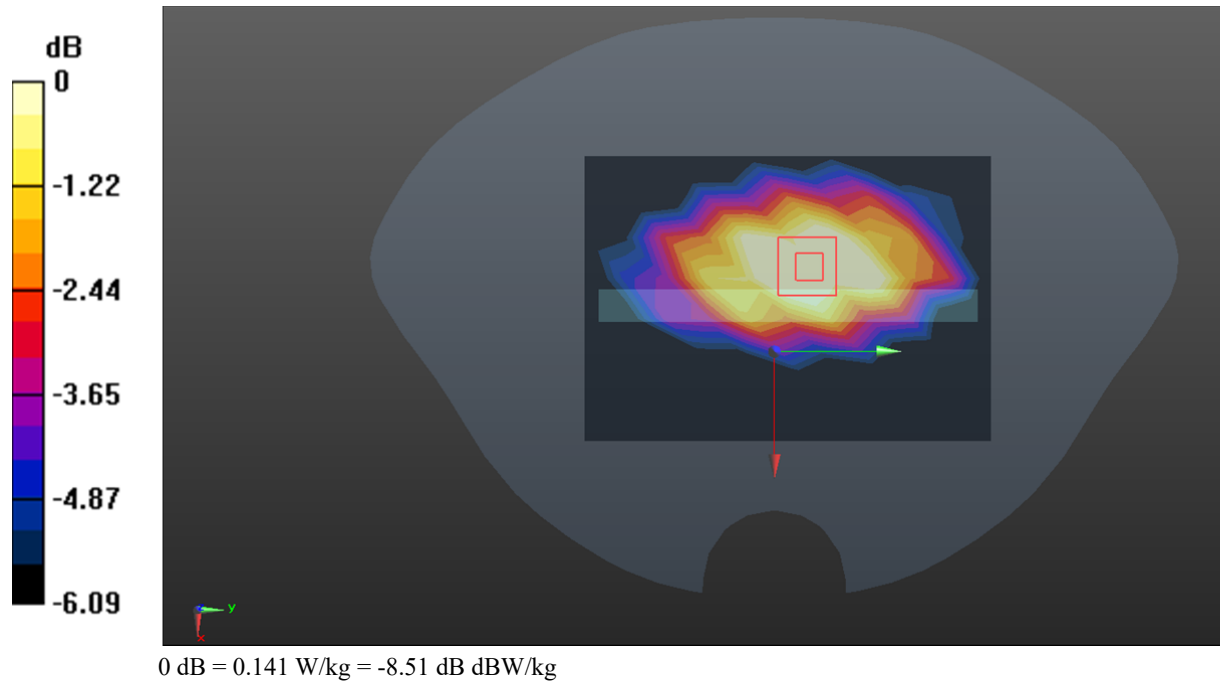

**Test Plot 81#: LTE Band 5\_Body Right\_50%RB\_Middle****DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f=836.5$  MHz;  $\sigma = 0.926$  S/m;  $\epsilon_r = 41.548$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @836.5 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x11x1):**Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.145 W/kg


**Zoom Scan (5x5x7)/Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.619 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.113 W/kg

**SAR(1 g) = 0.109 W/kg; SAR(10 g) = 0.092 W/kg**

Maximum value of SAR (measured) = 0.111 W/kg

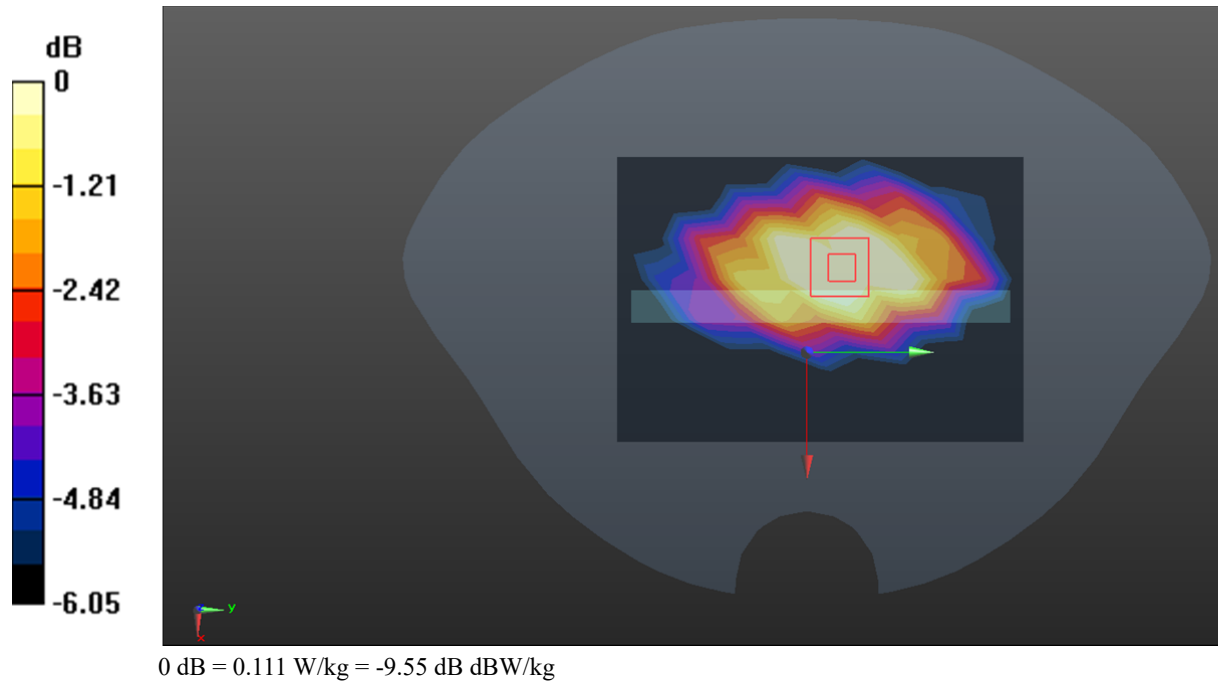

**Test Plot 82#: LTE Band 5\_Body Bottom\_1RB\_Middle****DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f=836.5$  MHz;  $\sigma = 0.926$  S/m;  $\epsilon_r = 41.548$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @836.5 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x10x1):**Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0508 W/kg


**Zoom Scan (5x5x7)/Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.316 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.0340 W/kg

**SAR(1 g) = 0.031 W/kg; SAR(10 g) = 0.022 W/kg**

Maximum value of SAR (measured) = 0.0332 W/kg

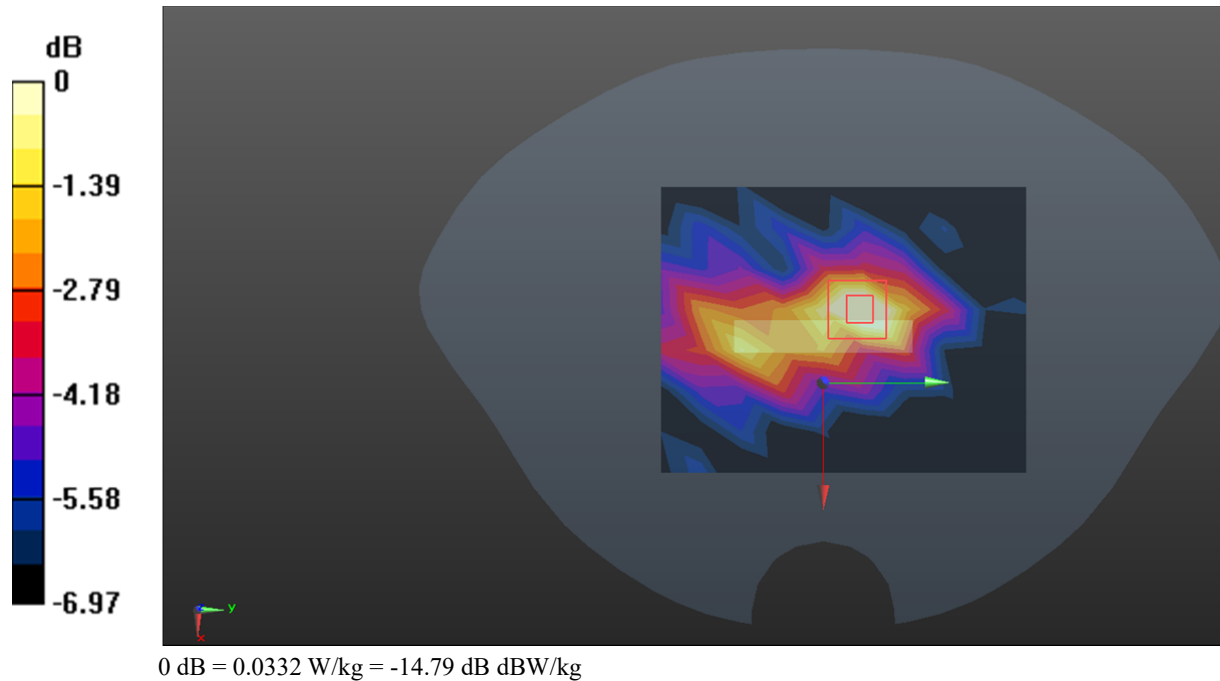

**Test Plot 83#: LTE Band 5\_Body Bottom\_50%RB\_Middle****DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f=836.5$  MHz;  $\sigma = 0.926$  S/m;  $\epsilon_r = 41.548$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @836.5 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x10x1):**Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0382 W/kg


**Zoom Scan (5x5x7)/Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.649 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.0270 W/kg

**SAR(1 g) = 0.025 W/kg; SAR(10 g) = 0.018 W/kg**

Maximum value of SAR (measured) = 0.0264 W/kg

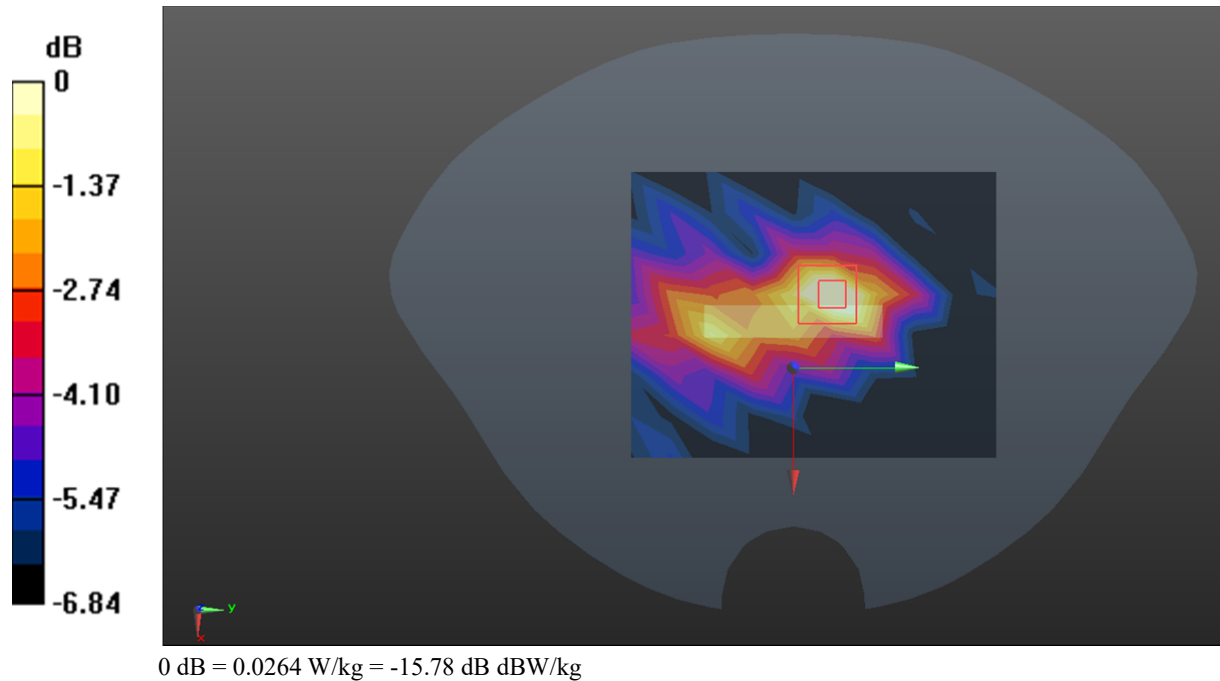



**Test Plot 84#: LTE Band 7\_Head Left Cheek\_1RB\_Middle****DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f=2535$  MHz;  $\sigma = 1.924$  S/m;  $\epsilon_r = 39.492$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (11x13x1):**Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0427 W/kg


**Zoom Scan (7x7x7)/Cube 0:**Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.612 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.0360 W/kg

**SAR(1 g) = 0.035 W/kg; SAR(10 g) = 0.032 W/kg**

Maximum value of SAR (measured) = 0.0352 W/kg

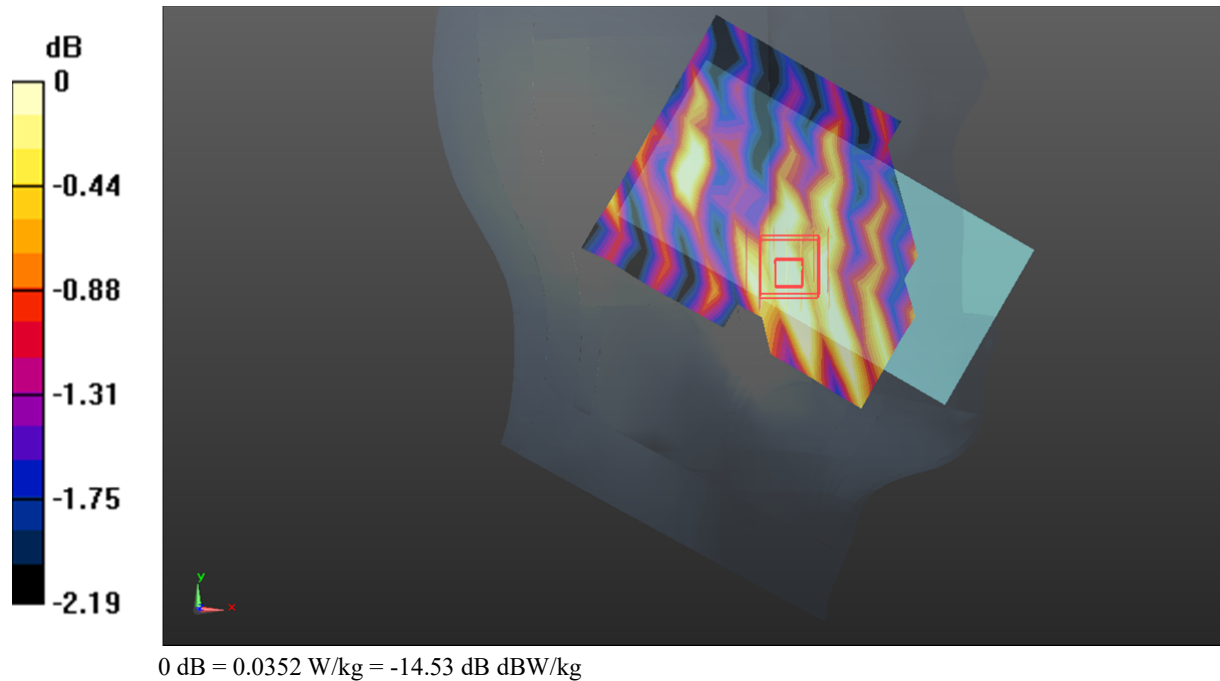

**Test Plot 85#: LTE Band 7\_Head Left Cheek\_50%RB\_Middle****DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f=2535$  MHz;  $\sigma = 1.924$  S/m;  $\epsilon_r = 39.492$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (11x13x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0356 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.660 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.0340 W/kg

**SAR(1 g) = 0.032 W/kg; SAR(10 g) = 0.030 W/kg**

Maximum value of SAR (measured) = 0.0339 W/kg

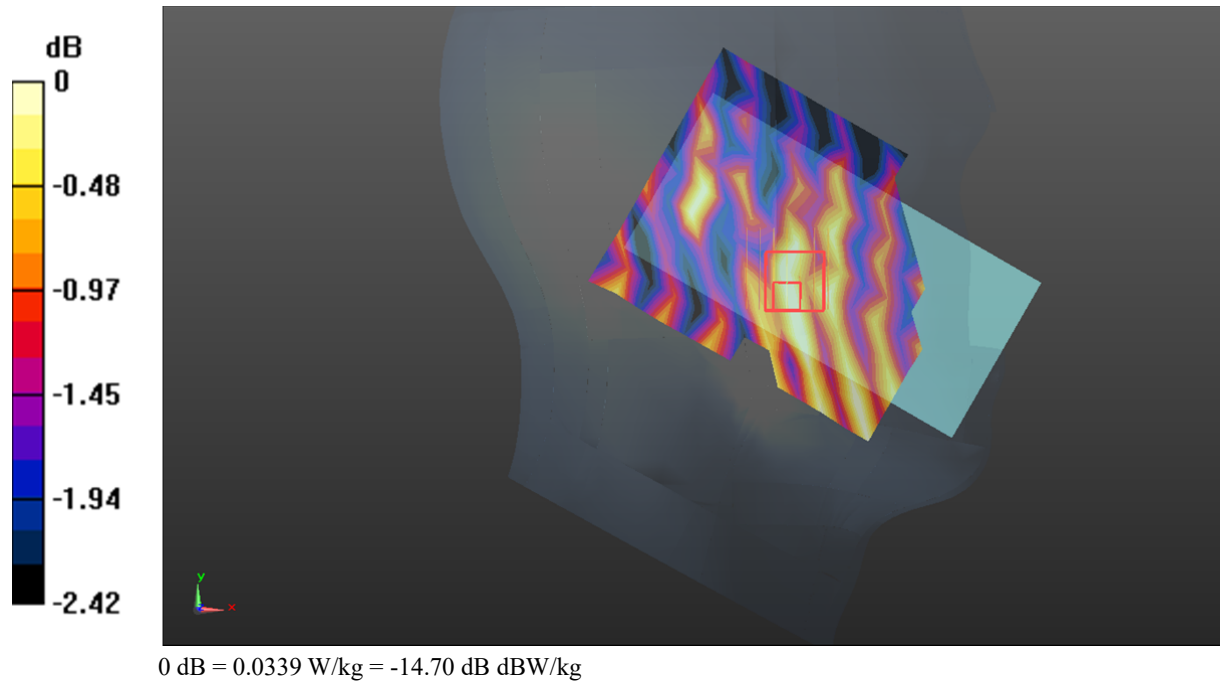

**Test Plot 86#: LTE Band 7\_Head Left Tilt\_1RB\_Middle****DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f=2535$  MHz;  $\sigma = 1.924$  S/m;  $\epsilon_r = 39.492$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (11x13x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0593 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.062 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.0530 W/kg

**SAR(1 g) = 0.049 W/kg; SAR(10 g) = 0.036 W/kg**

Maximum value of SAR (measured) = 0.0516 W/kg

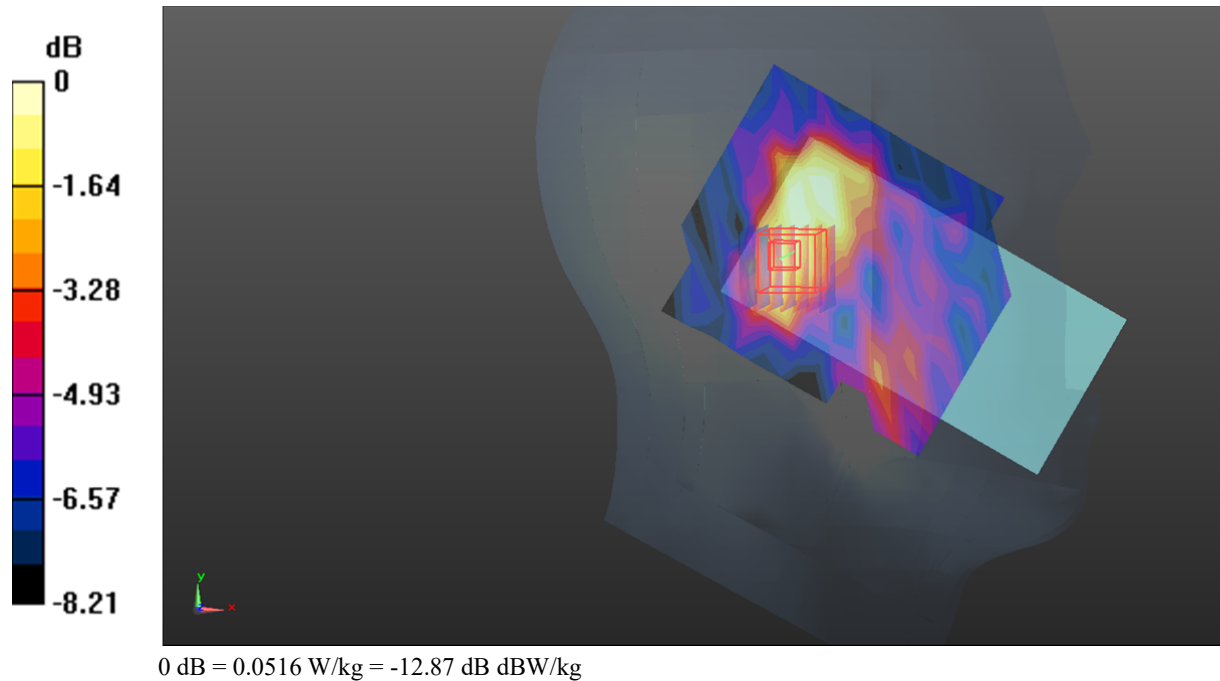

**Test Plot 87#: LTE Band 7\_Head Left Tilt\_50%RB\_Middle****DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f=2535$  MHz;  $\sigma = 1.924$  S/m;  $\epsilon_r = 39.492$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (11x13x1):**Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0540 W/kg


**Zoom Scan (7x7x7)/Cube 0:**Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.094 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.0460 W/kg

**SAR(1 g) = 0.042 W/kg; SAR(10 g) = 0.030 W/kg**

Maximum value of SAR (measured) = 0.0448 W/kg

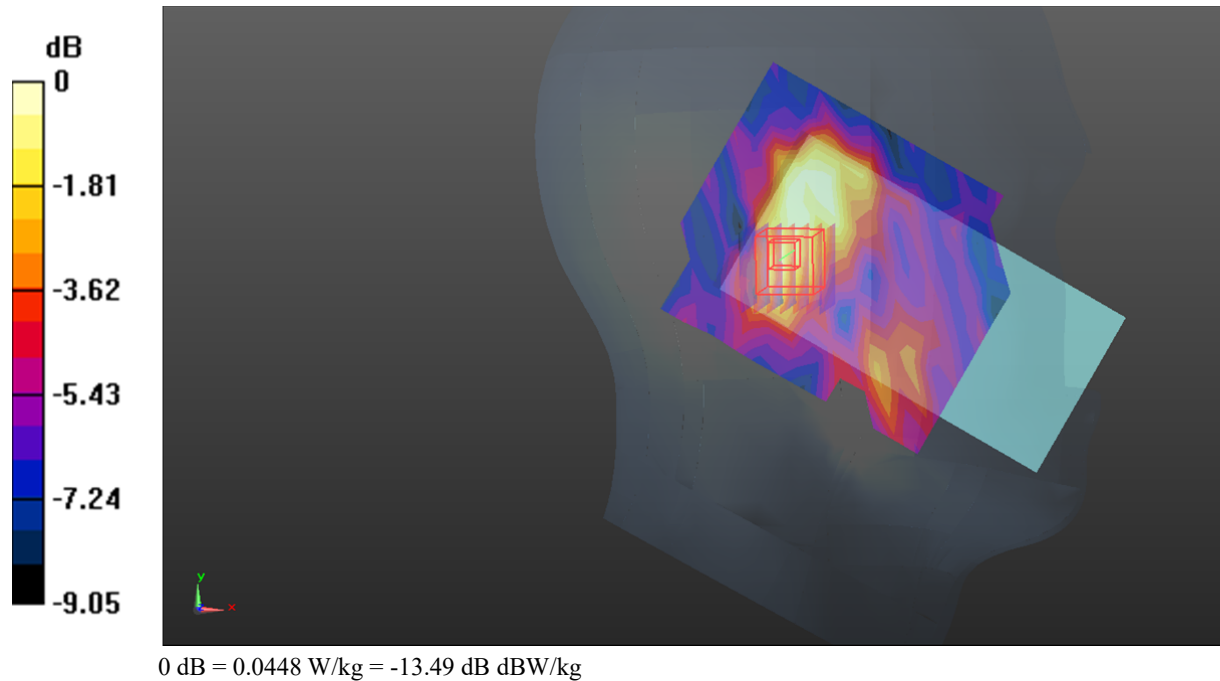

**Test Plot 88#: LTE Band 7\_Head Right Cheek\_1RB\_Middle****DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f=2535$  MHz;  $\sigma = 1.924$  S/m;  $\epsilon_r = 39.492$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (11x13x1):**Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0373 W/kg


**Zoom Scan (7x7x7)/Cube 0:**Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.751 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.0320 W/kg

**SAR(1 g) = 0.030 W/kg; SAR(10 g) = 0.028 W/kg**

Maximum value of SAR (measured) = 0.0318 W/kg

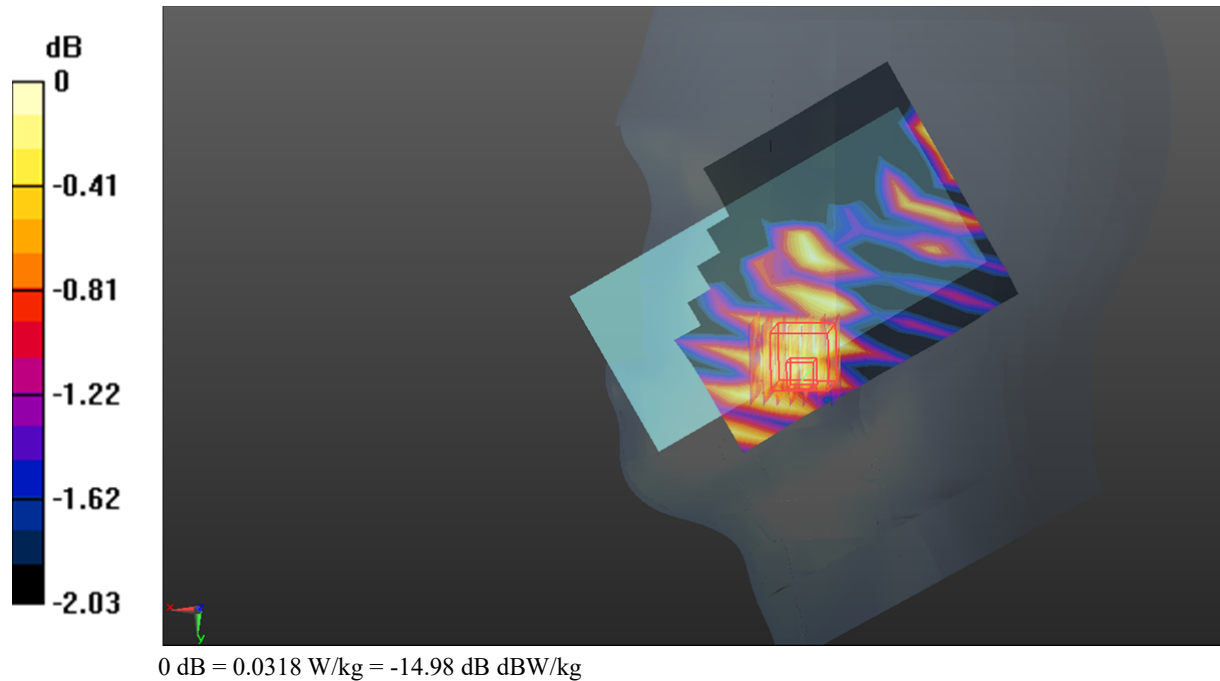

**Test Plot 89#: LTE Band 7\_Head Right Cheek\_50%RB\_Middle****DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f=2535$  MHz;  $\sigma = 1.924$  S/m;  $\epsilon_r = 39.492$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (11x13x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0365 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.498 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.0340 W/kg

**SAR(1 g) = 0.031 W/kg; SAR(10 g) = 0.026 W/kg**

Maximum value of SAR (measured) = 0.0320 W/kg

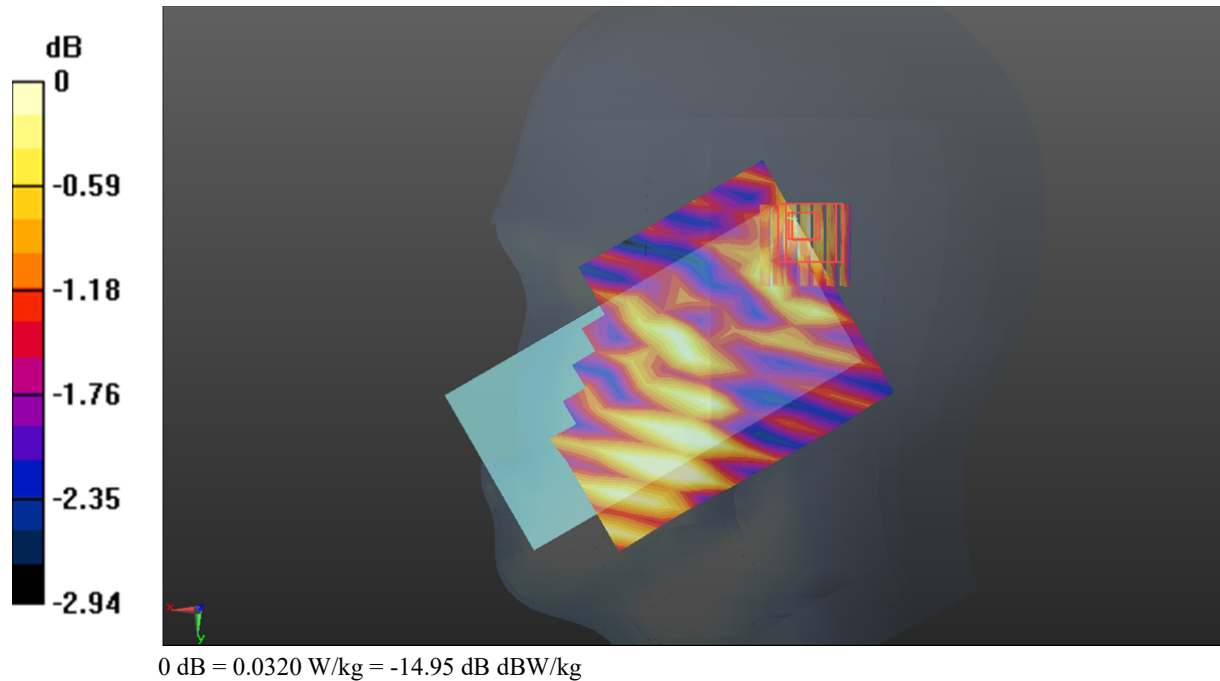

**Test Plot 90#: LTE Band 7\_Head Right Tilt\_1RB\_Middle****DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f=2535$  MHz;  $\sigma = 1.924$  S/m;  $\epsilon_r = 39.492$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (11x13x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0376 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.353 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.0370 W/kg

**SAR(1 g) = 0.031 W/kg; SAR(10 g) = 0.020 W/kg**

Maximum value of SAR (measured) = 0.0337 W/kg

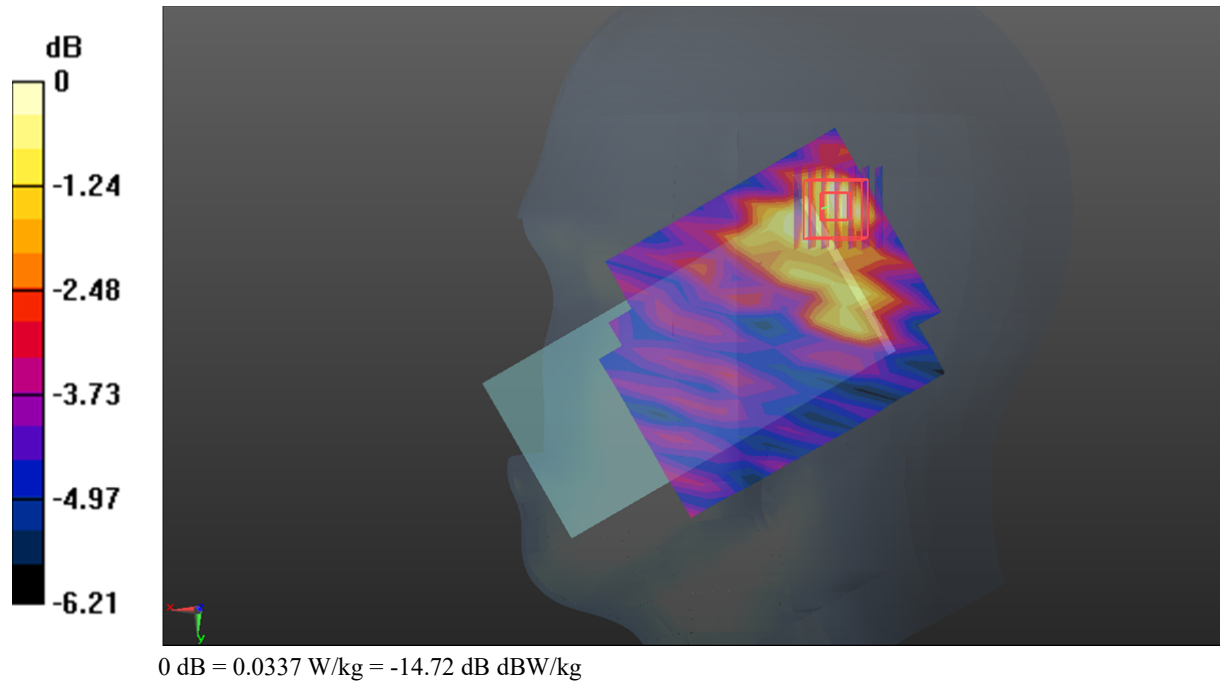

**Test Plot 91#: LTE Band 7\_Head Right Tilt\_50%RB\_Middle****DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f=2535$  MHz;  $\sigma = 1.924$  S/m;  $\epsilon_r = 39.492$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (11x13x1):**Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0338 W/kg


**Zoom Scan (7x7x7)/Cube 0:**Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.129 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.0350 W/kg

**SAR(1 g) = 0.028 W/kg; SAR(10 g) = 0.018 W/kg**

Maximum value of SAR (measured) = 0.0314 W/kg

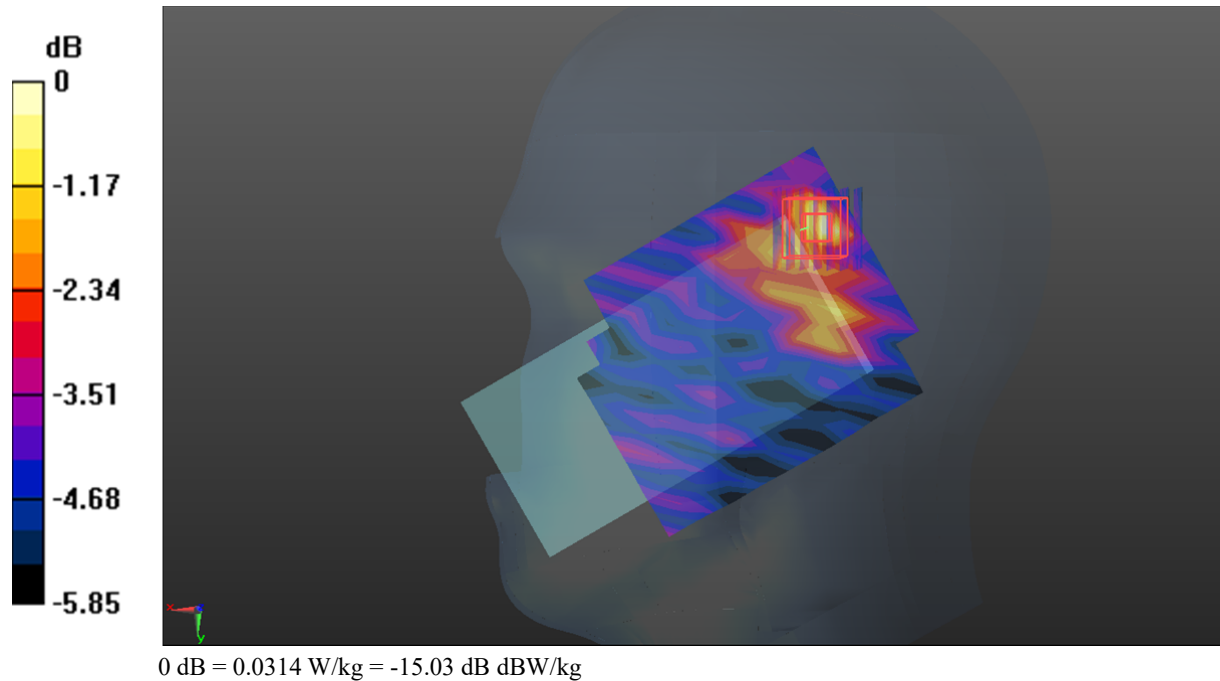



**Test Plot 92#: LTE Band 7\_Body Front\_1RB\_Middle****DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f=2535$  MHz;  $\sigma = 1.924$  S/m;  $\epsilon_r = 39.492$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (11x13x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.163 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.714 V/m; Power Drift = 0.1 dB

Peak SAR (extrapolated) = 0.132 W/kg

**SAR(1 g) = 0.110 W/kg; SAR(10 g) = 0.070 W/kg**

Maximum value of SAR (measured) = 0.121 W/kg

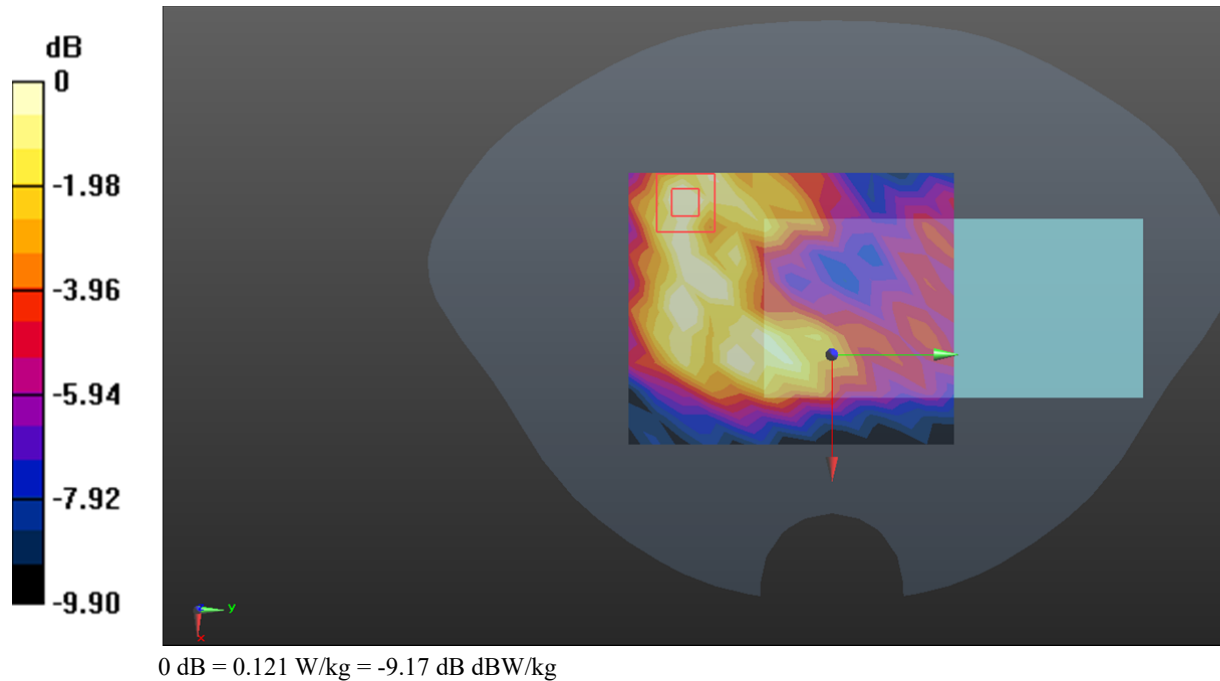

**Test Plot 93#: LTE Band 7\_Body Front\_50%RB\_Middle****DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f=2535$  MHz;  $\sigma = 1.924$  S/m;  $\epsilon_r = 39.492$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (11x13x1):**Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.129 W/kg


**Zoom Scan (7x7x7)/Cube 0:**Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.376 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.107 W/kg

**SAR(1 g) = 0.089 W/kg; SAR(10 g) = 0.057 W/kg**

Maximum value of SAR (measured) = 0.0974 W/kg

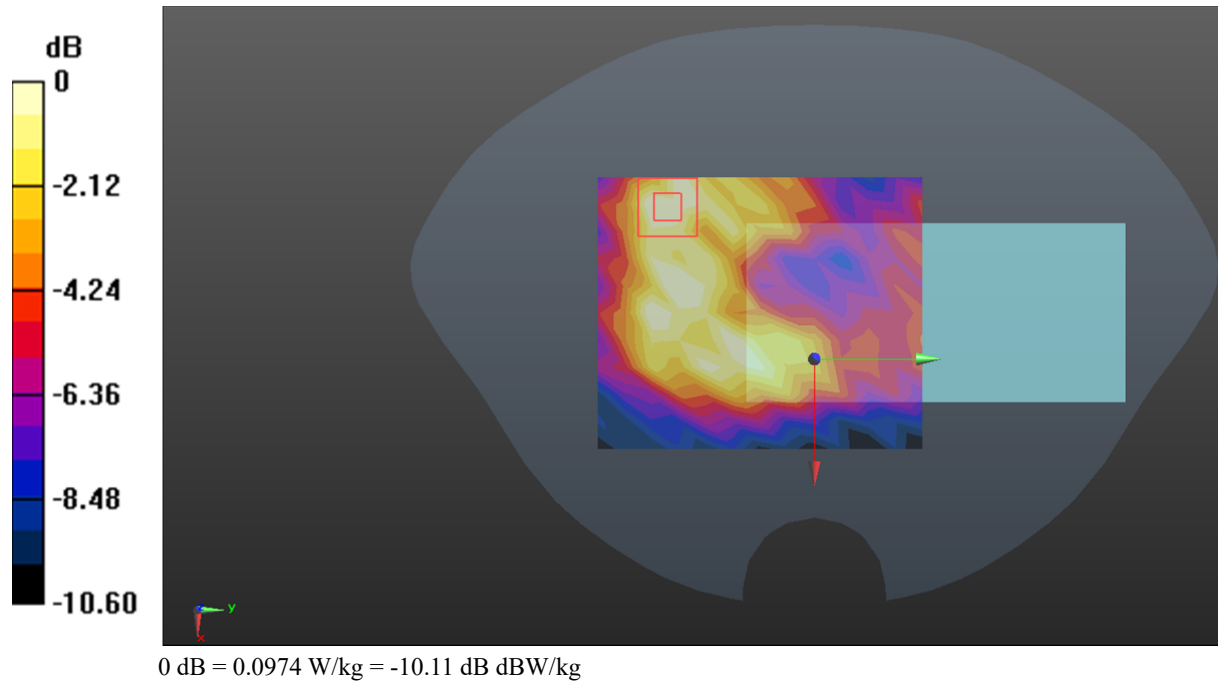

**Test Plot 94#: LTE Band 7\_Body Back\_1RB\_Middle****DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f=2535$  MHz;  $\sigma = 1.924$  S/m;  $\epsilon_r = 39.492$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (11x13x1):**Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.242 W/kg


**Zoom Scan (7x7x7)/Cube 0:**Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.212 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.288 W/kg

**SAR(1 g) = 0.174 W/kg; SAR(10 g) = 0.126 W/kg**

Maximum value of SAR (measured) = 0.222 W/kg

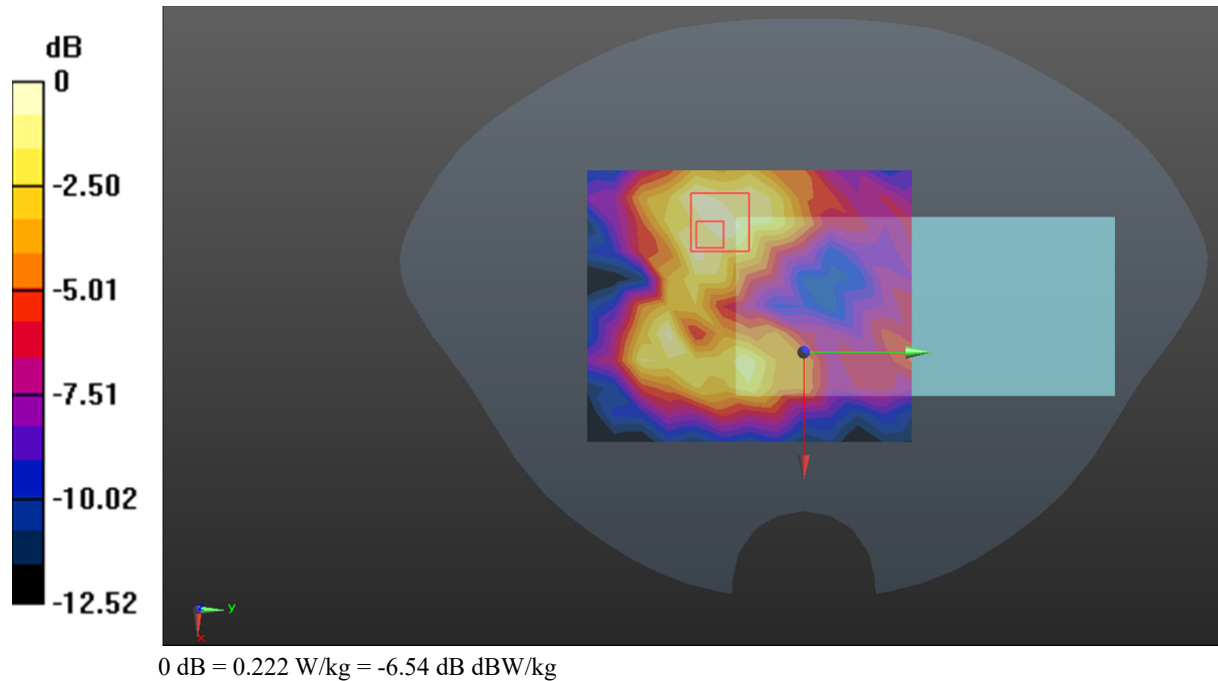

**Test Plot 95#: LTE Band 7\_Body Back\_50%RB\_Middle****DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f=2535$  MHz;  $\sigma = 1.924$  S/m;  $\epsilon_r = 39.492$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (11x13x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.192 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.830 V/m; Power Drift = -00 dB

Peak SAR (extrapolated) = 0.149 W/kg

**SAR(1 g) = 0.137 W/kg; SAR(10 g) = 0.099 W/kg**

Maximum value of SAR (measured) = 0.144 W/kg

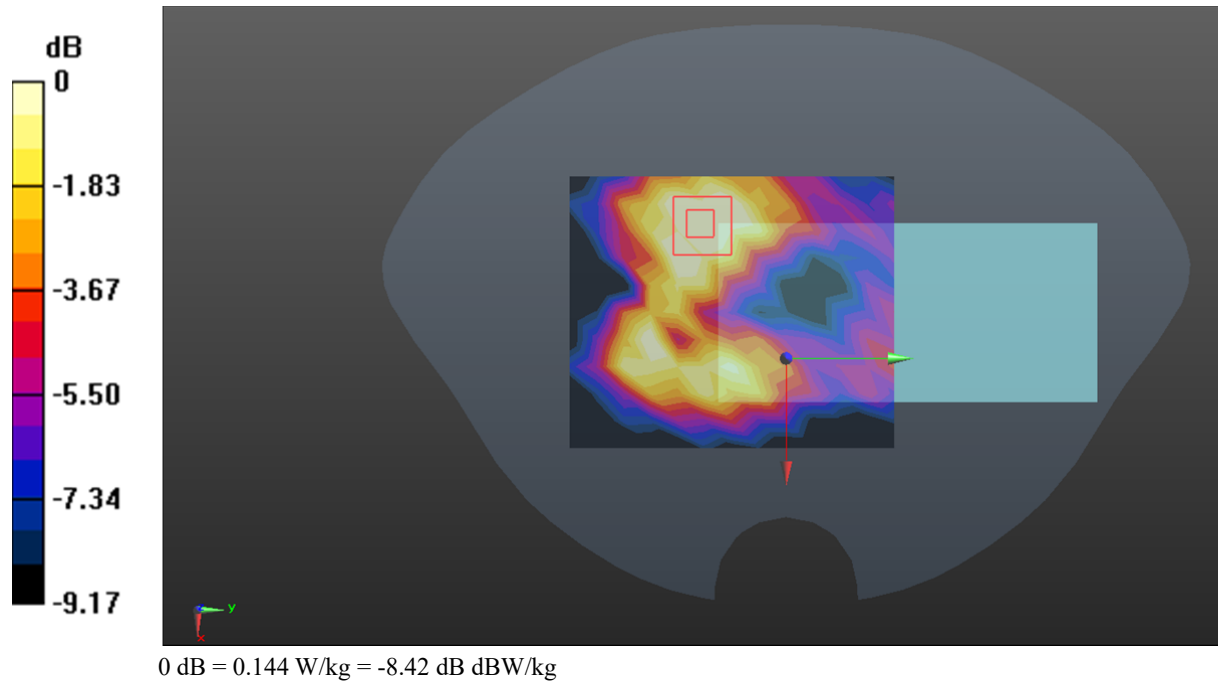

**Test Plot 96#: LTE Band 7\_Body Left\_1RB\_Middle****DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f=2535$  MHz;  $\sigma = 1.924$  S/m;  $\epsilon_r = 39.492$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (9x13x1):**Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.284 W/kg


**Zoom Scan (7x7x7)/Cube 0:**Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.62 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.490 W/kg

**SAR(1 g) = 0.257 W/kg; SAR(10 g) = 0.137 W/kg**

Maximum value of SAR (measured) = 0.277 W/kg

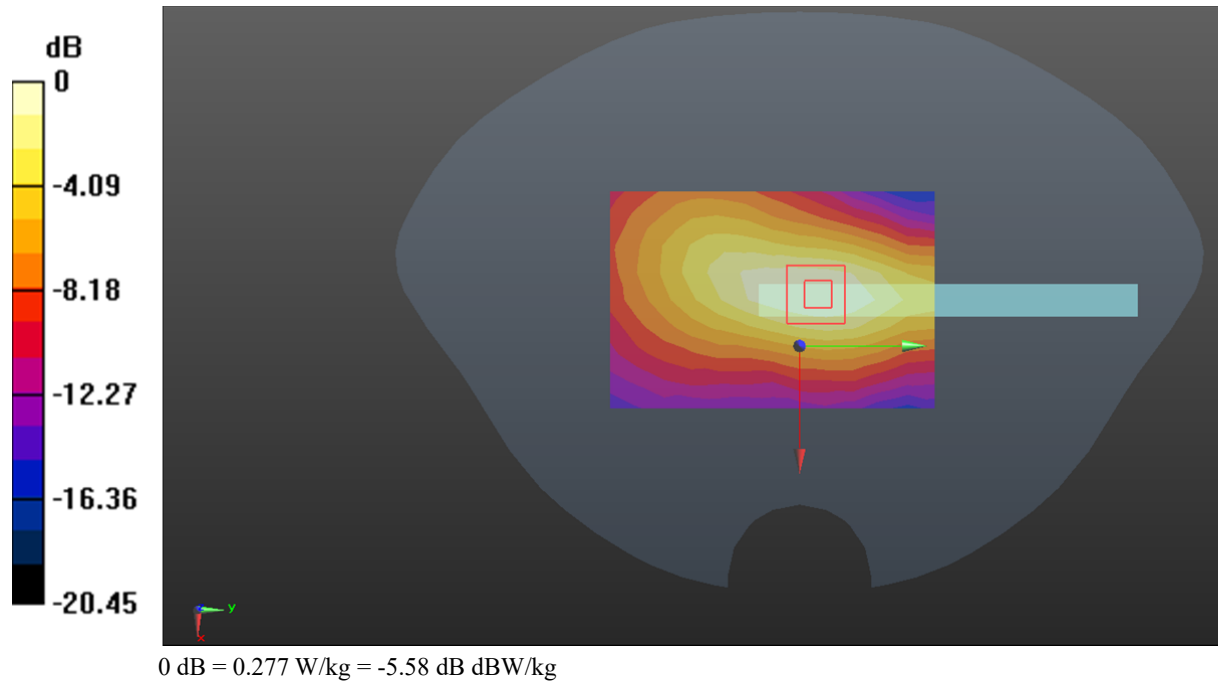

**Test Plot 97#: LTE Band 7\_Body Left\_50%RB\_Middle****DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f=2535$  MHz;  $\sigma = 1.924$  S/m;  $\epsilon_r = 39.492$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (9x13x1):**Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.210 W/kg


**Zoom Scan (7x7x7)/Cube 0:**Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.36 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.391 W/kg

**SAR(1 g) = 0.201 W/kg; SAR(10 g) = 0.108 W/kg**

Maximum value of SAR (measured) = 0.216 W/kg

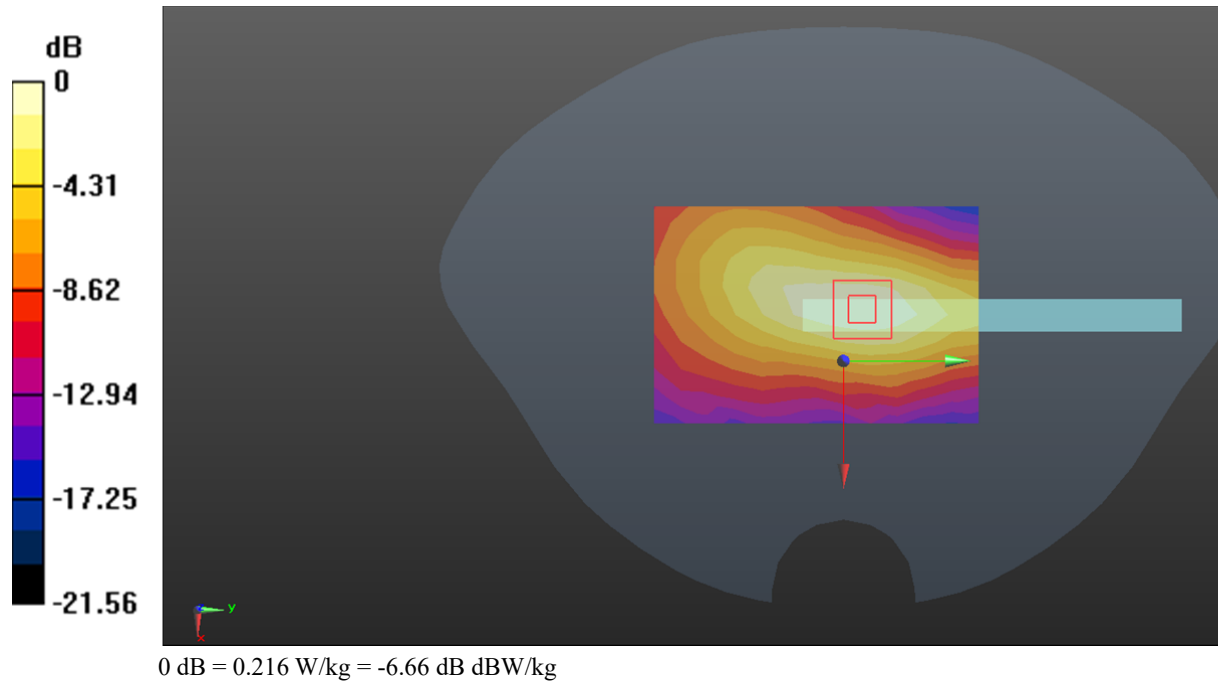

**Test Plot 98#: LTE Band 7\_Body Right\_1RB\_Middle****DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f=2535$  MHz;  $\sigma = 1.924$  S/m;  $\epsilon_r = 39.492$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (9x13x1):**Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.239 W/kg


**Zoom Scan (7x7x7)/Cube 0:**Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.556 V/m; Power Drift = 0 dB

Peak SAR (extrapolated) = 0.429 W/kg

**SAR(1 g) = 0.224 W/kg; SAR(10 g) = 0.121 W/kg**

Maximum value of SAR (measured) = 0.240 W/kg

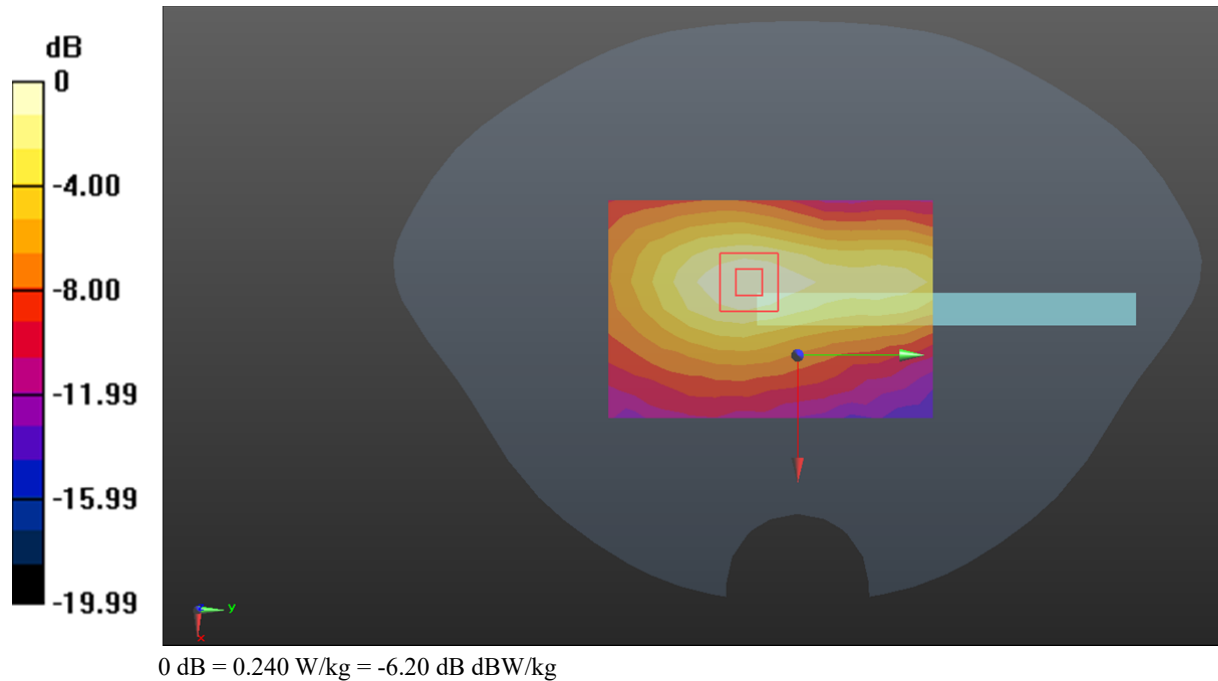

**Test Plot 99#: LTE Band 7\_Body Right\_50%RB\_Middle****DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f=2535$  MHz;  $\sigma = 1.924$  S/m;  $\epsilon_r = 39.492$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (9x13x1):**Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.198 W/kg


**Zoom Scan (7x7x7)/Cube 0:**Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.089 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.372 W/kg

**SAR(1 g) = 0.190 W/kg; SAR(10 g) = 0.102 W/kg**

Maximum value of SAR (measured) = 0.205 W/kg

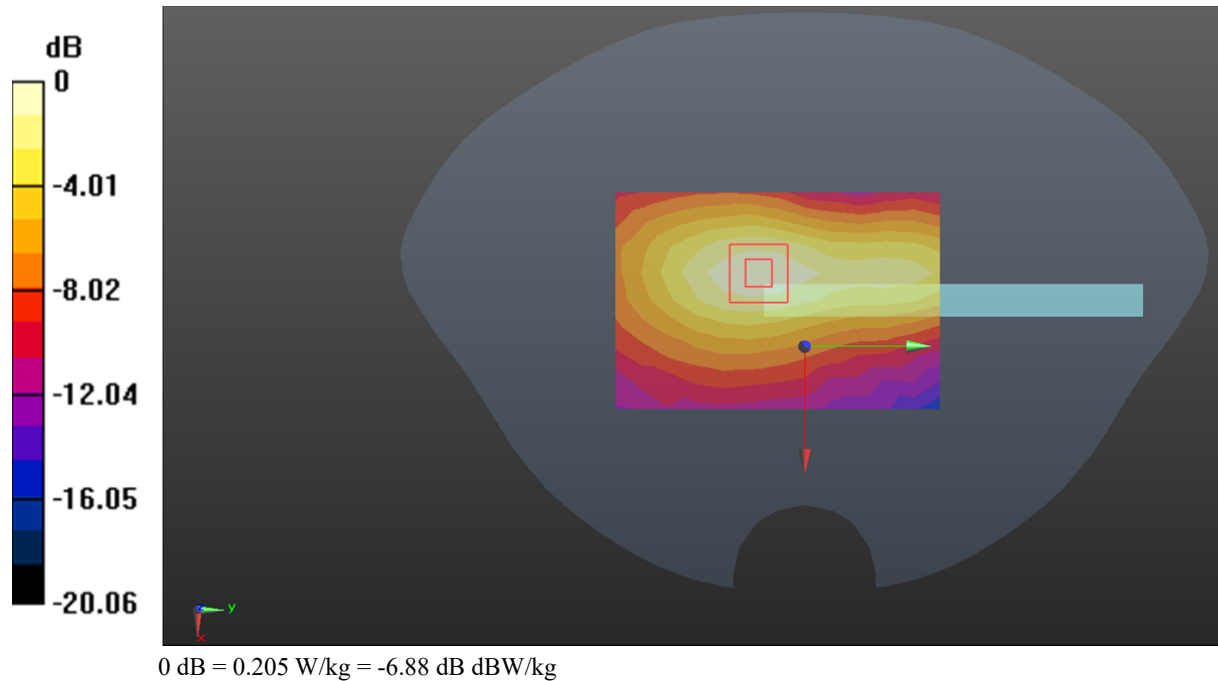



**Test Plot 100#: LTE Band 7\_Body Bottom\_1RB\_Middle****DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f=2535$  MHz;  $\sigma = 1.924$  S/m;  $\epsilon_r = 39.492$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (9x13x1):**Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.642 W/kg


**Zoom Scan (7x7x7)/Cube 0:**Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.509 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 1.65 W/kg

**SAR(1 g) = 0.721 W/kg; SAR(10 g) = 0.285 W/kg**

Maximum value of SAR (measured) = 0.836 W/kg

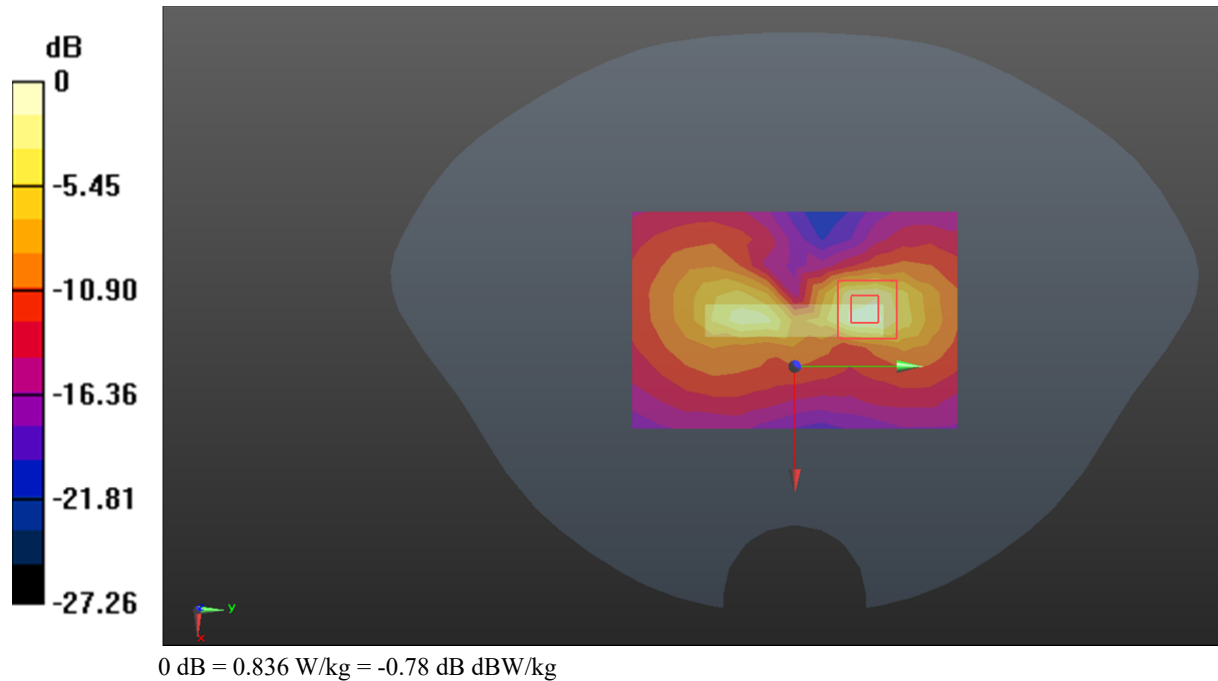

**Test Plot 101#: LTE Band 7\_Body Bottom\_50%RB\_Middle****DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f=2535$  MHz;  $\sigma = 1.924$  S/m;  $\epsilon_r = 39.492$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (9x13x1):**Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.580 W/kg


**Zoom Scan (7x7x7)/Cube 0:**Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.139 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.46 W/kg

**SAR(1 g) = 0.645 W/kg; SAR(10 g) = 0.257 W/kg**

Maximum value of SAR (measured) = 0.751 W/kg

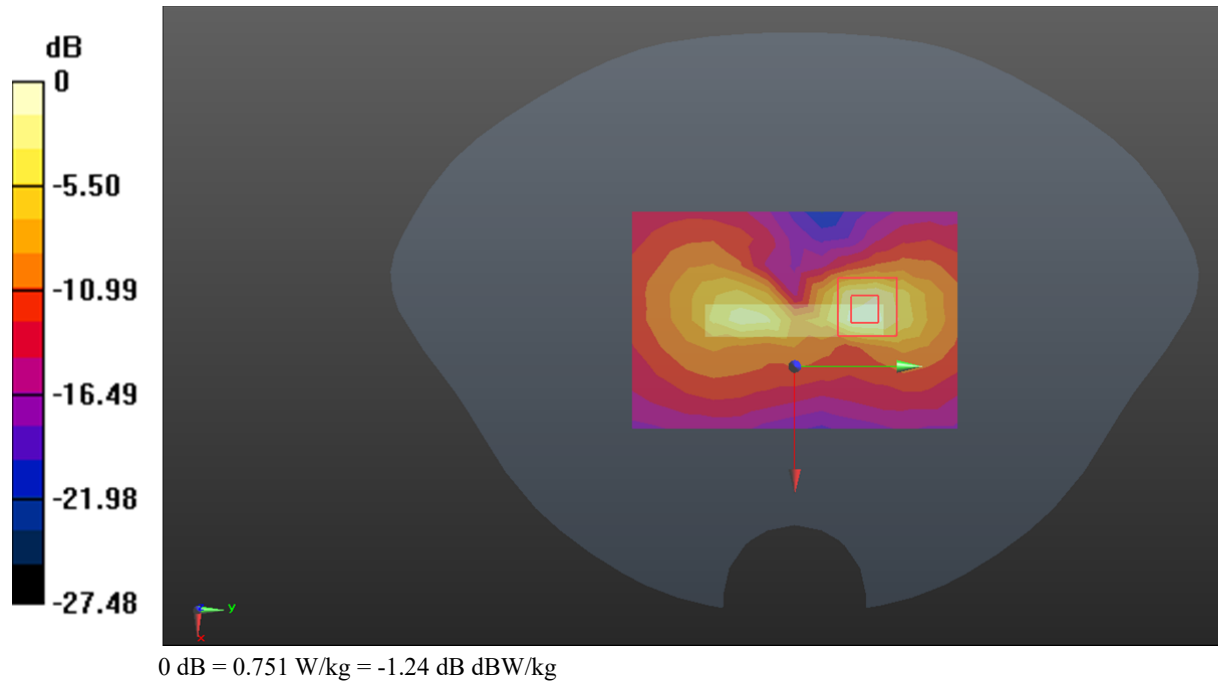

**Test Plot 102#: LTE Band 12\_Head Left Cheek\_1RB\_Middle****DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f=707.5$  MHz;  $\sigma = 0.876$  S/m;  $\epsilon_r = 42.79$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @707.5 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.103 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.938 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.0840 W/kg

**SAR(1 g) = 0.083 W/kg; SAR(10 g) = 0.075 W/kg**

Maximum value of SAR (measured) = 0.0834 W/kg

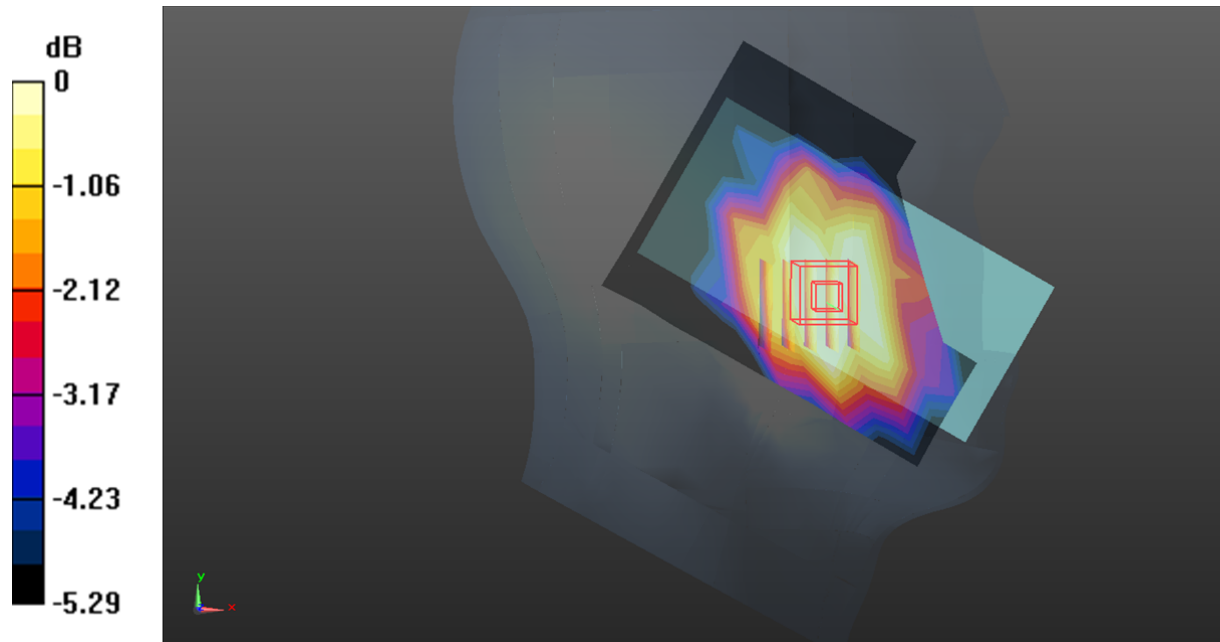

0 dB = 0.0834 W/kg = -10.79 dB dBW/kg

**Test Plot 103#: LTE Band 12\_Head Left Cheek\_50%RB\_Middle****DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz;Duty Cycle: 1:1  
Medium parameters used:  $f=707.5$  MHz;  $\sigma = 0.876$  S/m;  $\epsilon_r = 42.79$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @707.5 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x10x1):**Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0853 W/kg


**Zoom Scan (5x5x7)/Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.769 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.0690 W/kg

**SAR(1 g) = 0.069 W/kg; SAR(10 g) = 0.063 W/kg**

Maximum value of SAR (measured) = 0.0687 W/kg

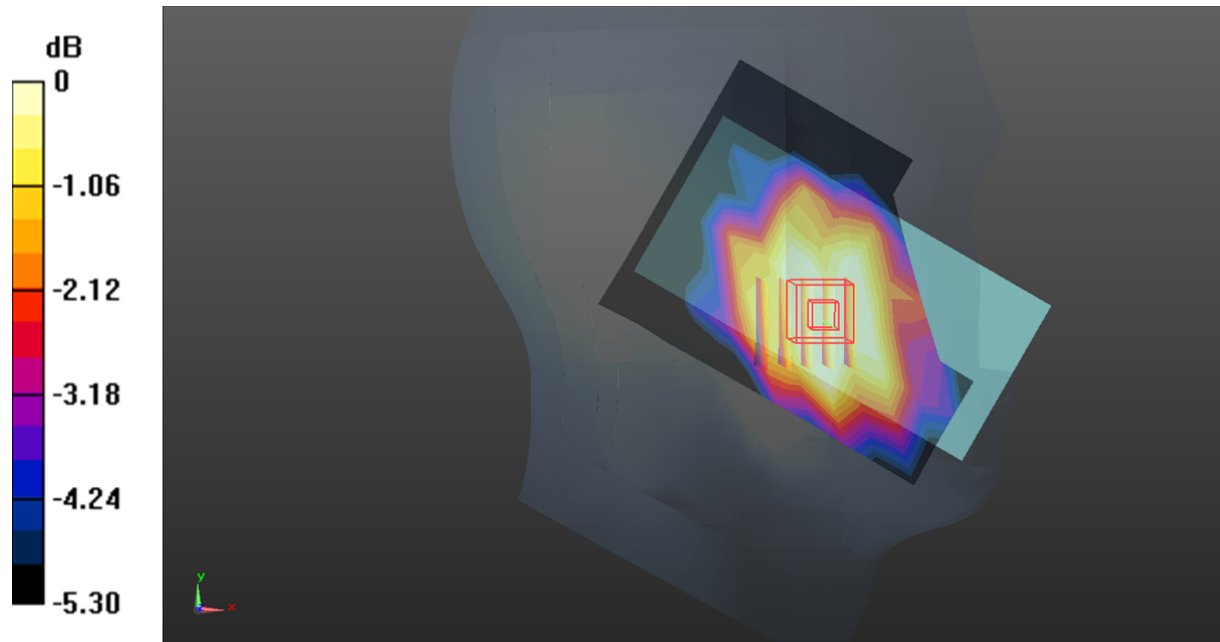

0 dB = 0.0687 W/kg = -11.63 dB dBW/kg

**Test Plot 104#: LTE Band 12\_Head Left Tilt\_1RB\_Middle****DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f=707.5$  MHz;  $\sigma = 0.876$  S/m;  $\epsilon_r = 42.79$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @707.5 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x10x1):**Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0702 W/kg


**Zoom Scan (5x5x7)/Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.397 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.0610 W/kg

**SAR(1 g) = 0.060 W/kg; SAR(10 g) = 0.053 W/kg**

Maximum value of SAR (measured) = 0.0608 W/kg

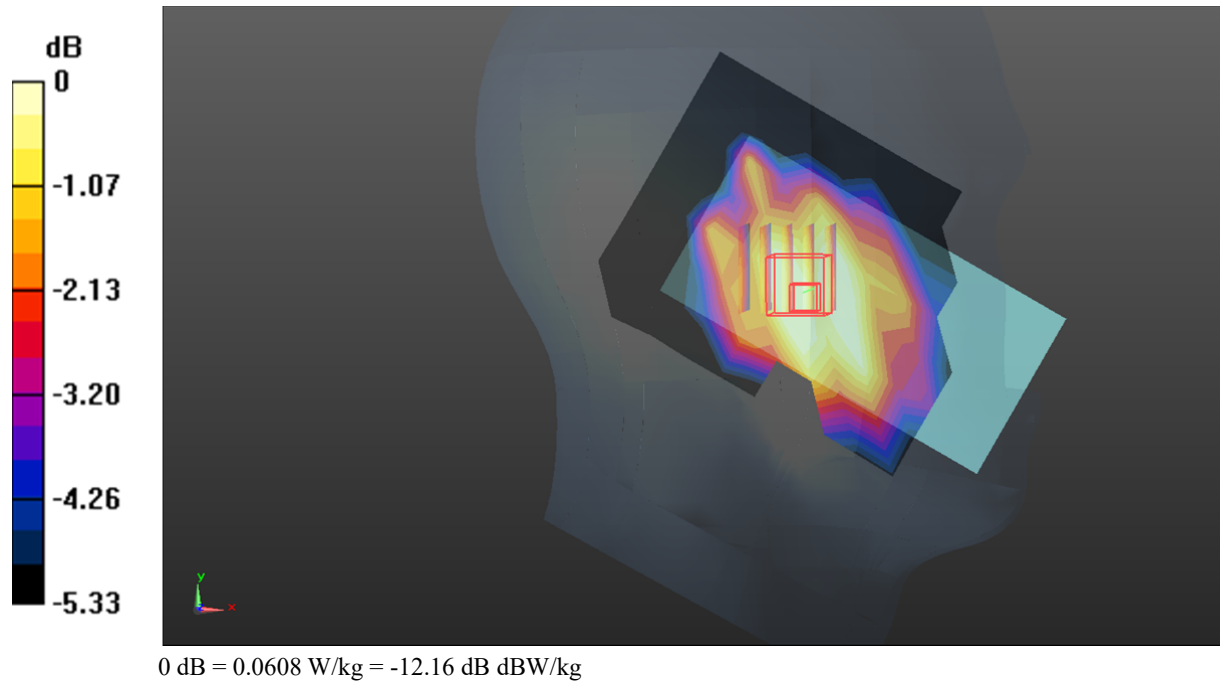

**Test Plot 105#: LTE Band 12\_Head Left Tilt\_50%RB\_Middle****DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f=707.5$  MHz;  $\sigma = 0.876$  S/m;  $\epsilon_r = 42.79$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @707.5 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x10x1):**Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0605 W/kg


**Zoom Scan (5x5x7)/Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.197 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.0490 W/kg

**SAR(1 g) = 0.049 W/kg; SAR(10 g) = 0.043 W/kg**

Maximum value of SAR (measured) = 0.0489 W/kg

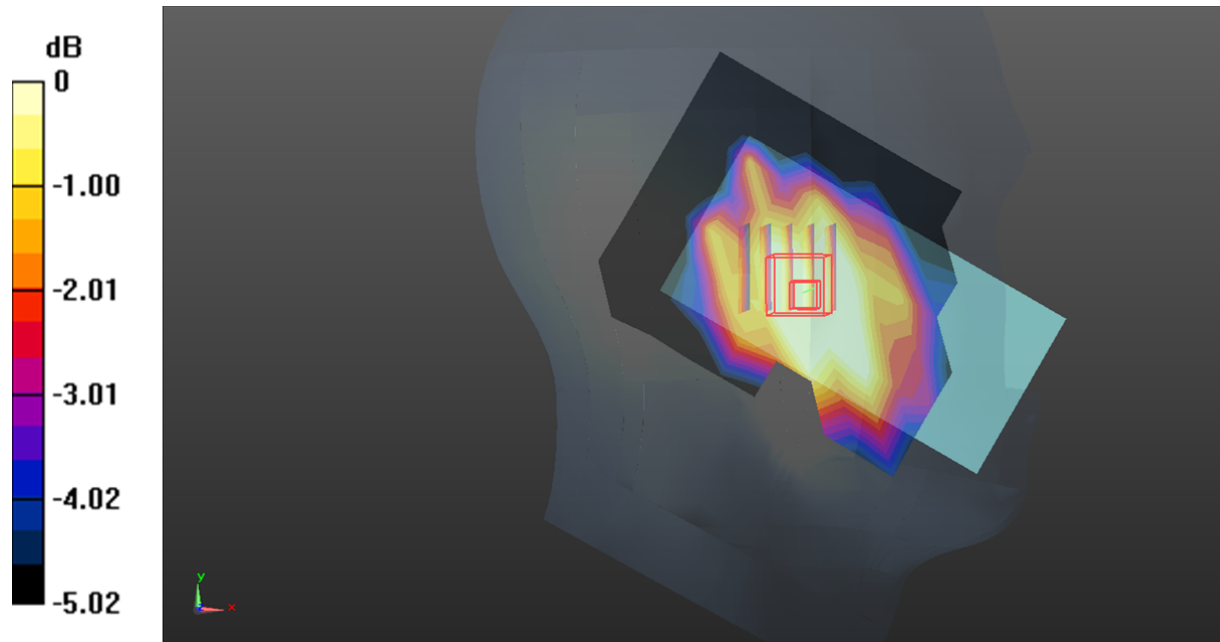

0 dB = 0.0489 W/kg = -13.11 dB dBW/kg

**Test Plot 106#: LTE Band 12\_Head Right Cheek\_1RB\_Middle****DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f=707.5$  MHz;  $\sigma = 0.876$  S/m;  $\epsilon_r = 42.79$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @707.5 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x10x1):**Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0840 W/kg


**Zoom Scan (5x5x7)/Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.328 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.0750 W/kg

**SAR(1 g) = 0.073 W/kg; SAR(10 g) = 0.062 W/kg**

Maximum value of SAR (measured) = 0.0748 W/kg

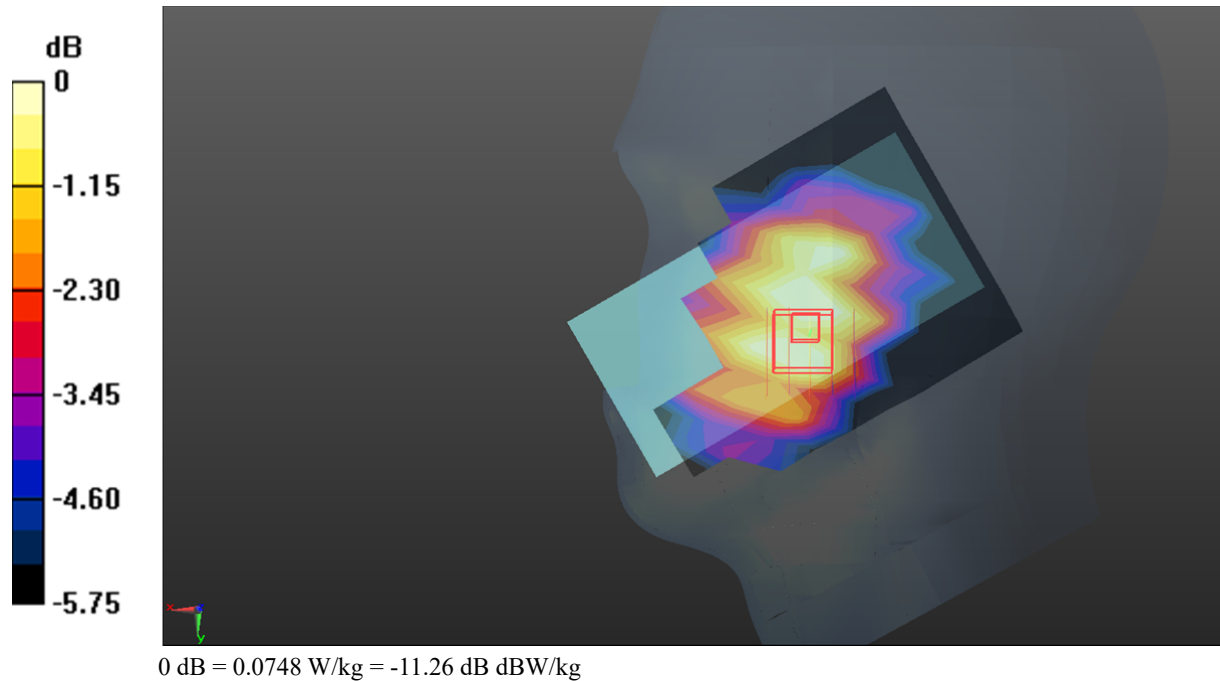

**Test Plot 107#: LTE Band 12\_Head Right Cheek\_50%RB\_Middle****DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f=707.5$  MHz;  $\sigma=0.876$  S/m;  $\epsilon_r=42.79$ ;  $\rho=1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @707.5 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x10x1):**Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0707 W/kg


**Zoom Scan (5x5x7)/Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.122 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.0630 W/kg

**SAR(1 g) = 0.061 W/kg; SAR(10 g) = 0.052 W/kg**

Maximum value of SAR (measured) = 0.0624 W/kg

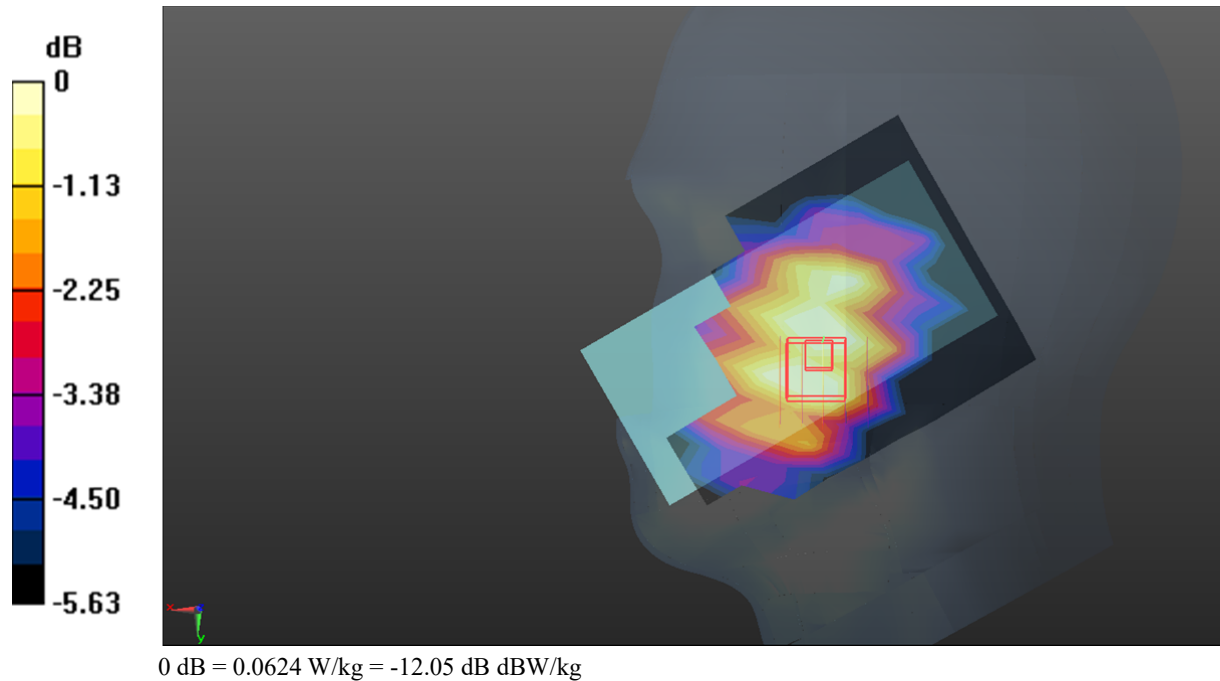



**Test Plot 108#: LTE Band 12\_Head Right Tilt\_1RB\_Middle****DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f=707.5$  MHz;  $\sigma = 0.876$  S/m;  $\epsilon_r = 42.79$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @707.5 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x10x1):**Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0503 W/kg


**Zoom Scan (5x5x7)/Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.980 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.0410 W/kg

**SAR(1 g) = 0.039 W/kg; SAR(10 g) = 0.034 W/kg**

Maximum value of SAR (measured) = 0.0413 W/kg

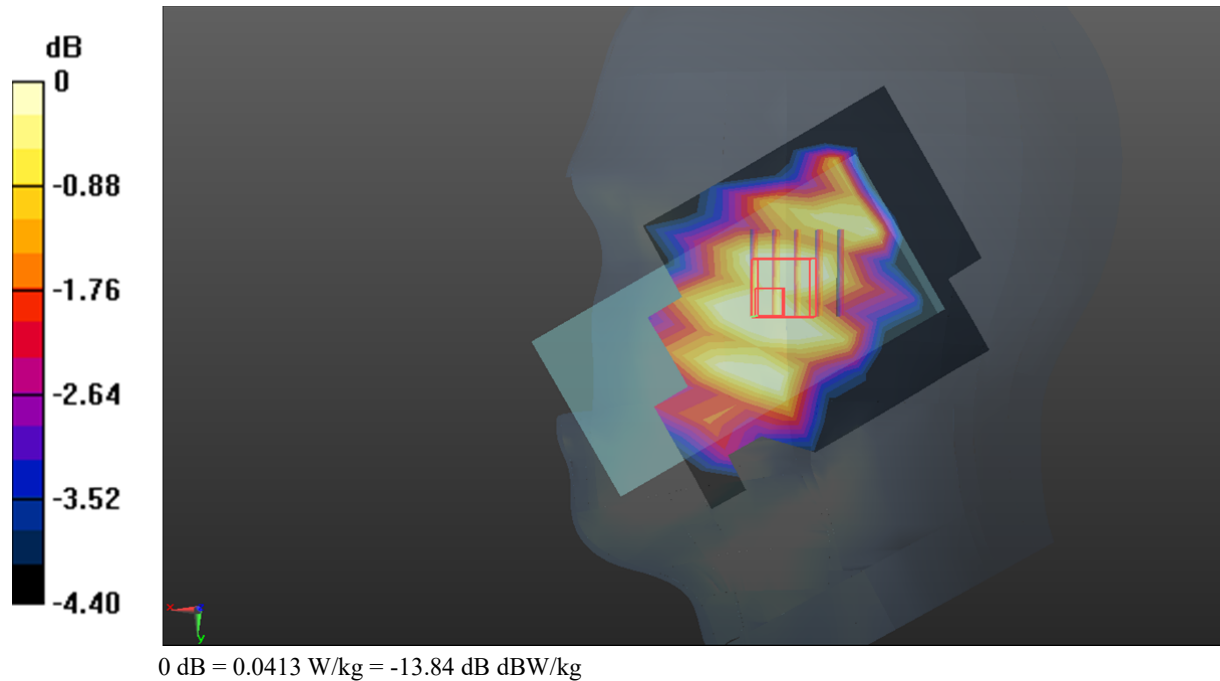

**Test Plot 109#: LTE Band 12\_Head Right Tilt\_50%RB\_Middle****DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f=707.5$  MHz;  $\sigma=0.876$  S/m;  $\epsilon_r=42.79$ ;  $\rho=1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @707.5 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x10x1):**Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0373 W/kg


**Zoom Scan (5x5x7)/Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.056 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.0330 W/kg

**SAR(1 g) = 0.031 W/kg; SAR(10 g) = 0.027 W/kg**

Maximum value of SAR (measured) = 0.0328 W/kg

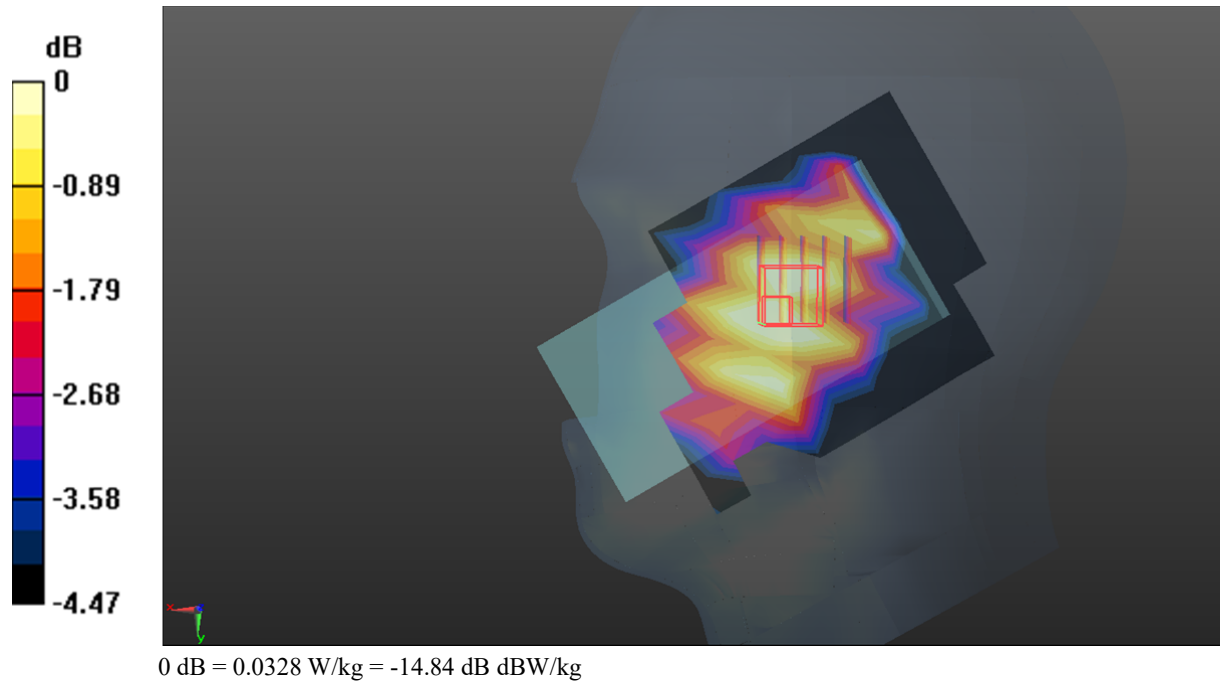

**Test Plot 110#: LTE Band 12\_Body Front\_1RB\_Middle****DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f=707.5$  MHz;  $\sigma = 0.876$  S/m;  $\epsilon_r = 42.79$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @707.5 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x10x1):**Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0650 W/kg


**Zoom Scan (5x5x7)/Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.276 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.0520 W/kg

**SAR(1 g) = 0.052 W/kg; SAR(10 g) = 0.047 W/kg**

Maximum value of SAR (measured) = 0.0520 W/kg

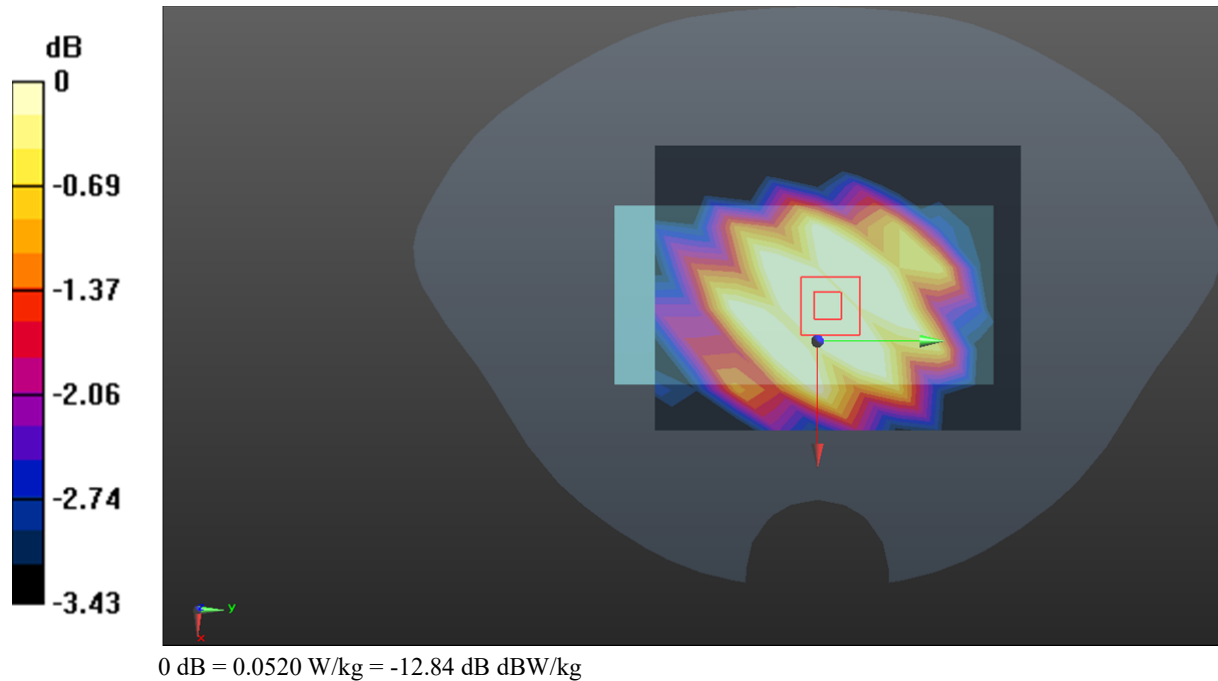

**Test Plot 111#: LTE Band 12\_Body Front\_50%RB\_Middle****DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f=707.5$  MHz;  $\sigma = 0.876$  S/m;  $\epsilon_r = 42.79$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @707.5 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x10x1):**Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0523 W/kg


**Zoom Scan (5x5x7)/Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.647 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.0440 W/kg

**SAR(1 g) = 0.044 W/kg; SAR(10 g) = 0.040 W/kg**

Maximum value of SAR (measured) = 0.0439 W/kg

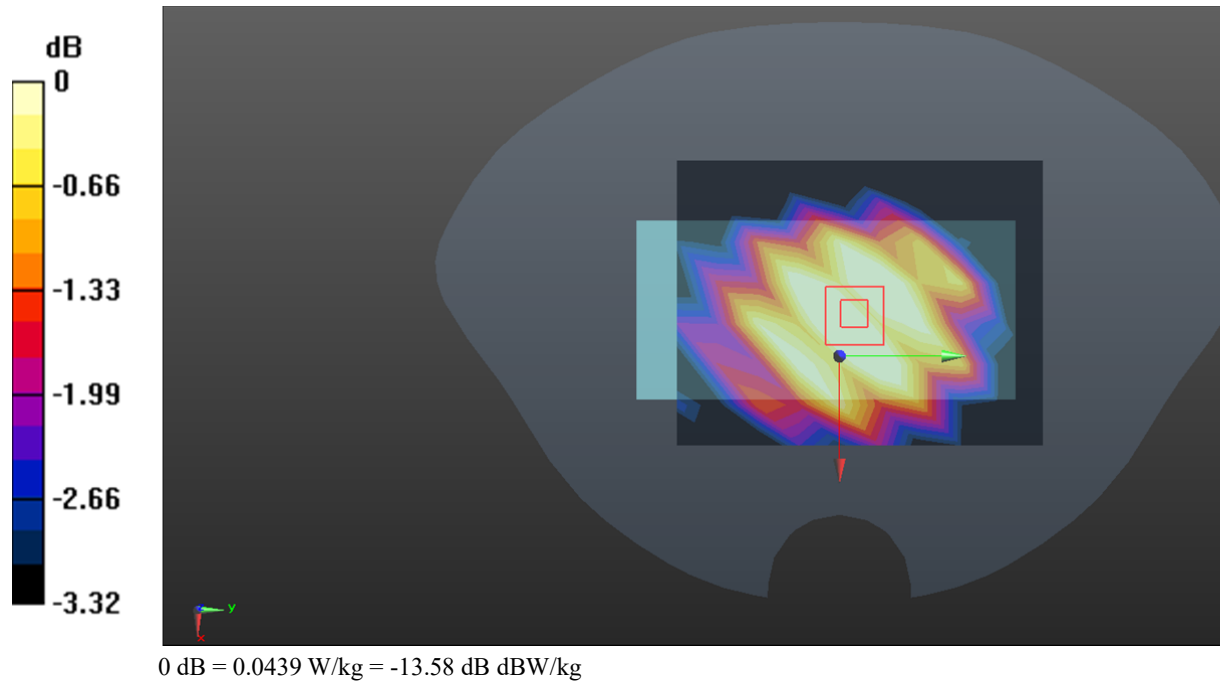

**Test Plot 112#: LTE Band 12\_Body Back\_1RB\_Middle****DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f=707.5$  MHz;  $\sigma = 0.876$  S/m;  $\epsilon_r = 42.79$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @707.5 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x10x1):**Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0921 W/kg

**Zoom Scan (5x5x7)/Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.191 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.0740 W/kg

**SAR(1 g) = 0.073 W/kg; SAR(10 g) = 0.065 W/kg**

Maximum value of SAR (measured) = 0.0731 W/kg

