

Test Plot 113#: LTE Band 12_Body Back_50%RB_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f=707.5$ MHz; $\sigma = 0.876$ S/m; $\epsilon_r = 42.79$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @707.5 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0773 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.974 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.0610 W/kg

SAR(1 g) = 0.061 W/kg; SAR(10 g) = 0.055 W/kg

Maximum value of SAR (measured) = 0.0604 W/kg

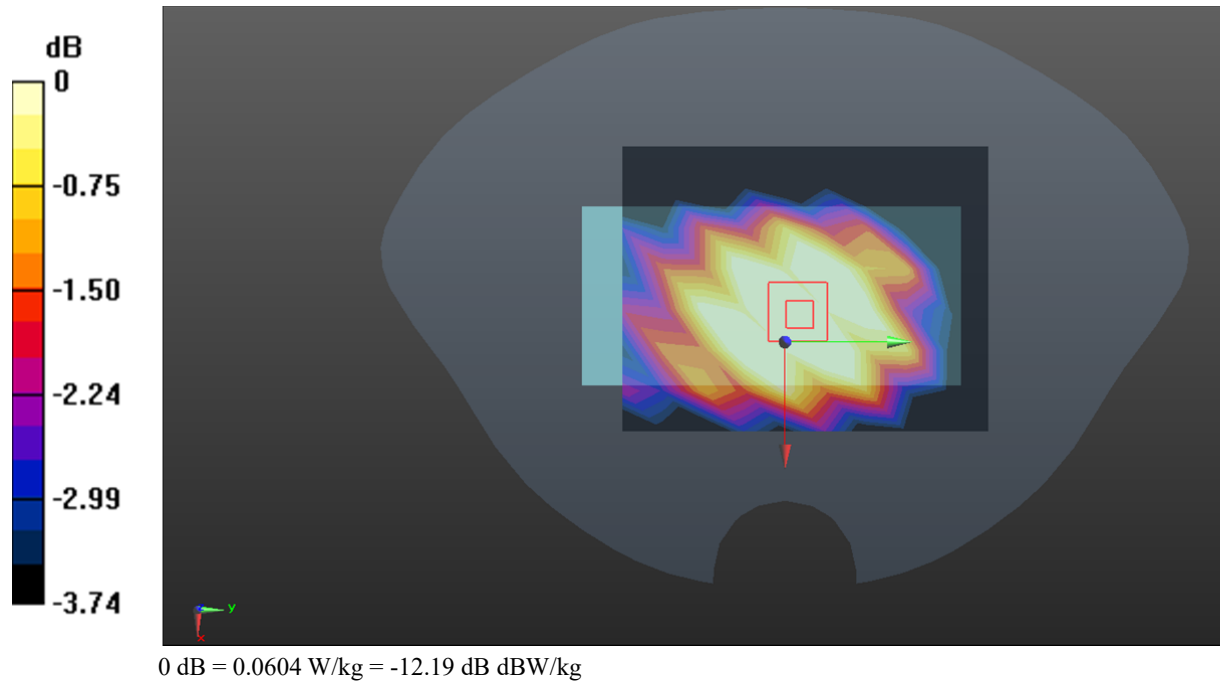

Test Plot 114#: LTE Band 12_Body Left_1RB_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f=707.5$ MHz; $\sigma = 0.876$ S/m; $\epsilon_r = 42.79$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @707.5 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x11x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.201 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.38 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.152 W/kg

SAR(1 g) = 0.150 W/kg; SAR(10 g) = 0.129 W/kg

Maximum value of SAR (measured) = 0.150 W/kg

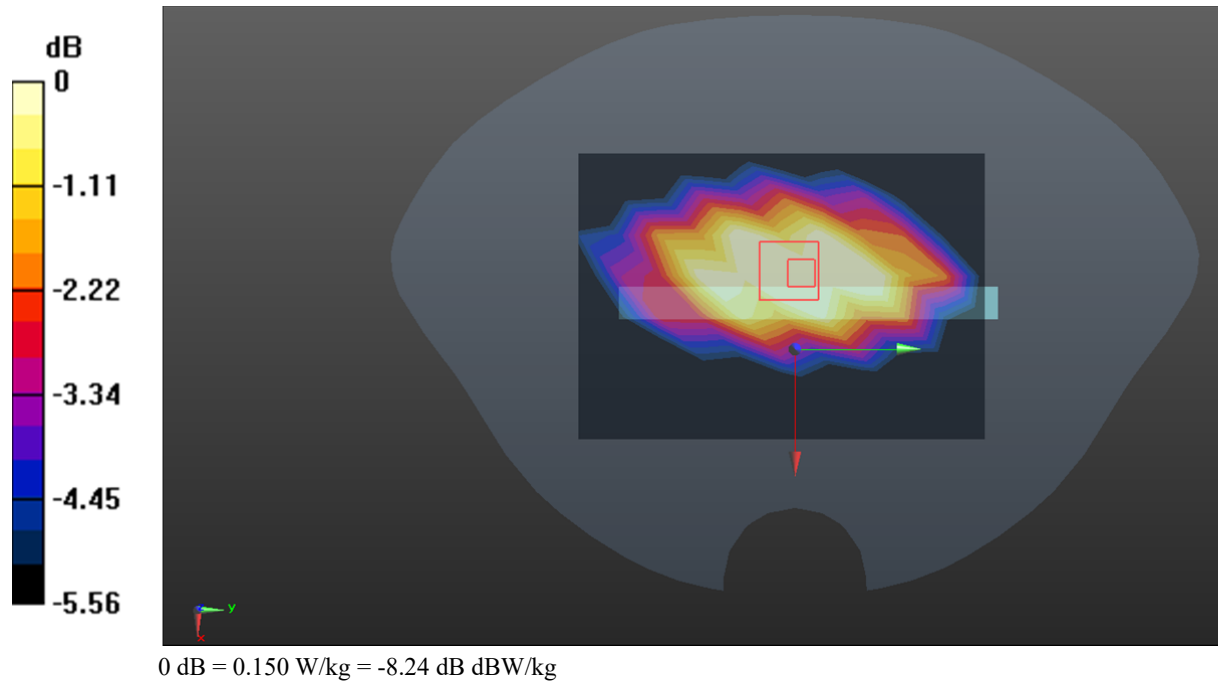

Test Plot 115#: LTE Band 12_Body Left_50%RB_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f=707.5$ MHz; $\sigma = 0.876$ S/m; $\epsilon_r = 42.79$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @707.5 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.172 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.29 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.126 W/kg

SAR(1 g) = 0.123 W/kg; SAR(10 g) = 0.106 W/kg

Maximum value of SAR (measured) = 0.124 W/kg

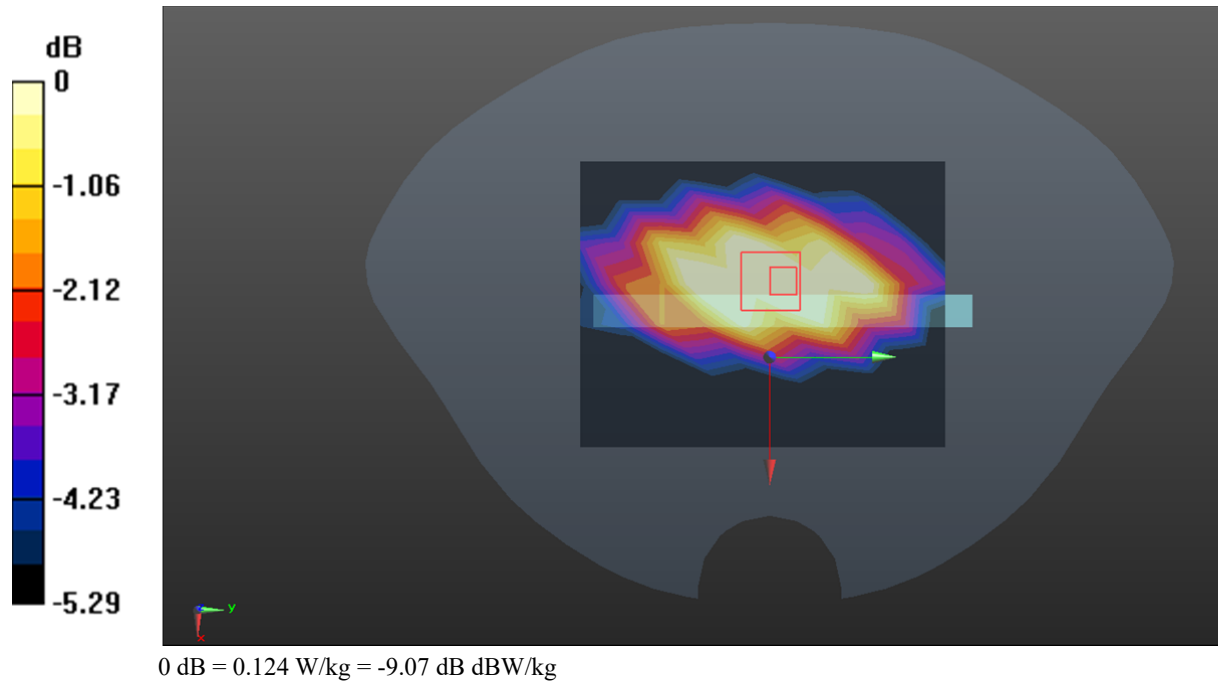

Test Plot 116#: LTE Band 12_Body Right_1RB_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f=707.5$ MHz; $\sigma = 0.876$ S/m; $\epsilon_r = 42.79$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @707.5 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x11x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.198 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.88 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.149 W/kg

SAR(1 g) = 0.146 W/kg; SAR(10 g) = 0.123 W/kg

Maximum value of SAR (measured) = 0.146 W/kg

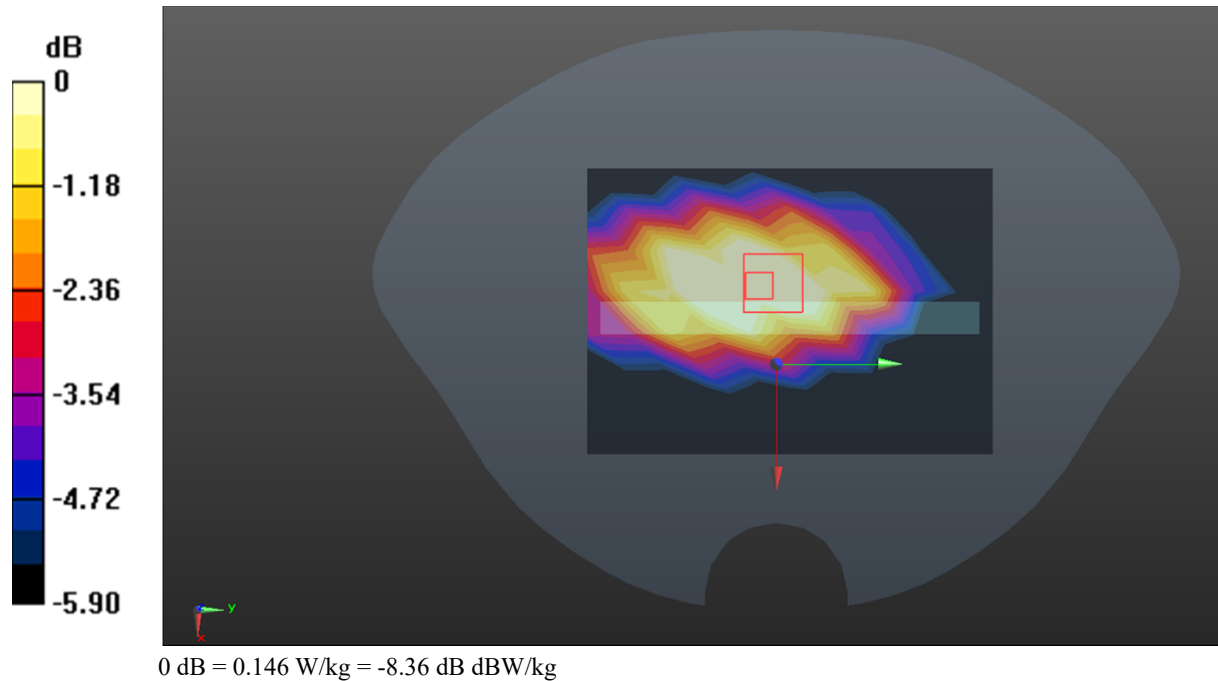

Test Plot 117#: LTE Band 12_Body Right_50%RB_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f=707.5$ MHz; $\sigma = 0.876$ S/m; $\epsilon_r = 42.79$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @707.5 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.162 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.99 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.124 W/kg

SAR(1 g) = 0.122 W/kg; SAR(10 g) = 0.105 W/kg

Maximum value of SAR (measured) = 0.122 W/kg

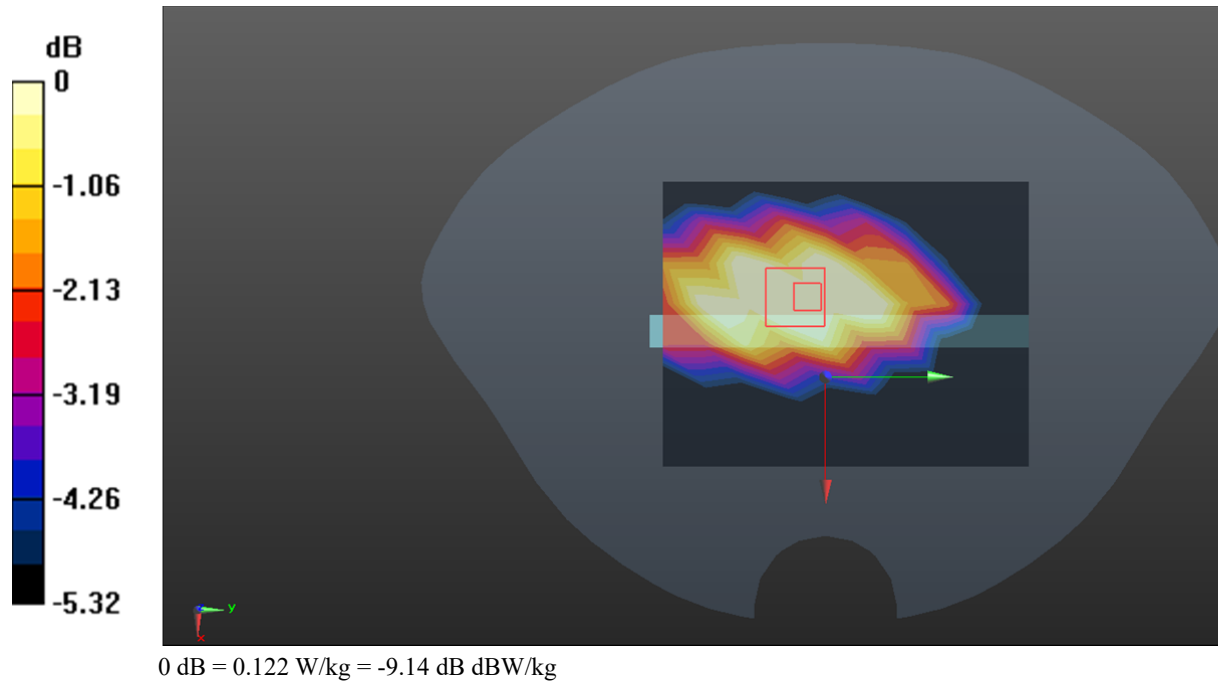

Test Plot 118#: LTE Band 12_Body Bottom_1RB_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f=707.5$ MHz; $\sigma = 0.876$ S/m; $\epsilon_r = 42.79$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @707.5 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0446 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.301 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.0880 W/kg

SAR(1 g) = 0.044 W/kg; SAR(10 g) = 0.023 W/kg

Maximum value of SAR (measured) = 0.0474 W/kg

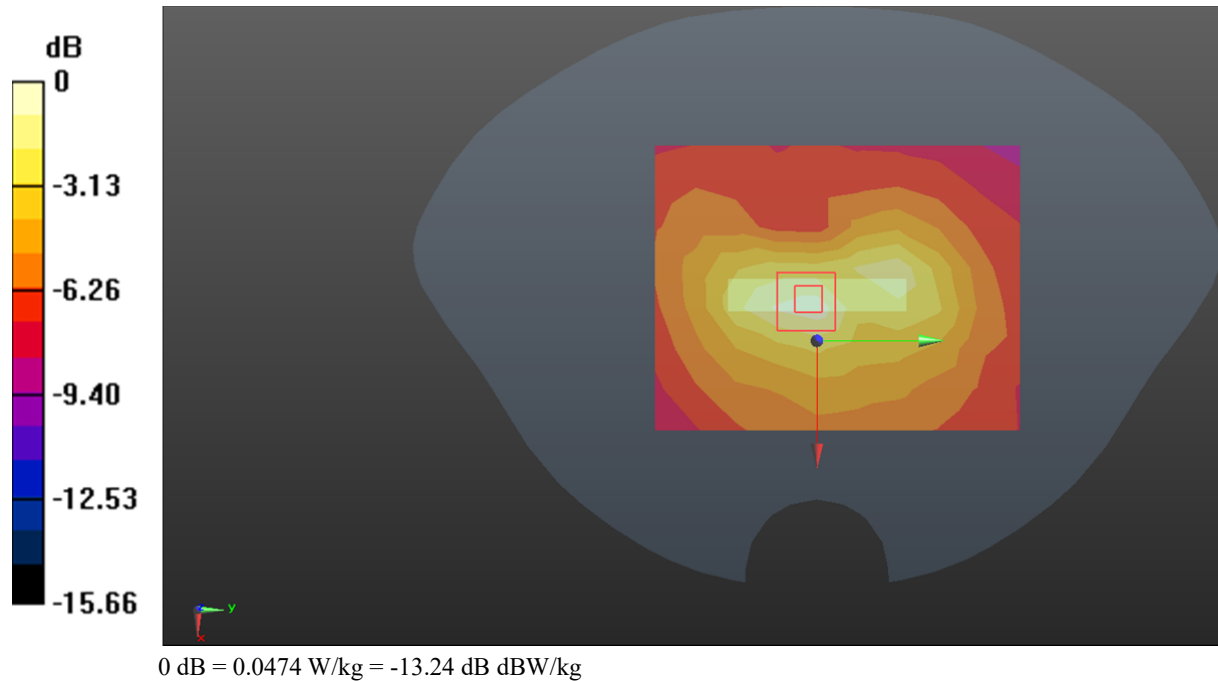

Test Plot 119#: LTE Band 12_Body Bottom_50%RB_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f=707.5$ MHz; $\sigma = 0.876$ S/m; $\epsilon_r = 42.79$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @707.5 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0397 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.924 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.0790 W/kg

SAR(1 g) = 0.039 W/kg; SAR(10 g) = 0.021 W/kg

Maximum value of SAR (measured) = 0.0423 W/kg

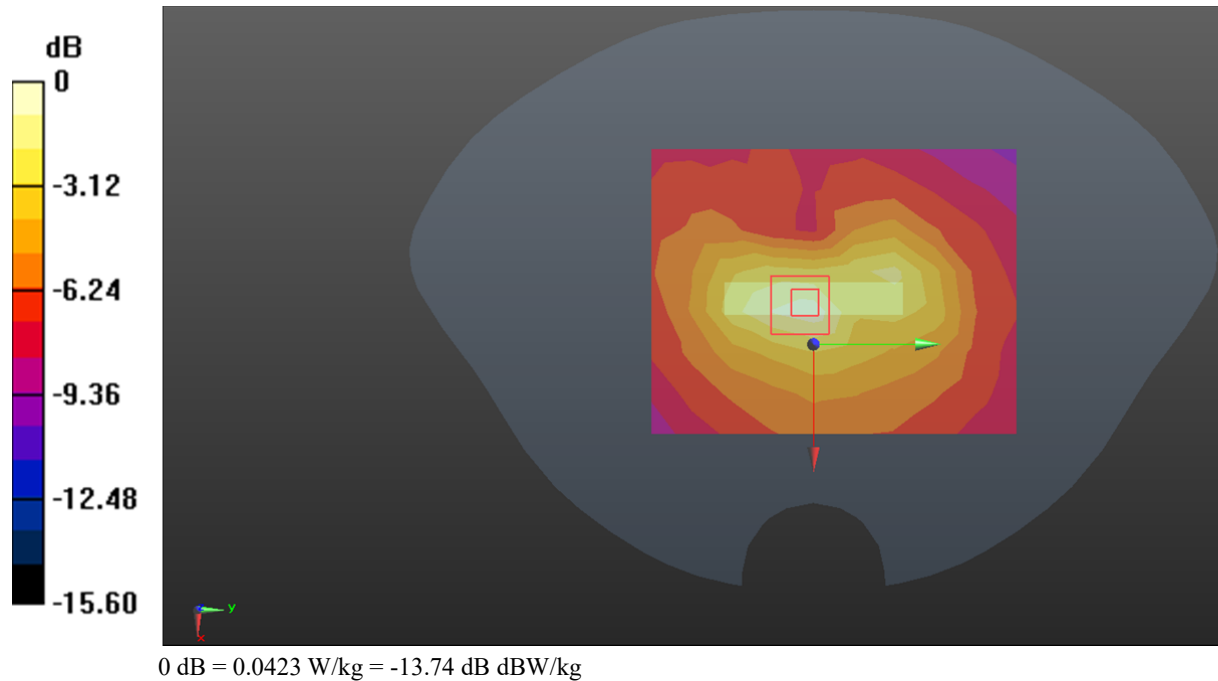

Test Plot 120#: LTE Band 66_Head Left Cheek_1RB_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
 Medium parameters used: $f=1745$ MHz; $\sigma = 1.378$ S/m; $\epsilon_r = 39.998$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15) @1745 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.00914 W/kg


Zoom Scan (7x7x7)/Cube 0:Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.461 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.00747 W/kg

SAR(1 g) = 0.00647 W/kg; SAR(10 g) = 0.00604 W/kg

Maximum value of SAR (measured) = 0.00746 W/kg

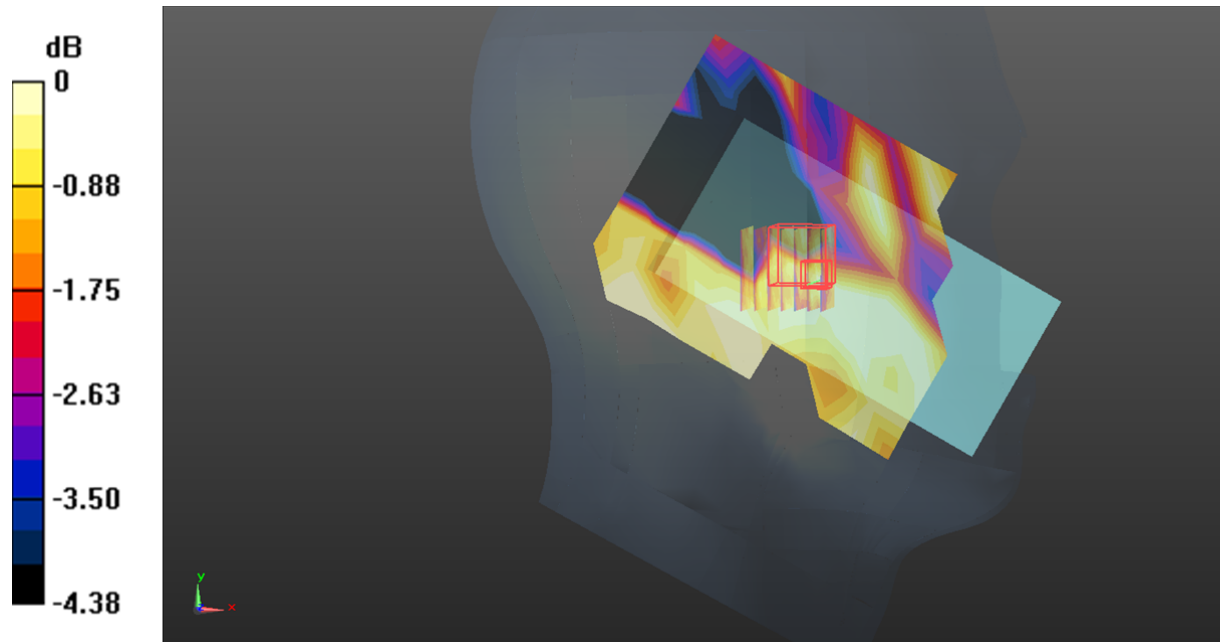

0 dB = 0.00746 W/kg = -21.27 dB dBW/kg

Test Plot 121#: LTE Band 66_Head Left Cheek_50%RB_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
 Medium parameters used: $f=1745$ MHz; $\sigma = 1.378$ S/m; $\epsilon_r = 39.998$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15) @1745 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.00972 W/kg


Zoom Scan (7x7x7)/Cube 0:Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.650 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.00993 W/kg

SAR(1 g) = 0.00906 W/kg; SAR(10 g) = 0.00827 W/kg

Maximum value of SAR (measured) = 0.00979 W/kg

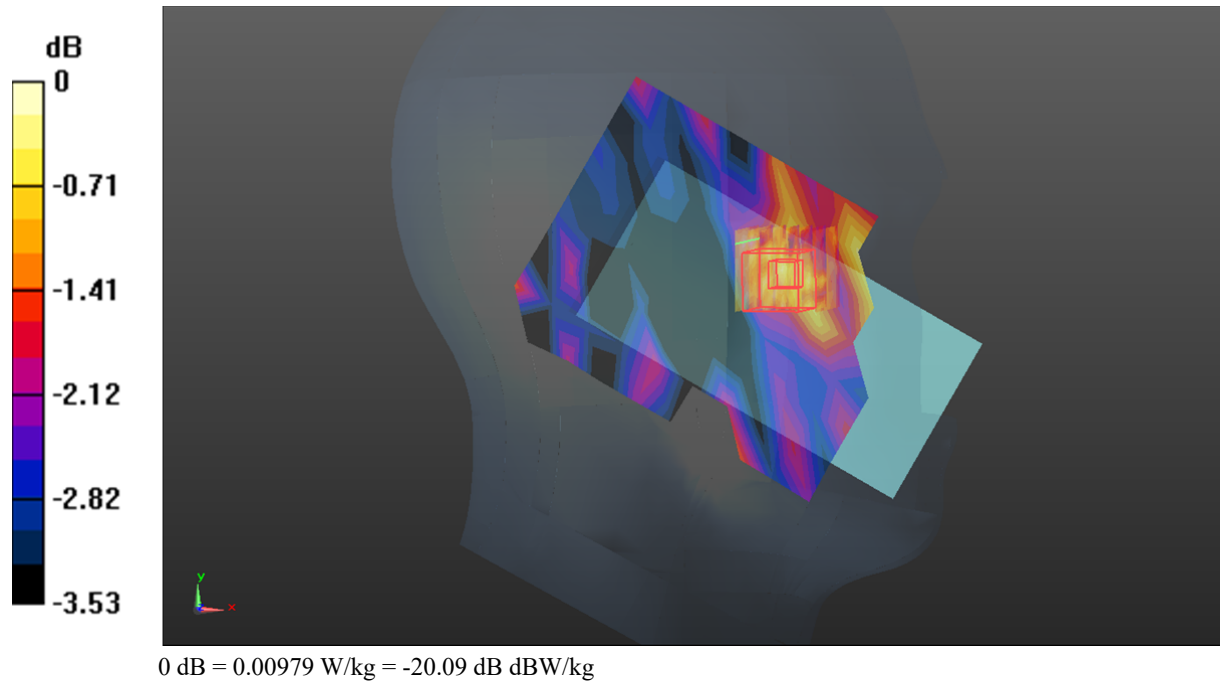

Test Plot 122#: LTE Band 66_Head Left Tilt_1RB_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
 Medium parameters used: $f=1745$ MHz; $\sigma = 1.378$ S/m; $\epsilon_r = 39.998$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15) @1745 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0113 W/kg


Zoom Scan (7x7x7)/Cube 0:Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.279 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.0100 W/kg

SAR(1 g) = 0.00877 W/kg; SAR(10 g) = 0.00779 W/kg

Maximum value of SAR (measured) = 0.00991 W/kg

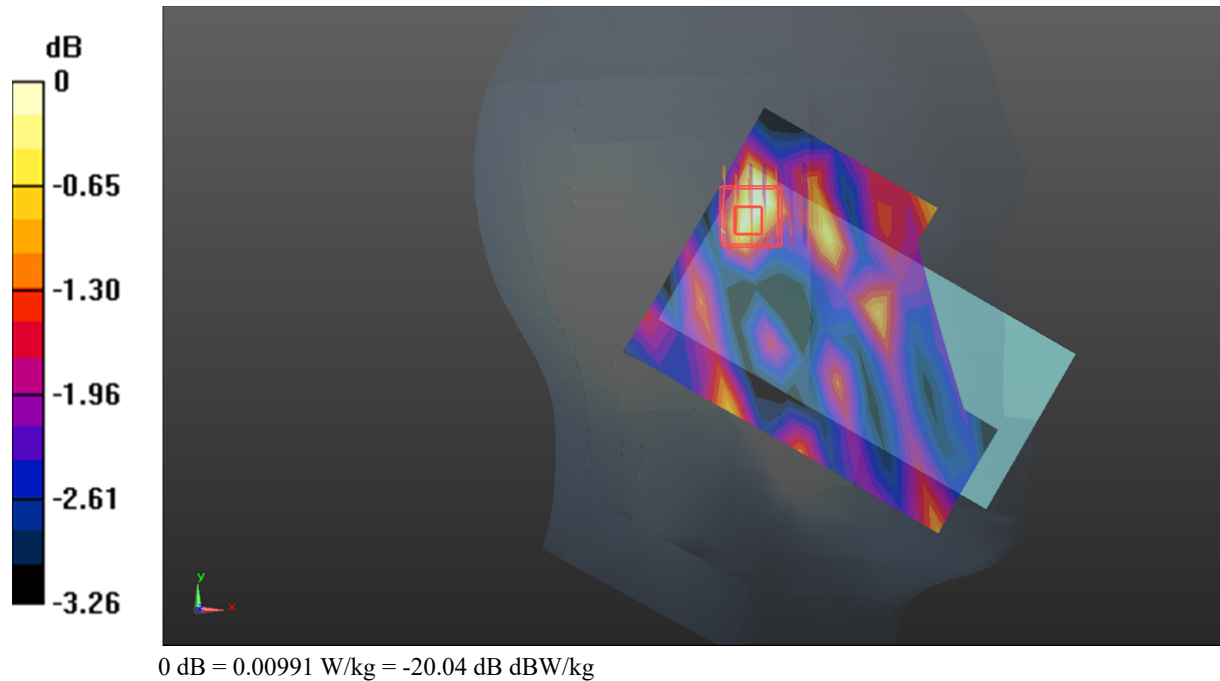

Test Plot 123#: LTE Band 66_Head Left Tilt_50%RB_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
 Medium parameters used: $f=1745$ MHz; $\sigma = 1.378$ S/m; $\epsilon_r = 39.998$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15) @1745 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0107 W/kg


Zoom Scan (7x7x7)/Cube 0:Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.068 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 0.0120 W/kg

SAR(1 g) = 0.011 W/kg; SAR(10 g) = 0.00875 W/kg

Maximum value of SAR (measured) = 0.0119 W/kg

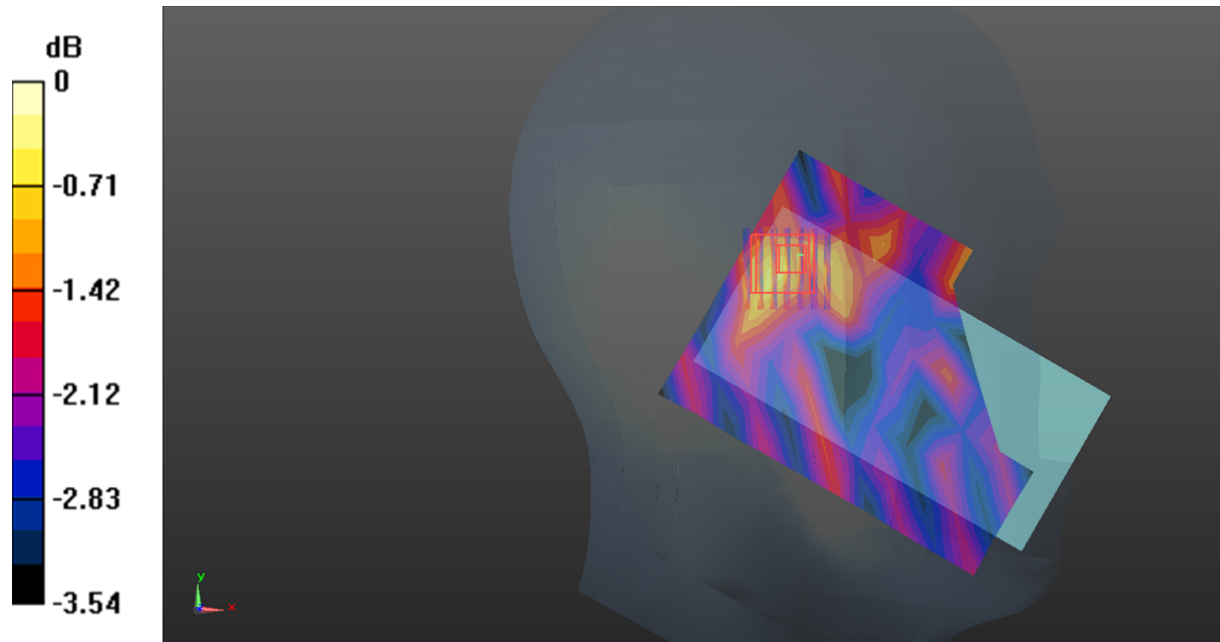

0 dB = 0.0119 W/kg = -19.24 dB dBW/kg

Test Plot 124#: LTE Band 66_Head Right Cheek_1RB_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
 Medium parameters used: $f=1745$ MHz; $\sigma = 1.378$ S/m; $\epsilon_r = 39.998$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15) @1745 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0270 W/kg


Zoom Scan (7x7x7)/Cube 0:Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.064 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.0200 W/kg

SAR(1 g) = 0.019 W/kg; SAR(10 g) = 0.017 W/kg

Maximum value of SAR (measured) = 0.0198 W/kg

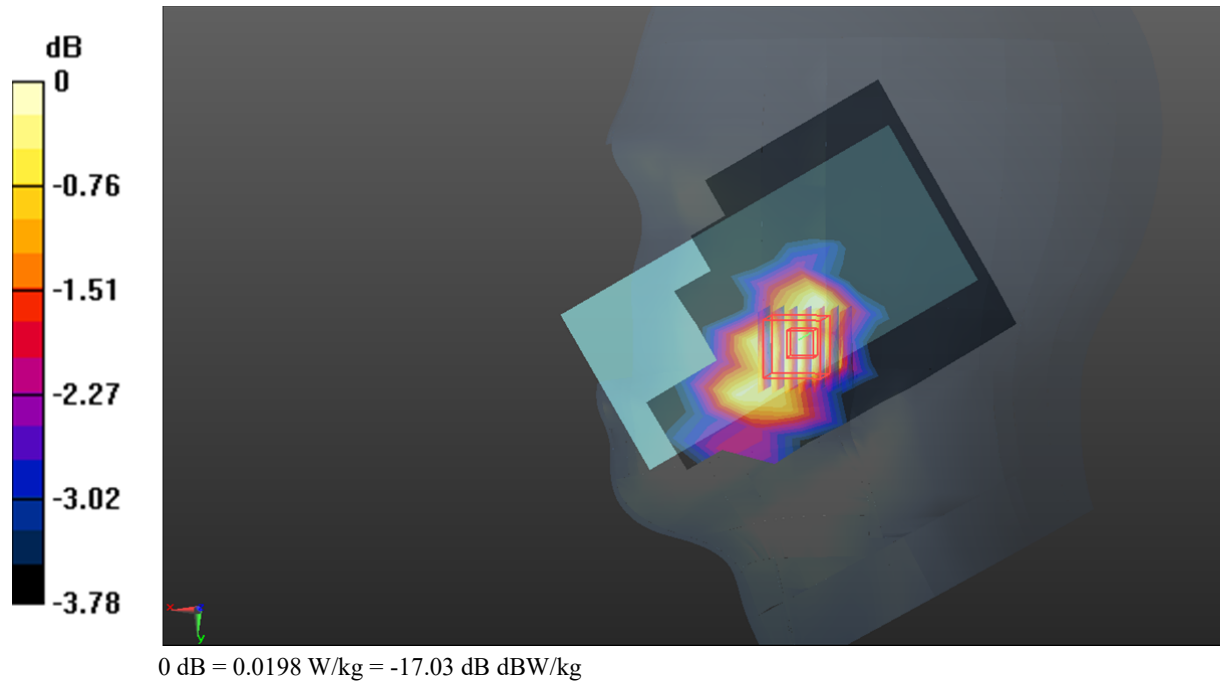

Test Plot 125#: LTE Band 66_Head Right Cheek_50%RB_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used: $f=1745$ MHz; $\sigma = 1.378$ S/m; $\epsilon_r = 39.998$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15) @1745 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0247 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.922 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.0190 W/kg

SAR(1 g) = 0.018 W/kg; SAR(10 g) = 0.016 W/kg

Maximum value of SAR (measured) = 0.0185 W/kg

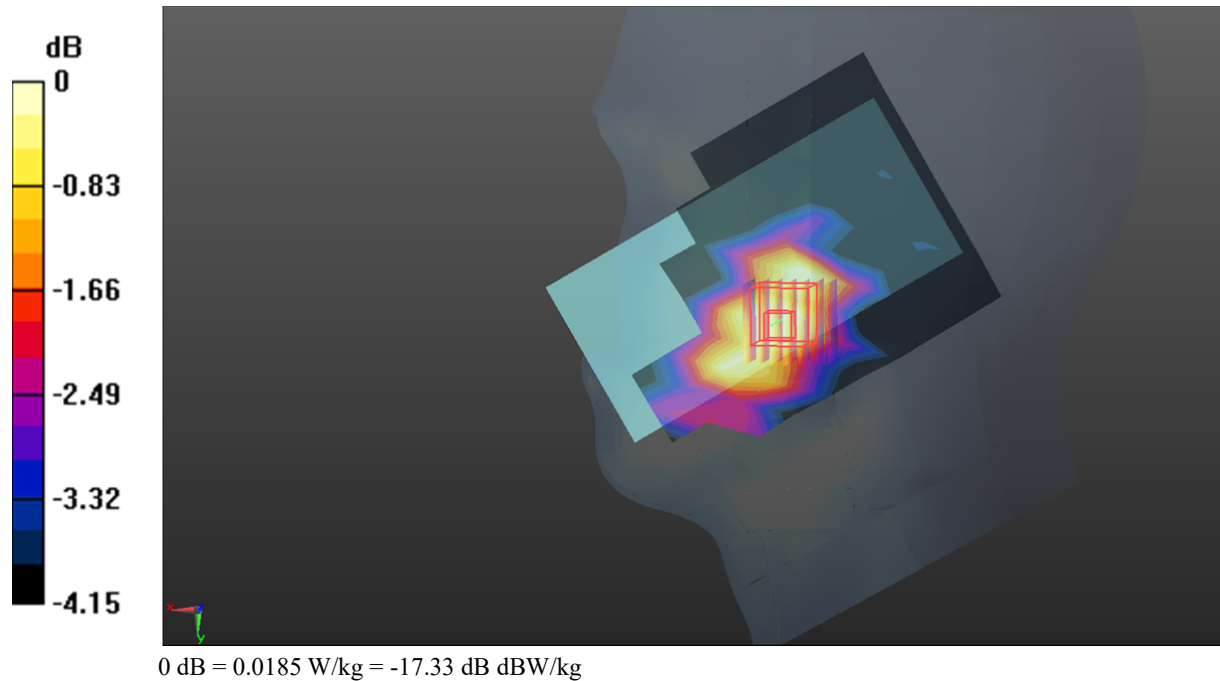

Test Plot 126#: LTE Band 66_Head Right Tilt_1RB_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
 Medium parameters used: $f=1745$ MHz; $\sigma = 1.378$ S/m; $\epsilon_r = 39.998$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15) @1745 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0113 W/kg


Zoom Scan (7x7x7)/Cube 0:Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.240 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.0110 W/kg

SAR(1 g) = 0.010 W/kg; SAR(10 g) = 0.00902 W/kg

Maximum value of SAR (measured) = 0.0110 W/kg

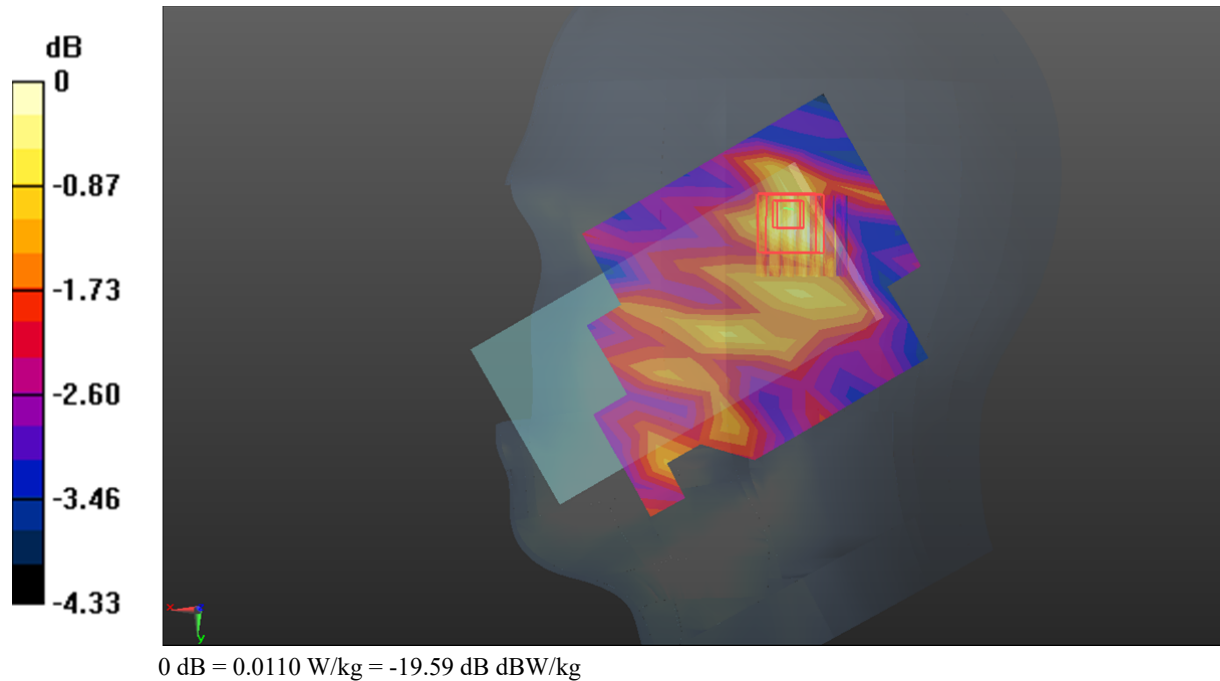

Test Plot 127#: LTE Band 66_Head Right Tilt_50%RB_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium parameters used: $f=1745$ MHz; $\sigma = 1.378$ S/m; $\epsilon_r = 39.998$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15) @1745 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.00920 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.114 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.00915 W/kg

SAR(1 g) = 0.00873 W/kg; SAR(10 g) = 0.00794 W/kg

Maximum value of SAR (measured) = 0.00906 W/kg

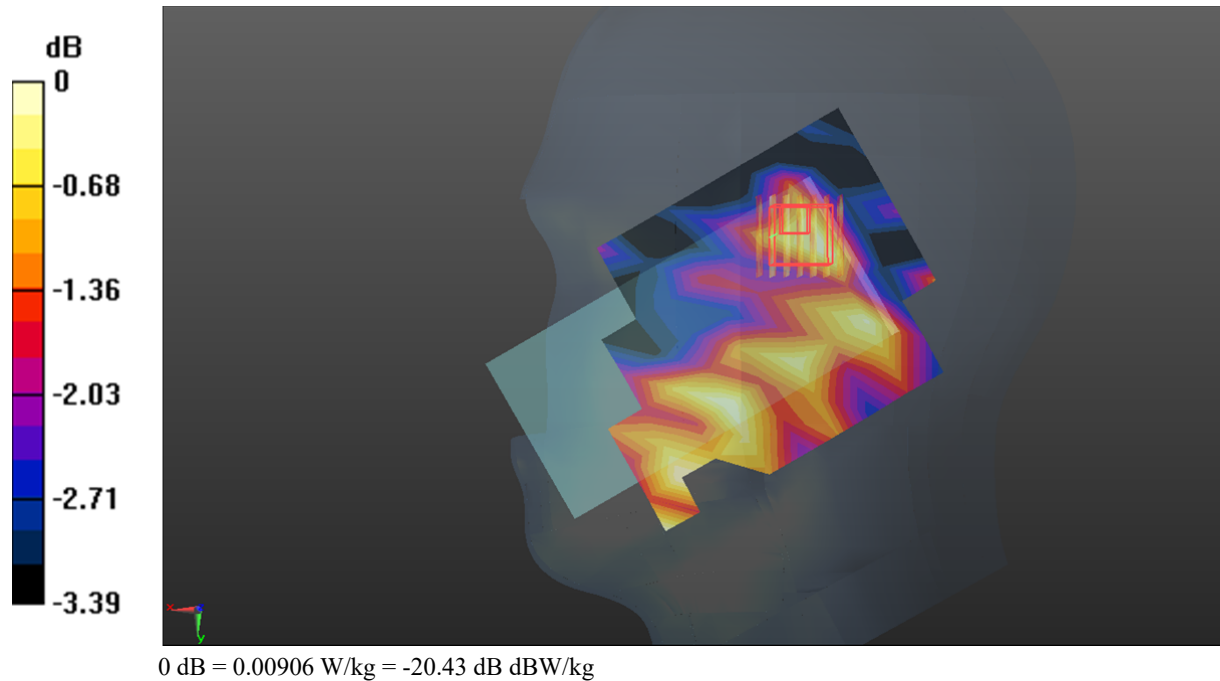

Test Plot 128#: LTE Band 66_Body Front_1RB_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
 Medium parameters used: $f=1745$ MHz; $\sigma = 1.378$ S/m; $\epsilon_r = 39.998$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15) @1745 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0835 W/kg


Zoom Scan (7x7x7)/Cube 0:Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.953 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0890 W/kg

SAR(1 g) = 0.080 W/kg; SAR(10 g) = 0.055 W/kg

Maximum value of SAR (measured) = 0.0839 W/kg

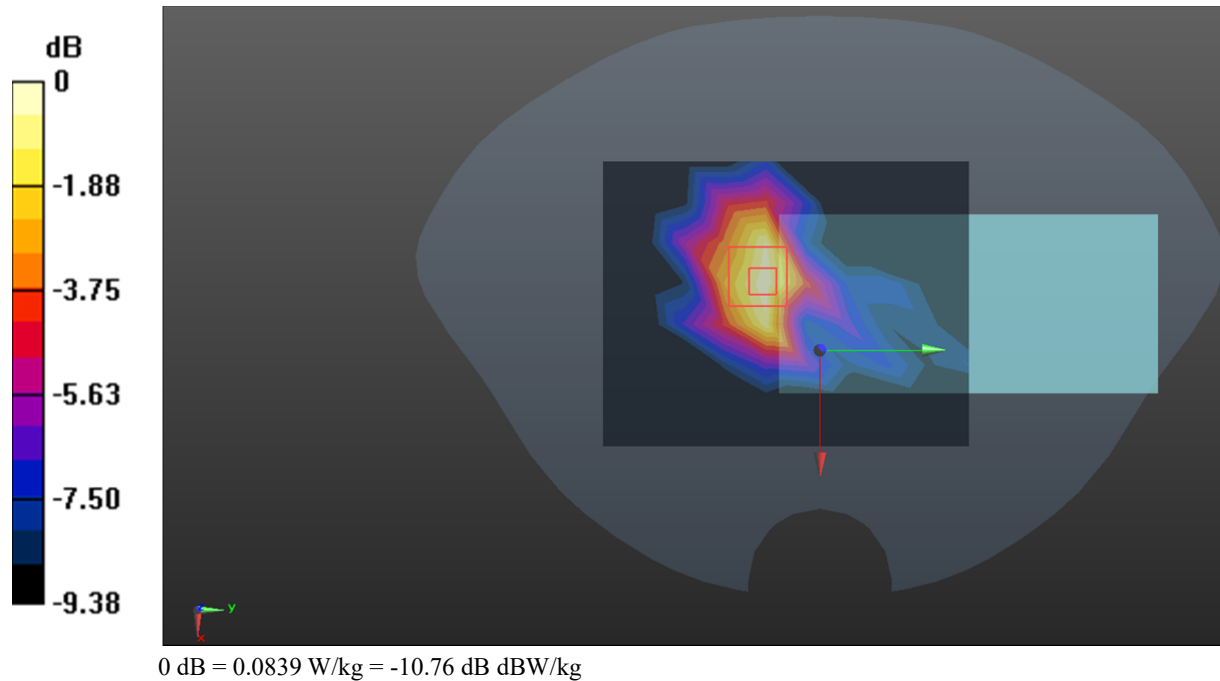

Test Plot 129#: LTE Band 66_Body Front_50%RB_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
 Medium parameters used: $f=1745$ MHz; $\sigma = 1.378$ S/m; $\epsilon_r = 39.998$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15) @1745 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0670 W/kg


Zoom Scan (7x7x7)/Cube 0:Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.772 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.0730 W/kg

SAR(1 g) = 0.065 W/kg; SAR(10 g) = 0.046 W/kg

Maximum value of SAR (measured) = 0.0683 W/kg

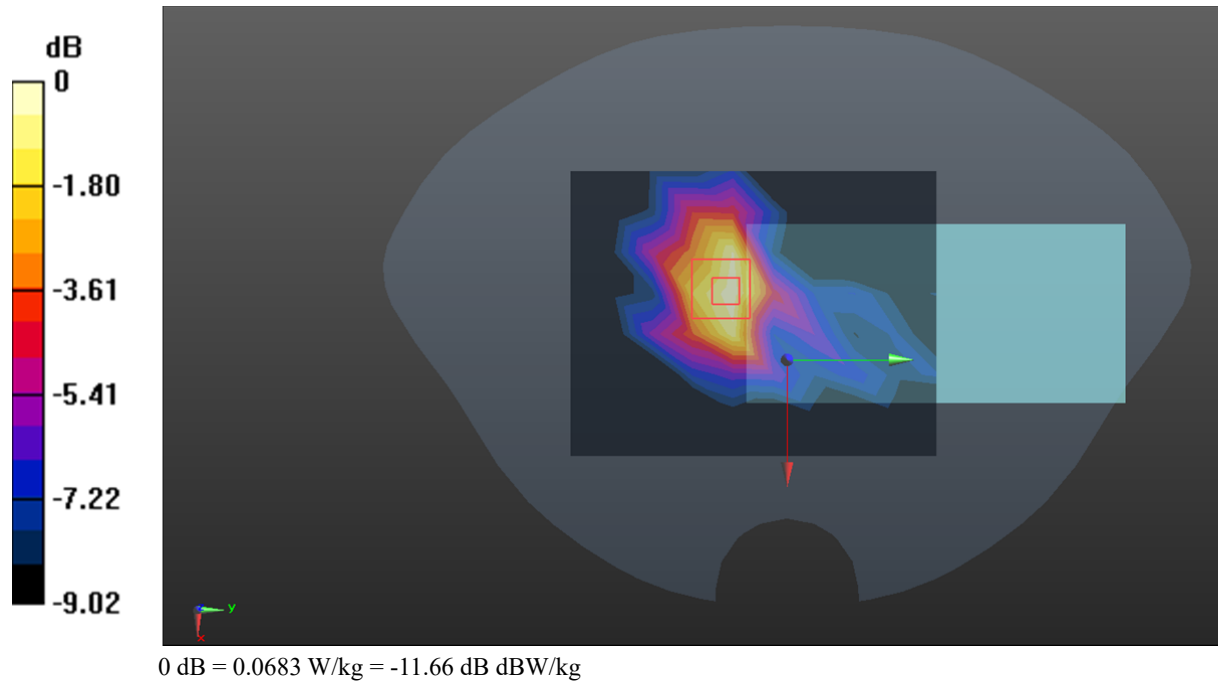

Test Plot 130#: LTE Band 66_Body Back_1RB_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
 Medium parameters used: $f=1745$ MHz; $\sigma = 1.378$ S/m; $\epsilon_r = 39.998$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15) @1745 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.138 W/kg


Zoom Scan (7x7x7)/Cube 0:Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.234 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.187 W/kg

SAR(1 g) = 0.166 W/kg; SAR(10 g) = 0.111 W/kg

Maximum value of SAR (measured) = 0.177 W/kg

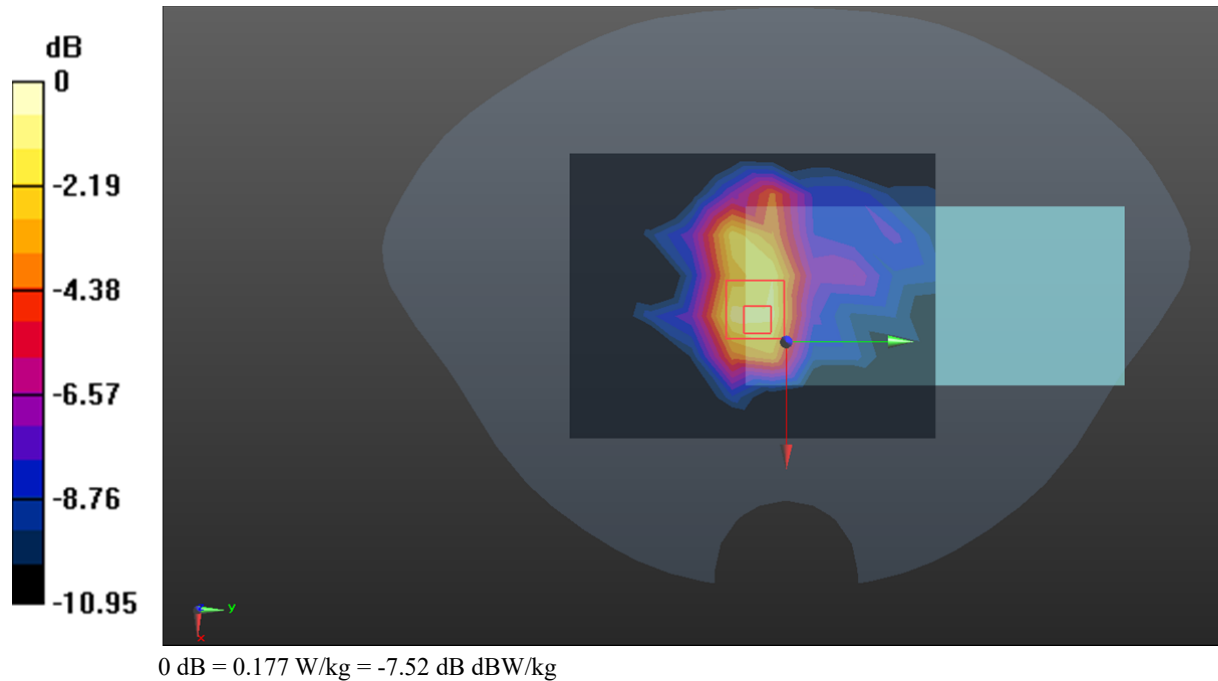

Test Plot 131#: LTE Band 66_Body Back_50%RB_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
 Medium parameters used: $f=1745$ MHz; $\sigma = 1.378$ S/m; $\epsilon_r = 39.998$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15) @1745 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.113 W/kg


Zoom Scan (7x7x7)/Cube 0:Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.597 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.150 W/kg

SAR(1 g) = 0.134 W/kg; SAR(10 g) = 0.090 W/kg

Maximum value of SAR (measured) = 0.142 W/kg

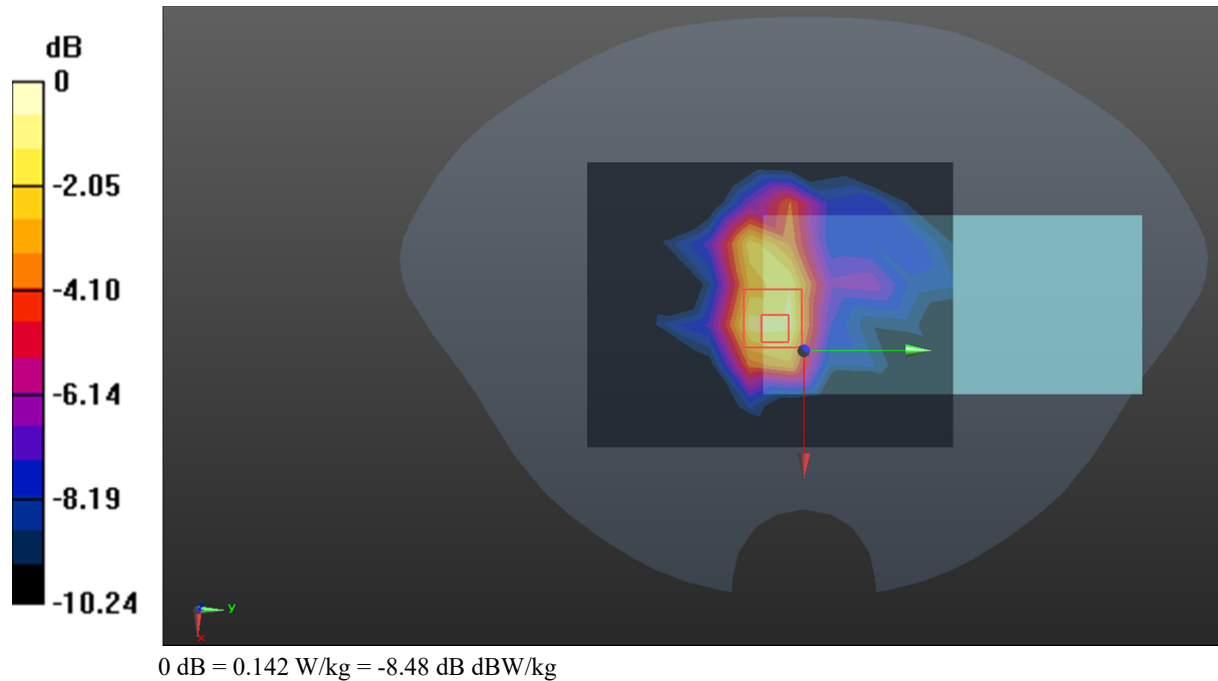

Test Plot 132#: LTE Band 66_Body Left_1RB_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
 Medium parameters used: $f=1745$ MHz; $\sigma = 1.378$ S/m; $\epsilon_r = 39.998$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15) @1745 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0342 W/kg


Zoom Scan (7x7x7)/Cube 0:Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.312 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.0550 W/kg

SAR(1 g) = 0.034 W/kg; SAR(10 g) = 0.021 W/kg

Maximum value of SAR (measured) = 0.0356 W/kg

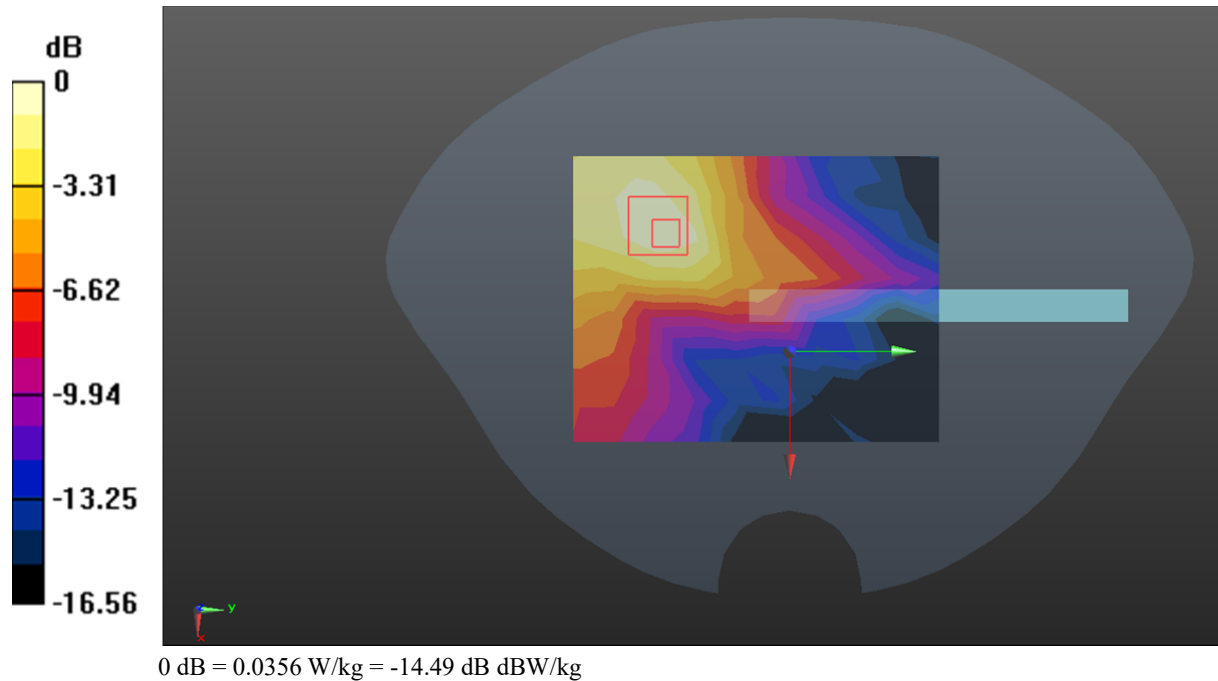

Test Plot 133#: LTE Band 66_Body Left_50%RB_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
 Medium parameters used: $f=1745$ MHz; $\sigma = 1.378$ S/m; $\epsilon_r = 39.998$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15) @1745 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0295 W/kg


Zoom Scan (7x7x7)/Cube 0:Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.042 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.0430 W/kg

SAR(1 g) = 0.029 W/kg; SAR(10 g) = 0.021 W/kg

Maximum value of SAR (measured) = 0.0296 W/kg

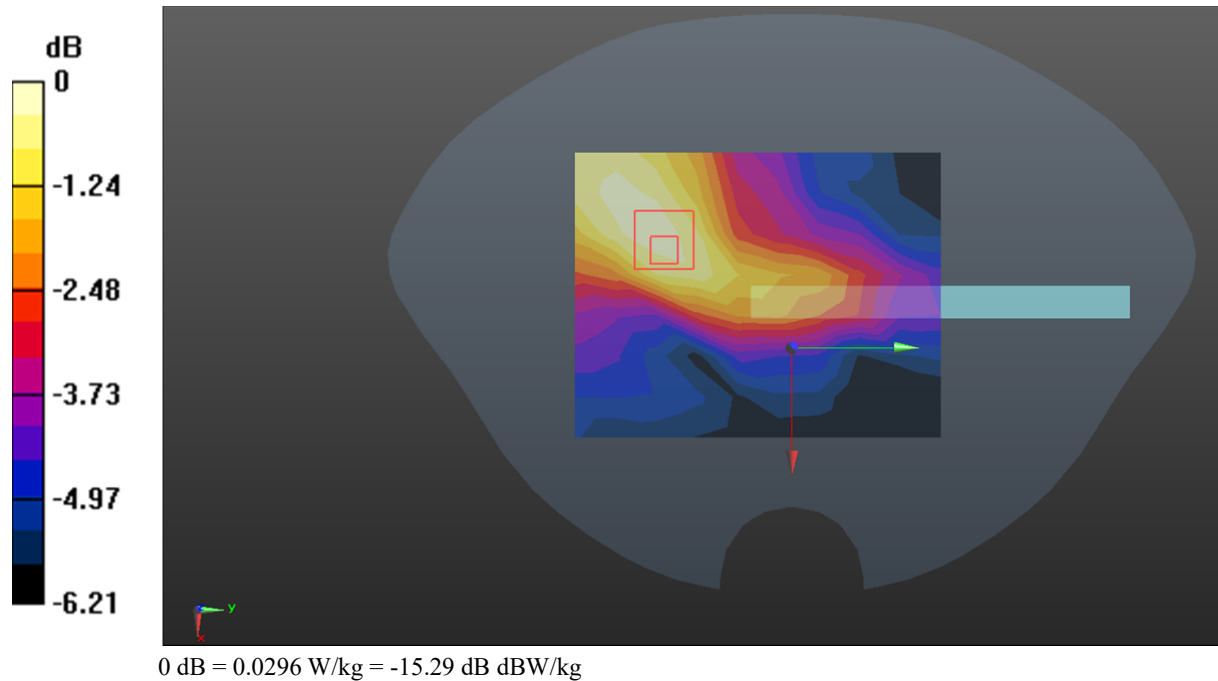

Test Plot 134#: LTE Band 66_Body Right_1RB_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
 Medium parameters used: $f=1745$ MHz; $\sigma = 1.378$ S/m; $\epsilon_r = 39.998$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15) @1745 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0703 W/kg


Zoom Scan (7x7x7)/Cube 0:Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.478 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.112 W/kg

SAR(1 g) = 0.068 W/kg; SAR(10 g) = 0.043 W/kg

Maximum value of SAR (measured) = 0.0712 W/kg

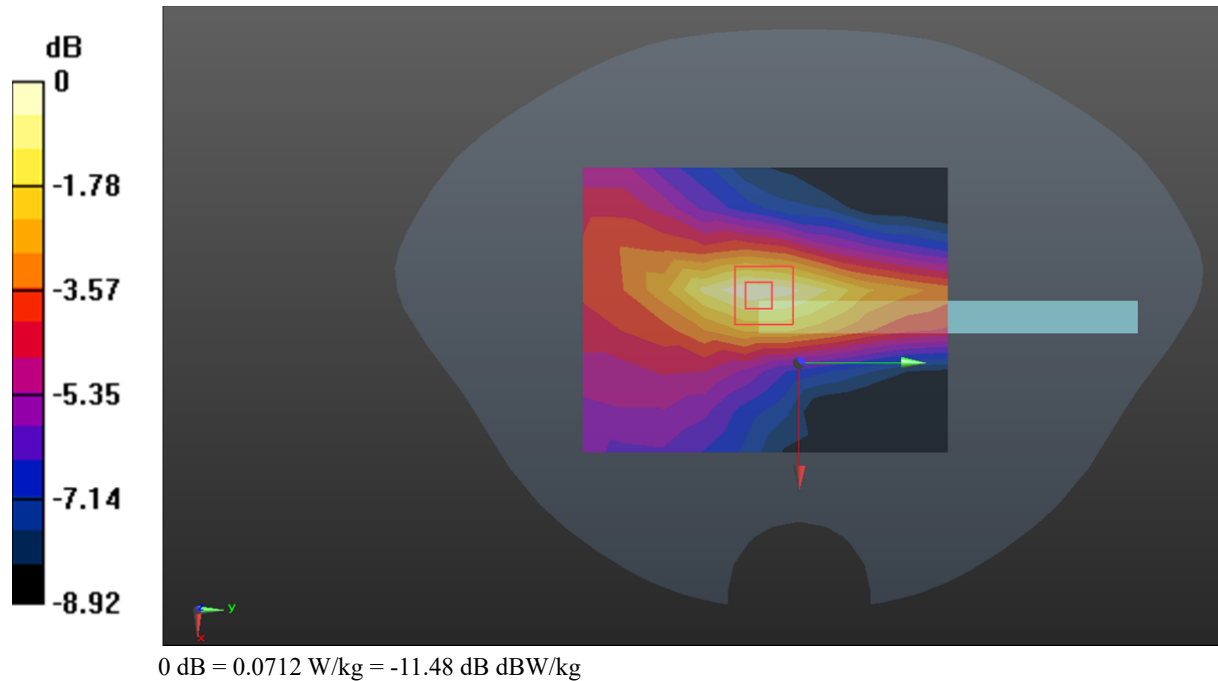

Test Plot 135#: LTE Band 66_Body Right_50%RB_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
 Medium parameters used: $f=1745$ MHz; $\sigma = 1.378$ S/m; $\epsilon_r = 39.998$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15) @1745 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0573 W/kg


Zoom Scan (7x7x7)/Cube 0:Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.844 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0940 W/kg

SAR(1 g) = 0.059 W/kg; SAR(10 g) = 0.038 W/kg

Maximum value of SAR (measured) = 0.0619 W/kg

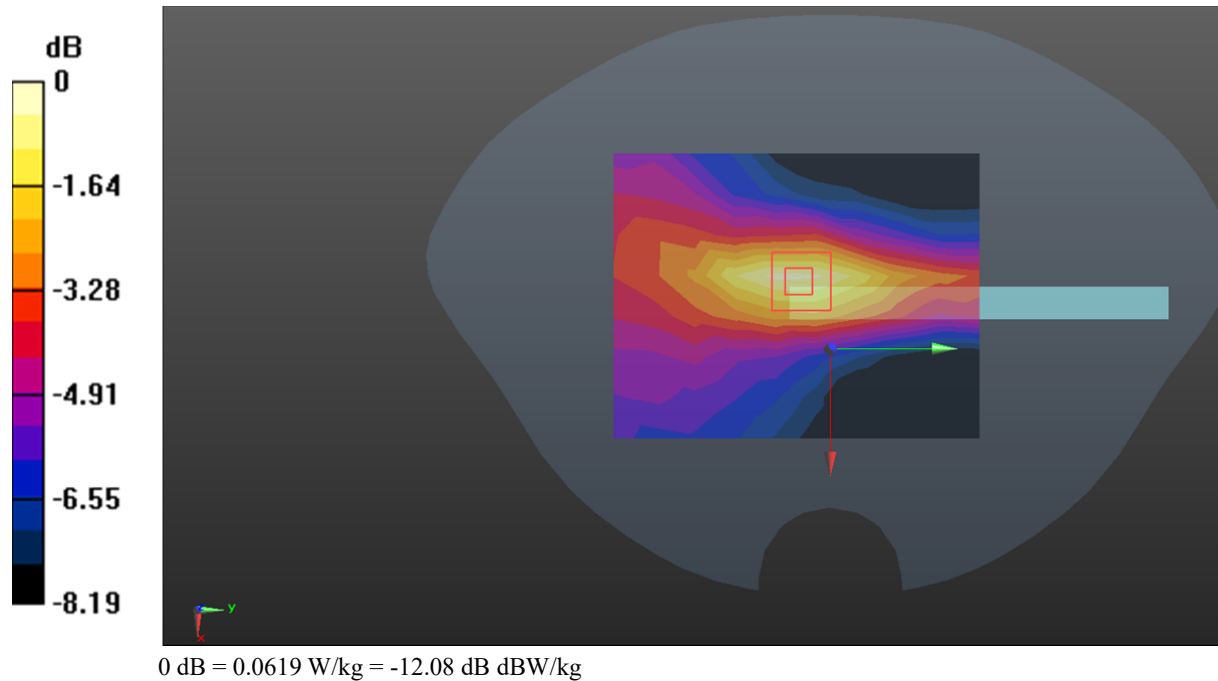

Test Plot 136#: LTE Band 66_Body Bottom_1RB_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
 Medium parameters used: $f=1745$ MHz; $\sigma = 1.378$ S/m; $\epsilon_r = 39.998$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15) @1745 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.509 W/kg


Zoom Scan (7x7x7)/Cube 0:Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.66 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.867 W/kg

SAR(1 g) = 0.462 W/kg; SAR(10 g) = 0.238 W/kg

Maximum value of SAR (measured) = 0.507 W/kg

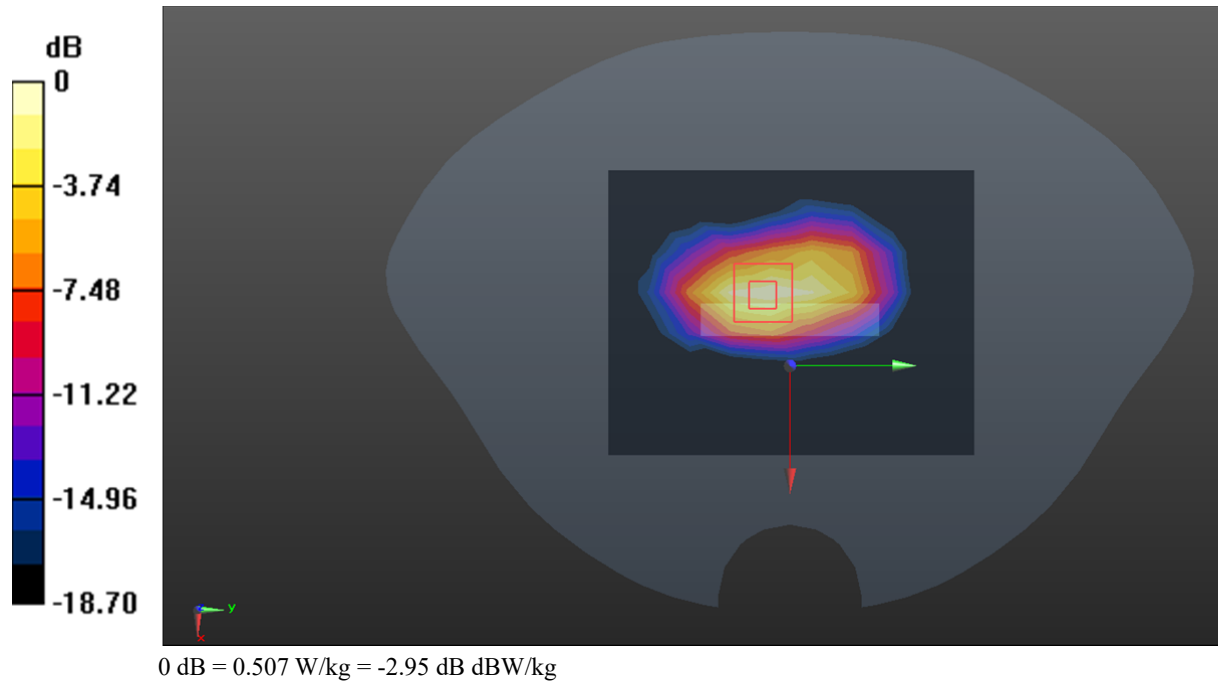

Test Plot 137#: LTE Band 66_Body Bottom_50%RB_Middle**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
 Medium parameters used: $f=1745$ MHz; $\sigma = 1.378$ S/m; $\epsilon_r = 39.998$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15) @1745 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.340 W/kg


Zoom Scan (7x7x7)/Cube 0:Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.41 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.588 W/kg

SAR(1 g) = 0.314 W/kg; SAR(10 g) = 0.162 W/kg

Maximum value of SAR (measured) = 0.345 W/kg

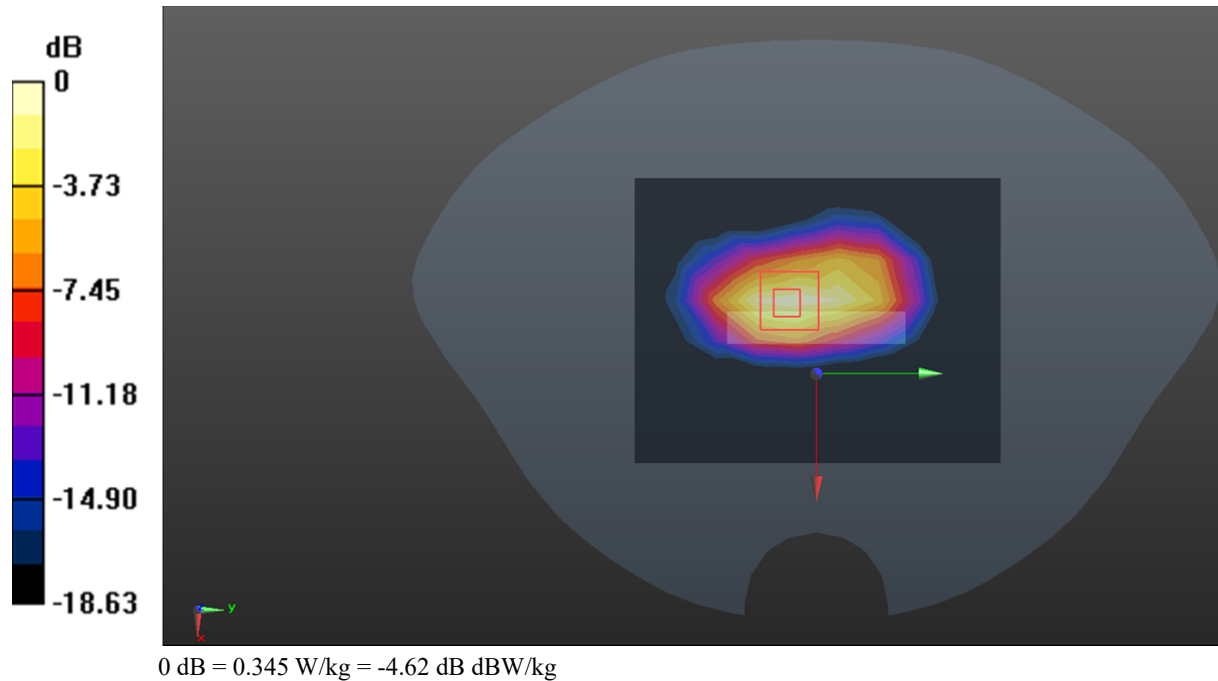

Test Plot 138#: WLAN 2.4G_Head Left Cheek_Mid**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2437$ MHz; $\sigma = 1.855$ S/m; $\epsilon_r = 38.02$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @ 2437 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.723 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.182 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.545 W/kg

SAR(1 g) = 0.467 W/kg; SAR(10 g) = 0.304 W/kg

Maximum value of SAR (measured) = 0.512 W/kg

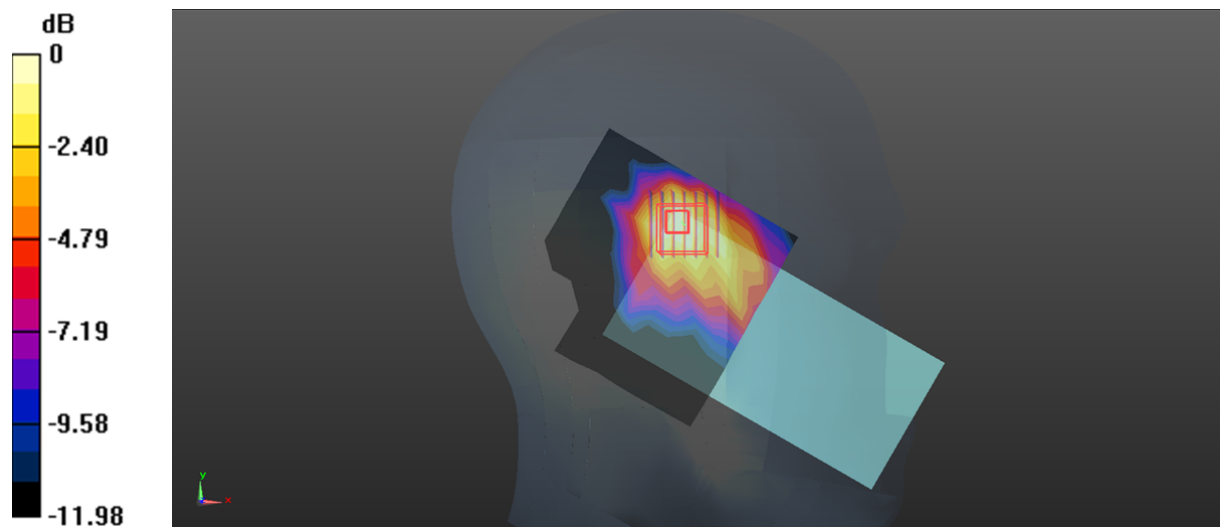

0 dB = 0.512 W/kg = -2.91 dBW/kg

Test Plot 139#:WLAN 2.4G_Head Left Tilt_Mid**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: 802.11b; Frequency: 2437 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.855$ S/m; $\epsilon_r = 38.02$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @ 2437 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.613 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.057 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.579 W/kg

SAR(1 g) = 0.463 W/kg; SAR(10 g) = 0.285 W/kg

Maximum value of SAR (measured) = 0.507 W/kg

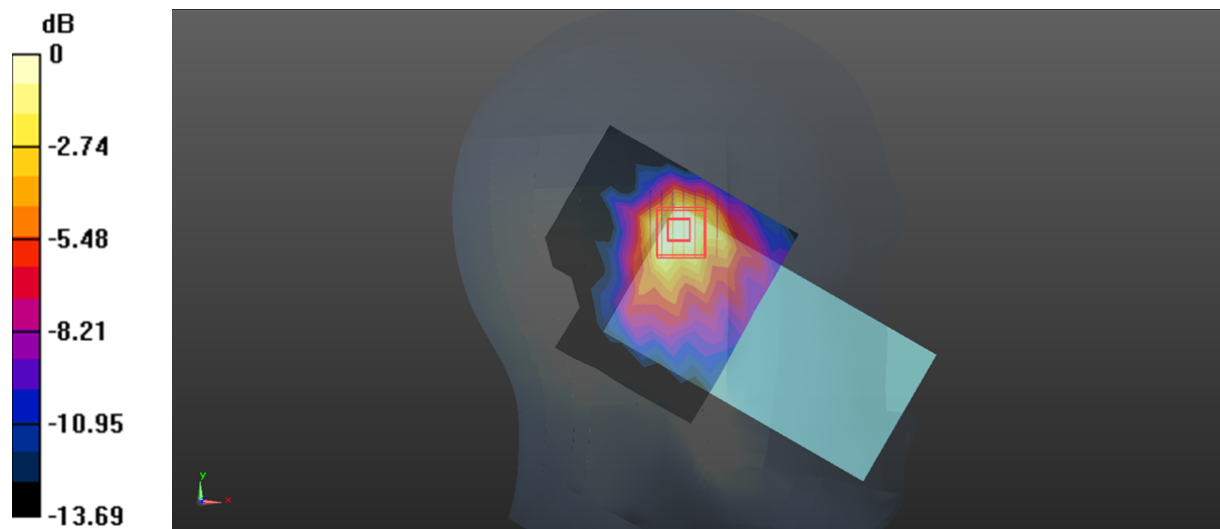

0 dB = 0.507 W/kg = -2.95 dBW/kg

Test Plot 140#: WLAN 2.4G_Head Right Cheek_Mid**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.855$ S/m; $\epsilon_r = 38.02$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @ 2437 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.183 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.281 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.220 W/kg

SAR(1 g) = 0.150 W/kg; SAR(10 g) = 0.099 W/kg

Maximum value of SAR (measured) = 0.171 W/kg

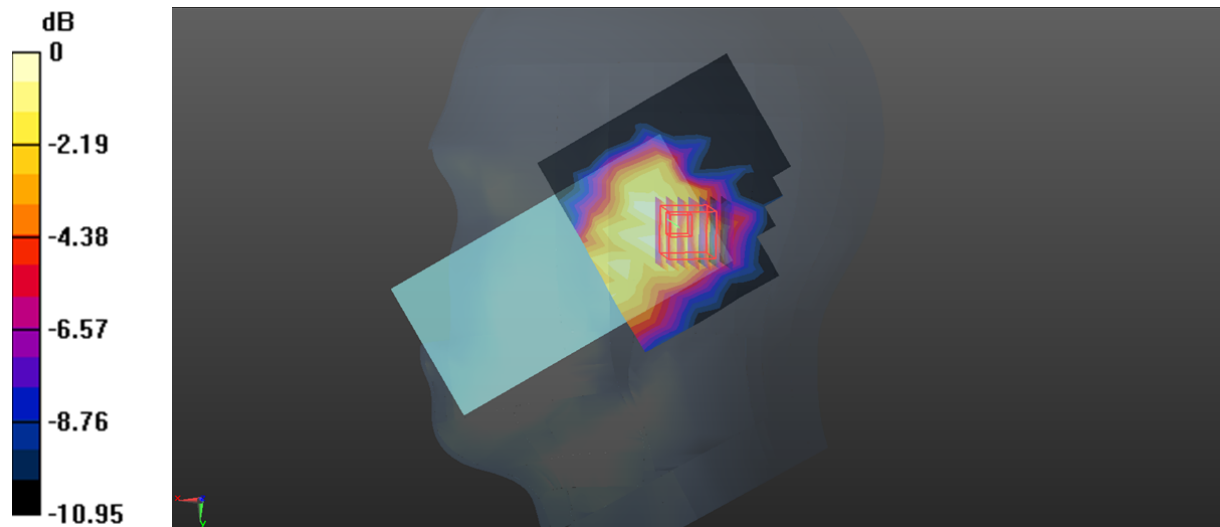

0 dB = 0.171 W/kg = -7.67 dBW/kg

Test Plot 141#:WLAN 2.4G_Head Right Tilt_Mid**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: 802.11b; Frequency: 2437 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.855$ S/m; $\epsilon_r = 38.02$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @ 2437 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.163 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.131 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.134 W/kg

SAR(1 g) = 0.116 W/kg; SAR(10 g) = 0.081 W/kg

Maximum value of SAR (measured) = 0.128 W/kg

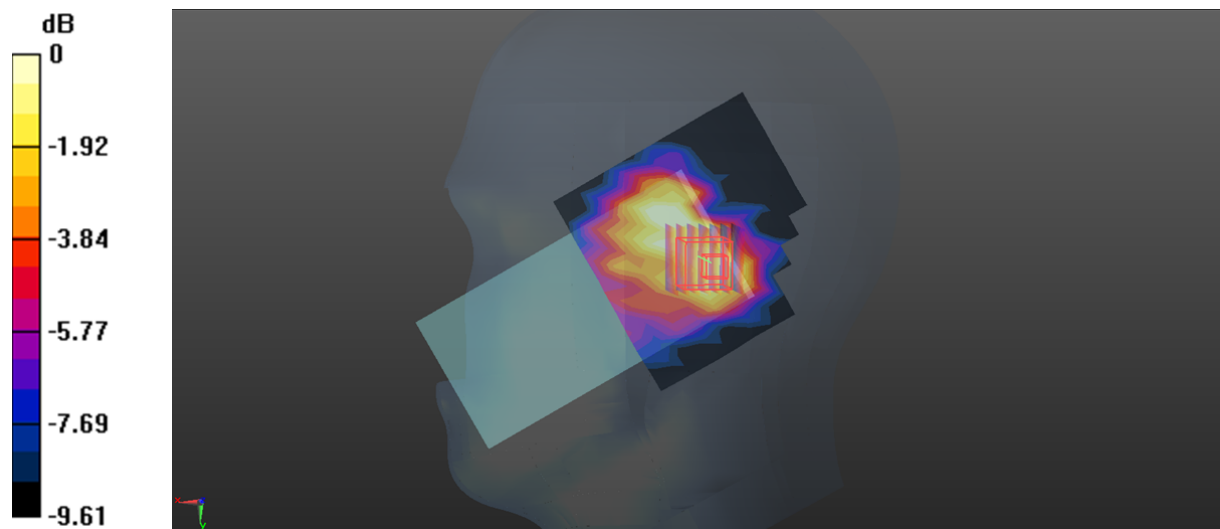

0 dB = 0.128 W/kg = -8.93 dBW/kg

Test Plot 142#:WLAN 2.4G_Body Front_Mid**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.855$ S/m; $\epsilon_r = 38.02$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @ 2437 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.192 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.073 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.148 W/kg

SAR(1 g) = 0.135 W/kg; SAR(10 g) = 0.097 W/kg

Maximum value of SAR (measured) = 0.144 W/kg

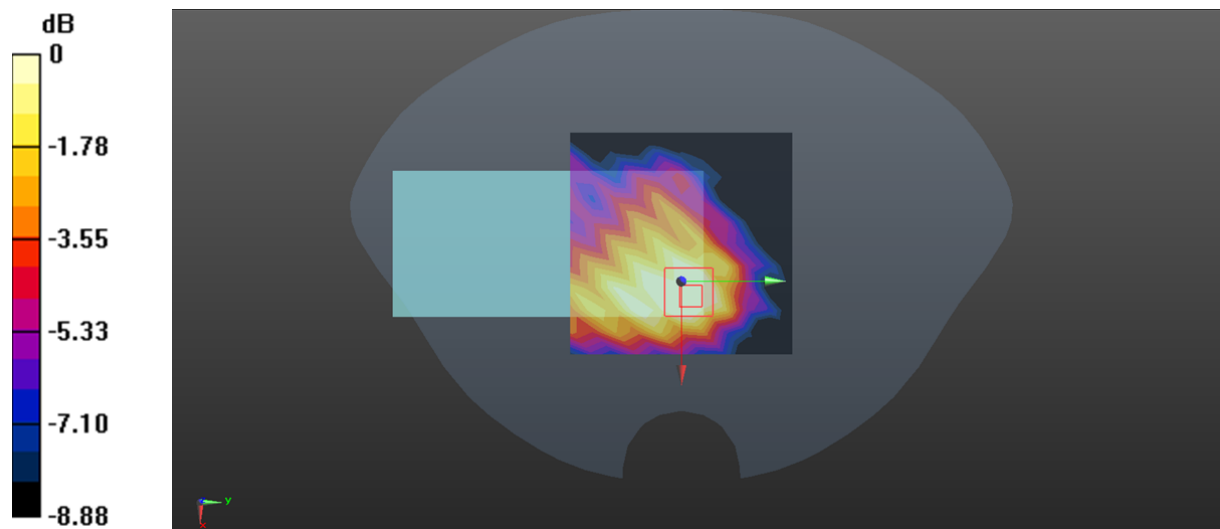

Test Plot 143#:WLAN 2.4G_Body Back_Mid**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.855$ S/m; $\epsilon_r = 38.02$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @ 2437 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.329 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.179 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.238 W/kg

SAR(1 g) = 0.209 W/kg; SAR(10 g) = 0.152 W/kg

Maximum value of SAR (measured) = 0.223 W/kg

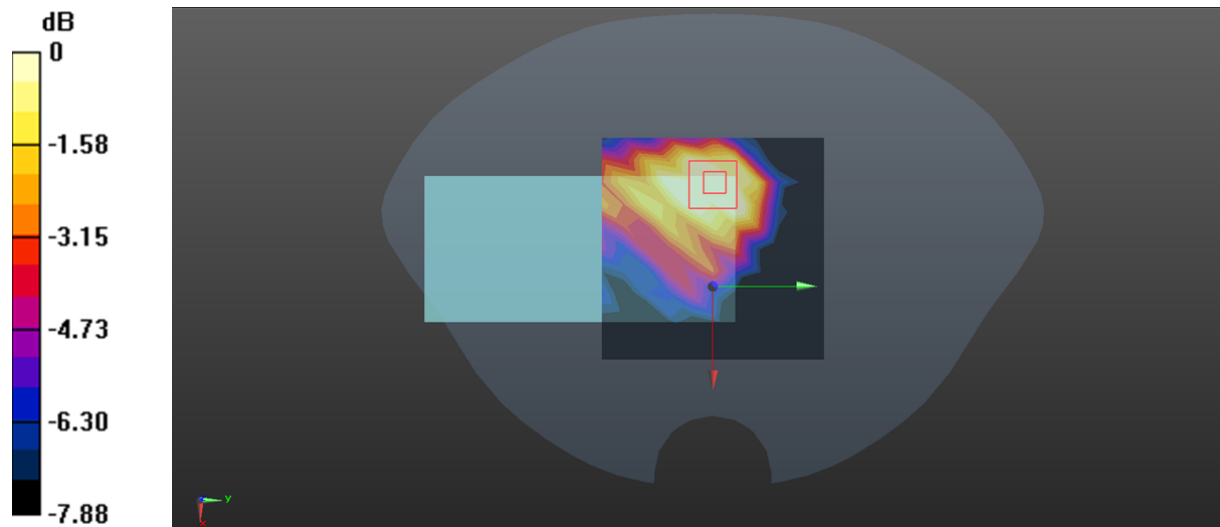

0 dB = 0.223 W/kg = -6.52 dBW/kg

Test Plot 144#:WLAN 2.4G_Body Right_Mid**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: 802.11b; Frequency: 2437 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.855$ S/m; $\epsilon_r = 38.02$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @ 2437 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.228 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.937 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.161 W/kg

SAR(1 g) = 0.148 W/kg; SAR(10 g) = 0.108 W/kg

Maximum value of SAR (measured) = 0.158 W/kg

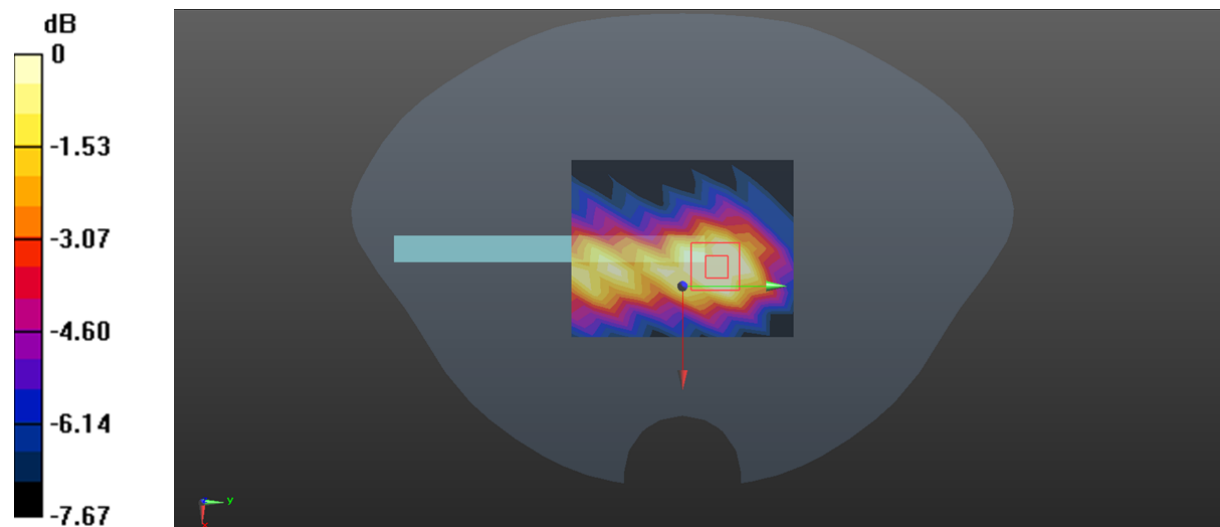

0 dB = 0.158 W/kg = -8.01 dBW/kg

Test Plot 145#: WLAN 2.4G_Body Top_Mid**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.855$ S/m; $\epsilon_r = 38.02$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @ 2437 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.118 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.377 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.0940 W/kg

SAR(1 g) = 0.085 W/kg; SAR(10 g) = 0.061 W/kg

Maximum value of SAR (measured) = 0.0904 W/kg

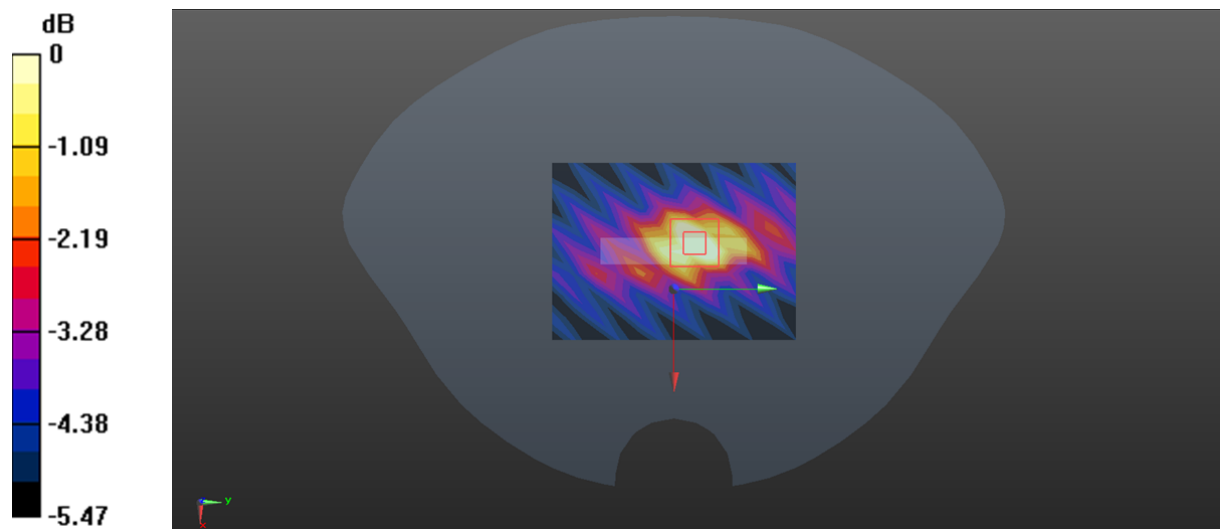

0 dB = 0.0904 W/kg = -10.44 dBW/kg

Test Plot 146#: WLAN 5.2G_Head Left Cheek_Mid**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: 802.11a; Frequency: 5200 MHz; Duty Cycle: 1:1.03

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.617$ S/m; $\epsilon_r = 35.307$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.36, 5.36, 5.36) @ 5200 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.955 W/kg


Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.859 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.524 W/kg; SAR(10 g) = 0.206 W/kg

Maximum value of SAR (measured) = 0.990 W/kg

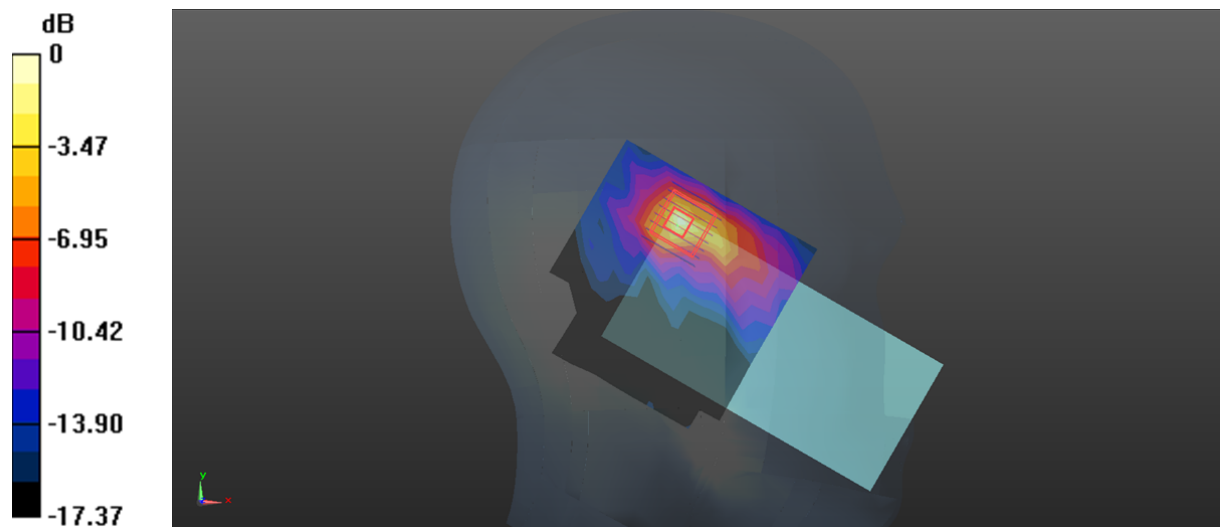

0 dB = 0.990 W/kg = -0.04 dBW/kg

Test Plot 147#:WLAN 5.2G_Head Left Tilt_Mid**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: 802.11a; Frequency: 5200 MHz;Duty Cycle: 1:1.03

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.617$ S/m; $\epsilon_r = 35.307$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.36, 5.36, 5.36) @ 5200 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.781 W/kg


Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.253 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.908 W/kg

SAR(1 g) = 0.512 W/kg; SAR(10 g) = 0.197 W/kg

Maximum value of SAR (measured) = 0.882 W/kg

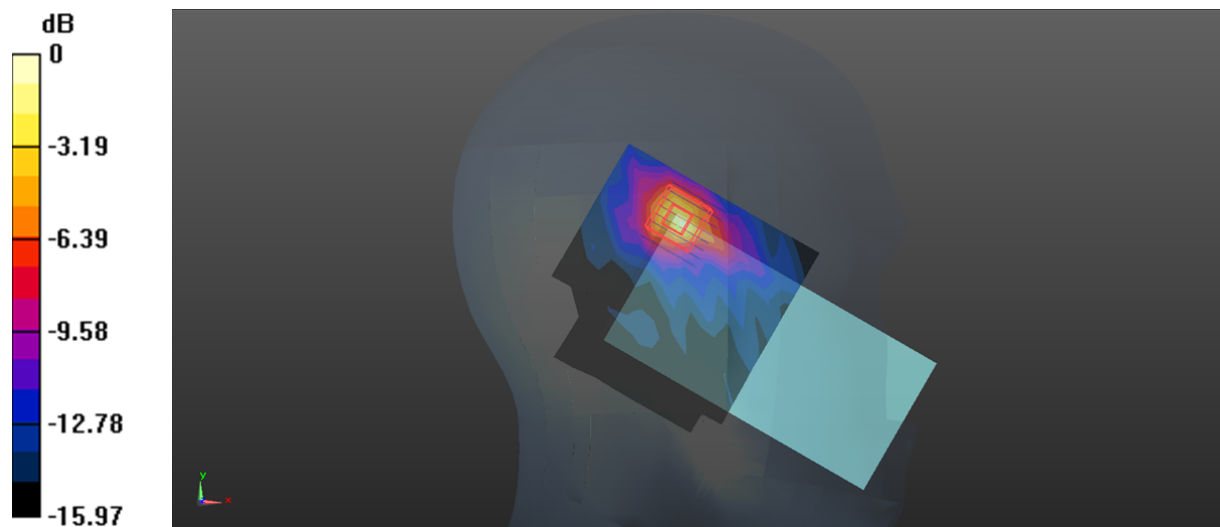

0 dB = 0.882 W/kg = -0.55 dBW/kg

Test Plot 148#:WLAN 5.2G_Head Right Cheek_Mid**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: 802.11a; Frequency: 5200 MHz;Duty Cycle: 1:1.03

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.617$ S/m; $\epsilon_r = 35.307$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.36, 5.36, 5.36) @ 5200 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.547 W/kg


Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.517 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.725 W/kg

SAR(1 g) = 0.404 W/kg; SAR(10 g) = 0.171 W/kg

Maximum value of SAR (measured) = 0.714 W/kg

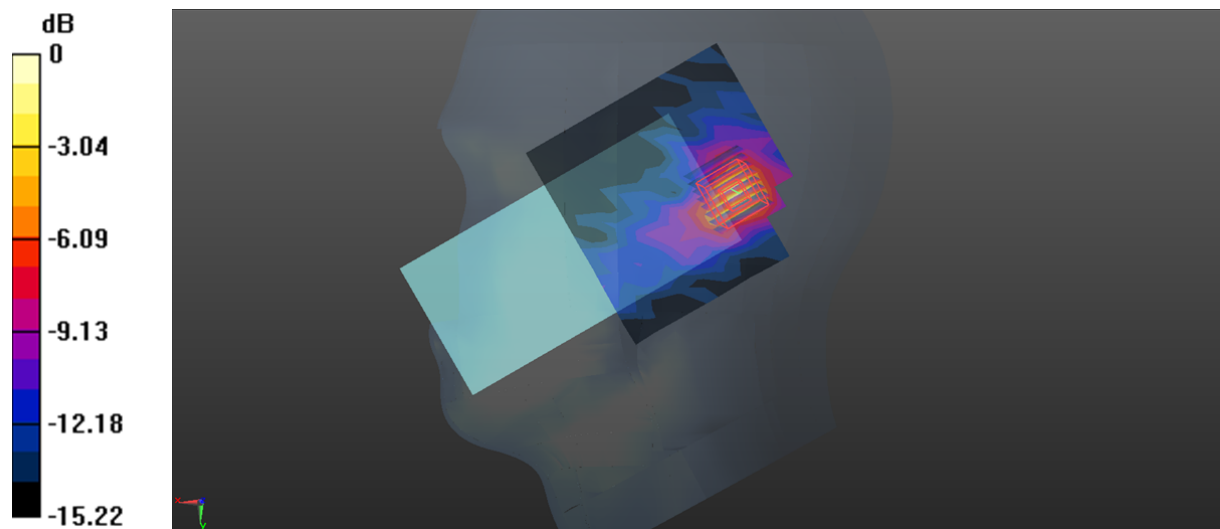

0 dB = 0.714 W/kg = -1.46 dBW/kg

Test Plot 149#:WLAN 5.2G_Head Right Tilt_Mid**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: 802.11a; Frequency: 5200 MHz;Duty Cycle: 1:1.03

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.617$ S/m; $\epsilon_r = 35.307$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.36, 5.36, 5.36) @ 5200 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.685 W/kg


Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.443 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.968 W/kg

SAR(1 g) = 0.506 W/kg; SAR(10 g) = 0.205 W/kg

Maximum value of SAR (measured) = 0.906 W/kg

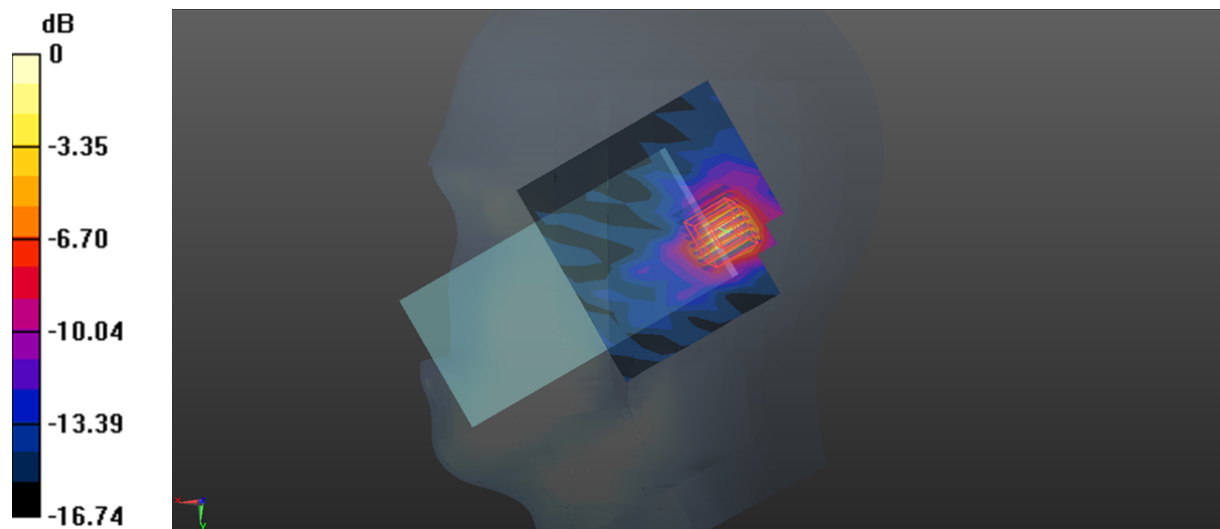

0 dB = 0.906 W/kg = -0.43 dBW/kg

Test Plot 150#:WLAN 5.2G_Body Front_Mid**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: 802.11a; Frequency: 5200 MHz; Duty Cycle: 1:1.03

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.617$ S/m; $\epsilon_r = 35.307$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.36, 5.36, 5.36) @ 5200 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.140 W/kg


Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.599 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.193 W/kg

SAR(1 g) = 0.118 W/kg; SAR(10 g) = 0.061 W/kg

Maximum value of SAR (measured) = 0.183 W/kg

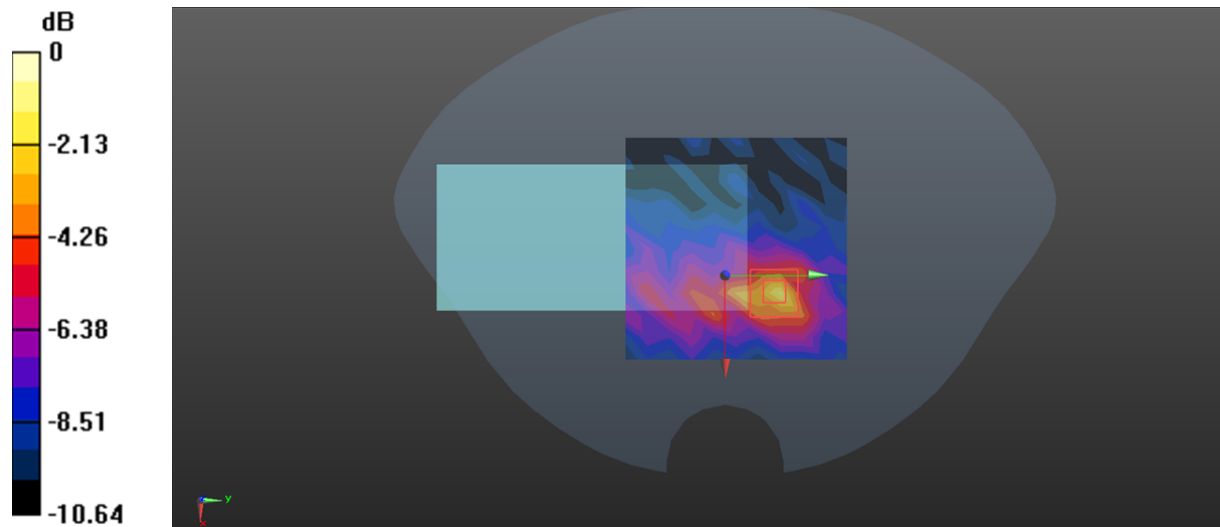

0 dB = 0.183 W/kg = -7.38 dBW/kg

Test Plot 151#:WLAN 5.2G_Body Back_Mid**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: 802.11a; Frequency: 5200 MHz; Duty Cycle: 1:1.03

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.617$ S/m; $\epsilon_r = 35.307$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.36, 5.36, 5.36) @ 5200 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.279 W/kg


Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.351 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.398 W/kg

SAR(1 g) = 0.233 W/kg; SAR(10 g) = 0.108 W/kg

Maximum value of SAR (measured) = 0.389 W/kg

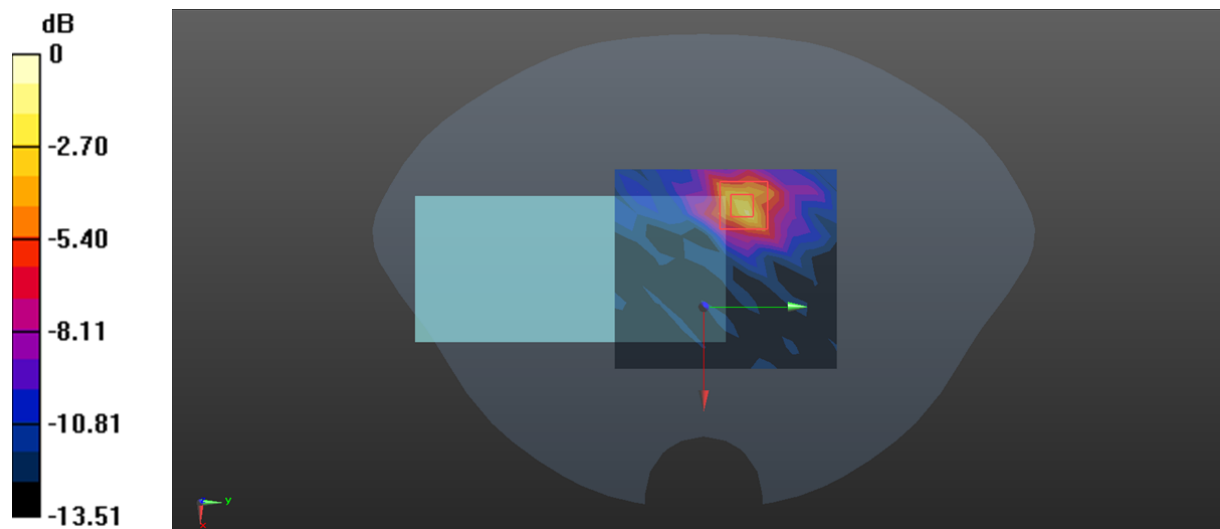

0 dB = 0.389 W/kg = -4.10 dBW/kg

Test Plot 152#:WLAN 5.2G_Body Right_Mid**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: 802.11a; Frequency: 5200 MHz;Duty Cycle: 1:1.03

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.617$ S/m; $\epsilon_r = 35.307$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.36, 5.36, 5.36) @ 5200 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.134 W/kg


Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.501 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.108 W/kg

SAR(1 g) = 0.081 W/kg; SAR(10 g) = 0.049 W/kg

Maximum value of SAR (measured) = 0.107 W/kg

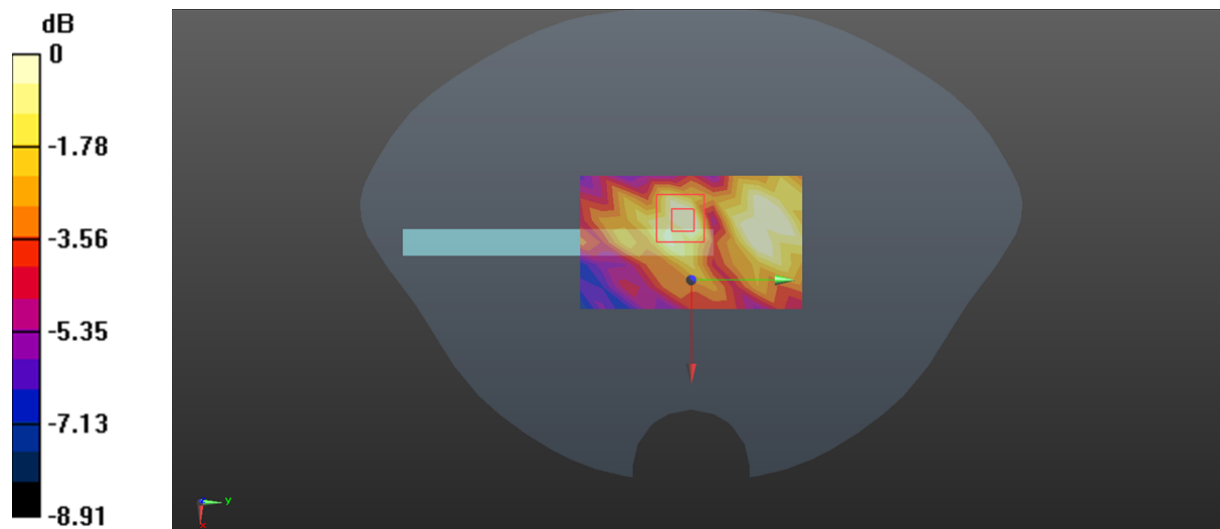

0 dB = 0.107 W/kg = -9.71 dBW/kg

Test Plot 153#:WLAN 5.2G_Body Top_Mid**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: 802.11a; Frequency: 5200 MHz; Duty Cycle: 1:1.03

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.617$ S/m; $\epsilon_r = 35.307$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.36, 5.36, 5.36) @ 5200 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.641 W/kg


Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.005 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.759 W/kg

SAR(1 g) = 0.427 W/kg; SAR(10 g) = 0.185 W/kg

Maximum value of SAR (measured) = 0.732 W/kg

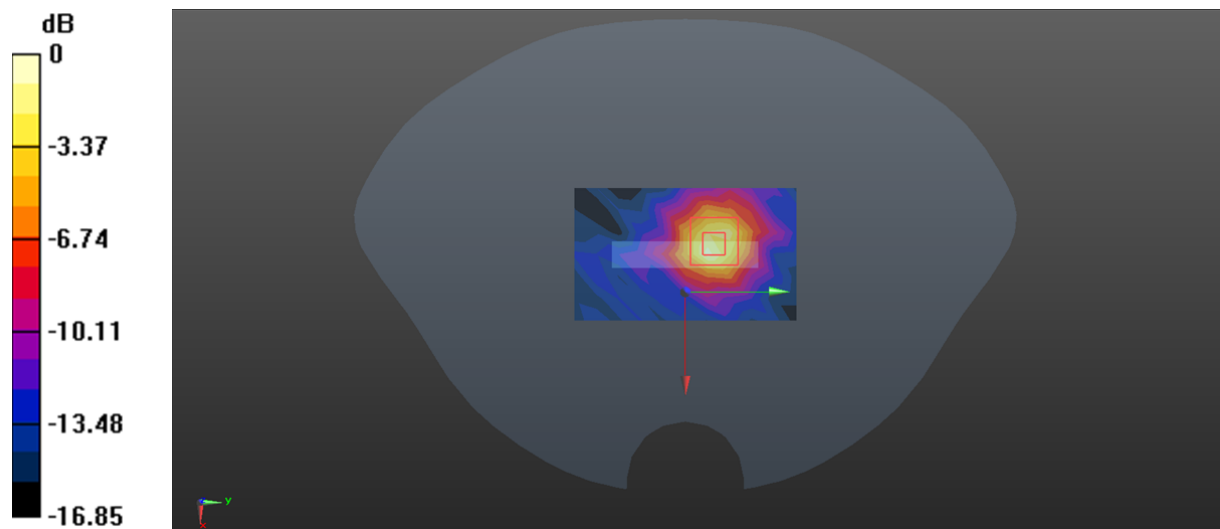

0 dB = 0.732 W/kg = -1.35 dBW/kg

Test Plot 154#:WLAN 5.3G_Head Left Cheek_Mid**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: 802.11 ac20; Frequency: 5280 MHz;Duty Cycle: 1:1.03

Medium parameters used: $f = 5280$ MHz; $\sigma = 4.789$ S/m; $\epsilon_r = 34.97$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.36, 5.36, 5.36) @ 5280 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.693 W/kg


Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.802 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.786 W/kg

SAR(1 g) = 0.453 W/kg; SAR(10 g) = 0.191 W/kg

Maximum value of SAR (measured) = 0.766 W/kg

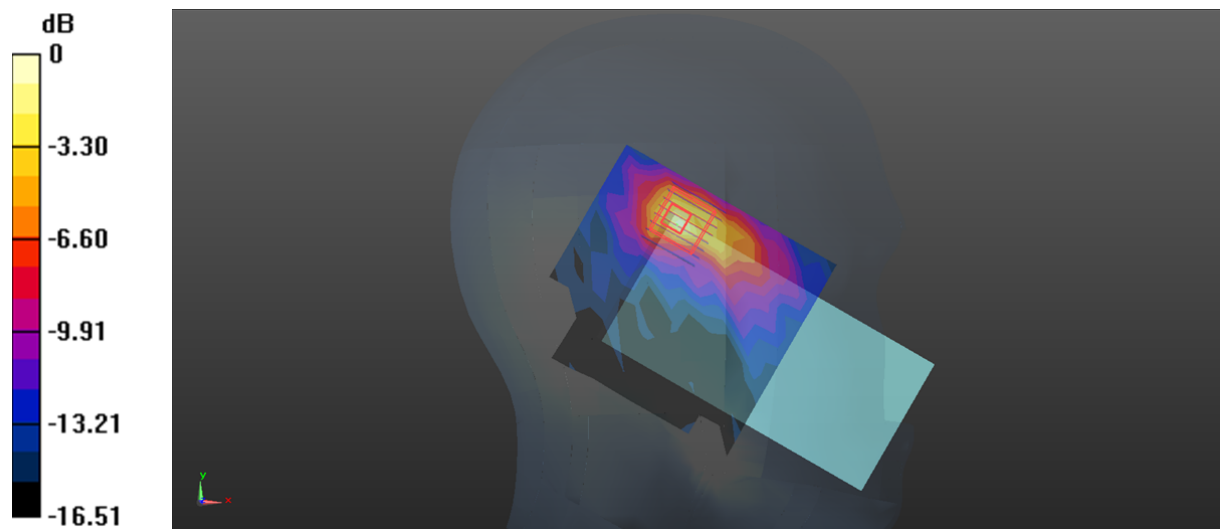

0 dB = 0.766 W/kg = -1.16 dBW/kg

Test Plot 155#:WLAN 5.3G_Head Left Tilt_Mid**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: 802.11 ac20; Frequency: 5280 MHz;Duty Cycle: 1:1.03

Medium parameters used: $f = 5280$ MHz; $\sigma = 4.789$ S/m; $\epsilon_r = 34.97$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.36, 5.36, 5.36) @ 5280 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.861 W/kg


Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.323 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.988 W/kg

SAR(1 g) = 0.534 W/kg; SAR(10 g) = 0.208 W/kg

Maximum value of SAR (measured) = 0.974 W/kg

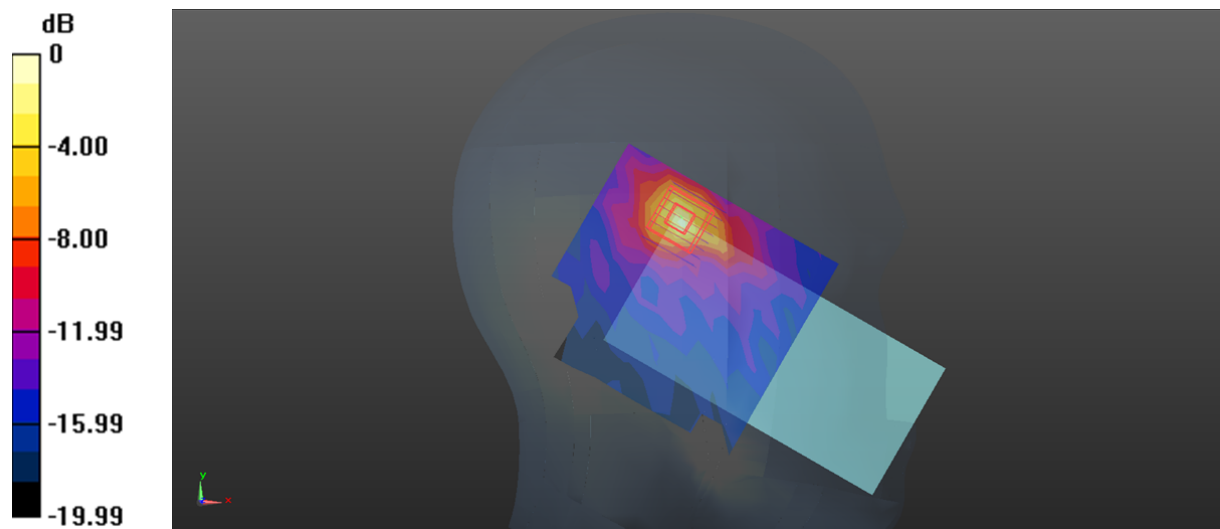

0 dB = 0.974 W/kg = -0.11 dBW/kg

Test Plot 156#:WLAN 5.3G_Head Right Cheek_Mid**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: 802.11 ac20; Frequency: 5280 MHz;Duty Cycle: 1:1.03

Medium parameters used: $f = 5280$ MHz; $\sigma = 4.789$ S/m; $\epsilon_r = 34.97$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.36, 5.36, 5.36) @ 5280 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.811 W/kg


Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.707 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.987 W/kg

SAR(1 g) = 0.548 W/kg; SAR(10 g) = 0.232 W/kg

Maximum value of SAR (measured) = 0.961 W/kg

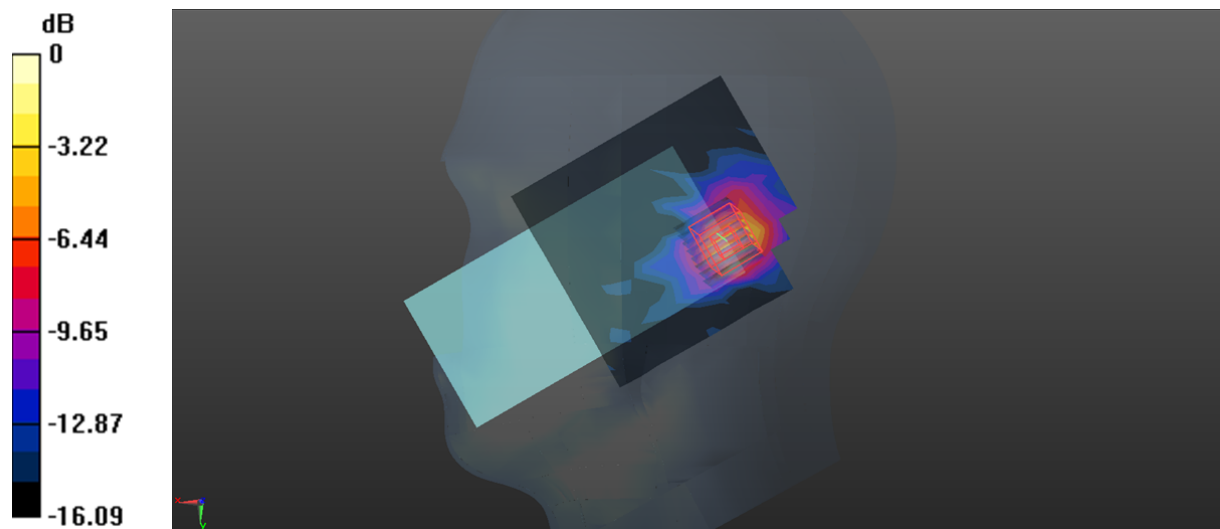

0 dB = 0.961 W/kg = -0.17 dBW/kg

Test Plot 157#:WLAN 5.3G_Head Right Tilt_Mid**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: 802.11 ac20; Frequency: 5280 MHz;Duty Cycle: 1:1.03

Medium parameters used: $f = 5280$ MHz; $\sigma = 4.789$ S/m; $\epsilon_r = 34.97$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.36, 5.36, 5.36) @ 5280 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.514 W/kg


Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.680 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.545 W/kg

SAR(1 g) = 0.325 W/kg; SAR(10 g) = 0.140 W/kg

Maximum value of SAR (measured) = 0.545 W/kg

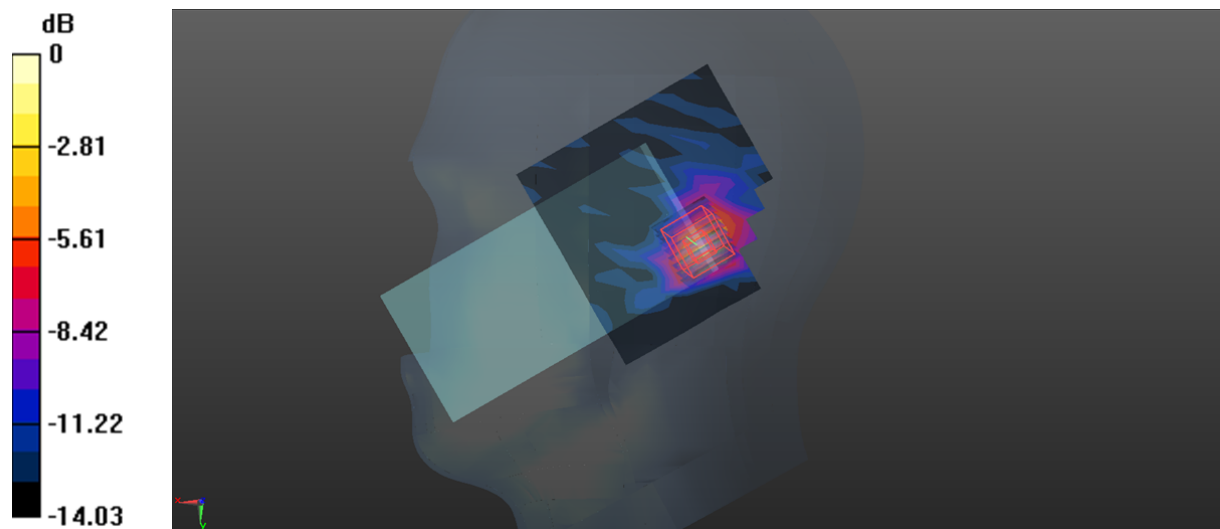

0 dB = 0.545 W/kg = -2.64 dBW/kg

Test Plot 158#:WLAN 5.3G_Body Front_Mid**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: 802.11 ac20; Frequency: 5280 MHz;Duty Cycle: 1:1.03

Medium parameters used: $f = 5280$ MHz; $\sigma = 4.789$ S/m; $\epsilon_r = 34.97$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.36, 5.36, 5.36) @ 5280 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.133 W/kg


Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.340 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.158 W/kg

SAR(1 g) = 0.098 W/kg; SAR(10 g) = 0.054 W/kg

Maximum value of SAR (measured) = 0.158 W/kg

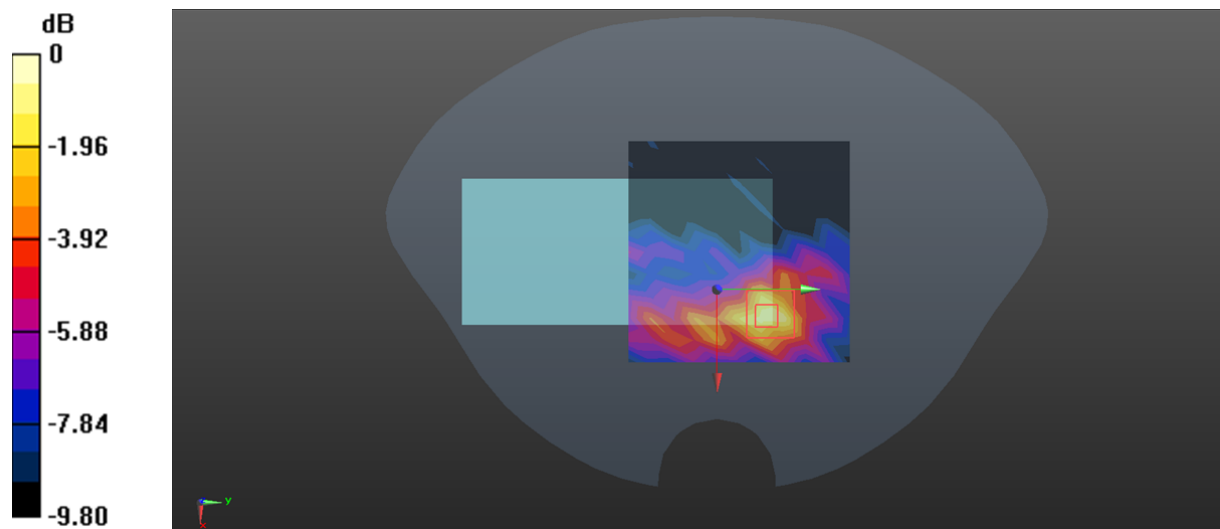

0 dB = 0.158 W/kg = -8.01 dBW/kg

Test Plot 159#:WLAN 5.3G_Body Back_Mid**DUT: Mobile Phone; Type: LZX408; Serial: 27XM-1**

Communication System: 802.11 ac20; Frequency: 5280 MHz;Duty Cycle: 1:1.03

Medium parameters used: $f = 5280$ MHz; $\sigma = 4.789$ S/m; $\epsilon_r = 34.97$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.36, 5.36, 5.36) @ 5280 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2022/10/31
- Phantom: Twin SAM V5.0; Type:QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.297 W/kg


Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.408 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.365 W/kg

SAR(1 g) = 0.217 W/kg; SAR(10 g) = 0.109 W/kg

Maximum value of SAR (measured) = 0.359 W/kg

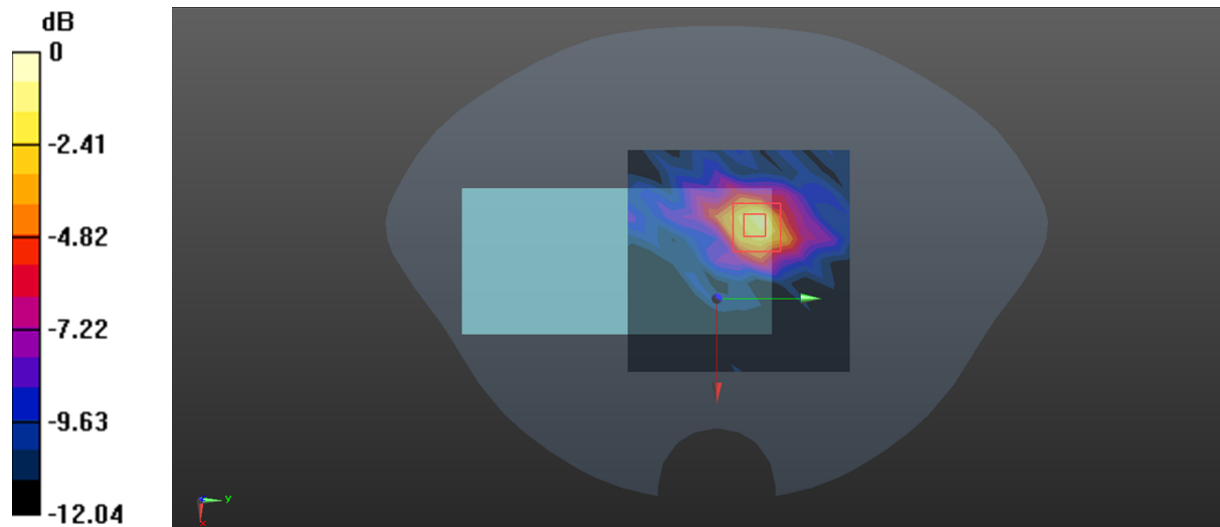

0 dB = 0.359 W/kg = -4.45 dBW/kg