

FCC PART 15C TEST REPORT FOR CERTIFICATION  
On Behalf of

TCL OVERSEAS MARKETING LTD

2.1 CH Sound Bar with Wireless Subwoofer

Model Number: TS6110

Additional Model: TDS6110, Alto 6+, \*\*\*6110

FCC ID: 2ARUDTS6110

Prepared for:	TCL OVERSEAS MARKETING LTD
	7/F, building 22E, 22 science park east avenue, Hong Kong science park,
	SHATIN, N.T.Hong kong 999077 China
Prepared By:	EST Technology Co., Ltd.
	Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
	Tel: 86-769-83081888-808

Report Number:	ESTE-R2007113
Date of Test:	Jun. 29~Jul. 28, 2020
Date of Report:	Jul. 29, 2020

# TABLE OF CONTENTS

Description	Page
TEST REPORT VERIFICATION .....	3
1. GENERAL INFORMATION.....	5
1.1. Description of Device (EUT) .....	5
1.2. Antenna Information .....	5
2. SUMMARY OF TEST .....	6
2.1. Summary of test result.....	6
2.2. Test Facilities.....	7
2.3. Measurement uncertainty .....	8
2.4. Assistant equipment used for test.....	8
2.5. Block Diagram.....	8
2.6. Test Mode.....	9
2.7. Power Setting of Test Software .....	9
2.8. Duty Cycle.....	10
2.9. Channel List.....	11
2.10. Test Equipment List .....	12
3. 6DB BANDWIDTH .....	13
3.1. Limit .....	13
3.2. Test Setup .....	13
3.3. Spectrum Analyzer Setting.....	13
3.4. Test Procedure .....	13
3.5. Test Result .....	14
4. MAXIMUM PEAK OUTPUT POWER .....	17
4.1. Limit .....	17
4.2. Test Setup .....	17
4.3. Spectrum Analyzer Setting.....	17
4.4. Test Procedure .....	17
4.5. Test Result .....	18
5. POWER SPECTRAL DENSITY.....	20
5.1. Limit .....	20
5.2. Test Setup .....	20
5.3. Spectrum Analyzer Setting.....	20
5.4. Test Procedure .....	20
5.5. Test Result .....	21
6. CONDUCTED BAND EDGE .....	23
6.1. Limit .....	23
6.2. Test Setup .....	23
6.3. Spectrum Analyzer Setting.....	23
6.4. Test Procedure .....	23
Test Result.....	24
7. CONDUCTED SPURIOUS EMISSIONS .....	25
7.1. Limit .....	25
7.2. Test Setup .....	25
7.3. Spectrum Analyzer Setting.....	25
7.4. Test Procedure .....	25

7.5. Test Result ..... 26

8. RADIATED SPURIOUS EMISSIONS AND BAND EDGE ..... 28

8.1. Limit ..... 28

8.2. Test setup ..... 29

8.3. Spectrum Analyzer Setting ..... 30

8.4. Test Procedure ..... 31

8.5. Test Result ..... 32

9. AC POWER LINE CONDUCTED EMISSIONS ..... 44

9.1. Limit ..... 44

9.2. Test Setup ..... 44

9.3. Spectrum Analyzer Setting ..... 44

9.4. Test Procedure ..... 44

9.5. Test Result ..... 45

10. ANTENNA REQUIREMENTS ..... 49

10.1. Limit ..... 49





10.2. Test Result ..... 49

11. TEST SETUP PHOTO ..... 50

12. EUT PHOTO ..... 52



## EST Technology Co., Ltd.

<b>Applicant:</b>	TCL Entertainment Solutions Limited		
<b>Address:</b>	7/F, building 22E, 22 science park east avenue, Hong Kong science park, SHATIN, N.T.Hong kong 999077 China		
<b>Manufacturer:</b>	TCL Entertainment Solutions Limited		
<b>Address:</b>	7/F, building 22E, 22 science park east avenue, Hong Kong science park, SHATIN, N.T.Hong kong 999077 China		
<b>Factory:</b>	Guangzhou Panyu Juda Car Audio Equipment Co., Ltd.		
<b>Address:</b>	NO.5 Building, No. 139, Zhouxing Street, Dongchong Town, Nansha District, Guangzhou City, Guangdong Province, China		
<b>E.U.T:</b>	2.1 CH Sound Bar with Wireless Subwoofer		
<b>Model Number:</b>	TS6110		
<b>Additional Model:</b>	TDS6110, Alto 6+, ***6110 (“*” can be any alphanumeric character including blank for marketing different) Note: They are identical except model name only.		
<b>Power Supply:</b>	AC 100-240V, 50/60Hz, 25W		
<b>Trade Name:</b>	TCL	<b>Serial No.:</b>	-----
<b>Date of Receipt:</b>	Jun. 29, 2020	<b>Date of Test:</b>	Jun. 29~Jul. 28, 2020
<b>Test Specification:</b>	FCC Part 15 Subpart C (15.247) ANSI C63.10:2013 FCC KDB 558074 D01 15.247 Meas Guidance v05r02 FCC KDB 662911 D01 Multiple Transmitter Output v02r01		
<b>Test Result:</b>	The device described above is tested by EST Technology Co., Ltd. The measurement results were contained in this test report and EST Technology Co., Ltd. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliance with the FCC Rules and Regulations Part 15 Subpart C requirements.  This report applies to above tested sample only and shall not be reproduced in part without written approval of EST Technology Co., Ltd.		
<b>Prepared by:</b>	<b>Reviewed by:</b>	<b>Date:</b> Jul. 29, 2020	
 _____ Ring Yang / Assistant	 _____ Seven Wang / Engineer	<b>Approved by:</b>  _____ Iceman Hu / Manager	
			
<b>Other Aspects:</b>	None.		
Abbreviations: OK/P=passed    fail/F=failed    n.a/N=not applicable    E.U.T=equipment under tested			
This test report is based on a single evaluation of one sample of above mentioned products ,It is not permitted to be duplicated in extracts without written approval of EST Technology Co., Ltd.			

## 1. GENERAL INFORMATION

### 1.1. Description of Device (EUT)

Product Name	:	2.1 CH Sound Bar with Wireless Subwoofer
Model Number	:	TS6110
Software Version	:	N/A
Hardware Version	:	N/A
Operation frequency	:	2405MHz~2477MHz
Number of channel	:	37
Max Output Power (PEAK)	:	2.68dBm
Modulation Type	:	FSK
Sample Type	:	Prototype production

Note:

For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

### 1.2. Antenna Information

Ant No.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	Internal antenna	N/A	0



## 2. SUMMARY OF TEST

### 2.1. Summary of test result

Report Section	Description of Test Item	FCC Standard Section	Results
3	6dB Bandwidth	15.247(a)(2)	PASS
4	Maximum Peak Output Power	15.247(b)(3)	PASS
5	Power Spectral Density	15.247(e)	PASS
6	Conducted Band Edge	15.247(d)	PASS
7	Conducted Spurious Emissions	15.247(d)	PASS
8	Radiated Spurious Emissions and Band Edge	15.205 15.209 15.247(d)	PASS
9	AC Power Line Conducted Emissions	15.207	PASS
10	Antenna Requirement	15.203	PASS

Note:

(1) "N/A" denotes test is not applicable in this test report

## 2.2. Test Facilities

EMC Lab : Certificated by CNAS, CHINA  
Registration No.: L5288  
This Certificate is valid until: November 12, 2023

Certificated by FCC, USA  
Designation Number: CN1215  
This Certificate is valid until: January 31, 2022

Certificated by A2LA, USA  
Registration No.: 4366.01  
This Certificate is valid until: January 31, 2022

Certificated by Industry Canada  
CAB identifier No.: CN0035  
This Certificate is valid until: January 31, 2022

Certificated by VCCI, Japan  
Registration No.:C-14103; T-20073; R-13663;  
R-20103; G-20097  
Date of registration: Apr. 20, 2020  
This Certificate is valid until: Apr. 19, 2023

Certificated by TUV Rheinland, Germany  
Registration No.: UA 50413872 0001  
Date of registration: July 31, 2018

Certificated by Intertek  
Registration No.: 2011-RTL-L2-64  
Date of registration: November 08, 2018

Name of Firm : EST Technology Co., Ltd.

Site Location : Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China

### 2.3. Measurement uncertainty

Test Item	Uncertainty
Uncertainty for Conduction emission test	±3.48dB
Uncertainty for spurious emissions test (30MHz-1GHz)	±4.60 dB(Polarize: H)
	±4.68 dB(Polarize: V)
Uncertainty for spurious emissions test (1GHz to 25GHz)	±4.96dB
Uncertainty for radio frequency	$7 \times 10^{-8}$
Uncertainty for conducted RF Power	0.20dB
Uncertainty for Power density test	0.26dB

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.


### 2.4. Assistant equipment used for test

Item	Equipment	Brand	Model Name/Type No.	FCC ID	Series No.
-	N/A	N/A	N/A	N/A	N/A

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	1.5m	AC Cable

### 2.5. Block Diagram

For radiated emissions test: EUT was placed on a turn table, which is 0.8 (or 1.5) meter high above ground. EUT was beset into 2.4G WIFI test mode by software before test.



(EUT: 2.1 CH Sound Bar with Wireless Subwoofer)



## 2.6. Test Mode

The test mode was selected for the final test as listed below.

Test Item	Mode	Test Channel
6dB Bandwidth	FSK	Low/Middle/High
Maximum Peak Output Power	FSK	Low/Middle/High
Power Spectral Density	FSK	Low/Middle/High
Conducted Band Edge	FSK	Low/Middle/High
Conducted Spurious Emissions	FSK	Low/Middle/High
Radiated Spurious Emissions(Below 1GHz)	FSK	Low/Middle/High
Radiated Spurious Emissions(Above 1GHz)	FSK	Low/Middle/High
Radiated Band Edge	FSK	Low/Middle/High
AC Power Line Conducted Emissions	FSK	Low/Middle/High

Note:

1. In radiated measurement, the EUT had been pre-scan on the positioned of each 3 axis(X,Y,Z), the worst case was found when positioned on **X-plane**.

## 2.7. Power Setting of Test Software


Software Name	EMI_Tool_CTModule_2.4G_V10_2020_06_22		
Frequency ( MHz )	2405	2439	2477
Setting	2	2	2

## 2.8. Duty Cycle

Temperature	27°C	Relative Humidity	55%	Test Voltage	120V/60Hz
Mode	Fre(MHz)	On time(ms)	Total Time(ms)	Duty Cycle	Duty Factor
FSK	2439	1	1	100.00	0.00

Note:

1. If duty cycle <98 %, the conducted average output power and average power spectral density should be add duty factor.
2. If duty cycle  $\geq 98$  %,the EUT is consider to be transmitting continuously,the conducted average output power and average power spectral density no need to add duty factor(consider to be zero).
3. The conducted peak output power and peak power spectral density no need to consider duty factor.
4. The on-time time is transmission duration(T).

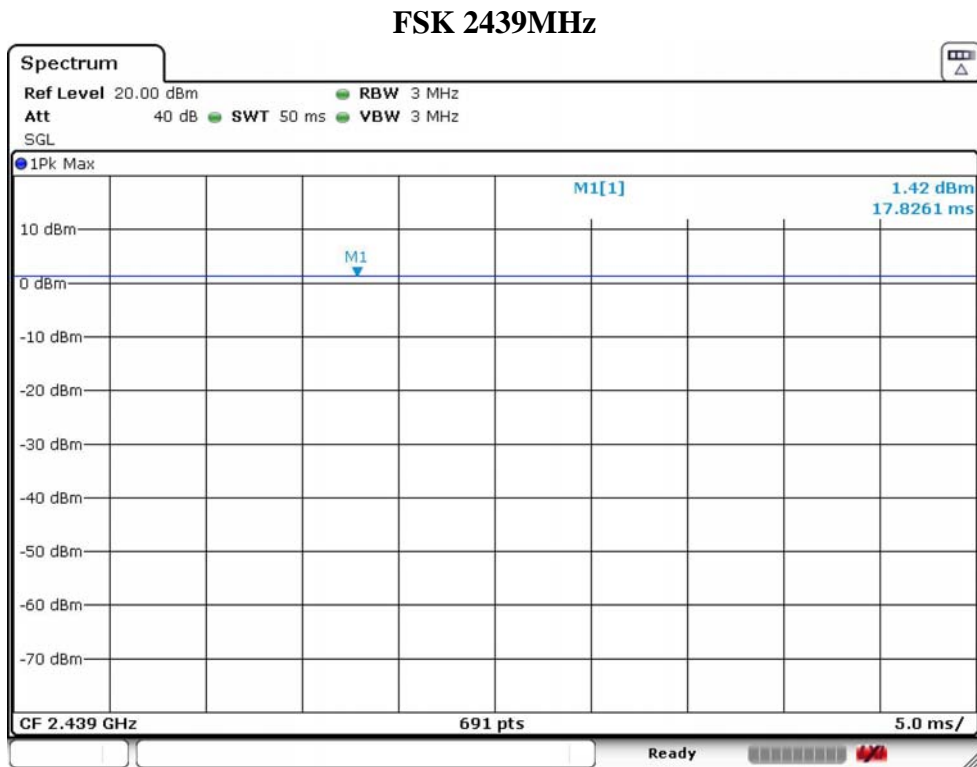

2.9. Channel List

FSK					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2405	16	2435	31	2465
2	2407	17	2437	32	2467
3	2409	18	2439	33	2469
4	2411	19	2441	34	2471
5	2413	20	2443	35	2473
6	2415	21	2445	36	2475
7	2417	22	2447	37	2477
8	2419	23	2449		
9	2421	24	2451		
10	2423	25	2453		
11	2425	26	2455		
12	2427	27	2457		
13	2429	28	2459		
14	2431	29	2461		
15	2433	30	2463		

## 2.10. Test Equipment List

For conducted emission test						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESHS30	EST-E001	LISAI	June 13,20	1 Year
Artificial Mains Network	Rohde & Schwarz	ENV216	EST-E002	LISAI	June 13,20	1 Year
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	EST-E078	LISAI	June 13,20	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A

For radiated emission test(9kHz-30MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR7	EST-E047	LISAI	June 13,20	1 Year
Active Loop Antenna	SCHWARZB ECK	FMZB 1519B	EST-E054	LISAI	June 13,20	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
9kHz-30MHz Cable	N/A	EST-001	N/A	N/A	N/A	N/A

For radiated emissions test (30MHz-1000MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR7	EST-E047	LISAI	June 13,20	1 Year
Bilog Antenna	Teseq	CBL 6111D	EST-E034	LISAI	June 13,20	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
30-1000MHz Cable	N/A	EST-002	N/A	N/A	N/A	N/A

For radiated emission test(Above 1000MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
Horn Antenna	SCHWARZB ECK	BBHA9120D	EST-E031	LISAI	June 13,20	1 Year
Signal Amplifier	SCHWARZB ECK	BBV9718	EST-E032	LISAI	June 13,20	1 Year
Spectrum Analyzer	Rohde & Schwarz	FSV40	EST-E069	LISAI	June 13,20	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
Above 1GHz Cable	N/A	EST-003	N/A	N/A	N/A	N/A


For connect EUT antenna terminal test						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
Spectrum Analyzer	Rohde&Schwarz	FSV40	EST-E069	LISAI	June 13,20	1 Year

### 3. 6dB BANDWIDTH

#### 3.1. Limit

Systems using digital modulation techniques operate in the 2400-2483.5 MHz, the minimum 6 dB bandwidth shall be at least 500 kHz.

#### 3.2. Test Setup

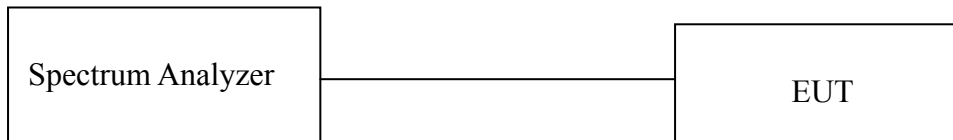

#### 3.3. Spectrum Analyzer Setting

6dB Bandwidth

Spectrum Parameters	Setting
RBW	100KHz
VBW	300KHz
Span	40MHz(20MHz Bandwidth mode)/80MHz(40MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

99% Occupied Bandwidth

Spectrum Parameters	Setting
RBW	300KHz(20MHz Bandwidth mode)/1MHz(40MHz Bandwidth mode)
VBW	1MHz(20MHz Bandwidth mode)/3MHz(40MHz Bandwidth mode)
Span	40MHz(20MHz Bandwidth mode)/80MHz(40MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

#### 3.4. Test Procedure


- a. Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- b. Spectrum analyzer setting parameters in accordance with section 3.3.
- c. Set the EUT transmit continuously with maximum output power.
- d. Allow trace to stabilize, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
- e. Repeat above procedures until all modes and channels were measured.
- f. Record the results in the test report.




## 3.5. Test Result

Temperature	27°C	Relative Humidity	55%	
Test Voltage	120V/60Hz			
Mode	Freq (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
FSK	2405	1.0710	$\geq 0.5$	PASS
	2439	1.0710	$\geq 0.5$	PASS
	2477	1.4040	$\geq 0.5$	PASS


### FSK 2405 MHz

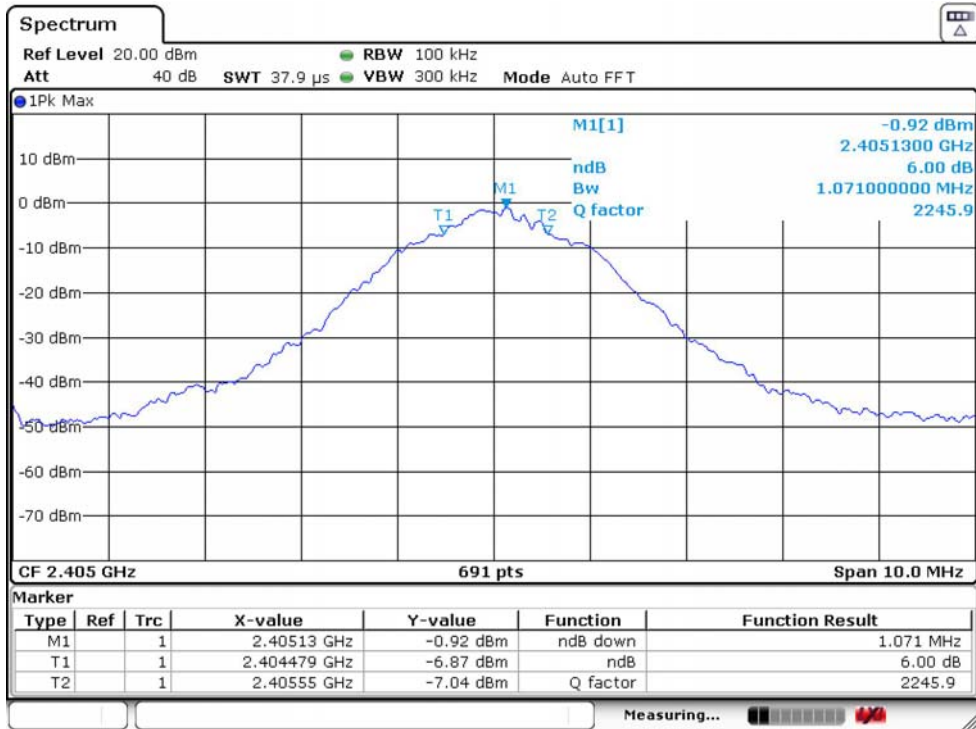

### FSK 2439 MHz

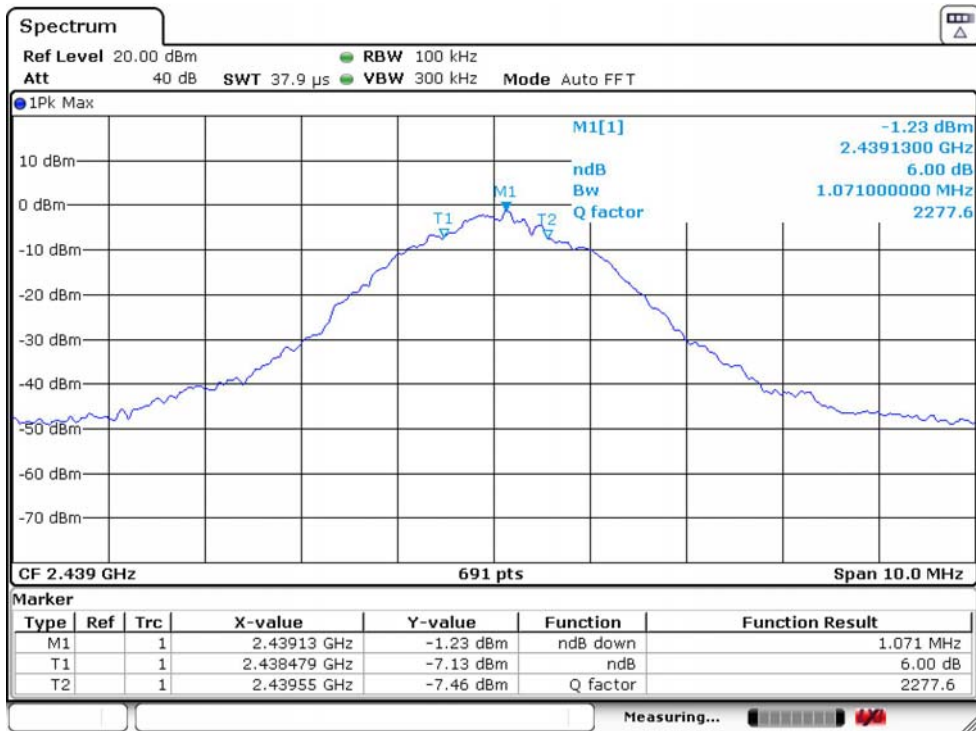

### FSK 2477 MHz

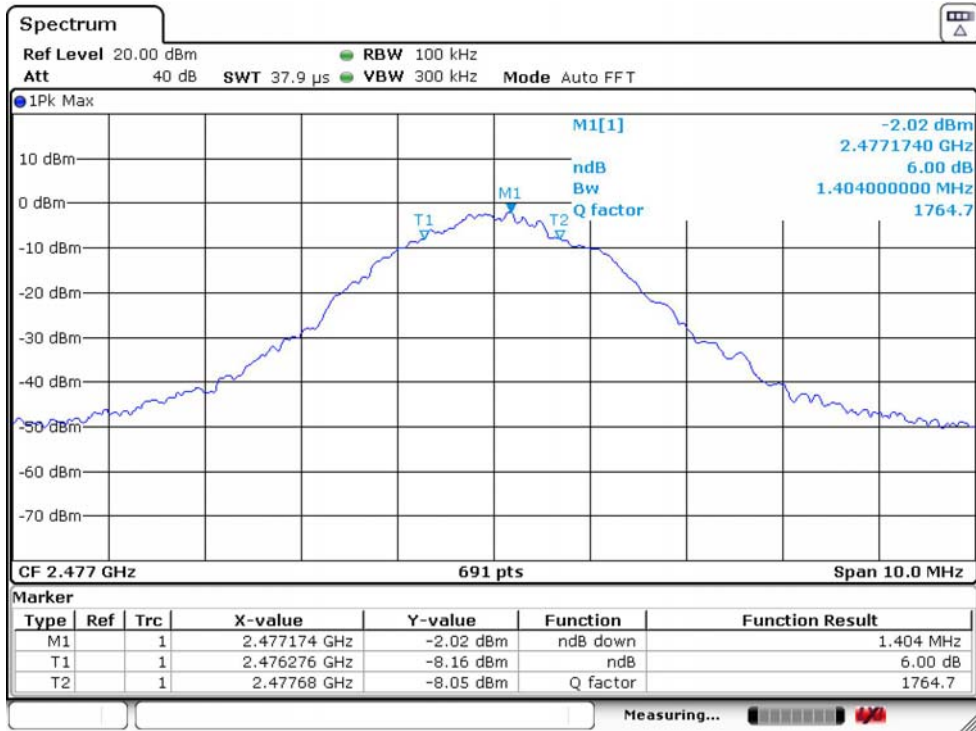

## 4. MAXIMUM PEAK OUTPUT POWER

### 4.1. Limit

For systems using digital modulation in 2400-2483.5MHz, the maximum peak output power is 1 Watt(30dBm).

### 4.2. Test Setup



### 4.3. Spectrum Analyzer Setting


Spectrum Parameters	Setting
RBW	3MHz
VBW	10MHz
Span	10MHz
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

### 4.4. Test Procedure

- a. Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- b. Spectrum analyzer setting parameters in accordance with section 4.3.
- c. Set the EUT transmit continuously with maximum output power.
- d. Use the channel power function to measure maximum peak output power, allow trace to stabilize, save test pictures.
- e. Repeat above procedures until all modes and channels were measured.
- f. Record the results in the test report.


### 4.5. Test Result

Temperature	27°C	Relative Humidity	55%	Test Voltage	120V/60Hz	
Mode	Freq (MHz)	Peak Output Power		Limit		Result
		dBm	W	dBm	W	
FSK	2405	3.72	0.00236	30.00	1.0000	PASS
	2439	3.71	0.00235	30.00	1.0000	PASS
	2477	3.42	0.00220	30.00	1.0000	PASS

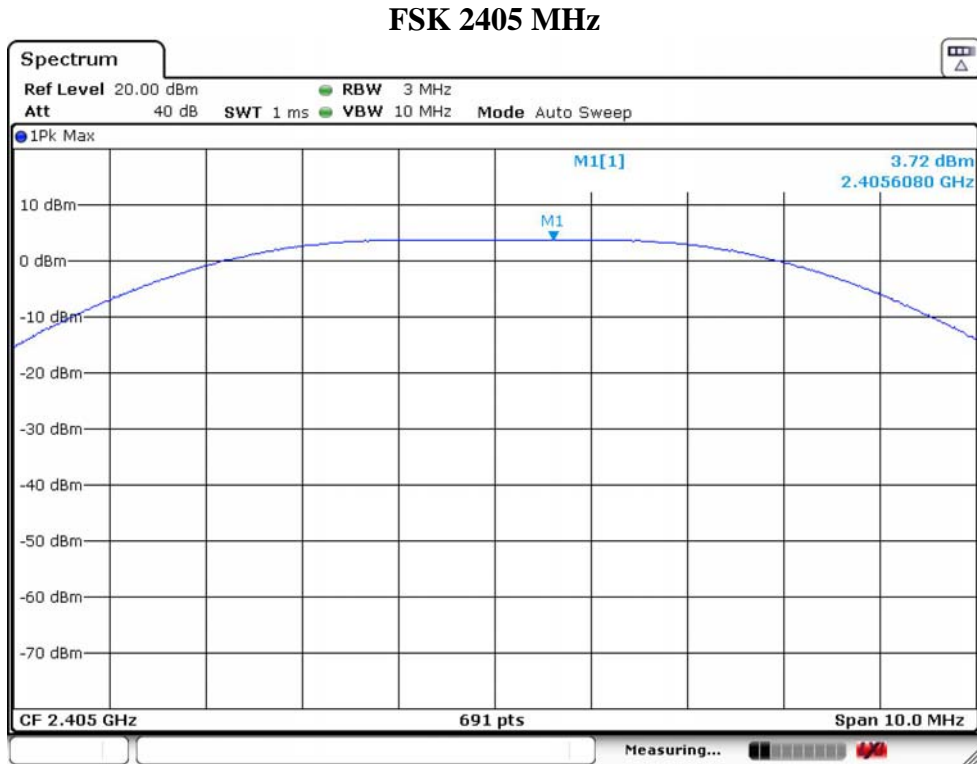




### FSK 2439 MHz

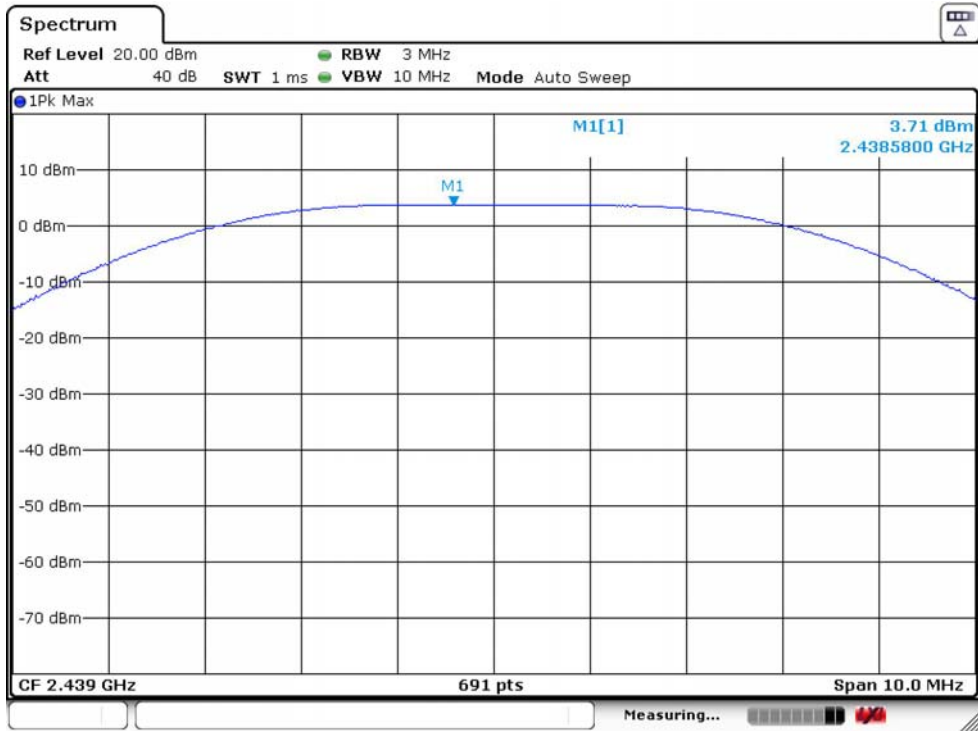

### FSK 2477 MHz

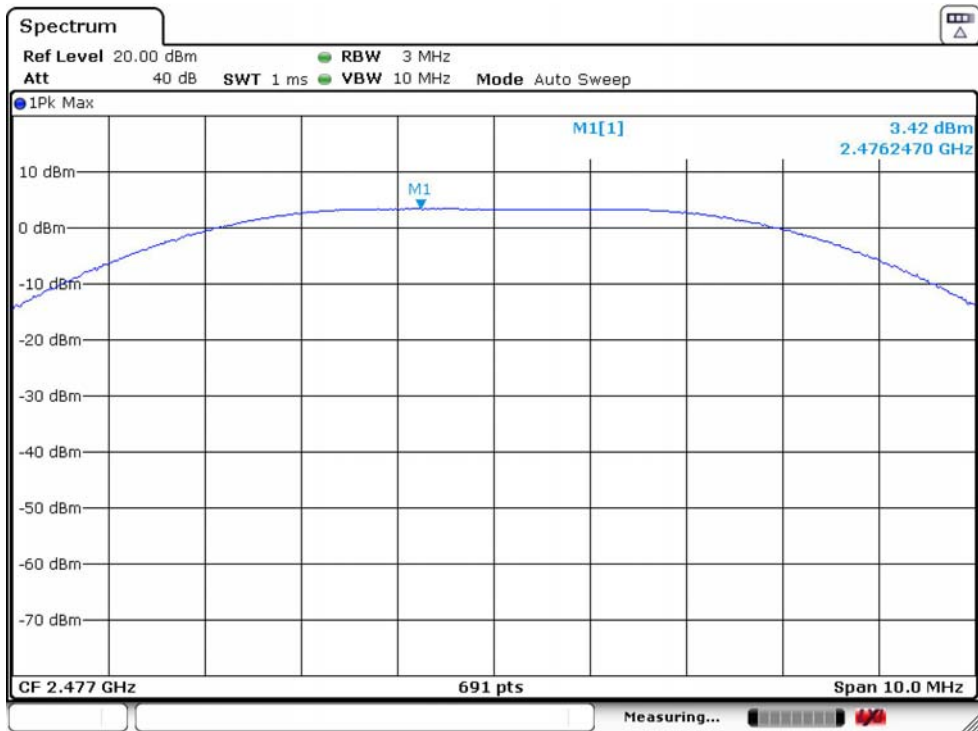


## 5. POWER SPECTRAL DENSITY

### 5.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 5.2. Test Setup

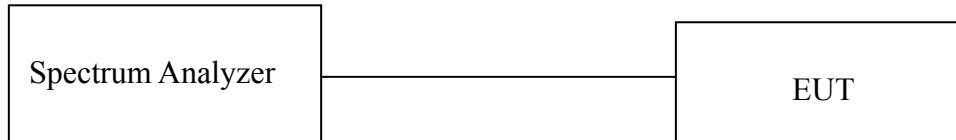

### 5.3. Spectrum Analyzer Setting


Spectrum Parameters	Setting
RBW	3KHz
VBW	10KHz
Span	30MHz(20MHz Bandwidth mode)/60MHz(40MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

### 5.4. Test Procedure


- a. Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- b. Spectrum analyzer setting parameters in accordance with section 5.3.
- c. Set the EUT transmit continuously with maximum output power.
- d. Allow trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission.
- e. Repeat above procedures until all modes and channels were measured.
- f. Record the results in the test report.

### 5.5. Test Result


Temperature	27°C	Relative Humidity	55%	Test Voltage	120V/60Hz
Mode	Freq (MHz)	Power Density (dBm/3KHz)	Limit (dBm/3KHz)	Result	
FSK	2405	-12.26	8.00	PASS	
	2439	-13.03	8.00	PASS	
	2477	-13.48	8.00	PASS	

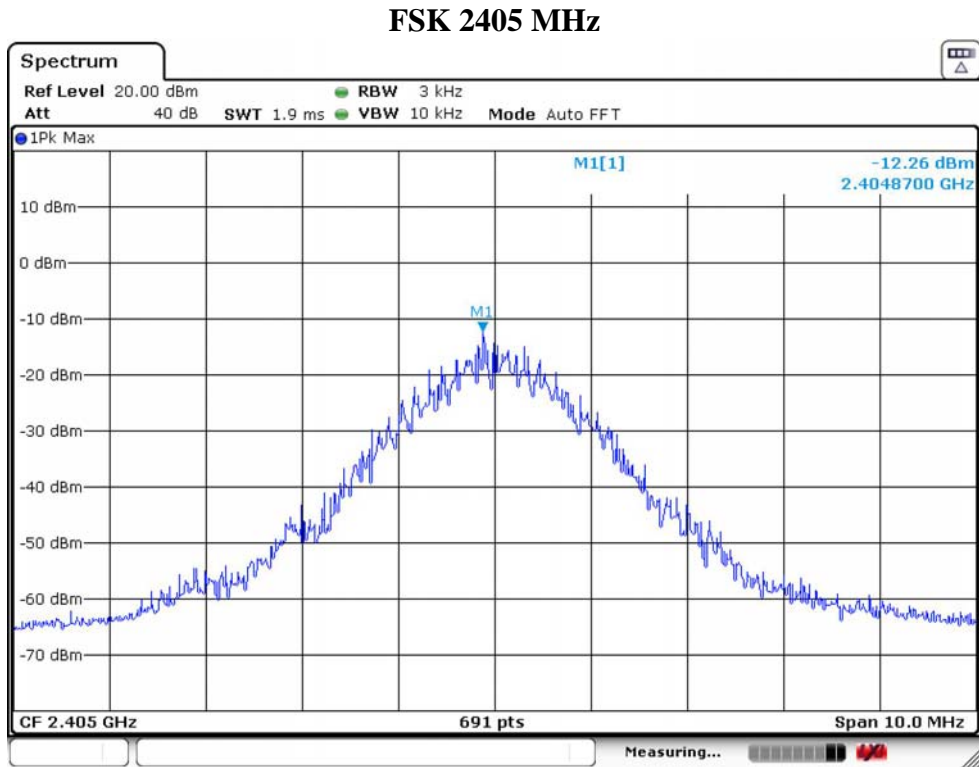

### FSK 2439 MHz

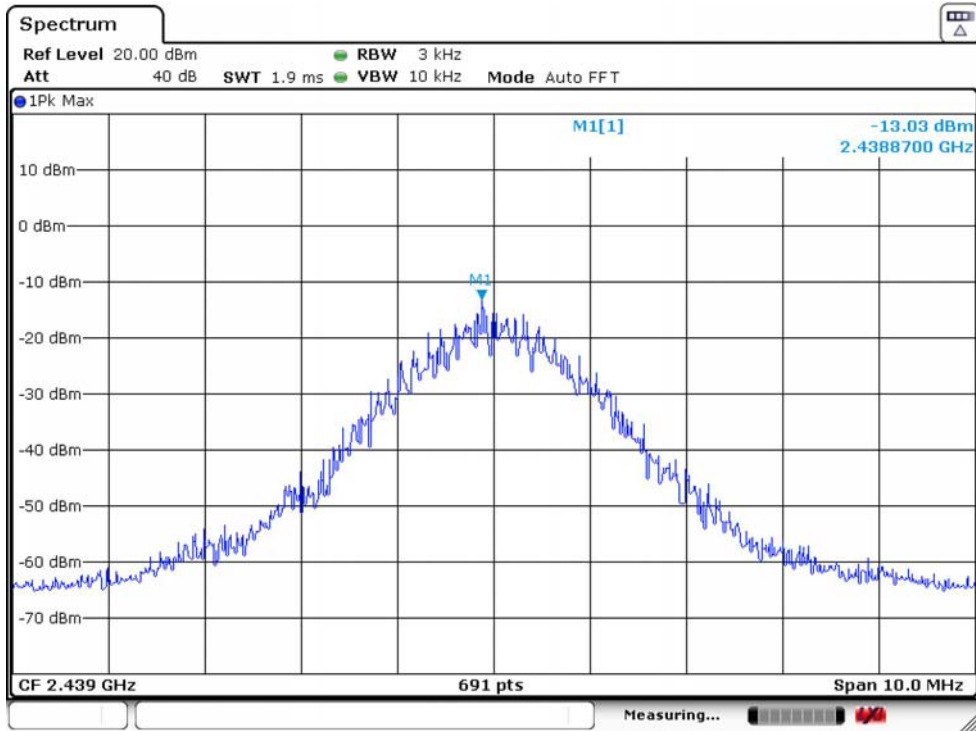

### FSK 2477 MHz

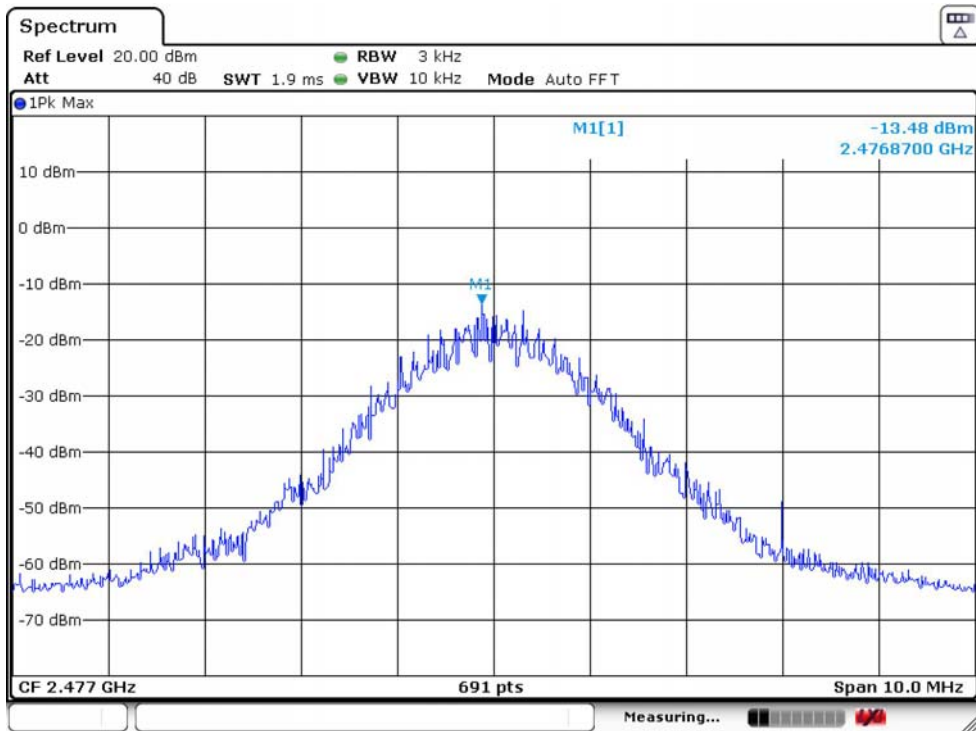

## 6. CONDUCTED BAND EDGE

### 6.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 6.2. Test Setup



### 6.3. Spectrum Analyzer Setting

Spectrum Parameters	Setting
RBW	100KHz
VBW	300KHz
Span	100MHz(20MHz Bandwidth mode)/200MHz(40MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

### 6.4. Test Procedure


- a. Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- b. Spectrum analyzer setting parameters in accordance with section 6.3.
- c. Set the EUT transmit continuously with maximum output power.
- d. Allow trace to stabilize, use the marker function to mark the highest emission level outside the authorized band.
- e. Repeat above procedures until all modes and channels were measured.
- f. Record the results in the test report.




Test Result

Temperature	27°C	Relative Humidity	55%	Test Voltage	120V/60Hz
Result	PASS				

FSK 2405 MHz

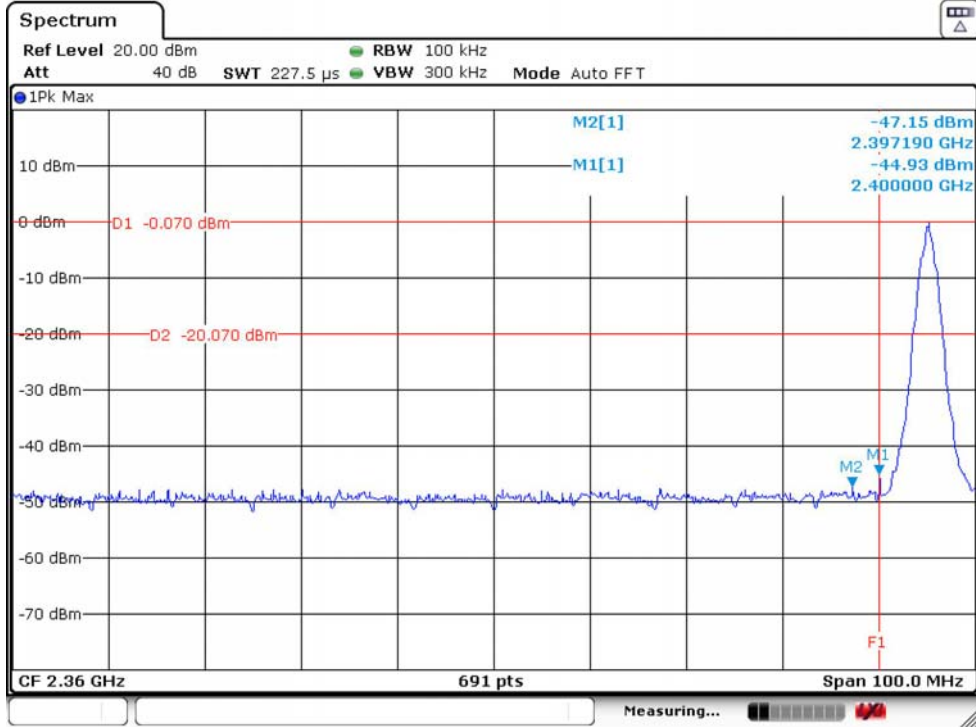

FSK 2477 MHz

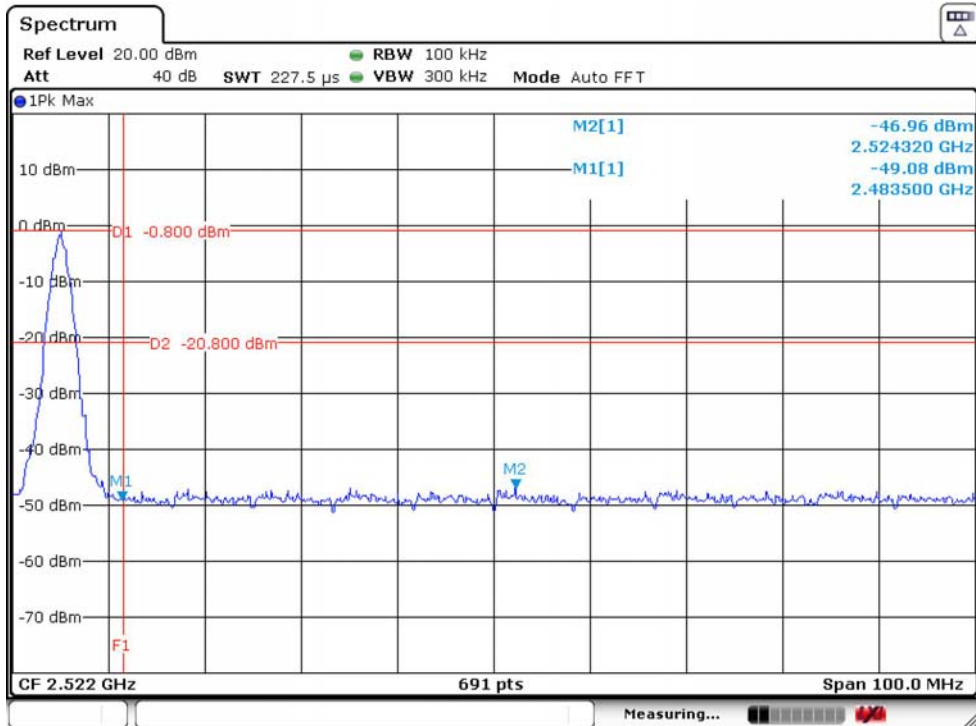


## 7. CONDUCTED SPURIOUS EMISSIONS

### 7.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 7.2. Test Setup

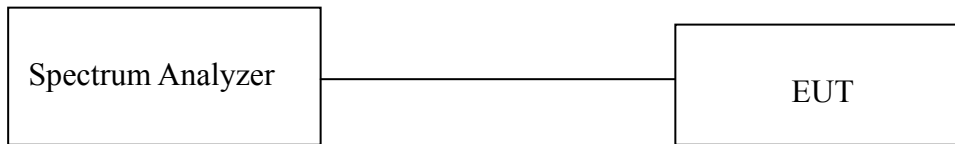

### 7.3. Spectrum Analyzer Setting

Spectrum Parameters	Setting
RBW	100KHz
VBW	300KHz
Start frequency	30MHz
Stop frequency	25GHz
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold


### 7.4. Test Procedure

- a. Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- b. Spectrum analyzer setting parameters in accordance with section 7.3.
- c. Set the EUT transmit continuously with maximum output power.
- d. Allow trace to stabilize, use the marker function to mark the highest emission level outside the authorized band.
- e. Repeat above procedures until all modes and channels were measured.
- f. Record the results in the test report.


### 7.5. Test Result

Temperature	27°C	Relative Humidity	55%	Test Voltage	120V/60Hz
Result	PASS				


#### FSK 2405 MHz

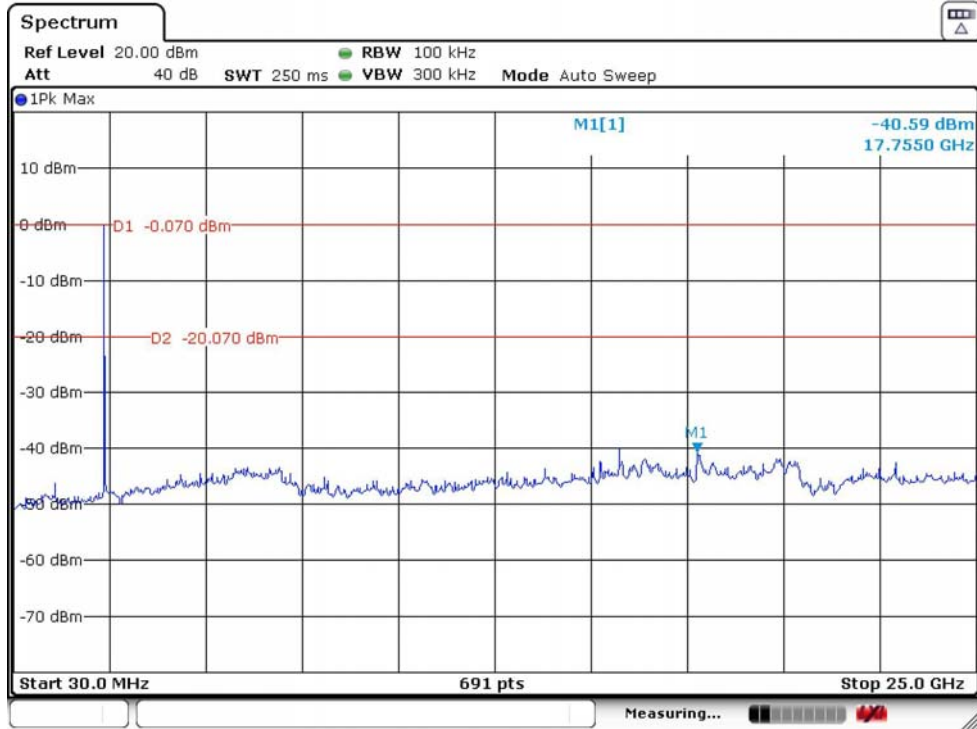

#### FSK 2439 MHz

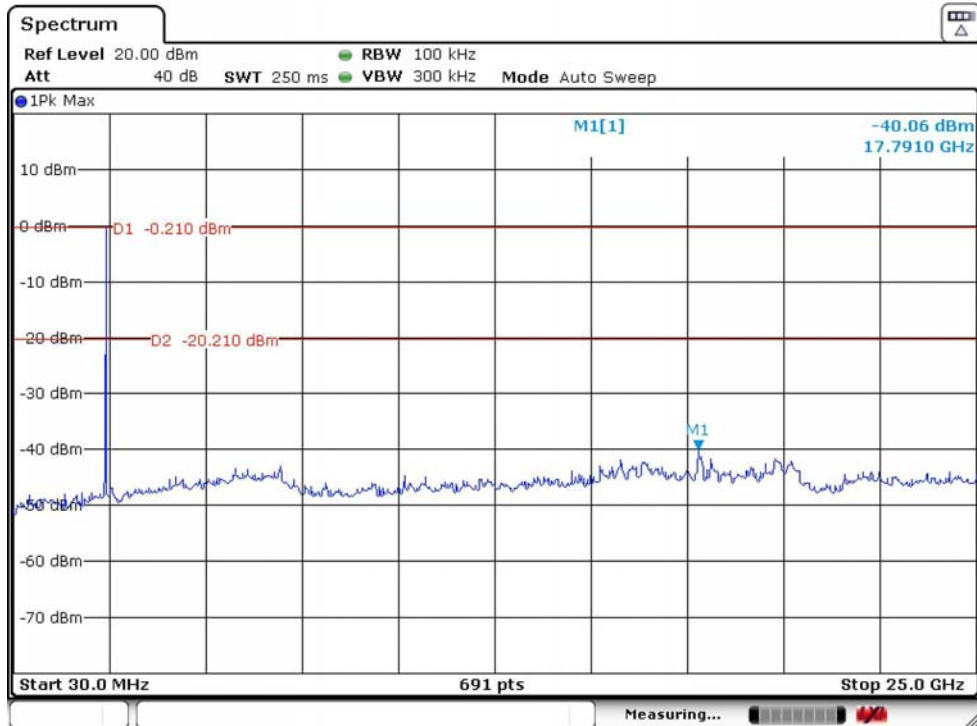

### FSK 2477 MHz

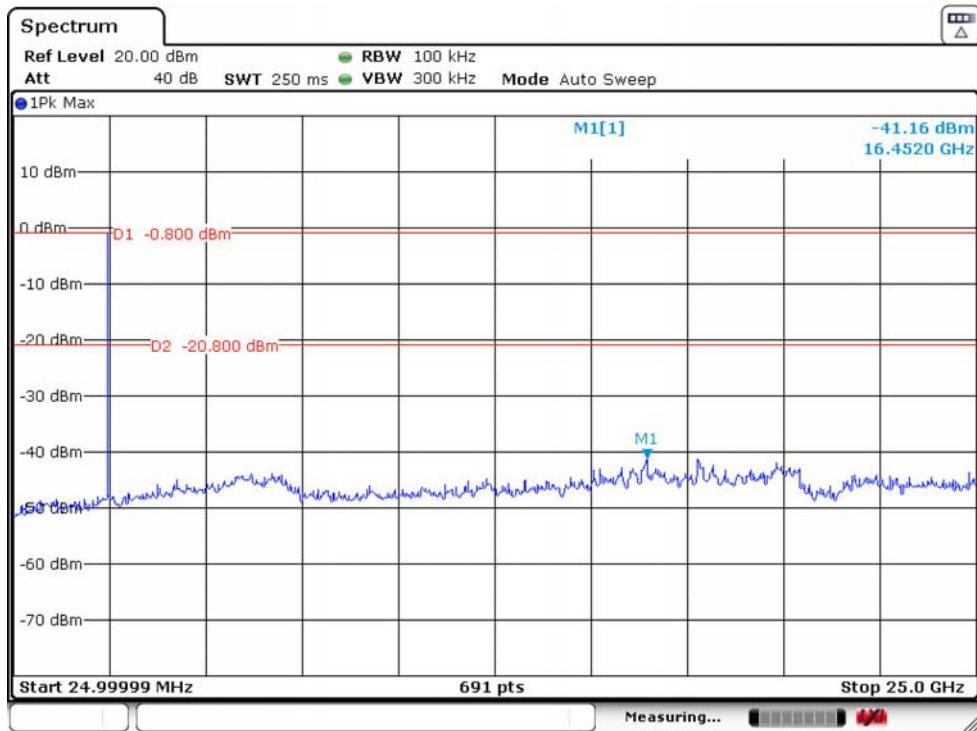

## 8. RADIATED SPURIOUS EMISSIONS AND BAND EDGE

### 8.1. Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

#### 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )

#### 15.209 Limit

Frequency (MHz)	Field Strength( $\mu$ V/m)	Distance(m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


Note:

- (1) Emission level  $\text{dB}\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$ .
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.




## 8.2. Test setup


9kHz~30MHz

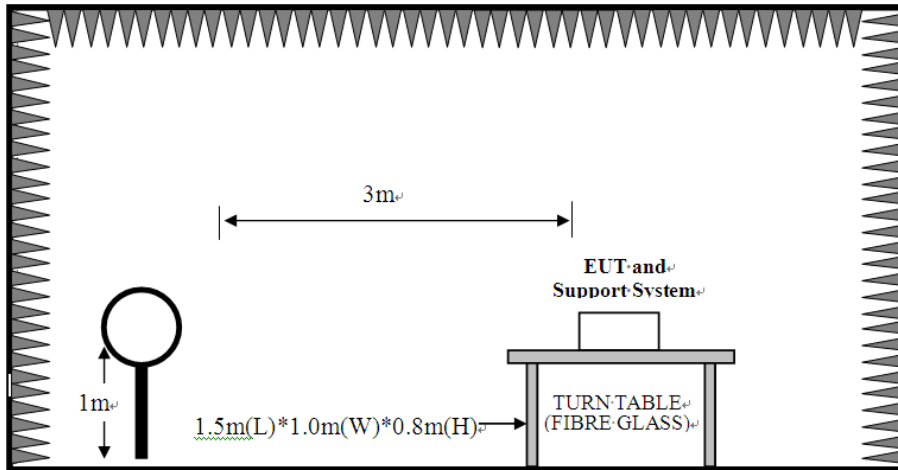

30~1000MHz

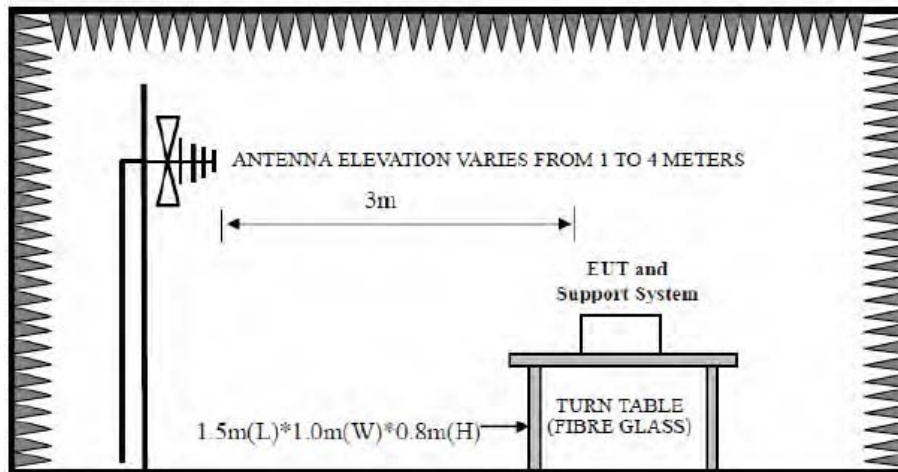

Above 1GHz

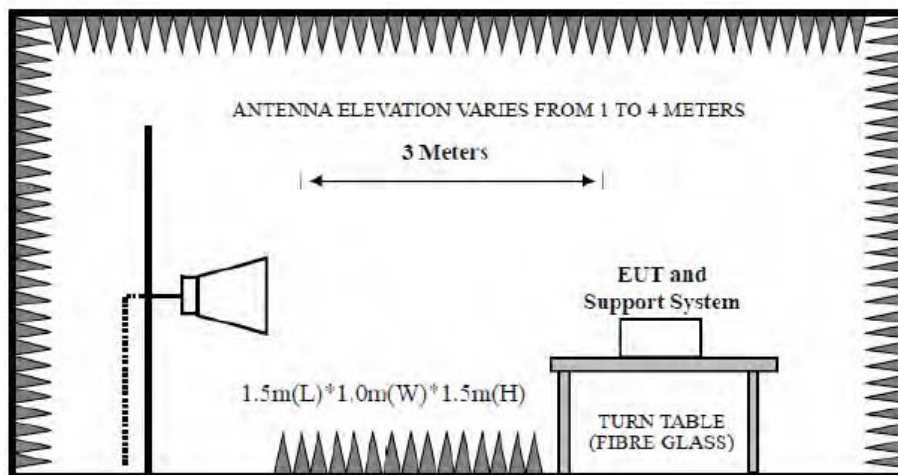

## 8.3. Spectrum Analyzer Setting

## For 9KHz-150KHz

Spectrum Parameters	Setting
RBW	300Hz(for Peak&AVG)/CISPR 200Hz(for QP)
VBW	300Hz(for Peak&AVG)/CISPR 200Hz(for QP)
Start frequency	9KHz
Stop frequency	150KHz
Sweep Time	Auto
Detector	PEAK/QP/AVG
Trace Mode	Max Hold

## For 150KHz-30MHz

Spectrum Parameters	Setting
RBW	9KHz
VBW	9KHz
Start frequency	150KHz
Stop frequency	30MHz
Sweep Time	Auto
Detector	QP
Trace Mode	Max Hold

## For 30MHz-1GHz

Spectrum Parameters	Setting
RBW	120KHz
VBW	300KHz
Start frequency	30MHz
Stop frequency	1GHz
Sweep Time	Auto
Detector	QP
Trace Mode	Max Hold

## For Above 1GHz

Spectrum Parameters	Setting	
RBW	1MHz	
VBW	PEAK Measurement	AVG Measurement
	3MHz	Duty cycle $\geq 98\%$ , VBW=10Hz
		Duty cycle $< 98\%$ , VBW $\geq 1/T$
Start frequency	1GHz	
Stop frequency	25GHz	
Sweep Time	Auto	
Detector	PEAK	
Trace Mode	Max Hold	

Note :

1. T is the on-time time of the duty cycle, when EUT transmit continuously with maximum output power, unit is seconds. reference section 2.8 for the on-time time.

## 8.4. Test Procedure

- a. EUT was placed on a turn table, which is 0.8 meter high above ground for below 1GHz test, and which is 1.5 meter high above ground for above 1GHz test.
- b. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower.
- c. Set the EUT transmit continuously with maximum output power.
- d. The turn table can rotate 360 degrees to determine the position of the maximum emission level.
- e. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.
- f. Spectrum analyzer setting parameters in accordance with section 8.3.
- g. Repeat above procedures until all channels were measured.
- h. Record the results in the test report.

### Note:


1. For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.
2. The frequency 2405/2439/2477MHz are fundamental frequency, which no limit, the limit on plots is automatically generated by the software, it's not fundamental limit, we can't remove it.

### 8.5. Test Result

## Radiated Emissions Below 1GHz

EST Technology

Chilingxiang, Qishantou, Santun,  
Houjie, Dongguan, Guangdong, China  
Tel: +86-769-83081888  
Fax: +86-769-83081878

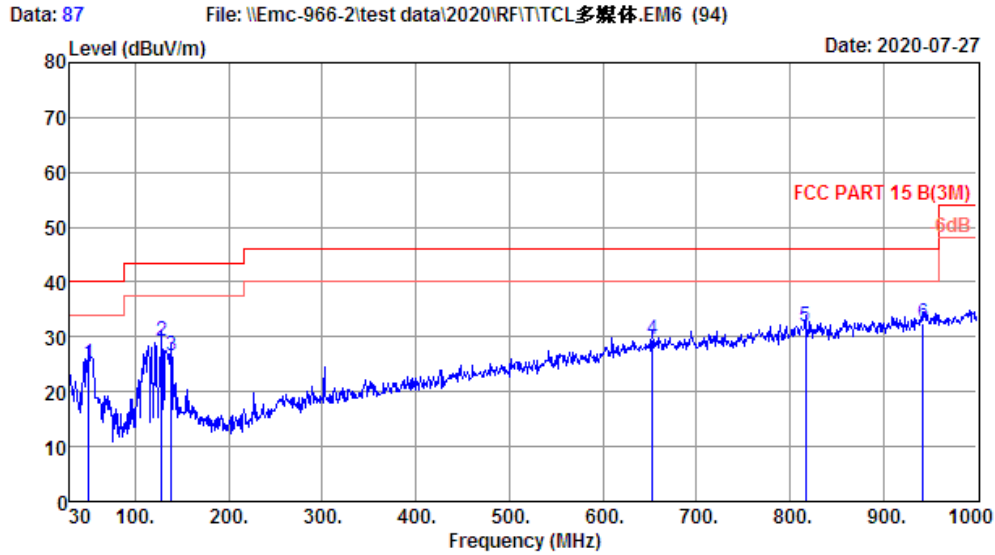

Site no. : 2# 966 chamber Data no. : 87  
 Dis. / Ant. : 3m 37062 Ant. pol. : VERTICAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:19.3Humi:48%;Press:101.52KPa  
 Engineer : Zzb  
 EUT : 2.1 CH Sound Bar with Wireless Subwoofer  
 Power : AC 120V/60Hz  
 M/N : TS6110  
 Test Mode : TX Mode


	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	50.37	8.30	0.30	16.37	24.97	40.00	15.03	QP
2	127.97	11.62	0.96	16.51	29.09	43.50	14.41	QP
3	138.64	12.32	1.02	13.36	26.70	43.50	16.80	QP
4	652.74	21.46	3.21	4.71	29.38	46.00	16.62	QP
5	816.67	23.27	3.70	5.02	31.99	46.00	14.01	QP
6	942.77	24.46	4.42	3.68	32.56	46.00	13.44	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 2. Margin= Limit - Emission Level.  
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,  
Houjie, Dongguan, Guangdong, China  
Tel: +86-769-83081888  
Fax: +86-769-83081878

Data: 88 File: \\Emc-966-2\test data\2020\RF\IT\TCL多媒体.EM6 (94) Date: 2020-07-27

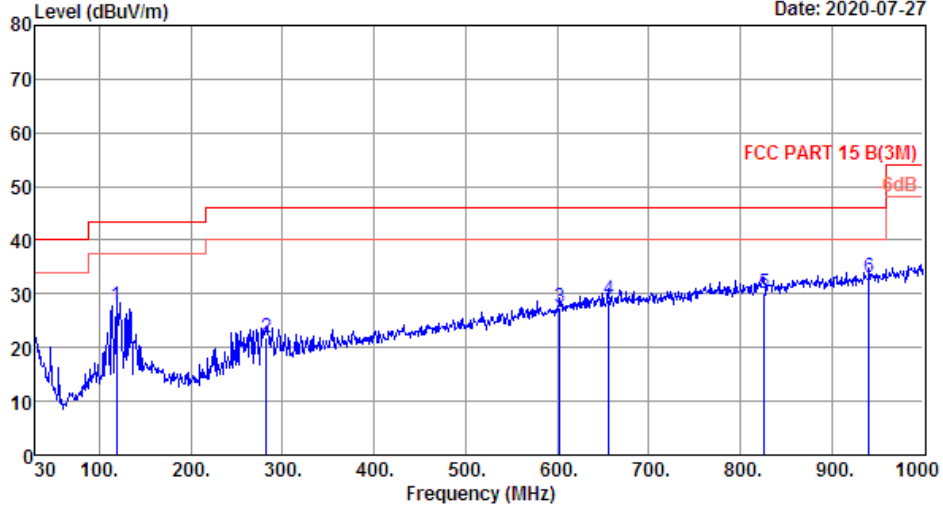

Site no. : 2# 966 chamber Data no. : 88  
 Dis. / Ant. : 3m 37062 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:19.3Humi:48%;Press:101.52KPa  
 Engineer : Zzb  
 EUT : 2.1 CH Sound Bar with Wireless Subwoofer  
 Power : AC 120V/60Hz  
 M/N : TS6110  
 Test Mode : TX Mode

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	118.27	11.26	0.95	15.42	27.63	43.50	15.87	QP
2	282.20	12.72	1.76	7.38	21.86	46.00	24.14	QP
3	603.27	20.46	2.99	3.91	27.36	46.00	18.64	QP
4	656.62	21.54	3.23	4.24	29.01	46.00	16.99	QP
5	826.37	23.36	3.71	3.08	30.15	46.00	15.85	QP
6	940.83	24.42	4.38	4.15	32.95	46.00	13.05	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 2. Margin= Limit - Emission Level.  
 3. The emission levels that are 20dB below the official limit are not reported.

Note:

1. The amplitude of 9KHz to 30MHz spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.
2. All channels had been pre-test, only the worst case was reported.




### Radiated Emissions Above 1G

EST Technology

Chilingxiang, Qishantou, Santun,  
Houjie, Dongguan, Guangdong, China  
Tel: +86-769-83081888  
Fax: +86-769-83081878

Data: 111 File: \\Emc-966-1\test data\2020\RF\TTCL 多媒体.EM6 (222) Date: 2020-07-04

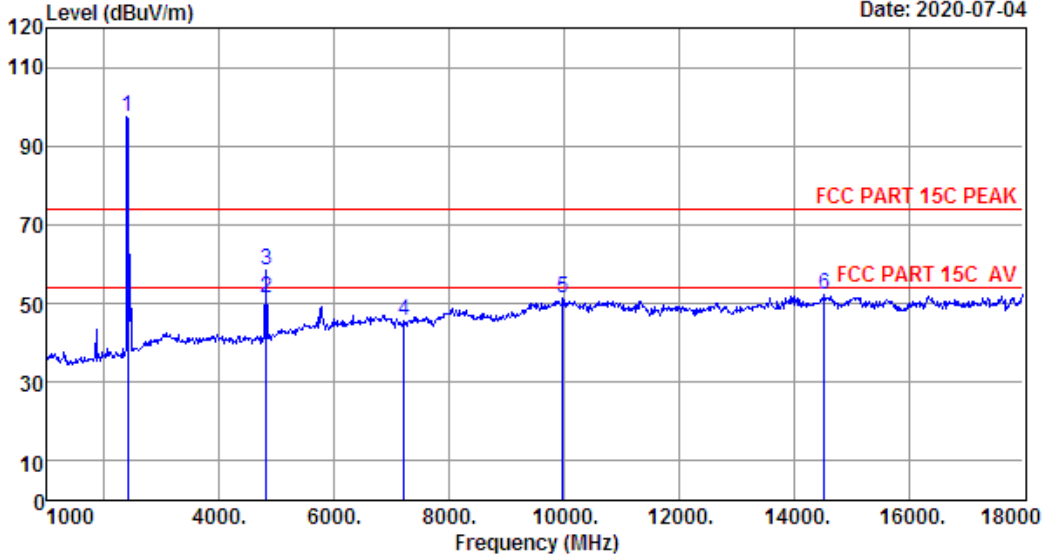

Site no. : 1# 966 Chamber Data no. : 111  
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:27.3';Humi:54%;Press:101.52kPa  
 Engineer : Pbalo  
 EUT : 2.1 CH Sound Bar with Wireless Subwoofer  
 Power : AC 120V/60Hz  
 M/N : TS6110  
 Test Mode : TX 2405MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2405.00	27.28	1.46	34.64	103.21	97.31	74.00	-23.31	Peak
2	4810.00	31.12	3.25	34.66	51.61	51.32	54.00	2.68	Average
3	4810.00	31.12	3.25	34.66	58.77	58.48	74.00	15.52	Peak
4	7215.00	36.25	5.19	34.82	38.98	45.60	74.00	28.40	Peak
5	9976.00	38.87	5.88	34.20	40.76	51.31	74.00	22.69	Peak
6	14532.00	40.99	6.89	34.46	38.74	52.16	74.00	21.84	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. Margin= Limit - Emission Level.  
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,  
Houjie, Dongguan, Guangdong, China  
Tel: +86-769-83081888  
Fax: +86-769-83081878

Data: 112 File: \\Emc-966-1\test data\2020\RF\TCL 多媒体.EM6 (222) Date: 2020-07-04

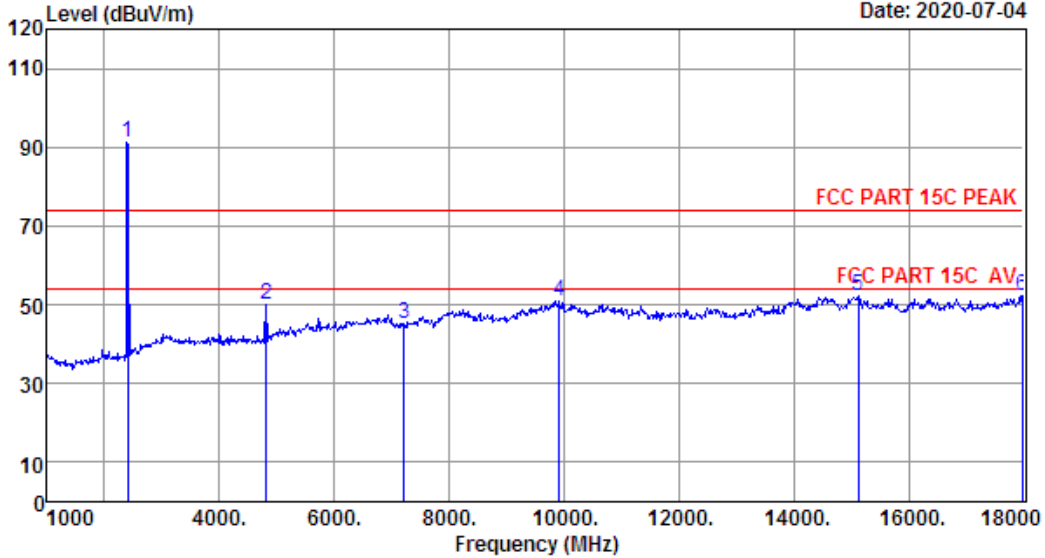

Site no. : 1# 966 Chamber Data no. : 112  
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:27.3';Humi:54%;Press:101.52kPa  
 Engineer : Pballo  
 EUT : 2.1 CH Sound Bar with Wireless Subwoofer  
 Power : AC 120V/60Hz  
 M/N : TS6110  
 Test Mode : TX 2405MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2405.00	27.28	1.46	34.64	96.97	91.07	74.00	-17.07	Peak
2	4810.00	31.12	3.25	34.66	50.16	49.87	74.00	24.13	Peak
3	7215.00	36.25	5.19	34.82	38.75	45.37	74.00	28.63	Peak
4	9925.00	38.76	5.84	34.21	40.43	50.82	74.00	23.18	Peak
5	15127.00	40.77	6.72	34.55	39.33	52.27	74.00	21.73	Peak
6	17983.00	48.76	8.23	34.30	29.73	52.42	74.00	21.58	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. Margin= Limit - Emission Level.  
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,  
Houjie, Dongguan, Guangdong, China  
Tel: +86-769-83081888  
Fax: +86-769-83081878

Data: 113 File: \\Emc-966-1\test data\2020\RF\IT\TCL 多媒体.EM6 (222) Date: 2020-07-04

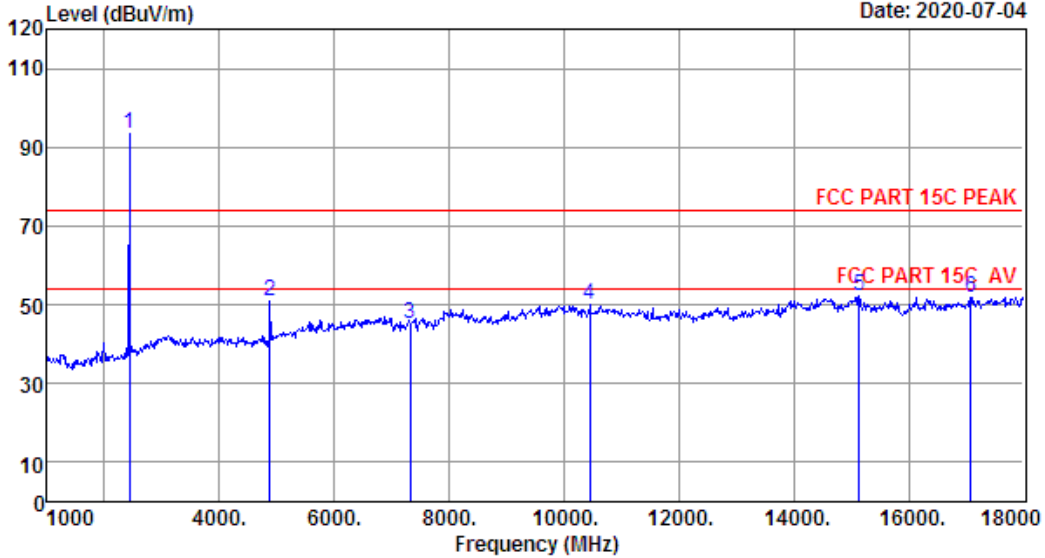

Site no. : 1# 966 Chamber Data no. : 113  
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:27.3';Humi:54%;Press:101.52kPa  
 Engineer : Pbalo  
 EUT : 2.1 CH Sound Bar with Wireless Subwoofer  
 Power : AC 120V/60Hz  
 M/N : TS6110  
 Test Mode : TX 2439MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2439.00	27.33	1.47	34.62	99.43	93.61	74.00	-19.61	Peak
2	4878.00	31.37	3.31	34.68	51.05	51.05	74.00	22.95	Peak
3	7317.00	36.46	5.22	34.83	38.29	45.14	74.00	28.86	Peak
4	10452.00	39.36	6.01	34.34	38.86	49.89	74.00	24.11	Peak
5	15144.00	40.75	6.71	34.54	39.40	52.32	74.00	21.68	Peak
6	17082.00	41.58	7.50	34.39	37.24	51.93	74.00	22.07	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. Margin= Limit - Emission Level.  
 3. The emission levels that are 20dB below the official limit are not reported.



EST Technology

Chilingxiang, Qishantou, Santun,  
Houjie, Dongguan, Guangdong, China  
Tel: +86-769-83081888  
Fax: +86-769-83081878

Data: 114 File: \\Emc-966-1\test data\2020\RF\T\TCL 多媒体.EM6 (222) Date: 2020-07-04

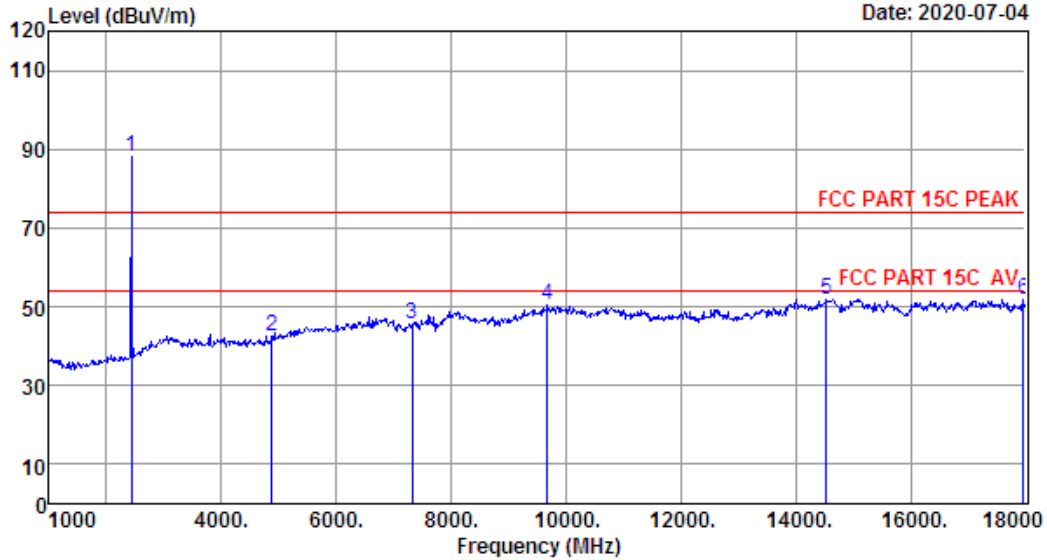

Site no. : 1# 966 Chamber Data no. : 114  
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:27.3';Humi:54%;Press:101.52kPa  
 Engineer : Pbalo  
 EUT : 2.1 CH Sound Bar with Wireless Subwoofer  
 Power : AC 120V/60Hz  
 M/N : TS6110  
 Test Mode : TX 2439MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2439.00	27.33	1.47	34.62	94.00	88.18	74.00	-14.18	Peak
2	4878.00	31.37	3.31	34.68	42.44	42.44	74.00	31.56	Peak
3	7317.00	36.46	5.22	34.83	38.85	45.70	74.00	28.30	Peak
4	9670.00	38.24	5.63	34.27	40.68	50.28	74.00	23.72	Peak
5	14532.00	40.99	6.89	34.46	38.55	51.97	74.00	22.03	Peak
6	17966.00	48.63	8.22	34.30	29.33	51.88	74.00	22.12	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. Margin= Limit - Emission Level.  
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,  
Houjie, Dongguan, Guangdong, China  
Tel: +86-769-83081888  
Fax: +86-769-83081878

Data: 115 File: \\Emc-966-1\test data\2020\RF\IT\TCL 多媒体.EM6 (222) Date: 2020-07-04

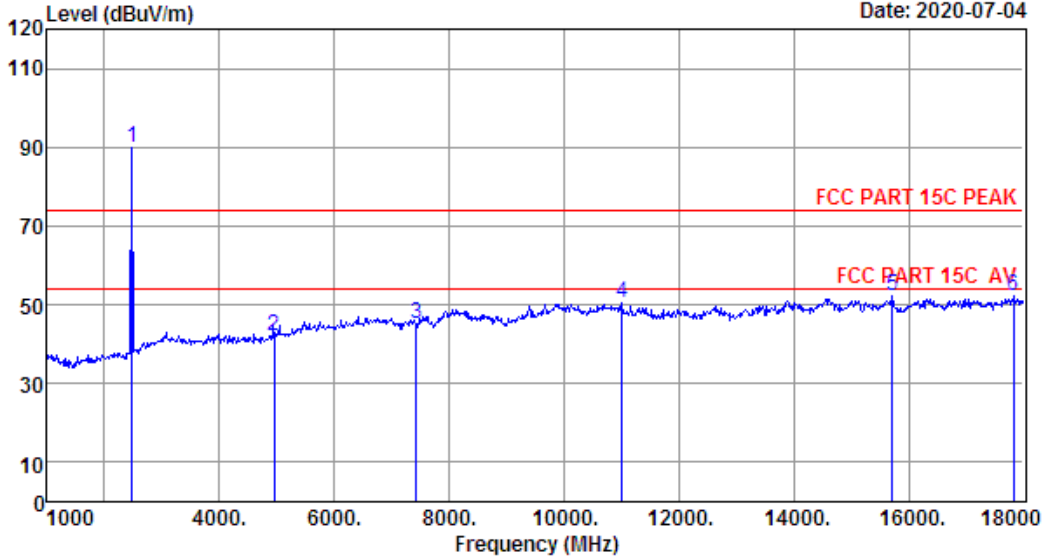


Site no. : 1# 966 Chamber Data no. : 115  
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:27.3';Humi:54%;Press:101.52kPa  
 Engineer : Pbalo  
 EUT : 2.1 CH Sound Bar with Wireless Subwoofer  
 Power : AC 120V/60Hz  
 M/N : TS6110  
 Test Mode : TX 2477MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2477.00	27.38	1.48	34.61	95.58	89.83	74.00	-15.83	Peak
2	4954.00	31.68	3.38	34.69	41.66	42.03	74.00	31.97	Peak
3	7431.00	36.66	5.25	34.84	38.00	45.07	74.00	28.93	Peak
4	11013.00	39.90	6.11	34.51	38.81	50.31	74.00	23.69	Peak
5	15722.00	40.10	6.65	34.31	39.68	52.12	74.00	21.88	Peak
6	17830.00	47.54	8.13	34.32	30.75	52.10	74.00	21.90	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. Margin= Limit - Emission Level.  
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,  
Houjie, Dongguan, Guangdong, China  
Tel: +86-769-83081888  
Fax: +86-769-83081878

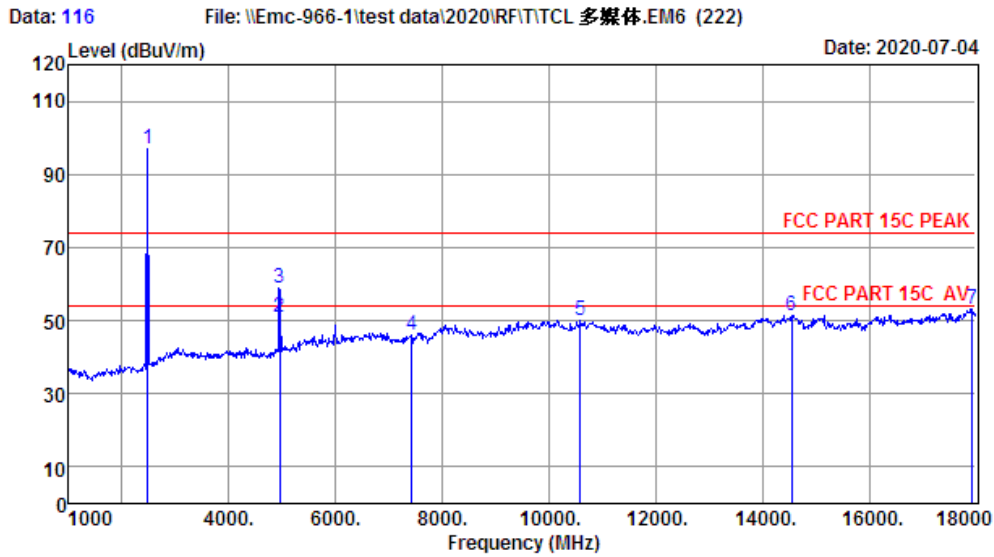

Site no. : 1# 966 Chamber Data no. : 116  
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:27.3';Humi:54%;Press:101.52kPa  
 Engineer : Pballo  
 EUT : 2.1 CH Sound Bar with Wireless Subwoofer  
 Power : AC 120V/60Hz  
 M/N : TS6110  
 Test Mode : TX 2477MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2477.00	27.38	1.48	34.61	102.83	97.08	74.00	-23.08	Peak
2	4954.00	31.68	3.38	34.69	50.43	50.80	54.00	3.20	Average
3	4954.00	31.68	3.38	34.69	58.31	58.68	74.00	15.32	Peak
4	7431.00	36.66	5.25	34.84	39.03	46.10	74.00	27.90	Peak
5	10588.00	39.49	6.04	34.38	39.08	50.23	74.00	23.77	Peak
6	14549.00	40.99	6.89	34.46	38.07	51.49	74.00	22.51	Peak
7	17932.00	48.36	8.20	34.31	30.98	53.23	74.00	20.77	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. Margin= Limit - Emission Level.  
 3. The emission levels that are 20dB below the official limit are not reported.

Note:

- The amplitude of 18GHz to 25GHz spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.




### Radiated Band Edge

EST Technology

Chilingxiang, Qishantou, Santun,  
Houjie, Dongguan, Guangdong, China  
Tel: +86-769-83081888  
Fax: +86-769-83081878

Data: 117 File: \\Emc-966-1\test data\2020\RF\TCL 多媒体.EM6 (222) Date: 2020-07-04

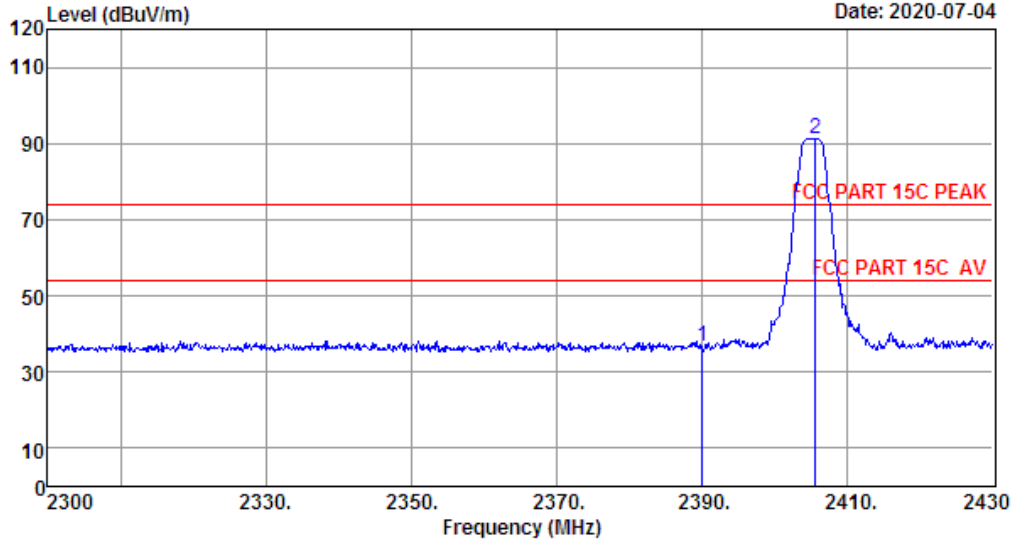

Site no. : 1# 966 Chamber Data no. : 117  
 Dis. / Ant. : 3m ANI9120D 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:27.3';Humi:54%;Press:101.52kPa  
 Engineer : Pbalo  
 EUT : 2.1 CH Sound Bar with Wireless Subwoofer  
 Power : AC 120V/60Hz  
 M/N : TS6110  
 Test Mode : TX 2405MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.26	1.45	34.64	42.80	36.87	74.00	37.13	Peak
2	2405.56	27.28	1.46	34.64	97.25	91.35	74.00	-17.35	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. Margin= Limit - Emission Level.  
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,  
Houjie, Dongguan, Guangdong, China  
Tel: +86-769-83081888  
Fax: +86-769-83081878

Data: 118 File: \\Emc-966-1\test data\2020\RF\IT\TCL 多媒体.EM6 (222) Date: 2020-07-04

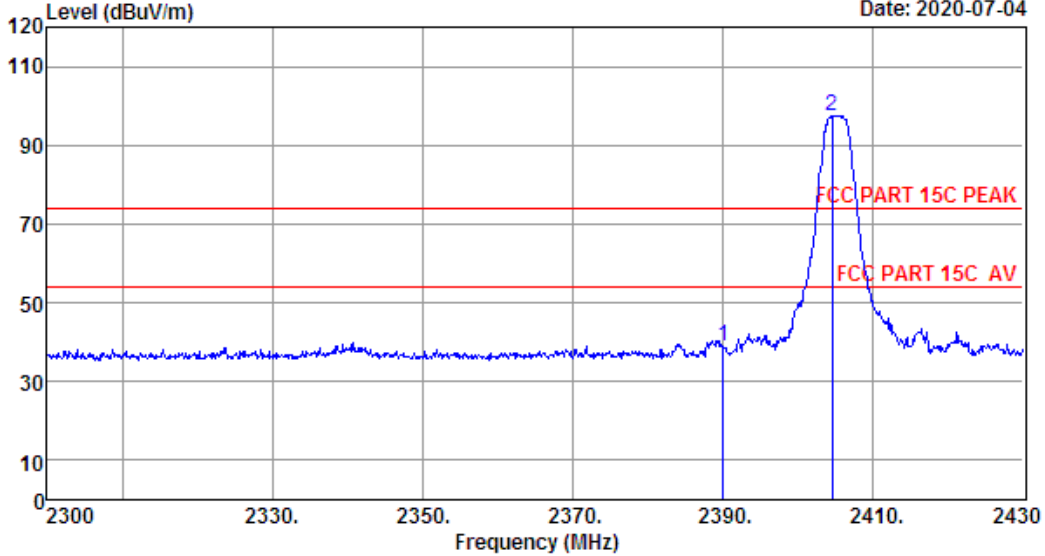

Site no. : 1# 966 Chamber Data no. : 118  
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:27.3';Humi:54%;Press:101.52kPa  
 Engineer : Pbaloo  
 EUT : 2.1 CH Sound Bar with Wireless Subwoofer  
 Power : AC 120V/60Hz  
 M/N : TS6110  
 Test Mode : TX 2405MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.26	1.45	34.64	44.95	39.02	74.00	34.98	Peak
2	2404.52	27.28	1.46	34.64	103.23	97.33	74.00	-23.33	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. Margin= Limit - Emission Level.  
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,  
Houjie, Dongguan, Guangdong, China  
Tel: +86-769-83081888  
Fax: +86-769-83081878

Data: 119 File: \\Emc-966-1\test data\2020\RF\TCL 多媒体.EM6 (222) Date: 2020-07-04

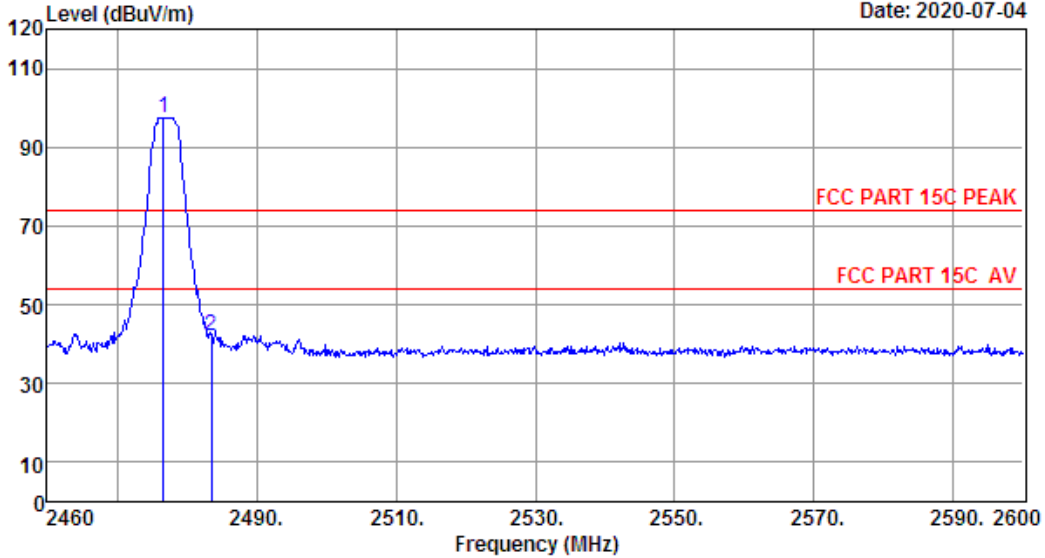

Site no. : 1# 966 Chamber Data no. : 119  
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:27.3';Humi:54%;Press:101.52kPa  
 Engineer : Pbaloo  
 EUT : 2.1 CH Sound Bar with Wireless Subwoofer  
 Power : AC 120V/60Hz  
 M/N : TS6110  
 Test Mode : TX 2477MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2476.66	27.38	1.48	34.61	103.18	97.43	74.00	-23.43	Peak
2	2483.50	27.38	1.48	34.61	47.64	41.89	74.00	32.11	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. Margin= Limit - Emission Level.  
 3. The emission levels that are 20dB below the official limit are not reported.

# EST Technology

Chilingxiang, Qishantou, Santun,  
Houjie, Dongguan, Guangdong, China  
Tel: +86-769-83081888  
Fax: +86-769-83081878

Data: 120 File: \\Emc-966-1\test data\2020\RF\TCL 多媒体.EM6 (222) Date: 2020-07-04

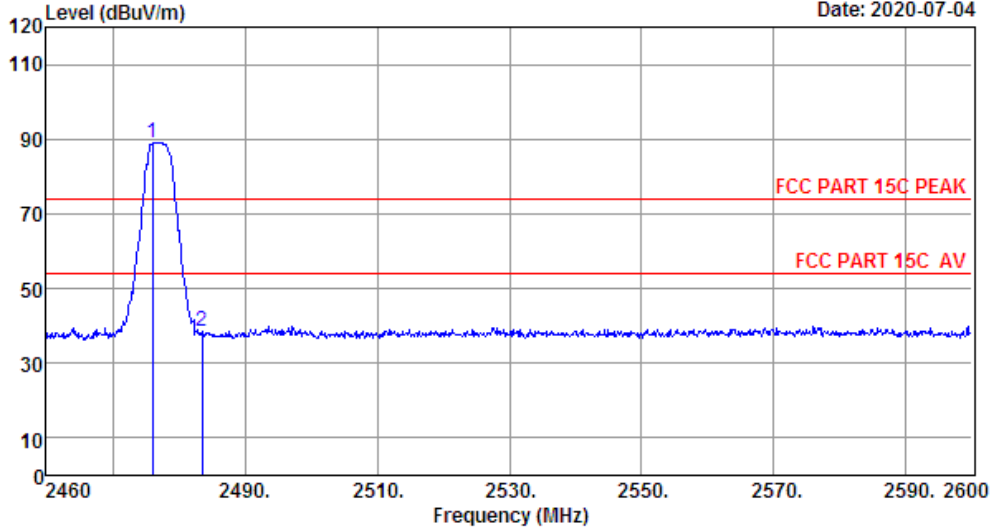

Site no. : 1# 966 Chamber Data no. : 120  
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:27.3';Humi:54%;Press:101.52kPa  
 Engineer : Pbalo  
 EUT : 2.1 CH Sound Bar with Wireless Subwoofer  
 Power : AC 120V/60Hz  
 M/N : TS6110  
 Test Mode : TX 2477MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2476.10	27.38	1.48	34.61	94.77	89.02	74.00	-15.02	Peak
2	2483.50	27.38	1.48	34.61	44.16	38.41	74.00	35.59	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. Margin= Limit - Emission Level.  
 3. The emission levels that are 20dB below the official limit are not reported.

Note:

1. All channels had been pre-test, only of the worst case channels were reported.



## 9. AC POWER LINE CONDUCTED EMISSIONS


### 9.1. Limit

Frequency			Maximum RF Line Voltage	
			Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz	~	500kHz	66 ~ 56*	56 ~ 46*
500kHz	~	5MHz	56	46
5MHz	~	30MHz	60	50

Note:

1. \* Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

### 9.2. Test Setup

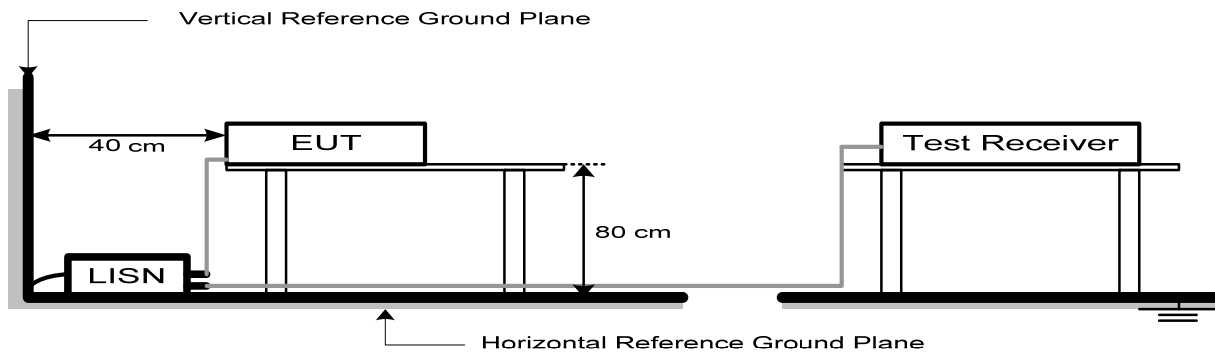

### 9.3. Spectrum Analyzer Setting

Spectrum Parameters	Setting
RBW	9KHz
VBW	9KHz
Start frequency	150KHz
Stop frequency	30MHz
Sweep Time	Auto
Detector	QP/AVG
Trace Mode	Max Hold

### 9.4. Test Procedure

- a. The EUT was placed on a non-metallic table, 80cm above the ground plane.
- b. The EUT Power connected to the power mains through a line impedance stabilization network.
- c. Provides a 50 ohm coupling impedance for the EUT (Please refer the block diagram of the test setup and photographs).
- d. Set the EUT transmit continuously with maximum output power.
- e. Spectrum analyzer setting parameters in accordance with section 9.3.
- f. The AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2013 on Conducted Emission Test.
- g. Record the results in the test report.




### 9.5. Test Result

EST Technology

Chilingxiang, Qishantou, Santun,  
Houjie, Dongguan, Guangdong, China  
Tel:+86-769-83081888  
Fax:+86-769-83081878

Data: 66 File: \\Emc-ce-1\Test data\2020\RF\TTCLE.M6 (104) Date: 2020-07-27

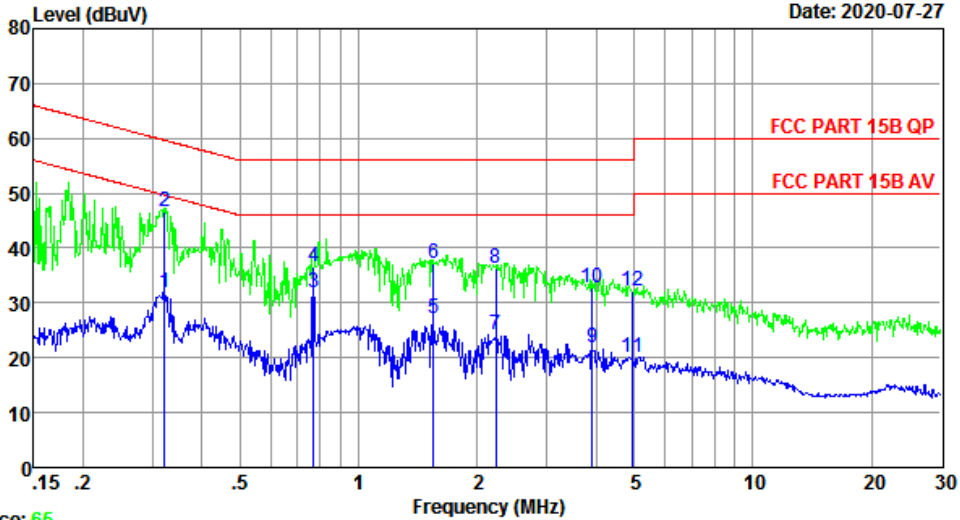


Trace: 65  
 Site no : 844 Shield Room Data no. : 66  
 Env. / Ins. : Temp:24.3'C Humi:58% Press:101.50kPa LINE Phase : LINE  
 Limit : FCC PART 15B QP  
 Engineer : JACK  
 EUT : 2.1 CH Sound Bar with Wireless Subwoofer  
 Power : AC 240V/60Hz  
 M/N : TS6110  
 Test Mode : TX Mode

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.322	9.72	9.92	12.19	31.83	49.66	17.83	Average
2	0.322	9.72	9.92	27.10	46.74	59.66	12.92	QP
3	0.767	9.72	9.93	12.18	31.83	46.00	14.17	Average
4	0.767	9.72	9.93	17.10	36.75	56.00	19.25	QP
5	1.552	9.73	9.95	7.62	27.30	46.00	18.70	Average
6	1.552	9.73	9.95	17.61	37.29	56.00	18.71	QP
7	2.225	9.74	9.96	4.64	24.34	46.00	21.66	Average
8	2.225	9.74	9.96	16.64	36.34	56.00	19.66	QP
9	3.922	9.76	9.99	2.06	21.81	46.00	24.19	Average
10	3.922	9.76	9.99	13.06	32.81	56.00	23.19	QP
11	4.952	9.77	10.00	0.38	20.15	46.00	25.85	Average
12	4.952	9.77	10.00	12.30	32.07	56.00	23.93	QP

Remarks: 1. Emission Level=LISN Factor + Cable Loss + Reading.  
 2. Margin=Limit - Emission Level.  
 3. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Data: 68 File: \\Emc-ce-1\Test data\2020\RF\T\TCL.EM6 (104) Date: 2020-07-27

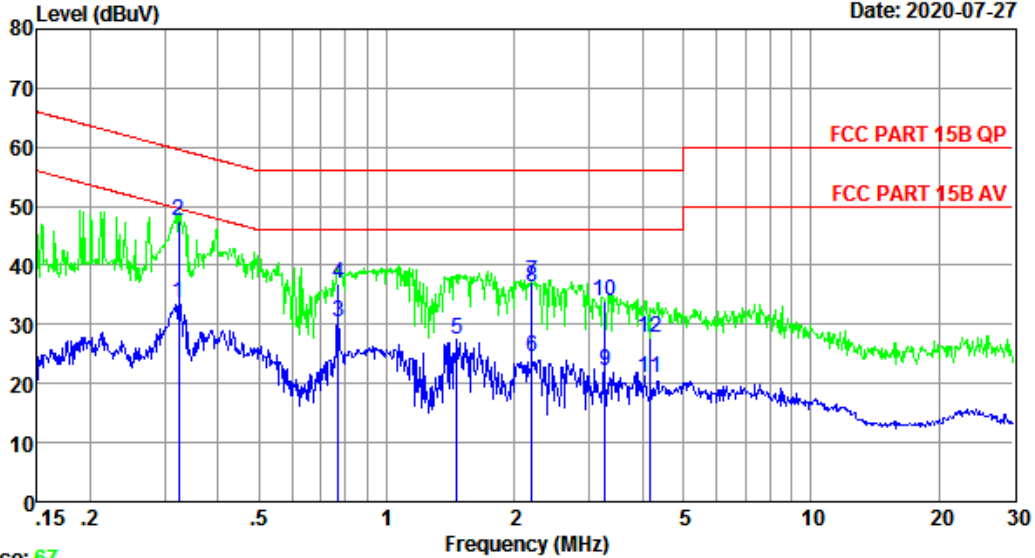


Trace: 67  
 Site no : 844 Shield Room Data no. : 68  
 Env. / Ins. : Temp:24.3'C Humi:58% Press:101.50kPa LINE Phase : NEUTRAL  
 Limit : FCC PART 15B QP  
 Engineer : JACK  
 EUT : 2.1 CH Sound Bar with Wireless Subwoofer  
 Power : AC 240V/60Hz  
 M/N : TS6110  
 Test Mode : TX Mode

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.323	9.63	9.92	14.19	33.74	49.62	15.88	Average
2	0.323	9.63	9.92	28.10	47.65	59.62	11.97	QP
3	0.767	9.70	9.93	10.84	30.47	46.00	15.53	Average
4	0.767	9.70	9.93	17.33	36.96	56.00	19.04	QP
5	1.464	9.78	9.95	7.75	27.48	46.00	18.52	Average
6	2.201	9.83	9.96	4.70	24.49	46.00	21.51	Average
7	2.201	9.83	9.96	17.40	37.19	56.00	18.81	QP
8	2.201	9.83	9.96	16.64	36.43	56.00	19.57	QP
9	3.276	9.87	9.98	2.20	22.05	46.00	23.95	Average
10	3.276	9.87	9.98	14.20	34.05	56.00	21.95	QP
11	4.180	9.89	9.99	0.96	20.84	46.00	25.16	Average
12	4.180	9.89	9.99	7.96	27.84	56.00	28.16	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.  
 2. Margin=Limit - Emission Level.  
 3. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Data: 70 File: \\Emc-ce-1\Test data\2020\RF\TCL.EM6 (104) Date: 2020-07-27

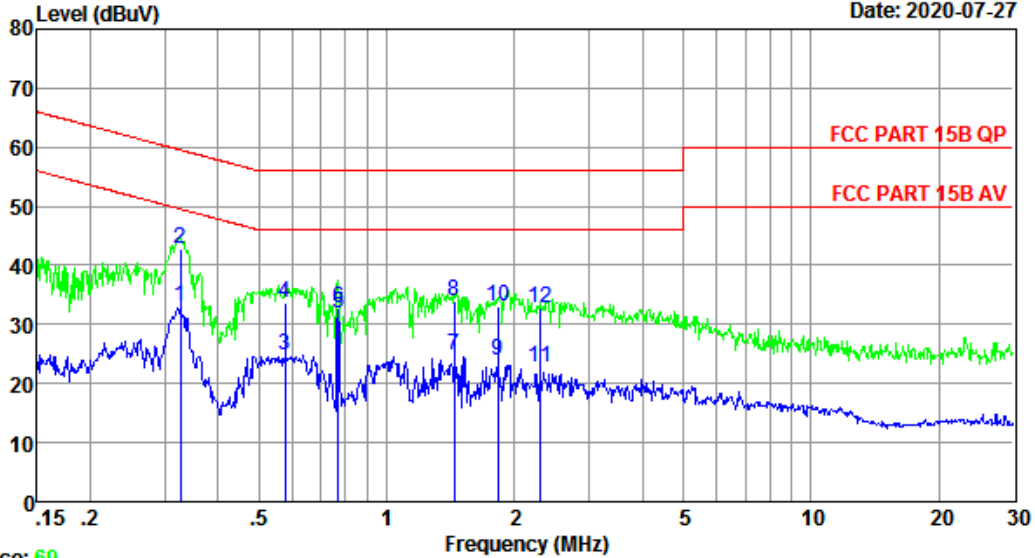


Trace: 69  
 Site no : 844 Shield Room Data no. : 70  
 Env. / Ins. : Temp:24.3'C Humi:58% Press:101.50kPa LINE Phase : LINE  
 Limit : FCC PART 15B QP  
 Engineer : JACK  
 EUT : 2.1 CH Sound Bar with Wireless Subwoofer  
 Power : AC 120V/60Hz  
 M/N : TS6110  
 Test Mode : TX Mode

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.327	9.72	9.92	13.28	32.92	49.53	16.61	Average
2	0.327	9.72	9.92	23.20	42.84	59.53	16.69	QP
3	0.576	9.72	9.92	5.07	24.71	46.00	21.29	Average
4	0.576	9.72	9.92	14.07	33.71	56.00	22.29	QP
5	0.767	9.72	9.93	12.11	31.76	46.00	14.24	Average
6	0.767	9.72	9.93	13.19	32.84	56.00	23.16	QP
7	1.441	9.73	9.95	5.15	24.83	46.00	21.17	Average
8	1.441	9.73	9.95	14.13	33.81	56.00	22.19	QP
9	1.829	9.74	9.95	4.17	23.86	46.00	22.14	Average
10	1.829	9.74	9.95	13.27	32.96	56.00	23.04	QP
11	2.297	9.75	9.96	3.10	22.81	46.00	23.19	Average
12	2.297	9.75	9.96	13.19	32.90	56.00	23.10	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.  
 2. Margin=Limit - Emission Level.  
 3. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Data: 72 File: \\Emc-ce-1\Test data\2020\RF\TCL.EM6 (116) Date: 2020-07-27

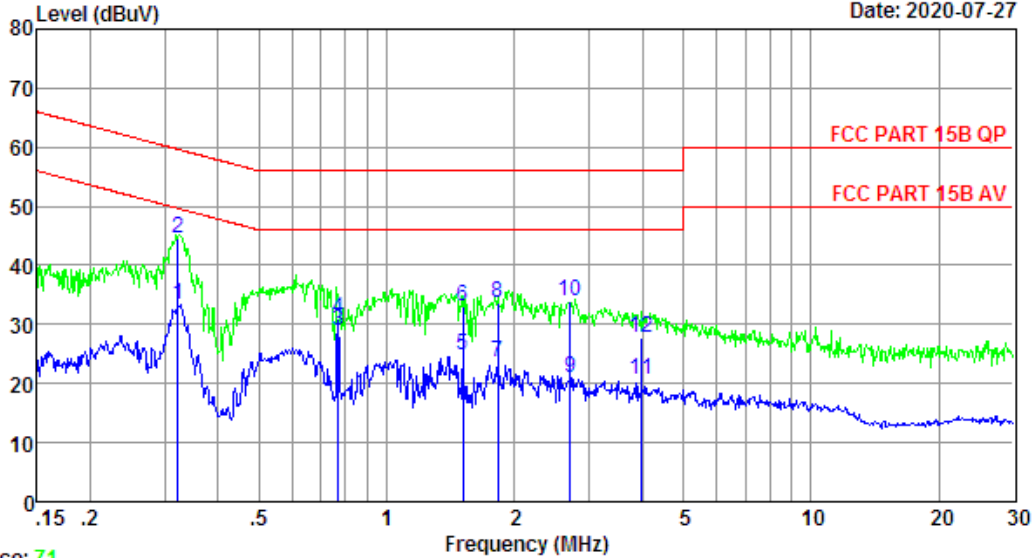

Trace: 71  
 Site no : 844 Shield Room Data no. : 72  
 Env. / Ins. : Temp:24.3'C Humi:58% Press:101.50kPa LINE Phase : NEUTRAL  
 Limit : FCC PART 15B QP  
 Engineer : JACK  
 EUT : 2.1 CH Sound Bar with Wireless Subwoofer  
 Power : AC 120V/60Hz  
 M/N : TS6110  
 Test Mode : TX Mode

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.322	9.63	9.92	13.91	33.46	49.66	16.20	Average
2	0.322	9.63	9.92	24.90	44.45	59.66	15.21	QP
3	0.767	9.70	9.93	9.27	28.90	46.00	17.10	Average
4	0.767	9.70	9.93	11.27	30.90	56.00	25.10	QP
5	1.511	9.78	9.96	5.10	24.84	46.00	21.16	Average
6	1.511	9.78	9.96	13.19	32.93	56.00	23.07	QP
7	1.829	9.80	9.95	3.91	23.66	46.00	22.34	Average
8	1.829	9.80	9.95	13.91	33.66	56.00	22.34	QP
9	2.707	9.85	9.97	1.07	20.89	46.00	25.11	Average
10	2.707	9.85	9.97	14.06	33.88	56.00	22.12	QP
11	3.985	9.88	9.99	0.86	20.73	46.00	25.27	Average
12	3.985	9.88	9.99	7.86	27.73	56.00	28.27	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.  
 2. Margin=Limit - Emission Level.  
 3. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

## 10. ANTENNA REQUIREMENTS

### 10.1. Limit


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

### 10.2. Test Result

The antennas used for this product is integral antenna ,so compliance with antenna requirements.  
( Please refer to the EUT photo for details)

# 11. TEST SETUP PHOTO

Conducted Test

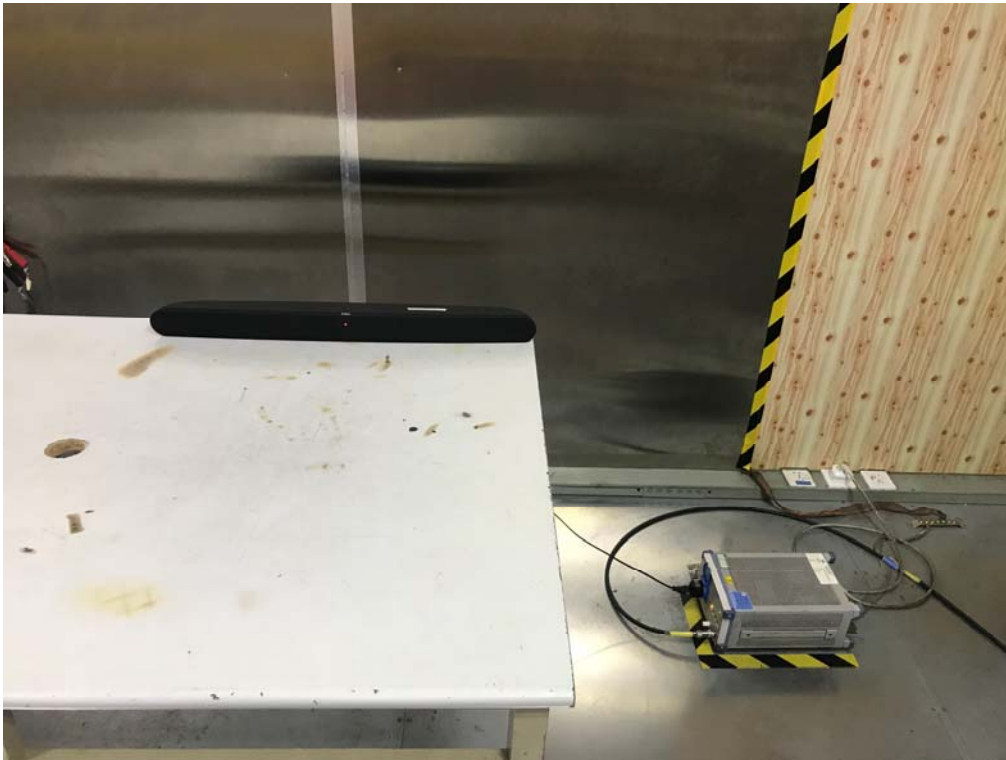



**Radiated Test (Below 1GHz)**



**Radiated Test (Above 1GHz)**




## 12.EUT PHOTO

External Photos  
M/N: TS6110





**External Photos**  
M/N: TS6110

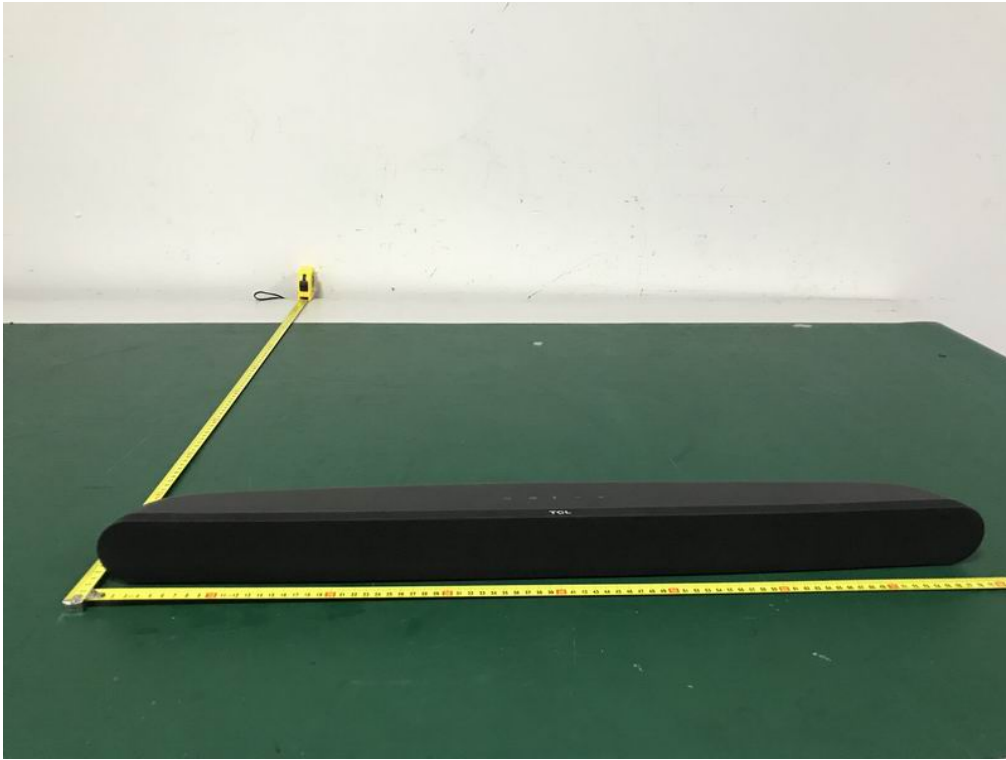


**External Photos**  
M/N: TS6110





**External Photos**  
M/N: TS6110



**Internal Photos**  
M/N: TS6110


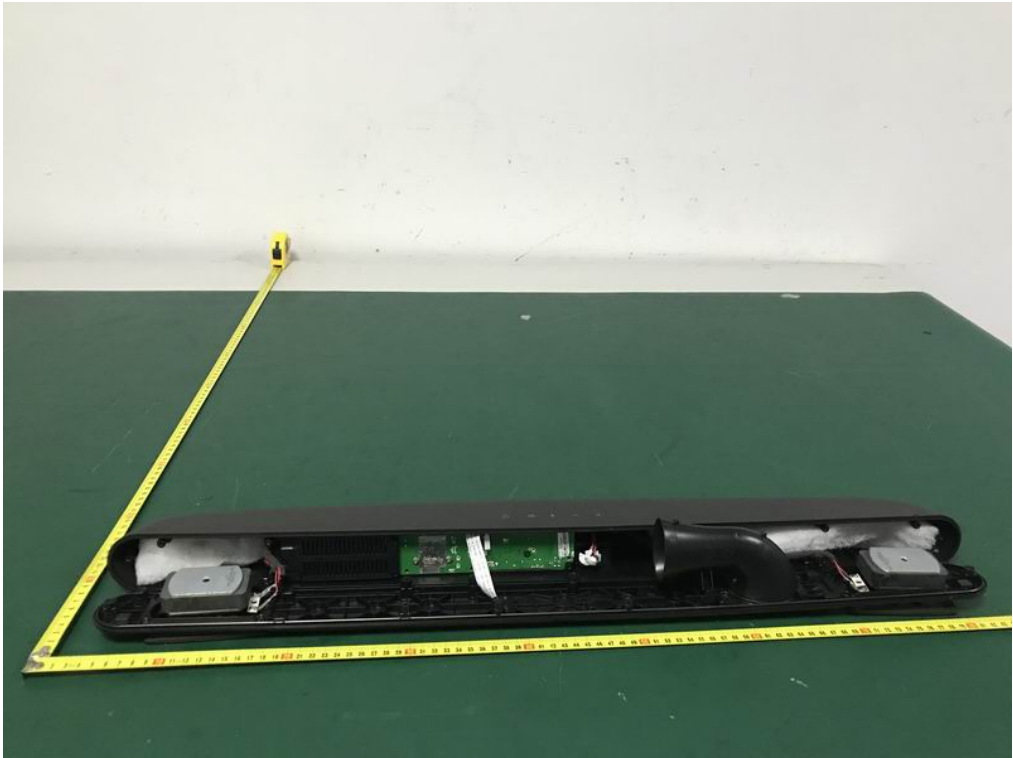


**Internal Photos**  
M/N: TS6110

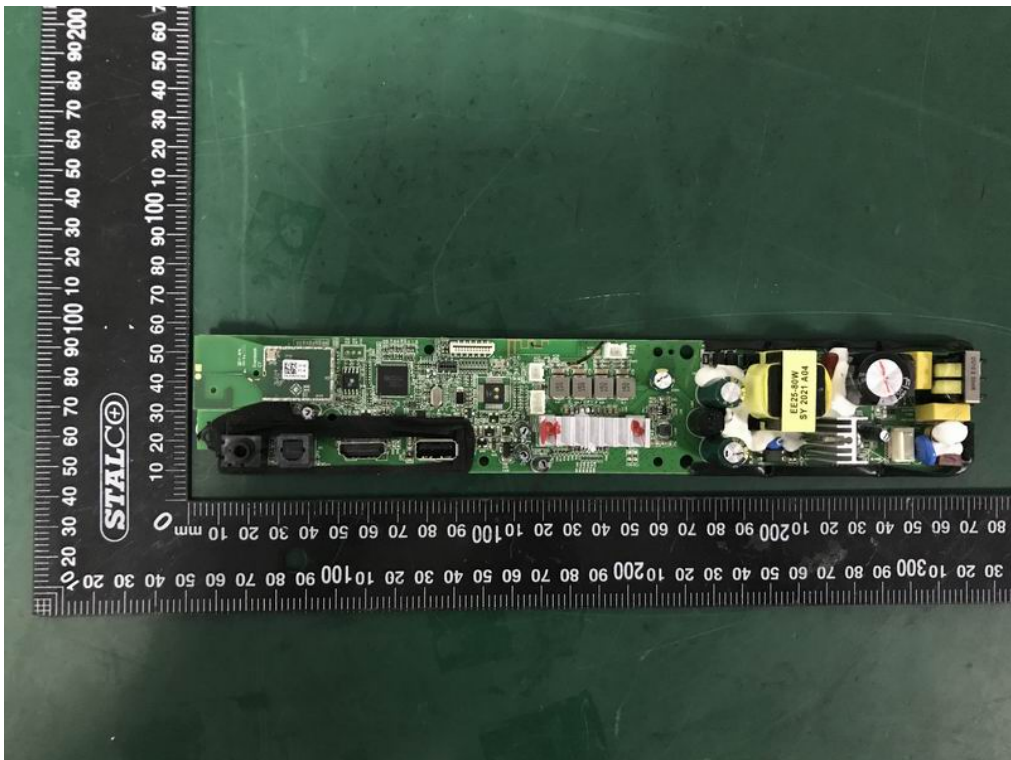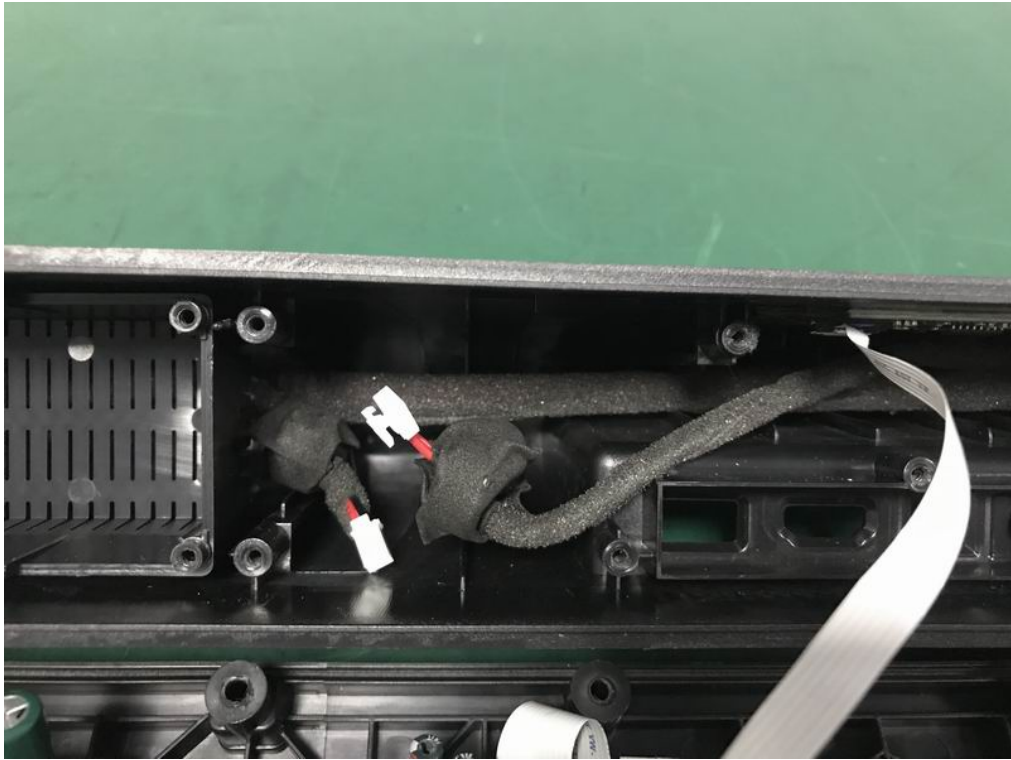





**Internal Photos**  
M/N: TS6110

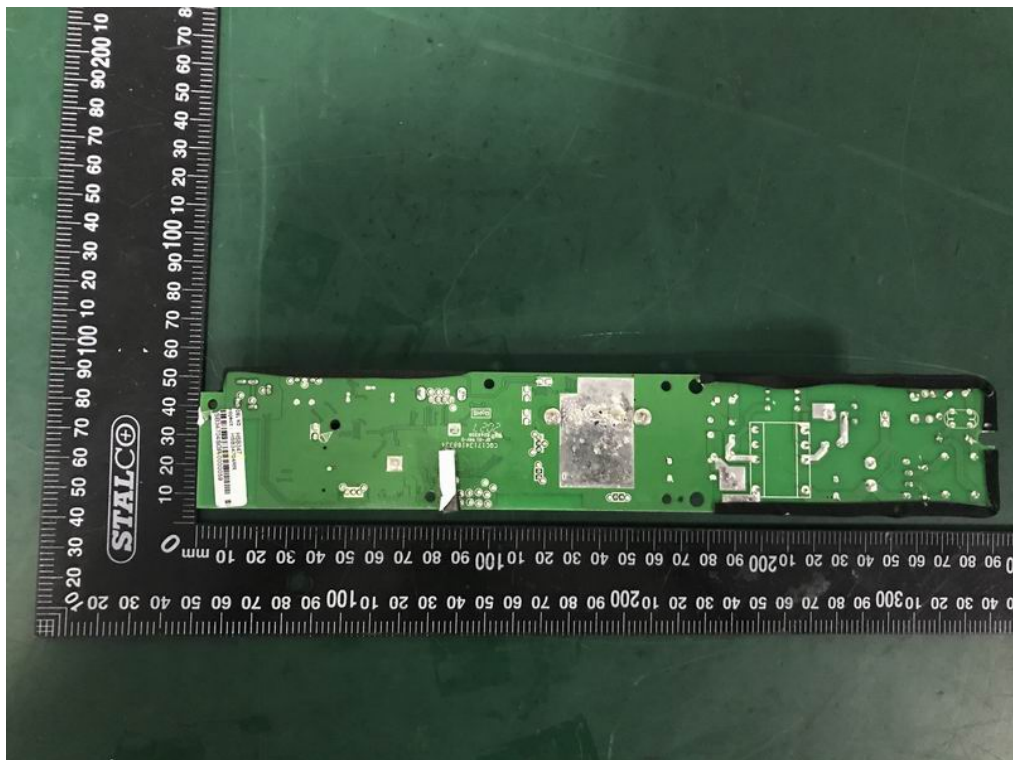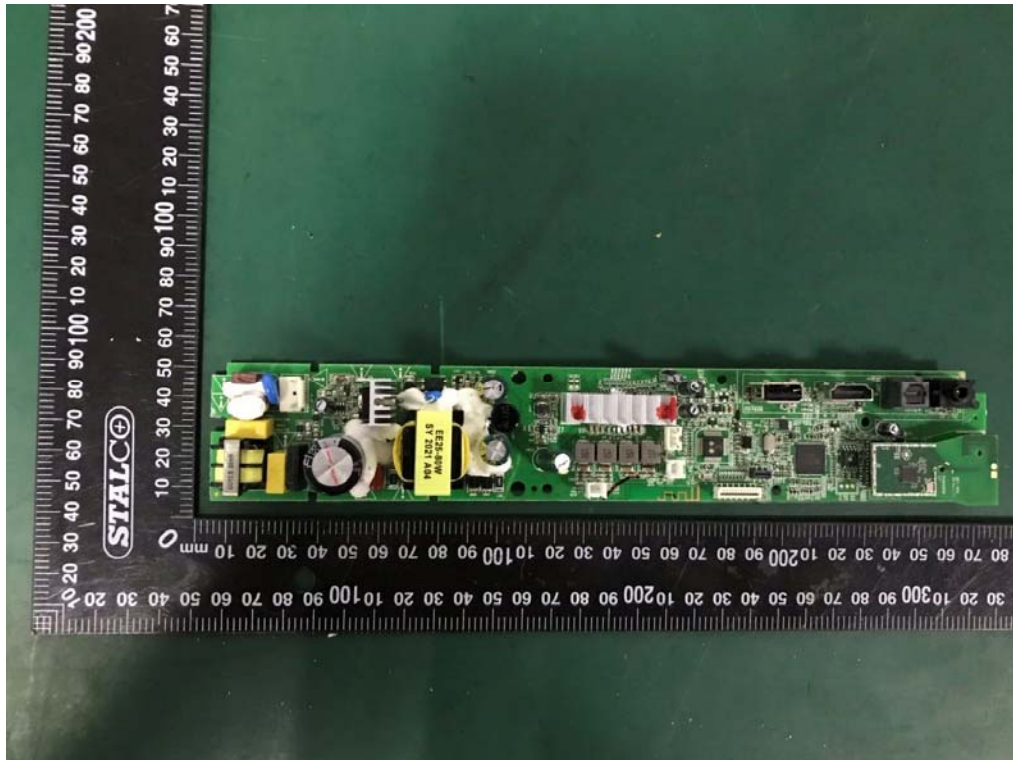



Internal Photos

M/N: TS6110

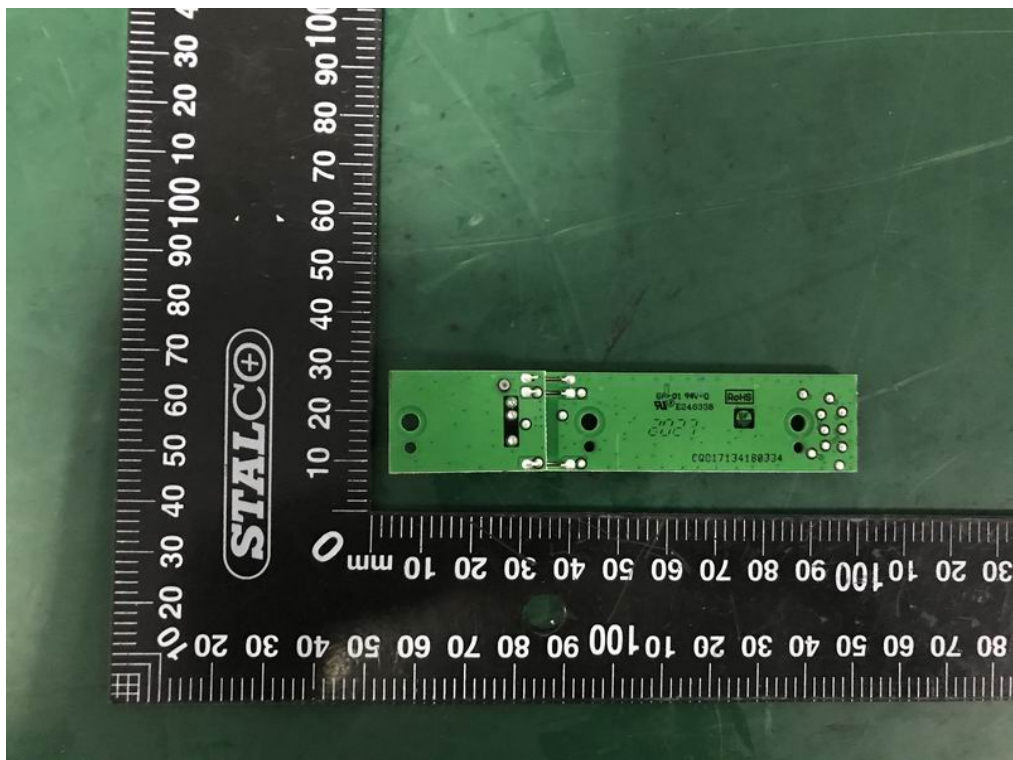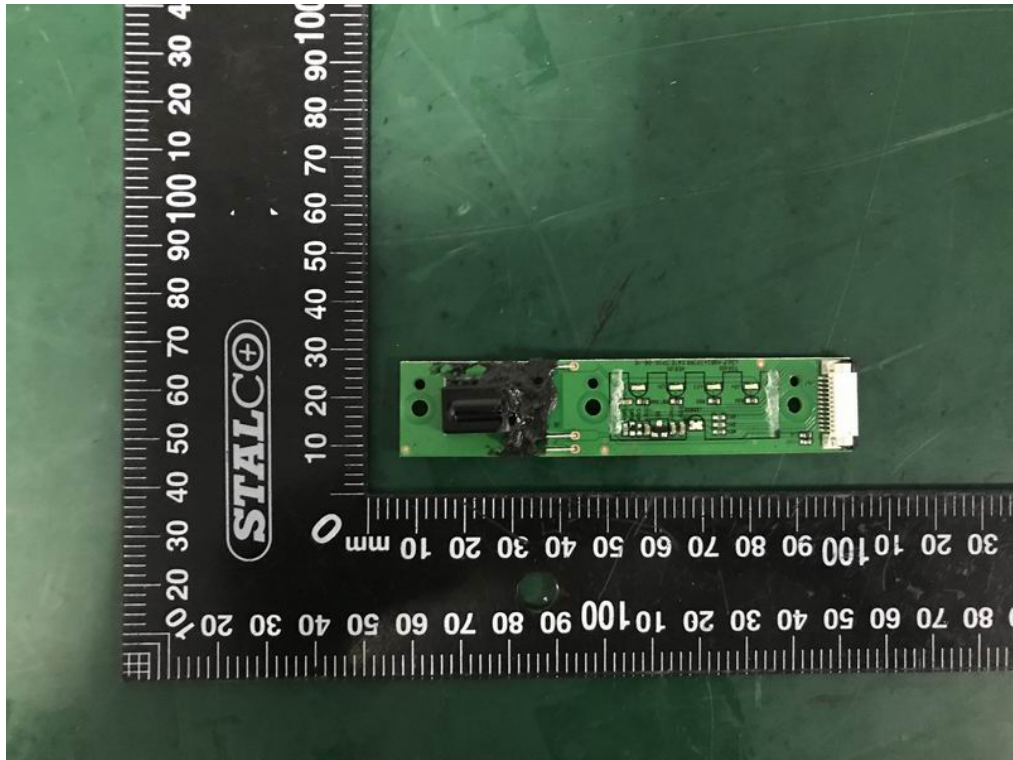





**Internal Photos**  
M/N: TS6110

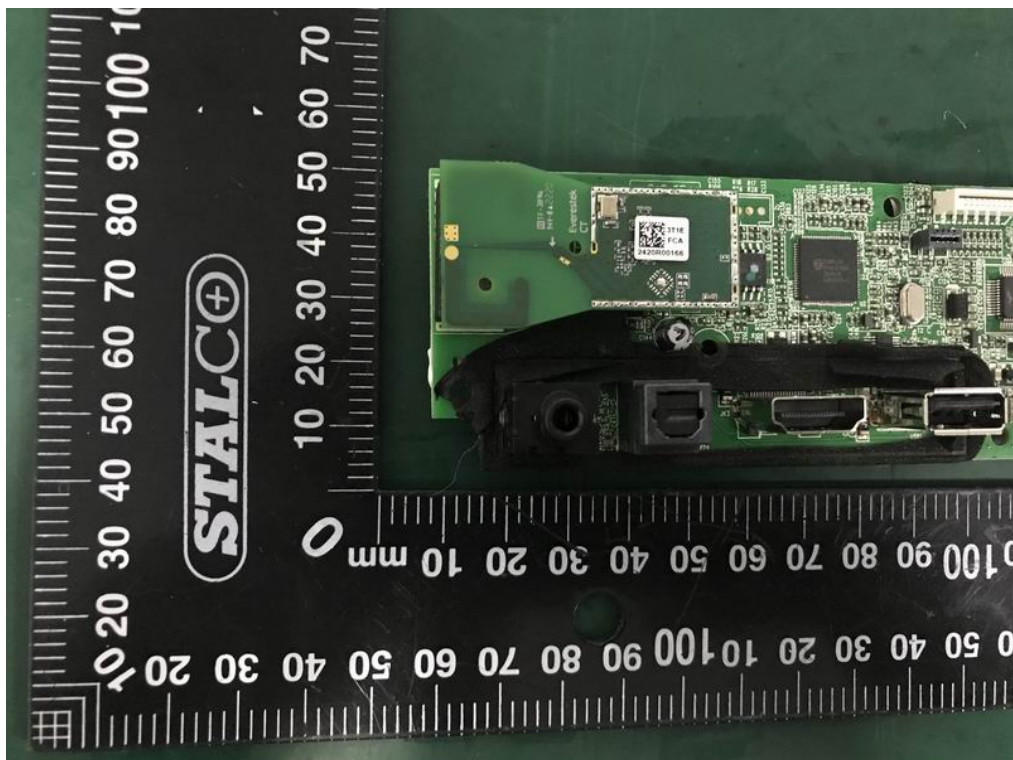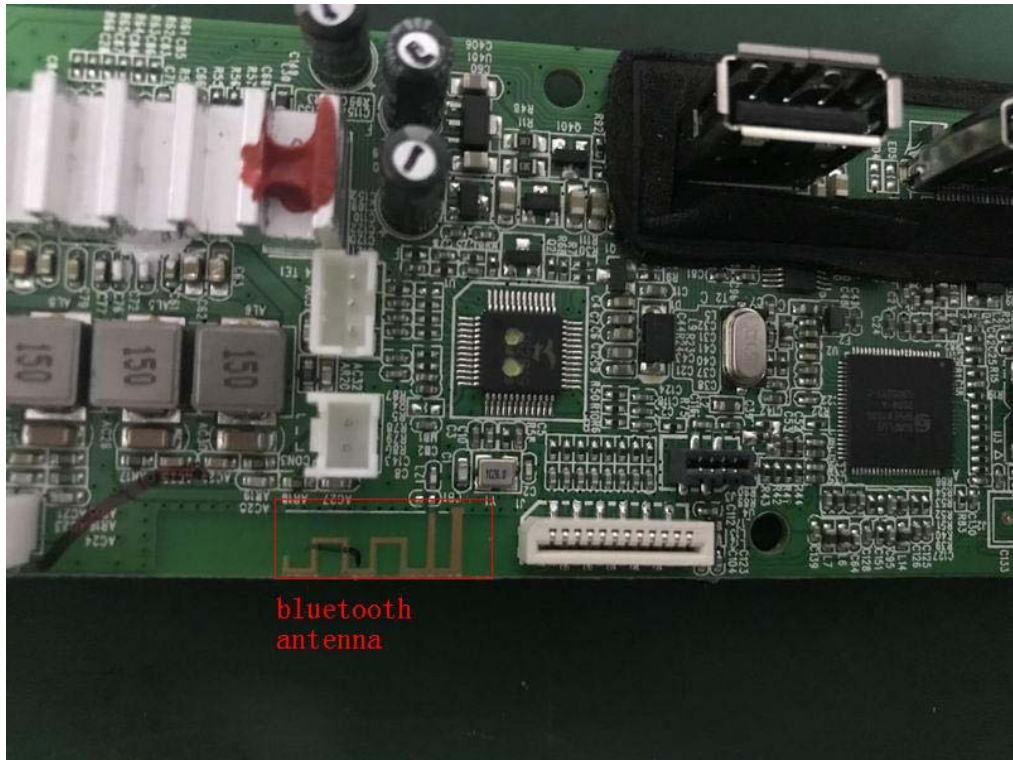



**Internal Photos**  
M/N: TS6110

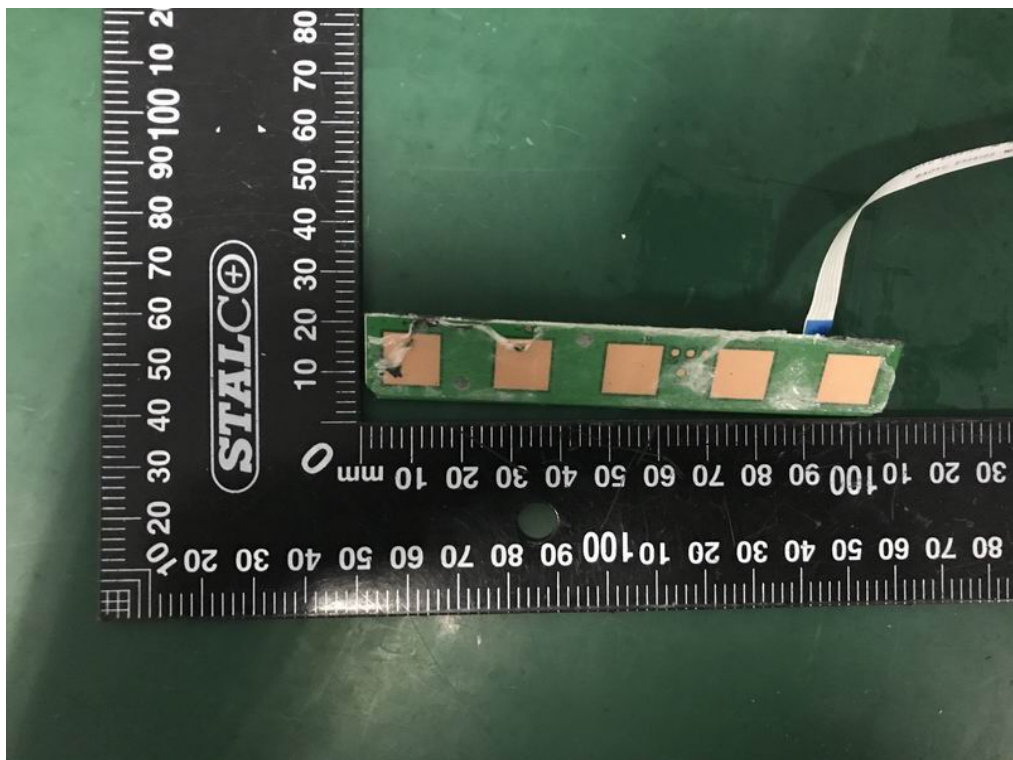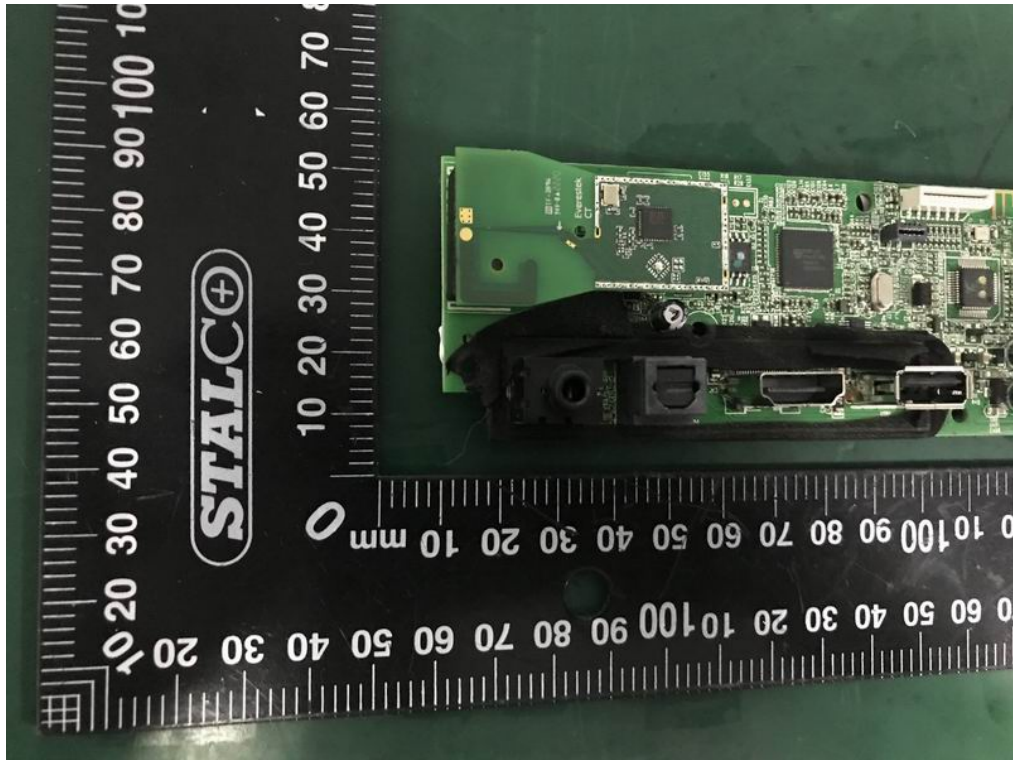


**Internal Photos**  
M/N: TS6110



**Internal Photos**

M/N: TS6110

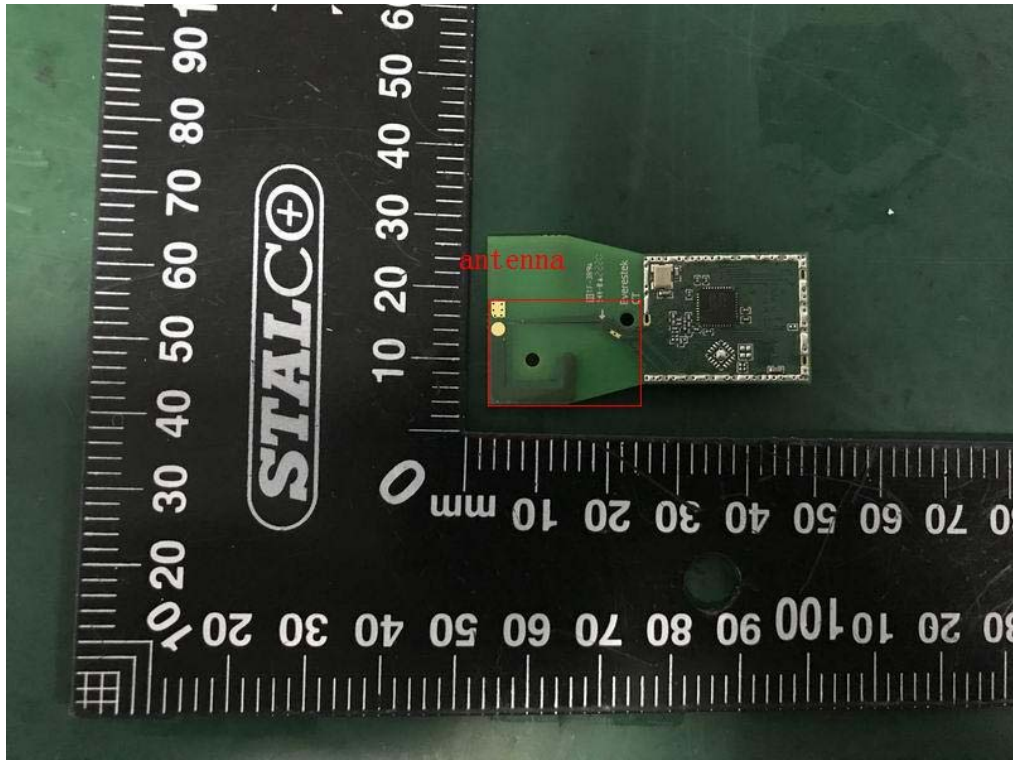

**End of Test Report**